




### Min emission bandwidth

#### Test Result B4

TestMode	Antenna	Freq(MHz)	6dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	15.64	5737.24	5752.88	0.5	PASS
		5785	16.32	5776.84	5793.16	0.5	PASS
		5825	15.32	5817.24	5832.56	0.5	PASS
11AC20SISO	Ant1	5745	16.80	5736.60	5753.40	0.5	PASS
		5785	17.28	5776.24	5793.52	0.5	PASS
		5825	15.96	5816.60	5832.56	0.5	PASS
11AC40SISO	Ant1	5755	35.12	5737.48	5772.60	0.5	PASS
		5795	35.76	5776.84	5812.60	0.5	PASS
11AC80SISO	Ant1	5775	75.20	5737.40	5812.60	0.5	PASS




Test Graphs B4

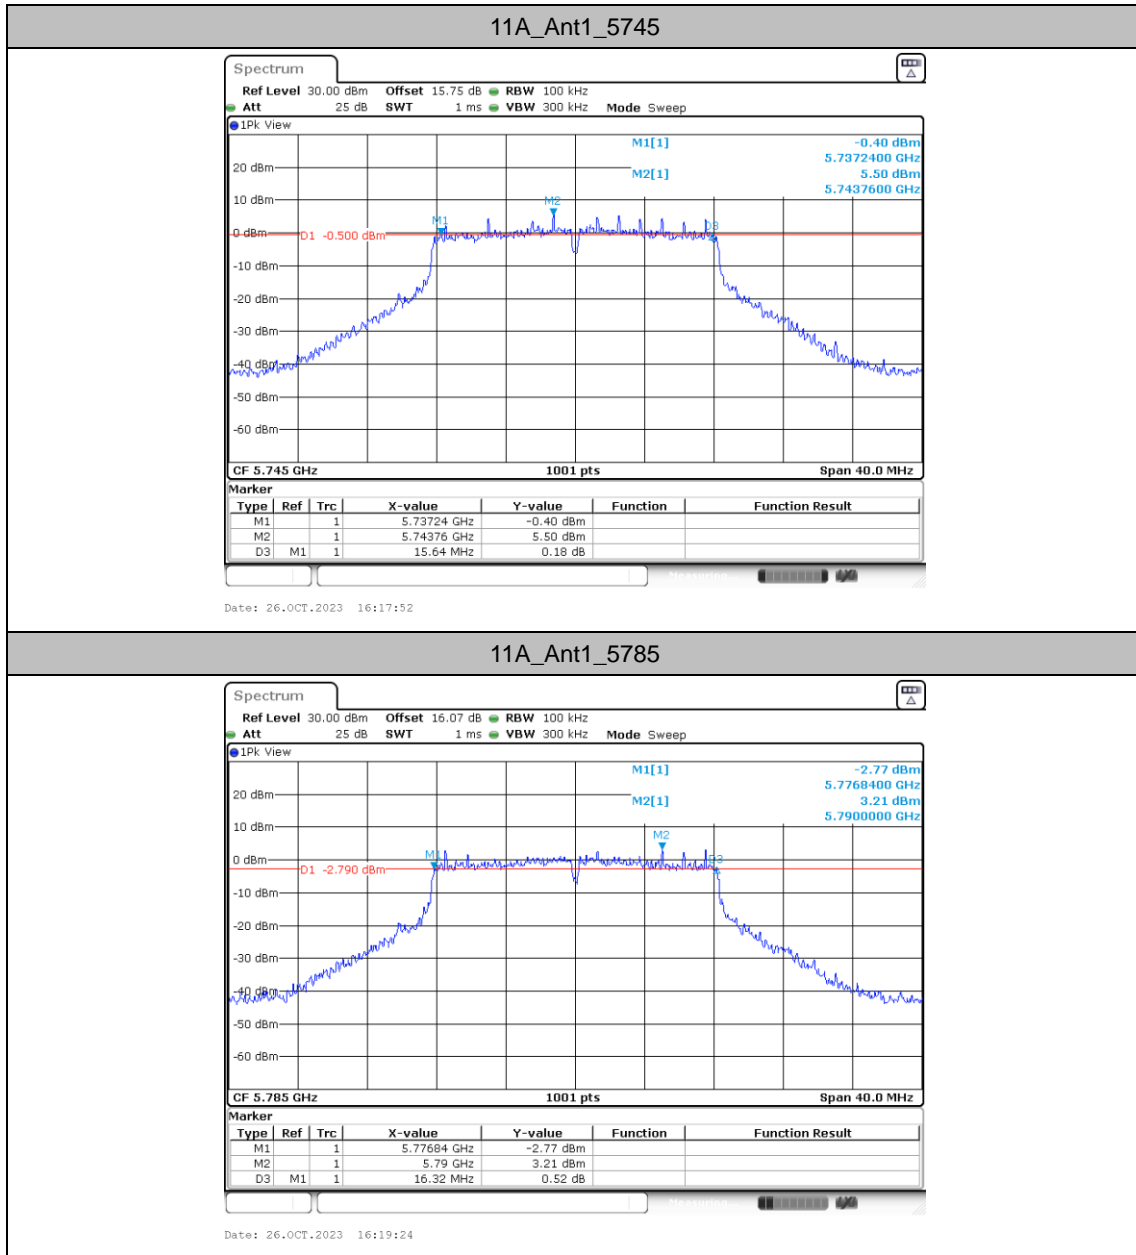




11A\_Ant1\_5825

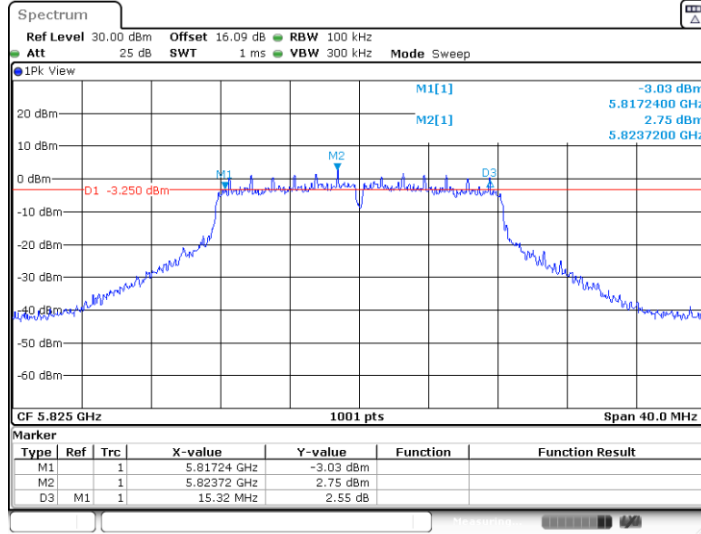



Date: 26.OCT.2023 16:20:58

11AC20SISO\_Ant1\_5745

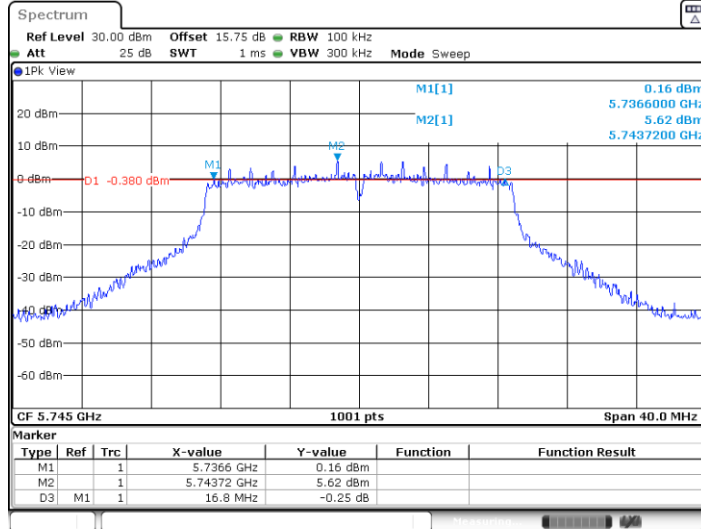


Date: 26.OCT.2023 16:35:31

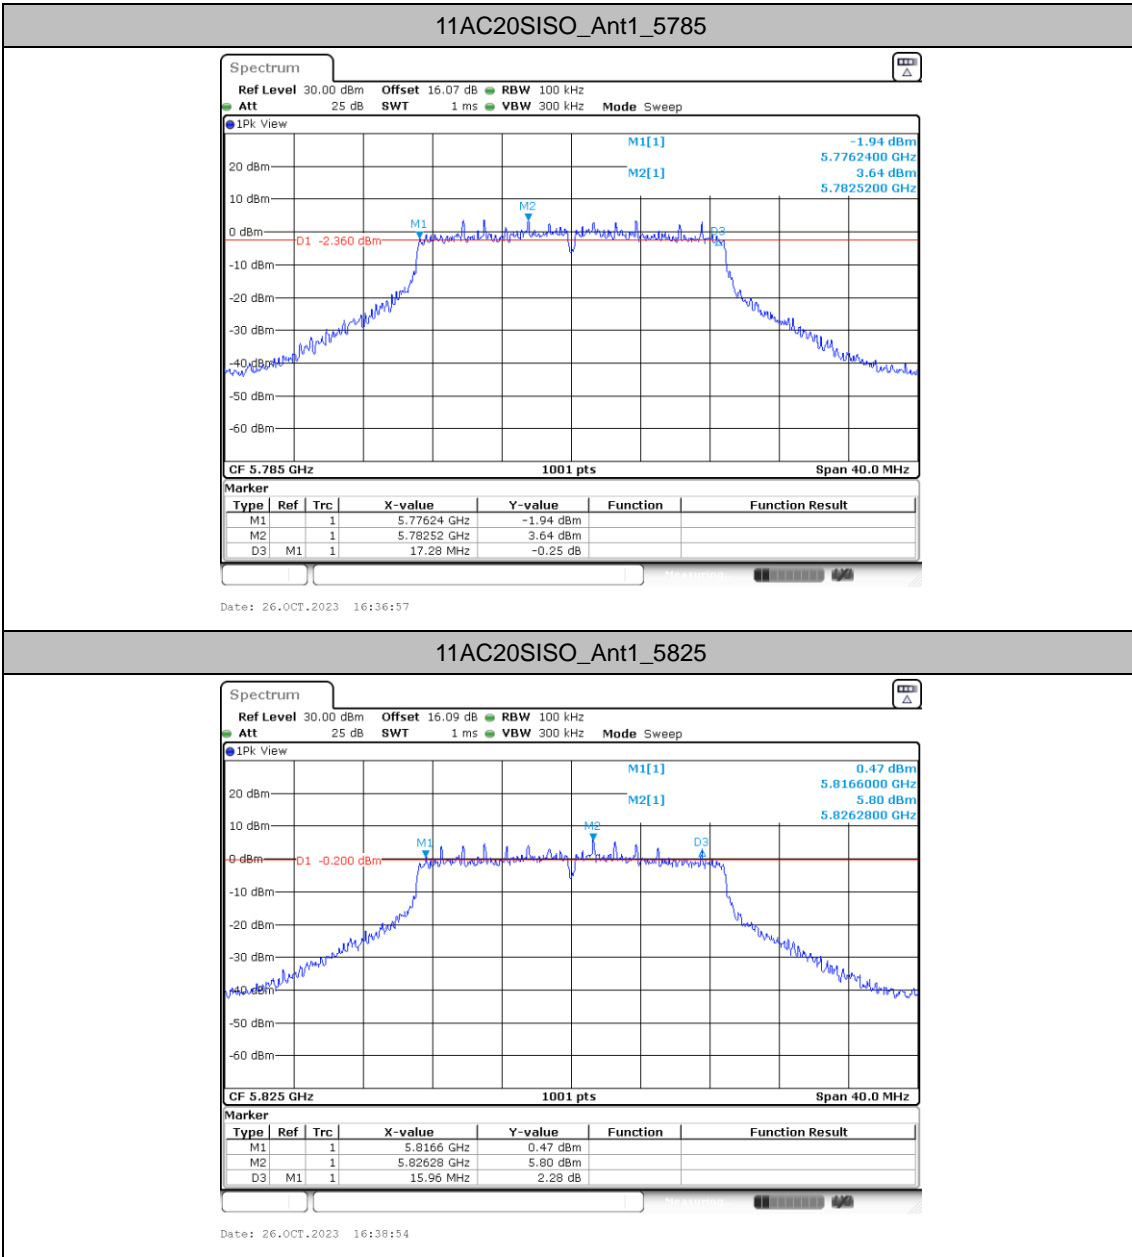

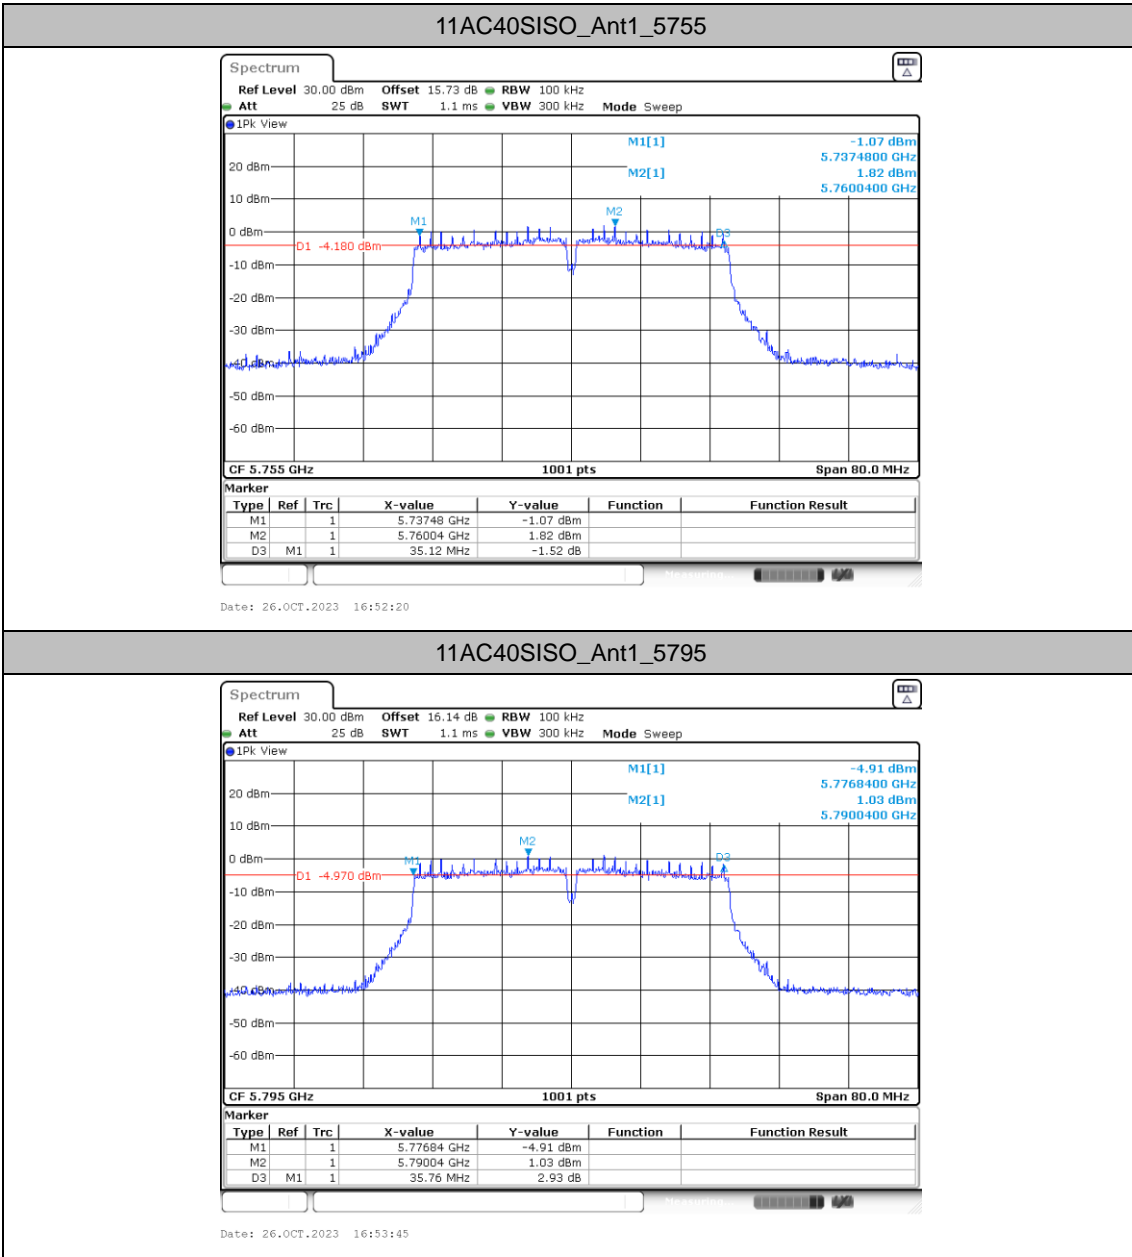



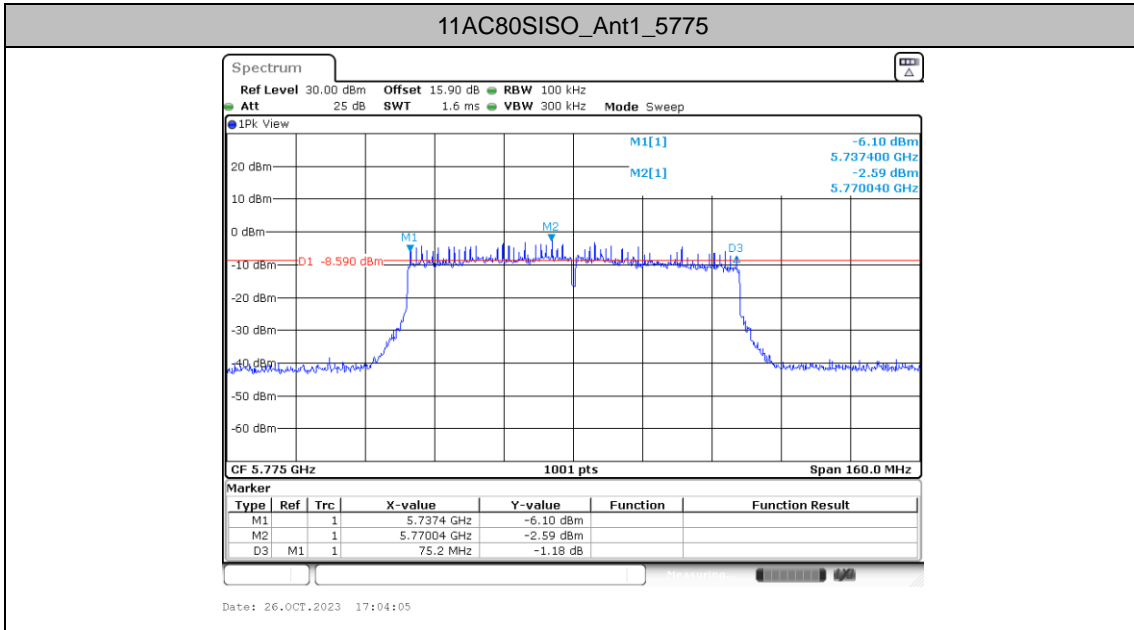



Maximum power spectral density

Test Result


TestMode	Antenna	Freq(MHz)	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	4.3	≤11.00	PASS
		5220	3.64	≤11.00	PASS
		5240	3.96	≤11.00	PASS
		5260	3.63	≤11.00	PASS
		5300	4.03	≤11.00	PASS
		5320	3.5	≤11.00	PASS
		5500	5.28	≤11.00	PASS
		5580	3.59	≤11.00	PASS
		5700	4.35	≤11.00	PASS
		5720_UNII-2C	4.46	≤11.00	PASS
		5720_UNII-3	0.13	≤30.00	PASS
		5745	1.9	≤30.00	PASS
		5785	0.9	≤30.00	PASS
		5825	-1.1	≤30.00	PASS
11AC20SISO	Ant1	5180	3.95	≤11.00	PASS
		5220	3.36	≤11.00	PASS
		5240	3.69	≤11.00	PASS
		5260	3.31	≤11.00	PASS
		5300	3.76	≤11.00	PASS
		5320	3.2	≤11.00	PASS
		5500	5.01	≤11.00	PASS
		5580	4.42	≤11.00	PASS
		5700	4.09	≤11.00	PASS
		5720_UNII-2C	4.27	≤11.00	PASS
		5720_UNII-3	0.01	≤30.00	PASS
		5745	1.53	≤30.00	PASS
		5785	0.72	≤30.00	PASS
		5825	1.45	≤30.00	PASS
11AC40SISO	Ant1	5190	-0.01	≤11.00	PASS
		5230	-0.33	≤11.00	PASS
		5270	0.26	≤11.00	PASS
		5310	-1.42	≤11.00	PASS
		5510	0.66	≤11.00	PASS
		5550	0.29	≤11.00	PASS
		5670	1.2	≤11.00	PASS
		5710_UNII-2C	0.84	≤11.00	PASS
		5710_UNII-3	-3.8	≤30.00	PASS
		5755	-2.11	≤30.00	PASS
5795	-2.88	≤30.00	PASS		
11AC80SISO	Ant1	5210	3.68	≤11.00	PASS
		5290	-5.02	≤11.00	PASS
		5530	-4.99	≤11.00	PASS
		5610	-5.76	≤11.00	PASS
		5690_UNII-2C	2.36	≤11.00	PASS
		5690_UNII-3	-1.6	≤30.00	PASS
		5775	-7.6	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.The Duty Cycle Factor and is compensated in the graph.




### Test Graphs

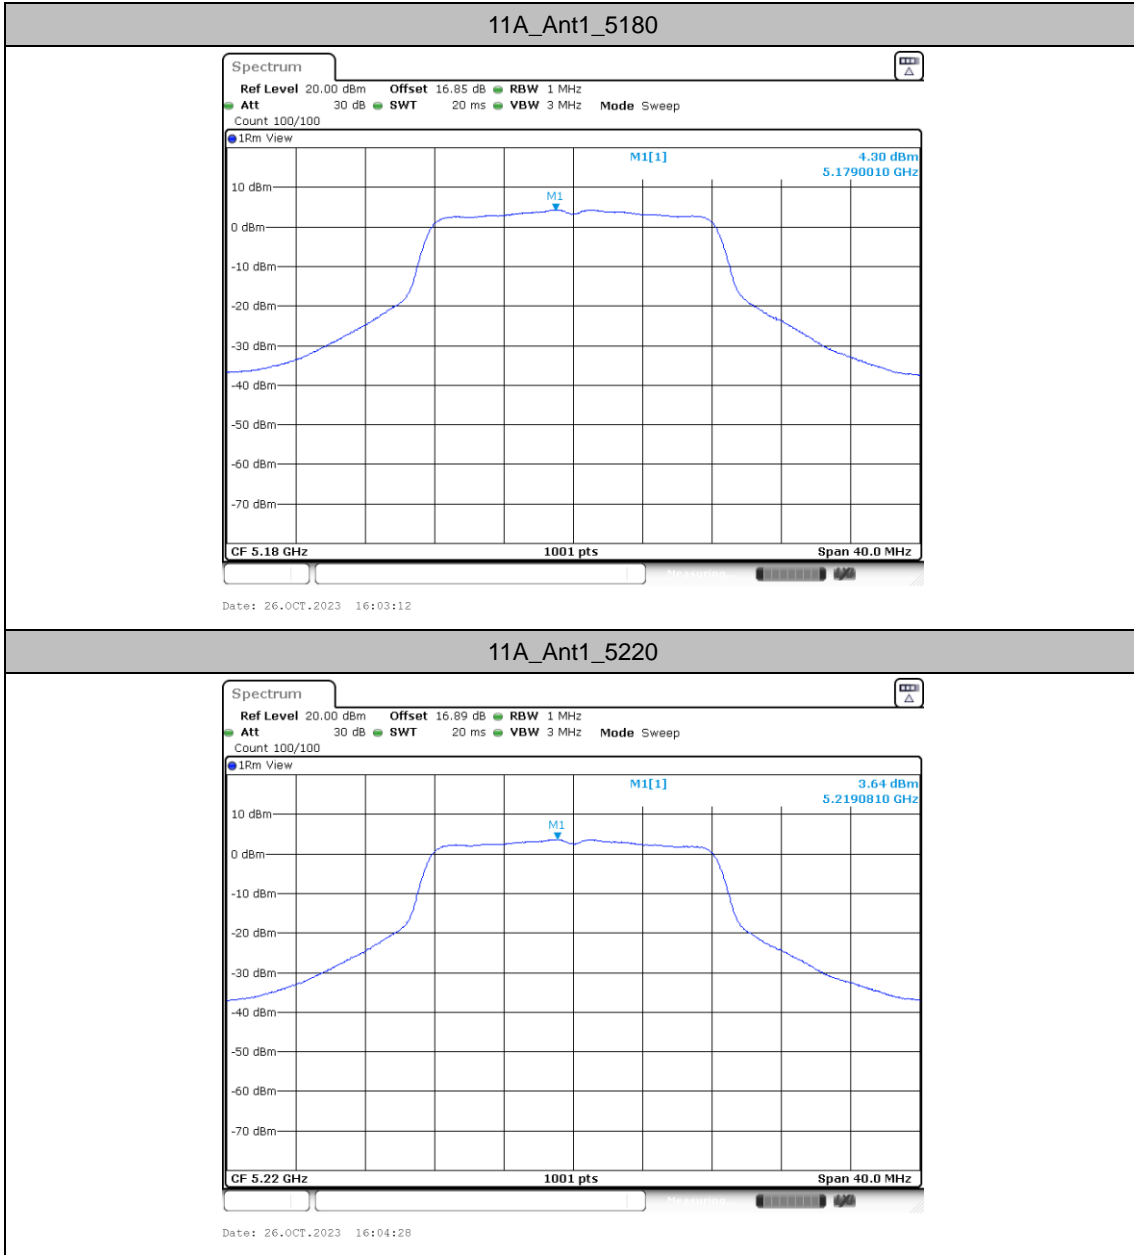




11A\_Ant1\_5240


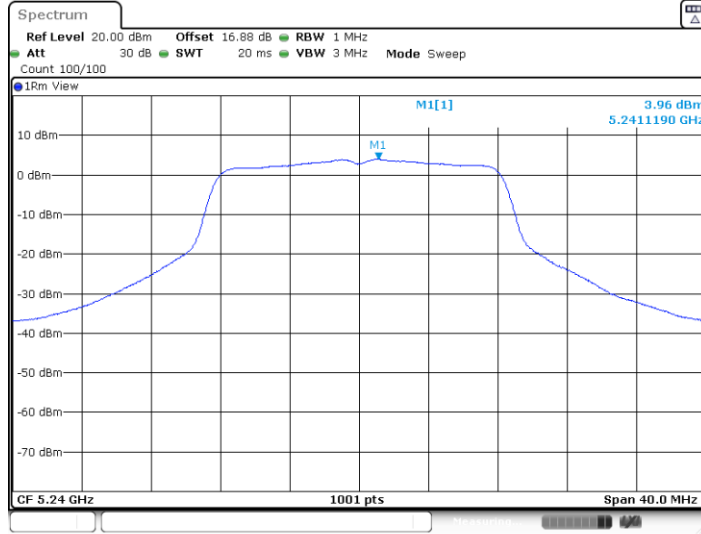



Date: 26.OCT.2023 16:07:08

11A\_Ant1\_5260

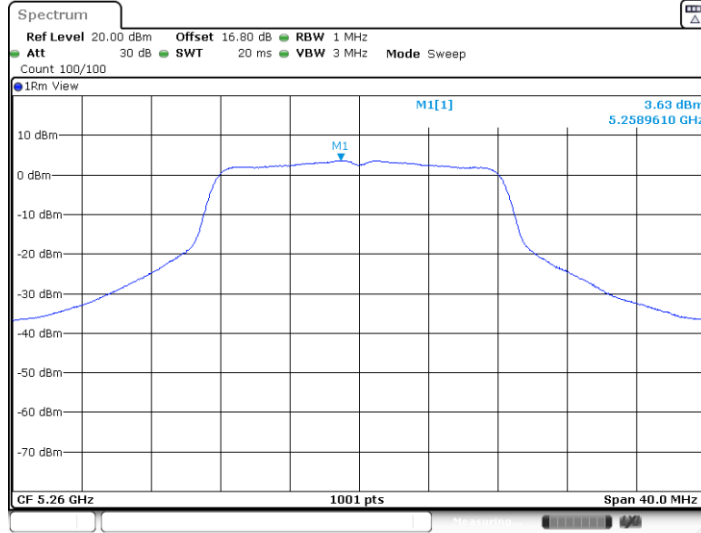


Date: 26.OCT.2023 16:08:47

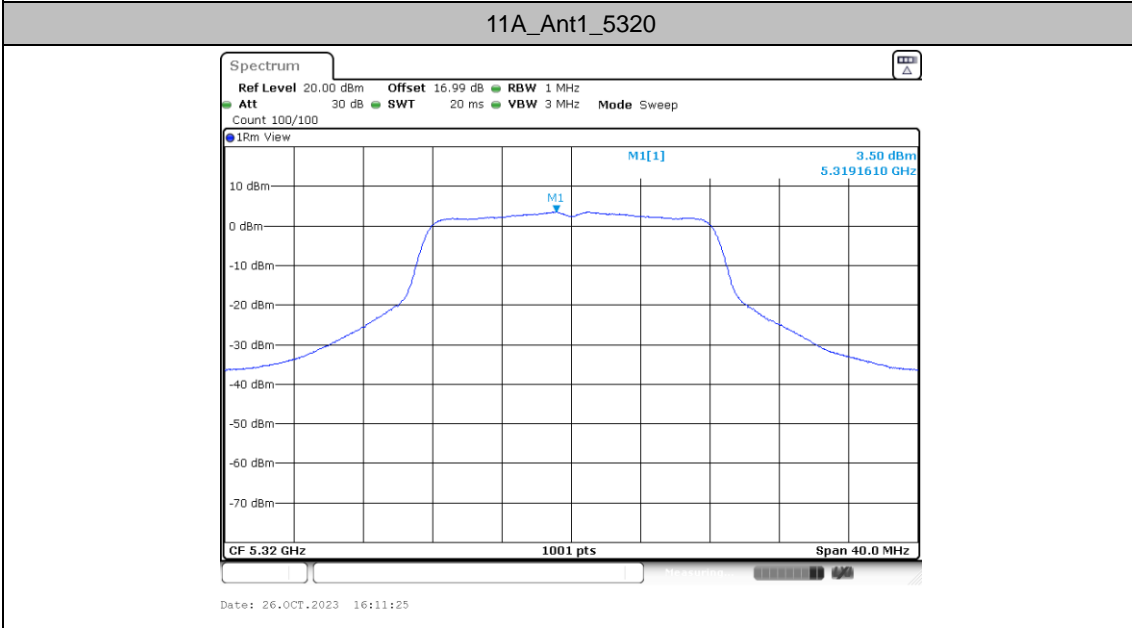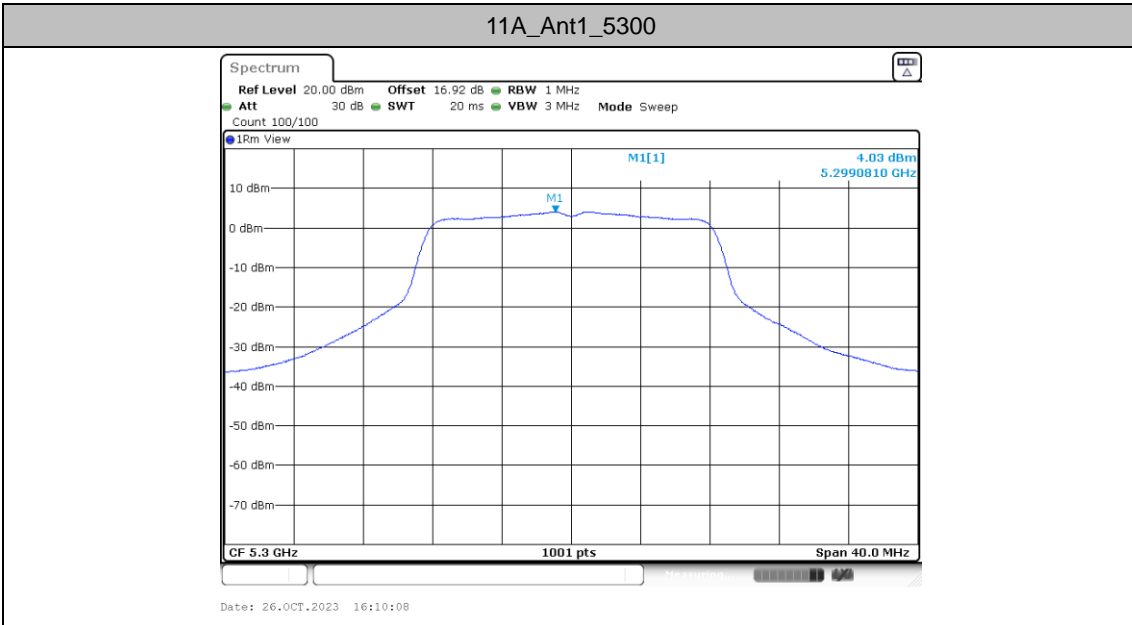

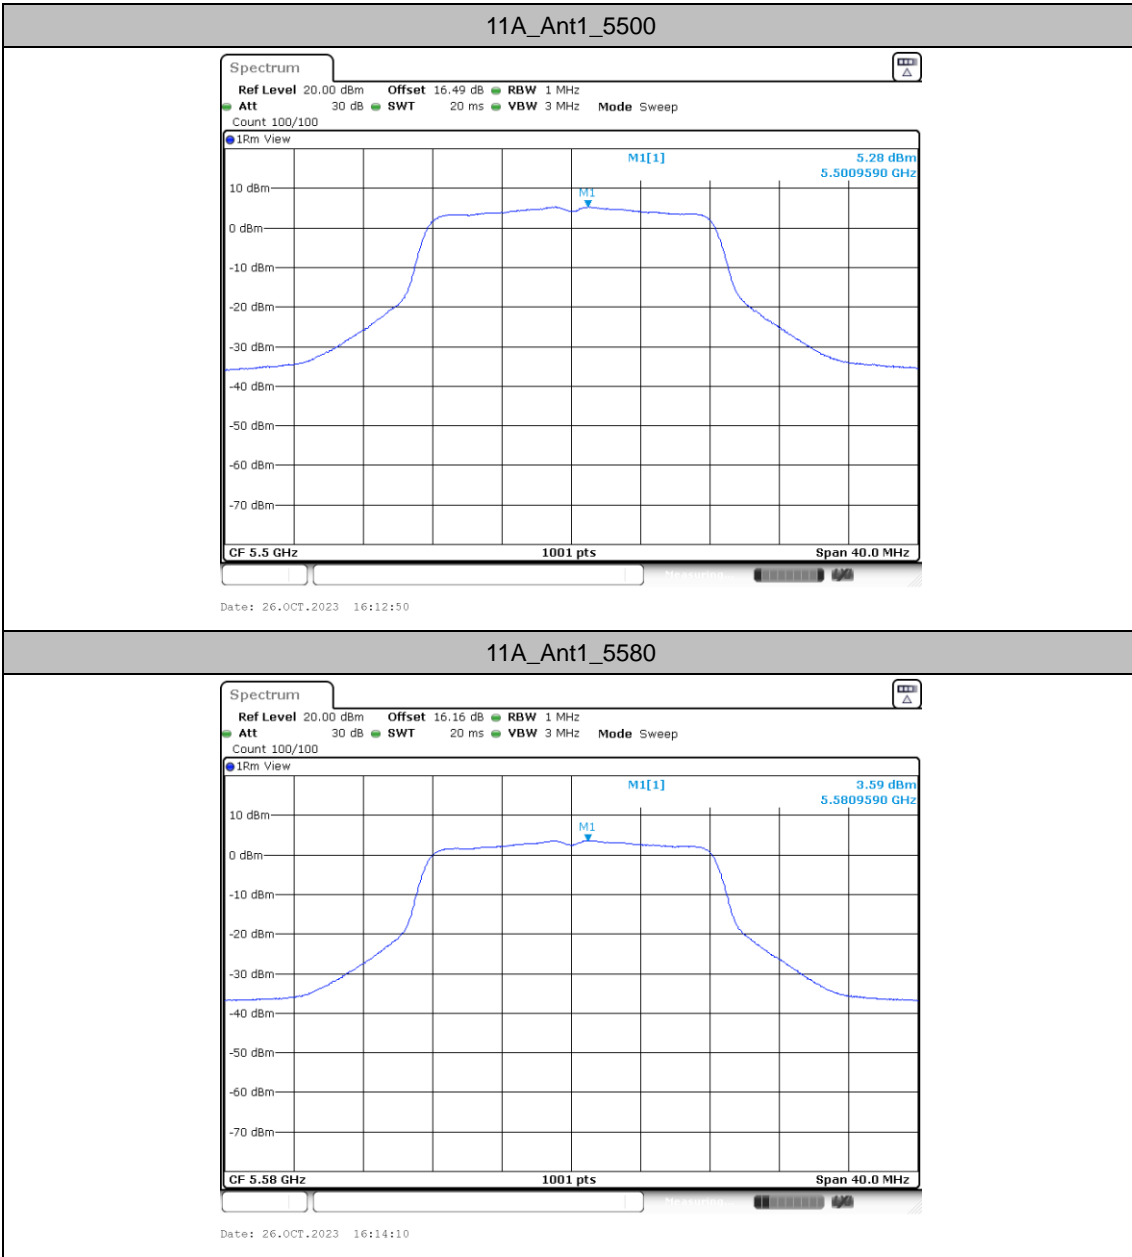




11A\_Ant1\_5700


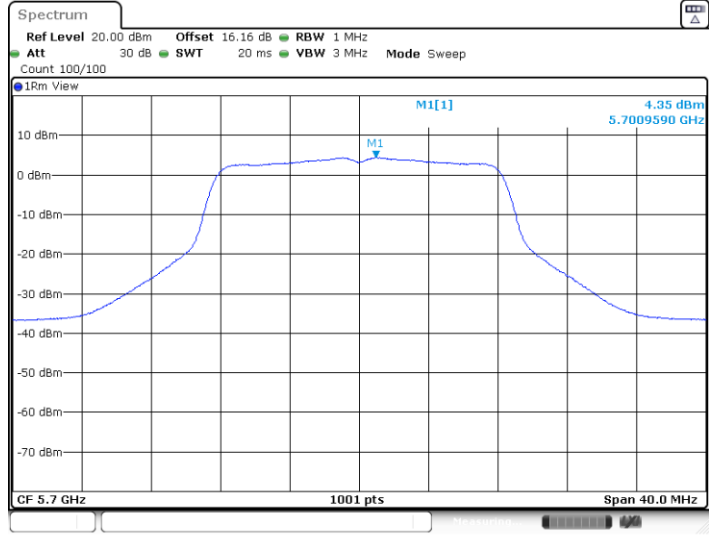


Date: 26.OCT.2023 16:15:39

11A\_Ant1\_5720\_UNII-2C

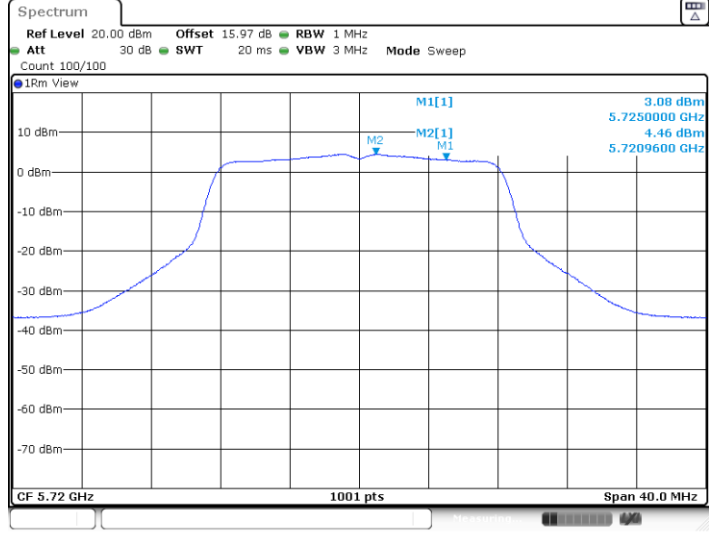


Date: 26.OCT.2023 16:16:53

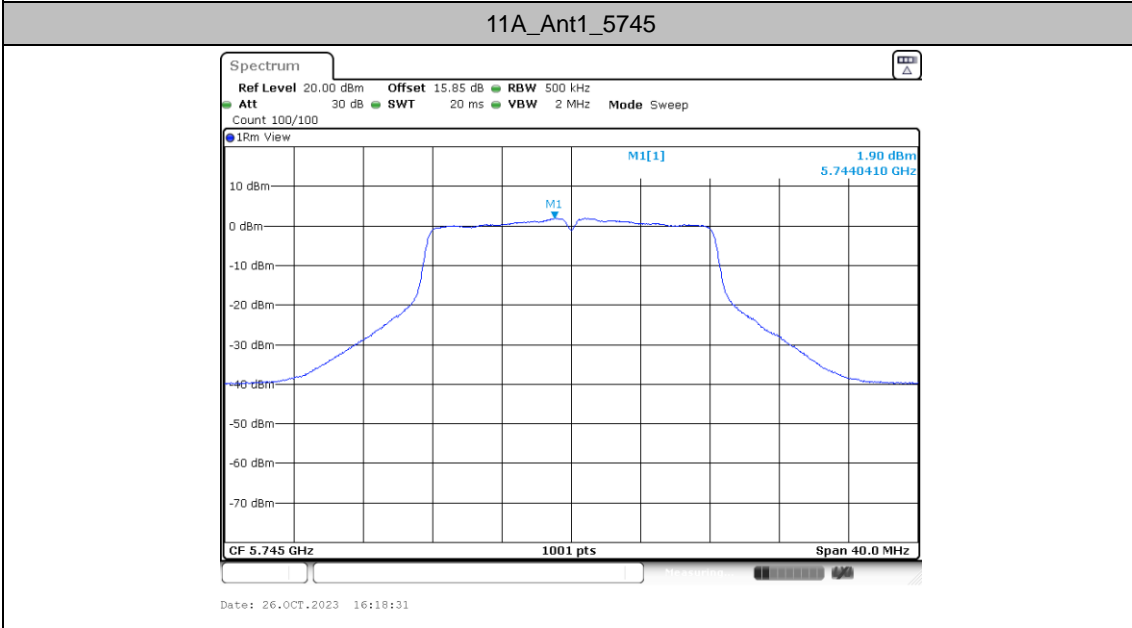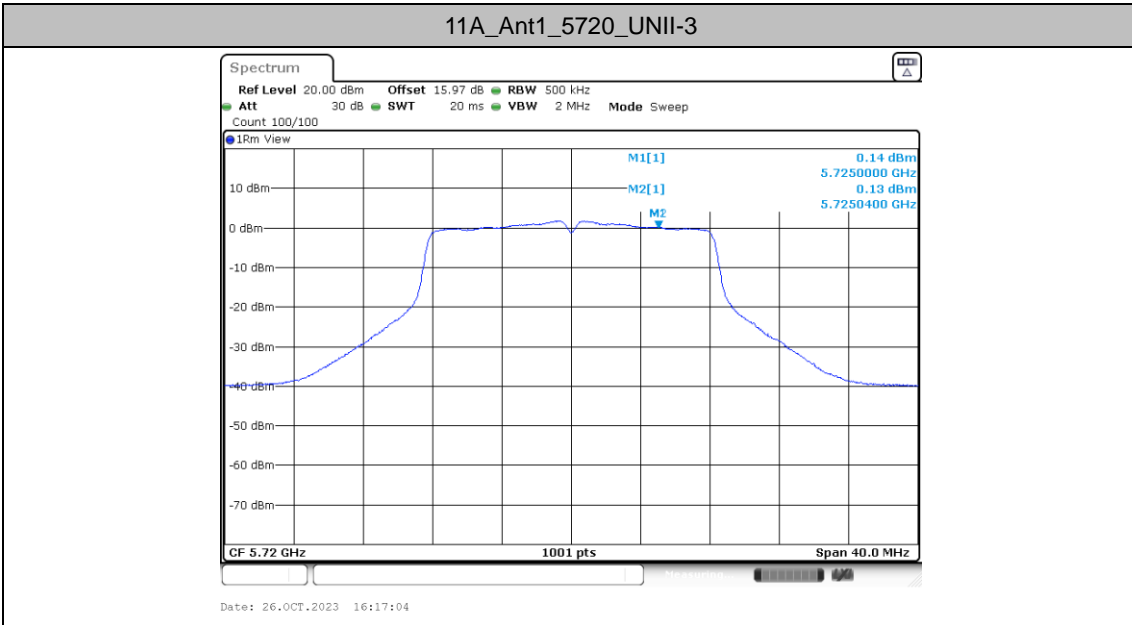








11A\_Ant1\_5785

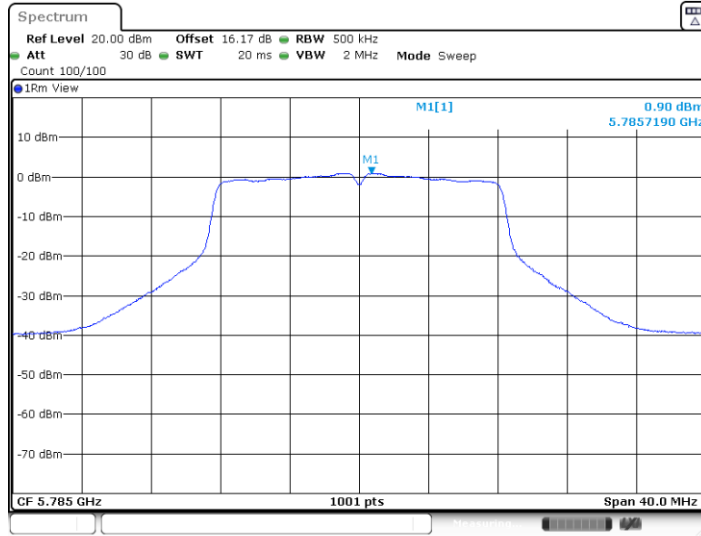

11A\_Ant1\_5825

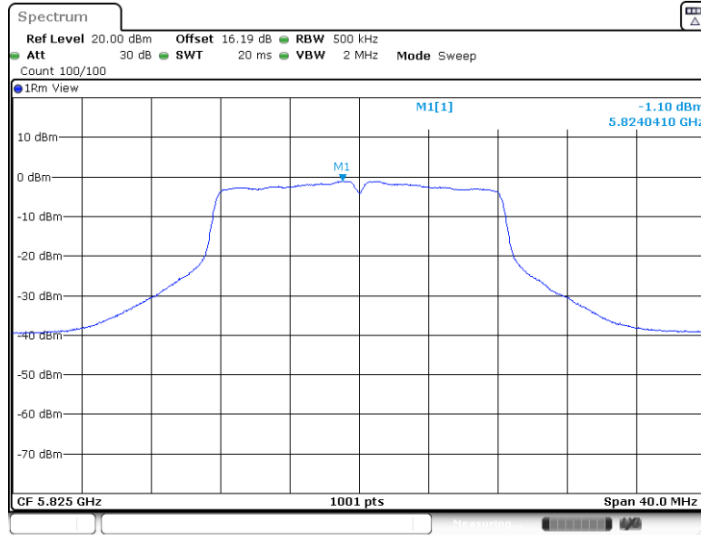


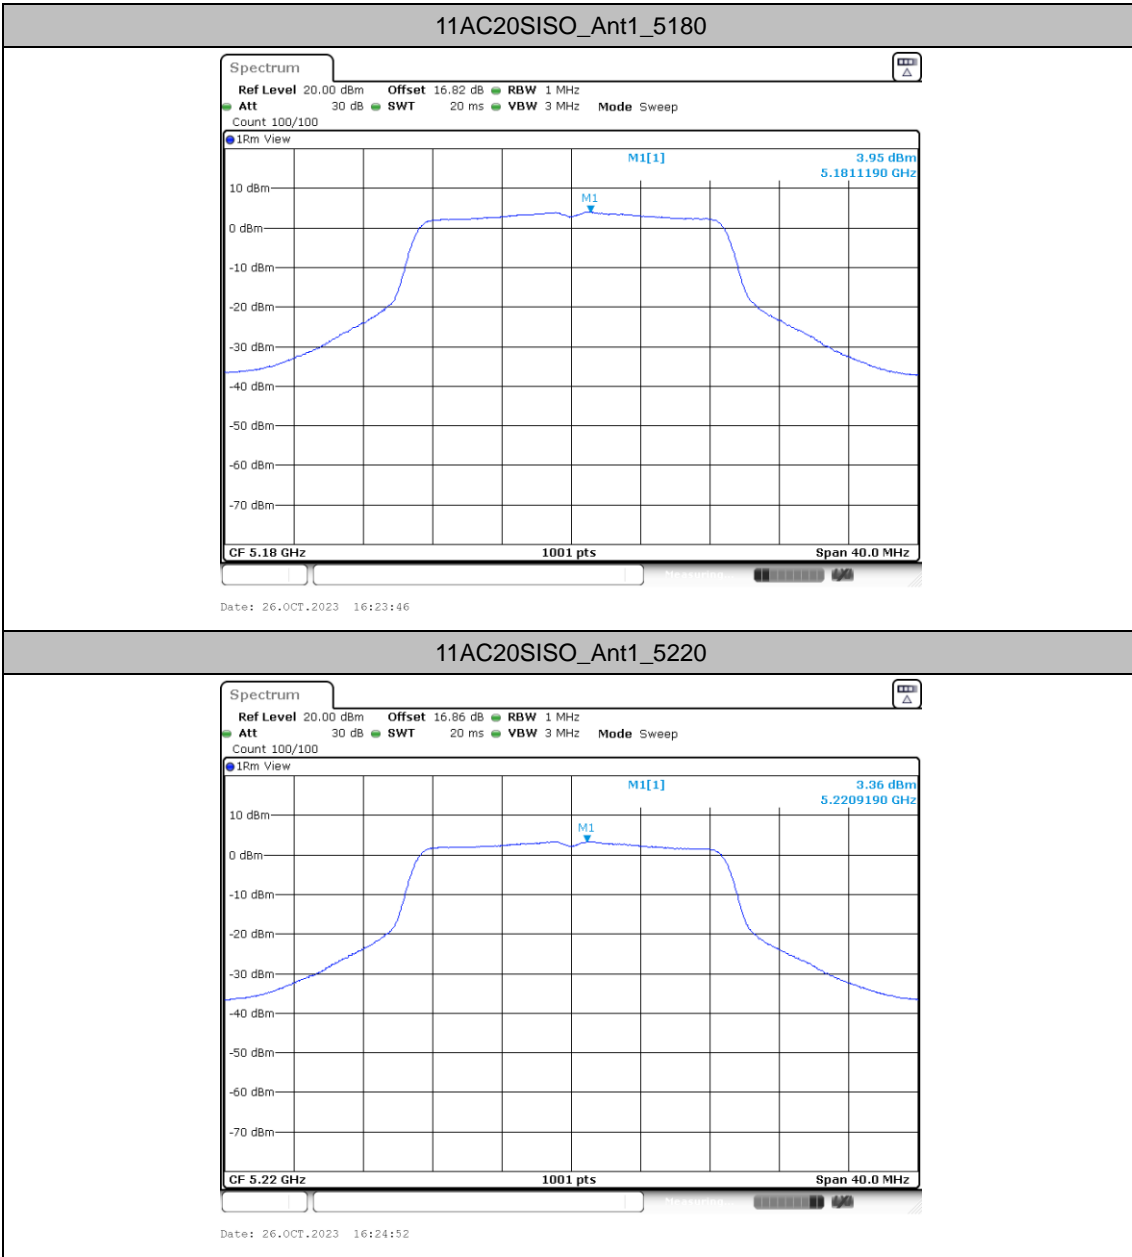

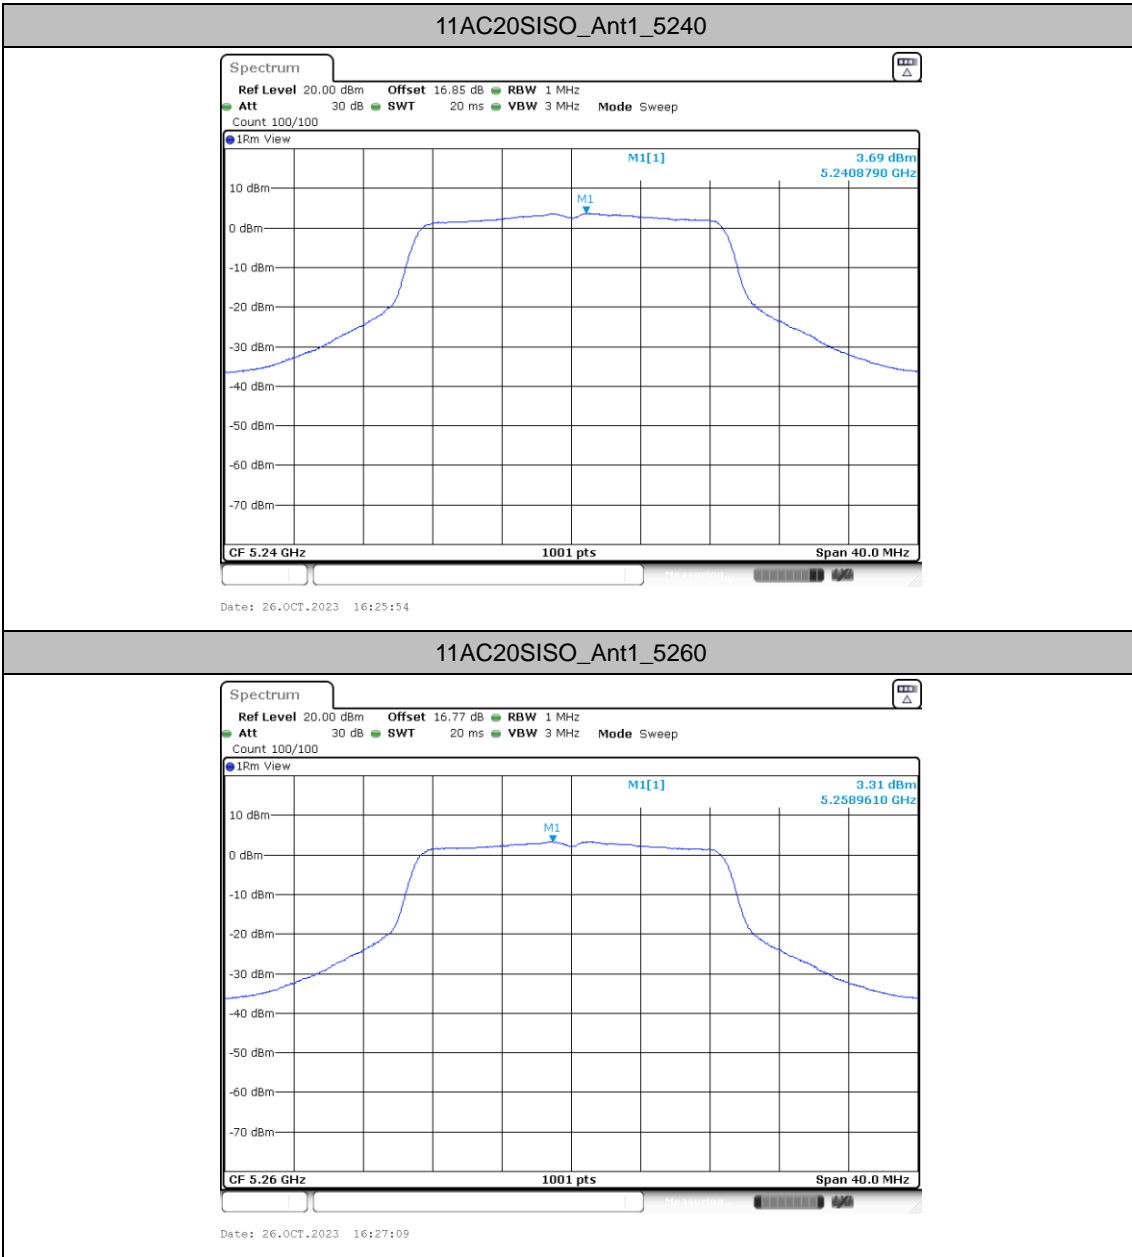




11AC20SISO\_Ant1\_5300

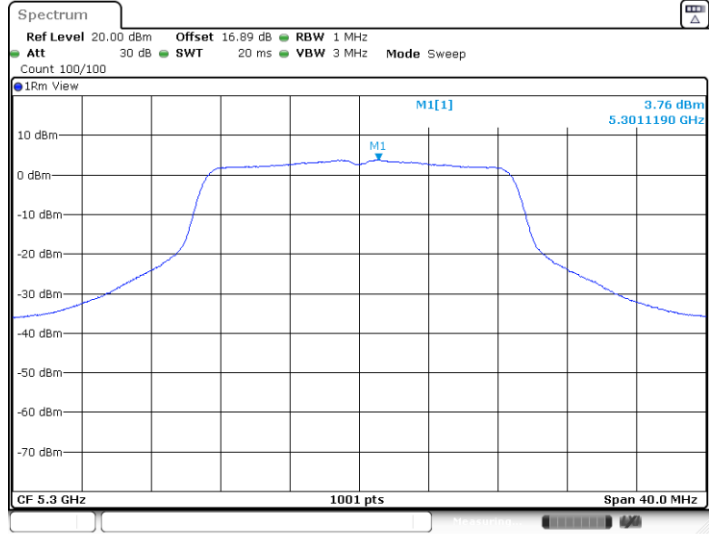




Date: 26.OCT.2023 16:28:16


11AC20SISO\_Ant1\_5320

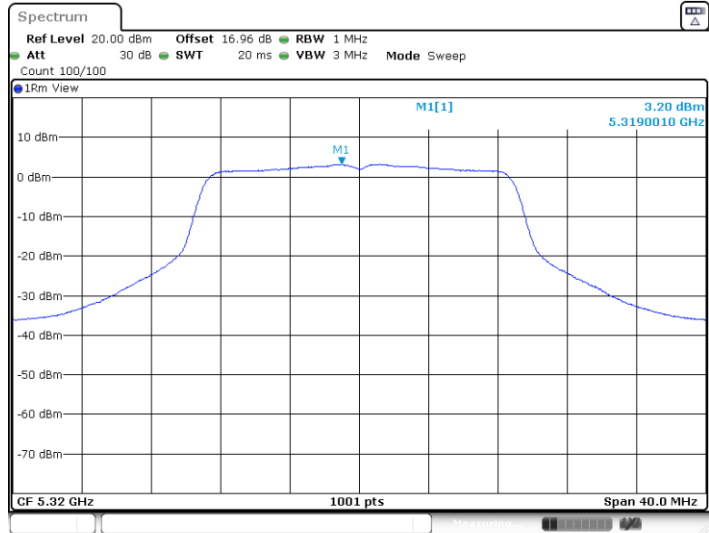


Date: 26.OCT.2023 16:29:29

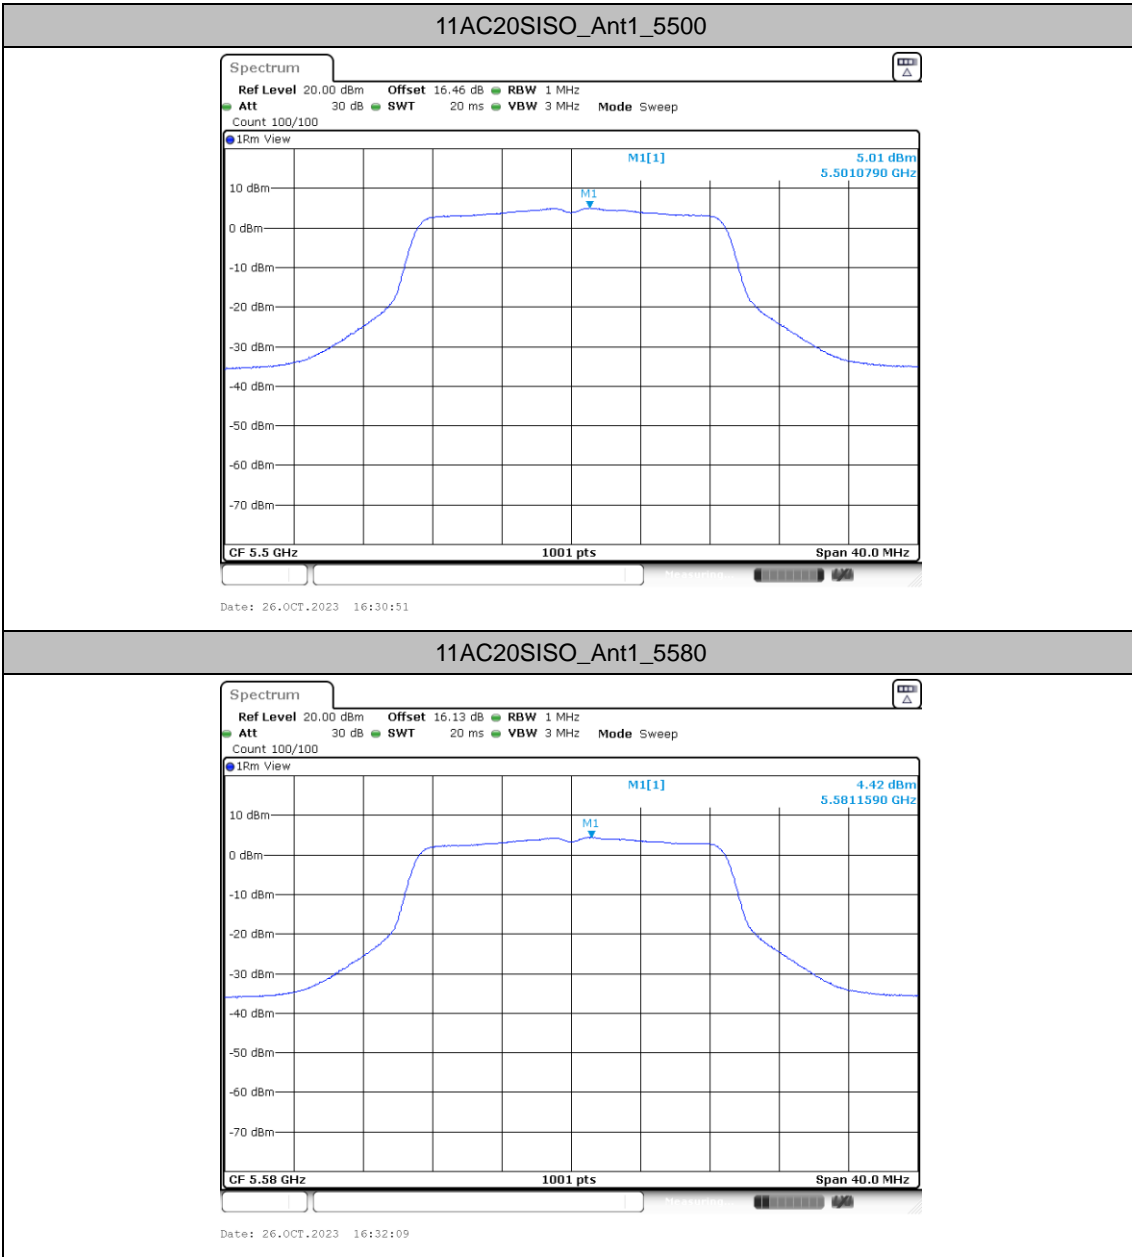


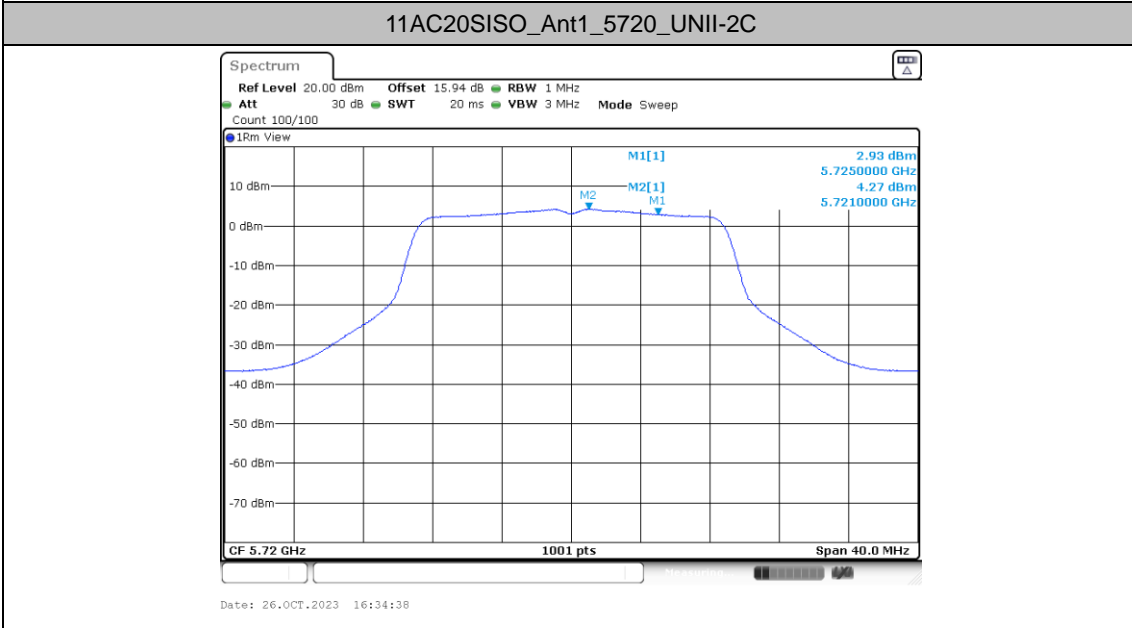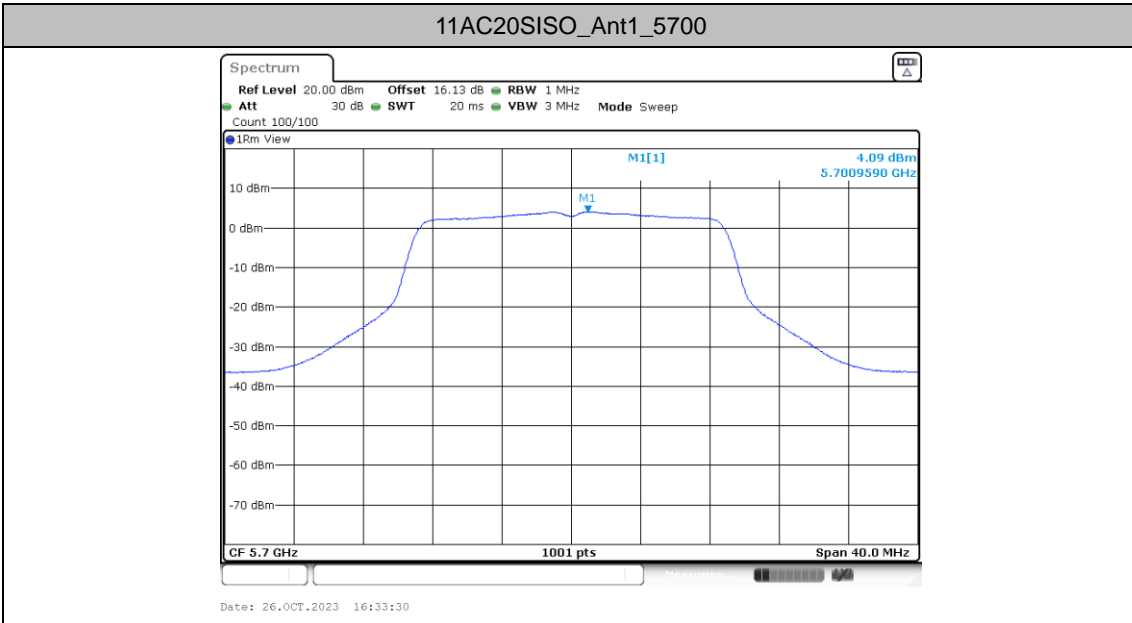


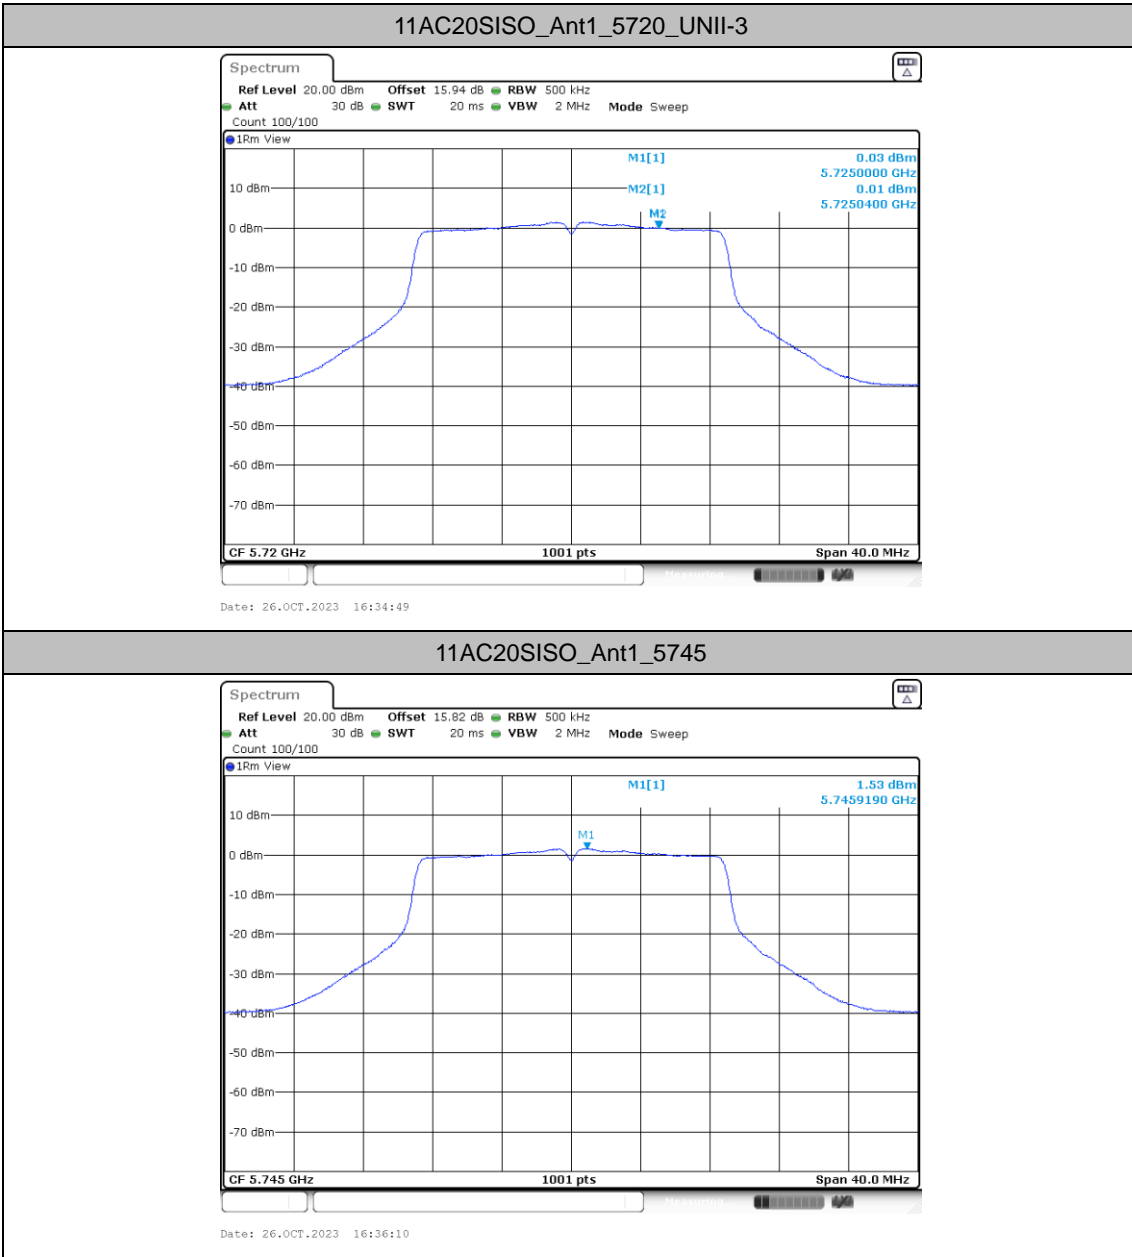


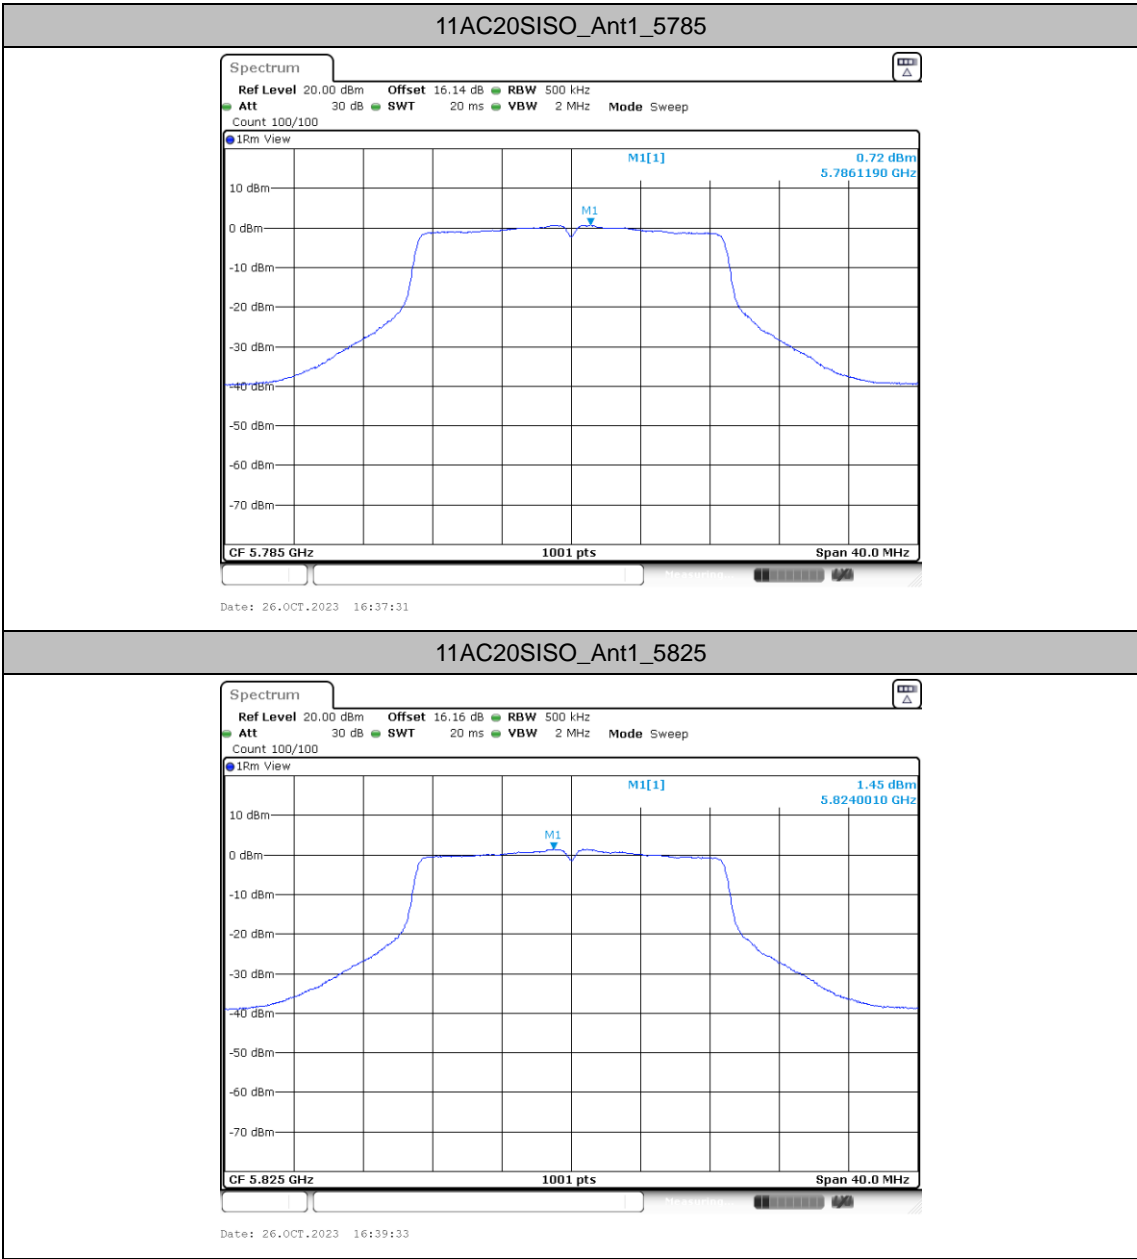




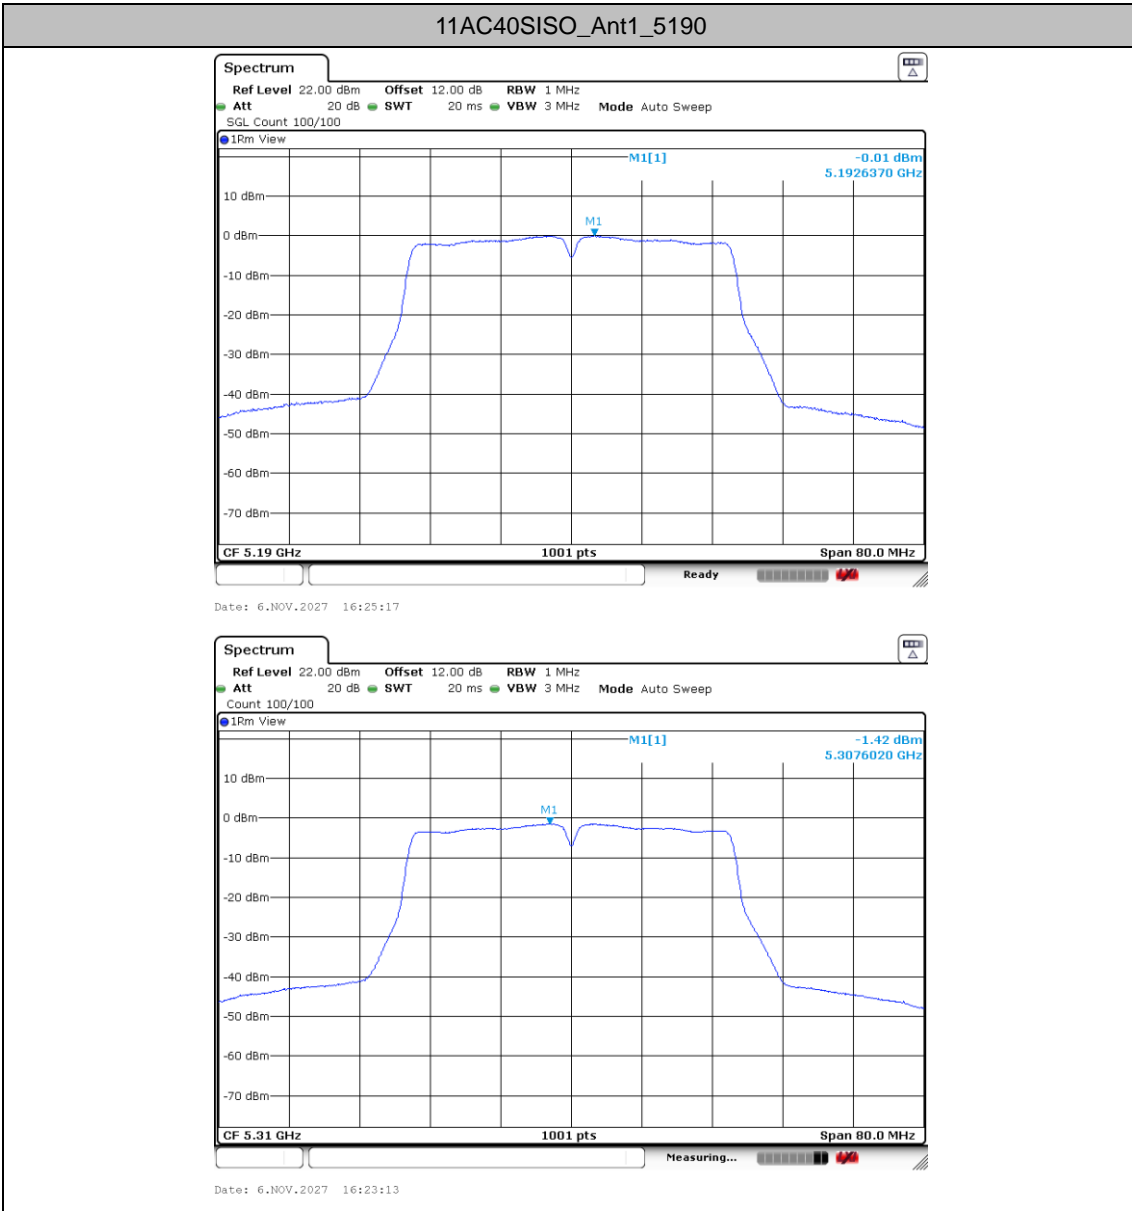

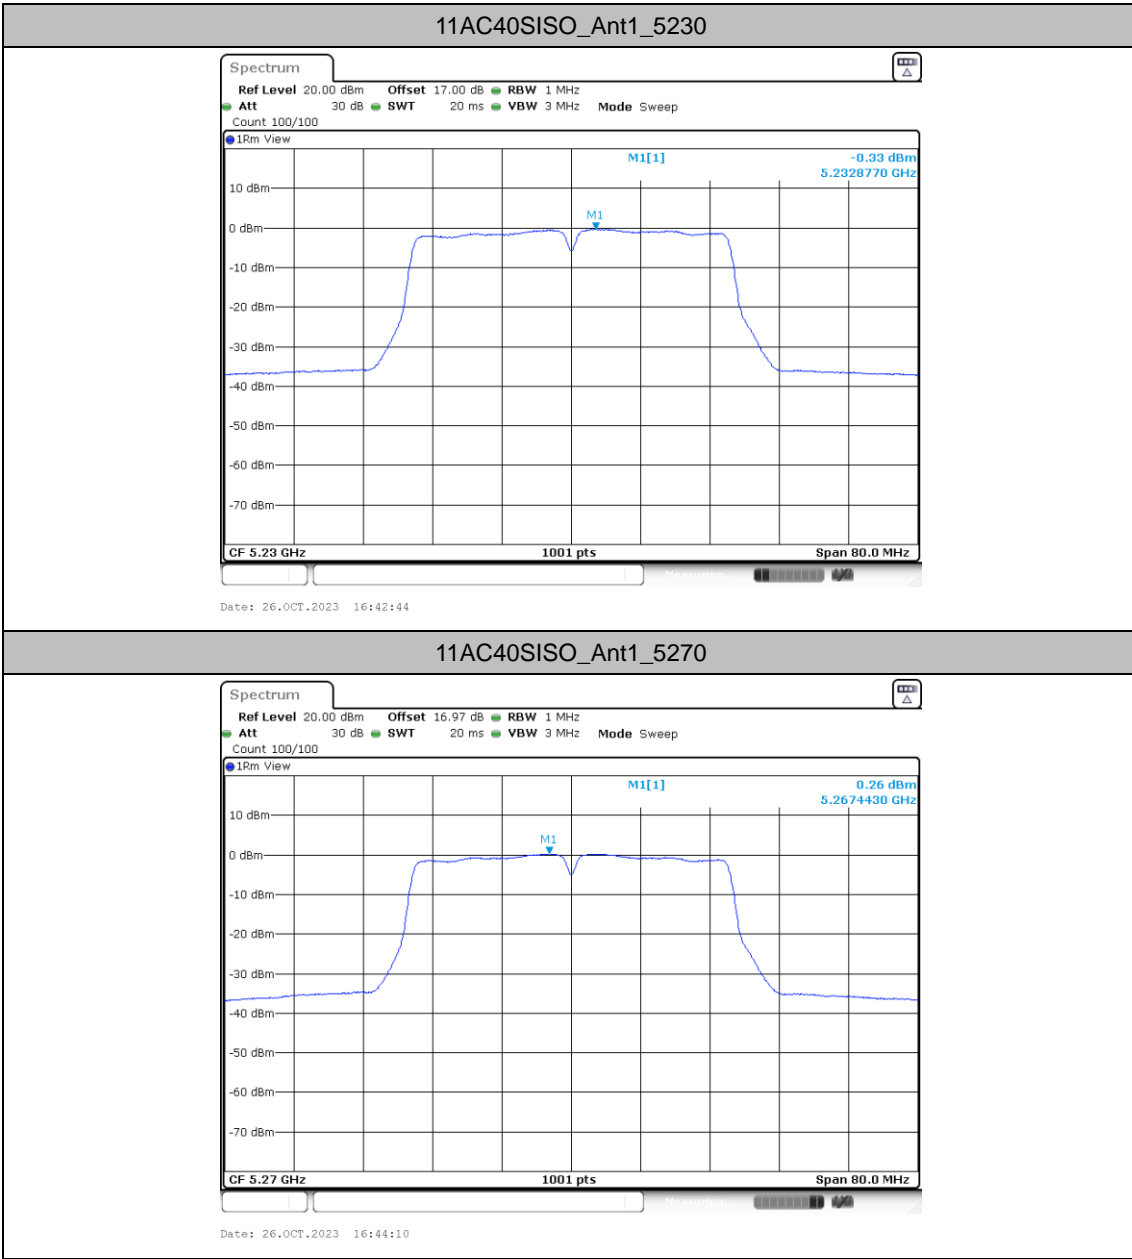


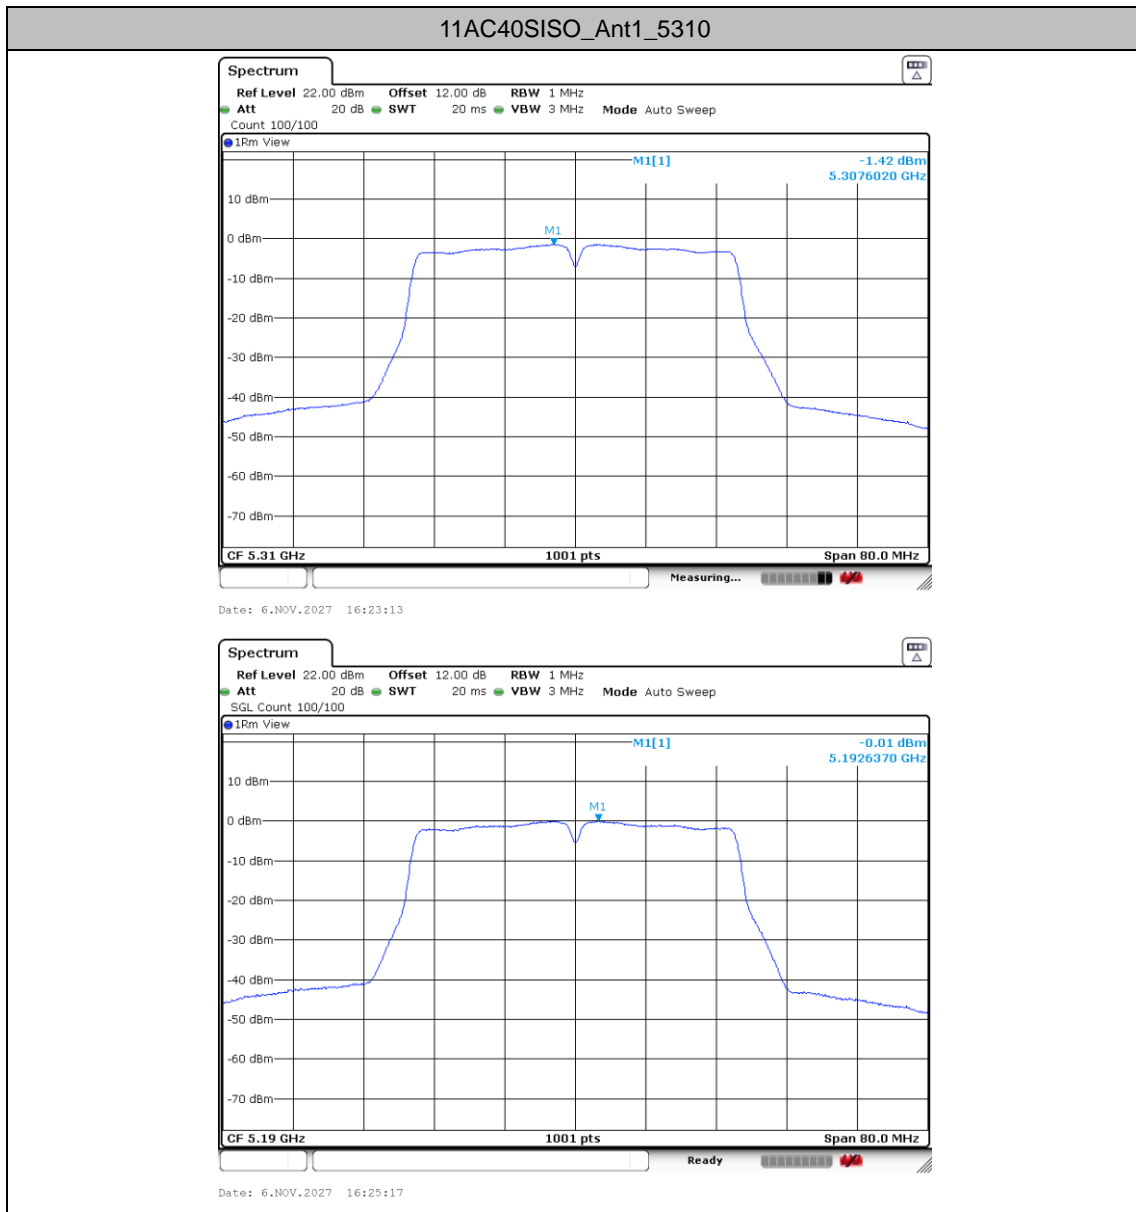

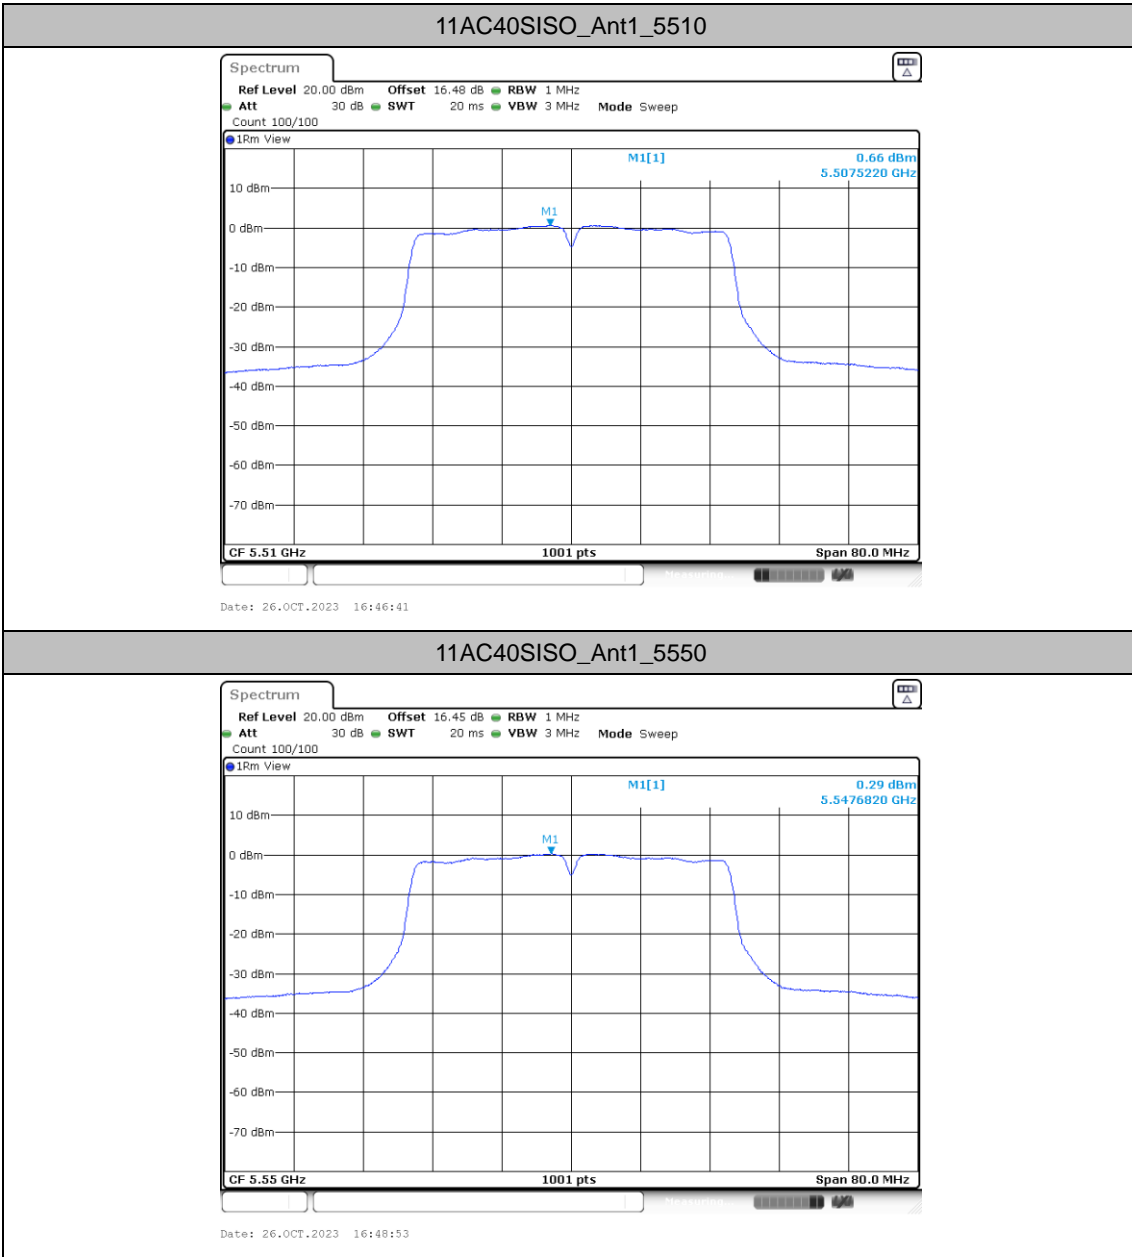






11AC40SISO\_Ant1\_5670

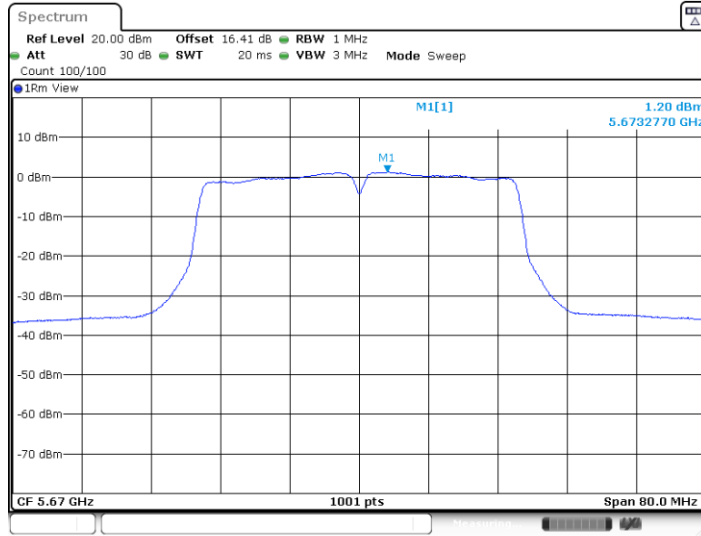

11AC40SISO\_Ant1\_5710\_UNII-2C

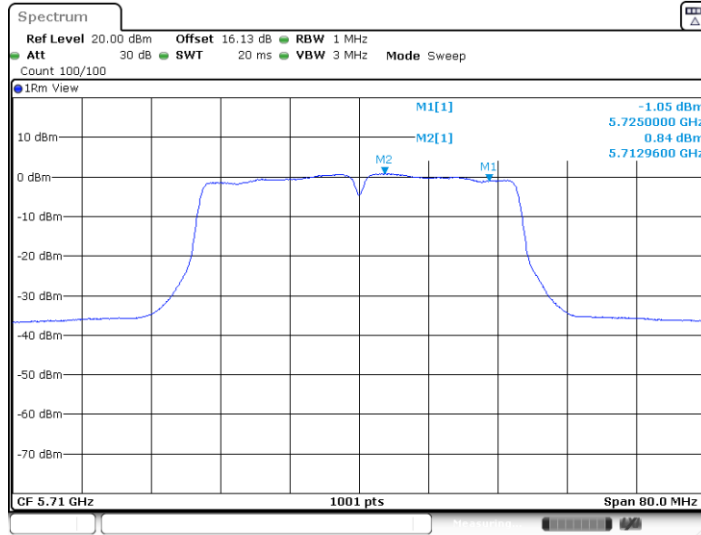


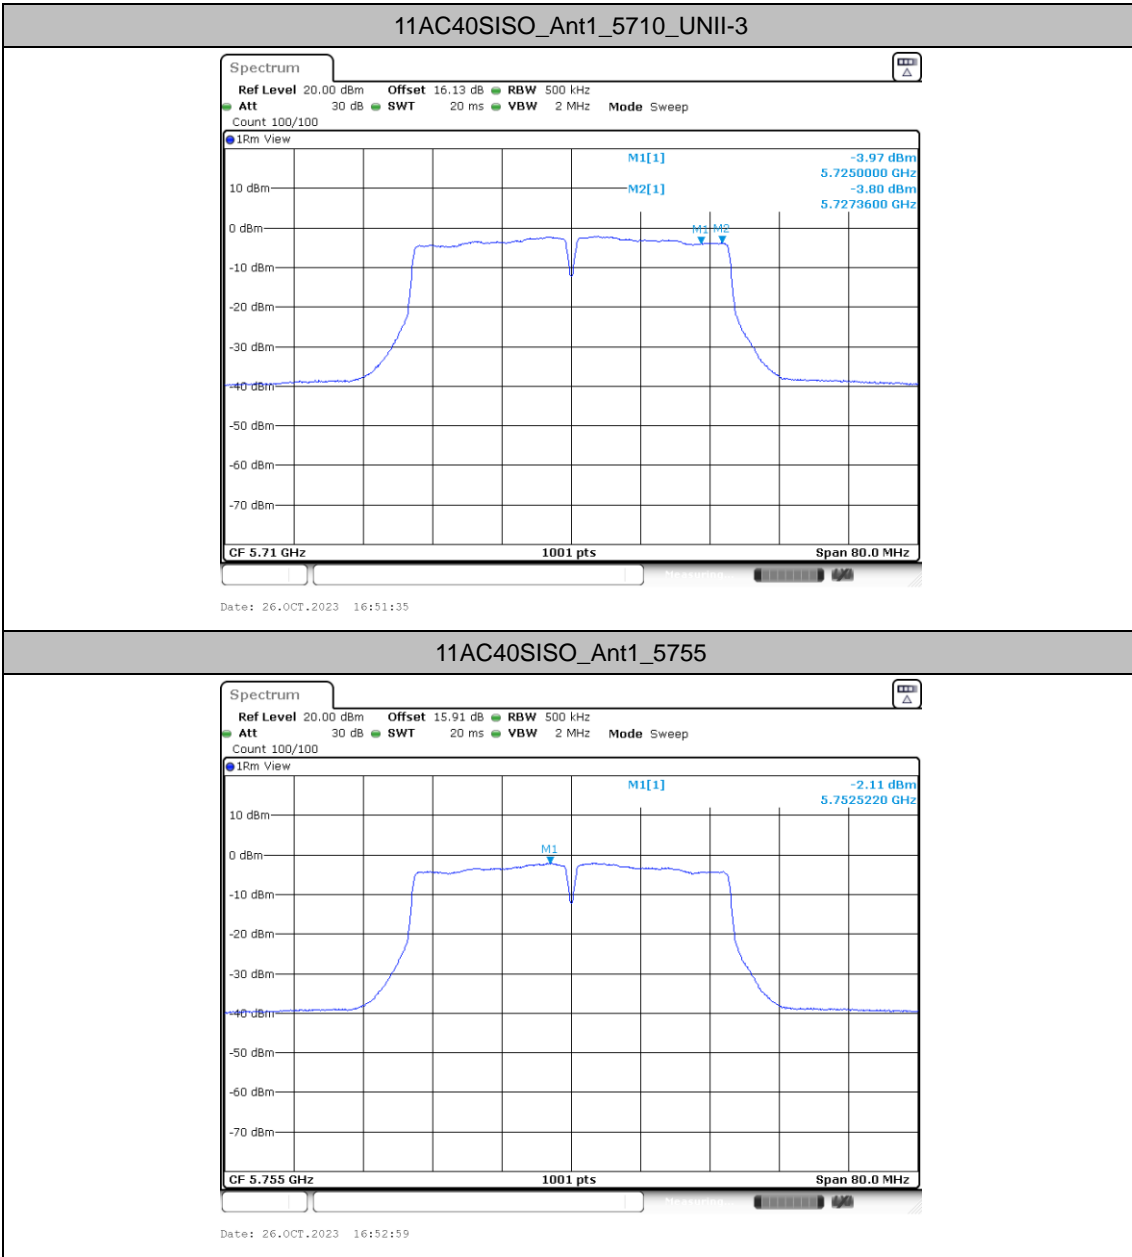

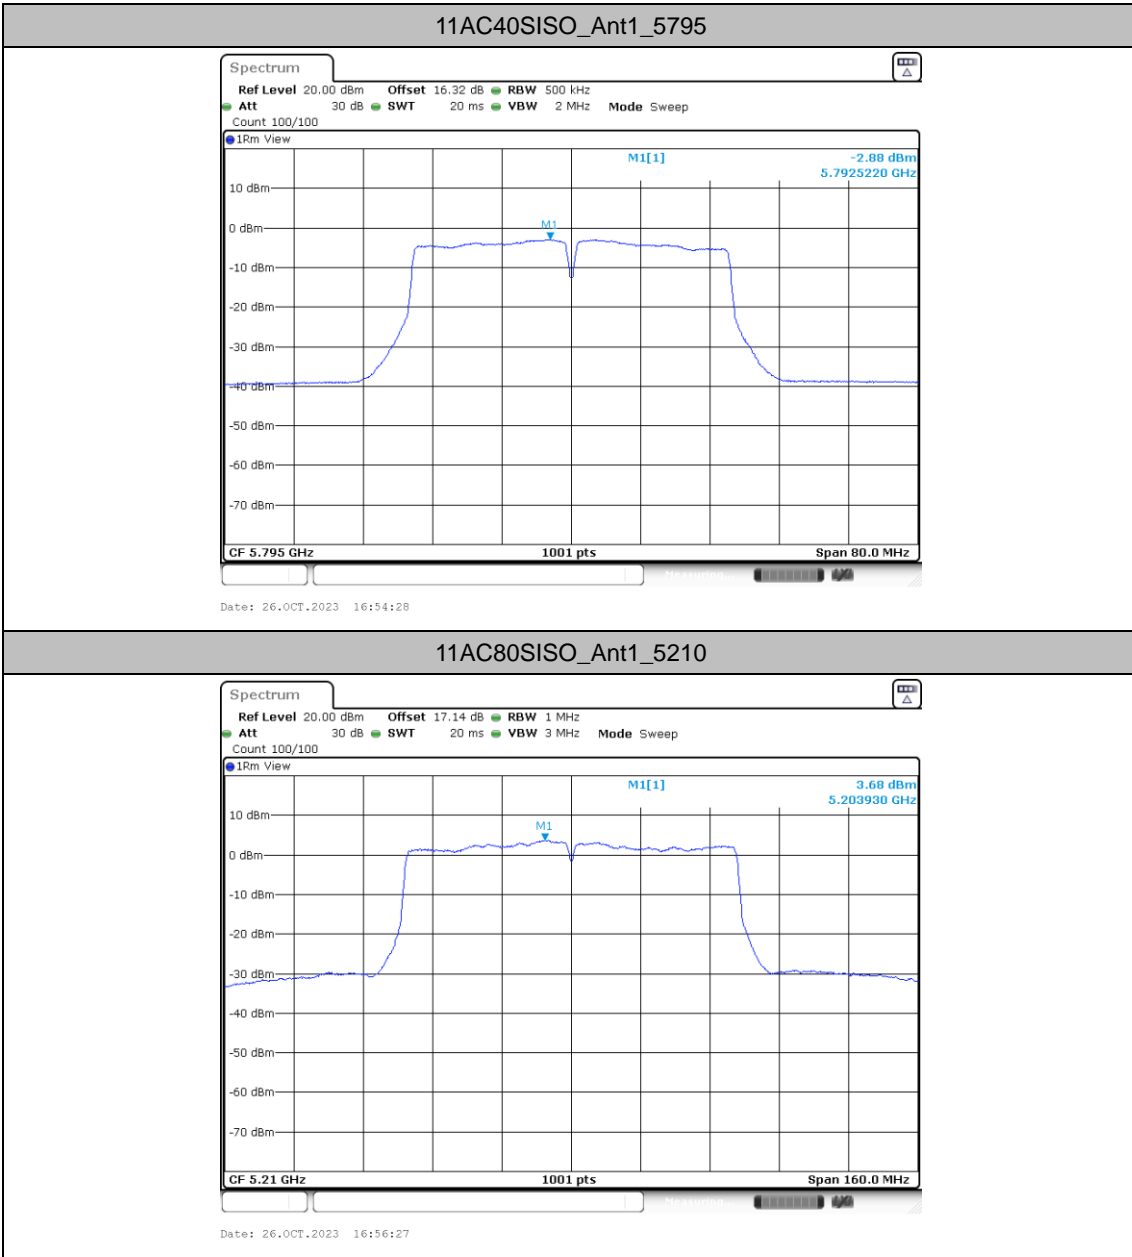






11AC80SISO\_Ant1\_5290


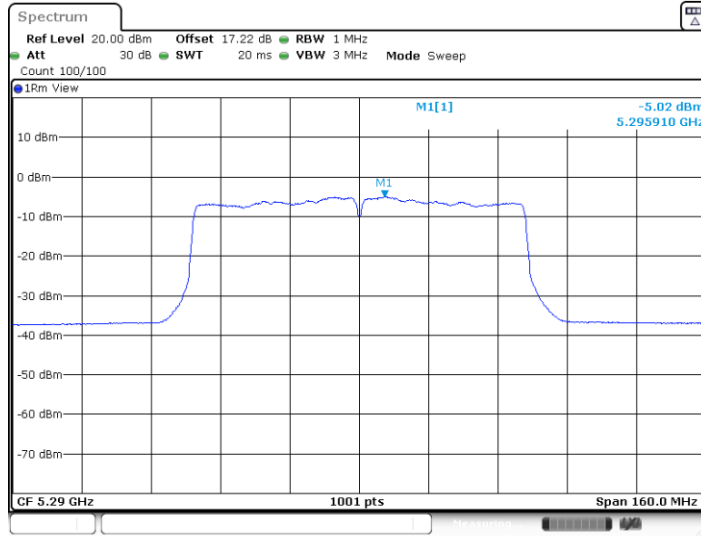


11AC80SISO\_Ant1\_5530

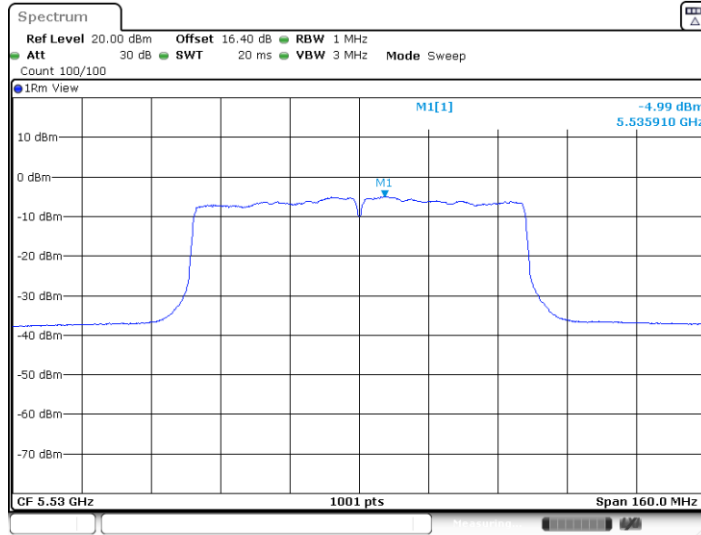



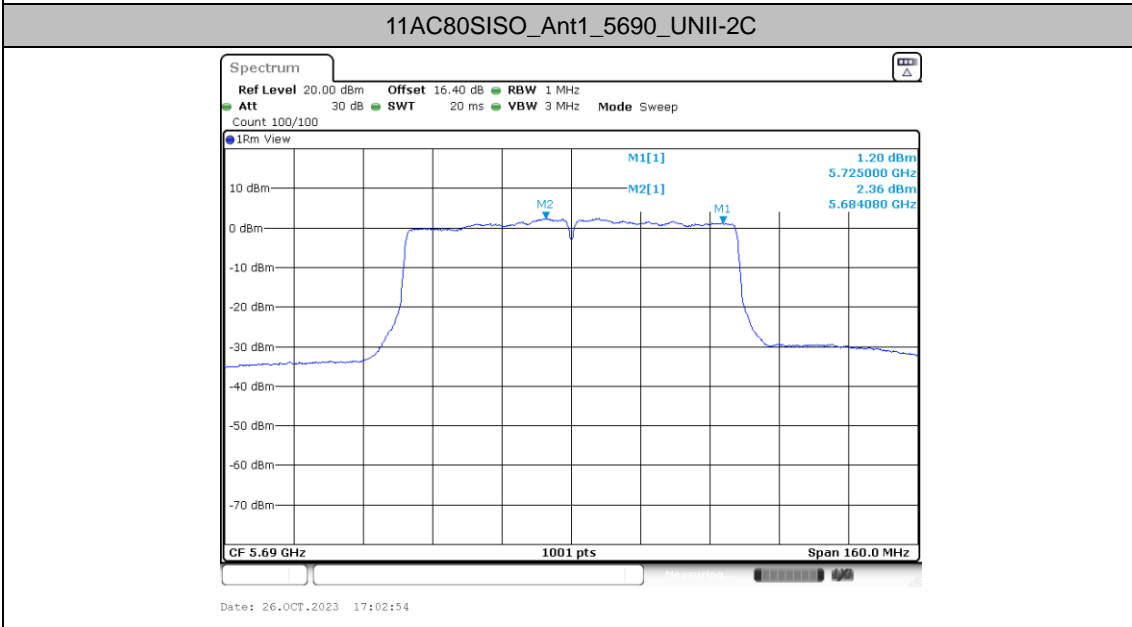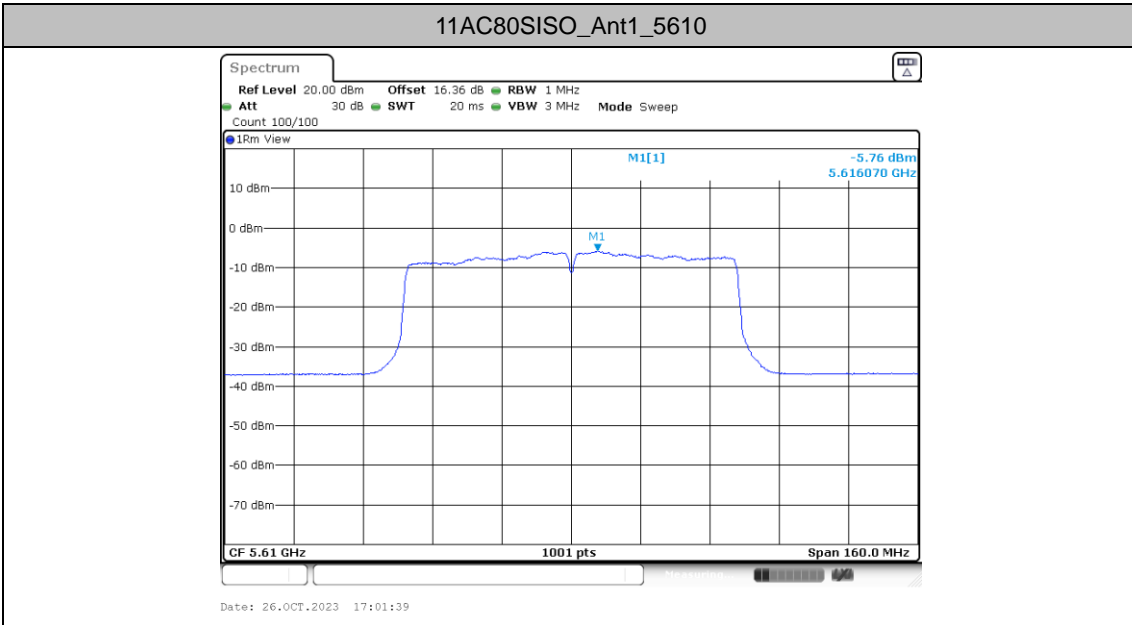


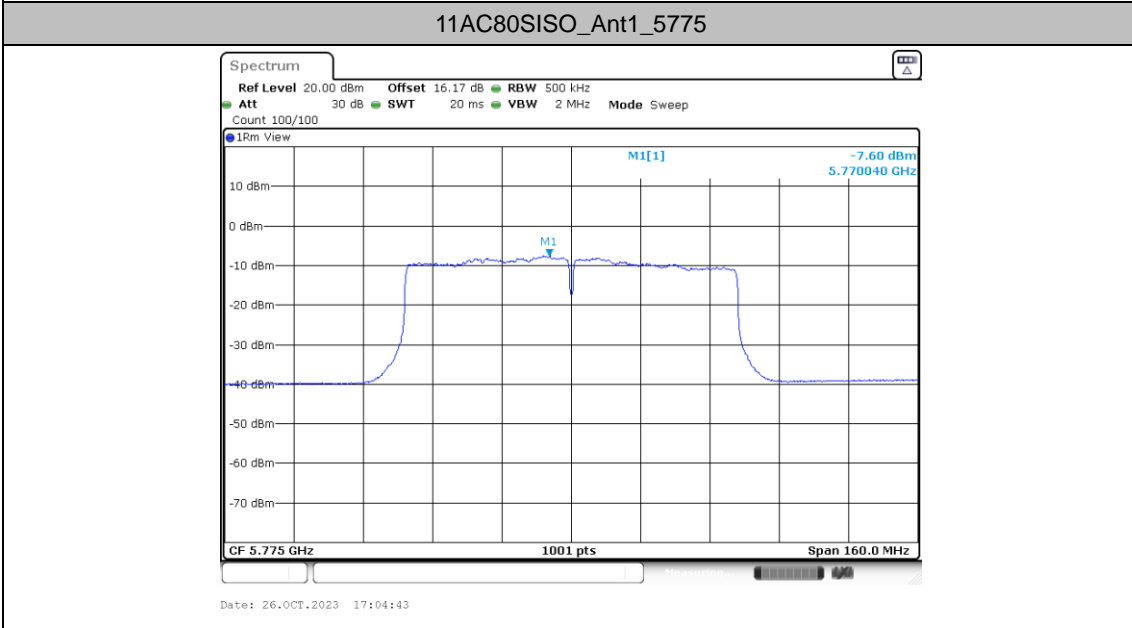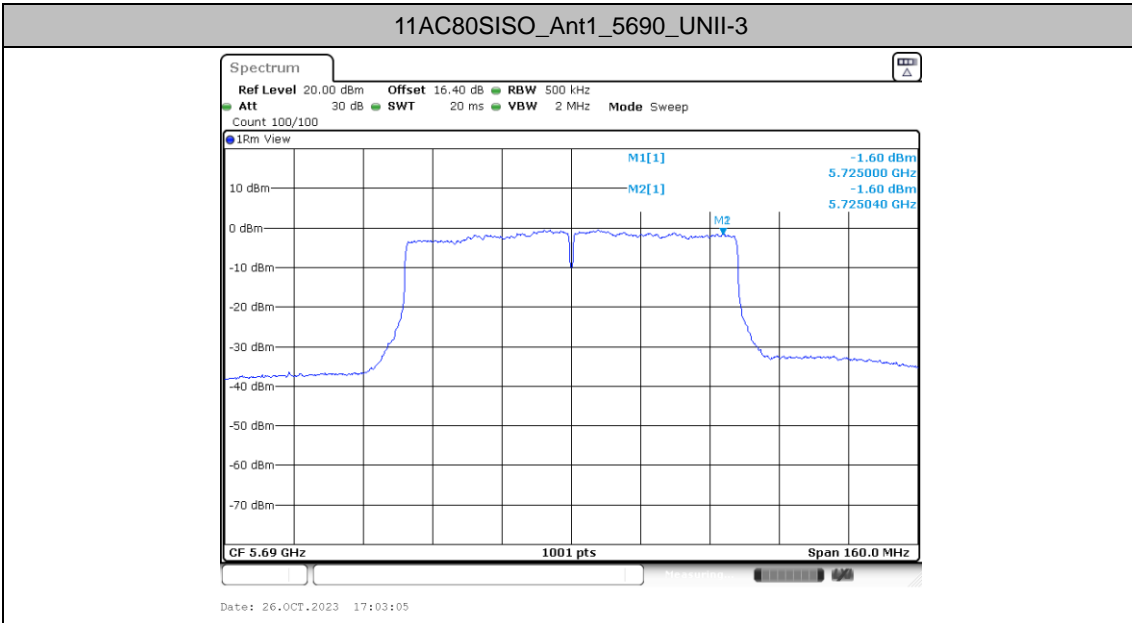



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

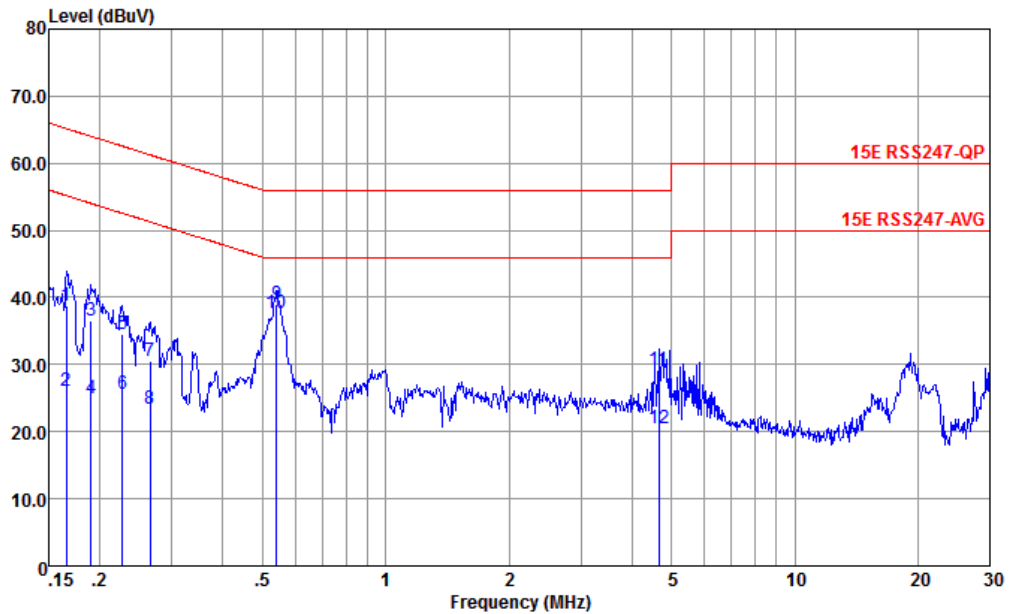


Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.166	38.68	-26.48	65.16	28.20	0.05	10.43	QP
2	0.166	25.98	-29.18	55.16	15.50	0.05	10.43	Average
3	0.190	36.65	-27.37	64.02	26.20	0.03	10.42	QP
4	0.190	24.95	-29.07	54.02	14.50	0.03	10.42	Average
5	0.227	34.63	-27.94	62.57	24.20	0.03	10.40	QP
6	0.227	25.63	-26.94	52.57	15.20	0.03	10.40	Average
7	0.266	30.62	-30.63	61.25	20.20	0.05	10.37	QP
8	0.266	23.32	-27.93	51.25	12.90	0.05	10.37	Average
9	0.541	38.95	-17.05	56.00	28.79	-0.04	10.20	QP
10 *	0.541	37.65	-8.35	46.00	27.49	-0.04	10.20	Average
11	4.647	29.13	-26.87	56.00	19.20	-0.13	10.06	QP
12	4.647	20.53	-25.47	46.00	10.60	-0.13	10.06	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

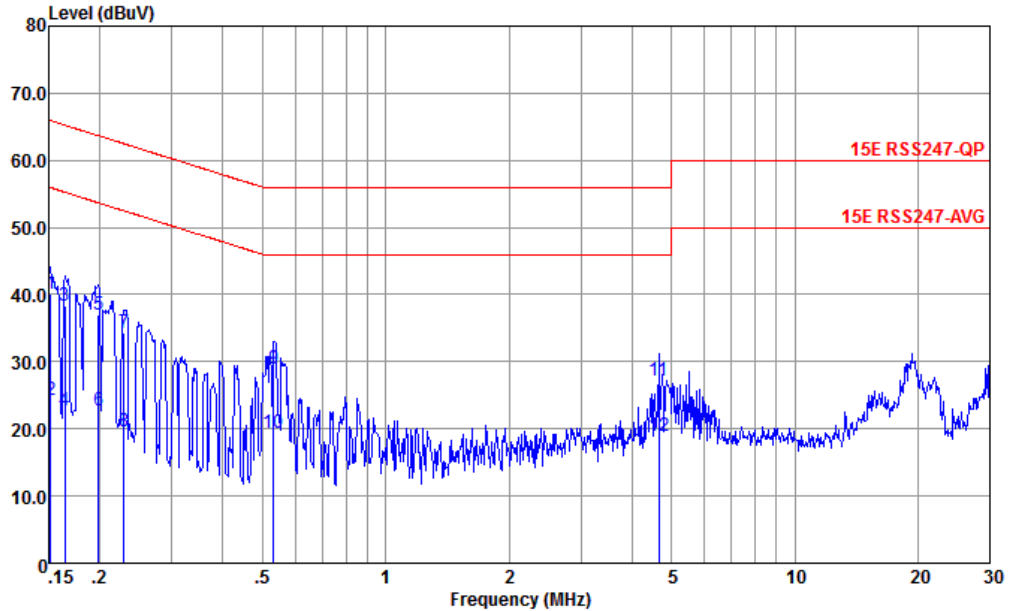

Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.152	40.06	-25.85	65.91	29.60	0.03	10.43	QP
2	0.152	24.26	-31.65	55.91	13.80	0.03	10.43	Average
3	0.164	38.26	-26.99	65.25	27.79	0.04	10.43	QP
4	0.164	22.66	-32.59	55.25	12.19	0.04	10.43	Average
5	0.199	37.07	-26.60	63.67	26.60	0.05	10.42	QP
6	0.199	22.67	-31.00	53.67	12.20	0.05	10.42	Average
7	0.229	34.21	-28.27	62.48	23.79	0.02	10.40	QP
8	0.229	19.71	-32.77	52.48	9.29	0.02	10.40	Average
9	0.532	29.02	-26.98	56.00	18.90	-0.08	10.20	QP
10	0.532	19.42	-26.58	46.00	9.30	-0.08	10.20	Average
11	4.647	27.15	-28.85	56.00	17.20	-0.11	10.06	QP
12	4.647	18.85	-27.15	46.00	8.90	-0.11	10.06	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C Radiated Spurious Emission Test Data

Test Engineer :	levi zhao	Relative Humidity :	41~422%
		Temperature :	22~23°C

### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	1	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	1	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	1	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	1	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	1	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	1	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	1	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	1	802.11ac VHT20	36	5180	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	1	802.11ac VHT20	44	5220	MCS0	-	-
Mode 12	U-NII-1	5.15-5.25	1	802.11ac VHT20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	1	802.11ac VHT20	52	5280	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	1	802.11ac VHT20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	1	802.11ac VHT20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	1	802.11ac VHT20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	1	802.11ac VHT20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	1	802.11ac VHT20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	1	802.11ac VHT40	38	5190	MCS0	-	-
Mode 20	U-NII-1	5.15-5.25	1	802.11ac VHT40	46	5230	MCS0	-	-
Mode 21	U-NII-2A	5.25-5.35	1	802.11ac VHT40	54	5270	MCS0	-	-
Mode 22	U-NII-2A	5.25-5.35	1	802.11ac VHT40	62	5310	MCS0	-	-
Mode 23	U-NII-2C	5.47-5.725	1	802.11ac VHT40	102	5510	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	1	802.11ac VHT40	110	5550	MCS0	-	-
Mode 25	U-NII-2C	5.47-5.725	1	802.11ac VHT40	134	5670	MCS0	-	-
Mode 26	U-NII-1	5.15-5.25	1	802.11ac VHT80	42	5210	MCS0	-	-
Mode 27	U-NII-2A	5.25-5.35	1	802.11ac VHT80	58	5290	MCS0	-	-
Mode 28	U-NII-2C	5.47-5.725	1	802.11ac VHT80	106	5530	MCS0	-	-
Mode 29	U-NII-2C	5.47-5.725	1	802.11ac VHT80	122	5610	MCS0	-	-
Mode 30	U-NII-3	5.725-5.85	1	802.11a	149	5745	6Mbps	-	-
Mode 31	U-NII-3	5.725-5.85	1	802.11a	157	5785	6Mbps	-	-
Mode 32	U-NII-3	5.725-5.85	1	802.11a	165	5825	6Mbps	-	-
Mode 33	U-NII-3	5.725-5.85	1	802.11ac VHT20	149	5745	MCS0	-	-
Mode 34	U-NII-3	5.725-5.85	1	802.11ac VHT20	157	5785	MCS0	-	-
Mode 35	U-NII-3	5.725-5.85	1	802.11ac VHT20	165	5825	MCS0	-	-
Mode 36	U-NII-3	5.725-5.85	1	802.11ac VHT40	151	5755	MCS0	-	-
Mode 37	U-NII-3	5.725-5.85	1	802.11ac VHT40	159	5795	MCS0	-	-



Mode 38	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	-
Mode 39	U-NII-2C	5.47-5.725	1	802.11a	144	5720	6Mbps	-	-
Mode 40	U-NII-2C	5.47-5.725	1	802.11ac VHT20	144	5720	6Mbps	-	-
Mode 41	U-NII-2C	5.47-5.725	1	802.11ac VHT40	142	5710	6Mbps	-	-
Mode 42	U-NII-2C	5.47-5.725	1	802.11ac VHT80	138	5690	6Mbps	-	-

### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5145.60	43.00	54.00	-11.00	V	AVERAGE	Pass	Band Edge
1	802.11a	36	15540.00	44.73	54.00	-9.27	V	AVERAGE	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	15660.00	43.07	54.00	-10.93	V	AVERAGE	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10481.50	51.16	68.20	-17.04	V	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	47.98	68.20	-20.22	V	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	7067.10	51.16	68.20	-17.04	V	Peak	Pass	Harmonic
6	802.11a	64	5350.20	41.99	54.00	-12.01	V	AVERAGE	Pass	Band Edge
6	802.11a	64	7093.50	51.97	68.20	-16.23	V	Peak	Pass	Harmonic
7	802.11a	100	5459.44	42.22	54.00	-11.78	H	AVERAGE	Pass	Band Edge
7	802.11a	100	7333.30	39.01	54.00	-14.99	V	Average	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	11160.00	45.56	74.00	-28.44	V	PEAK	Pass	Harmonic
9	802.11a	140	5737.40	54.61	68.20	-13.59	V	PEAK	Pass	Band Edge
9	802.11a	140	11400.00	44.23	74.00	-29.77	H	PEAK	Pass	Harmonic
10	802.11ac VHT20	36	5150.00	44.65	54.00	-9.35	V	AVERAGE	Pass	Band Edge
10	802.11ac VHT20	36	10360.00	45.74	68.20	-22.46	H	PEAK	Pass	Harmonic
11	802.11ac VHT20	44	-	-	-	-	-	-	-	Band Edge
11	802.11ac VHT20	44	10440.00	45.26	68.20	-22.94	H	PEAK	Pass	Harmonic
12	802.11ac VHT20	48	-	-	-	-	-	-	-	Band Edge
12	802.11ac VHT20	48	10480.00	45.80	68.20	-22.40	V	PEAK	Pass	Harmonic
13	802.11ac VHT20	52	-	-	-	-	-	-	-	Band Edge
13	802.11ac VHT20	52	10560.00	44.34	68.20	-23.86	H	PEAK	Pass	Harmonic
14	802.11ac VHT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11ac VHT20	60	10600.01	43.91	74.00	-30.09	V	PEAK	Pass	Harmonic
15	802.11ac VHT20	64	5350.00	42.06	54.00	-11.94	V	AVERAGE	Pass	Band Edge
15	802.11ac VHT20	64	10640.00	44.10	74.00	-29.90	V	PEAK	Pass	Harmonic
16	802.11ac VHT20	100	5459.92	44.65	54.00	-9.35	V	AVERAGE	Pass	Band Edge
16	802.11ac VHT20	100	11000.00	45.52	74.00	-28.48	V	PEAK	Pass	Harmonic
17	802.11ac VHT20	116	-	-	-	-	-	-	-	Band Edge
17	802.11ac VHT20	116	11160.00	45.57	74.00	-28.43	H	PEAK	Pass	Harmonic
18	802.11ac VHT20	140	5741.96	55.48	68.20	-12.72	V	PEAK	Pass	Band Edge
18	802.11ac VHT20	140	11400.00	45.19	74.00	-28.81	V	PEAK	Pass	Harmonic



19	802.11ac VHT40	38	5149.76	49.86	54.00	-4.14	H	AVERAGE	Pass	Band Edge
19	802.11ac VHT40	38	10380.00	44.83	68.20	-23.37	V	PEAK	Pass	Harmonic
20	802.11ac VHT40	46	-	-	-	-	-	-	-	Band Edge
20	802.11ac VHT40	46	10460.00	45.11	68.20	-23.09	V	PEAK	Pass	Harmonic
21	802.11ac VHT40	54	5350.18	43.89	54.00	-10.11	V	AVERAGE	Pass	Band Edge
21	802.11ac VHT40	54	10540.00	45.02	68.20	-23.18	H	PEAK	Pass	Harmonic
22	802.11ac VHT40	62	5350.10	50.56	54.00	-3.44	H	AVERAGE	Pass	Band Edge
22	802.11ac VHT40	62	10620.00	44.32	74.00	-29.68	V	PEAK	Pass	Harmonic
23	802.11ac VHT40	102	5468.08	62.62	68.20	-5.58	V	PEAK	Pass	Band Edge
23	802.11ac VHT40	102	11020.00	44.09	74.00	-29.91	H	PEAK	Pass	Harmonic
24	802.11ac VHT40	110	5459.80	41.65	54.00	-12.35	V	AVERAGE	Pass	Band Edge
24	802.11ac VHT40	110	11100.00	45.89	74.00	-28.11	V	PEAK	Pass	Harmonic
25	802.11ac VHT40	134	5729.56	54.86	68.20	-13.34	V	PEAK	Pass	Band Edge
25	802.11ac VHT40	134	11340.00	43.98	74.00	-30.02	H	PEAK	Pass	Harmonic
26	802.11ac VHT80	42	5149.60	50.72	54.00	-3.28	H	AVERAGE	Pass	Band Edge
26	802.11ac VHT80	42	10420.00	45.62	68.20	-22.58	V	PEAK	Pass	Harmonic
27	802.11ac VHT80	58	5350.30	43.27	54.00	-10.73	V	AVERAGE	Pass	Band Edge
27	802.11ac VHT80	58	10580.00	44.86	68.20	-23.34	H	PEAK	Pass	Harmonic
28	802.11ac VHT80	106	5459.76	46.53	54.00	-7.47	H	AVERAGE	Pass	Band Edge
28	802.11ac VHT80	106	11060.00	44.13	74.00	-29.87	H	PEAK	Pass	Harmonic
29	802.11ac VHT80	122	5455.12	39.34	54.00	-14.66	V	AVERAGE	Pass	Band Edge
29	802.11ac VHT80	122	11220.00	44.59	74.00	-29.41	H	PEAK	Pass	Harmonic
30	802.11a	149	5639.20	50.25	68.20	-17.95	H	PEAK	Pass	Band Edge
	802.11a	149	11490.00	46.55	74.00	-27.45	H	PEAK	Pass	Harmonic
31	802.11a	157	-	-	-	-	-	-	-	Band Edge
	802.11a	157	11570.00	45.23	74.00	-28.77	H	PEAK	Pass	Harmonic
32	802.11a	165	5925.20	52.18	68.20	-16.02	H	PEAK	Pass	Band Edge
	802.11a	165	11650.00	45.53	74.00	-28.47	H	PEAK	Pass	Harmonic
33	802.11ac VHT20	149	5636.40	49.51	68.20	-18.69	H	PEAK	Pass	Band Edge
	802.11ac VHT20	149	11490.00	45.03	74.00	-28.97	H	PEAK	Pass	Harmonic
34	802.11ac VHT20	157	-	-	-	-	-	-	-	Band Edge
	802.11ac VHT20	157	11570.00	44.59	74.00	-29.41	H	PEAK	Pass	Harmonic
35	802.11ac VHT20	165	5942.40	51.01	68.20	-17.19	V	PEAK	Pass	Band Edge
	802.11ac VHT20	165	11650.00	44.83	74.00	-29.17	H	PEAK	Pass	Harmonic
36	802.11ac VHT40	151	5927.38	50.37	68.20	-17.83	H	PEAK	Pass	Band Edge
	802.11ac VHT40	151	11510.00	44.41	74.00	-29.59	H	PEAK	Pass	Harmonic
37	802.11ac VHT40	159	5934.80	51.70	68.20	-16.50	H	PEAK	Pass	Band Edge
	802.11ac VHT40	159	11590.00	45.60	74.00	-28.40	H	PEAK	Pass	Harmonic
38	802.11ac VHT80	155	5930.40	51.84	68.20	-16.36	H	PEAK	Pass	Band Edge
	802.11ac VHT80	155	11550.00	44.23	74.00	-29.77	H	PEAK	Pass	Harmonic
39	802.11a	144	-	-	-	-	-	-	-	Band Edge
	802.11a	144	11440.00	45.31	74.00	-28.69	H	PEAK	Pass	Harmonic
40	802.11ac VHT20	144	-	-	-	-	-	-	-	Band Edge
	802.11ac VHT20	144	11440.00	35.34	54.00	-18.66	H	AVERAGE	Pass	Harmonic
41	802.11ac VHT40	142	-	-	-	-	-	-	-	Band Edge
	802.11ac VHT40	142	11420.00	44.92	74.00	-29.08	H	PEAK	Pass	Harmonic



42	802.11ac VHT80	138	-	-	-	-	-	-	-	Band Edge
	802.11ac VHT80	138	11380.00	43.79	74.00	-30.21	H	PEAK	Pass	Harmonic

### Co-location

### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 26	U-NII-1	5.15-5.25	1	802.11ac VHT80	42	5210	MCS0	-	-
Part27F B13 BW=5M									

### Summary of each worse mode





Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
26	802.11ac VHT80	42	5149.28	50.55	54.00	-3.45	H	Average	Pass	Band Edge
26	802.11ac VHT80	42	10420.00	46.28	68.20	-21.92	V	PEAK	Pass	Harmonic





Mode		1																																																																		
ANT		1																																																																		
Band Edge		U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																		
Pol.	Horizontal	Fundamental																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5123.90</td> <td>50.44</td> <td>74.00</td> <td>-23.56</td> <td>42.26</td> <td>34.07</td> <td>10.58</td> <td>36.47</td> <td>0.00</td> <td>100</td> <td>341</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	1	5123.90	50.44	74.00	-23.56	42.26	34.07	10.58	36.47	0.00	100	341	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>90.77</td> <td>-----</td> <td>-----</td> <td>90.47</td> <td>34.23</td> <td>10.64</td> <td>36.57</td> <td>0.00</td> <td>100</td> <td>341</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	1	5180.00	90.77	-----	-----	90.47	34.23	10.64	36.57	0.00	100	341	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																											
1	5123.90	50.44	74.00	-23.56	42.26	34.07	10.58	36.47	0.00	100	341	PEAK																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																											
1	5180.00	90.77	-----	-----	90.47	34.23	10.64	36.57	0.00	100	341	PEAK																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.60</td> <td>39.30</td> <td>54.00</td> <td>-14.70</td> <td>31.04</td> <td>34.14</td> <td>10.60</td> <td>36.48</td> <td>0.00</td> <td>100</td> <td>341</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	1	5145.60	39.30	54.00	-14.70	31.04	34.14	10.60	36.48	0.00	100	341	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>90.67</td> <td>-----</td> <td>-----</td> <td>82.37</td> <td>34.25</td> <td>10.64</td> <td>36.59</td> <td>0.00</td> <td>100</td> <td>341</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	1	5180.00	90.67	-----	-----	82.37	34.25	10.64	36.59	0.00	100	341	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																											
1	5145.60	39.30	54.00	-14.70	31.04	34.14	10.60	36.48	0.00	100	341	AVERAGE																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																											
1	5180.00	90.67	-----	-----	82.37	34.25	10.64	36.59	0.00	100	341	AVERAGE																																																								

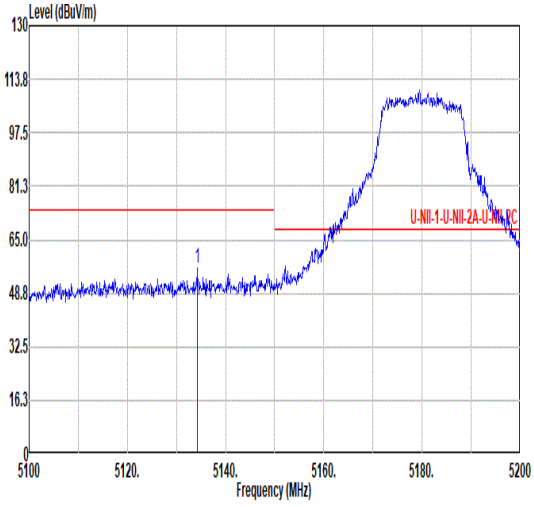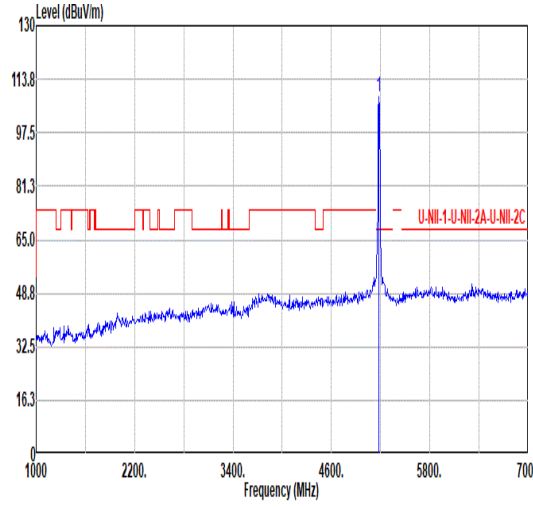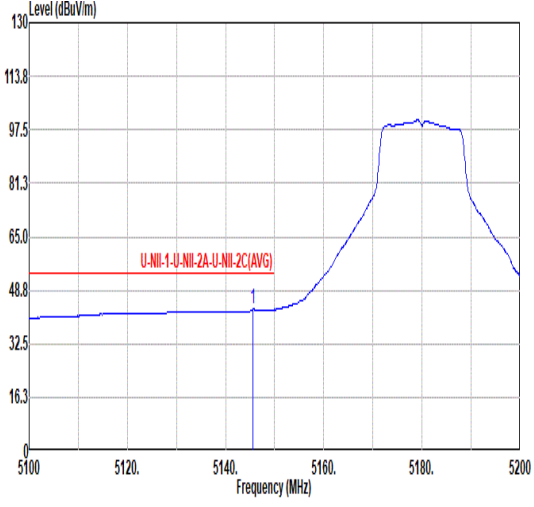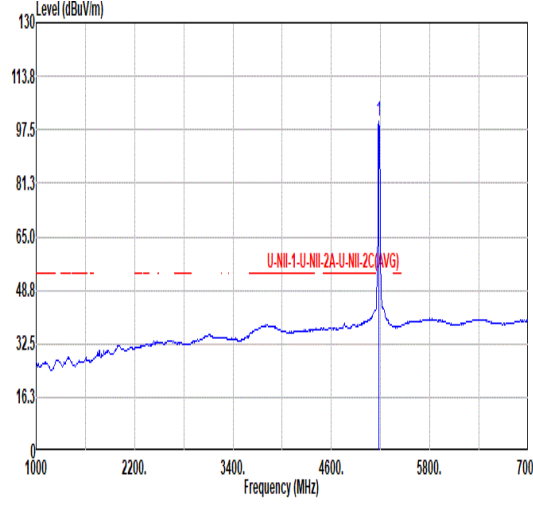

Mode	1																																																															
	Band Edge																																																															
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																															
ANT	1																																																															
Pol.	Vertical	Fundamental																																																														
Peak	 <table border="1" data-bbox="263 1153 774 1288"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td></td> <td>5134.20</td> <td>56.43</td> <td>74.00</td> <td>-17.57</td> <td>48.22</td> <td>34.10</td> <td>10.59</td> <td>36.48</td> <td>0.00</td> <td>100</td> <td>252</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg		5134.20	56.43	74.00	-17.57	48.22	34.10	10.59	36.48	0.00	100	252	PEAK	 <table border="1" data-bbox="901 1153 1412 1288"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td></td> <td>5180.00</td> <td>108.19</td> <td>-----</td> <td>-----</td> <td>99.89</td> <td>34.25</td> <td>10.64</td> <td>36.59</td> <td>0.00</td> <td>100</td> <td>252</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg		5180.00	108.19	-----	-----	99.89	34.25	10.64	36.59	0.00	100	252	PEAK
	Limit										Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq		Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																																							
	5134.20	56.43	74.00	-17.57	48.22	34.10	10.59	36.48	0.00	100	252	PEAK																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
									Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																															
	5180.00	108.19	-----	-----	99.89	34.25	10.64	36.59	0.00	100	252	PEAK																																																				
Avg	 <table border="1" data-bbox="263 1836 774 1971"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td></td> <td>5145.60</td> <td>43.00</td> <td>54.00</td> <td>-11.00</td> <td>34.74</td> <td>34.14</td> <td>10.60</td> <td>36.48</td> <td>0.00</td> <td>100</td> <td>252</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg		5145.60	43.00	54.00	-11.00	34.74	34.14	10.60	36.48	0.00	100	252	AVERAGE	 <table border="1" data-bbox="901 1836 1412 1971"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td></td> <td>5180.00</td> <td>100.24</td> <td>-----</td> <td>-----</td> <td>91.94</td> <td>34.25</td> <td>10.64</td> <td>36.59</td> <td>0.00</td> <td>100</td> <td>252</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg		5180.00	100.24	-----	-----	91.94	34.25	10.64	36.59	0.00	100	252	AVERAGE
Limit	Read										Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																																						
	5145.60	43.00	54.00	-11.00	34.74	34.14	10.60	36.48	0.00	100	252	AVERAGE																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
									Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																															
	5180.00	100.24	-----	-----	91.94	34.25	10.64	36.59	0.00	100	252	AVERAGE																																																				



Mode	1																																																																																																							
	Harmonic																																																																																																							
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																							
ANT	1																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>46.73</td> <td>68.20</td> <td>-21.47</td> <td>60.57</td> <td>37.45</td> <td>15.45</td> <td>66.74</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10360.00	46.73	68.20	-21.47	60.57	37.45	15.45	66.74	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>48.84</td> <td>68.20</td> <td>-19.36</td> <td>62.68</td> <td>37.45</td> <td>15.45</td> <td>66.74</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2 15540.00</td> <td>56.61</td> <td>74.00</td> <td>-17.39</td> <td>61.66</td> <td>40.09</td> <td>19.04</td> <td>64.18</td> <td>0.00</td> <td>300</td> <td>124</td> <td>PEAK</td> </tr> <tr> <td>3 15540.00</td> <td>44.73</td> <td>54.00</td> <td>-9.27</td> <td>49.78</td> <td>40.09</td> <td>19.04</td> <td>64.18</td> <td>0.00</td> <td>300</td> <td>124</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10360.00	48.84	68.20	-19.36	62.68	37.45	15.45	66.74	0.00	--	PEAK	2 15540.00	56.61	74.00	-17.39	61.66	40.09	19.04	64.18	0.00	300	124	PEAK	3 15540.00	44.73	54.00	-9.27	49.78	40.09	19.04	64.18	0.00	300	124	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1 10360.00	46.73	68.20	-21.47	60.57	37.45	15.45	66.74	0.00	--	PEAK																																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1 10360.00	48.84	68.20	-19.36	62.68	37.45	15.45	66.74	0.00	--	PEAK																																																																																														
2 15540.00	56.61	74.00	-17.39	61.66	40.09	19.04	64.18	0.00	300	124	PEAK																																																																																													
3 15540.00	44.73	54.00	-9.27	49.78	40.09	19.04	64.18	0.00	300	124	AVERAGE																																																																																													



Mode	2																																																																																																																																								
	Harmonic																																																																																																																																								
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																																																								
ANT	1																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																							
Peak Avg																																																																																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>46.14</td> <td>68.20</td> <td>-22.06</td> <td>59.82</td> <td>37.51</td> <td>15.52</td> <td>66.71</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>53.71</td> <td>74.00</td> <td>-20.29</td> <td>58.55</td> <td>40.19</td> <td>19.12</td> <td>64.15</td> <td>0.00</td> <td>398</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15660.00</td> <td>42.58</td> <td>54.00</td> <td>-11.42</td> <td>47.42</td> <td>40.19</td> <td>19.12</td> <td>64.15</td> <td>0.00</td> <td>398</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	46.14	68.20	-22.06	59.82	37.51	15.52	66.71	0.00	--	--	PEAK	2	15660.00	53.71	74.00	-20.29	58.55	40.19	19.12	64.15	0.00	398	63	PEAK	3	15660.00	42.58	54.00	-11.42	47.42	40.19	19.12	64.15	0.00	398	63	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>49.24</td> <td>68.20</td> <td>-18.96</td> <td>62.92</td> <td>37.51</td> <td>15.52</td> <td>66.71</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>54.54</td> <td>74.00</td> <td>-19.46</td> <td>59.38</td> <td>40.19</td> <td>19.12</td> <td>64.15</td> <td>0.00</td> <td>327</td> <td>118</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15660.00</td> <td>43.07</td> <td>54.00</td> <td>-10.93</td> <td>47.91</td> <td>40.19</td> <td>19.12</td> <td>64.15</td> <td>0.00</td> <td>327</td> <td>118</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10440.00	49.24	68.20	-18.96	62.92	37.51	15.52	66.71	0.00	--	--	PEAK	2	15660.00	54.54	74.00	-19.46	59.38	40.19	19.12	64.15	0.00	327	118	PEAK	3	15660.00	43.07	54.00	-10.93	47.91	40.19	19.12	64.15	0.00	327	118
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	10440.00	46.14	68.20	-22.06	59.82	37.51	15.52	66.71	0.00	--	--	PEAK																																																																																																																													
2	15660.00	53.71	74.00	-20.29	58.55	40.19	19.12	64.15	0.00	398	63	PEAK																																																																																																																													
3	15660.00	42.58	54.00	-11.42	47.42	40.19	19.12	64.15	0.00	398	63	AVERAGE																																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	10440.00	49.24	68.20	-18.96	62.92	37.51	15.52	66.71	0.00	--	--	PEAK																																																																																																																													
2	15660.00	54.54	74.00	-19.46	59.38	40.19	19.12	64.15	0.00	327	118	PEAK																																																																																																																													
3	15660.00	43.07	54.00	-10.93	47.91	40.19	19.12	64.15	0.00	327	118	AVERAGE																																																																																																																													



Mode	3																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>44.54</td> <td>68.20</td> <td>-23.66</td> <td>58.13</td> <td>37.54</td> <td>15.56</td> <td>66.69</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	44.54	68.20	-23.66	58.13	37.54	15.56	66.69	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10481.50</td> <td>51.16</td> <td>68.20</td> <td>-17.04</td> <td>64.75</td> <td>37.54</td> <td>15.56</td> <td>66.69</td> <td>0.00</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10481.50	51.16	68.20	-17.04	64.75	37.54	15.56	66.69	0.00	--	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10480.00	44.54	68.20	-23.66	58.13	37.54	15.56	66.69	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10481.50	51.16	68.20	-17.04	64.75	37.54	15.56	66.69	0.00	--	Peak																																																																						







Mode	4																																																																															
	Harmonic																																																																															
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>45.70</td> <td>68.20</td> <td>-22.50</td> <td>59.21</td> <td>37.56</td> <td>15.60</td> <td>66.67</td> <td>0.00</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	45.70	68.20	-22.50	59.21	37.56	15.60	66.67	0.00	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>47.98</td> <td>68.20</td> <td>-20.22</td> <td>61.49</td> <td>37.56</td> <td>15.60</td> <td>66.67</td> <td>0.00</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	47.98	68.20	-20.22	61.49	37.56	15.60	66.67	0.00	--	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10520.00	45.70	68.20	-22.50	59.21	37.56	15.60	66.67	0.00	--	Peak																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10520.00	47.98	68.20	-20.22	61.49	37.56	15.60	66.67	0.00	--	Peak																																																																						







Mode	5																																																																																																	
	Harmonic																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 7067.10</td> <td>48.77</td> <td>68.20</td> <td>-19.43</td> <td>66.32</td> <td>35.67</td> <td>12.54</td> <td>65.76</td> <td>0.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 10600.00</td> <td>45.09</td> <td>74.00</td> <td>-28.91</td> <td>58.44</td> <td>37.62</td> <td>15.67</td> <td>66.64</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 7067.10	48.77	68.20	-19.43	66.32	35.67	12.54	65.76	0.00	--	--	Peak	2 10600.00	45.09	74.00	-28.91	58.44	37.62	15.67	66.64	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 7067.10</td> <td>51.16</td> <td>68.20</td> <td>-17.04</td> <td>68.71</td> <td>35.67</td> <td>12.54</td> <td>65.76</td> <td>0.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 10600.00</td> <td>46.58</td> <td>74.00</td> <td>-27.42</td> <td>59.93</td> <td>37.62</td> <td>15.67</td> <td>66.64</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 7067.10	51.16	68.20	-17.04	68.71	35.67	12.54	65.76	0.00	--	--	Peak	2 10600.00	46.58	74.00	-27.42	59.93	37.62	15.67	66.64	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 7067.10	48.77	68.20	-19.43	66.32	35.67	12.54	65.76	0.00	--	--	Peak																																																																																							
2 10600.00	45.09	74.00	-28.91	58.44	37.62	15.67	66.64	0.00	--	--	PEAK																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 7067.10	51.16	68.20	-17.04	68.71	35.67	12.54	65.76	0.00	--	--	Peak																																																																																							
2 10600.00	46.58	74.00	-27.42	59.93	37.62	15.67	66.64	0.00	--	--	PEAK																																																																																							

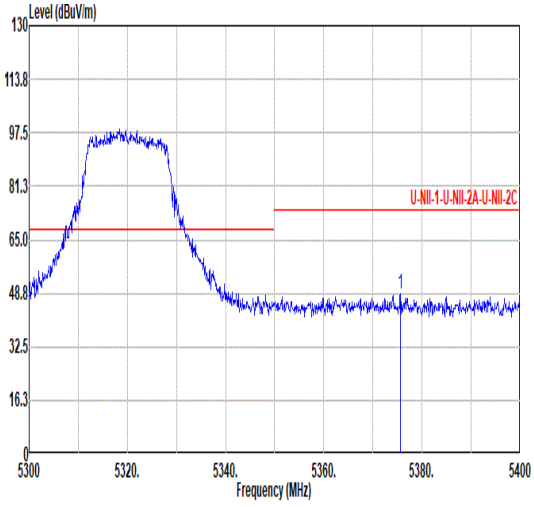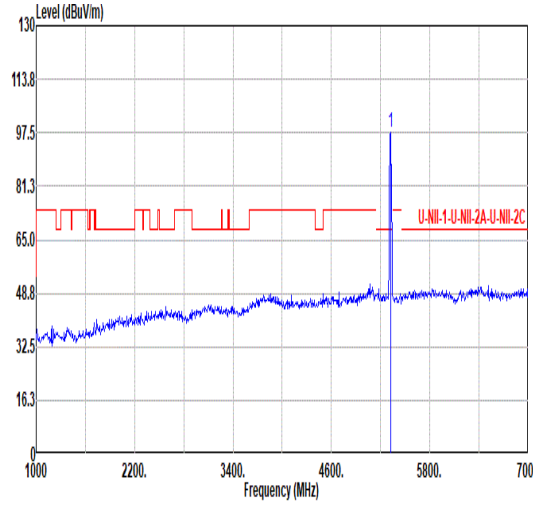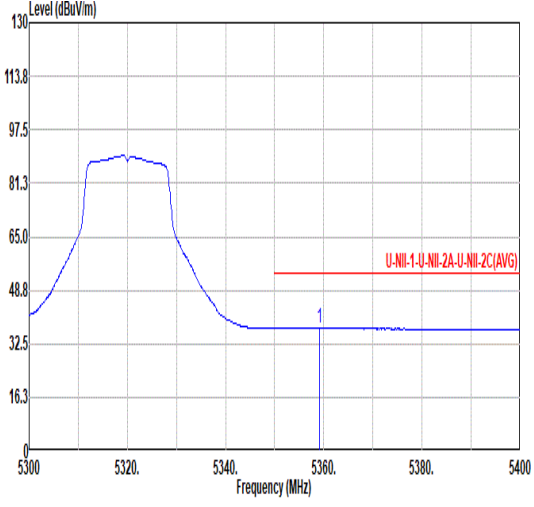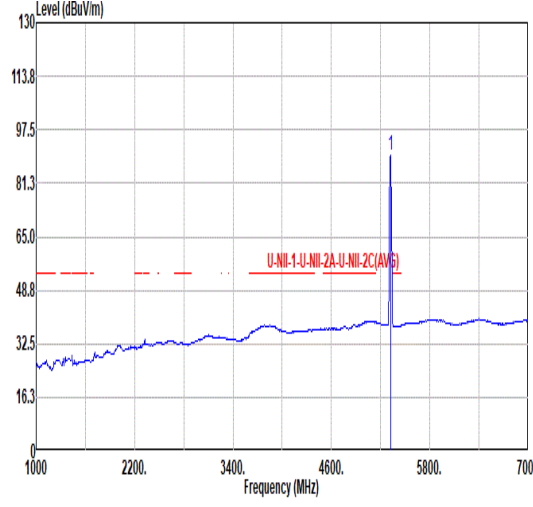

		6																																																																														
Mode	Band Edge																																																																															
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5375.60</td> <td>48.45</td> <td>74.00</td> <td>-25.55</td> <td>39.48</td> <td>34.50</td> <td>10.76</td> <td>36.29</td> <td>0.00</td> <td>245</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5375.60	48.45	74.00	-25.55	39.48	34.50	10.76	36.29	0.00	245	0 PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>97.70</td> <td>-----</td> <td>-----</td> <td>88.96</td> <td>34.50</td> <td>10.73</td> <td>36.49</td> <td>0.00</td> <td>245</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5320.00	97.70	-----	-----	88.96	34.50	10.73	36.49	0.00	245	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	5375.60	48.45	74.00	-25.55	39.48	34.50	10.76	36.29	0.00	245	0 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	5320.00	97.70	-----	-----	88.96	34.50	10.73	36.49	0.00	245	0 PEAK																																																																					
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5359.20</td> <td>37.24</td> <td>54.00</td> <td>-16.76</td> <td>28.37</td> <td>34.50</td> <td>10.75</td> <td>36.38</td> <td>0.00</td> <td>245</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5359.20	37.24	54.00	-16.76	28.37	34.50	10.75	36.38	0.00	245	0 AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>89.79</td> <td>-----</td> <td>-----</td> <td>81.05</td> <td>34.50</td> <td>10.73</td> <td>36.49</td> <td>0.00</td> <td>245</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5320.00	89.79	-----	-----	81.05	34.50	10.73	36.49	0.00	245	0 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	5359.20	37.24	54.00	-16.76	28.37	34.50	10.75	36.38	0.00	245	0 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	5320.00	89.79	-----	-----	81.05	34.50	10.73	36.49	0.00	245	0 AVERAGE																																																																					



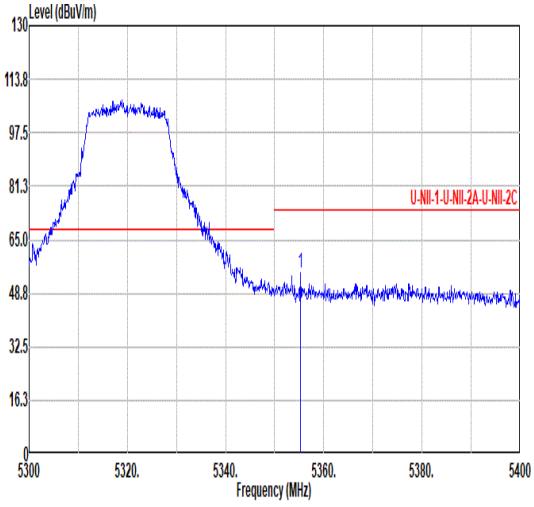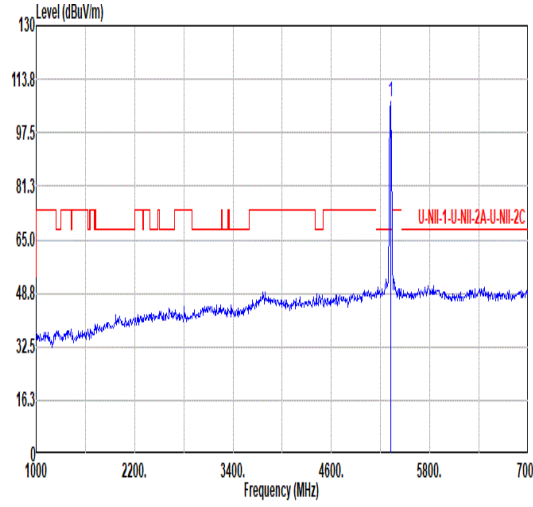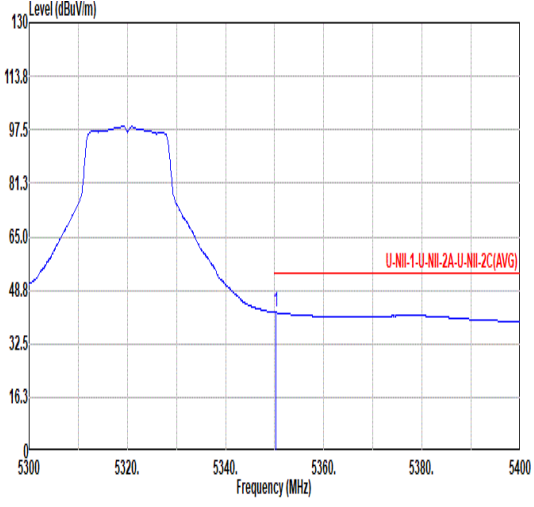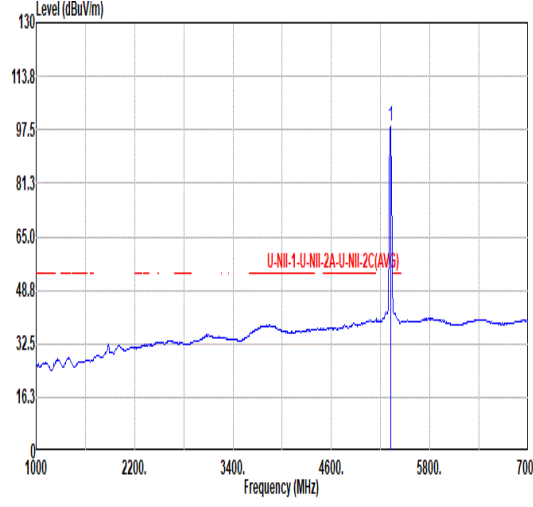

Mode	6																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 <table border="1" data-bbox="263 1153 774 1288"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.20</td> <td>54.70</td> <td>74.00</td> <td>-19.30</td> <td>45.86</td> <td>34.50</td> <td>10.75</td> <td>36.41</td> <td>0.00</td> <td>100</td> <td>295</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5355.20	54.70	74.00	-19.30	45.86	34.50	10.75	36.41	0.00	100	295	PEAK	 <table border="1" data-bbox="901 1153 1412 1288"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>107.16</td> <td>-----</td> <td>-----</td> <td>98.42</td> <td>34.50</td> <td>10.73</td> <td>36.49</td> <td>0.00</td> <td>100</td> <td>295</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	107.16	-----	-----	98.42	34.50	10.73	36.49	0.00	100	295	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5355.20	54.70	74.00	-19.30	45.86	34.50	10.75	36.41	0.00	100	295	PEAK																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	107.16	-----	-----	98.42	34.50	10.73	36.49	0.00	100	295	PEAK																																																																														
Avg	 <table border="1" data-bbox="263 1836 774 1971"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.20</td> <td>41.99</td> <td>54.00</td> <td>-12.01</td> <td>33.18</td> <td>34.50</td> <td>10.75</td> <td>36.44</td> <td>0.00</td> <td>100</td> <td>295</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.20	41.99	54.00	-12.01	33.18	34.50	10.75	36.44	0.00	100	295	AVERAGE	 <table border="1" data-bbox="901 1836 1412 1971"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.63</td> <td>-----</td> <td>-----</td> <td>89.89</td> <td>34.50</td> <td>10.73</td> <td>36.49</td> <td>0.00</td> <td>100</td> <td>295</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	98.63	-----	-----	89.89	34.50	10.73	36.49	0.00	100	295	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5350.20	41.99	54.00	-12.01	33.18	34.50	10.75	36.44	0.00	100	295	AVERAGE																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	cm	deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	98.63	-----	-----	89.89	34.50	10.73	36.49	0.00	100	295	AVERAGE																																																																														







Mode	6																																																																																																									
	Harmonic																																																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.50</td> <td>49.54</td> <td>68.20</td> <td>-18.66</td> <td>67.10</td> <td>35.69</td> <td>12.58</td> <td>65.83</td> <td>0.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>44.36</td> <td>74.00</td> <td>-29.64</td> <td>57.62</td> <td>37.65</td> <td>15.71</td> <td>66.62</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7093.50	49.54	68.20	-18.66	67.10	35.69	12.58	65.83	0.00	--	--	Peak	2	10640.00	44.36	74.00	-29.64	57.62	37.65	15.71	66.62	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7093.50</td> <td>51.97</td> <td>68.20</td> <td>-16.23</td> <td>69.53</td> <td>35.69</td> <td>12.58</td> <td>65.83</td> <td>0.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>45.88</td> <td>74.00</td> <td>-28.12</td> <td>59.14</td> <td>37.65</td> <td>15.71</td> <td>66.62</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7093.50	51.97	68.20	-16.23	69.53	35.69	12.58	65.83	0.00	--	--	Peak	2	10640.00	45.88	74.00	-28.12	59.14	37.65	15.71	66.62	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	7093.50	49.54	68.20	-18.66	67.10	35.69	12.58	65.83	0.00	--	--	Peak																																																																																														
2	10640.00	44.36	74.00	-29.64	57.62	37.65	15.71	66.62	0.00	--	--	PEAK																																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	7093.50	51.97	68.20	-16.23	69.53	35.69	12.58	65.83	0.00	--	--	Peak																																																																																														
2	10640.00	45.88	74.00	-28.12	59.14	37.65	15.71	66.62	0.00	--	--	PEAK																																																																																														



Mode	7																																																																																														
	Band Edge																																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																														
ANT	1																																																																																														
Pol.	Horizontal	Fundamental																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.96</td> <td>51.85</td> <td>74.00</td> <td>-22.15</td> <td>42.54</td> <td>34.55</td> <td>10.83</td> <td>36.07</td> <td>0.00</td> <td>165</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.56</td> <td>53.17</td> <td>68.20</td> <td>-15.03</td> <td>43.80</td> <td>34.57</td> <td>10.85</td> <td>36.05</td> <td>0.00</td> <td>165</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.96	51.85	74.00	-22.15	42.54	34.55	10.83	36.07	0.00	165	360	PEAK	2	5468.56	53.17	68.20	-15.03	43.80	34.57	10.85	36.05	0.00	165	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>111.30</td> <td>-----</td> <td>-----</td> <td>101.84</td> <td>34.60</td> <td>10.89</td> <td>36.03</td> <td>0.00</td> <td>165</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	111.30	-----	-----	101.84	34.60	10.89	36.03	0.00	165	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																									
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5454.96	51.85	74.00	-22.15	42.54	34.55	10.83	36.07	0.00	165	360	PEAK																																																																																			
2	5468.56	53.17	68.20	-15.03	43.80	34.57	10.85	36.05	0.00	165	360	PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																									
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5500.00	111.30	-----	-----	101.84	34.60	10.89	36.03	0.00	165	360	PEAK																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.44</td> <td>42.22</td> <td>54.00</td> <td>-11.78</td> <td>32.88</td> <td>34.56</td> <td>10.84</td> <td>36.06</td> <td>0.00</td> <td>165</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.44	42.22	54.00	-11.78	32.88	34.56	10.84	36.06	0.00	165	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>102.71</td> <td>-----</td> <td>-----</td> <td>93.24</td> <td>34.60</td> <td>10.89</td> <td>36.02</td> <td>0.00</td> <td>165</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	102.71	-----	-----	93.24	34.60	10.89	36.02	0.00	165	360	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																									
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5459.44	42.22	54.00	-11.78	32.88	34.56	10.84	36.06	0.00	165	360	AVERAGE																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																									
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5500.00	102.71	-----	-----	93.24	34.60	10.89	36.02	0.00	165	360	AVERAGE																																																																																			

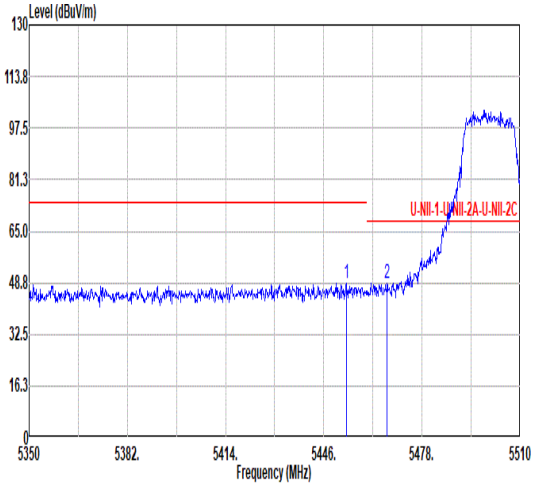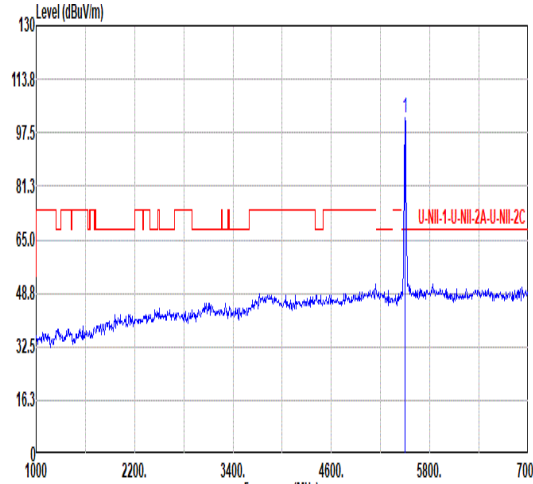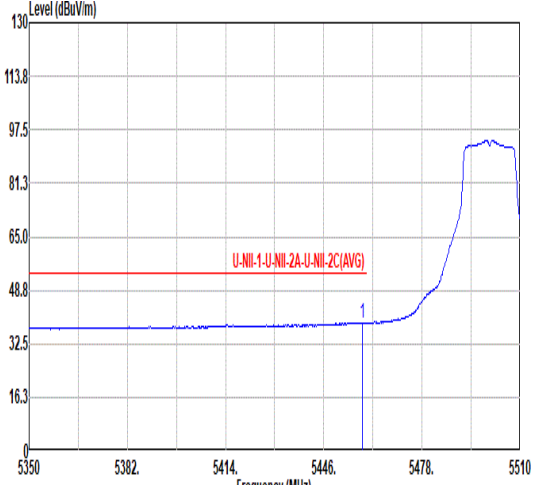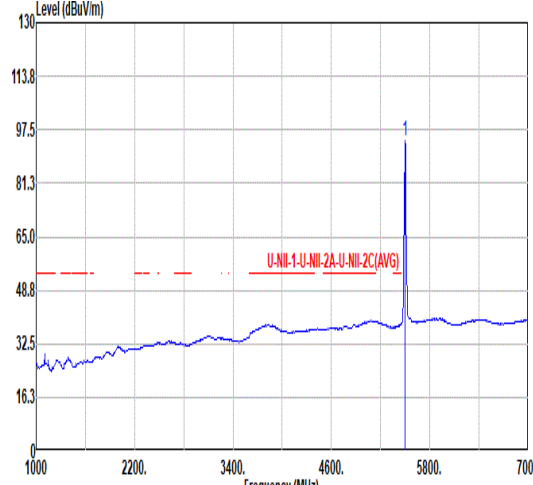

Mode	7																																																																																					
	Band Edge																																																																																					
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																					
ANT	1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <table border="1" data-bbox="263 1131 774 1276"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.36</td> <td>48.79</td> <td>74.00</td> <td>-25.21</td> <td>39.48</td> <td>34.55</td> <td>10.83</td> <td>36.07</td> <td>0.00</td> <td>251</td> <td>270 PEAK</td> </tr> <tr> <td>2</td> <td>5466.64</td> <td>48.71</td> <td>68.20</td> <td>-19.49</td> <td>39.35</td> <td>34.57</td> <td>10.85</td> <td>36.06</td> <td>0.00</td> <td>251</td> <td>270 PEAK</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5453.36	48.79	74.00	-25.21	39.48	34.55	10.83	36.07	0.00	251	270 PEAK	2	5466.64	48.71	68.20	-19.49	39.35	34.57	10.85	36.06	0.00	251	270 PEAK	 <table border="1" data-bbox="901 1131 1412 1276"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>102.20</td> <td>-----</td> <td>92.73</td> <td>34.60</td> <td>10.89</td> <td>36.02</td> <td>0.00</td> <td>251</td> <td>270</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5500.00	102.20	-----	92.73	34.60	10.89	36.02	0.00	251	270	PEAK
		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																										
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5453.36	48.79	74.00	-25.21	39.48	34.55	10.83	36.07	0.00	251	270 PEAK																																																																											
2	5466.64	48.71	68.20	-19.49	39.35	34.57	10.85	36.06	0.00	251	270 PEAK																																																																											
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5500.00	102.20	-----	92.73	34.60	10.89	36.02	0.00	251	270	PEAK																																																																											
Avg	 <table border="1" data-bbox="263 1814 774 1960"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.64</td> <td>38.95</td> <td>54.00</td> <td>-15.05</td> <td>29.61</td> <td>34.56</td> <td>10.84</td> <td>36.06</td> <td>0.00</td> <td>251</td> <td>270 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5458.64	38.95	54.00	-15.05	29.61	34.56	10.84	36.06	0.00	251	270 AVERAGE	 <table border="1" data-bbox="901 1814 1412 1960"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>93.98</td> <td>-----</td> <td>84.51</td> <td>34.60</td> <td>10.89</td> <td>36.02</td> <td>0.00</td> <td>251</td> <td>270</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5500.00	93.98	-----	84.51	34.60	10.89	36.02	0.00	251	270	AVERAGE												
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5458.64	38.95	54.00	-15.05	29.61	34.56	10.84	36.06	0.00	251	270 AVERAGE																																																																											
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5500.00	93.98	-----	84.51	34.60	10.89	36.02	0.00	251	270	AVERAGE																																																																											



Mode	7																																																																																									
	Harmonic																																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg																																																																																										
<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.26</td> <td>74.00</td> <td>-27.74</td> <td>58.79</td> <td>37.90</td> <td>16.04</td> <td>66.47</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7333.30</td> <td>45.71</td> <td>74.00</td> <td>-28.29</td> <td>63.00</td> <td>35.70</td> <td>12.72</td> <td>66.51</td> <td>0.00</td> <td>207</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7333.30</td> <td>39.01</td> <td>54.00</td> <td>-14.99</td> <td>57.10</td> <td>35.70</td> <td>12.72</td> <td>66.51</td> <td>0.00</td> <td>207</td> <td>0</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11000.00</td> <td>45.87</td> <td>74.00</td> <td>-28.13</td> <td>58.40</td> <td>37.90</td> <td>16.04</td> <td>66.47</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	11000.00	46.26	74.00	-27.74	58.79	37.90	16.04	66.47	0.00	--	--	PEAK	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	7333.30	45.71	74.00	-28.29	63.00	35.70	12.72	66.51	0.00	207	0	Peak	2	7333.30	39.01	54.00	-14.99	57.10	35.70	12.72	66.51	0.00	207	0	Average	3	11000.00	45.87	74.00	-28.13	58.40	37.90	16.04	66.47	0.00	--	--	PEAK
Limit	Read	Ant										Cable	Preamp	Aux	APos	TPos	Remark																																																																									
			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																															
1	11000.00	46.26	74.00	-27.74	58.79	37.90	16.04	66.47	0.00	--	--	PEAK																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
									Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																									
1	7333.30	45.71	74.00	-28.29	63.00	35.70	12.72	66.51	0.00	207	0	Peak																																																																														
2	7333.30	39.01	54.00	-14.99	57.10	35.70	12.72	66.51	0.00	207	0	Average																																																																														
3	11000.00	45.87	74.00	-28.13	58.40	37.90	16.04	66.47	0.00	--	--	PEAK																																																																														






Mode	8																																																																															
	Harmonic																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>44.56</td> <td>74.00</td> <td>-29.44</td> <td>56.78</td> <td>38.03</td> <td>16.15</td> <td>66.40</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	44.56	74.00	-29.44	56.78	38.03	16.15	66.40	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>45.56</td> <td>74.00</td> <td>-28.44</td> <td>57.78</td> <td>38.03</td> <td>16.15</td> <td>66.40</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	45.56	74.00	-28.44	57.78	38.03	16.15	66.40	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11160.00	44.56	74.00	-29.44	56.78	38.03	16.15	66.40	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11160.00	45.56	74.00	-28.44	57.78	38.03	16.15	66.40	0.00	--	PEAK																																																																						



Mode	9																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5726.68</td> <td>90.75</td> <td>68.20</td> <td>-17.45</td> <td>40.90</td> <td>34.68</td> <td>11.18</td> <td>36.01</td> <td>0.00</td> <td>292</td> <td>218</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5726.68	90.75	68.20	-17.45	40.90	34.68	11.18	36.01	0.00	292	218	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>98.81</td> <td>-----</td> <td>-----</td> <td>89.14</td> <td>34.60</td> <td>11.14</td> <td>36.07</td> <td>0.00</td> <td>292</td> <td>218</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	98.81	-----	-----	89.14	34.60	11.14	36.07	0.00	292	218	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5726.68	90.75	68.20	-17.45	40.90	34.68	11.18	36.01	0.00	292	218	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5700.00	98.81	-----	-----	89.14	34.60	11.14	36.07	0.00	292	218	PEAK																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>90.23</td> <td>-----</td> <td>-----</td> <td>80.52</td> <td>34.61</td> <td>11.15</td> <td>36.05</td> <td>0.00</td> <td>292</td> <td>218</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	90.23	-----	-----	80.52	34.61	11.15	36.05	0.00	292	218	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5700.00	90.23	-----	-----	80.52	34.61	11.15	36.05	0.00	292	218	AVERAGE																																																															

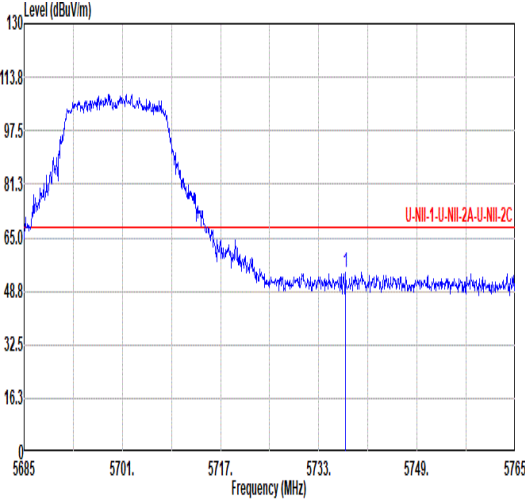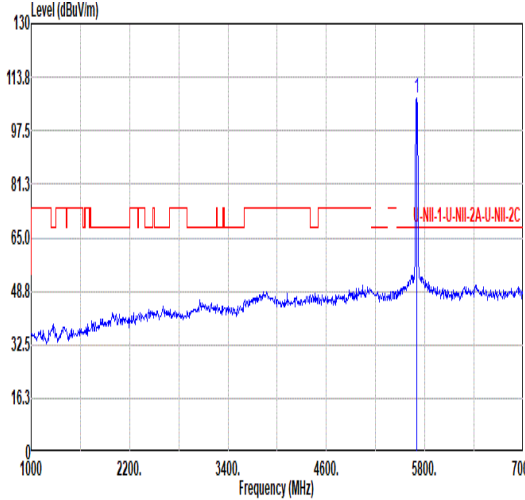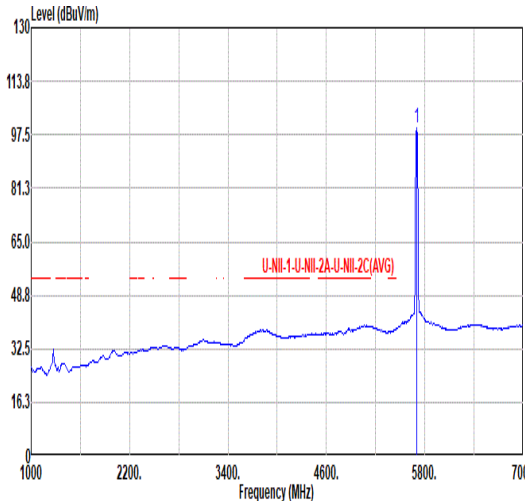





Mode	9																																																															
	Band Edge																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																															
ANT	1																																																															
Pol.	Vertical	Fundamental																																																														
Peak	 <table border="1" data-bbox="268 1160 794 1279"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5737.40</td> <td>54.61</td> <td>68.20</td> <td>-13.59</td> <td>44.70</td> <td>34.71</td> <td>11.19</td> <td>35.99</td> <td>0.00</td> <td>293</td> <td>327</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	5737.40	54.61	68.20	-13.59	44.70	34.71	11.19	35.99	0.00	293	327	PEAK	 <table border="1" data-bbox="906 1160 1433 1279"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>107.51</td> <td>-----</td> <td>-----</td> <td>97.80</td> <td>34.61</td> <td>11.15</td> <td>36.05</td> <td>0.00</td> <td>293</td> <td>327</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	5700.00	107.51	-----	-----	97.80	34.61	11.15	36.05	0.00	293	327	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																								
1	5737.40	54.61	68.20	-13.59	44.70	34.71	11.19	35.99	0.00	293	327	PEAK																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																								
1	5700.00	107.51	-----	-----	97.80	34.61	11.15	36.05	0.00	293	327	PEAK																																																				
Avg	Blank	 <table border="1" data-bbox="906 1836 1433 1955"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>99.59</td> <td>-----</td> <td>-----</td> <td>89.88</td> <td>34.61</td> <td>11.15</td> <td>36.05</td> <td>0.00</td> <td>293</td> <td>327</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	5700.00	99.59	-----	-----	89.88	34.61	11.15	36.05	0.00	293	327	AVERAGE																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																								
1	5700.00	99.59	-----	-----	89.88	34.61	11.15	36.05	0.00	293	327	AVERAGE																																																				









Mode	9																																																																															
	Harmonic																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>44.23</td> <td>74.00</td> <td>-29.77</td> <td>56.00</td> <td>38.22</td> <td>16.30</td> <td>66.29</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11400.00	44.23	74.00	-29.77	56.00	38.22	16.30	66.29	0.00	--	PEAK	<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>44.01</td> <td>74.00</td> <td>-29.99</td> <td>55.78</td> <td>38.22</td> <td>16.30</td> <td>66.29</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11400.00	44.01	74.00	-29.99	55.78	38.22	16.30	66.29	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11400.00	44.23	74.00	-29.77	56.00	38.22	16.30	66.29	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11400.00	44.01	74.00	-29.99	55.78	38.22	16.30	66.29	0.00	--	PEAK																																																																						

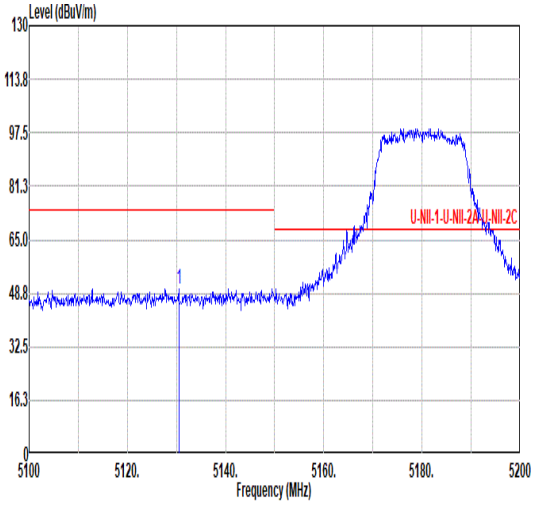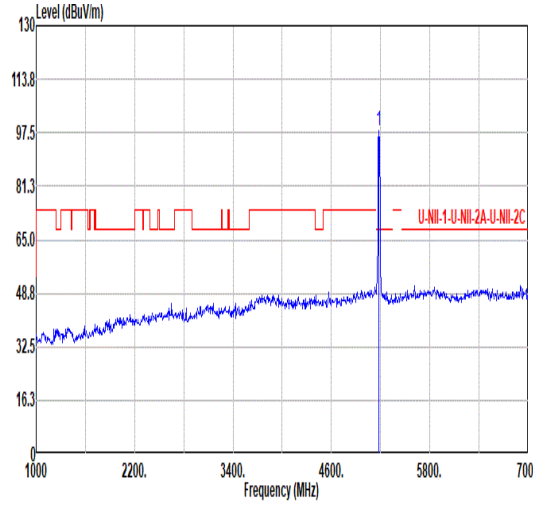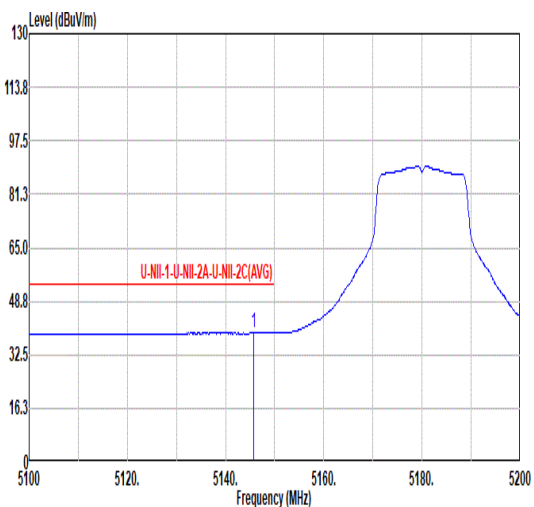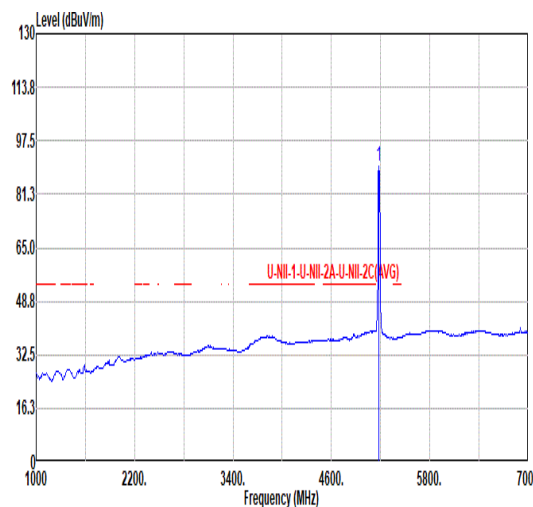

		10																																																																																		
Mode		Band Edge																																																																																		
		U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																																		
ANT		1																																																																																		
Pol.		Horizontal	Fundamental																																																																																	
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5130.50</td> <td>49.97</td> <td>74.00</td> <td>-24.03</td> <td>41.76</td> <td>34.09</td> <td>10.59</td> <td>36.47</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5130.50	49.97	74.00	-24.03	41.76	34.09	10.59	36.47	0.00	100	340	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>97.95</td> <td>-----</td> <td>-----</td> <td>89.65</td> <td>34.25</td> <td>10.64</td> <td>36.59</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	97.95	-----	-----	89.65	34.25	10.64	36.59	0.00	100	340	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5130.50	49.97	74.00	-24.03	41.76	34.09	10.59	36.47	0.00	100	340	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5180.00	97.95	-----	-----	89.65	34.25	10.64	36.59	0.00	100	340	PEAK																																																																								
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.70</td> <td>39.21</td> <td>54.00</td> <td>-14.79</td> <td>30.95</td> <td>34.14</td> <td>10.60</td> <td>36.48</td> <td>0.00</td> <td>100</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5145.70	39.21	54.00	-14.79	30.95	34.14	10.60	36.48	0.00	100	340	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>89.64</td> <td>-----</td> <td>-----</td> <td>81.34</td> <td>34.25</td> <td>10.64</td> <td>36.59</td> <td>0.00</td> <td>100</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	89.64	-----	-----	81.34	34.25	10.64	36.59	0.00	100	340	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5145.70	39.21	54.00	-14.79	30.95	34.14	10.60	36.48	0.00	100	340	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5180.00	89.64	-----	-----	81.34	34.25	10.64	36.59	0.00	100	340	AVERAGE																																																																								

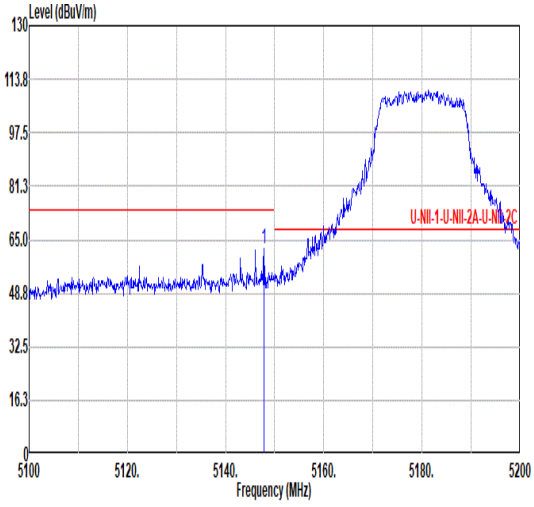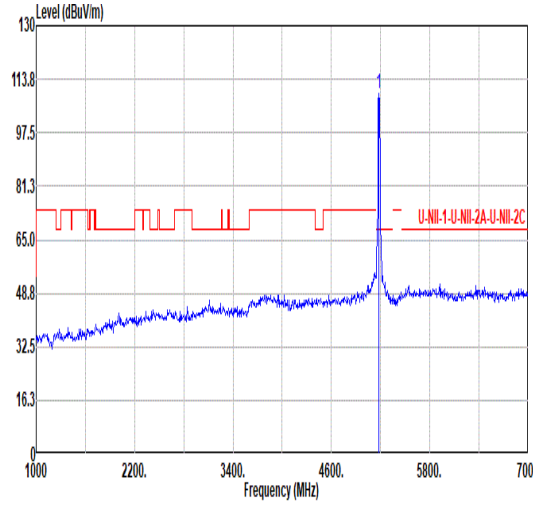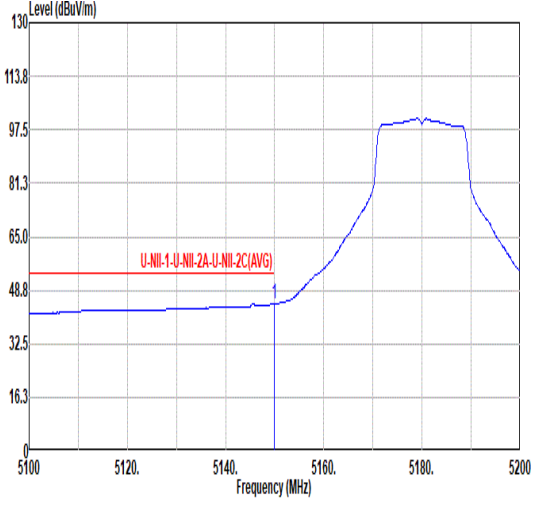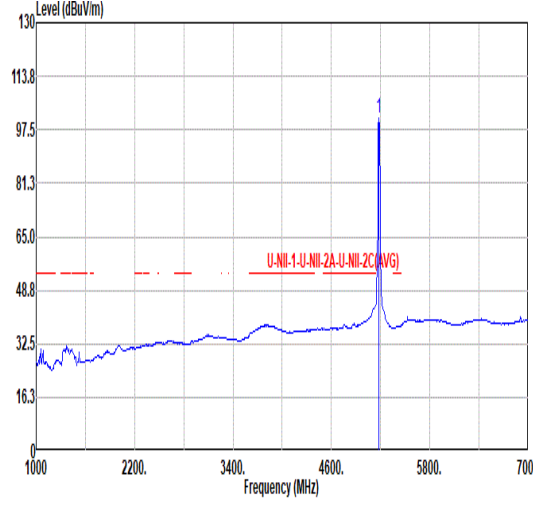

Mode	10																																																																			
	Band Edge																																																																			
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																			
ANT	1																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	 <table border="1" data-bbox="263 1153 774 1288"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5147.00</td> <td>62.42</td> <td>-11.58</td> <td>54.16</td> <td>34.14</td> <td>10.61</td> <td>36.49</td> <td>0.00</td> <td>194</td> <td>253</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5147.00	62.42	-11.58	54.16	34.14	10.61	36.49	0.00	194	253	PEAK	 <table border="1" data-bbox="901 1153 1412 1288"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>109.38</td> <td>-----</td> <td>101.08</td> <td>34.23</td> <td>10.64</td> <td>36.57</td> <td>0.00</td> <td>194</td> <td>253</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5180.00	109.38	-----	101.08	34.23	10.64	36.57	0.00	194	253	PEAK
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																									
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1 5147.00	62.42	-11.58	54.16	34.14	10.61	36.49	0.00	194	253	PEAK																																																										
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																										
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1 5180.00	109.38	-----	101.08	34.23	10.64	36.57	0.00	194	253	PEAK																																																										
Avg	 <table border="1" data-bbox="263 1836 774 1971"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5150.00</td> <td>44.65</td> <td>-9.35</td> <td>36.38</td> <td>34.15</td> <td>10.61</td> <td>36.49</td> <td>0.00</td> <td>194</td> <td>253</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5150.00	44.65	-9.35	36.38	34.15	10.61	36.49	0.00	194	253	AVERAGE	 <table border="1" data-bbox="901 1836 1412 1971"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>100.87</td> <td>-----</td> <td>92.57</td> <td>34.25</td> <td>10.64</td> <td>36.59</td> <td>0.00</td> <td>194</td> <td>253</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5180.00	100.87	-----	92.57	34.25	10.64	36.59	0.00	194	253	AVERAGE
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																										
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1 5150.00	44.65	-9.35	36.38	34.15	10.61	36.49	0.00	194	253	AVERAGE																																																										
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																										
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1 5180.00	100.87	-----	92.57	34.25	10.64	36.59	0.00	194	253	AVERAGE																																																										



Mode	10																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>45.74</td> <td>68.20</td> <td>-22.46</td> <td>59.56</td> <td>37.46</td> <td>15.46</td> <td>66.74</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10360.00	45.74	68.20	-22.46	59.56	37.46	15.46	66.74	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>44.33</td> <td>68.20</td> <td>-23.87</td> <td>58.19</td> <td>37.45</td> <td>15.44</td> <td>66.75</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10360.00	44.33	68.20	-23.87	58.19	37.45	15.44	66.75	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10360.00	45.74	68.20	-22.46	59.56	37.46	15.46	66.74	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10360.00	44.33	68.20	-23.87	58.19	37.45	15.44	66.75	0.00	--	PEAK																																																																						



Mode	11																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT20_CH44_5220MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>45.26</td> <td>68.20</td> <td>-22.94</td> <td>58.93</td> <td>37.51</td> <td>15.53</td> <td>66.71</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	45.26	68.20	-22.94	58.93	37.51	15.53	66.71	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>44.83</td> <td>68.20</td> <td>-23.37</td> <td>58.50</td> <td>37.51</td> <td>15.53</td> <td>66.71</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	44.83	68.20	-23.37	58.50	37.51	15.53	66.71	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10440.00	45.26	68.20	-22.94	58.93	37.51	15.53	66.71	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10440.00	44.83	68.20	-23.37	58.50	37.51	15.53	66.71	0.00	--	PEAK																																																																						



Mode	12																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>45.06</td> <td>68.20</td> <td>-23.14</td> <td>58.66</td> <td>37.53</td> <td>15.56</td> <td>66.69</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	45.06	68.20	-23.14	58.66	37.53	15.56	66.69	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>45.00</td> <td>68.20</td> <td>-22.40</td> <td>59.42</td> <td>37.53</td> <td>15.55</td> <td>66.70</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	45.00	68.20	-22.40	59.42	37.53	15.55	66.70	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10480.00	45.06	68.20	-23.14	58.66	37.53	15.56	66.69	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10480.00	45.00	68.20	-22.40	59.42	37.53	15.55	66.70	0.00	--	PEAK																																																																						







Mode	13																																																																															
	Harmonic																																																																															
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH52_5280MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10560.00</td> <td>44.34</td> <td>68.20</td> <td>-23.86</td> <td>57.77</td> <td>37.59</td> <td>15.64</td> <td>66.66</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10560.00	44.34	68.20	-23.86	57.77	37.59	15.64	66.66	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10560.00</td> <td>43.93</td> <td>68.20</td> <td>-24.27</td> <td>57.37</td> <td>37.59</td> <td>15.63</td> <td>66.66</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10560.00	43.93	68.20	-24.27	57.37	37.59	15.63	66.66	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10560.00	44.34	68.20	-23.86	57.77	37.59	15.64	66.66	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10560.00	43.93	68.20	-24.27	57.37	37.59	15.63	66.66	0.00	--	PEAK																																																																						







Mode	14																																																																															
	Harmonic																																																																															
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH60_5300MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10600.01</td> <td>43.69</td> <td>74.00</td> <td>-30.31</td> <td>57.04</td> <td>37.62</td> <td>15.67</td> <td>66.64</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10600.01	43.69	74.00	-30.31	57.04	37.62	15.67	66.64	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10600.01</td> <td>43.91</td> <td>74.00</td> <td>-30.09</td> <td>57.26</td> <td>37.62</td> <td>15.67</td> <td>66.64</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10600.01	43.91	74.00	-30.09	57.26	37.62	15.67	66.64	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10600.01	43.69	74.00	-30.31	57.04	37.62	15.67	66.64	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10600.01	43.91	74.00	-30.09	57.26	37.62	15.67	66.64	0.00	--	PEAK																																																																						



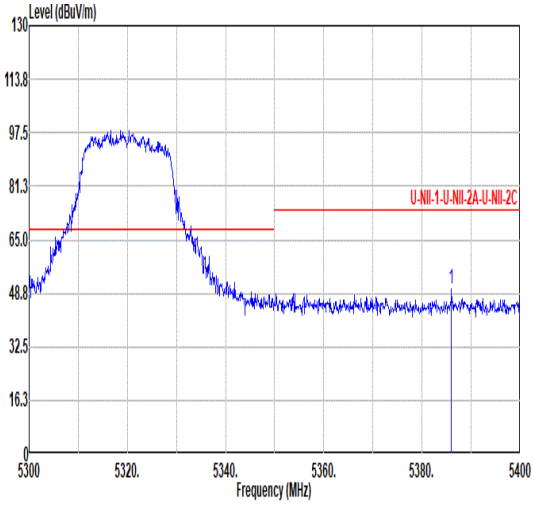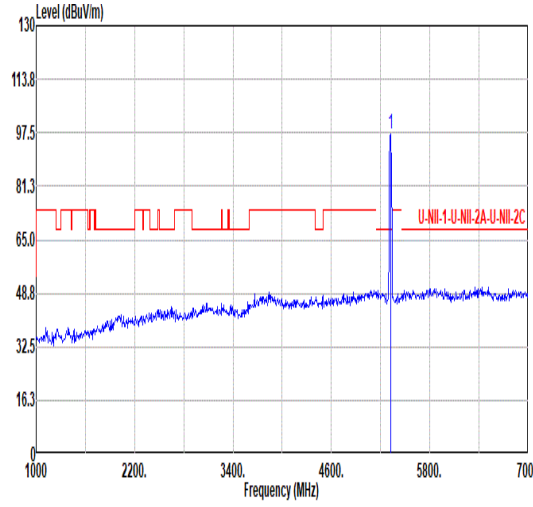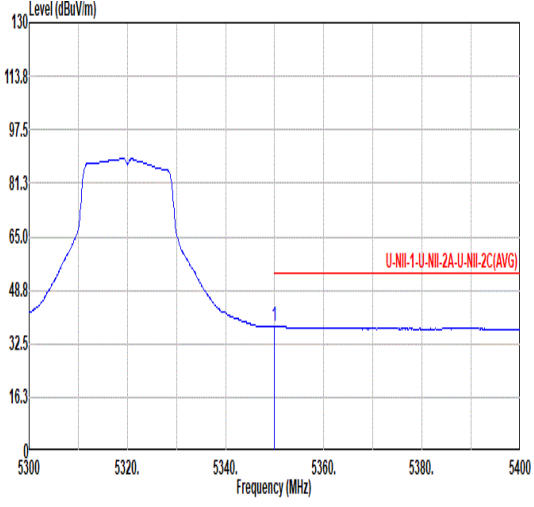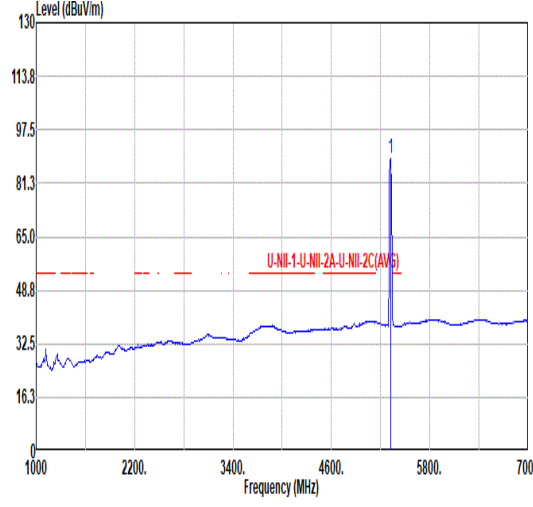

Mode	15																																																																			
	Band Edge																																																																			
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH64_5320MHz																																																																			
ANT	1																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	 <table border="1" data-bbox="263 1153 774 1288"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5350.00</td> <td>50.03</td> <td>74.00 -23.97</td> <td>40.99</td> <td>34.50</td> <td>10.77</td> <td>36.23</td> <td>0.00</td> <td>243</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5350.00	50.03	74.00 -23.97	40.99	34.50	10.77	36.23	0.00	243	0	PEAK	 <table border="1" data-bbox="901 1153 1412 1288"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>97.29</td> <td>-----</td> <td>88.55</td> <td>34.50</td> <td>10.73</td> <td>36.49</td> <td>0.00</td> <td>243</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5320.00	97.29	-----	88.55	34.50	10.73	36.49	0.00	243	0	PEAK
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																									
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1 5350.00	50.03	74.00 -23.97	40.99	34.50	10.77	36.23	0.00	243	0	PEAK																																																										
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																										
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1 5320.00	97.29	-----	88.55	34.50	10.73	36.49	0.00	243	0	PEAK																																																										
Avg	 <table border="1" data-bbox="263 1836 774 1971"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5350.00</td> <td>37.62</td> <td>54.00 -16.38</td> <td>28.81</td> <td>34.50</td> <td>10.75</td> <td>36.44</td> <td>0.00</td> <td>243</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5350.00	37.62	54.00 -16.38	28.81	34.50	10.75	36.44	0.00	243	0	AVERAGE	 <table border="1" data-bbox="901 1836 1412 1971"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>88.97</td> <td>-----</td> <td>80.23</td> <td>34.50</td> <td>10.73</td> <td>36.49</td> <td>0.00</td> <td>243</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5320.00	88.97	-----	80.23	34.50	10.73	36.49	0.00	243	0	AVERAGE
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																										
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1 5350.00	37.62	54.00 -16.38	28.81	34.50	10.75	36.44	0.00	243	0	AVERAGE																																																										
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																										
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1 5320.00	88.97	-----	80.23	34.50	10.73	36.49	0.00	243	0	AVERAGE																																																										

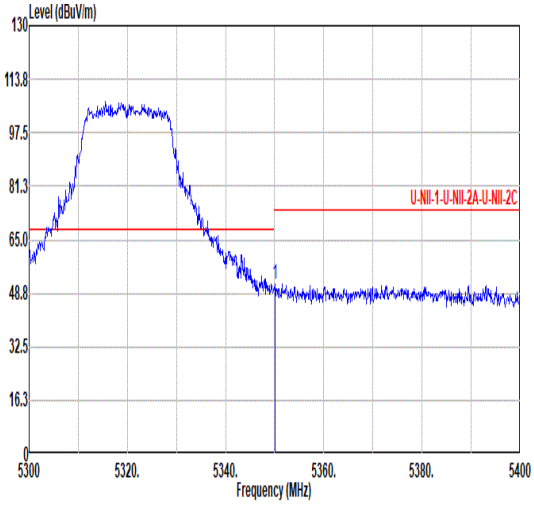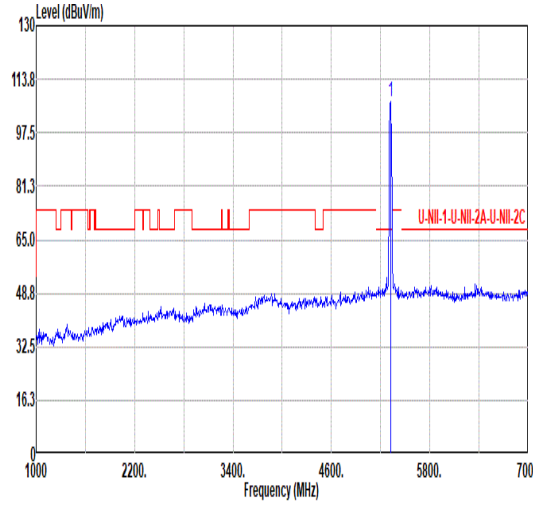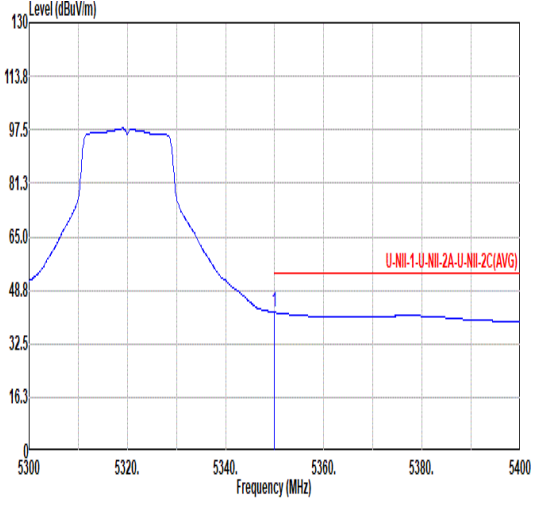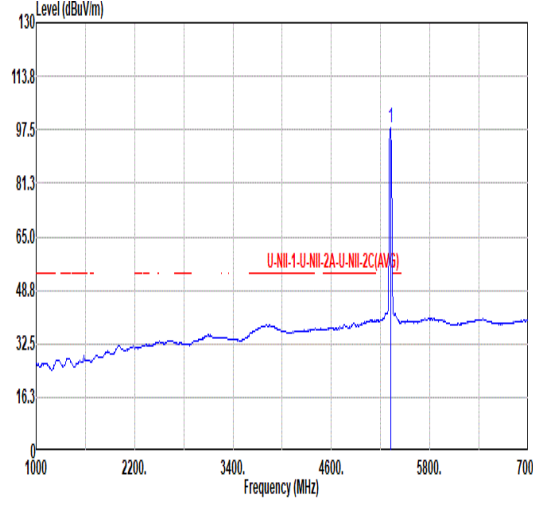

Mode	15																																																															
	Band Edge																																																															
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH64_5320MHz																																																															
ANT	1																																																															
Pol.	Vertical	Fundamental																																																														
Peak	 <table border="1" data-bbox="263 1153 774 1288"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>51.39</td> <td>74.00</td> <td>-22.61</td> <td>42.58</td> <td>34.50</td> <td>10.75</td> <td>36.44</td> <td>0.00</td> <td>100</td> <td>295</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	1	5350.10	51.39	74.00	-22.61	42.58	34.50	10.75	36.44	0.00	100	295	PEAK	 <table border="1" data-bbox="901 1153 1412 1288"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.99</td> <td>-----</td> <td>-----</td> <td>98.25</td> <td>34.50</td> <td>10.73</td> <td>36.49</td> <td>0.00</td> <td>100</td> <td>295</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	1	5320.00	106.99	-----	-----	98.25	34.50	10.73	36.49	0.00	100	295	PEAK
	Limit										Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq		Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																																							
1	5350.10	51.39	74.00	-22.61	42.58	34.50	10.75	36.44	0.00	100	295	PEAK																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
									Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																															
1	5320.00	106.99	-----	-----	98.25	34.50	10.73	36.49	0.00	100	295	PEAK																																																				
Avg	 <table border="1" data-bbox="263 1836 774 1971"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>42.06</td> <td>54.00</td> <td>-11.94</td> <td>33.25</td> <td>34.50</td> <td>10.75</td> <td>36.44</td> <td>0.00</td> <td>100</td> <td>295</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	1	5350.00	42.06	54.00	-11.94	33.25	34.50	10.75	36.44	0.00	100	295	AVERAGE	 <table border="1" data-bbox="901 1836 1412 1971"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Aux</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.03</td> <td>-----</td> <td>-----</td> <td>89.29</td> <td>34.50</td> <td>10.73</td> <td>36.49</td> <td>0.00</td> <td>100</td> <td>295</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	1	5320.00	98.03	-----	-----	89.29	34.50	10.73	36.49	0.00	100	295	AVERAGE
Limit	Read										Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																																						
1	5350.00	42.06	54.00	-11.94	33.25	34.50	10.75	36.44	0.00	100	295	AVERAGE																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
									Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																															
1	5320.00	98.03	-----	-----	89.29	34.50	10.73	36.49	0.00	100	295	AVERAGE																																																				







Mode	15																																																																															
	Harmonic																																																																															
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH64_5320MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>43.80</td> <td>74.00</td> <td>-30.20</td> <td>57.06</td> <td>37.65</td> <td>15.71</td> <td>66.62</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	43.80	74.00	-30.20	57.06	37.65	15.71	66.62	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>44.10</td> <td>74.00</td> <td>-29.90</td> <td>57.36</td> <td>37.65</td> <td>15.71</td> <td>66.62</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	44.10	74.00	-29.90	57.36	37.65	15.71	66.62	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10640.00	43.80	74.00	-30.20	57.06	37.65	15.71	66.62	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10640.00	44.10	74.00	-29.90	57.36	37.65	15.71	66.62	0.00	--	PEAK																																																																						



Mode	16																																																																																																
	Band Edge																																																																																																
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH100_5500MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal	Fundamental																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.40</td> <td>48.54</td> <td>74.00</td> <td>-25.46</td> <td>39.21</td> <td>34.56</td> <td>10.84</td> <td>36.07</td> <td>0.00</td> <td>300</td> <td>56</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.44</td> <td>48.45</td> <td>68.20</td> <td>-19.75</td> <td>39.08</td> <td>34.57</td> <td>10.85</td> <td>36.05</td> <td>0.00</td> <td>300</td> <td>56</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.40	48.54	74.00	-25.46	39.21	34.56	10.84	36.07	0.00	300	56	PEAK	2	5467.44	48.45	68.20	-19.75	39.08	34.57	10.85	36.05	0.00	300	56	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>97.31</td> <td>-----</td> <td>-----</td> <td>87.84</td> <td>34.60</td> <td>10.89</td> <td>36.02</td> <td>0.00</td> <td>300</td> <td>56</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	97.31	-----	-----	87.84	34.60	10.89	36.02	0.00	300	56	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5456.40	48.54	74.00	-25.46	39.21	34.56	10.84	36.07	0.00	300	56	PEAK																																																																																					
2	5467.44	48.45	68.20	-19.75	39.08	34.57	10.85	36.05	0.00	300	56	PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	97.31	-----	-----	87.84	34.60	10.89	36.02	0.00	300	56	PEAK																																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.28</td> <td>37.64</td> <td>54.00</td> <td>-16.36</td> <td>28.30</td> <td>34.56</td> <td>10.84</td> <td>36.06</td> <td>0.00</td> <td>300</td> <td>56</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.28	37.64	54.00	-16.36	28.30	34.56	10.84	36.06	0.00	300	56	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>89.10</td> <td>-----</td> <td>-----</td> <td>79.63</td> <td>34.60</td> <td>10.89</td> <td>36.02</td> <td>0.00</td> <td>300</td> <td>56</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	89.10	-----	-----	79.63	34.60	10.89	36.02	0.00	300	56	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5459.28	37.64	54.00	-16.36	28.30	34.56	10.84	36.06	0.00	300	56	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	89.10	-----	-----	79.63	34.60	10.89	36.02	0.00	300	56	AVERAGE																																																																																					

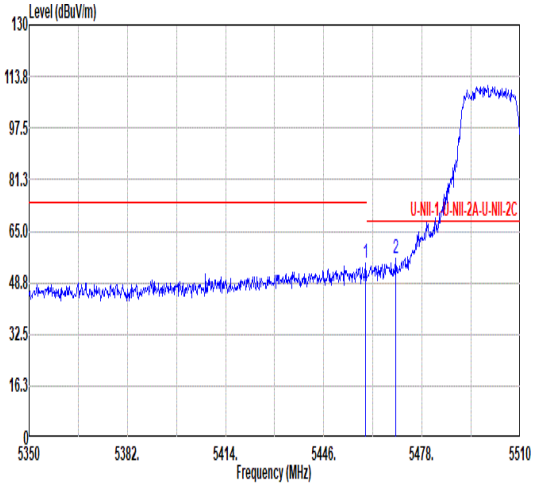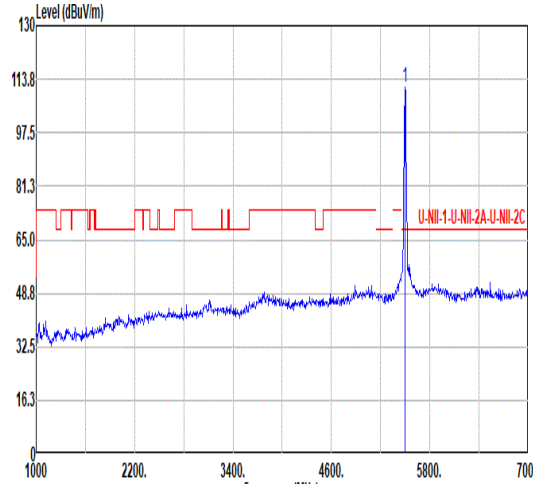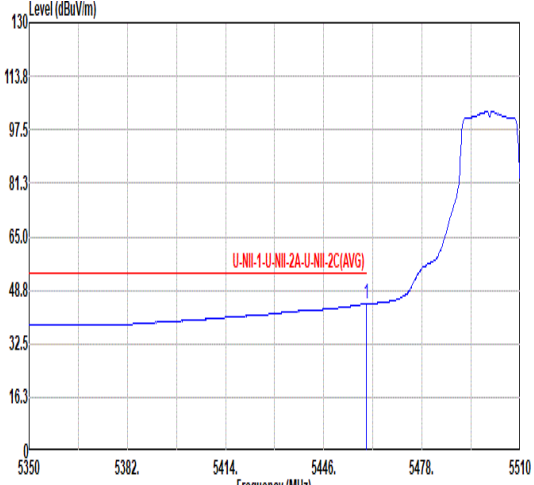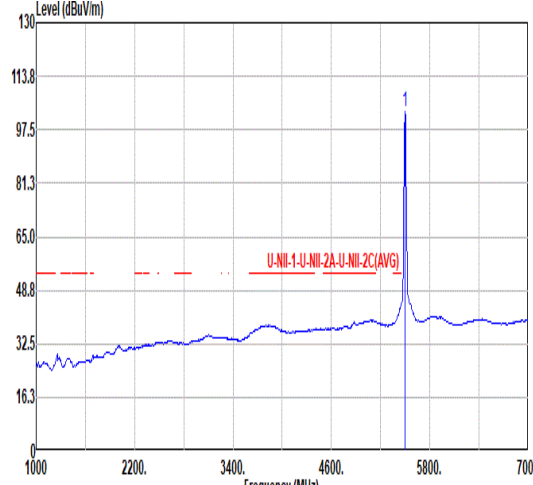

Mode	16																																																																																																
	Band Edge																																																																																																
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH100_5500MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical	Fundamental																																																																																															
Peak	 <table border="1" data-bbox="263 1131 782 1288"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.60</td> <td>54.78</td> <td>74.00</td> <td>-19.22</td> <td>45.44</td> <td>34.56</td> <td>10.84</td> <td>36.06</td> <td>0.00</td> <td>195</td> <td>280</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.52</td> <td>56.32</td> <td>68.20</td> <td>-11.88</td> <td>46.95</td> <td>34.57</td> <td>10.85</td> <td>36.05</td> <td>0.00</td> <td>195</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.60	54.78	74.00	-19.22	45.44	34.56	10.84	36.06	0.00	195	280	PEAK	2	5469.52	56.32	68.20	-11.88	46.95	34.57	10.85	36.05	0.00	195	280	PEAK	 <table border="1" data-bbox="901 1131 1420 1288"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>111.60</td> <td>-----</td> <td>-----</td> <td>102.13</td> <td>34.60</td> <td>10.89</td> <td>36.02</td> <td>0.00</td> <td>195</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	111.60	-----	-----	102.13	34.60	10.89	36.02	0.00	195	280	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5459.60	54.78	74.00	-19.22	45.44	34.56	10.84	36.06	0.00	195	280	PEAK																																																																																					
2	5469.52	56.32	68.20	-11.88	46.95	34.57	10.85	36.05	0.00	195	280	PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	111.60	-----	-----	102.13	34.60	10.89	36.02	0.00	195	280	PEAK																																																																																					
Avg	 <table border="1" data-bbox="263 1814 782 1971"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>44.65</td> <td>54.00</td> <td>-9.35</td> <td>35.31</td> <td>34.56</td> <td>10.84</td> <td>36.06</td> <td>0.00</td> <td>195</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	44.65	54.00	-9.35	35.31	34.56	10.84	36.06	0.00	195	280	AVERAGE	 <table border="1" data-bbox="901 1814 1420 1971"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>103.12</td> <td>-----</td> <td>-----</td> <td>93.65</td> <td>34.60</td> <td>10.89</td> <td>36.02</td> <td>0.00</td> <td>195</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	103.12	-----	-----	93.65	34.60	10.89	36.02	0.00	195	280	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5459.92	44.65	54.00	-9.35	35.31	34.56	10.84	36.06	0.00	195	280	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	103.12	-----	-----	93.65	34.60	10.89	36.02	0.00	195	280	AVERAGE																																																																																					



Mode	16																																																																															
	Harmonic																																																																															
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH100_5500MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>44.86</td> <td>74.00</td> <td>-29.14</td> <td>57.39</td> <td>37.90</td> <td>16.04</td> <td>66.47</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	44.86	74.00	-29.14	57.39	37.90	16.04	66.47	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>45.52</td> <td>74.00</td> <td>-28.48</td> <td>58.05</td> <td>37.90</td> <td>16.04</td> <td>66.47</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	45.52	74.00	-28.48	58.05	37.90	16.04	66.47	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11000.00	44.86	74.00	-29.14	57.39	37.90	16.04	66.47	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11000.00	45.52	74.00	-28.48	58.05	37.90	16.04	66.47	0.00	--	PEAK																																																																						






Mode	17																																																																															
	Harmonic																																																																															
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH116_5580MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>45.57</td> <td>74.00</td> <td>-28.43</td> <td>57.79</td> <td>38.03</td> <td>16.15</td> <td>66.40</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	45.57	74.00	-28.43	57.79	38.03	16.15	66.40	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>44.37</td> <td>74.00</td> <td>-29.63</td> <td>56.59</td> <td>38.03</td> <td>16.15</td> <td>66.40</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	44.37	74.00	-29.63	56.59	38.03	16.15	66.40	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11160.00	45.57	74.00	-28.43	57.79	38.03	16.15	66.40	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11160.00	44.37	74.00	-29.63	56.59	38.03	16.15	66.40	0.00	--	PEAK																																																																						



Mode	18																																																																															
	Band Edge																																																																															
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5748.28</td> <td>51.74</td> <td>68.20</td> <td>-16.46</td> <td>41.77</td> <td>34.74</td> <td>11.21</td> <td>35.98</td> <td>0.00</td> <td>293</td> <td>218</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5748.28	51.74	68.20	-16.46	41.77	34.74	11.21	35.98	0.00	293	218	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>98.54</td> <td>-----</td> <td>-----</td> <td>88.83</td> <td>34.61</td> <td>11.15</td> <td>36.05</td> <td>0.00</td> <td>293</td> <td>218</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	98.54	-----	-----	88.83	34.61	11.15	36.05	0.00	293	218	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5748.28	51.74	68.20	-16.46	41.77	34.74	11.21	35.98	0.00	293	218	PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5700.00	98.54	-----	-----	88.83	34.61	11.15	36.05	0.00	293	218	PEAK																																																																				
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>90.07</td> <td>-----</td> <td>-----</td> <td>80.40</td> <td>34.60</td> <td>11.14</td> <td>36.07</td> <td>0.00</td> <td>293</td> <td>218</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	90.07	-----	-----	80.40	34.60	11.14	36.07	0.00	293	218	AVERAGE																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5700.00	90.07	-----	-----	80.40	34.60	11.14	36.07	0.00	293	218	AVERAGE																																																																				




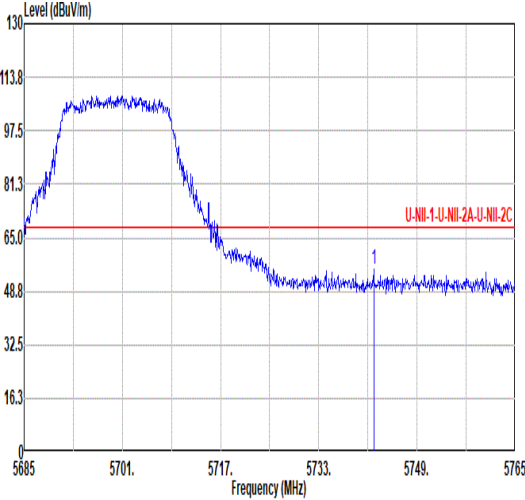
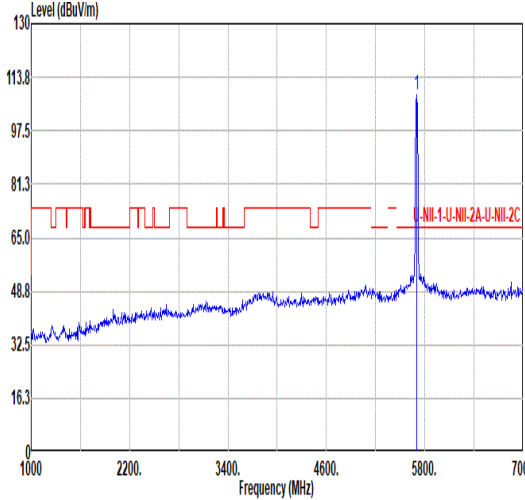
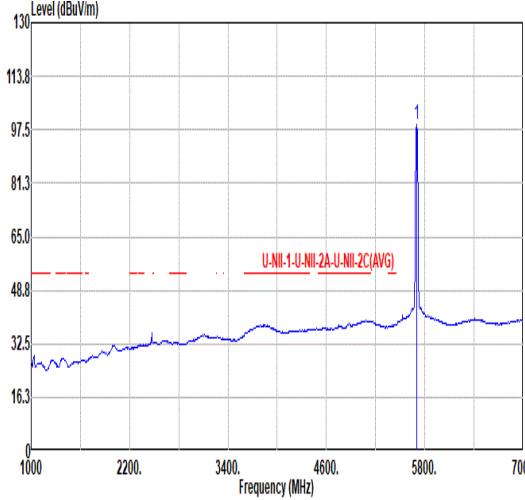


Mode	18																																																																																			
	Band Edge																																																																																			
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <table border="1" data-bbox="268 1153 794 1276"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5741.96</td> <td>55.48</td> <td>68.20</td> <td>-12.72</td> <td>45.54</td> <td>34.73</td> <td>11.20</td> <td>35.99</td> <td>0.00</td> <td>268</td> <td>328</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5741.96	55.48	68.20	-12.72	45.54	34.73	11.20	35.99	0.00	268	328	PEAK	 <table border="1" data-bbox="906 1153 1433 1276"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>108.23</td> <td>-----</td> <td>-----</td> <td>98.56</td> <td>34.60</td> <td>11.14</td> <td>36.07</td> <td>0.00</td> <td>268</td> <td>328</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	108.23	-----	-----	98.56	34.60	11.14	36.07	0.00	268	328	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5741.96	55.48	68.20	-12.72	45.54	34.73	11.20	35.99	0.00	268	328	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	108.23	-----	-----	98.56	34.60	11.14	36.07	0.00	268	328	PEAK																																																																								
Avg	Blank	 <table border="1" data-bbox="906 1834 1433 1957"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>99.03</td> <td>-----</td> <td>-----</td> <td>89.32</td> <td>34.61</td> <td>11.15</td> <td>36.05</td> <td>0.00</td> <td>268</td> <td>328</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	99.03	-----	-----	89.32	34.61	11.15	36.05	0.00	268	328	AVERAGE																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	99.03	-----	-----	89.32	34.61	11.15	36.05	0.00	268	328	AVERAGE																																																																								



Mode	18																																																																															
	Harmonic																																																																															
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>44.92</td> <td>74.00</td> <td>-29.08</td> <td>56.69</td> <td>38.22</td> <td>16.30</td> <td>66.29</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11400.00	44.92	74.00	-29.08	56.69	38.22	16.30	66.29	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>45.19</td> <td>74.00</td> <td>-28.81</td> <td>56.96</td> <td>38.22</td> <td>16.30</td> <td>66.29</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11400.00	45.19	74.00	-28.81	56.96	38.22	16.30	66.29	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11400.00	44.92	74.00	-29.08	56.69	38.22	16.30	66.29	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11400.00	45.19	74.00	-28.81	56.96	38.22	16.30	66.29	0.00	--	PEAK																																																																						

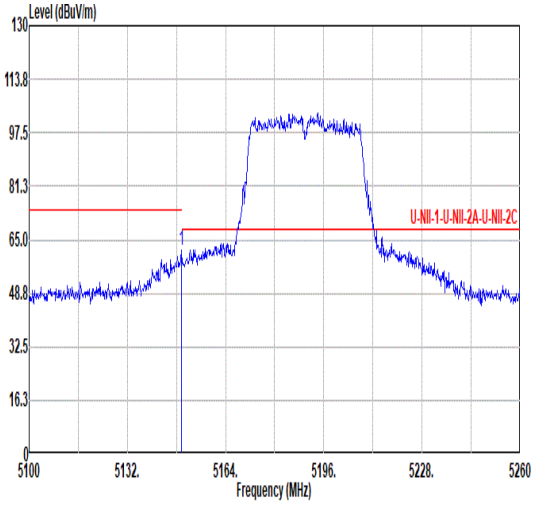
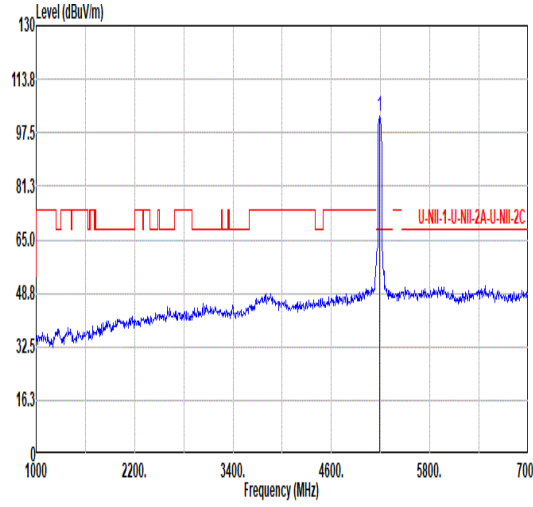
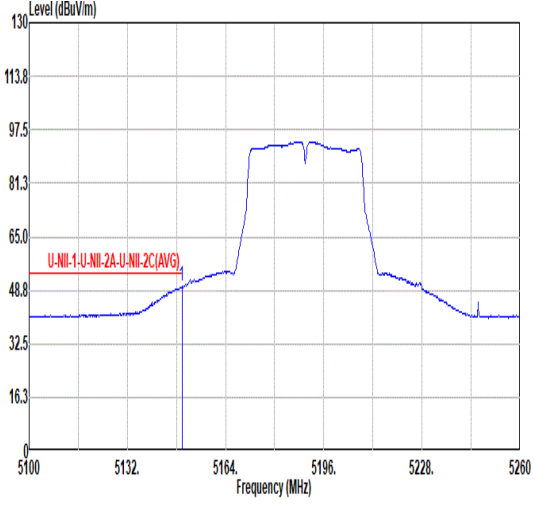
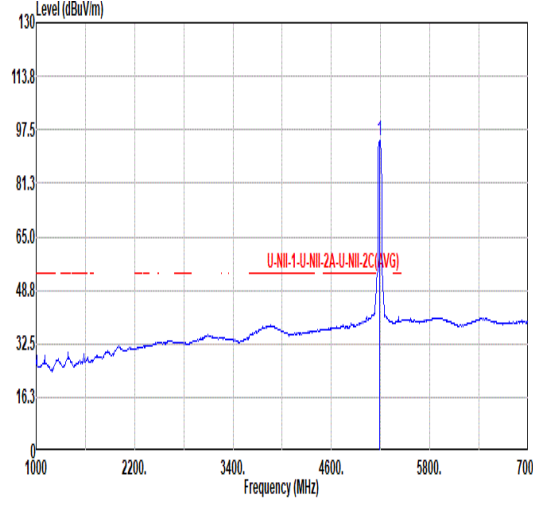


Mode	19																																																																											
	Band Edge - L																																																																											
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <table border="1" data-bbox="263 1153 774 1288"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.60</td> <td>61.64</td> <td>74.00</td> <td>-12.36</td> <td>53.37</td> <td>34.15</td> <td>10.61</td> <td>36.49</td> <td>0.00</td> <td>175</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.60	61.64	74.00	-12.36	53.37	34.15	10.61	36.49	0.00	175	360	PEAK	 <table border="1" data-bbox="901 1153 1412 1288"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>102.30</td> <td>-----</td> <td>-----</td> <td>94.00</td> <td>34.26</td> <td>10.65</td> <td>36.61</td> <td>0.00</td> <td>175</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5190.00	102.30	-----	-----	94.00	34.26	10.65	36.61	0.00	175	360	PEAK
	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5149.60	61.64	74.00	-12.36	53.37	34.15	10.61	36.49	0.00	175	360	PEAK																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5190.00	102.30	-----	-----	94.00	34.26	10.65	36.61	0.00	175	360	PEAK																																																																
Avg	 <table border="1" data-bbox="263 1836 774 1971"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>49.86</td> <td>54.00</td> <td>-4.14</td> <td>41.59</td> <td>34.15</td> <td>10.61</td> <td>36.49</td> <td>0.00</td> <td>175</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.76	49.86	54.00	-4.14	41.59	34.15	10.61	36.49	0.00	175	360	AVERAGE	 <table border="1" data-bbox="901 1836 1412 1971"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>93.97</td> <td>-----</td> <td>-----</td> <td>85.67</td> <td>34.26</td> <td>10.65</td> <td>36.61</td> <td>0.00</td> <td>175</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5190.00	93.97	-----	-----	85.67	34.26	10.65	36.61	0.00	175	360	AVERAGE
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5149.76	49.86	54.00	-4.14	41.59	34.15	10.61	36.49	0.00	175	360	AVERAGE																																																																
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5190.00	93.97	-----	-----	85.67	34.26	10.65	36.61	0.00	175	360	AVERAGE																																																																



Mode	19																																							
	Band Edge - R																																							
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																							
ANT	1																																							
Pol.	Horizontal	Fundamental																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5457.03</td> <td>49.68</td> <td>74.00</td> <td>-24.32</td> <td>40.35</td> <td>34.56</td> <td>10.84</td> <td>36.07</td> <td>0.00</td> <td>175 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5457.03	49.68	74.00	-24.32	40.35	34.56	10.84	36.07	0.00	175 360 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5457.03	49.68	74.00	-24.32	40.35	34.56	10.84	36.07	0.00	175 360 PEAK																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5414.37</td> <td>40.98</td> <td>54.00</td> <td>-13.02</td> <td>31.80</td> <td>34.51</td> <td>10.79</td> <td>36.12</td> <td>0.00</td> <td>175 360 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5414.37	40.98	54.00	-13.02	31.80	34.51	10.79	36.12	0.00	175 360 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5414.37	40.98	54.00	-13.02	31.80	34.51	10.79	36.12	0.00	175 360 AVERAGE																															

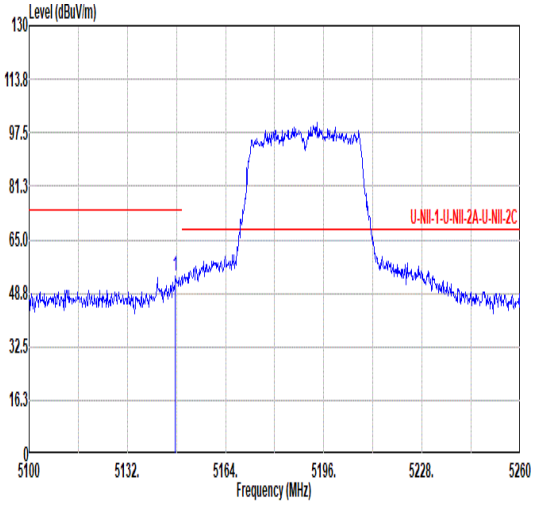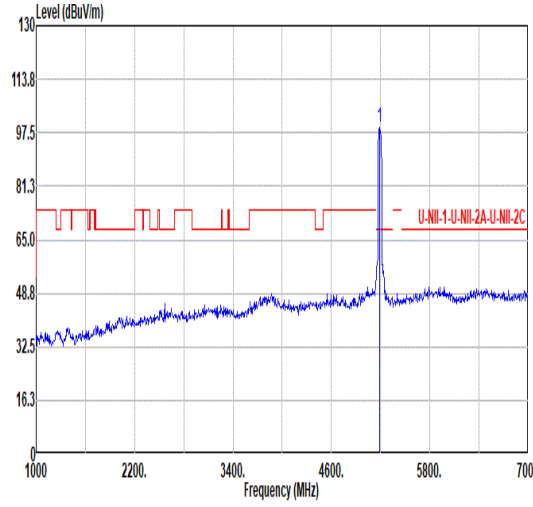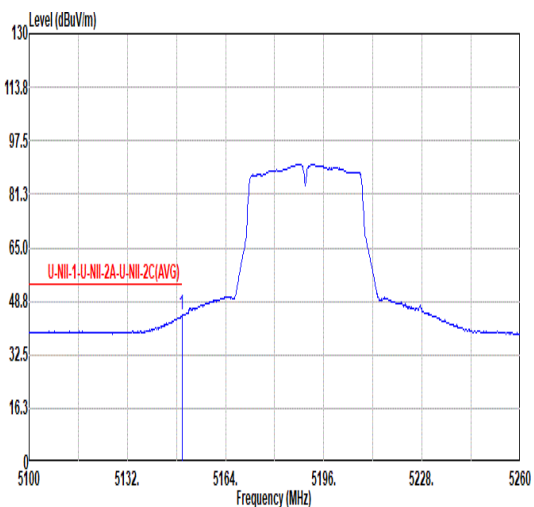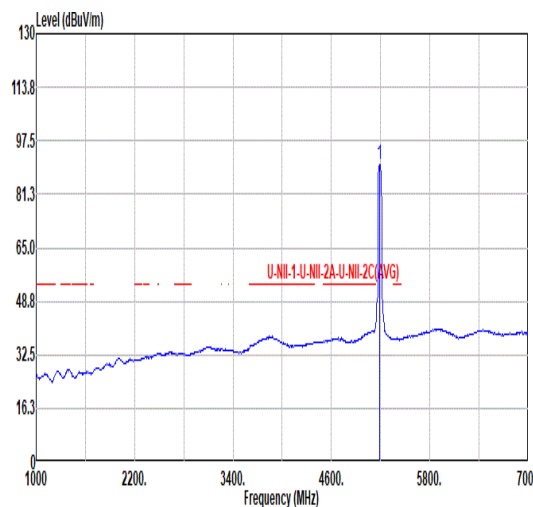

		19																																																																																						
Mode	Band Edge - L																																																																																							
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																																							
ANT	1																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.68</td> <td>53.81</td> <td>74.00</td> <td>-20.19</td> <td>45.55</td> <td>34.14</td> <td>10.61</td> <td>36.49</td> <td>0.00</td> <td>297</td> <td>86 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5147.68	53.81	74.00	-20.19	45.55	34.14	10.61	36.49	0.00	297	86 PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>99.08</td> <td>-----</td> <td>-----</td> <td>90.78</td> <td>34.26</td> <td>10.65</td> <td>36.61</td> <td>0.00</td> <td>297</td> <td>86 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5190.00	99.08	-----	-----	90.78	34.26	10.65	36.61	0.00	297	86 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5147.68	53.81	74.00	-20.19	45.55	34.14	10.61	36.49	0.00	297	86 PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5190.00	99.08	-----	-----	90.78	34.26	10.65	36.61	0.00	297	86 PEAK																																																																													
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>44.47</td> <td>54.00</td> <td>-9.53</td> <td>36.20</td> <td>34.15</td> <td>10.61</td> <td>36.49</td> <td>0.00</td> <td>297</td> <td>86 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.76	44.47	54.00	-9.53	36.20	34.15	10.61	36.49	0.00	297	86 AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>90.42</td> <td>-----</td> <td>-----</td> <td>82.12</td> <td>34.28</td> <td>10.65</td> <td>36.63</td> <td>0.00</td> <td>297</td> <td>86 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5190.00	90.42	-----	-----	82.12	34.28	10.65	36.63	0.00	297	86 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5149.76	44.47	54.00	-9.53	36.20	34.15	10.61	36.49	0.00	297	86 AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5190.00	90.42	-----	-----	82.12	34.28	10.65	36.63	0.00	297	86 AVERAGE																																																																													



Mode	19																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																										
ANT	1																																										
Pol.	Vertical	Fundamental																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5366.31</td> <td>47.84</td> <td>74.00</td> <td>-26.16</td> <td>38.92</td> <td>34.50</td> <td>10.76</td> <td>36.34</td> <td>0.00</td> <td>297</td> <td>86</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5366.31	47.84	74.00	-26.16	38.92	34.50	10.76	36.34	0.00	297	86	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5366.31	47.84	74.00	-26.16	38.92	34.50	10.76	36.34	0.00	297	86	PEAK																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.25</td> <td>37.75</td> <td>54.00</td> <td>-16.25</td> <td>28.44</td> <td>34.55</td> <td>10.83</td> <td>36.07</td> <td>0.00</td> <td>297</td> <td>86</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5453.25	37.75	54.00	-16.25	28.44	34.55	10.83	36.07	0.00	297	86	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5453.25	37.75	54.00	-16.25	28.44	34.55	10.83	36.07	0.00	297	86	AVERAGE																															



Mode	19																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10380.00</td> <td>44.62</td> <td>68.20</td> <td>-23.58</td> <td>58.41</td> <td>37.47</td> <td>15.47</td> <td>66.73</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10380.00	44.62	68.20	-23.58	58.41	37.47	15.47	66.73	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10380.00</td> <td>44.83</td> <td>68.20</td> <td>-23.37</td> <td>58.65</td> <td>37.46</td> <td>15.46</td> <td>66.74</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10380.00	44.83	68.20	-23.37	58.65	37.46	15.46	66.74	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10380.00	44.62	68.20	-23.58	58.41	37.47	15.47	66.73	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10380.00	44.83	68.20	-23.37	58.65	37.46	15.46	66.74	0.00	--	PEAK																																																																						



Mode	20																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10460.00</td> <td>44.67</td> <td>68.20</td> <td>-23.53</td> <td>58.34</td> <td>37.51</td> <td>15.53</td> <td>66.71</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10460.00	44.67	68.20	-23.53	58.34	37.51	15.53	66.71	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10460.00</td> <td>45.11</td> <td>68.20</td> <td>-23.09</td> <td>58.73</td> <td>37.53</td> <td>15.55</td> <td>66.70</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10460.00	45.11	68.20	-23.09	58.73	37.53	15.55	66.70	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10460.00	44.67	68.20	-23.53	58.34	37.51	15.53	66.71	0.00	--	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10460.00	45.11	68.20	-23.09	58.73	37.53	15.55	66.70	0.00	--	PEAK																																																																						









Mode	21																																																																																	
	Band Edge - L																																																																																	
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH54_5270MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5044.28</td> <td>49.87</td> <td>74.00</td> <td>-24.13</td> <td>41.86</td> <td>34.06</td> <td>10.50</td> <td>36.55</td> <td>0.00</td> <td>310</td> <td>313</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5044.28	49.87	74.00	-24.13	41.86	34.06	10.50	36.55	0.00	310	313	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>96.78</td> <td>-----</td> <td>-----</td> <td>88.21</td> <td>34.44</td> <td>10.70</td> <td>36.57</td> <td>0.00</td> <td>310</td> <td>313</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5270.00	96.78	-----	-----	88.21	34.44	10.70	36.57	0.00	310	313	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5044.28	49.87	74.00	-24.13	41.86	34.06	10.50	36.55	0.00	310	313	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5270.00	96.78	-----	-----	88.21	34.44	10.70	36.57	0.00	310	313	PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5082.35</td> <td>39.51</td> <td>54.00</td> <td>-14.49</td> <td>31.43</td> <td>34.02</td> <td>10.54</td> <td>36.48</td> <td>0.00</td> <td>310</td> <td>313</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5082.35	39.51	54.00	-14.49	31.43	34.02	10.54	36.48	0.00	310	313	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>87.33</td> <td>-----</td> <td>-----</td> <td>78.76</td> <td>34.44</td> <td>10.70</td> <td>36.57</td> <td>0.00</td> <td>310</td> <td>313</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5270.00	87.33	-----	-----	78.76	34.44	10.70	36.57	0.00	310	313	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5082.35	39.51	54.00	-14.49	31.43	34.02	10.54	36.48	0.00	310	313	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5270.00	87.33	-----	-----	78.76	34.44	10.70	36.57	0.00	310	313	AVERAGE																																																																						



Mode	21																																							
	Band Edge - R																																							
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH54_5270MHz																																							
ANT	1																																							
Pol.	Horizontal	Fundamental																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5371.27</td> <td>49.49</td> <td>74.00</td> <td>-24.51</td> <td>40.54</td> <td>34.50</td> <td>10.76</td> <td>36.31</td> <td>0.00</td> <td>310 313 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5371.27	49.49	74.00	-24.51	40.54	34.50	10.76	36.31	0.00	310 313 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5371.27	49.49	74.00	-24.51	40.54	34.50	10.76	36.31	0.00	310 313 PEAK																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5353.79</td> <td>38.35</td> <td>54.00</td> <td>-15.65</td> <td>29.52</td> <td>34.50</td> <td>10.75</td> <td>36.42</td> <td>0.00</td> <td>310 313 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5353.79	38.35	54.00	-15.65	29.52	34.50	10.75	36.42	0.00	310 313 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5353.79	38.35	54.00	-15.65	29.52	34.50	10.75	36.42	0.00	310 313 AVERAGE																															

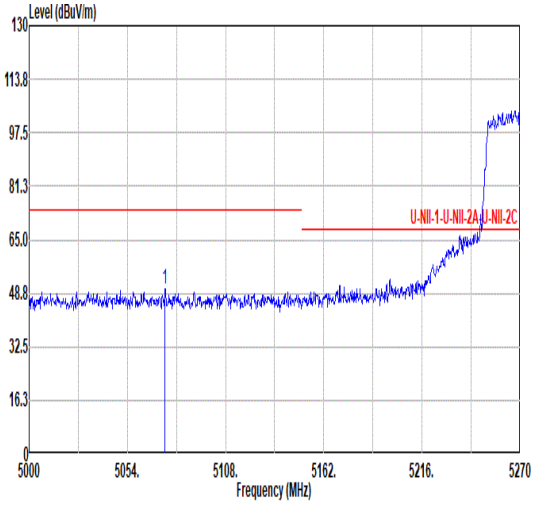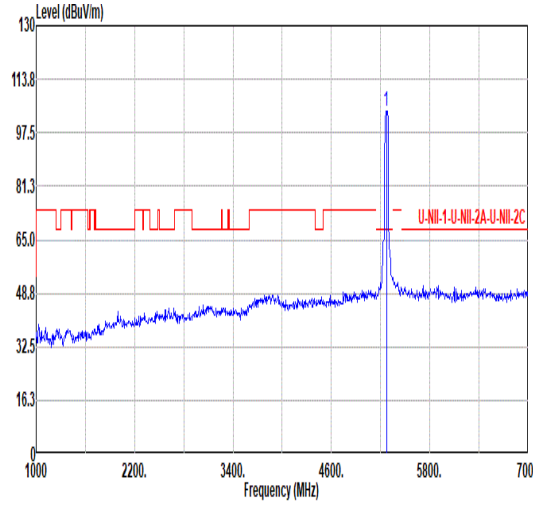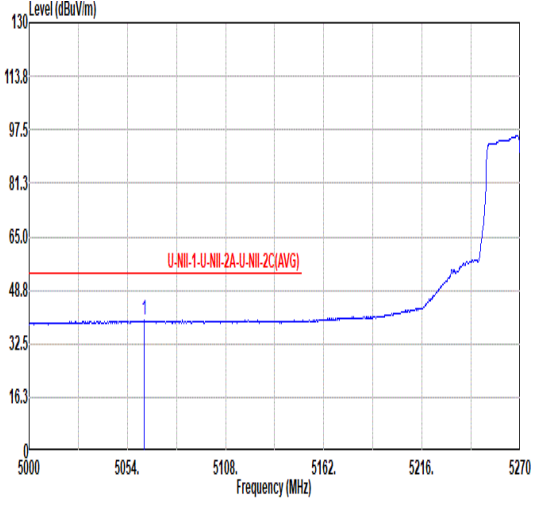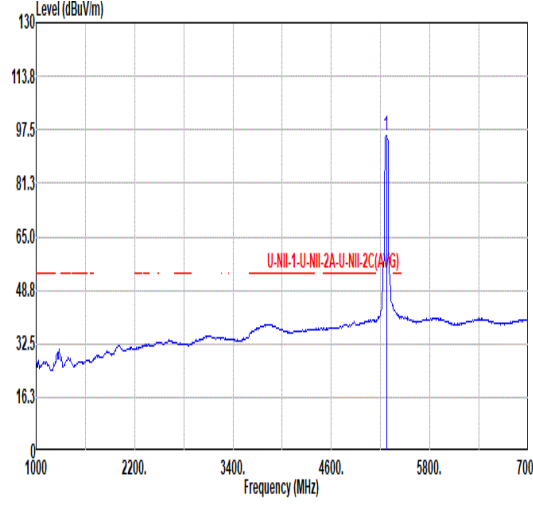

Mode	21																																																																			
	Band Edge - L																																																																			
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH54_5270MHz																																																																			
ANT	1																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	 <table border="1" data-bbox="263 1153 798 1288"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5074.79</td> <td>49.86</td> <td>74.00</td> <td>-24.14</td> <td>41.79</td> <td>34.03</td> <td>10.53</td> <td>36.49</td> <td>0.00</td> <td>184</td> <td>298 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5074.79	49.86	74.00	-24.14	41.79	34.03	10.53	36.49	0.00	184	298 PEAK	 <table border="1" data-bbox="901 1153 1436 1288"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5270.00</td> <td>104.03</td> <td>-----</td> <td>95.49</td> <td>34.43</td> <td>10.70</td> <td>36.59</td> <td>0.00</td> <td>184</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5270.00	104.03	-----	95.49	34.43	10.70	36.59	0.00	184	298	PEAK
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1 5074.79	49.86	74.00	-24.14	41.79	34.03	10.53	36.49	0.00	184	298 PEAK																																																										
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1 5270.00	104.03	-----	95.49	34.43	10.70	36.59	0.00	184	298	PEAK																																																										
Avg	 <table border="1" data-bbox="263 1836 798 1971"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5063.45</td> <td>39.65</td> <td>54.00</td> <td>-14.35</td> <td>31.59</td> <td>34.04</td> <td>10.52</td> <td>36.50</td> <td>0.00</td> <td>184</td> <td>298 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5063.45	39.65	54.00	-14.35	31.59	34.04	10.52	36.50	0.00	184	298 AVERAGE	 <table border="1" data-bbox="901 1836 1436 1971"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5270.00</td> <td>95.82</td> <td>-----</td> <td>87.25</td> <td>34.44</td> <td>10.70</td> <td>36.57</td> <td>0.00</td> <td>184</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5270.00	95.82	-----	87.25	34.44	10.70	36.57	0.00	184	298	AVERAGE
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1 5063.45	39.65	54.00	-14.35	31.59	34.04	10.52	36.50	0.00	184	298 AVERAGE																																																										
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1 5270.00	95.82	-----	87.25	34.44	10.70	36.57	0.00	184	298	AVERAGE																																																										



Mode	21																																														
	Band Edge - R																																														
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH54_5270MHz																																														
ANT	1																																														
Pol.	Vertical	Fundamental																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5375.07</td> <td>53.35</td> <td>74.00</td> <td>-20.65</td> <td>44.38</td> <td>34.50</td> <td>10.76</td> <td>36.29</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>184 298 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5375.07	53.35	74.00	-20.65	44.38	34.50	10.76	36.29	0.00									184 298 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5375.07	53.35	74.00	-20.65	44.38	34.50	10.76	36.29	0.00																																							
								184 298 PEAK																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.18</td> <td>43.89</td> <td>54.00</td> <td>-10.11</td> <td>35.08</td> <td>34.50</td> <td>10.75</td> <td>36.44</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>184 298 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5350.18	43.89	54.00	-10.11	35.08	34.50	10.75	36.44	0.00									184 298 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5350.18	43.89	54.00	-10.11	35.08	34.50	10.75	36.44	0.00																																							
								184 298 AVERAGE																																							