

Blackview


AirBuds 6

USER GUIDE



Follow Blackview communtiy, a place where you
can share and discuss with Blackview user
keep posted with most up-to-day news

■ Product Introduction

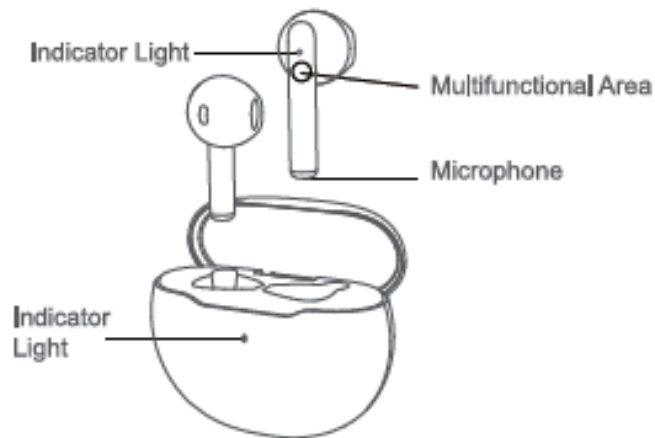


■ Device Connection

1. Open the cover of the charging box and a pair of headsets are in the charging box. When the indicator light of the charging box is green and the indicator light of the headset is red and blue, the headset enters the "Pairing State".



2. Turn on bluetooth of the device and select "AirBus 6"; Click it and after the connection is successful, there will be a voice broadcast with a connection prompt tone.

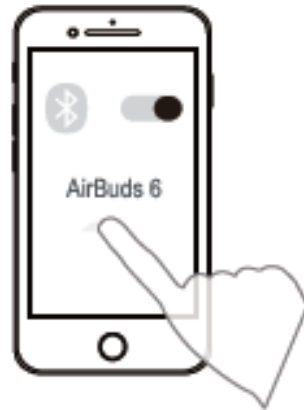

Note: The above is the first pairing method. In subsequent use, the earbuds will be automatically turned on and connected after being taken out of the earbuds box.

■ Specification Parameters

Model: AirBuds 6

Bluetooth version: 5.1

Battery type: Polymer Lithium Battery

Effective receiving distance of bluetooth: $\geq 10\text{m}$

Bluetooth frequency: 2.402 ~ 2.485 GHz

Moving coil specification: $\Phi 13\text{mm}$

Dynamic frequency response: 20Hz-20KHz

Battery capacity (charging box): 320 mAh

Charging time (charging box): < 1.5 hours

Charging time (headsets): < 1.5 hours


Running time: 5 hour

■ Operation Method

	Left Ear	Right Ear
Start Siri	Long press the "Touch" button for 1 second and (hear "beep" sound) release	
Pause / play music	Double click the "Touch" button	
Last one	Triple click the "Touch" button	None
Next one	None	Triple click the "Touch" button
Answer	Double click the "Touch" button when an incoming call comes in	
Hang up	Double click the "Touch" button during a call	
Reject	Long press the button for 2S (hear the "beep" sound) release during the incoming call status	
volume plus	None	Single click the "Touch" button
volume down	Single click the "Touch" button	None
Restore factory settings	Click the "Touch" button four times	

■ Charging with Charging Box

The headset can be charged in the charging box through the type-C interface, and the white light flashes during charging. When the headset is fully charged, the white light is always on.

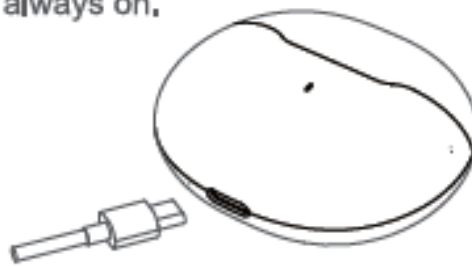

■ Light Indication

Headphone mode	Status
Power on	The blue light is on for 2S
Power off	The red light is on for 2S
pairing	Red and blue lights flash alternately
Connected (standby)	The blue light flashes once in 5S
Play music / call status	Lights go out
Incoming call	Blue light double flashes fast in 2s
Headset low power state	Red light double flashes fast in 5s
Headset charging (less than 70% power)	The red light of headset is on for 3S and then goes out
Headset charging (more than 70% power)	The blue light of headset is on for 3S and then goes out
The headset is fully charged	Lights go out
Low battery of charging box	The green light flashes and goes out after 4S
The charging box is charging	The white light flashes
The charging box is fully charged	The white light is always on
Restore factory settings	The red and blue lights flash together for 3 times and then go out

■ Answers for Common Questions

(1) The bluetooth headset cannot be switched on.

Reason: The battery in the charging compartment is low or the power of the bluetooth headset is low.

Solution: Put the headset into the charging box, close the cover, and charge the charging box for more than 1 hour before use.

(2) The phone cannot search for bluetooth headset.

Reason: 1. The Bluetooth headset is not in the pairing state;

Solution: Put the headset back into the charging box, close and then open the cover, wear the headset, and the headset (i.e. the red and blue lights flash alternately) enters the bluetooth pairing state; You can also click the "Touch" button for four times (i.e. the red and blue lights flash alternately) to activate Bluetooth pairing;

Reason:2. There are mobile phone bluetooth program errors;

Solution: After the bluetooth of the mobile phone is restarted, clear all pairing data stored in the the mobile phone; Search for bluetooth again.

(3) There is no sound from the headset speaker

Reason: 1. Turn the volume of the mobile phone and headset to the maximum and confirm whether it is caused by volume adjustment.

Solution: When the headset is connected, adjust the volume of the mobile phone;

Reason: 2. The Bluetooth headset is not properly connected with the mobile phone.

Solution: Reconnect bluetooth and mobile phone through pairing.

phone or try another place.

Reason: 3. The power of bluetooth headset is insufficient. Please charge the headset as soon as possible.

Solution: Please charge the headset as soon as possible.

(6) There is no sound in the headset during voice call, and the sound comes out of the mobile phone.

Reason: The headset is operated during a voice call or call. Double click the headset.

Solution: Turn off the bluetooth of the mobile phone and then turn it on, or put the headset into the box, close the cover, turn off the headset and then open the cover; The headset does not support the connection or hanging up of voice calls. If there is a voice call, please connect or hang up on the mobile phone.

(Note: at present, the headset only supports incoming calls from GSM cards, not app network calls.)

(7) After the headset is put into the box and the cover is closed, the headset is not disconnected.

Reason: 1. The charging box is completely dead;

Solution: Charge the charging box;

Reason: 2. The headset is not put into the box properly, and the communication between the headset and the base is abnormal.

Solution: Reopen the charging box, take out the headset from the box, and then put it into the box. When the headset is put into the box, the green light on the charging box will light once and close the cover.

Reason: 3. The charging box is damaged.

Solution: Replace the charging box.

■ Attention

- Please do not disassemble this product by yourself.
- Please use standard charging cable and adapter to avoid damage and accidents.
- Please avoid using corrosive cleaning detergent to clean this product.
- Please avoid product usage in the rain and keep away from heating or fire.

■ Maintenance

Please follow the following suggestions to prolong product working life.

- Keep product dry and don't put in damp places in case of affecting internal circuit.
- Avoid product usage during intense sporting or on sweating occasions in case sweat infiltrate into product and cause damages.
- Keep off sunlight or high temperature in case of shortening working life of electric parts battery damage, plastic parts deformation.
- Keep off intense vibration and impact from hard material in case of internal circuit damages.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device(FCC ID: 2APMJ-AIRBUDS6) has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. Due to product design, FCC ID can only be printed on the charging box.

Shenzhen DOKE Electronic Co.,Ltd
Address: 13/F, Wei Dong Long Business Building B,
Mei Long Ave, Long Hua New District Shenzhen.