

1 Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)
GSM850	128	824.2	33.22
GSM850	189	836.4	33.39
GSM850	251	848.8	33.44
GSM1900	512	1850.2	31.24
GSM1900	661	1880	31.15
GSM1900	810	1909.8	30.86
GPRS850 1 Slot	128	824.2	33.33
GPRS850 1 Slot	189	836.4	33.39
GPRS850 1 Slot	251	848.8	33.47
GPRS850 2 Slot	128	824.2	32.37
GPRS850 2 Slot	189	836.4	32.41
GPRS850 2 Slot	251	848.8	32.50
GPRS850 3 Slot	128	824.2	30.31
GPRS850 3 Slot	189	836.4	30.35
GPRS850 3 Slot	251	848.8	30.50
GPRS850 4 Slot	128	824.2	29.12
GPRS850 4 Slot	189	836.4	29.19
GPRS850 4 Slot	251	848.8	29.36
GPRS1900 1 Slot	512	1850.2	31.26
GPRS1900 1 Slot	661	1880	31.17
GPRS1900 1 Slot	810	1909.8	30.87
GPRS1900 2 Slot	512	1850.2	30.30
GPRS1900 2 Slot	661	1880	30.21
GPRS1900 2 Slot	810	1909.8	29.94
GPRS1900 3 Slot	512	1850.2	28.28
GPRS1900 3 Slot	661	1880	28.17
GPRS1900 3 Slot	810	1909.8	27.94
GPRS1900 4 Slot	512	1850.2	27.18
GPRS1900 4 Slot	661	1880	27.09
GPRS1900 4 Slot	810	1909.8	26.88
EGPRS850 1 Slot	128	824.2	27.70
EGPRS850 1 Slot	189	836.4	27.45
EGPRS850 1 Slot	251	848.8	28.08
EGPRS850 2 Slot	128	824.2	26.73
EGPRS850 2 Slot	189	836.4	26.98
EGPRS850 2 Slot	251	848.8	26.58
EGPRS850 3 Slot	128	824.2	24.97
EGPRS850 3 Slot	189	836.4	24.68
EGPRS850 3 Slot	251	848.8	24.85
EGPRS850 4 Slot	128	824.2	23.85
EGPRS850 4 Slot	189	836.4	23.62

EGPRS850 4 Slot	251	848.8	23.72
EGPRS1900 1 Slot	512	1850.2	27.75
EGPRS1900 1 Slot	661	1880	27.28
EGPRS1900 1 Slot	810	1909.8	26.90
EGPRS1900 2 Slot	512	1850.2	26.79
EGPRS1900 2 Slot	661	1880	26.52
EGPRS1900 2 Slot	810	1909.8	26.12
EGPRS1900 3 Slot	512	1850.2	24.44
EGPRS1900 3 Slot	661	1880	24.10
EGPRS1900 3 Slot	810	1909.8	23.75
EGPRS1900 4 Slot	512	1850.2	23.00
EGPRS1900 4 Slot	661	1880	22.87
EGPRS1900 4 Slot	810	1909.8	22.53
WCDMA Band2	9262	1852.4	24.51
WCDMA Band2	9400	1880	24.44
WCDMA Band2	9538	1907.6	24.51
WCDMA Band2 Subtest1	9262	1852.4	23.49
WCDMA Band2 Subtest1	9400	1880	23.38
WCDMA Band2 Subtest1	9538	1907.6	23.50
WCDMA Band2 Subtest2	9262	1852.4	23.10
WCDMA Band2 Subtest2	9400	1880	22.95
WCDMA Band2 Subtest2	9538	1907.6	22.97
WCDMA Band2 Subtest3	9262	1852.4	21.75
WCDMA Band2 Subtest3	9400	1880	22.11
WCDMA Band2 Subtest3	9538	1907.6	21.90
WCDMA Band2 Subtest4	9262	1852.4	21.90
WCDMA Band2 Subtest4	9400	1880	22.11
WCDMA Band2 Subtest4	9538	1907.6	21.73
WCDMA Band2 Subtest1	9262	1852.4	23.23
WCDMA Band2 Subtest1	9400	1880	23.01
WCDMA Band2 Subtest1	9538	1907.6	22.88
WCDMA Band2 Subtest2	9262	1852.4	23.41
WCDMA Band2 Subtest2	9400	1880	23.30
WCDMA Band2 Subtest2	9538	1907.6	23.40
WCDMA Band2 Subtest3	9262	1852.4	22.09
WCDMA Band2 Subtest3	9400	1880	21.70
WCDMA Band2 Subtest3	9538	1907.6	21.99
WCDMA Band2 Subtest4	9262	1852.4	23.43
WCDMA Band2 Subtest4	9400	1880	23.35
WCDMA Band2 Subtest4	9538	1907.6	23.45
WCDMA Band2 Subtest5	9262	1852.4	22.77
WCDMA Band2 Subtest5	9400	1880	22.72
WCDMA Band2 Subtest5	9538	1907.6	22.77
WCDMA Band4	1312	1712.4	23.96

WCDMA Band4	1412	1732.4	23.86
WCDMA Band4	1513	1752.6	23.84
WCDMA Band4 Subtest1	1312	1712.4	22.95
WCDMA Band4 Subtest1	1412	1732.4	22.82
WCDMA Band4 Subtest1	1513	1752.6	22.86
WCDMA Band4 Subtest2	1312	1712.4	22.43
WCDMA Band4 Subtest2	1412	1732.4	22.18
WCDMA Band4 Subtest2	1513	1752.6	22.29
WCDMA Band4 Subtest3	1312	1712.4	21.55
WCDMA Band4 Subtest3	1412	1732.4	21.47
WCDMA Band4 Subtest3	1513	1752.6	21.42
WCDMA Band4 Subtest4	1312	1712.4	21.46
WCDMA Band4 Subtest4	1412	1732.4	21.55
WCDMA Band4 Subtest4	1513	1752.6	21.40
WCDMA Band4 Subtest1	1312	1712.4	22.53
WCDMA Band4 Subtest1	1412	1732.4	22.65
WCDMA Band4 Subtest1	1513	1752.6	22.54
WCDMA Band4 Subtest2	1312	1712.4	22.87
WCDMA Band4 Subtest2	1412	1732.4	22.74
WCDMA Band4 Subtest2	1513	1752.6	22.75
WCDMA Band4 Subtest3	1312	1712.4	21.80
WCDMA Band4 Subtest3	1412	1732.4	21.46
WCDMA Band4 Subtest3	1513	1752.6	21.59
WCDMA Band4 Subtest4	1312	1712.4	22.98
WCDMA Band4 Subtest4	1412	1732.4	22.83
WCDMA Band4 Subtest4	1513	1752.6	22.88
WCDMA Band4 Subtest5	1312	1712.4	22.23
WCDMA Band4 Subtest5	1412	1732.4	22.22
WCDMA Band4 Subtest5	1513	1752.6	22.19
WCDMA Band5	4132	826.4	24.19
WCDMA Band5	4182	836.4	23.82
WCDMA Band5	4233	846.6	24.04
WCDMA Band5 Subtest1	4132	826.4	23.27
WCDMA Band5 Subtest1	4182	836.4	22.92
WCDMA Band5 Subtest1	4233	846.6	23.12
WCDMA Band5 Subtest2	4132	826.4	22.49
WCDMA Band5 Subtest2	4182	836.4	22.37
WCDMA Band5 Subtest2	4233	846.6	22.44
WCDMA Band5 Subtest3	4132	826.4	21.80
WCDMA Band5 Subtest3	4182	836.4	21.45
WCDMA Band5 Subtest3	4233	846.6	21.70
WCDMA Band5 Subtest4	4132	826.4	21.52
WCDMA Band5 Subtest4	4182	836.4	21.56
WCDMA Band5 Subtest4	4233	846.6	21.64

WCDMA Band5 Subtest1	4132	826.4	22.86
WCDMA Band5 Subtest1	4182	836.4	22.70
WCDMA Band5 Subtest1	4233	846.6	22.58
WCDMA Band5 Subtest2	4132	826.4	23.20
WCDMA Band5 Subtest2	4182	836.4	22.88
WCDMA Band5 Subtest2	4233	846.6	23.01
WCDMA Band5 Subtest3	4132	826.4	22.03
WCDMA Band5 Subtest3	4182	836.4	21.37
WCDMA Band5 Subtest3	4233	846.6	21.86
WCDMA Band5 Subtest4	4132	826.4	23.28
WCDMA Band5 Subtest4	4182	836.4	22.87
WCDMA Band5 Subtest4	4233	846.6	23.12
WCDMA Band5 Subtest5	4132	826.4	22.60
WCDMA Band5 Subtest5	4182	836.4	22.12
WCDMA Band5 Subtest5	4233	846.6	22.38
CDMA2000 BC0 1xRTT(RC1,SO55)	1013	824.7	24.21
CDMA2000 BC0 1xRTT(RC1,SO55)	384	836.52	24.28
CDMA2000 BC0 1xRTT(RC1,SO55)	777	848.31	24.26
CDMA2000 BC0 1xRTT(RC3,SO55)	1013	824.7	24.01
CDMA2000 BC0 1xRTT(RC3,SO55)	384	836.52	24.46
CDMA2000 BC0 1xRTT(RC3,SO55)	777	848.31	24.32
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	1013	824.7	24.28
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	384	836.52	24.50
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	777	848.31	24.1
CDMA2000 BC0 1xEV-Do Rel.0	1013	824.7	24.2
CDMA2000 BC0 1xEV-Do Rel.0	384	836.52	24.42
CDMA2000 BC0 1xEV-Do Rel.0	777	848.31	24.31
CDMA2000 BC0 1xEV-Do Rel.A	1013	824.7	24.09
CDMA2000 BC0 1xEV-Do Rel.A	384	836.52	24.25
CDMA2000 BC0 1xEV-Do Rel.A	777	848.31	24.21
CDMA2000 BC1 1xRTT(RC1,SO55)	25	1851.25	23.98
CDMA2000 BC1 1xRTT(RC1,SO55)	600	1880	23.97
CDMA2000 BC1 1xRTT(RC1,SO55)	1175	1908.75	23.93
CDMA2000 BC1 1xRTT(RC3,SO55)	25	1851.25	23.77
CDMA2000 BC1 1xRTT(RC3,SO55)	600	1880	23.75
CDMA2000 BC1 1xRTT(RC3,SO55)	1175	1908.75	23.71
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	25	1851.25	23.88
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	600	1880	24.21
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	1175	1908.75	24.13
CDMA2000 BC1 1xEV-Do Rel.0	25	1851.25	23.94
CDMA2000 BC1 1xEV-Do Rel.0	600	1880	23.99
CDMA2000 BC1 1xEV-Do Rel.0	1175	1908.75	23.86
CDMA2000 BC1 1xEV-Do Rel.A	25	1851.25	23.86
CDMA2000 BC1 1xEV-Do Rel.A	600	1880	24.17


CDMA2000 BC1 1xEV-Do Rel.A	1175	1908.75	24.02
CDMA2000 BC10 1xRTT(RC1,SO55)	450	817.25	24.32
CDMA2000 BC10 1xRTT(RC1,SO55)	560	820	24.29
CDMA2000 BC10 1xRTT(RC1,SO55)	670	822.75	24.18
CDMA2000 BC10 1xRTT(RC3,SO55)	450	817.25	24.13
CDMA2000 BC10 1xRTT(RC3,SO55)	560	820	24.06
CDMA2000 BC10 1xRTT(RC3,SO55)	670	822.75	24.39
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	450	817.25	24.26
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	560	820	24.43
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	670	822.75	24.15
CDMA2000 BC10 1xEV-Do Rel.0	450	817.25	24.11
CDMA2000 BC10 1xEV-Do Rel.0	560	820	24.35
CDMA2000 BC10 1xEV-Do Rel.0	670	822.75	24.42
CDMA2000 BC10 1xEV-Do Rel.A	450	817.25	24.21
CDMA2000 BC10 1xEV-Do Rel.A	560	820	24.3
CDMA2000 BC10 1xEV-Do Rel.A	670	822.75	24.07

2 Peak-to-Average Ratio


Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM850	128	824.2	2.63	13	PASS
GSM850	189	836.4	2.63	13	PASS
GSM850	251	848.8	2.63	13	PASS
GSM1900	512	1850.2	2.65	13	PASS
GSM1900	661	1880	2.64	13	PASS
GSM1900	810	1909.8	2.64	13	PASS
GPRS850	128	824.2	2.638943202	13.00	PASS
GPRS850	189	836.4	2.63	13.00	PASS
GPRS850	251	848.8	2.63	13.00	PASS
GPRS1900	512	1850.2	2.647657343	13.00	PASS
GPRS1900	661	1880	2.648269127	13.00	PASS
GPRS1900	810	1909.8	2.639905084	13.00	PASS
EGPRS850	128	824.2	8.321882461	13.00	PASS
EGPRS850	189	836.4	8.174710448	13.00	PASS
EGPRS850	251	848.8	8.525027624	13.00	PASS
EGPRS1900	512	1850.2	6.658531685	13.00	PASS
EGPRS1900	661	1880	6.626037267	13.00	PASS
EGPRS1900	810	1909.8	6.668890392	13.00	PASS
WCDMA Band2	9262	1852.4	2.52	13	PASS
WCDMA Band2	9400	1880	2.76	13	PASS
WCDMA Band2	9538	1907.6	2.59	13	PASS
WCDMA Band4	1312	1712.4	2.93	13	PASS
WCDMA Band4	1412	1732.4	2.97	13	PASS
WCDMA Band4	1513	1752.6	3.24	13	PASS
WCDMA Band5	4132	826.4	3.06	13	PASS

WCDMA Band5	4182	836.4	3.21	13	PASS
WCDMA Band5	4233	846.6	3.04	13	PASS
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	1013	824.7	3.63	13	PASS
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	384	836.52	3.86	13	PASS
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	777	848.31	3.47	13	PASS
CDMA2000 BC0 1xEV-Do Rel.A	1013	824.7	3.63	13	PASS
CDMA2000 BC0 1xEV-Do Rel.A	384	836.52	3.87	13	PASS
CDMA2000 BC0 1xEV-Do Rel.A	777	848.31	3.47	13	PASS
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	25	1851.25	3.31	13	PASS
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	600	1880	3.58	13	PASS
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	1175	1908.75	3.31	13	PASS
CDMA2000 BC1 1xEV-Do Rel.A	25	1851.25	3.30	13	PASS
CDMA2000 BC1 1xEV-Do Rel.A	600	1880	3.57	13	PASS
CDMA2000 BC1 1xEV-Do Rel.A	1175	1908.75	3.30	13	PASS
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	450	817.25	3.55	13	PASS
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	560	820	3.89	13	PASS
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	670	822.75	3.80	13	PASS
CDMA2000 BC10 1xEV-Do Rel.A	450	817.25	3.56	13	PASS
CDMA2000 BC10 1xEV-Do Rel.A	560	820	3.88	13	PASS
CDMA2000 BC10 1xEV-Do Rel.A	670	822.75	3.79	13	PASS


GSM850 Channel=189

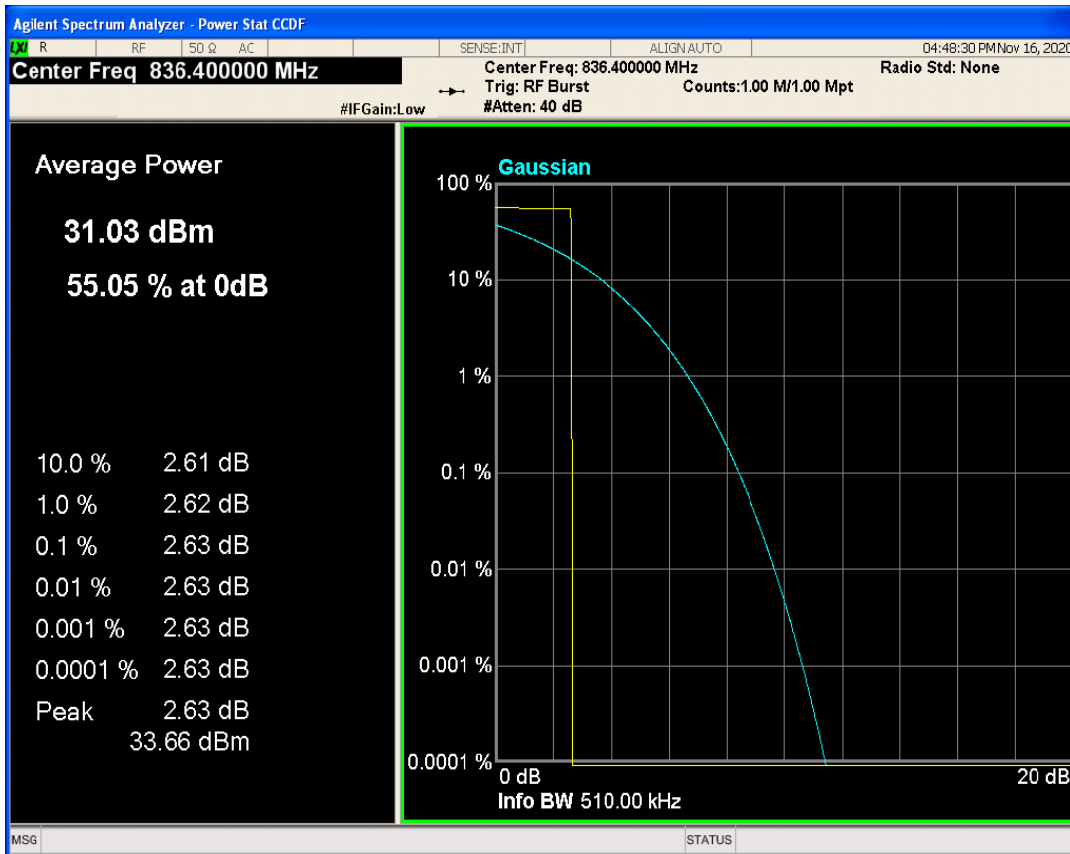


GSM850 Channel=128

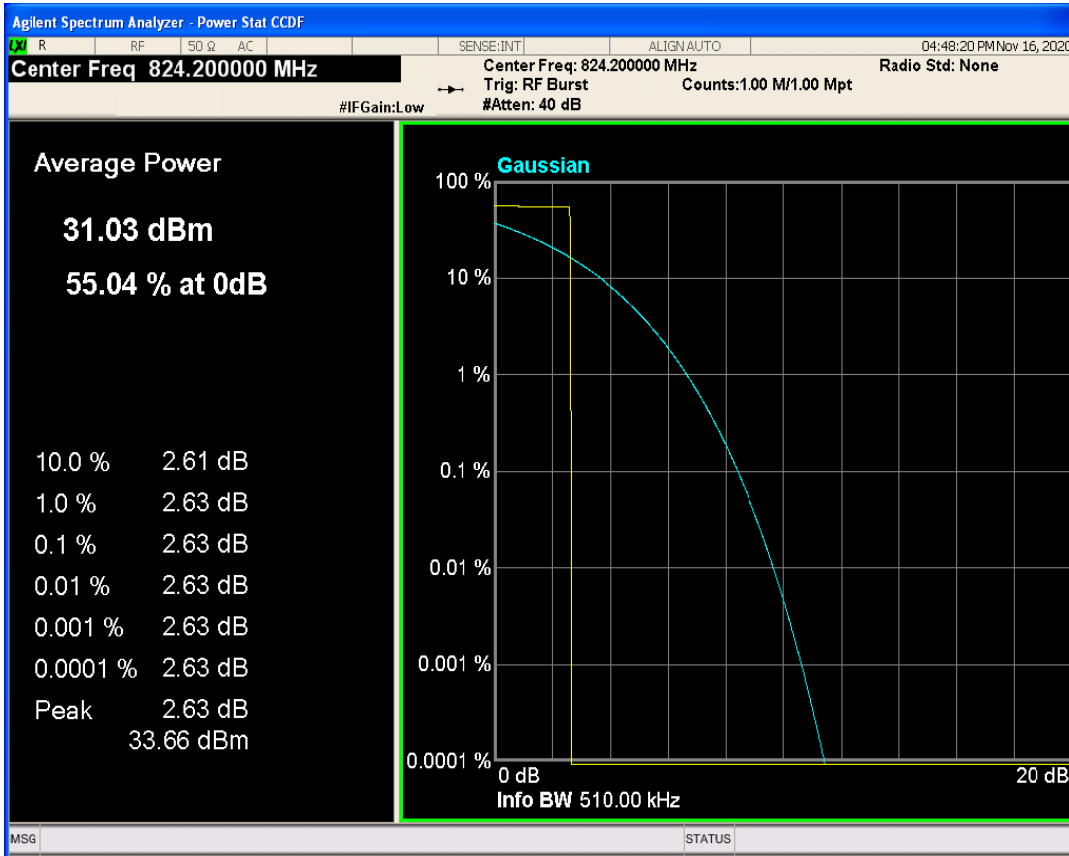


GSM850 Channel=251

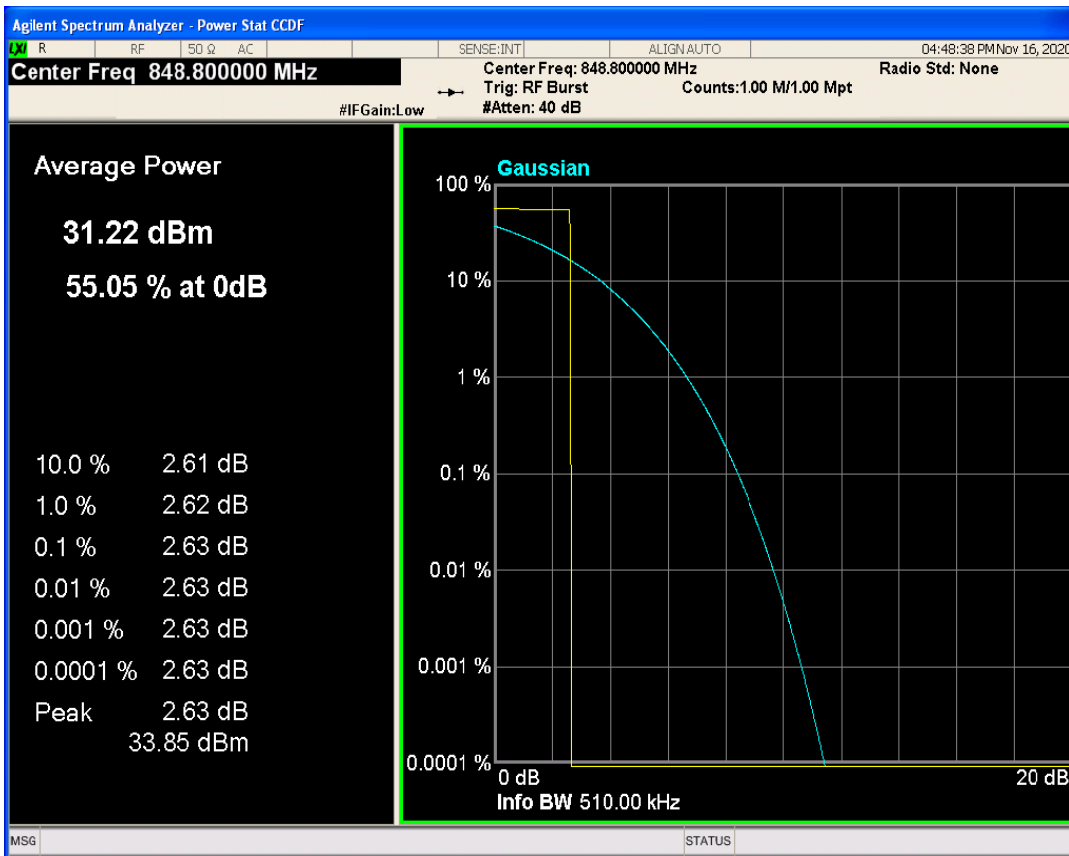


GSM1900 Channel=512

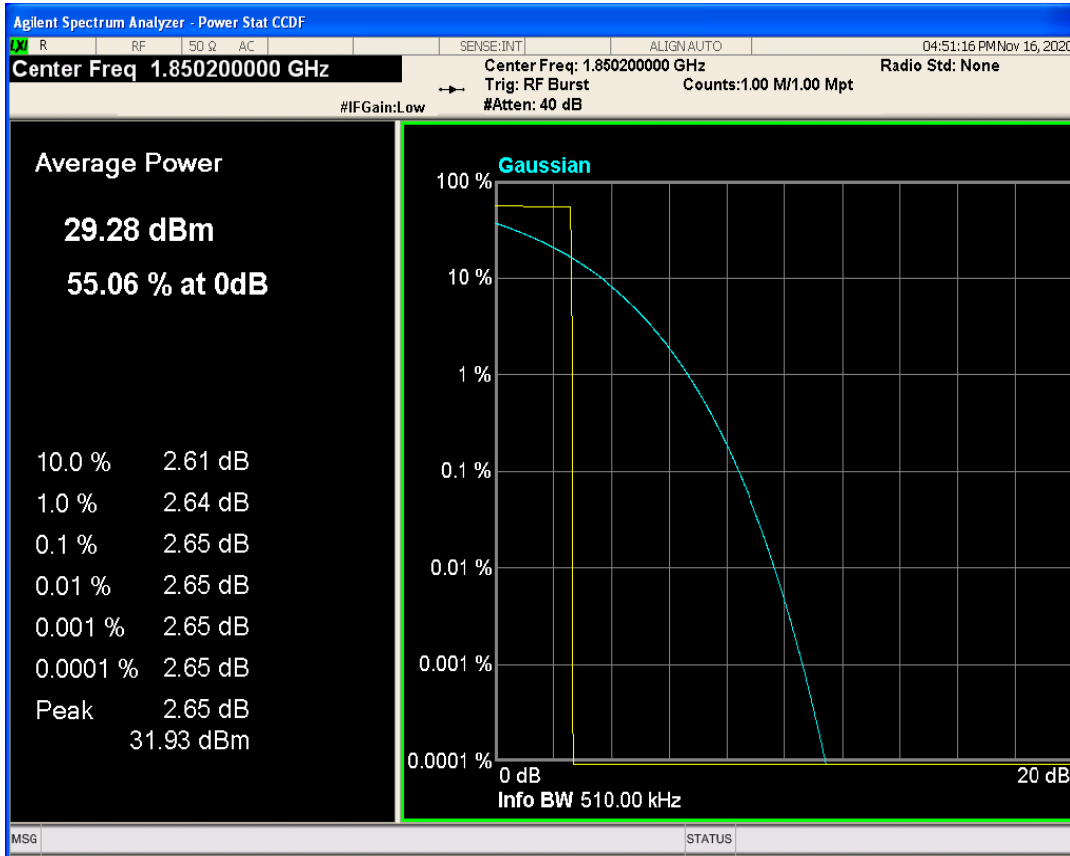


GSM1900 Channel=810

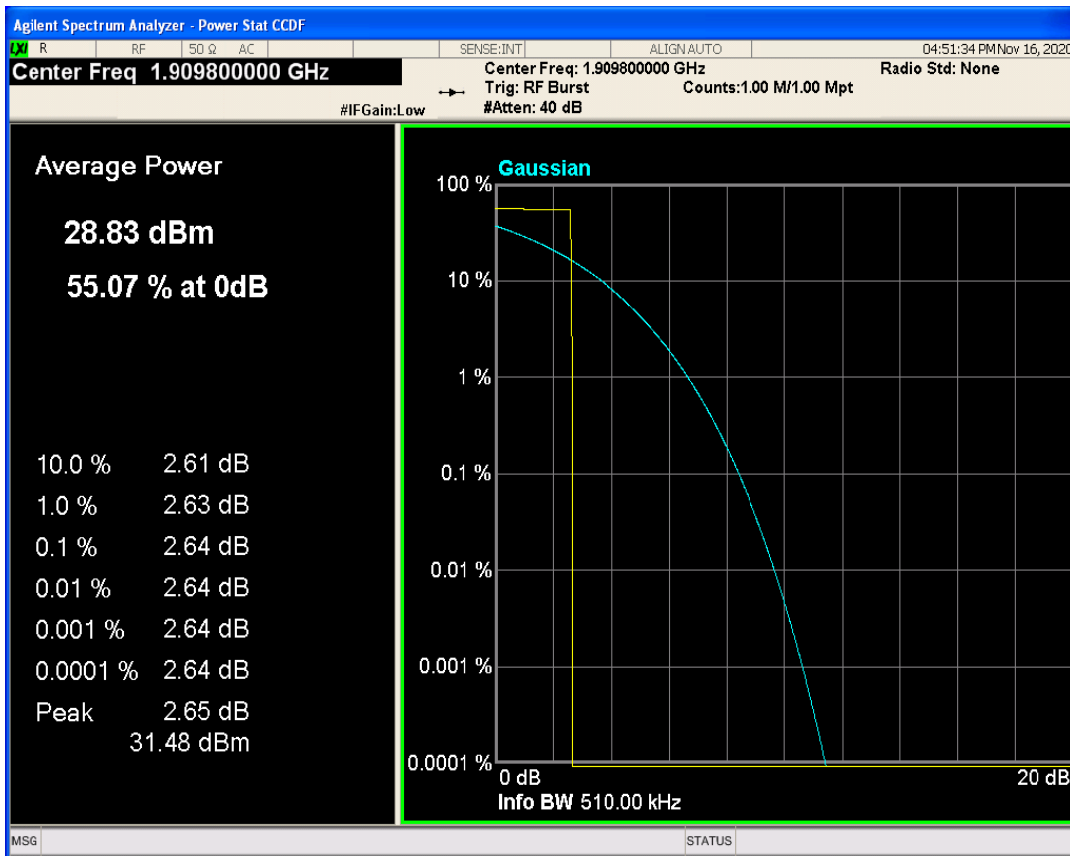


GSM1900 Channel=661

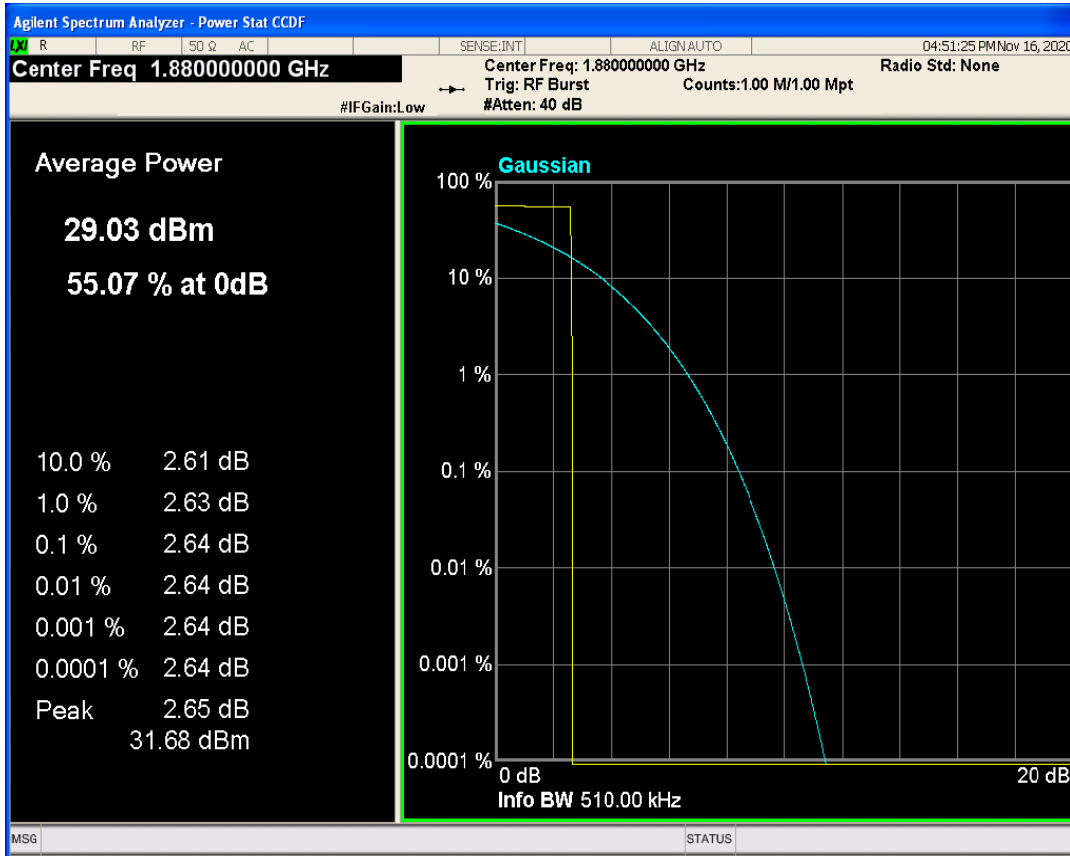


GPRS850 Channel=128

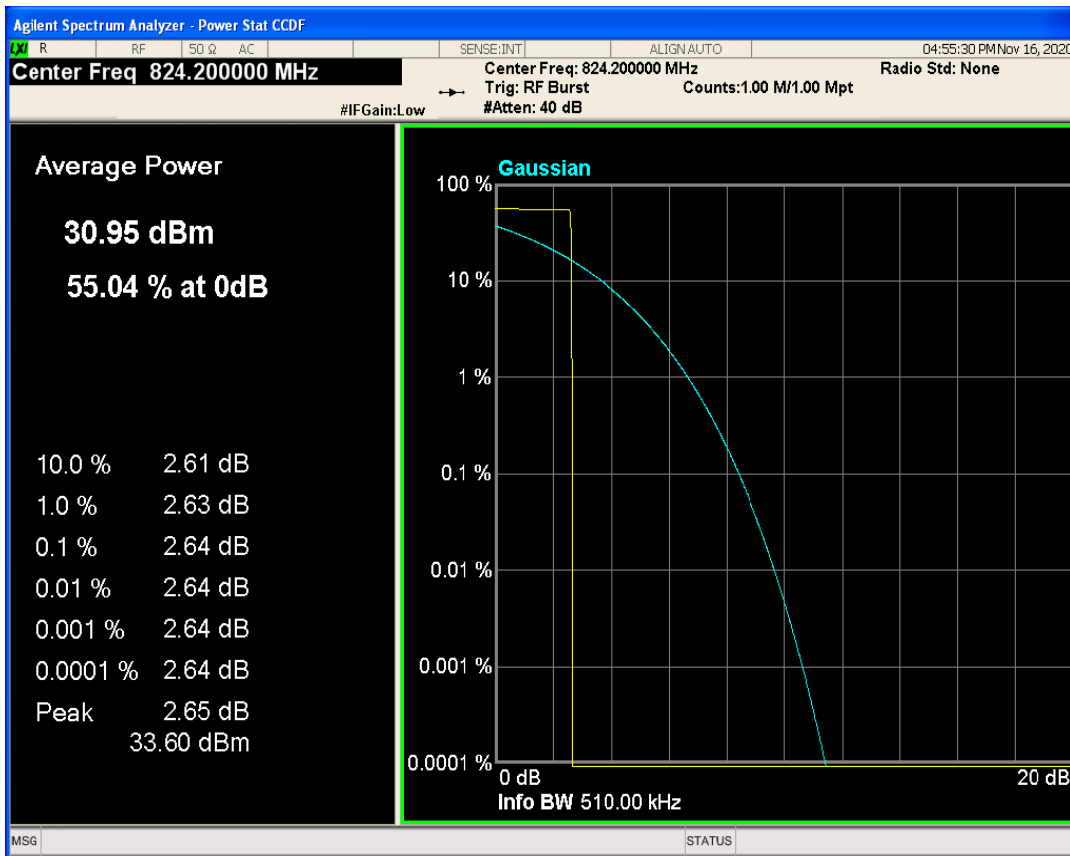


GPRS850 Channel=189

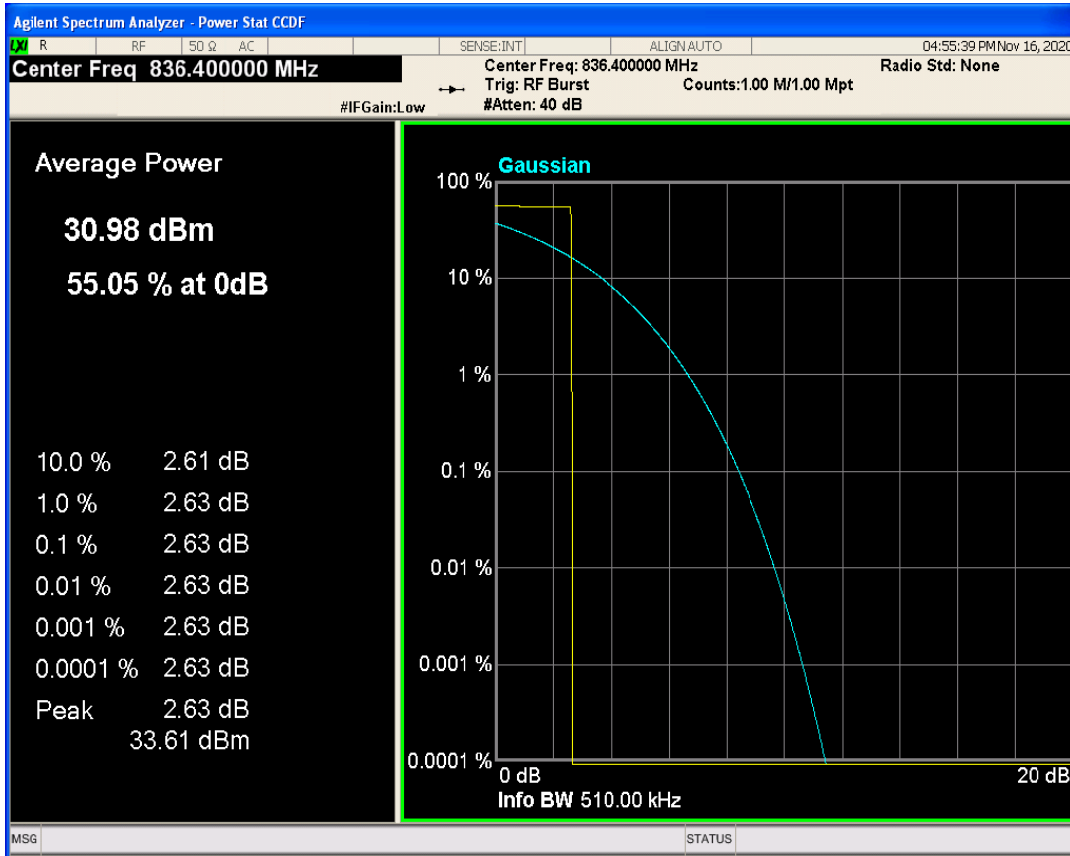


GPRS850 Channel=251

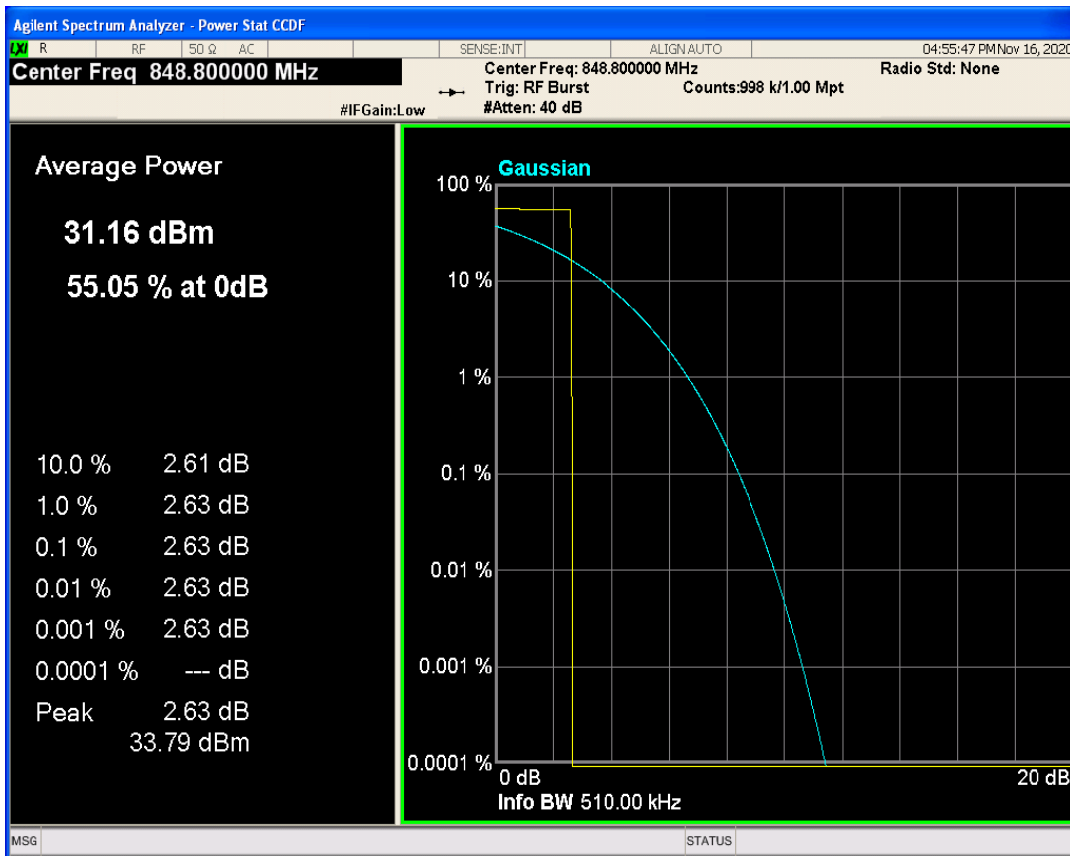


GPRS1900 Channel=512

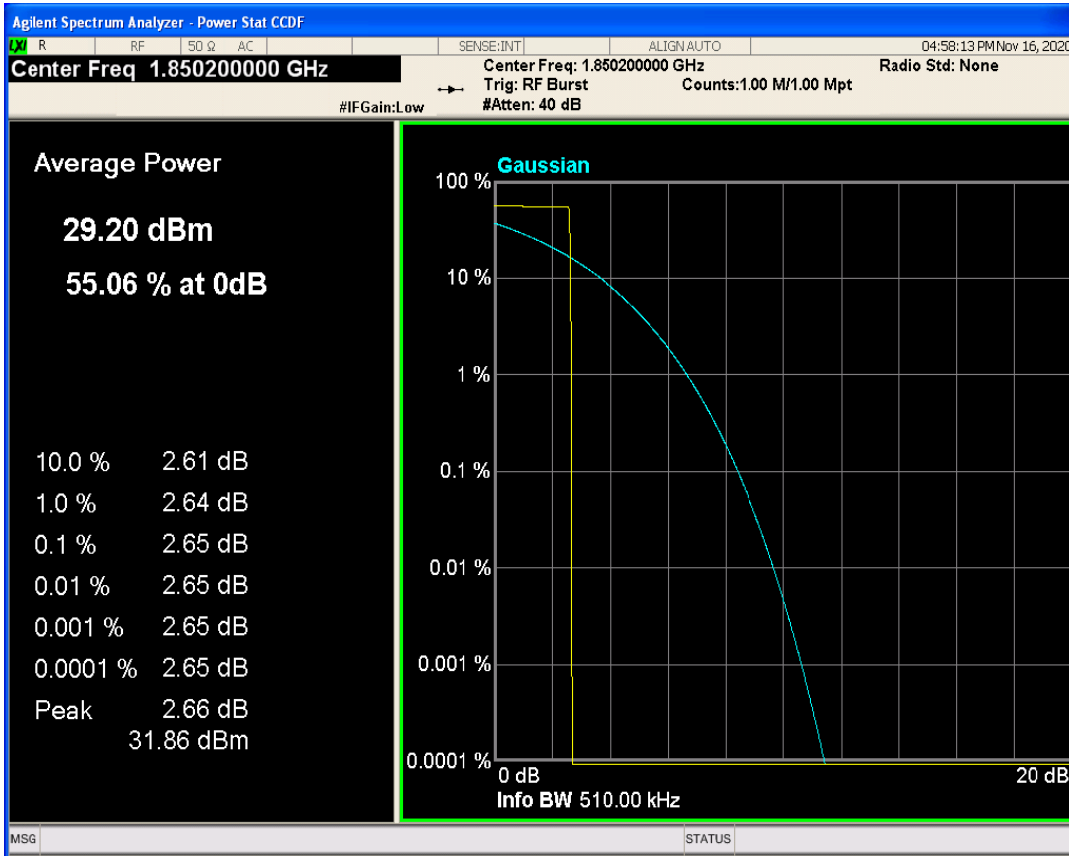


GPRS1900 Channel=810

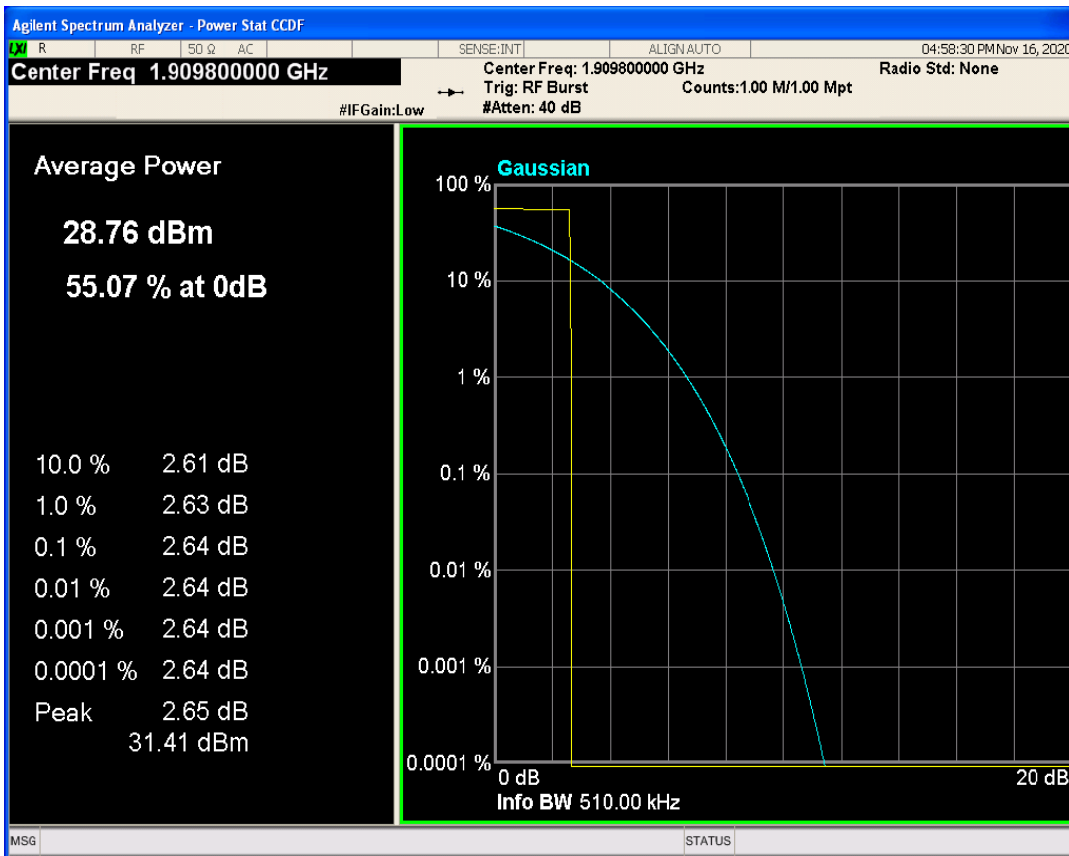


GPRS1900 Channel=661

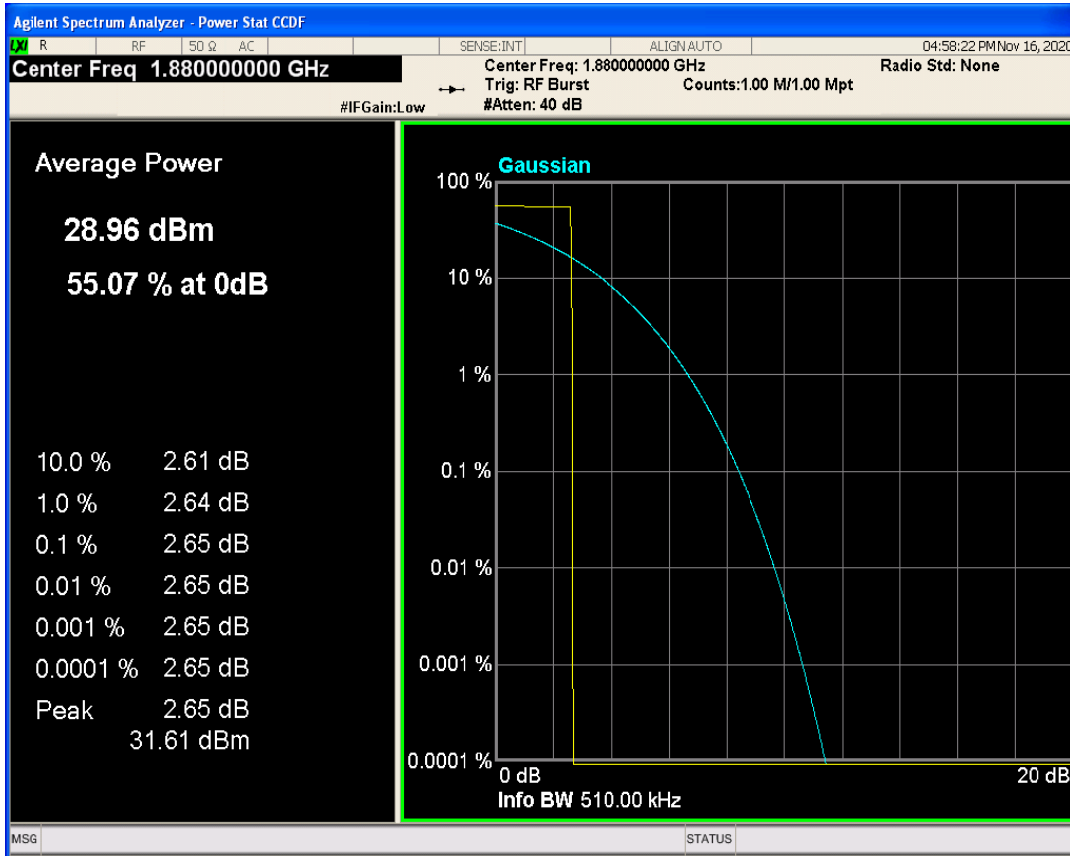


EGPRS850 Channel=128

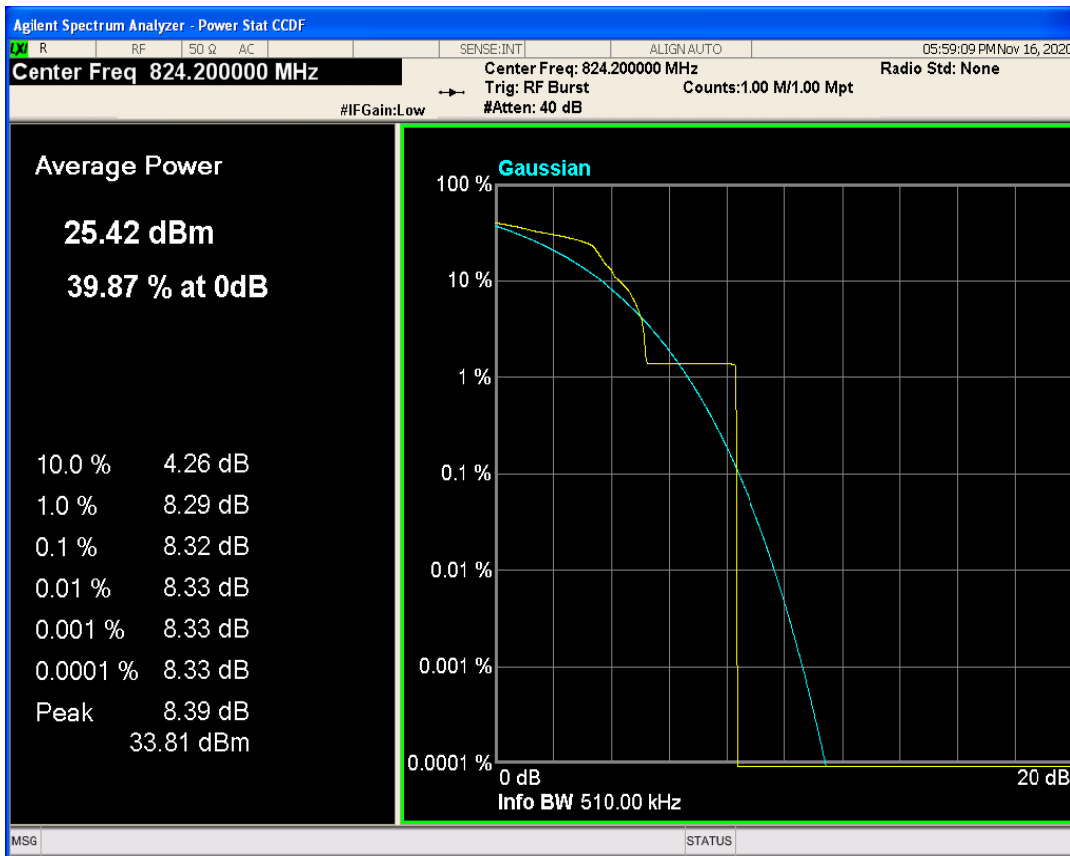


EGPRS850 Channel=189

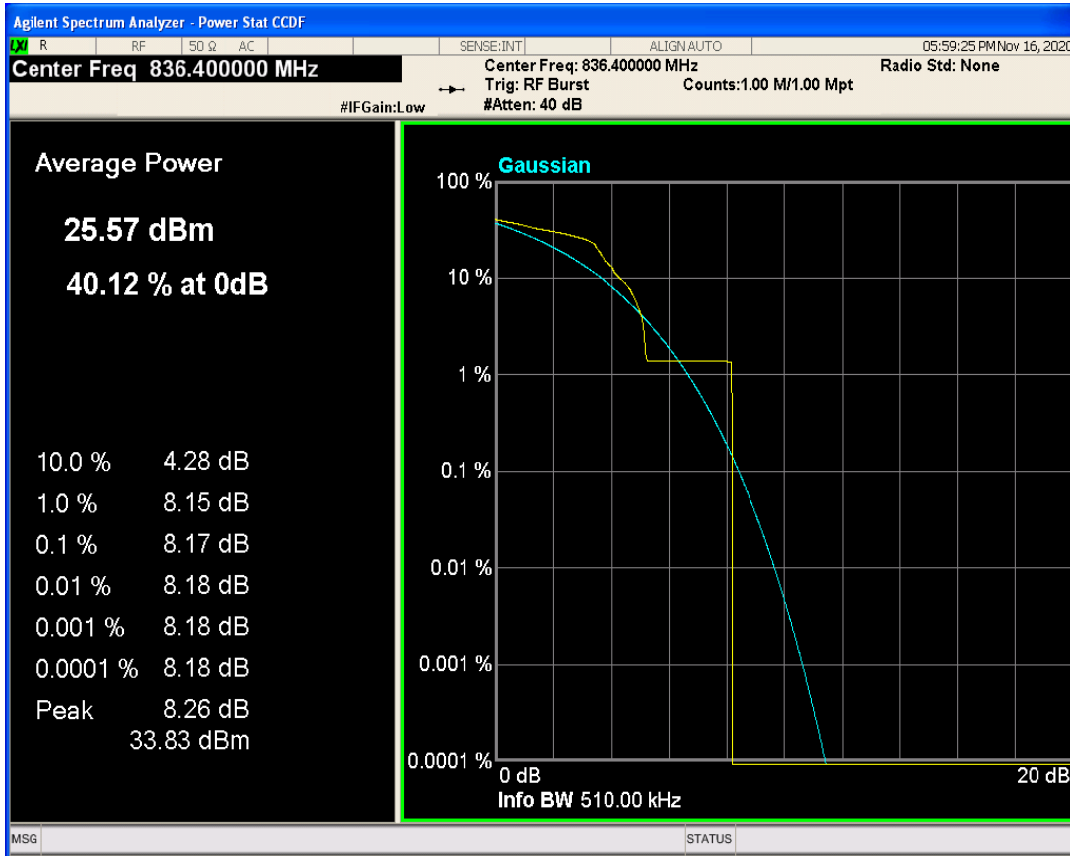


EGPRS850 Channel=251

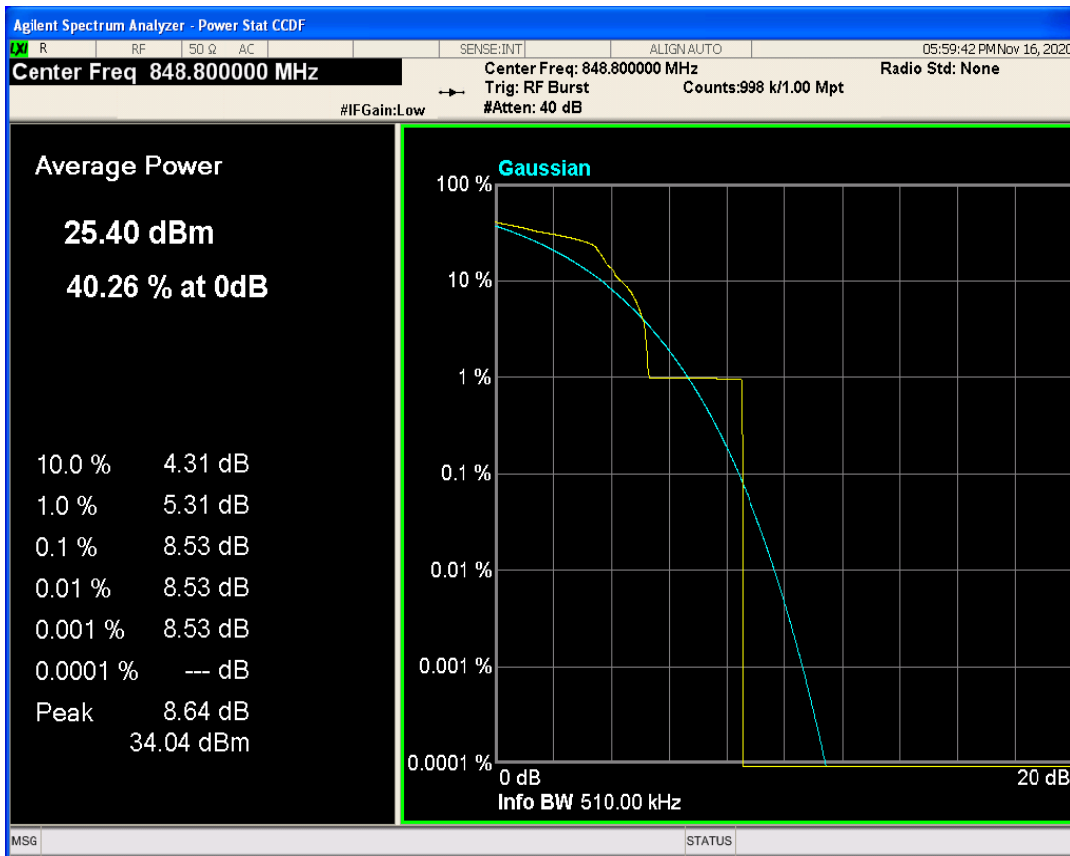

EGPRS1900 Channel=512

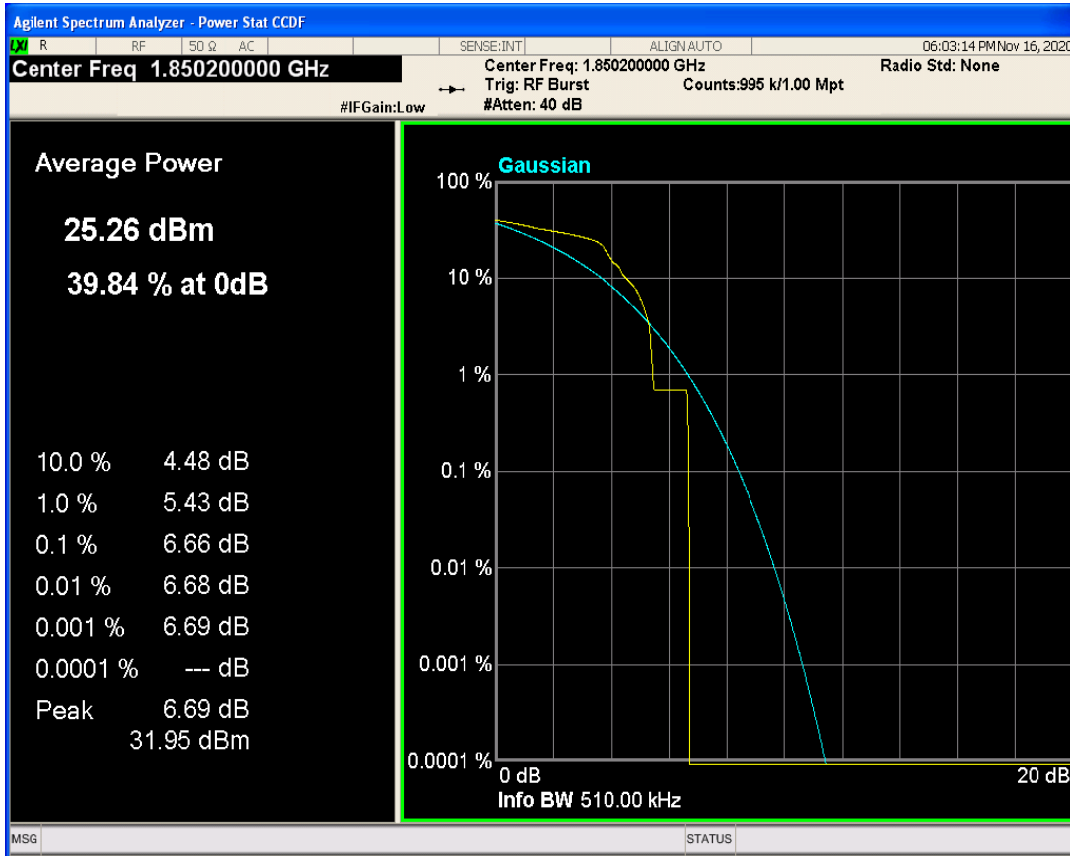


EGPRS1900 Channel=661

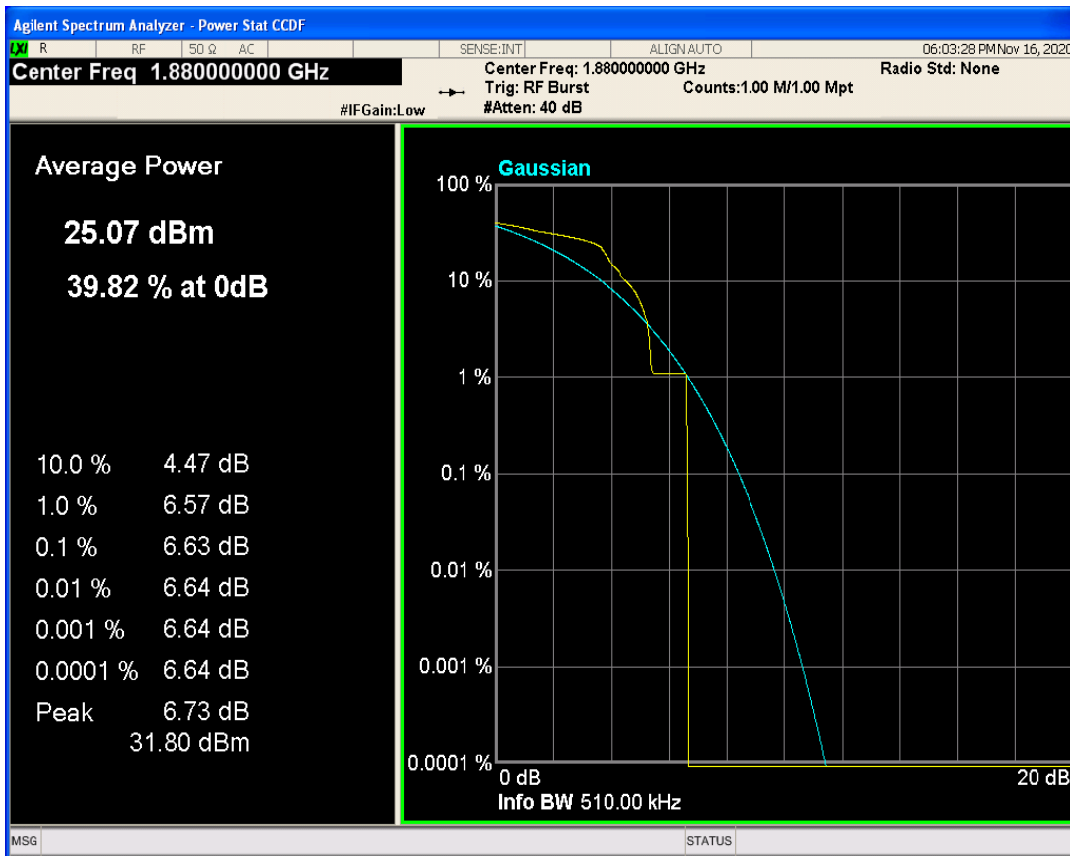


EGPRS1900 Channel=810



WCDMA Band2 Channel=9262

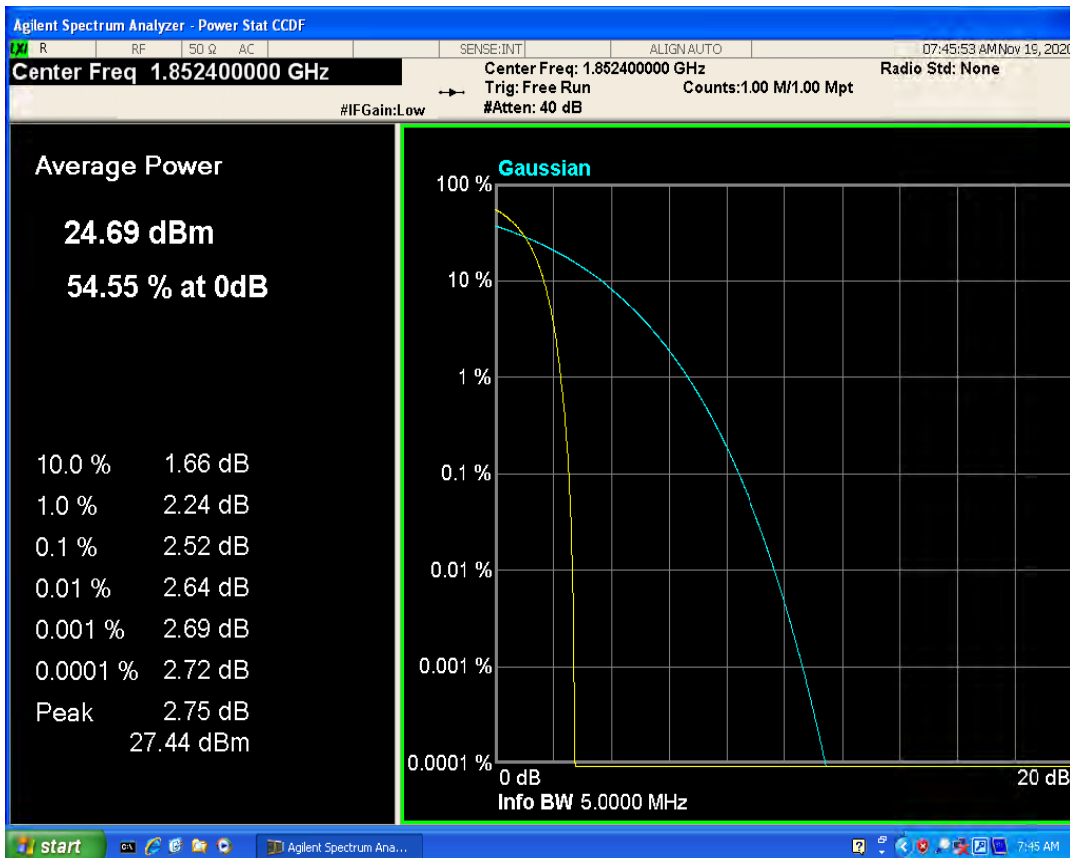


WCDMA Band2 Channel=9400

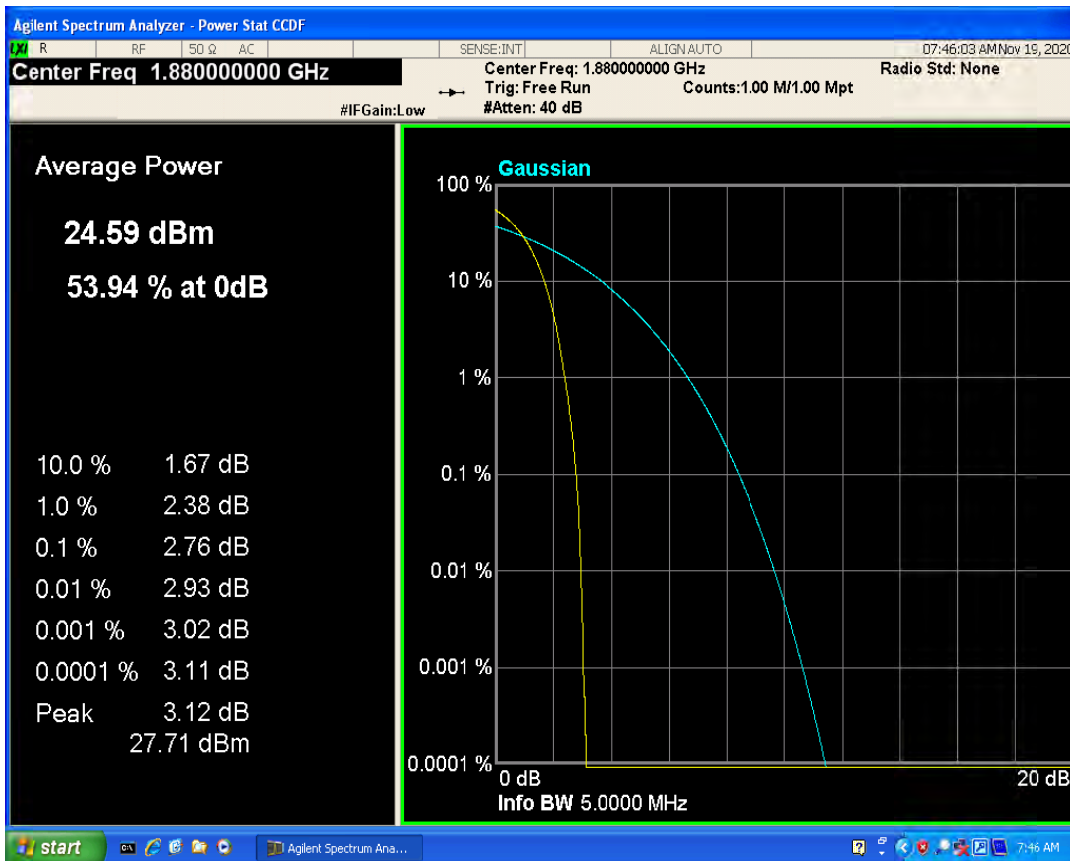


WCDMA Band2 Channel=9538



WCDMA Band4 Channel=1312

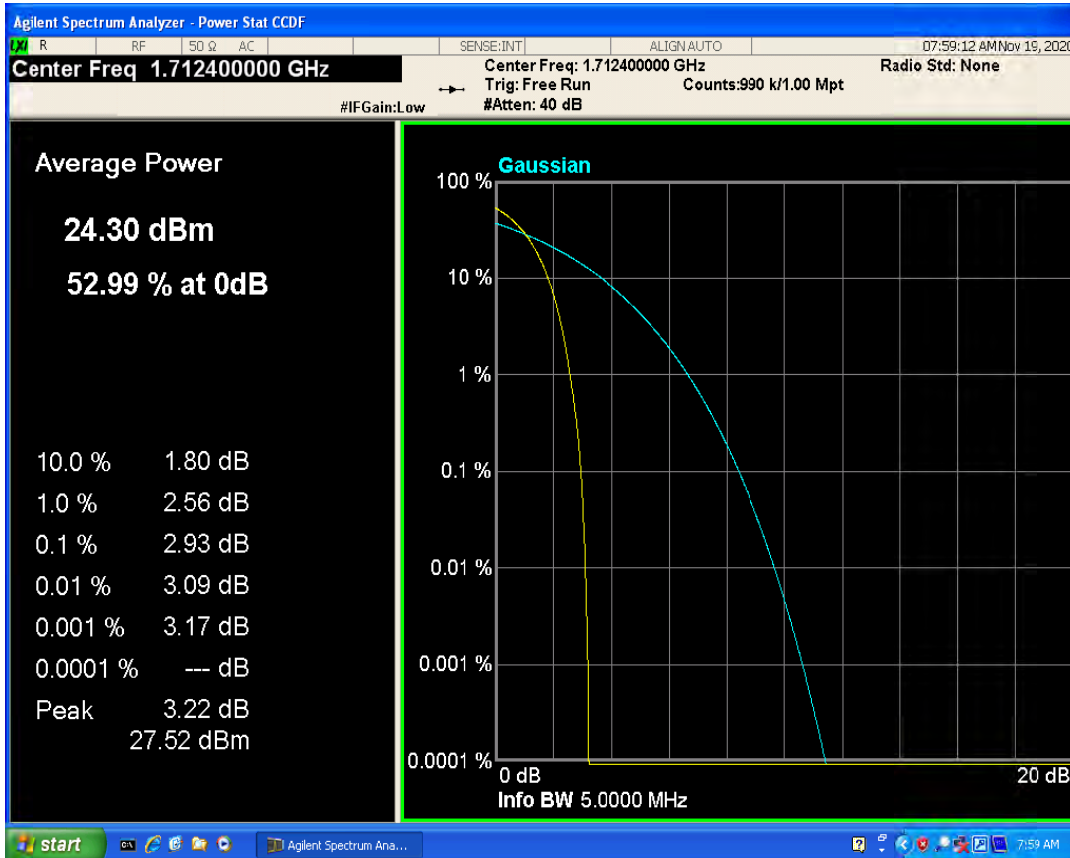


WCDMA Band4 Channel=1412

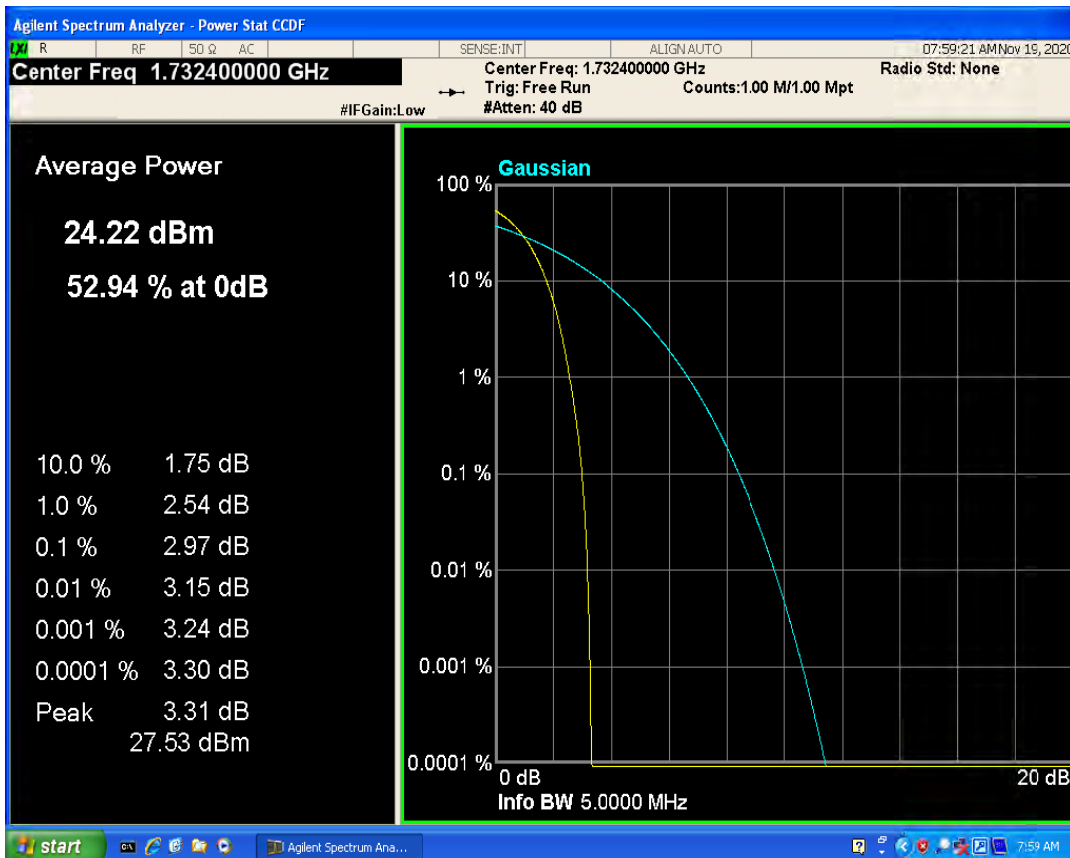

WCDMA Band4 Channel=1513




WCDMA Band5 Channel=4132

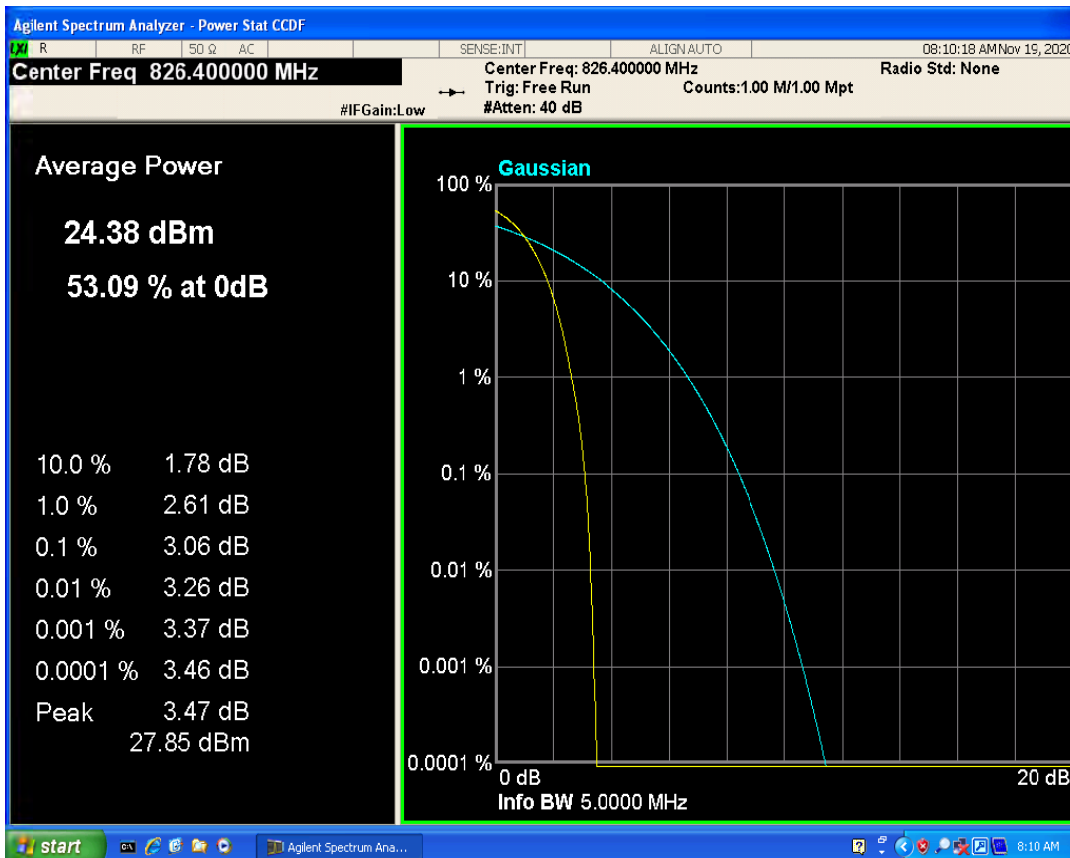


WCDMA Band5 Channel=4182




WCDMA Band5 Channel=4233

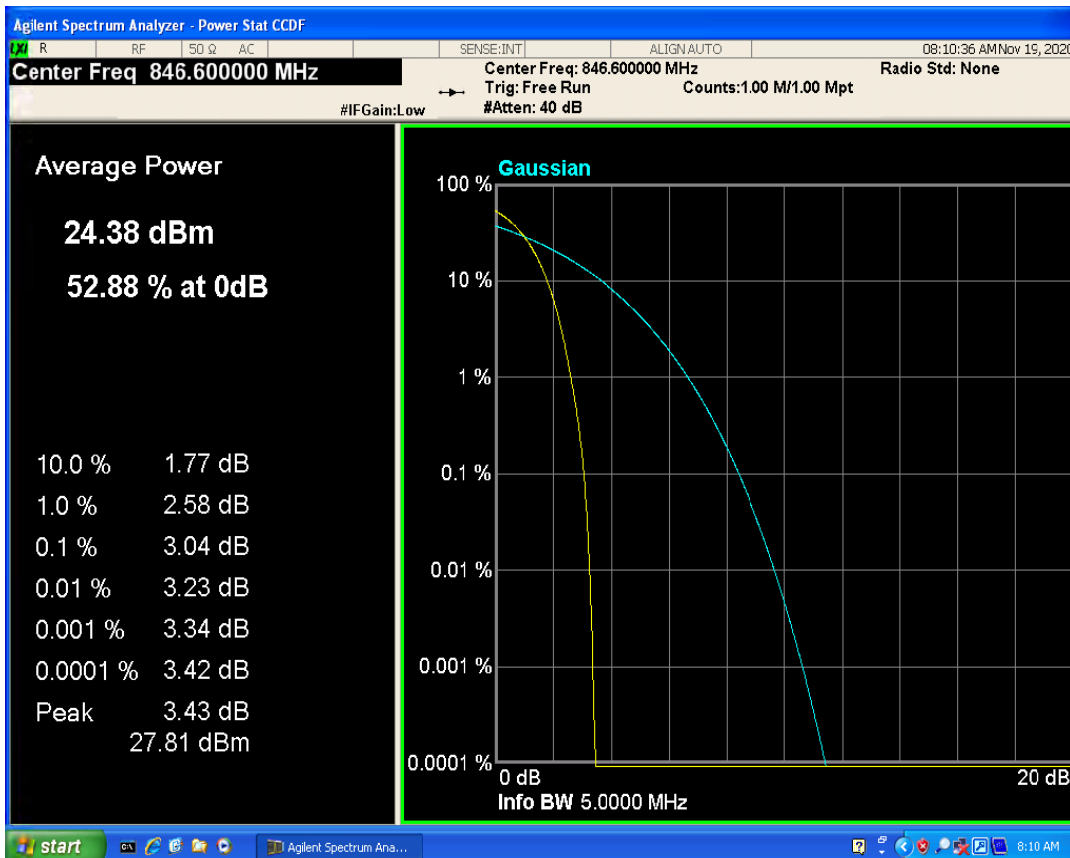


CDMA2000 BC0 1xRTT Channel=1013

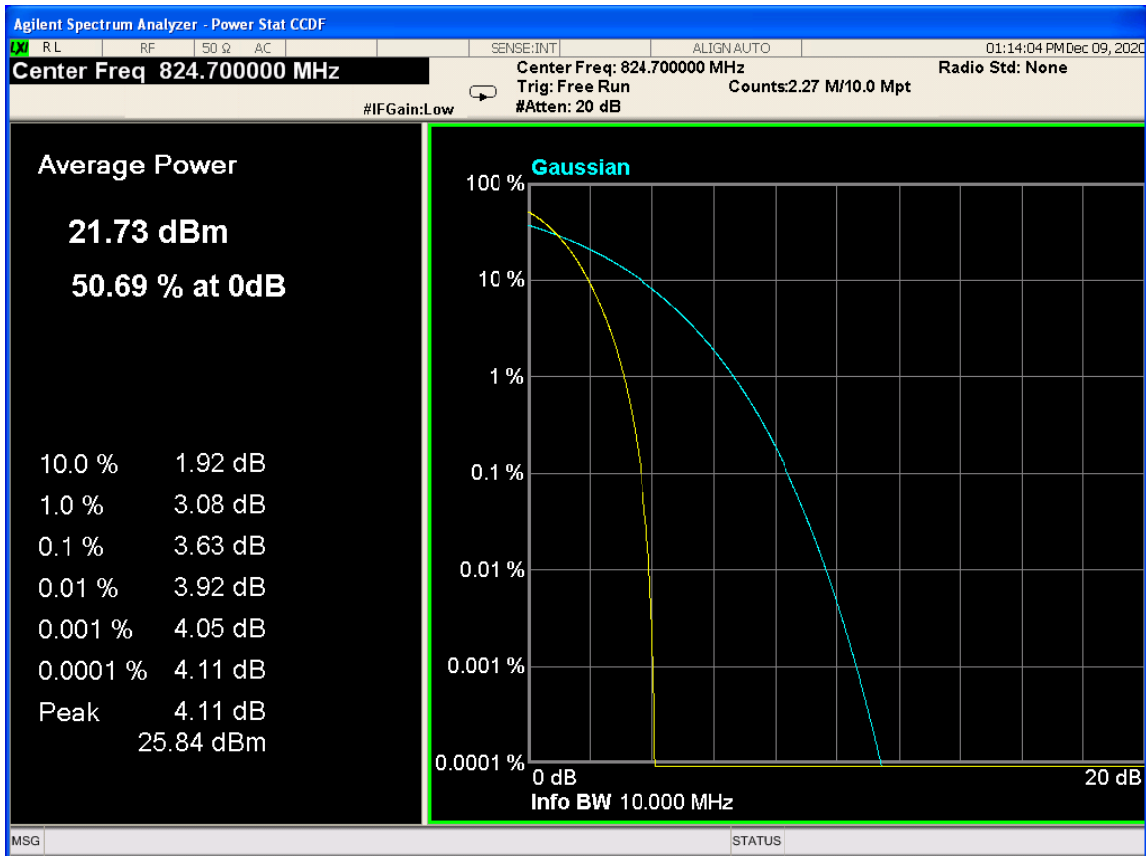


CDMA2000 BC0 1xRTT Channel=384

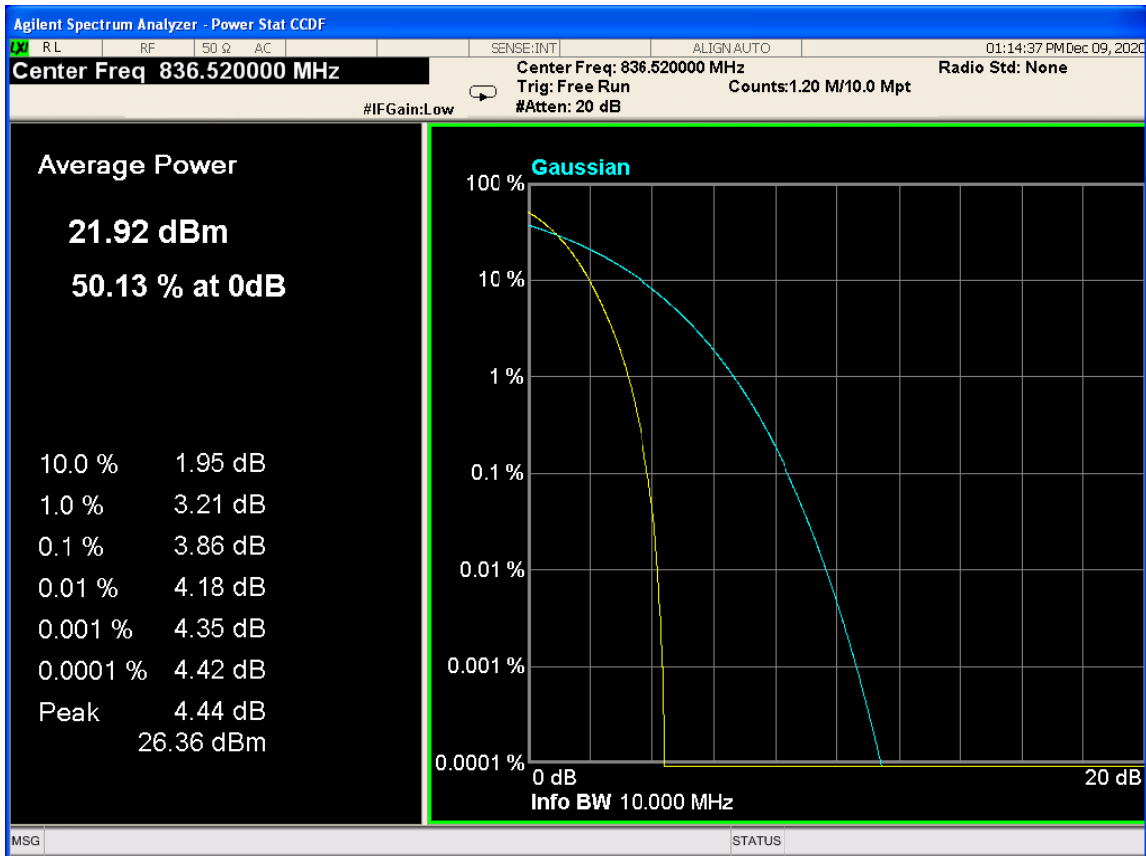


CDMA2000 BC0 1xRTT Channel=777

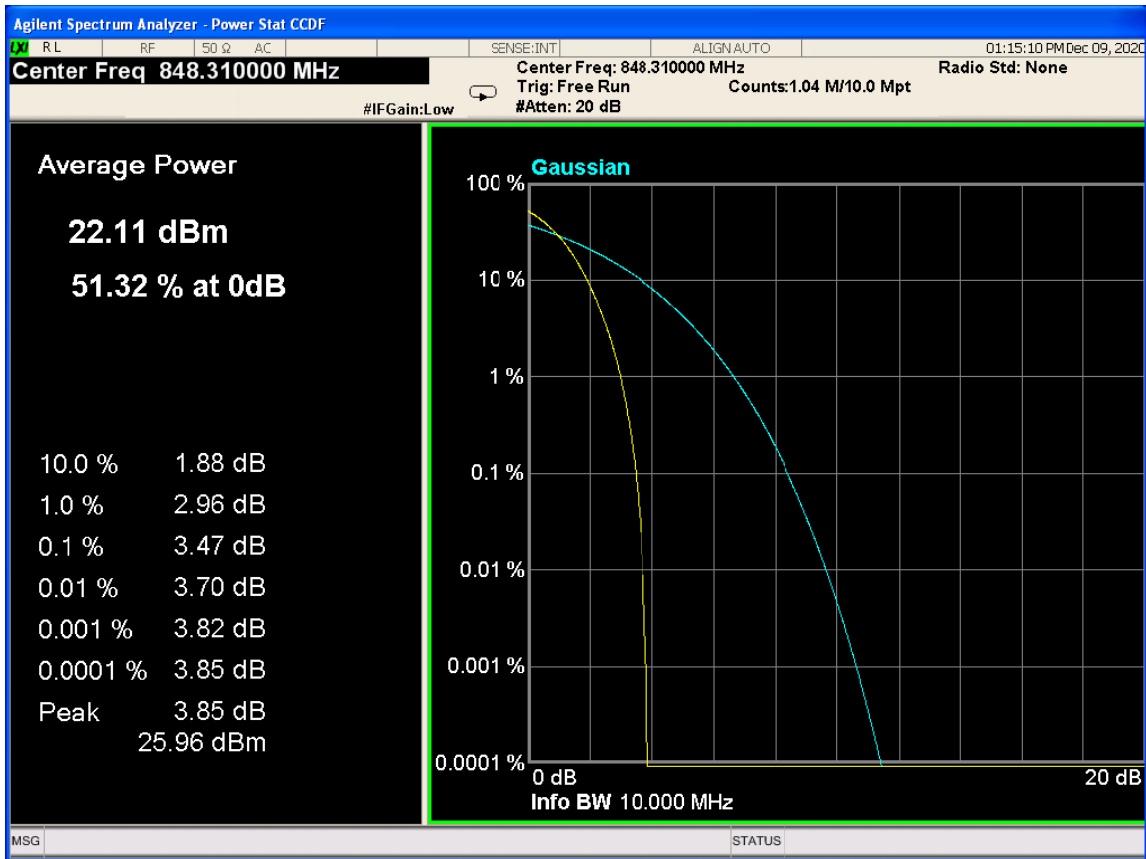


CDMA2000 BC0 1xEV-Do Rel.A Channel=1013

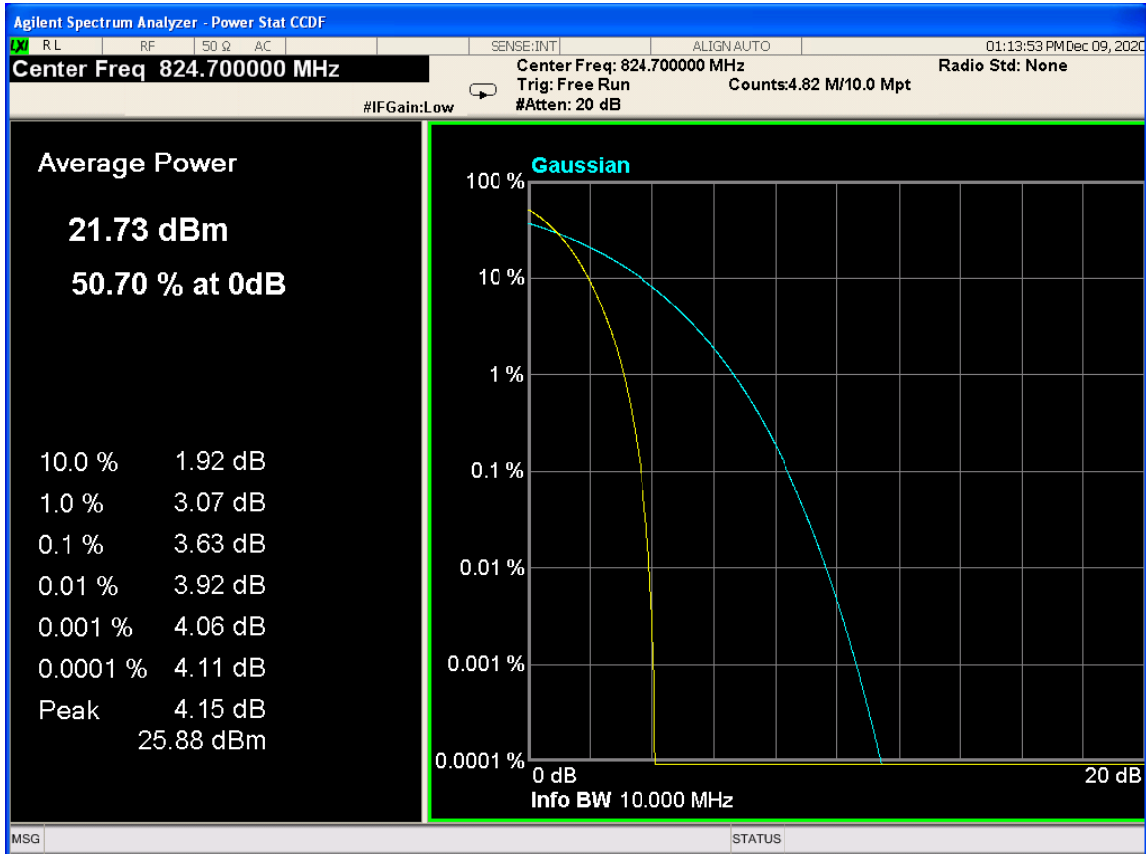


CDMA2000 BC0 1xEV-Do Rel.A Channel=384

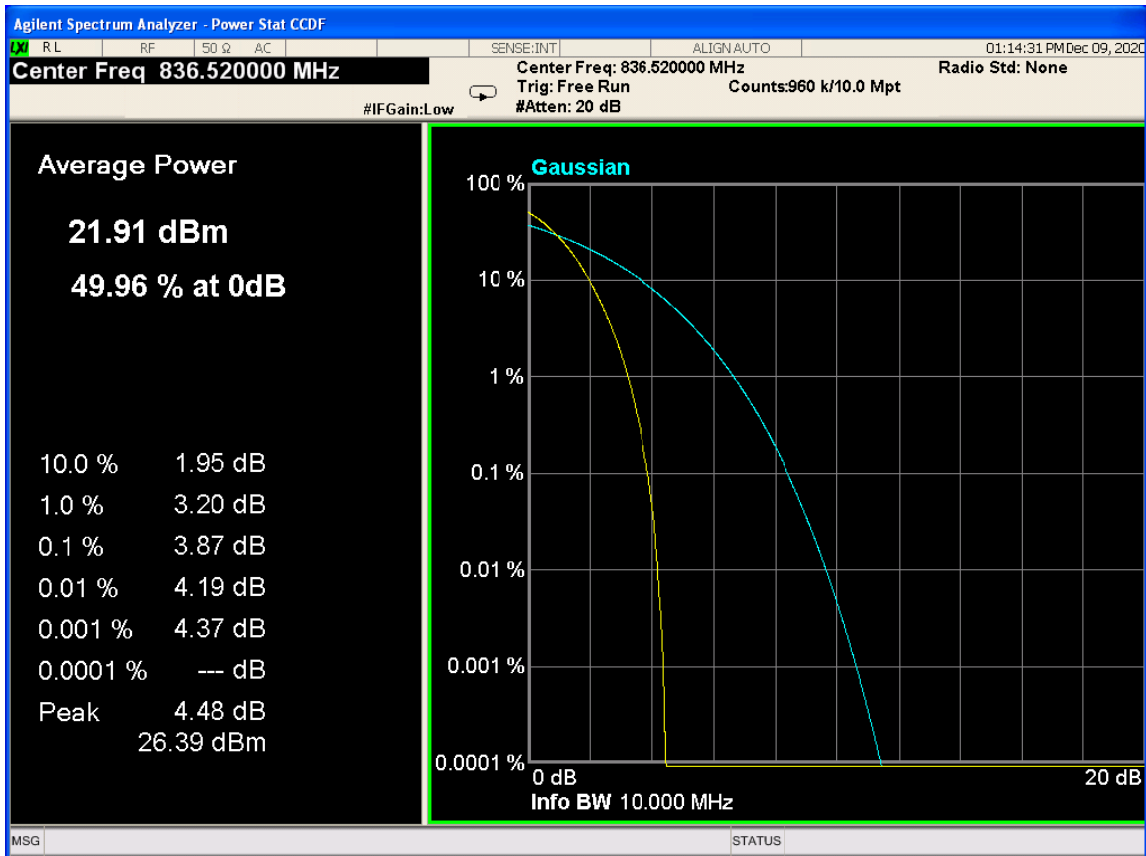


CDMA2000 BC0 1xEV-Do Rel.A Channel=777

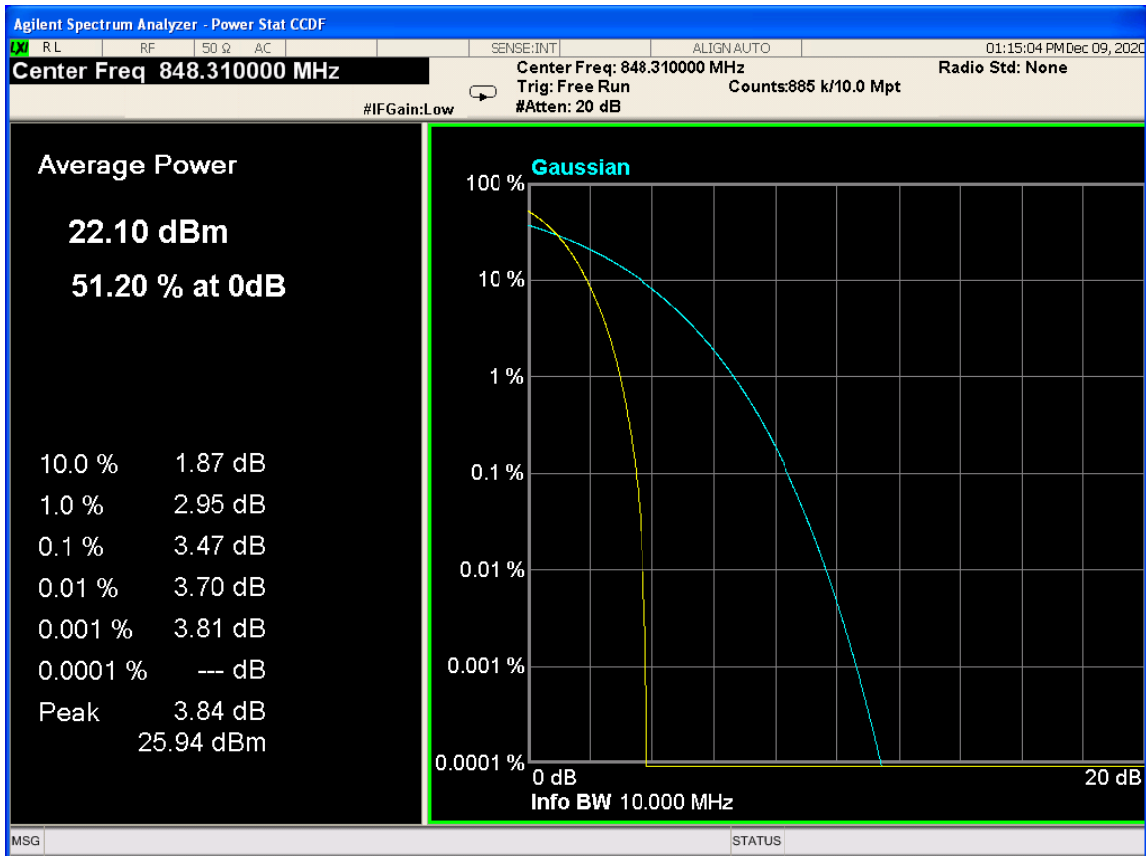


CDMA2000 BC1 1xRTT Channel=25

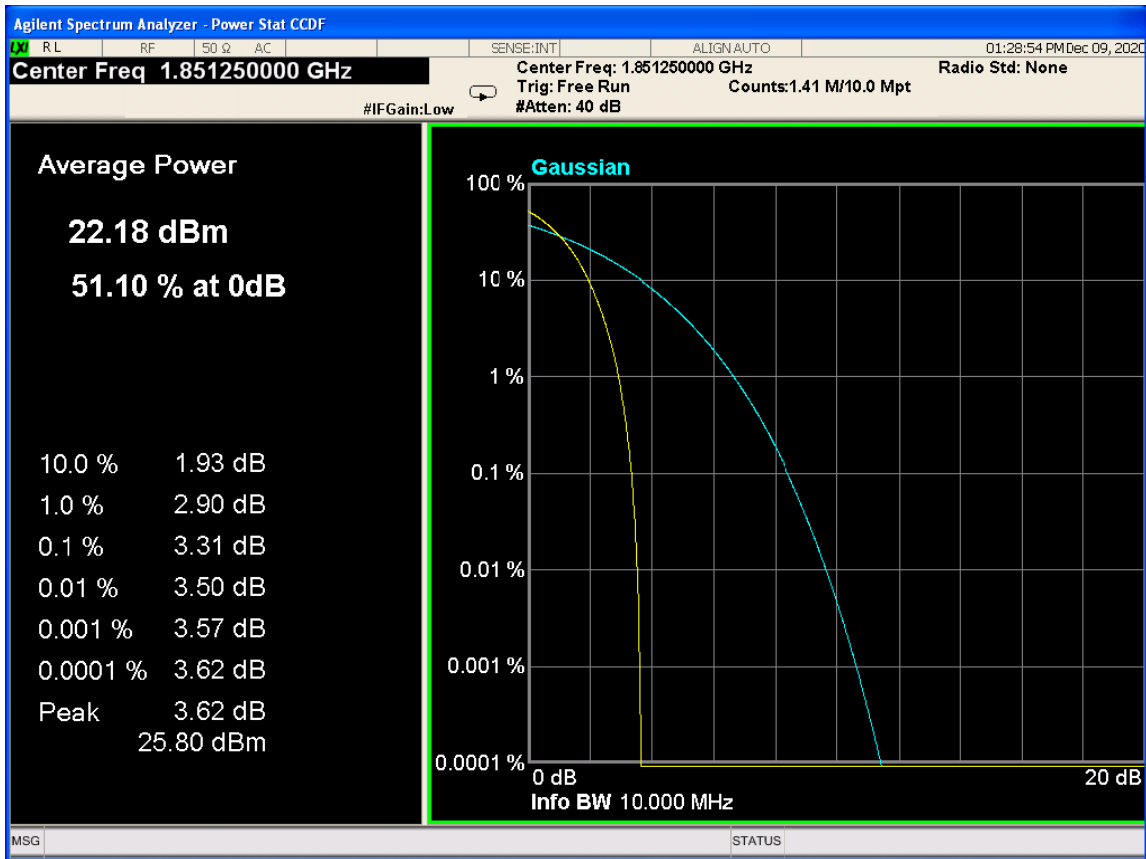


CDMA2000 BC1 1xRTT Channel=600

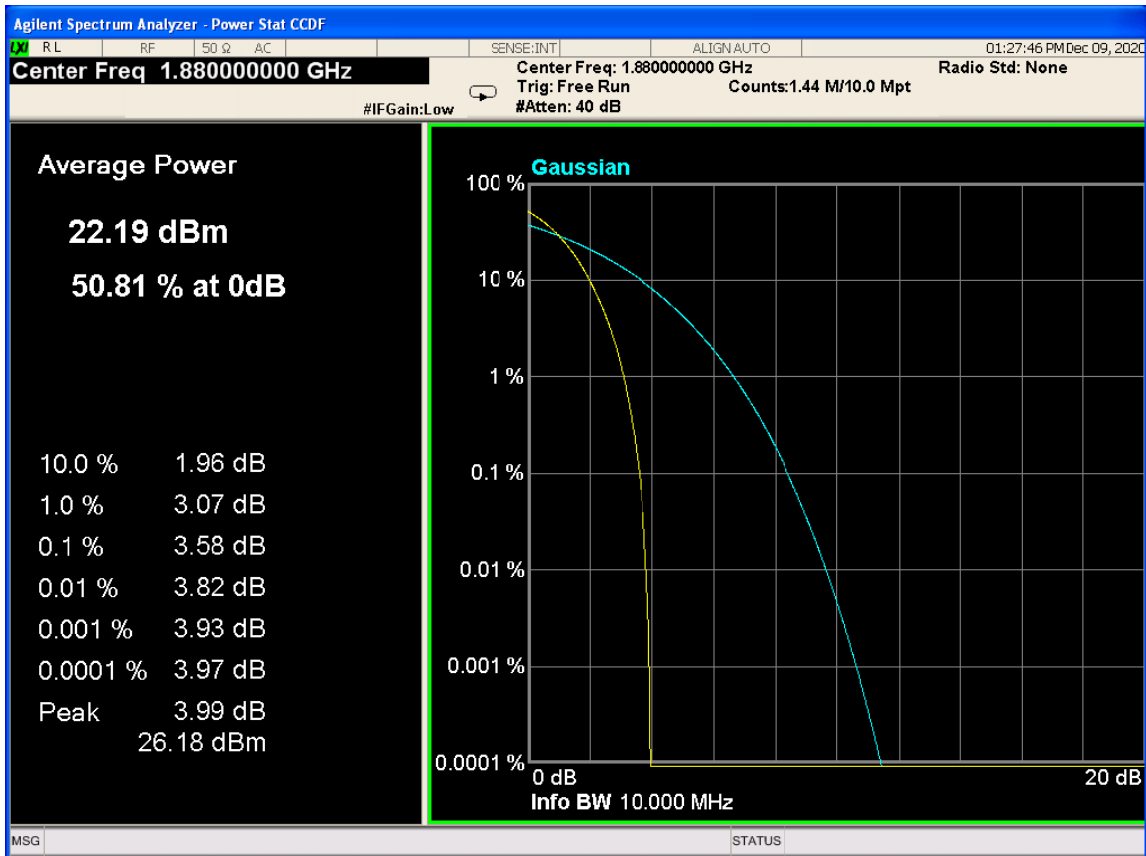


CDMA2000 BC1 1xRTT Channel=1175

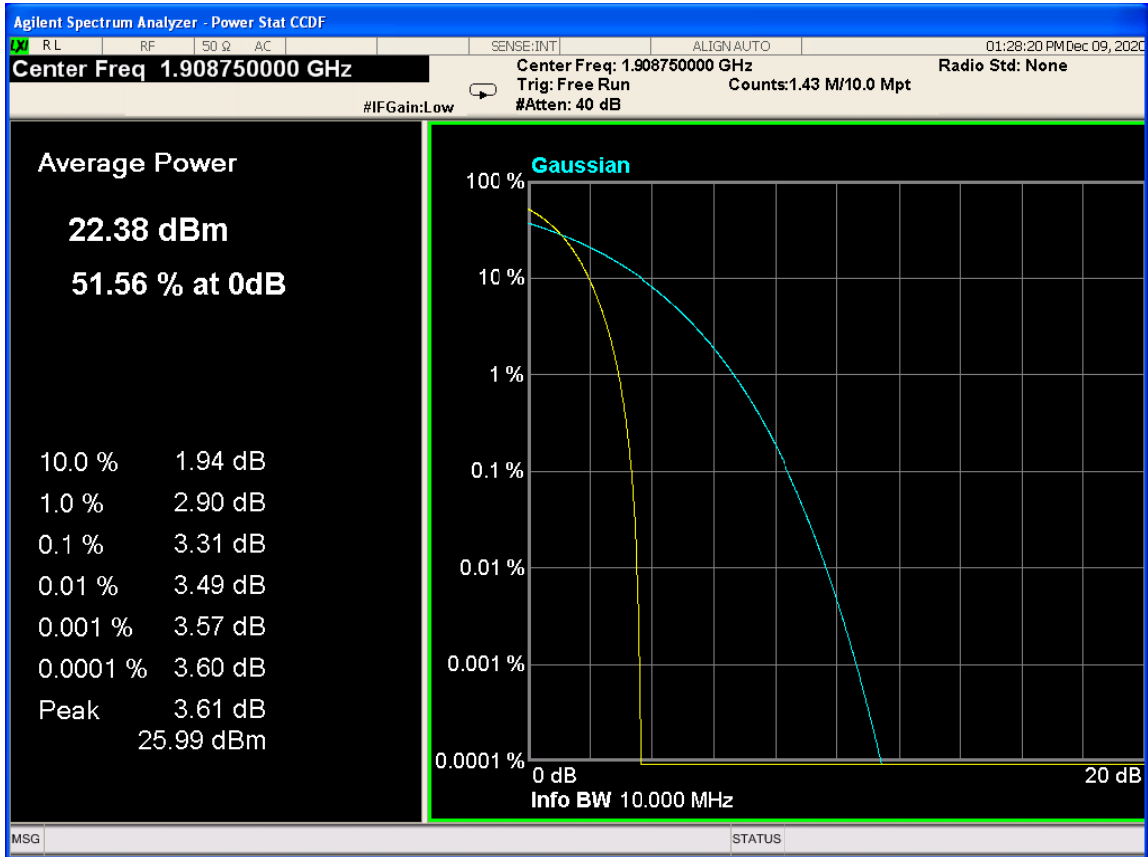


CDMA2000 BC1 1xEV-Do Rel.A Channel=25

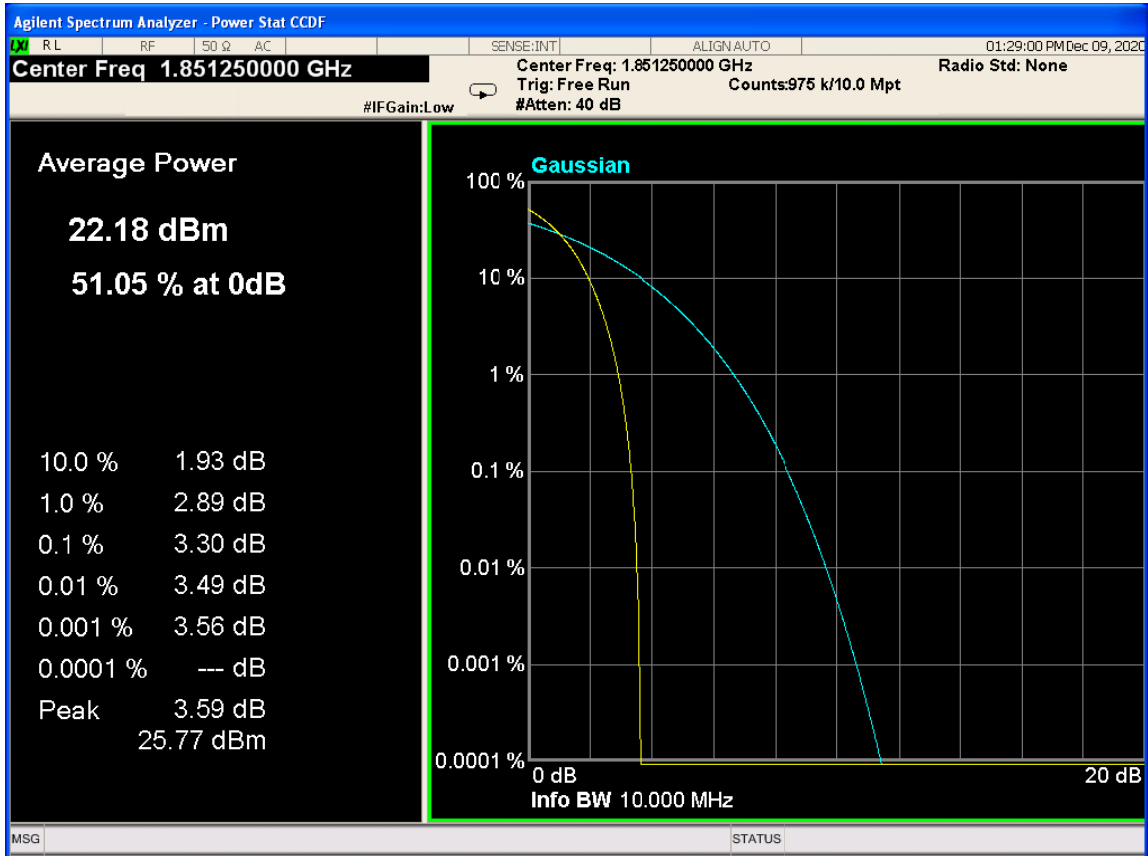


CDMA2000 BC1 1xEV-Do Rel.A Channel=600

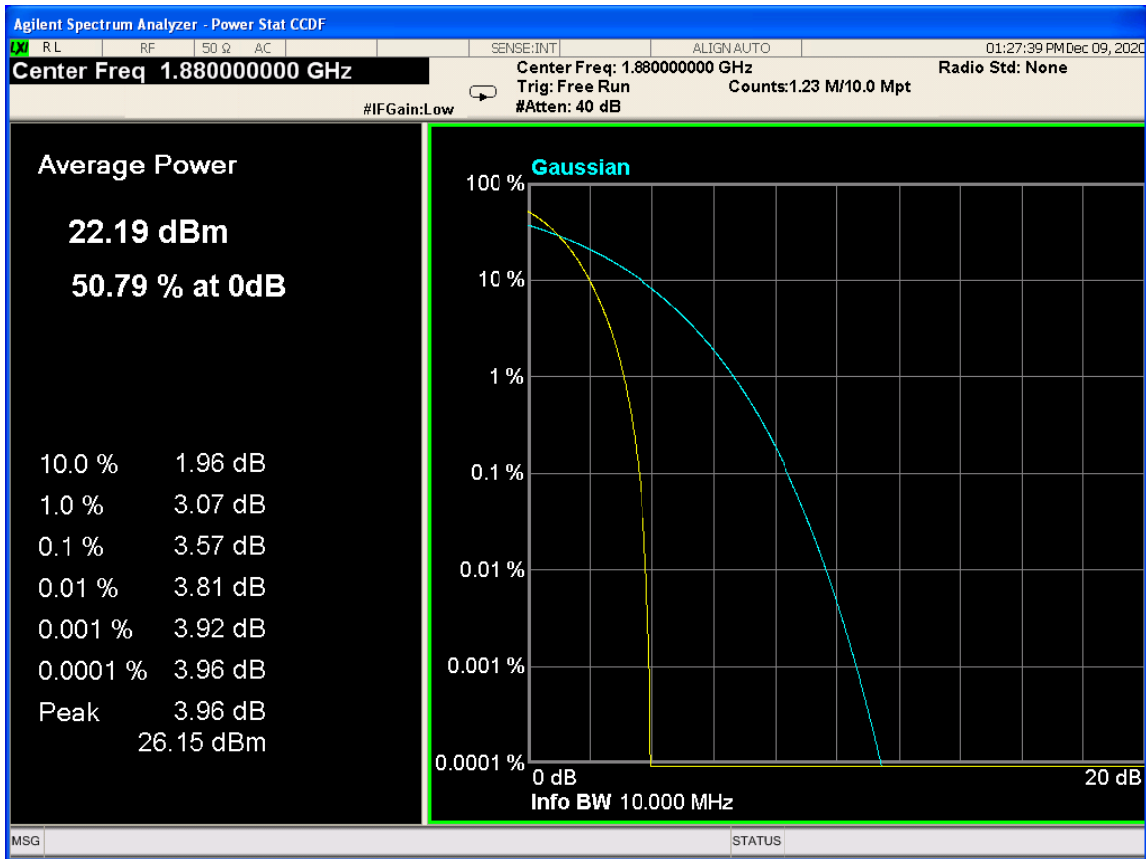


CDMA2000 BC1 1xEV-Do Rel.A Channel=1175

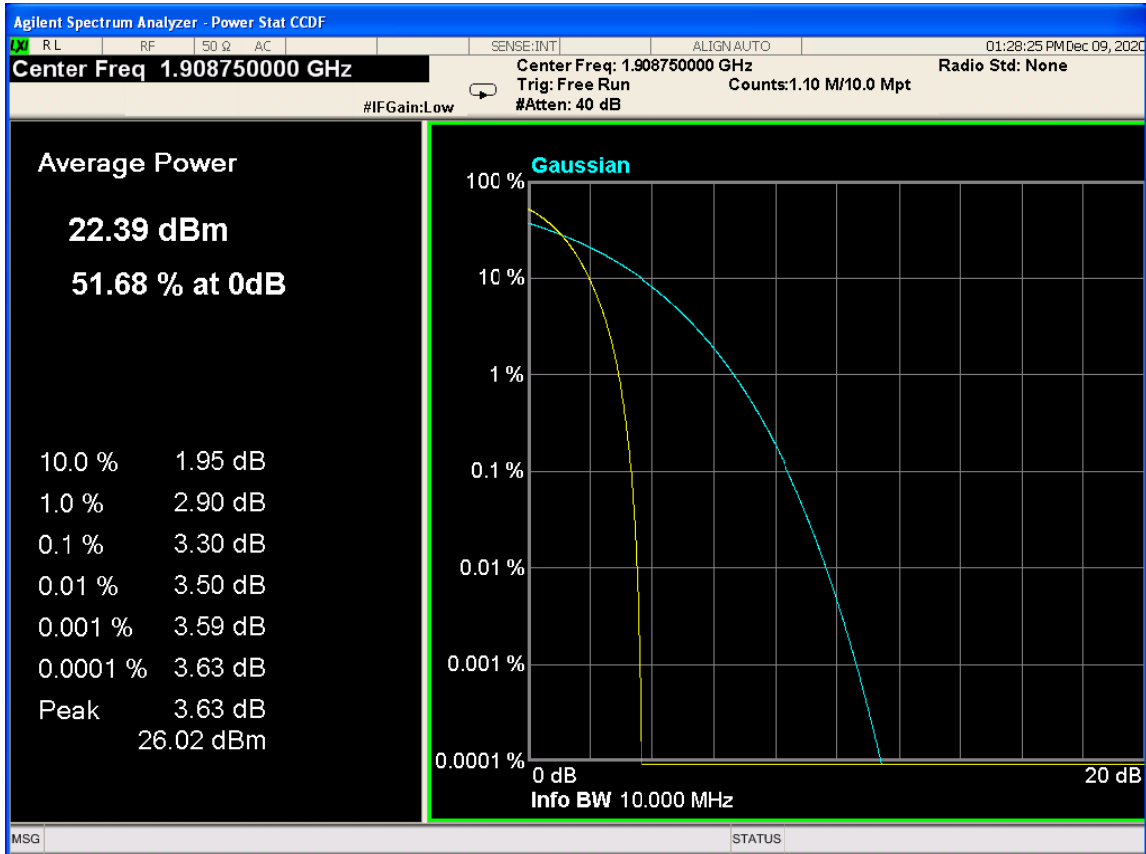


CDMA2000 BC10 1xRTT Channel=450

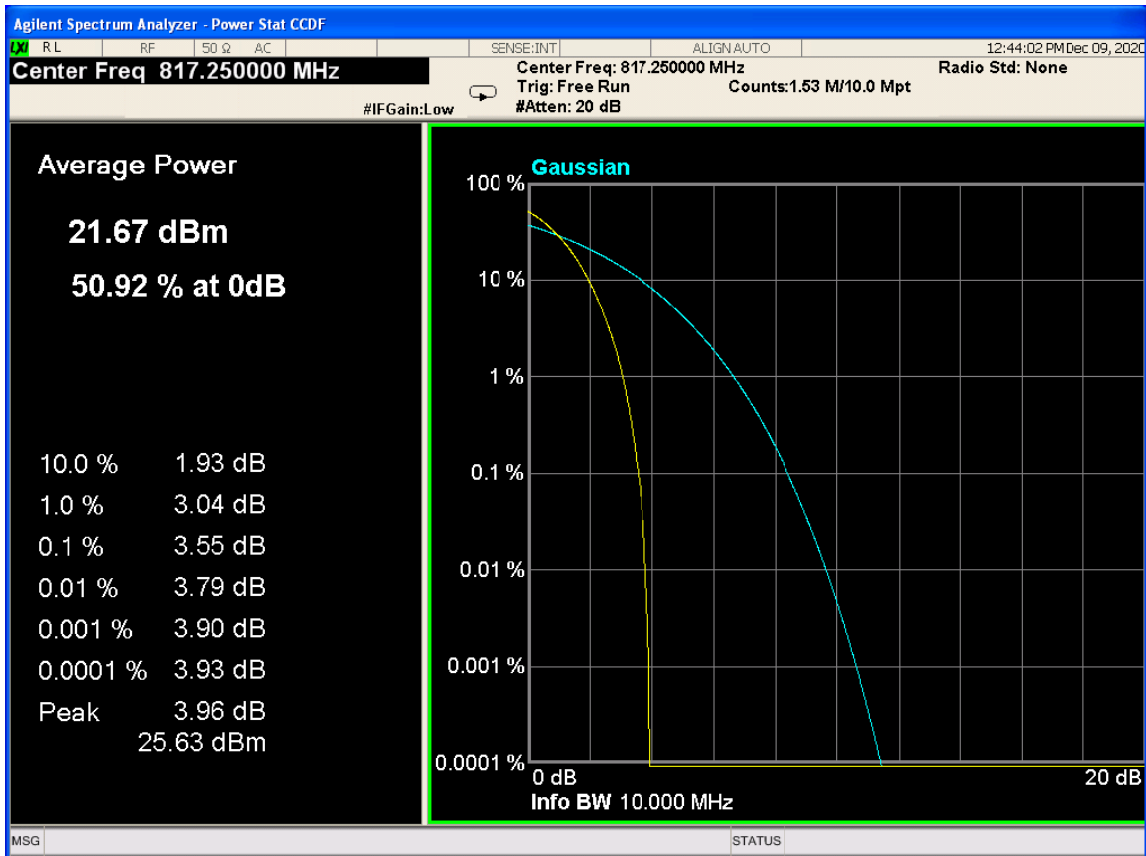


CDMA2000 BC10 1xRTT Channel=560

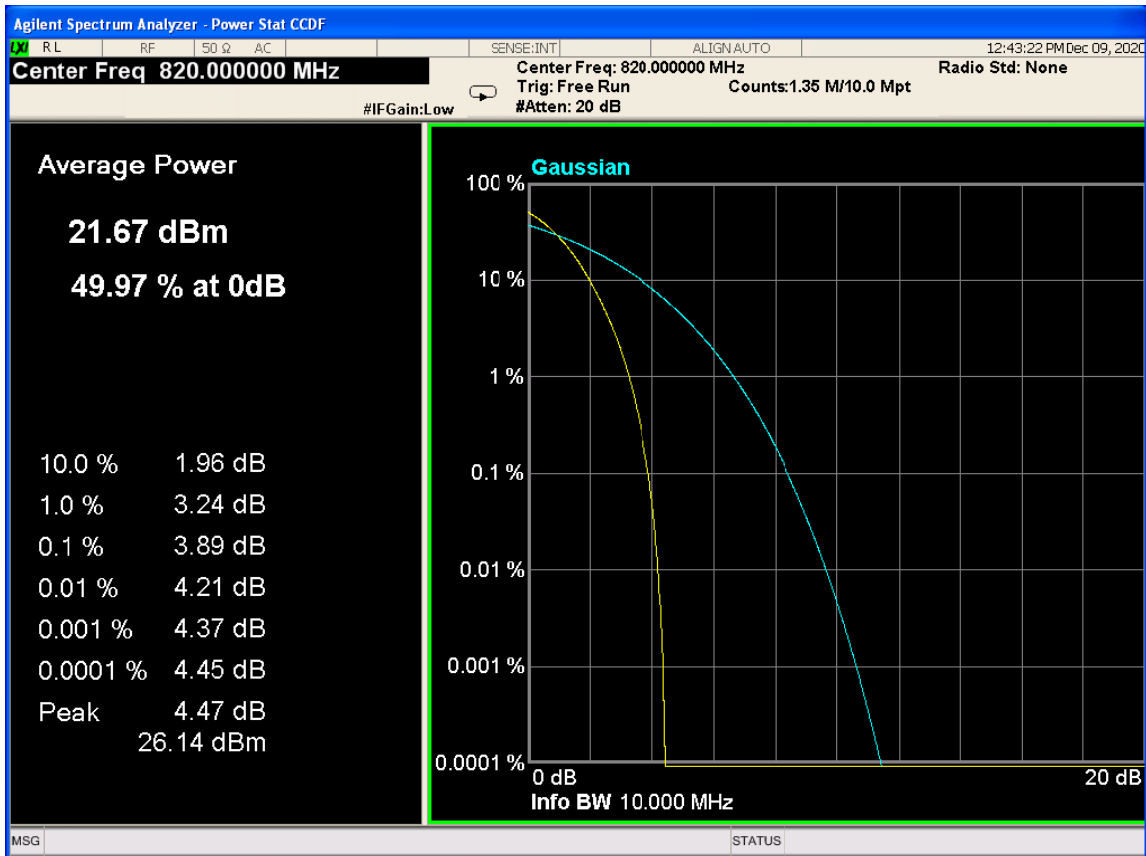


CDMA2000 BC10 1xRTT Channel=670

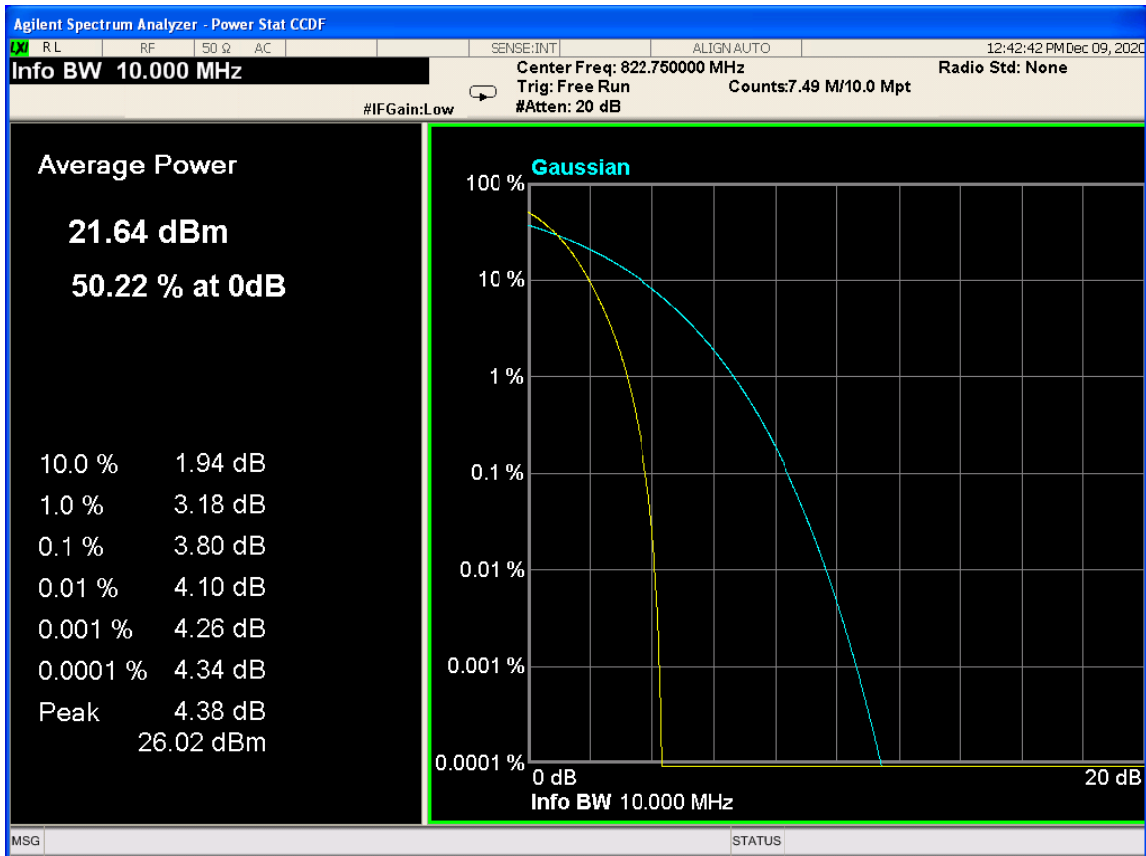


CDMA2000 BC10 1xEV-Do Rel.A Channel=450

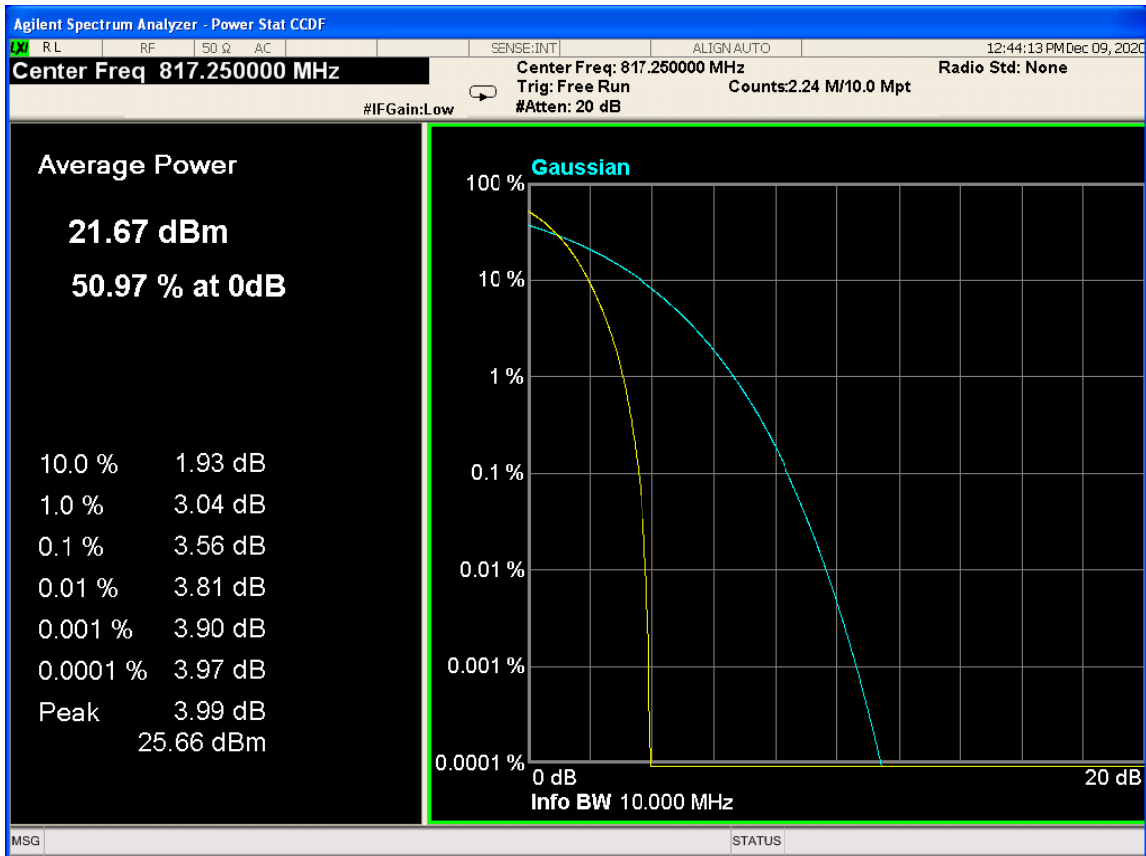

CDMA2000 BC10 1xEV-Do Rel.A Channel=560

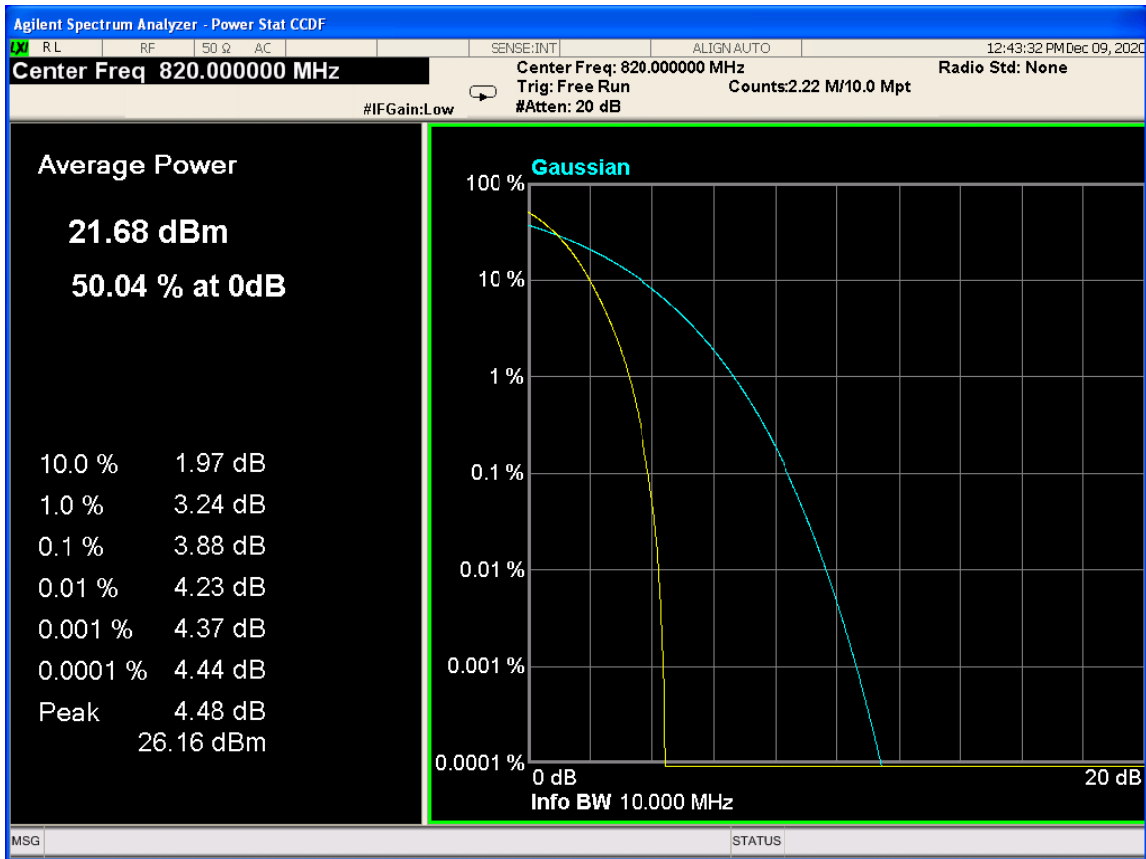

CDMA2000 BC10 1xEV-Do Rel.A Channel=670

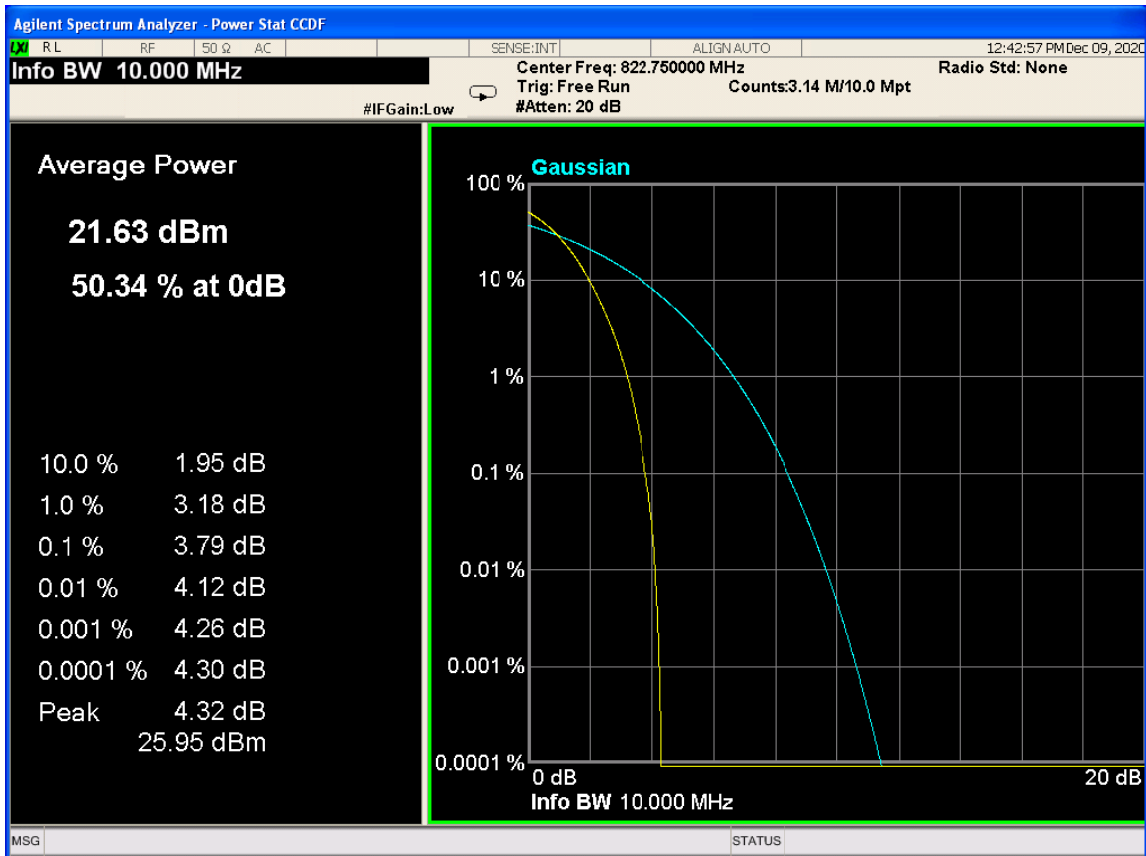


3 Occupied bandwidth


Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM850	128	824.2	247.207	317.499	PASS
GSM850	189	836.4	239.757	310.123	PASS
GSM850	251	848.8	246.167	316.646	PASS
GSM1900	512	1850.2	243.002	309.912	PASS
GSM1900	661	1880	247.470	315.756	PASS
GSM1900	810	1909.8	245.068	315.933	PASS
GPRS850	128	824.2	243.129	307.366	PASS
GPRS850	189	836.4	245.231	314.454	PASS
GPRS850	251	848.8	249.358	322.639	PASS
GPRS1900	512	1850.2	244.610	305.933	PASS
GPRS1900	661	1880	239.819	310.017	PASS
GPRS1900	810	1909.8	243.176	315.112	PASS
EGPRS850	128	824.2	237.096	291.135	PASS
EGPRS850	189	836.4	254.987	318.387	PASS
EGPRS850	251	848.8	249.727	298.022	PASS
EGPRS1900	512	1850.2	238.850	311.150	PASS
EGPRS1900	661	1880	237.521	309.552	PASS
EGPRS1900	810	1909.8	250.130	315.719	PASS
WCDMA Band2	9262	1852.4	4180.347	4714.280	PASS
WCDMA Band2	9400	1880	4166.769	4704.278	PASS
WCDMA Band2	9538	1907.6	4178.838	4697.826	PASS
WCDMA Band4	1312	1712.4	4168.392	4709.416	PASS
WCDMA Band4	1412	1732.4	4172.186	4688.816	PASS
WCDMA Band4	1513	1752.6	4162.451	4673.770	PASS
WCDMA Band5	4132	826.4	4172.092	4683.541	PASS
WCDMA Band5	4182	836.4	4161.682	4680.372	PASS
WCDMA Band5	4233	846.6	4160.192	4702.643	PASS
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	1013	824.7	1270.3	1423	PASS
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	384	836.52	1272	1423	PASS
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	777	848.31	1269.2	1433	PASS
CDMA2000 BC0 1xEV-Do Rel.A	1013	824.7	1264.7	1429	PASS
CDMA2000 BC0 1xEV-Do Rel.A	384	836.52	1274.7	1422	PASS
CDMA2000 BC0 1xEV-Do Rel.A	777	848.31	1275.6	1432	PASS
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	25	1851.25	1276.4	1427	PASS
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	600	1880	1268.9	1429	PASS
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	1175	1908.75	1271.9	1430	PASS
CDMA2000 BC1 1xEV-Do Rel.A	25	1851.25	1267.2	1429	PASS
CDMA2000 BC1 1xEV-Do Rel.A	600	1880	1269.1	1422	PASS
CDMA2000 BC1 1xEV-Do Rel.A	1175	1908.75	1277.8	1431	PASS
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	450	817.25	1270.9	1432	PASS
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	560	820	1267	1422	PASS

CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	670	822.75	1274.5	1428	PASS
CDMA2000 BC10 1xEV-Do Rel.A	450	817.25	1274	1425	PASS
CDMA2000 BC10 1xEV-Do Rel.A	560	820	1276.2	1424	PASS
CDMA2000 BC10 1xEV-Do Rel.A	670	822.75	1273.8	1424	PASS


GSM850 Channel=128

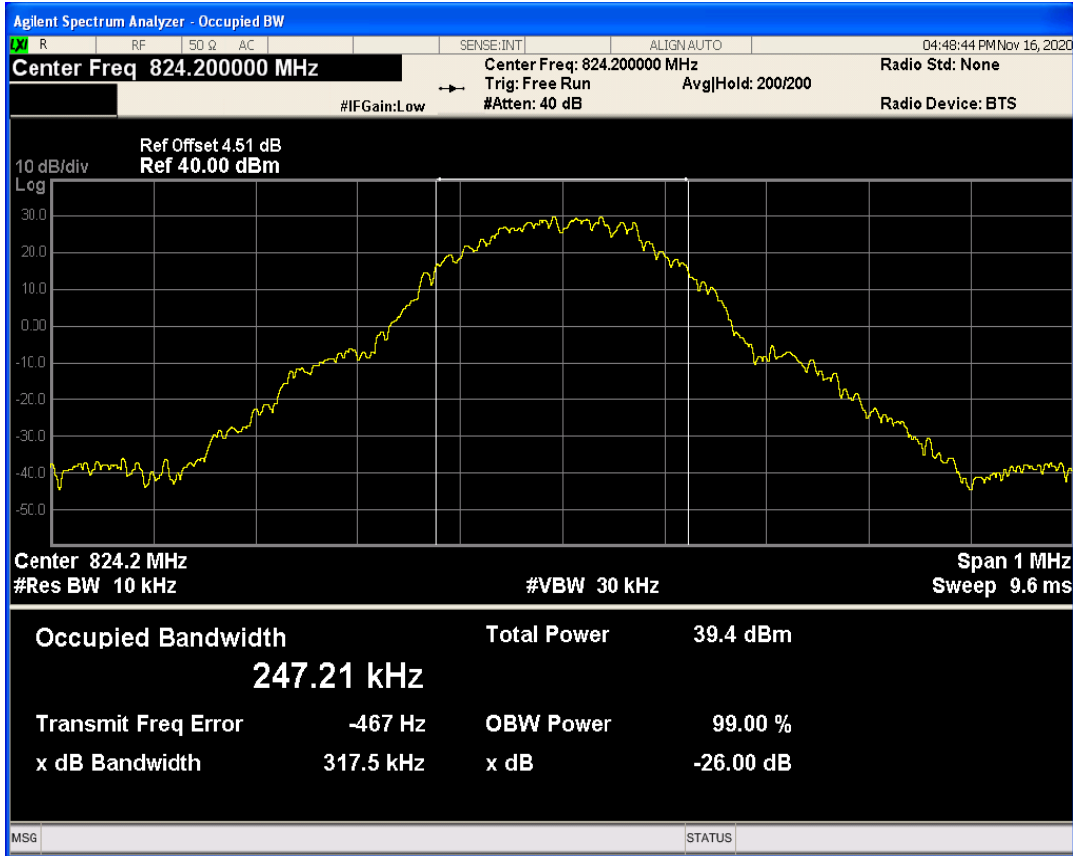


GSM850 Channel=189

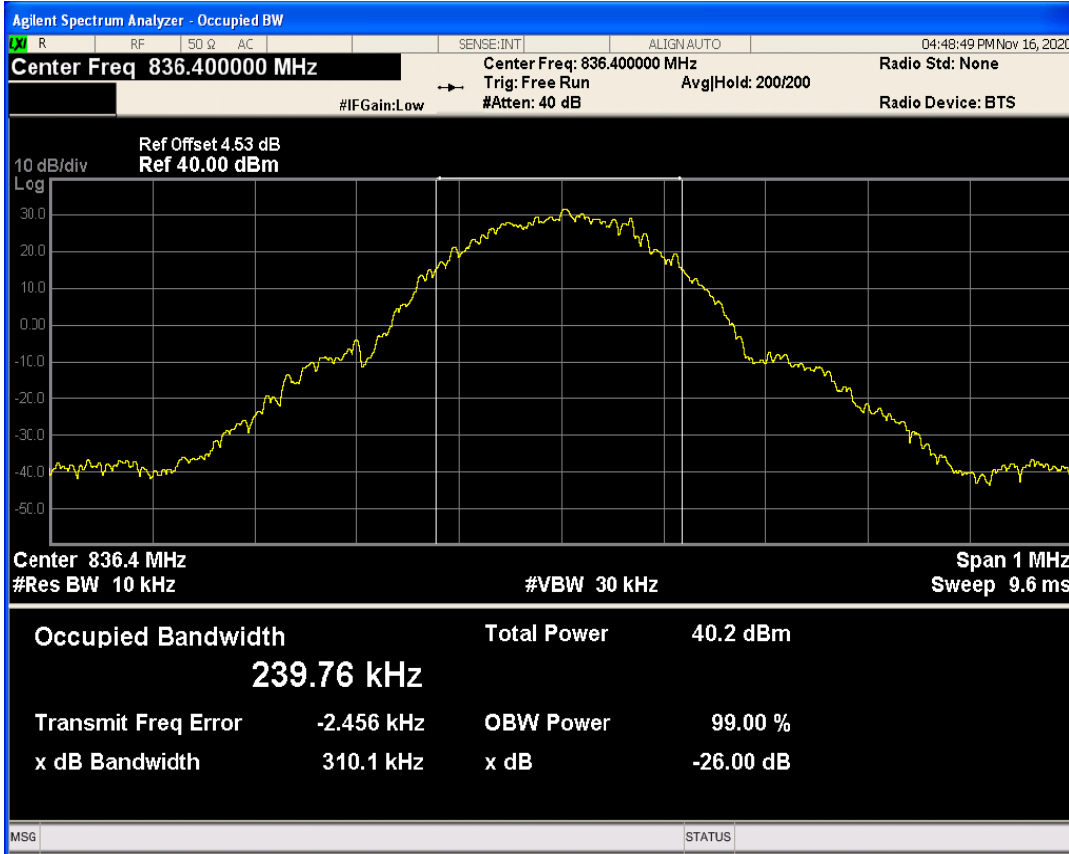


GSM850 Channel=251

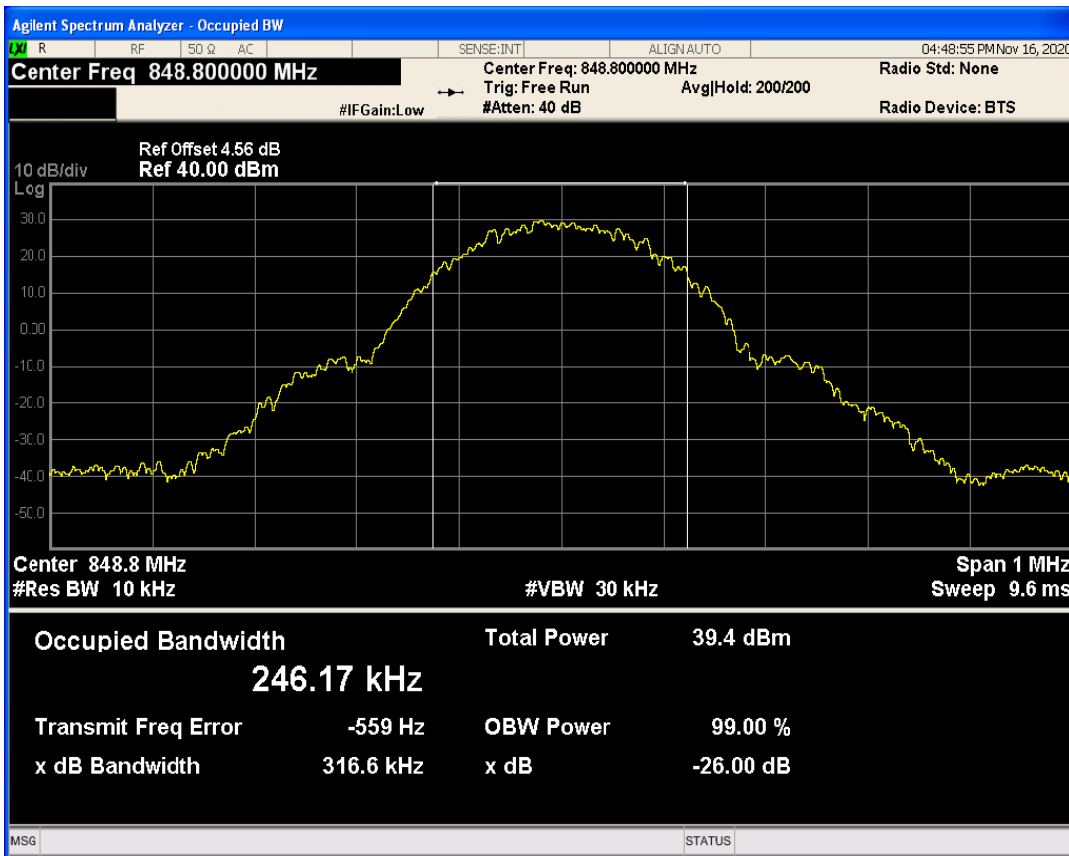


GSM1900 Channel=512

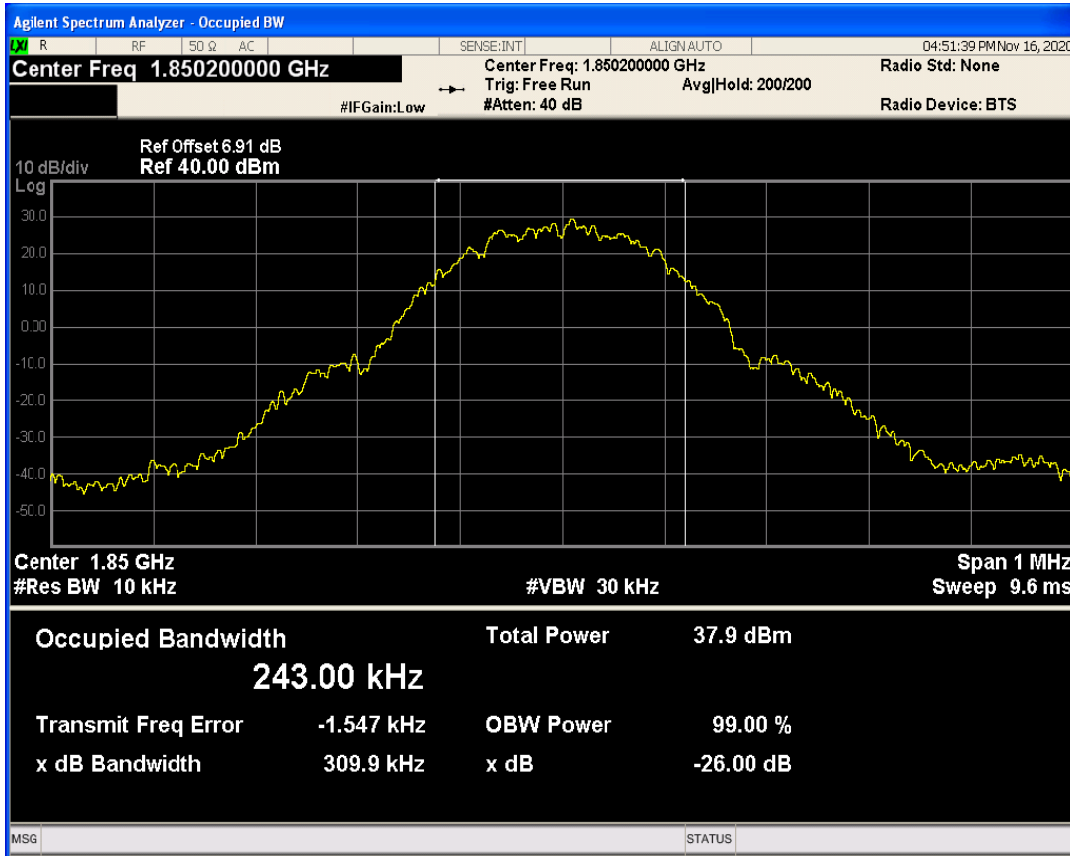


GSM1900 Channel=661

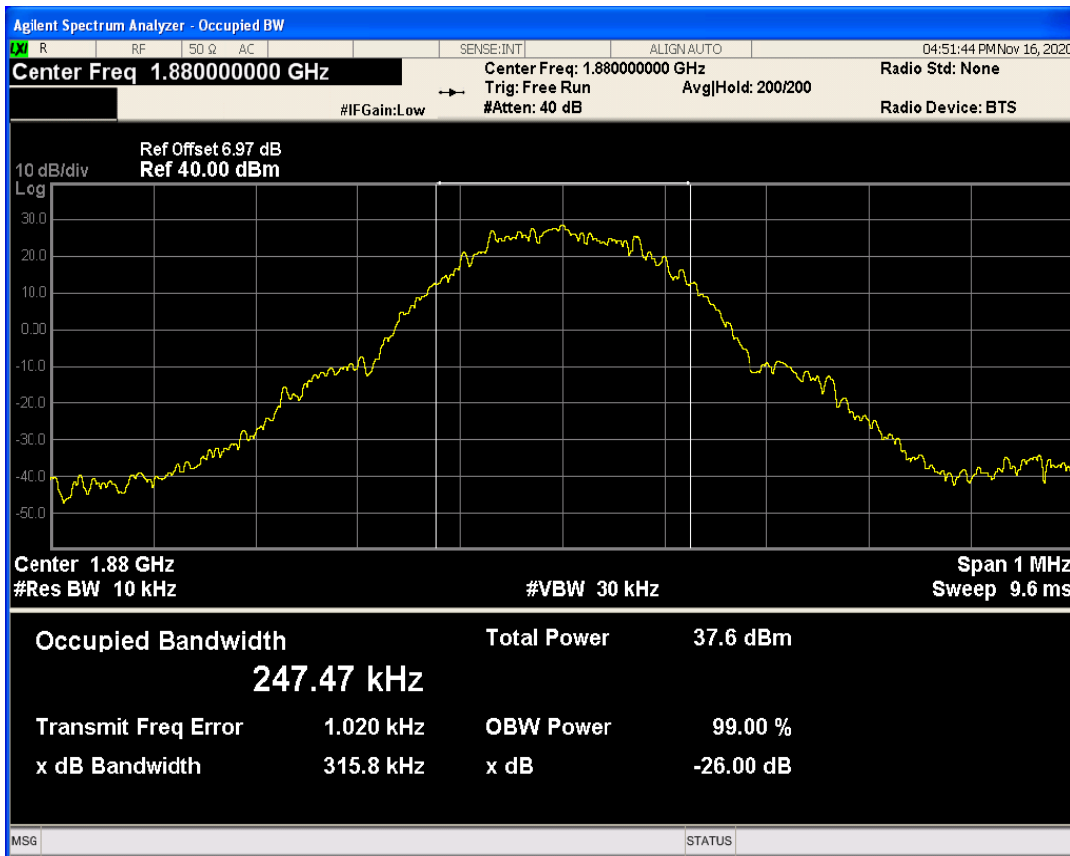


GSM1900 Channel=810

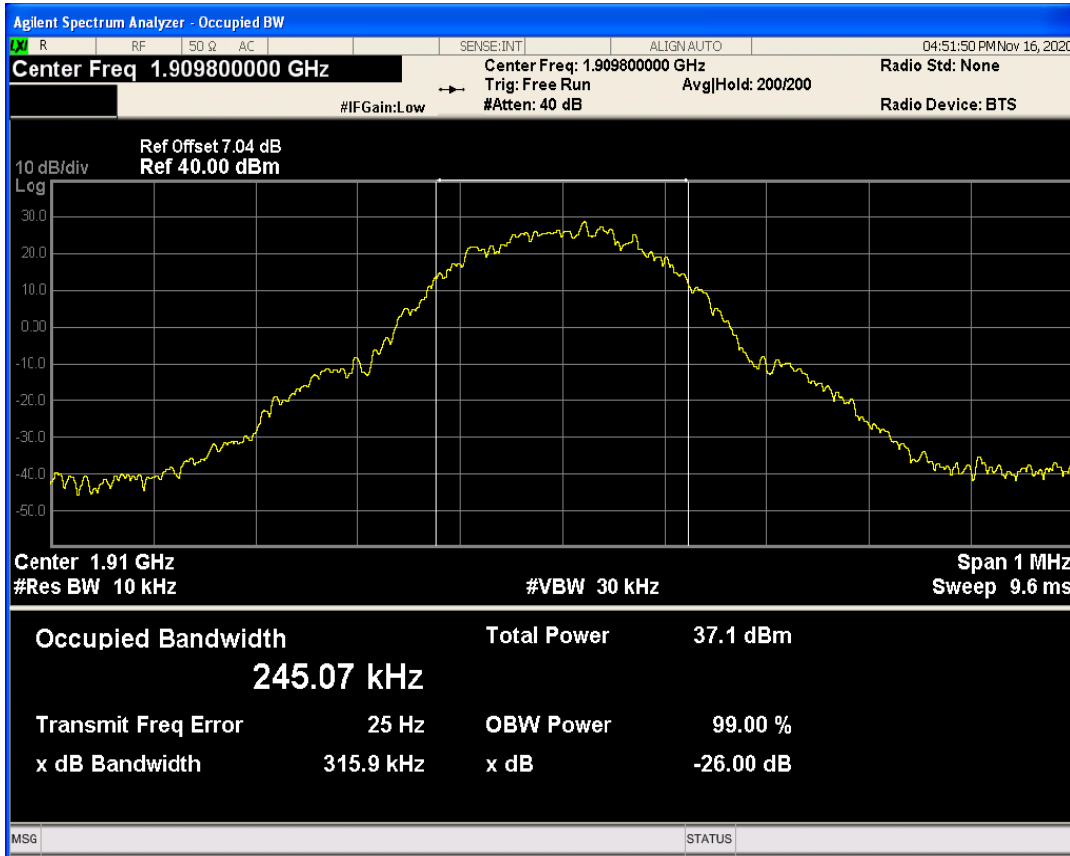


GPRS850 Channel=189

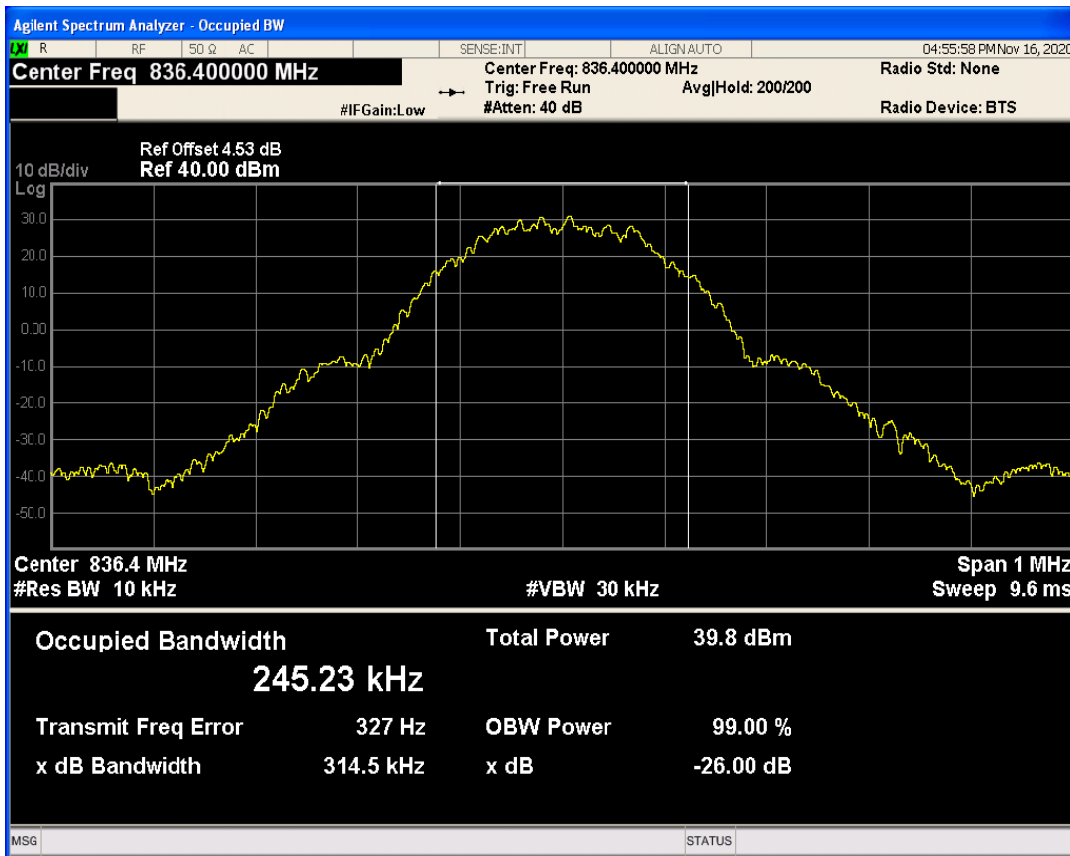


GPRS850 Channel=128

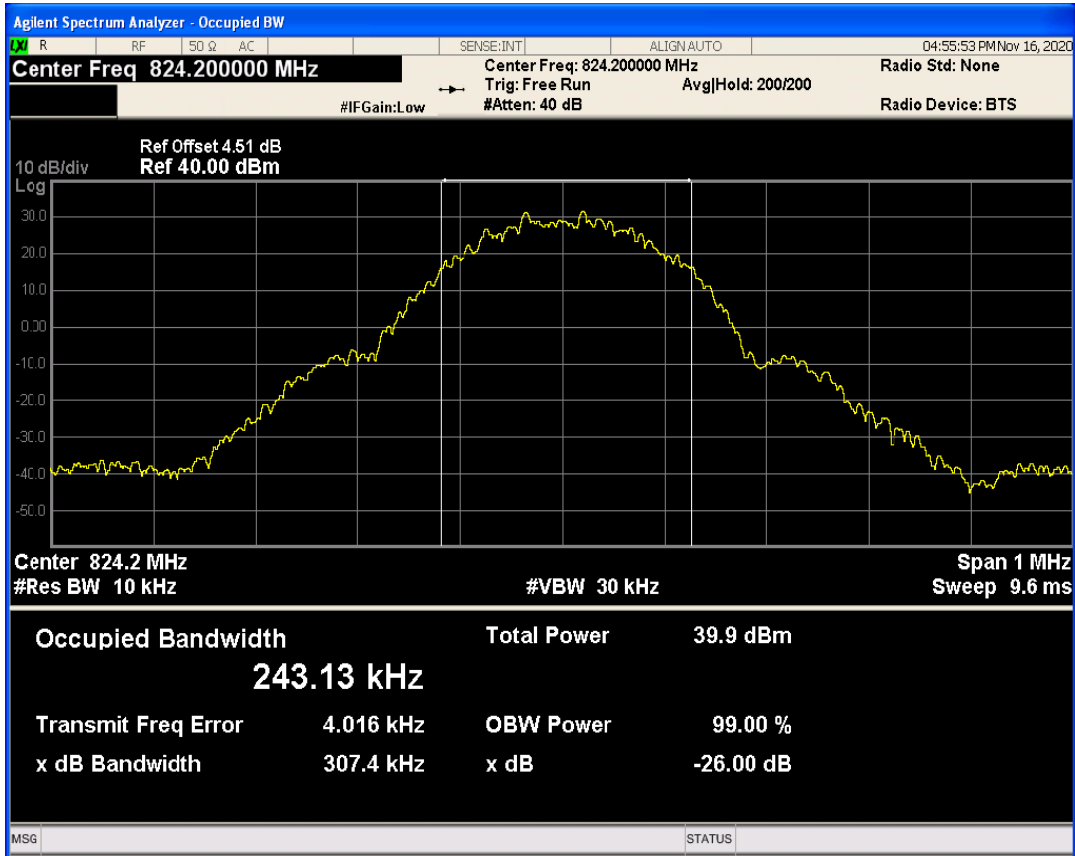


GPRS850 Channel=251

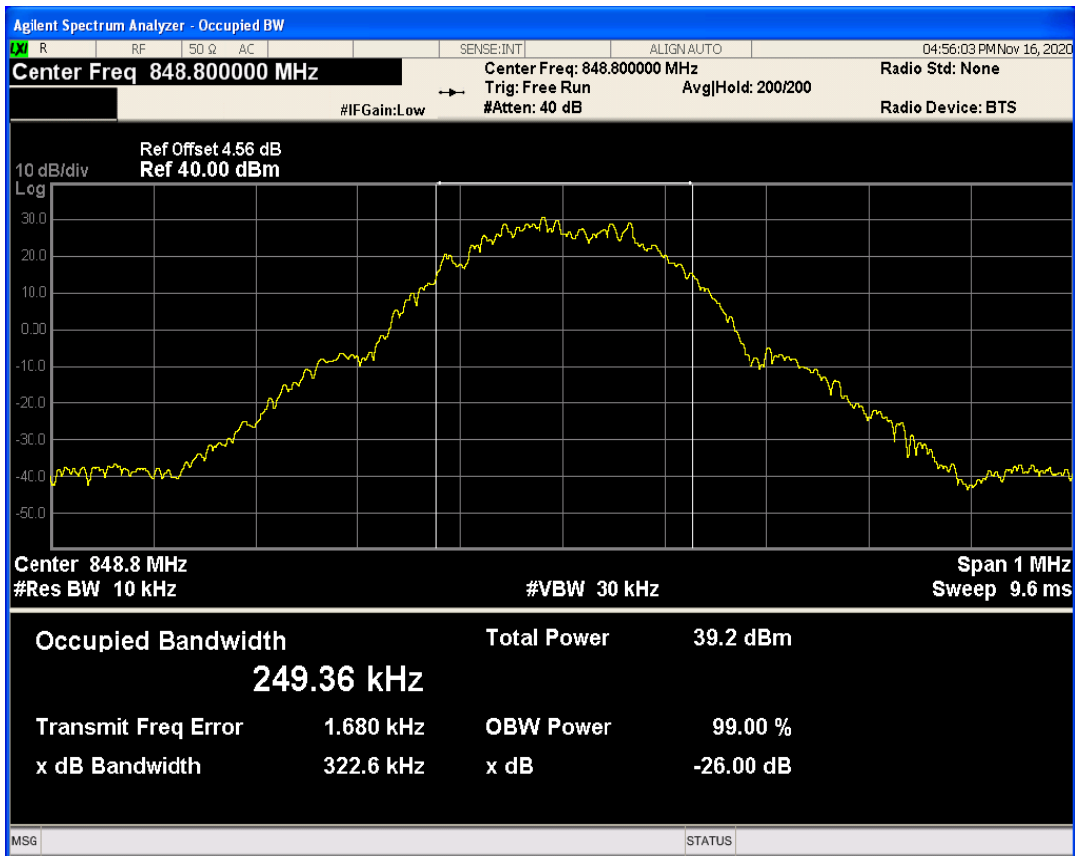


GPRS1900 Channel=661

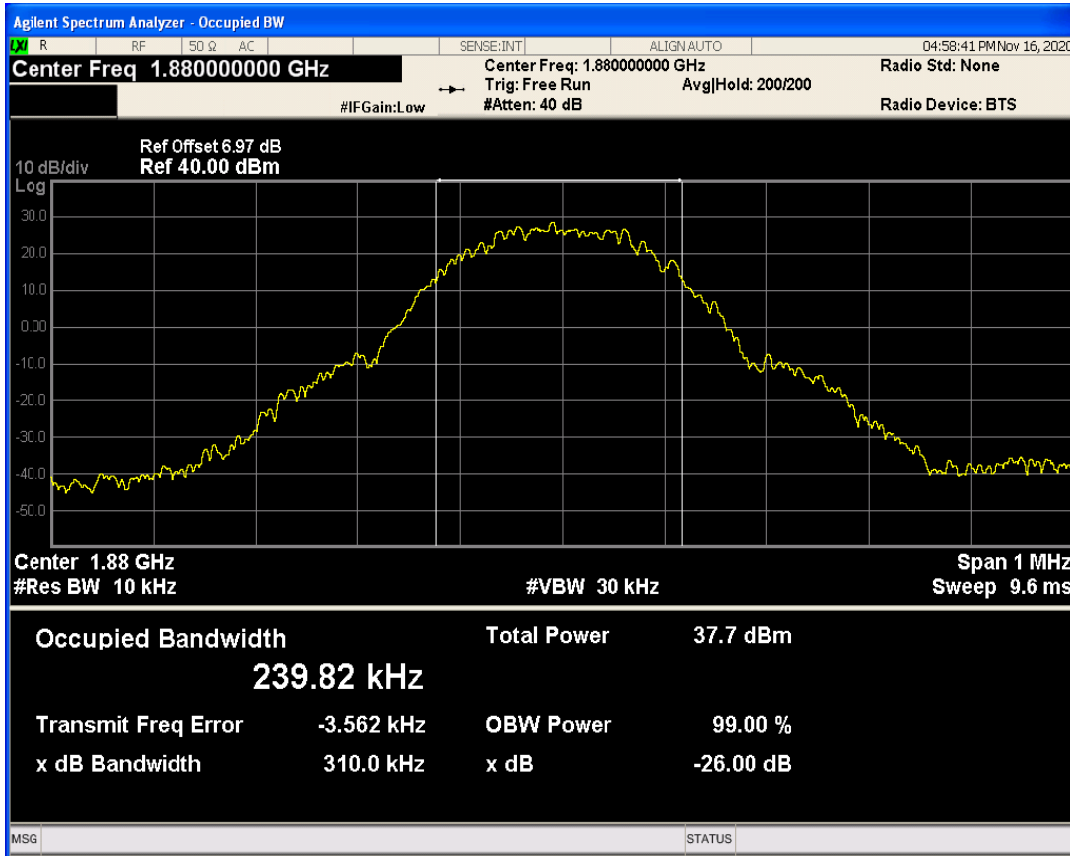


GPRS1900 Channel=512

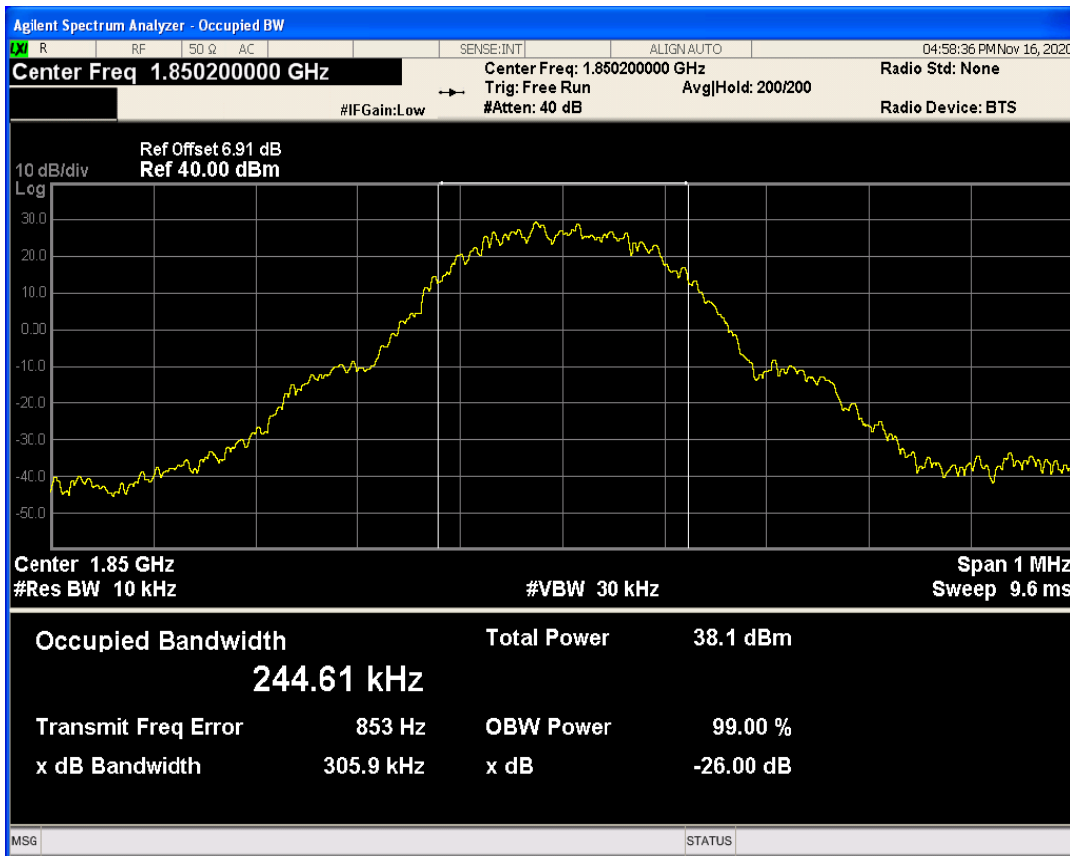


GPRS1900 Channel=810

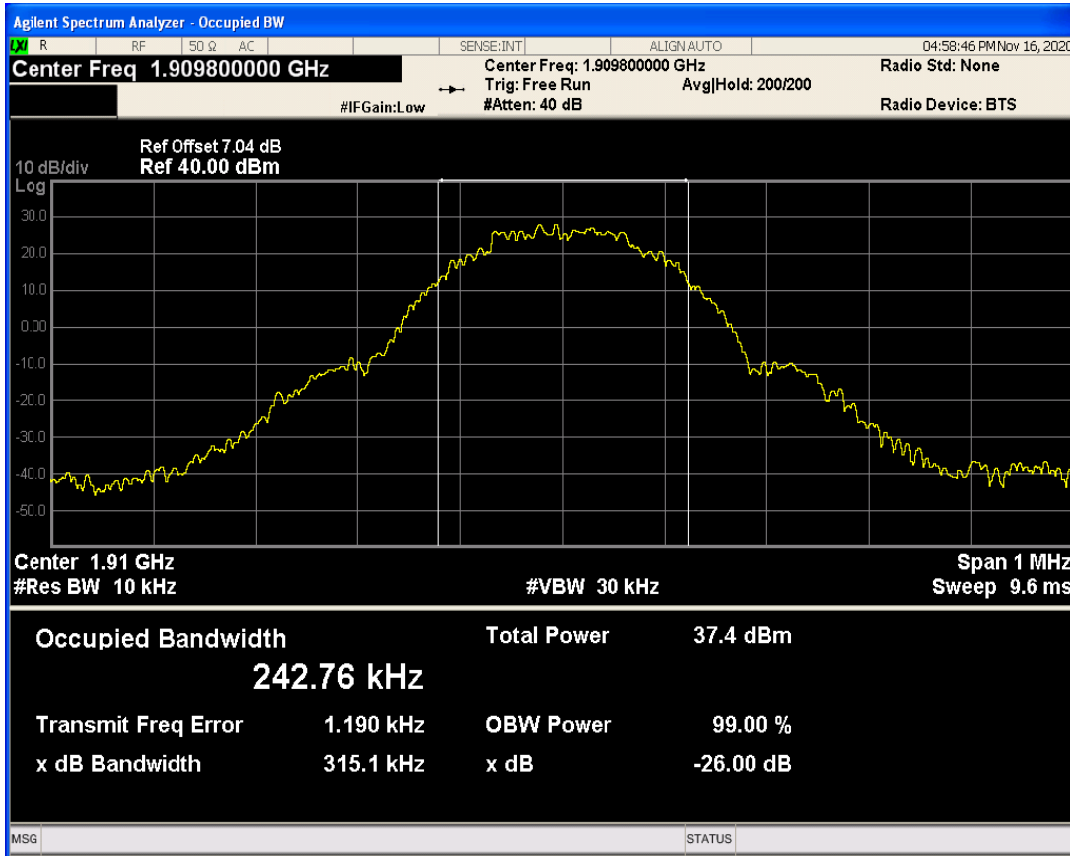


EGPRS850 Channel=128

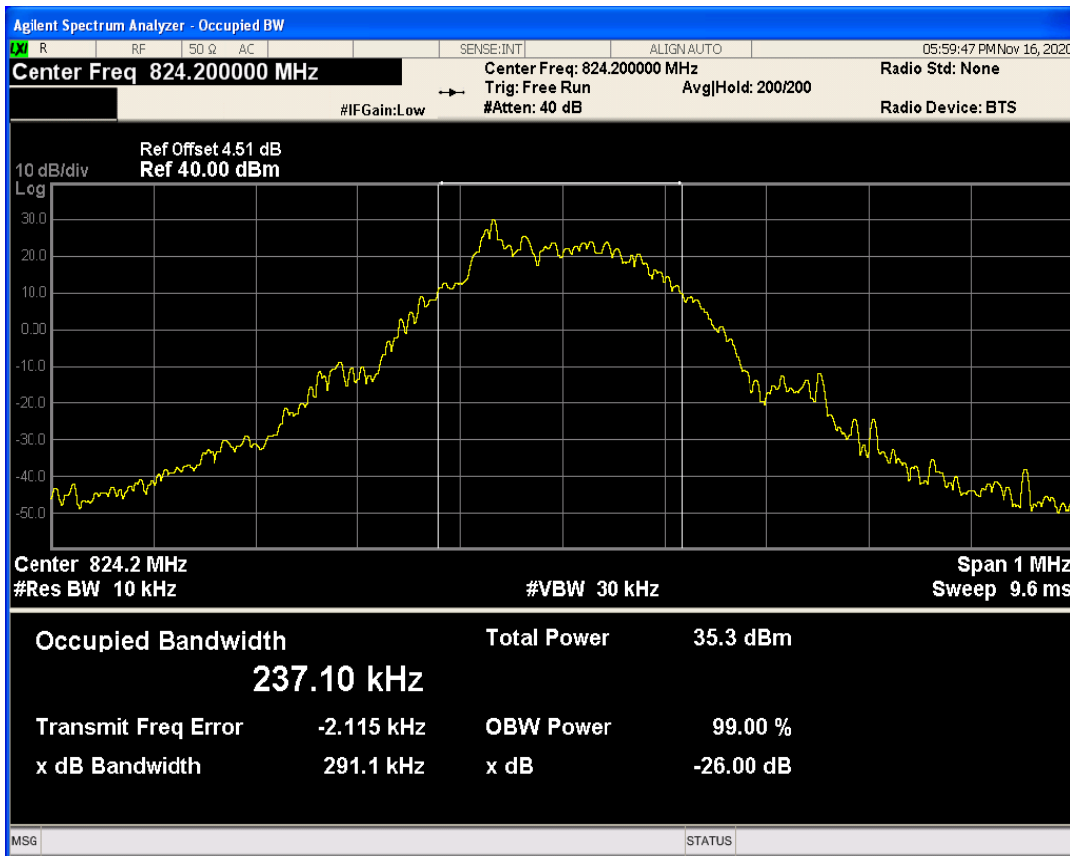


EGPRS850 Channel=189

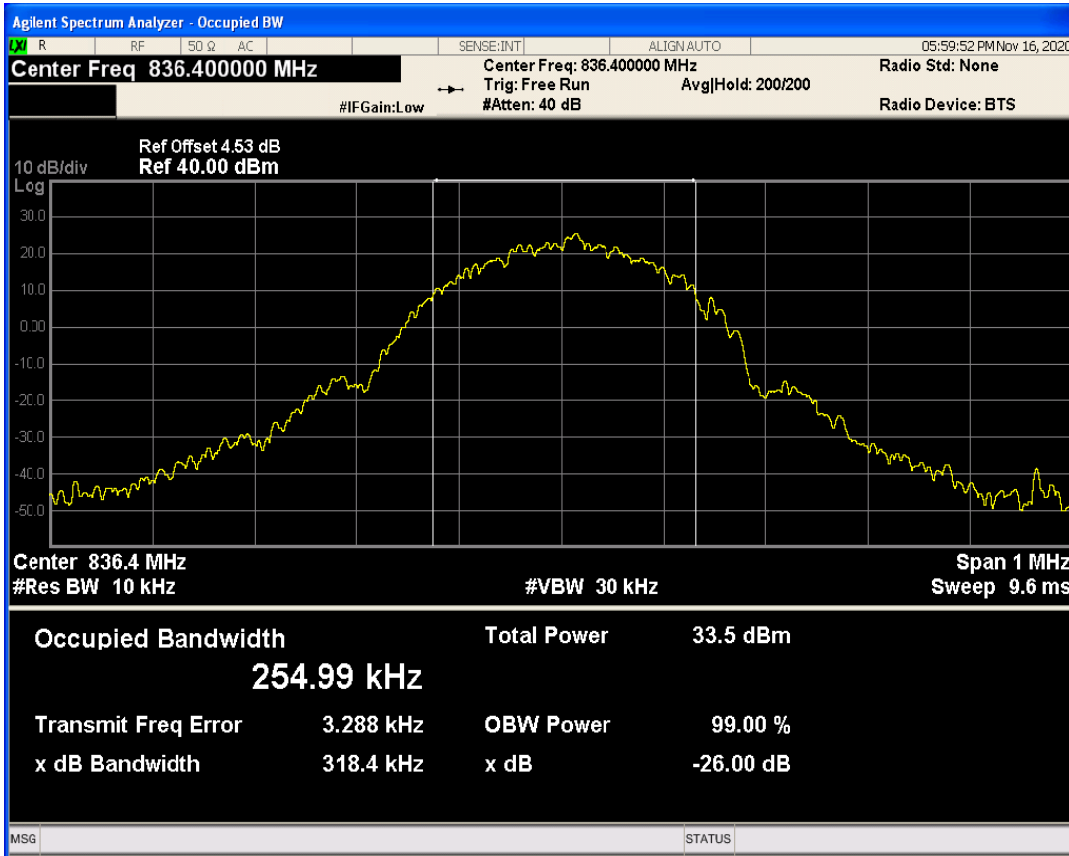


EGPRS850 Channel=251

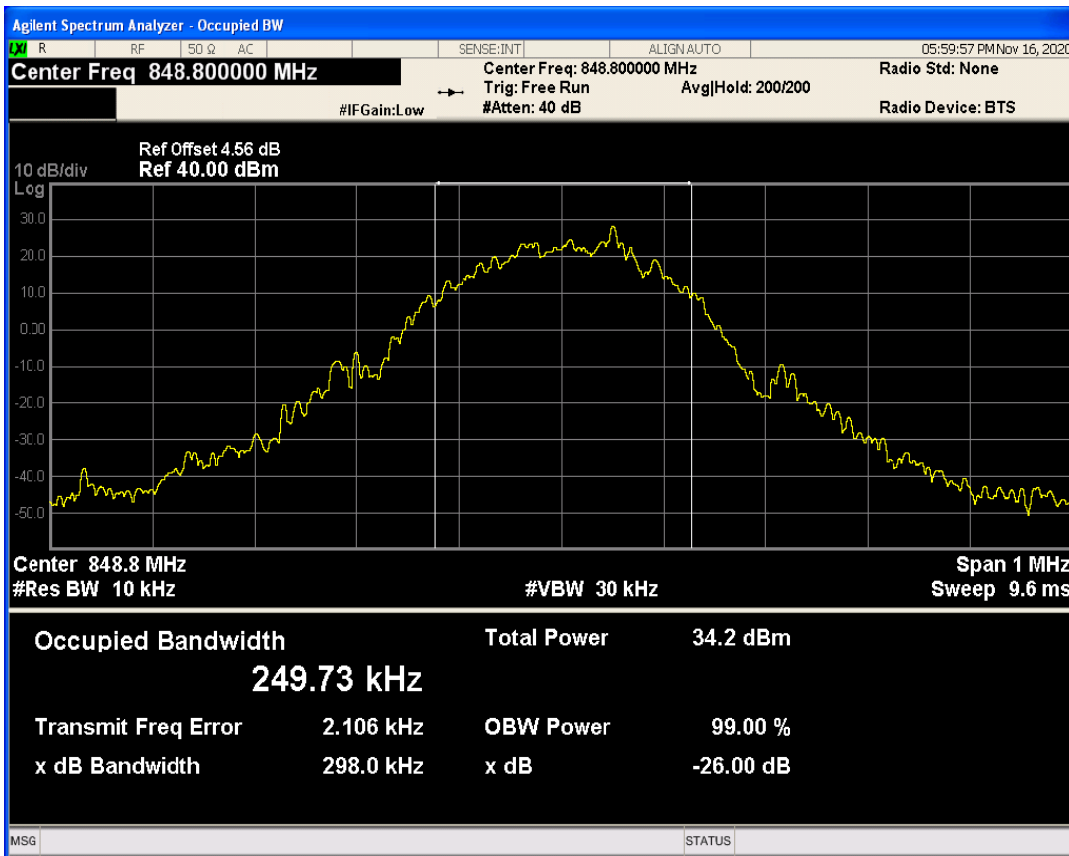


EGPRS1900 Channel=512

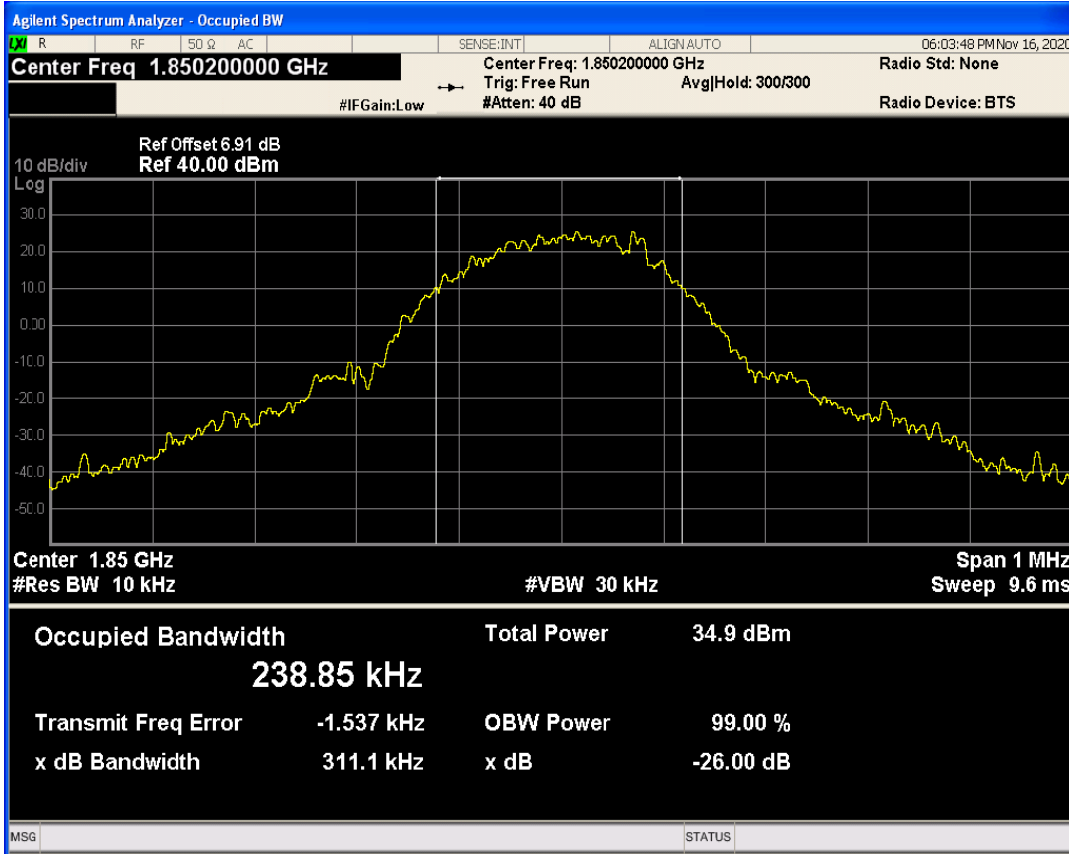


EGPRS1900 Channel=661

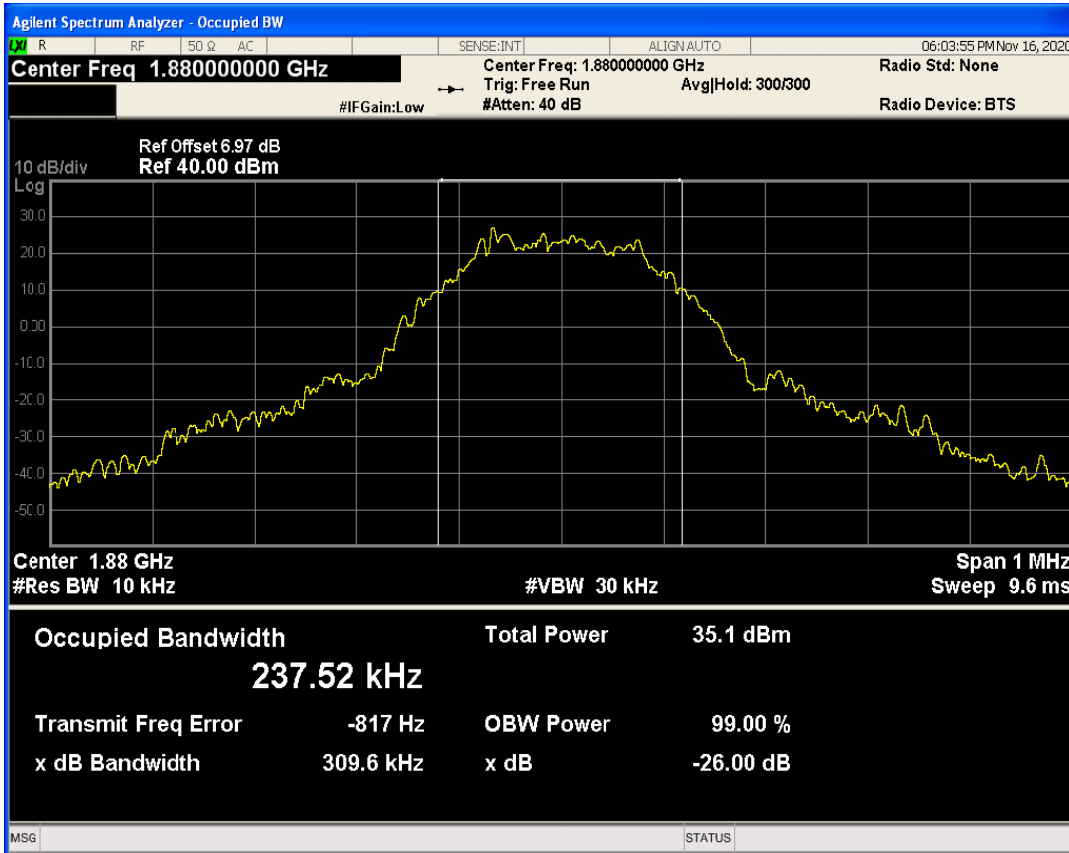


EGPRS1900 Channel=810

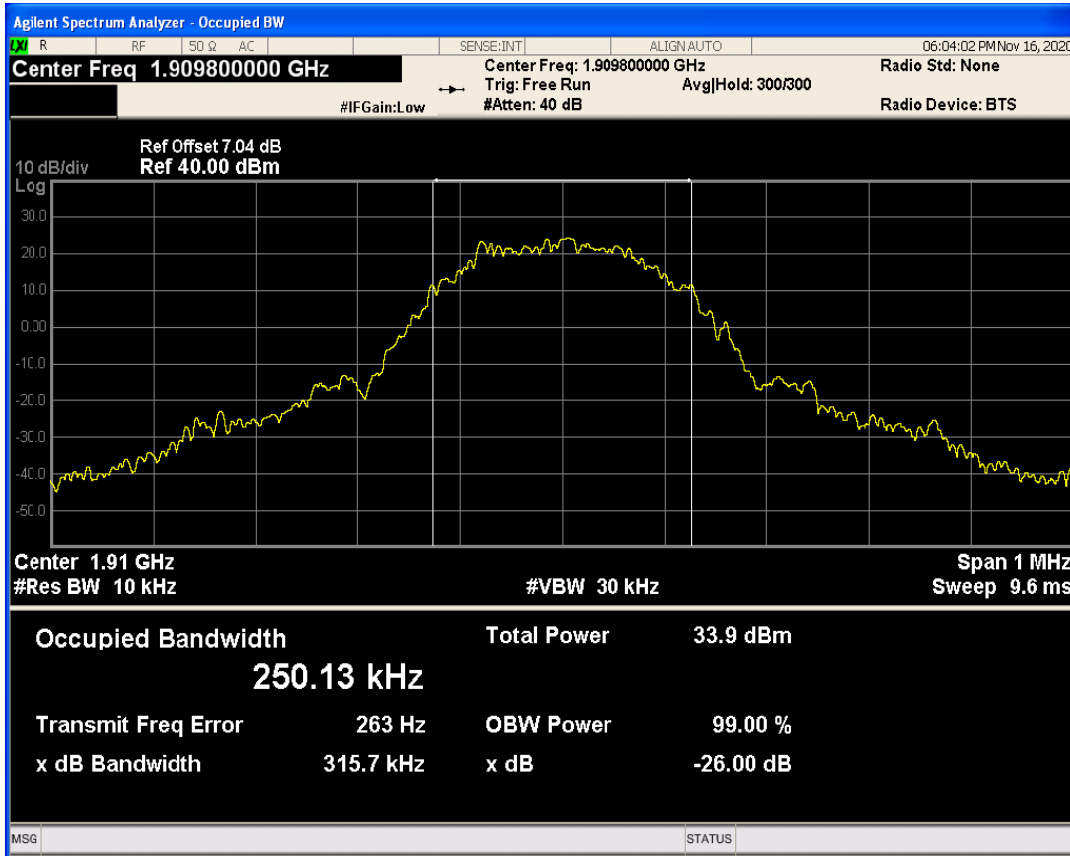


WCDMA Band2 Channel=9400

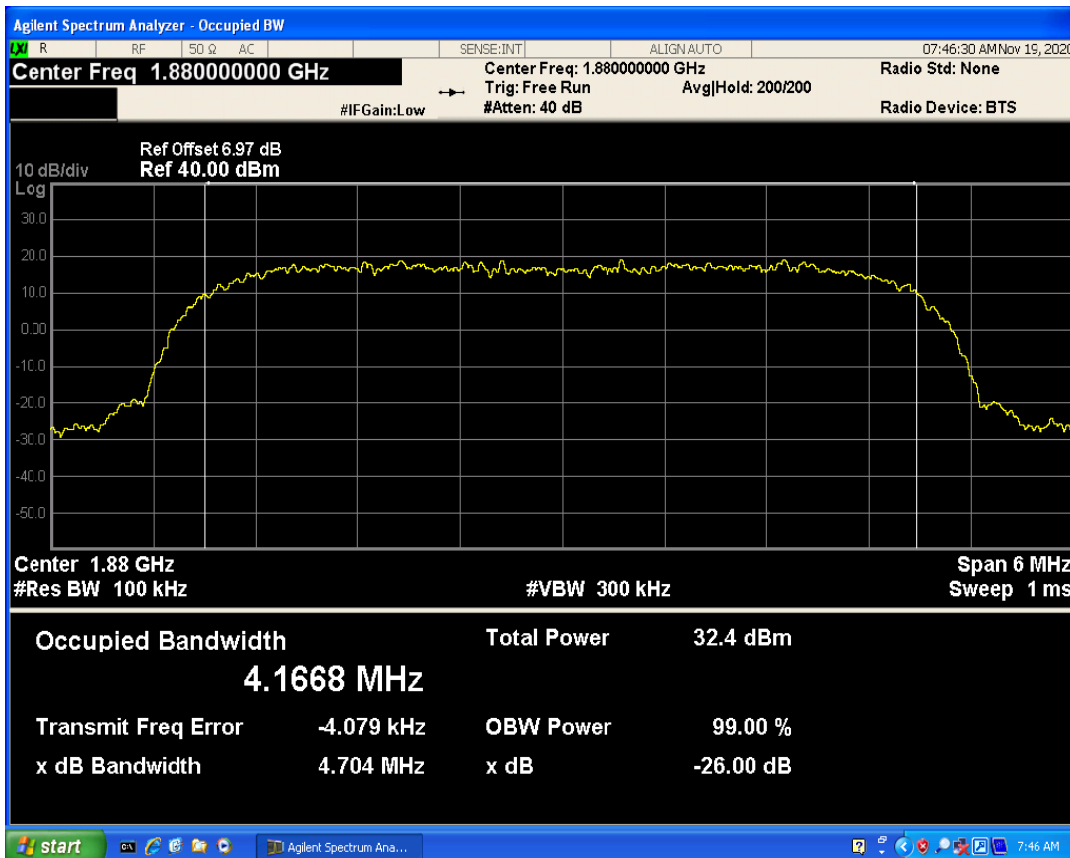


WCDMA Band2 Channel=9262

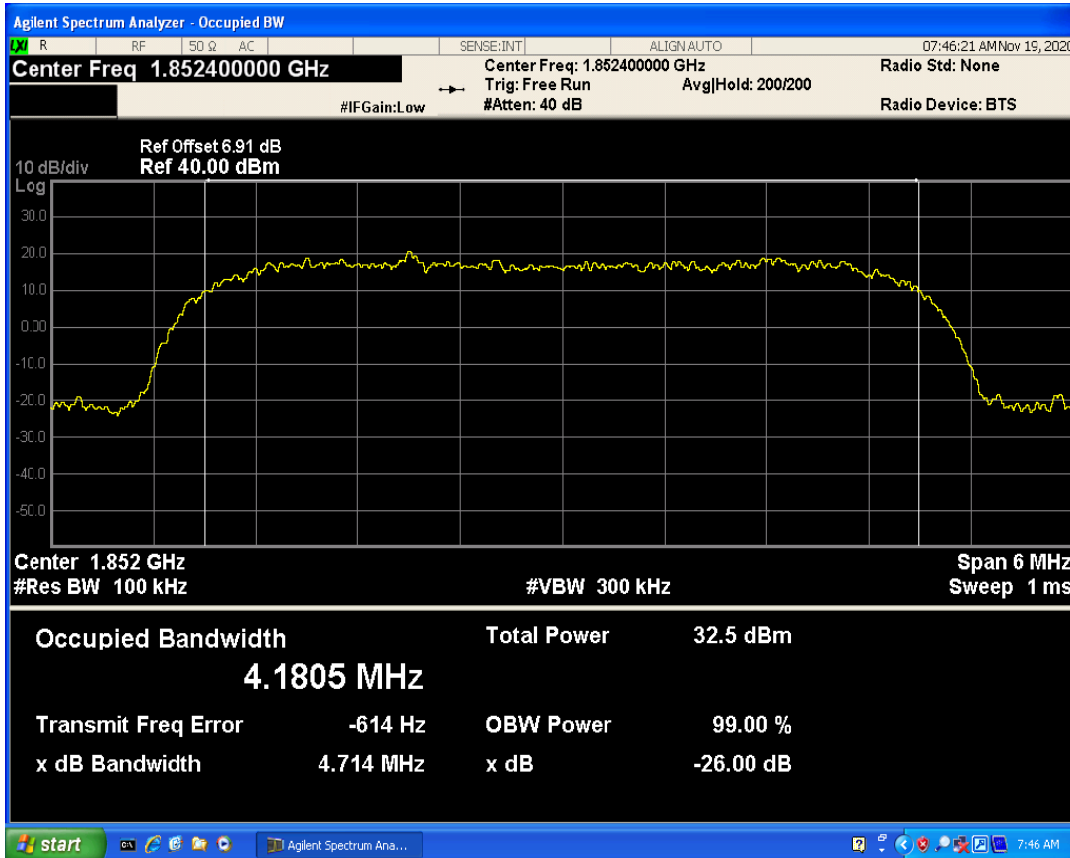


WCDMA Band2 Channel=9538

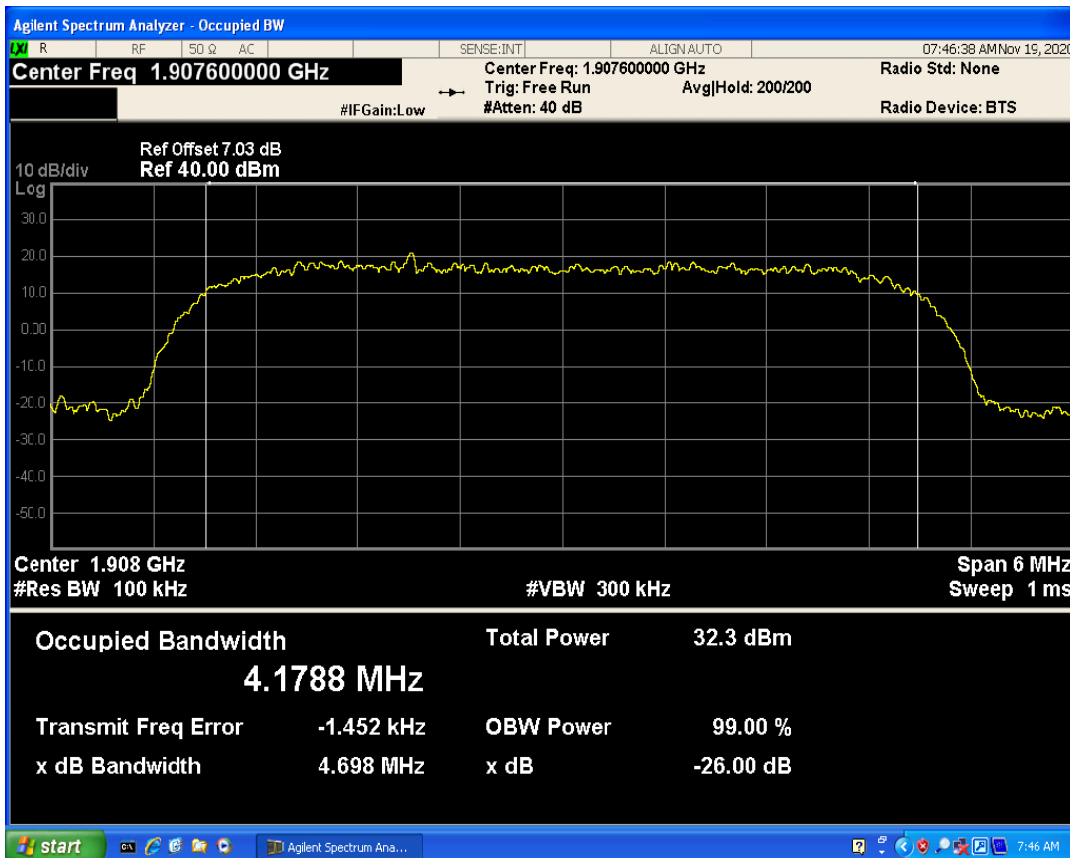


WCDMA Band4 Channel=1312

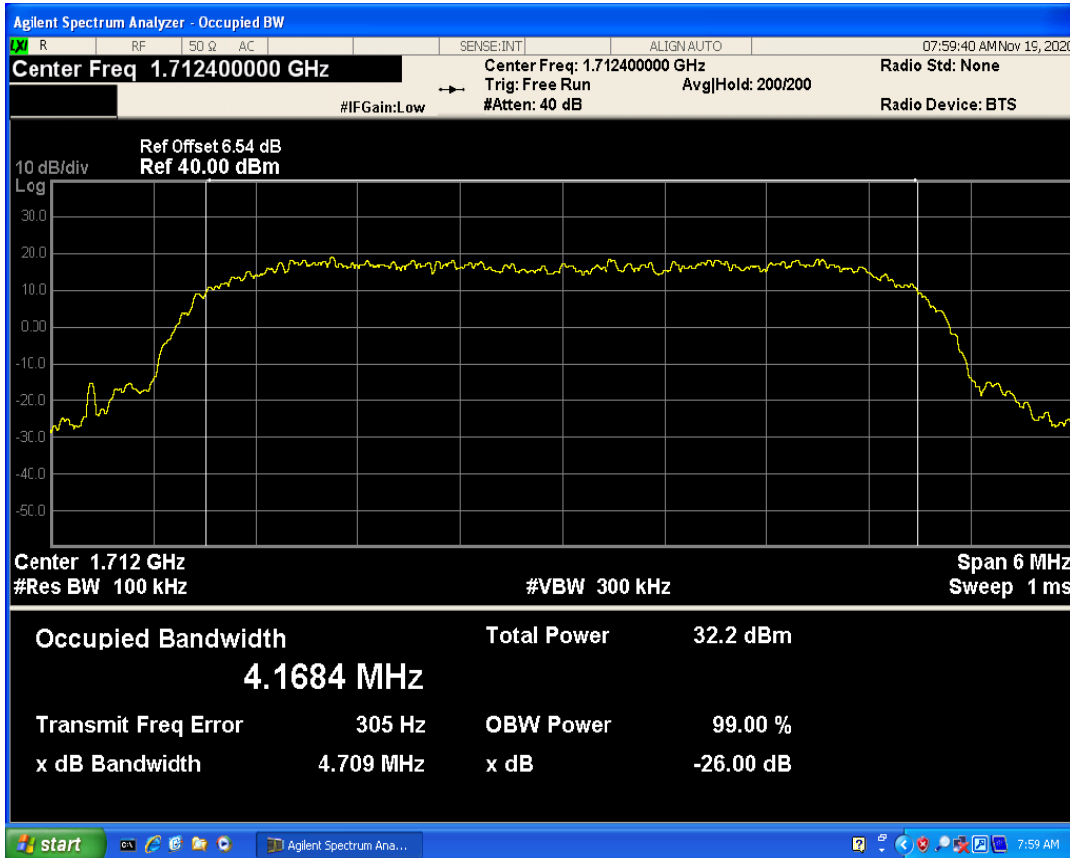


WCDMA Band4 Channel=1412

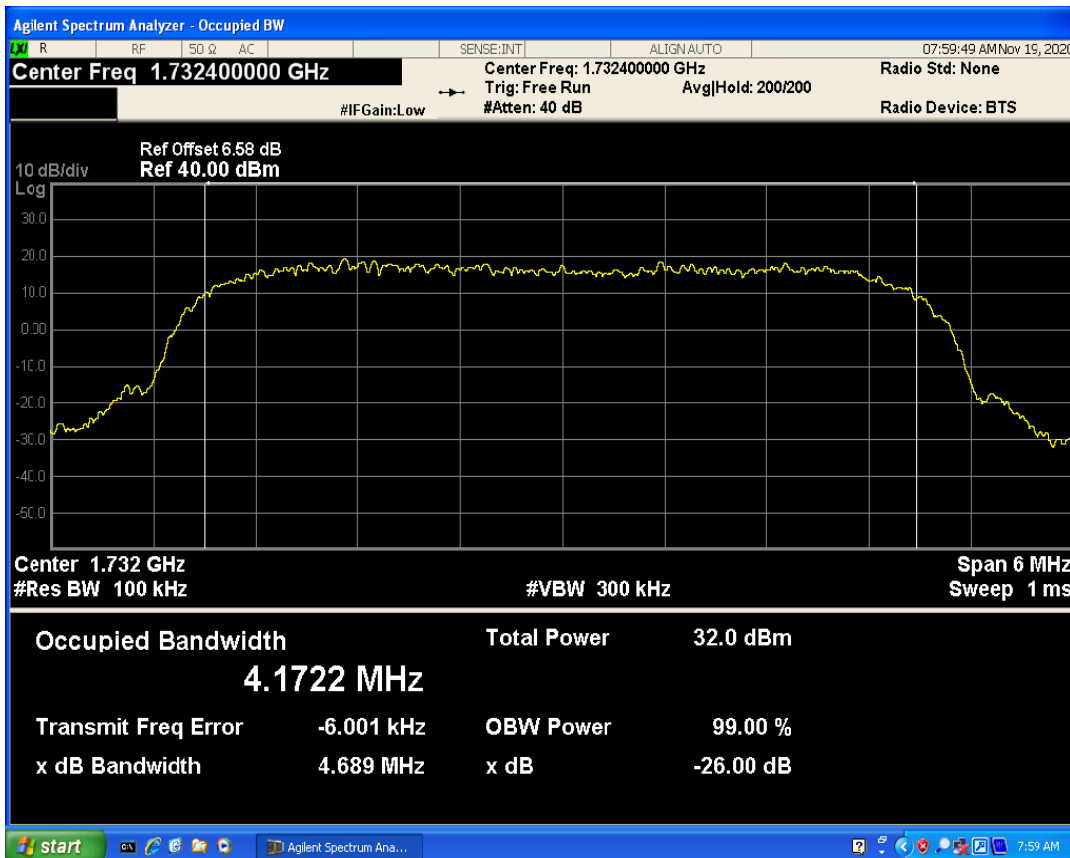


WCDMA Band4 Channel=1513

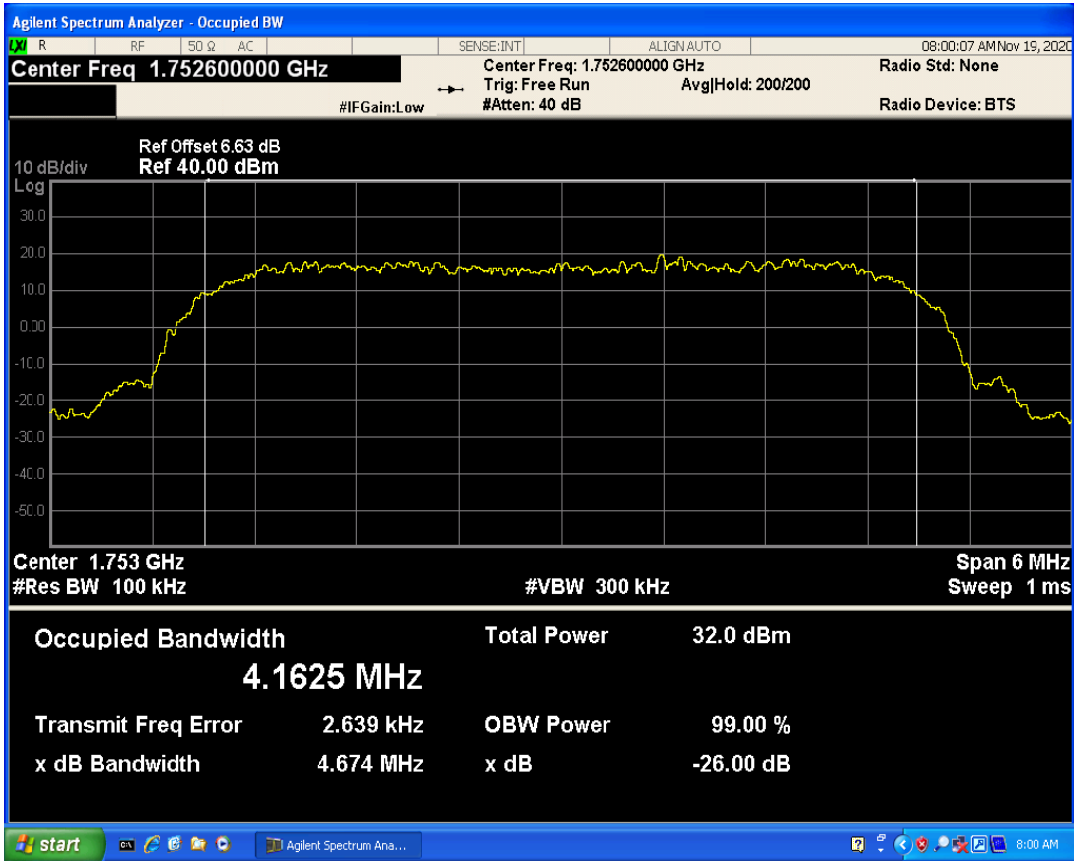


WCDMA Band5 Channel=4132

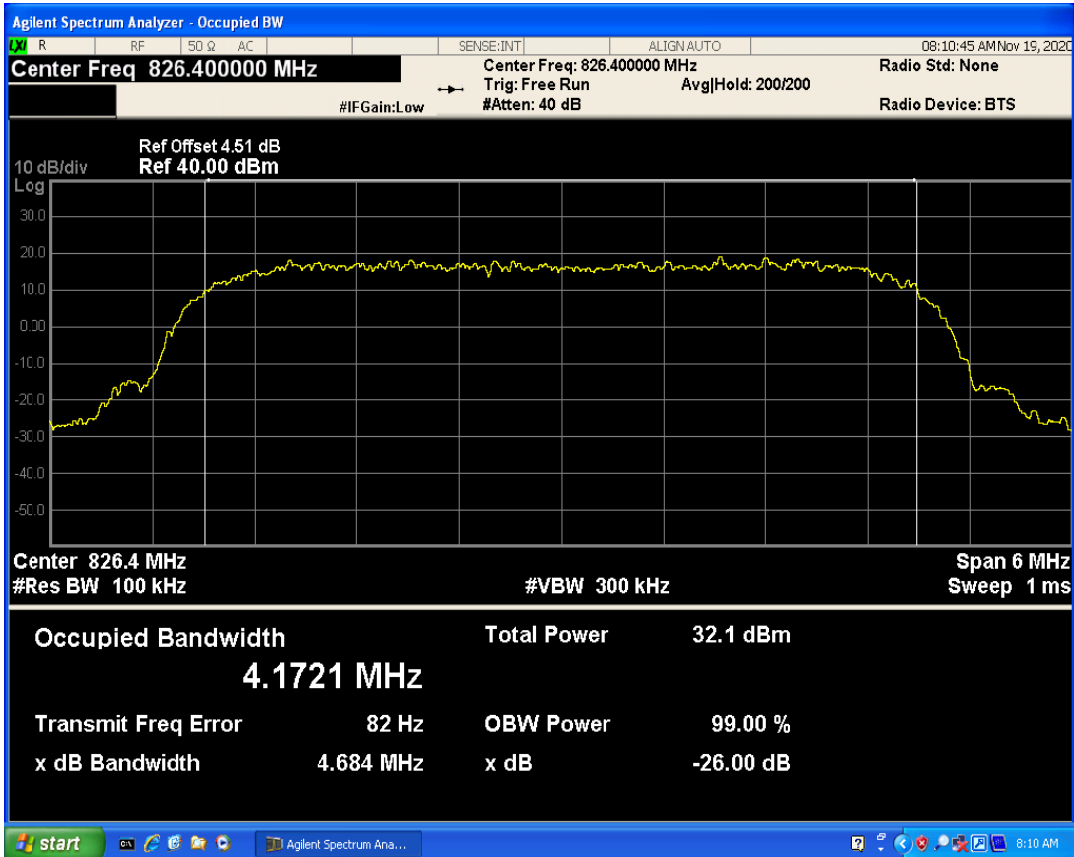


WCDMA Band5 Channel=4233

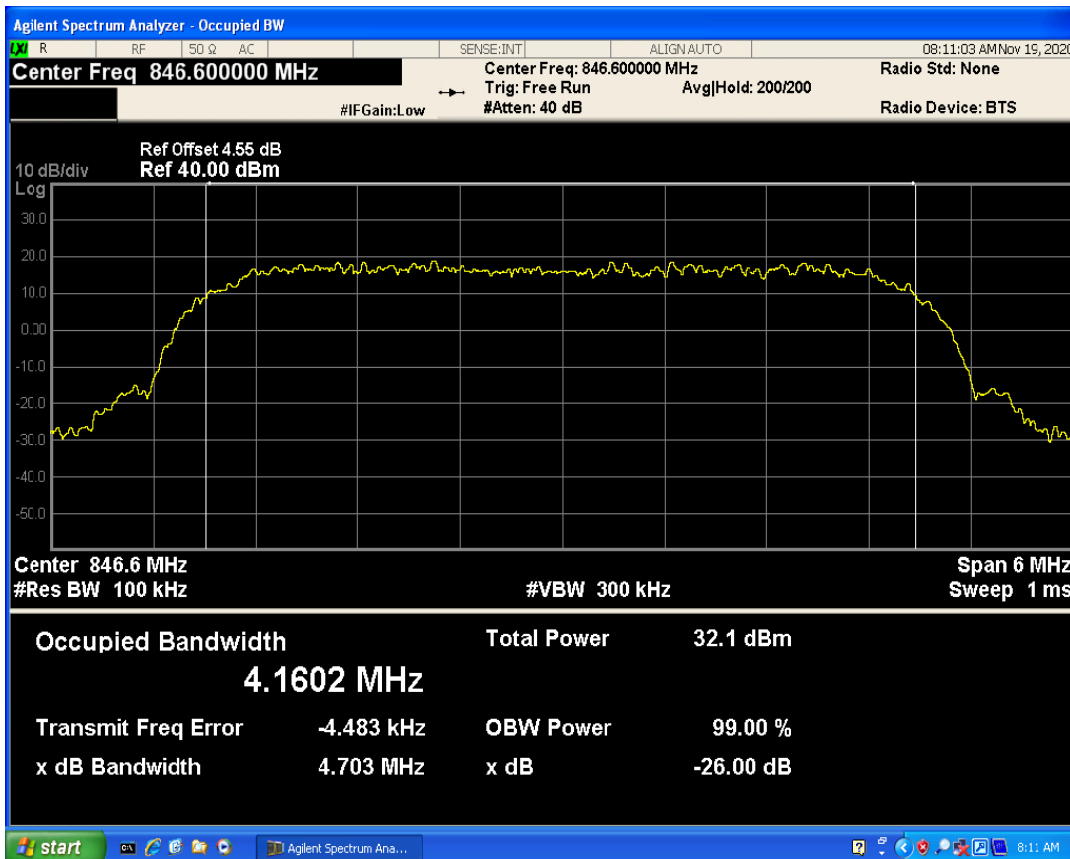


WCDMA Band5 Channel=4182

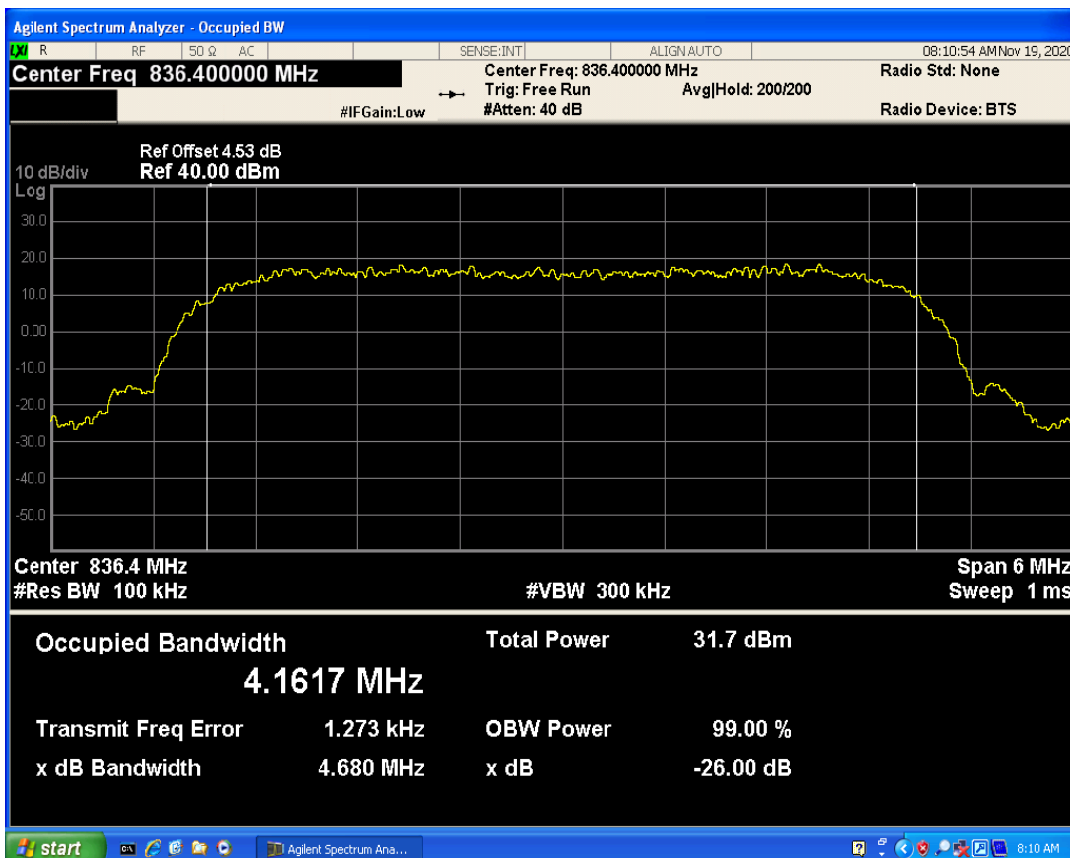


CDMA2000 BC0 1xRTT Channel=1013

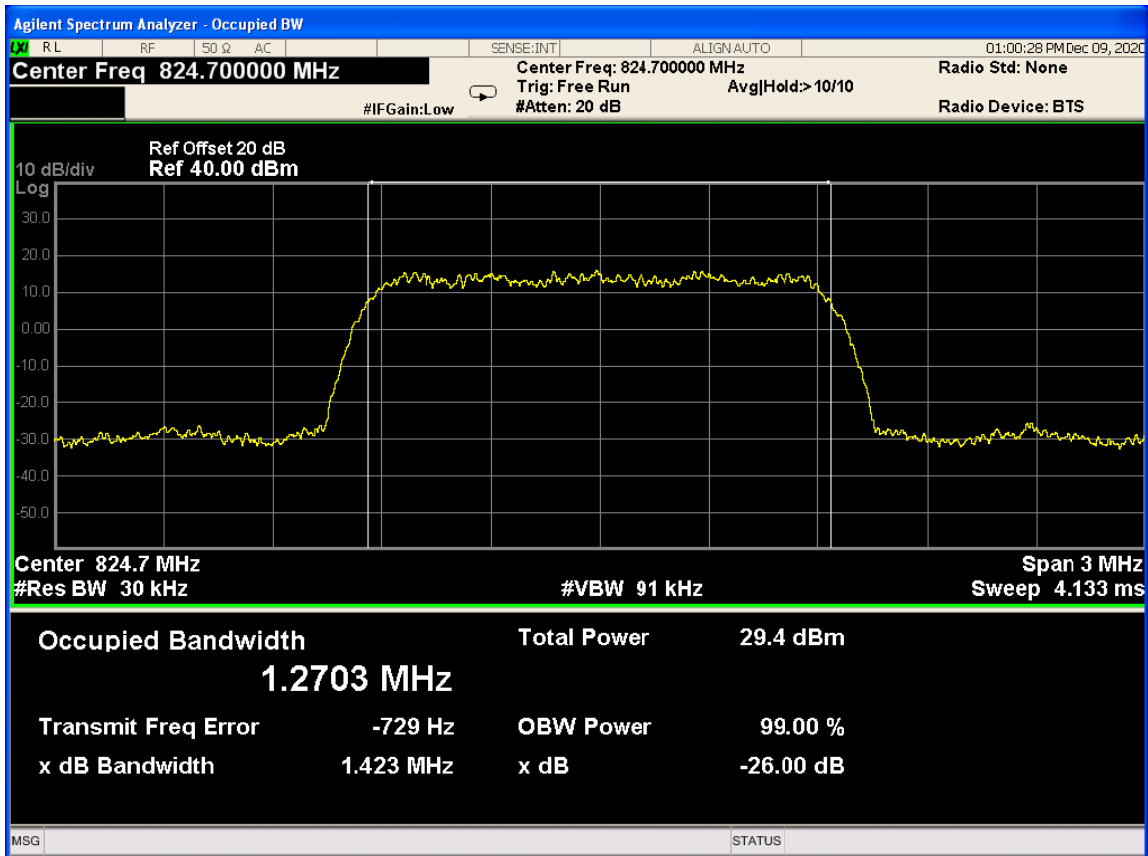


CDMA2000 BC0 1xRTT Channel=384

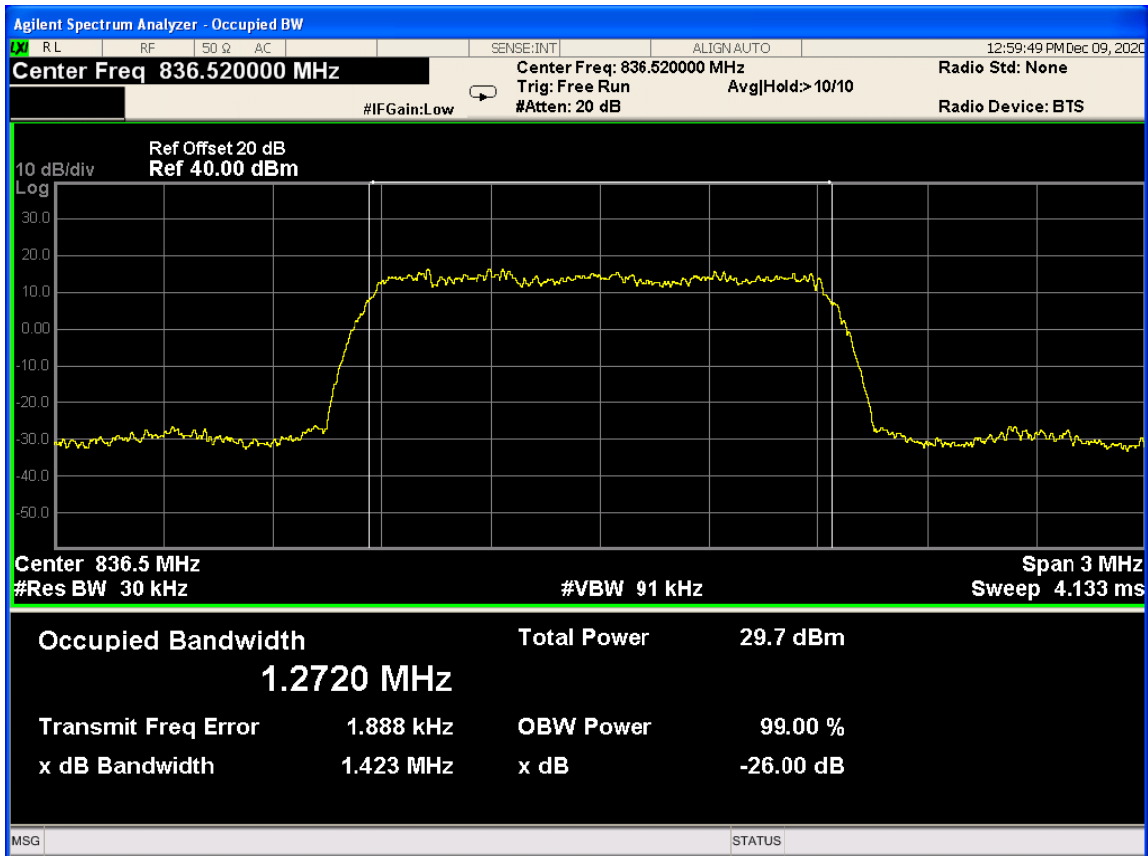


CDMA2000 BC0 1xRTT Channel=777

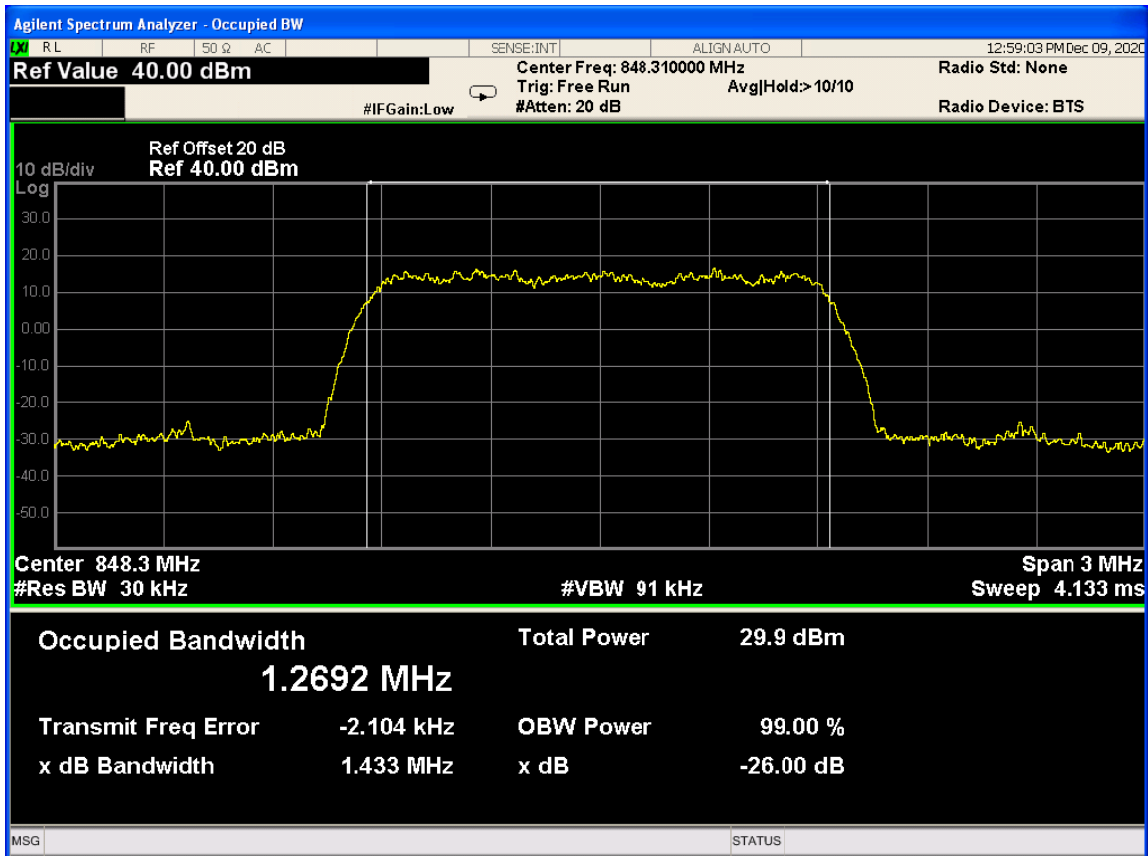


CDMA2000 BC0 1xEV-Do Rel.A Channel=1013

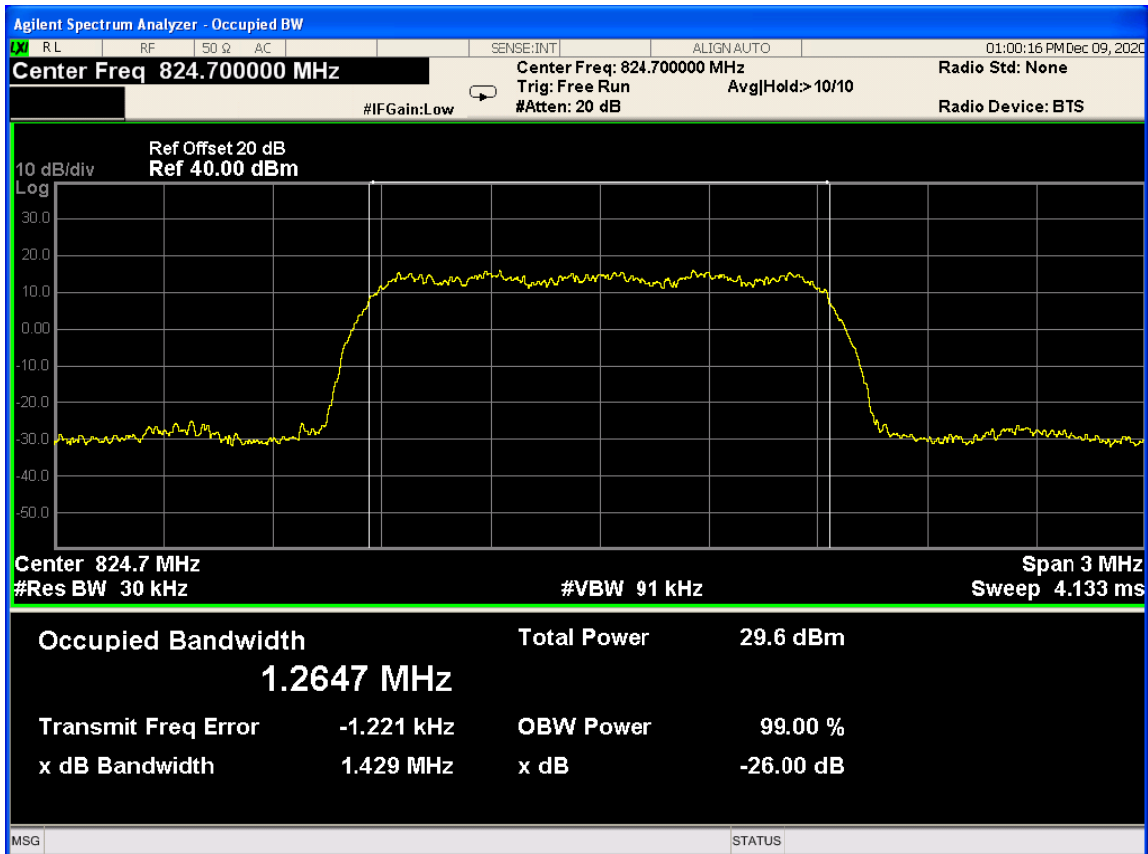


CDMA2000 BC0 1xEV-Do Rel.A Channel=384

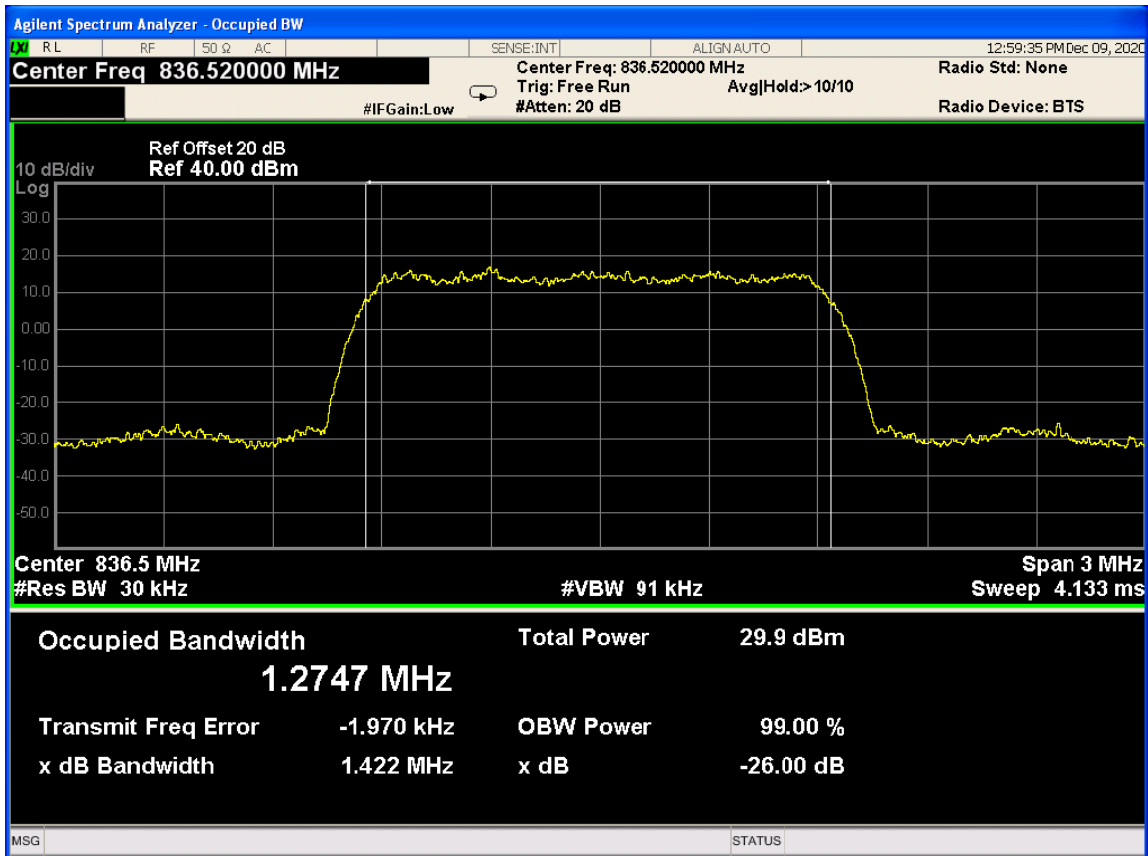


CDMA2000 BC0 1xEV-Do Rel.A Channel=777

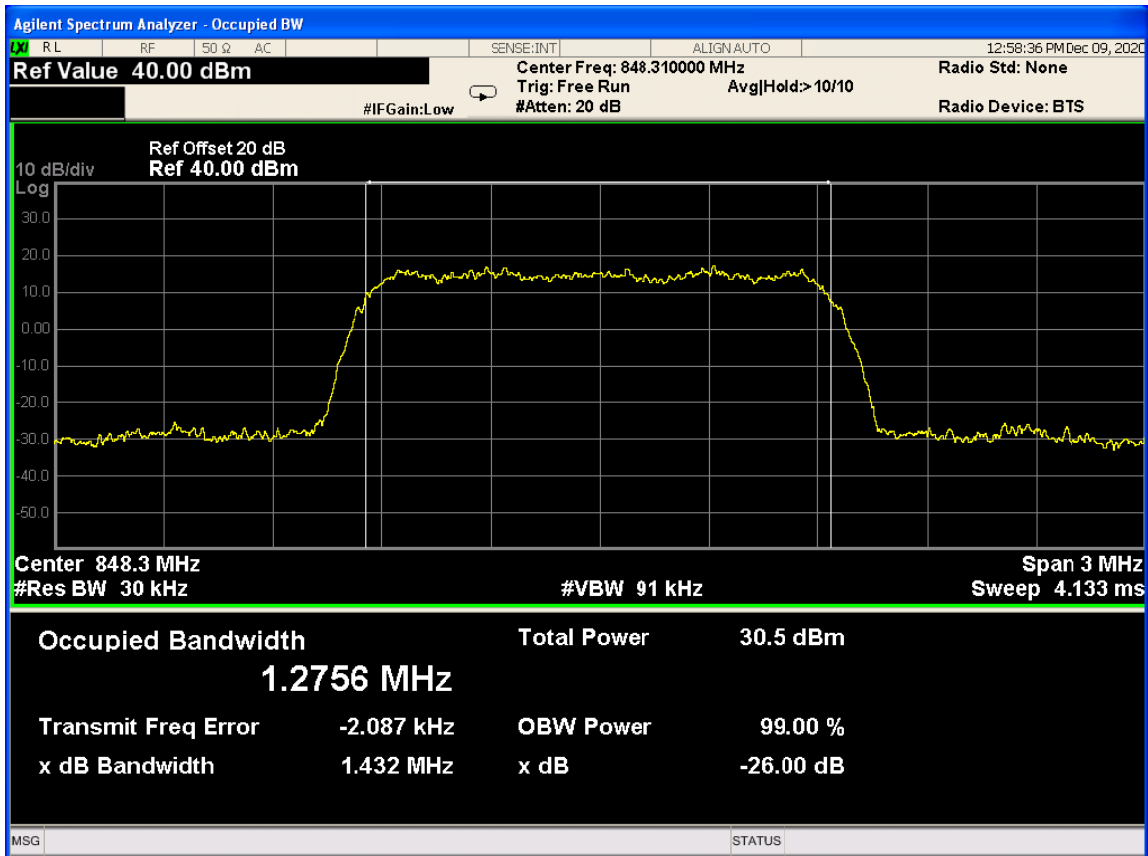


CDMA2000 BC1 1xRTT Channel=25

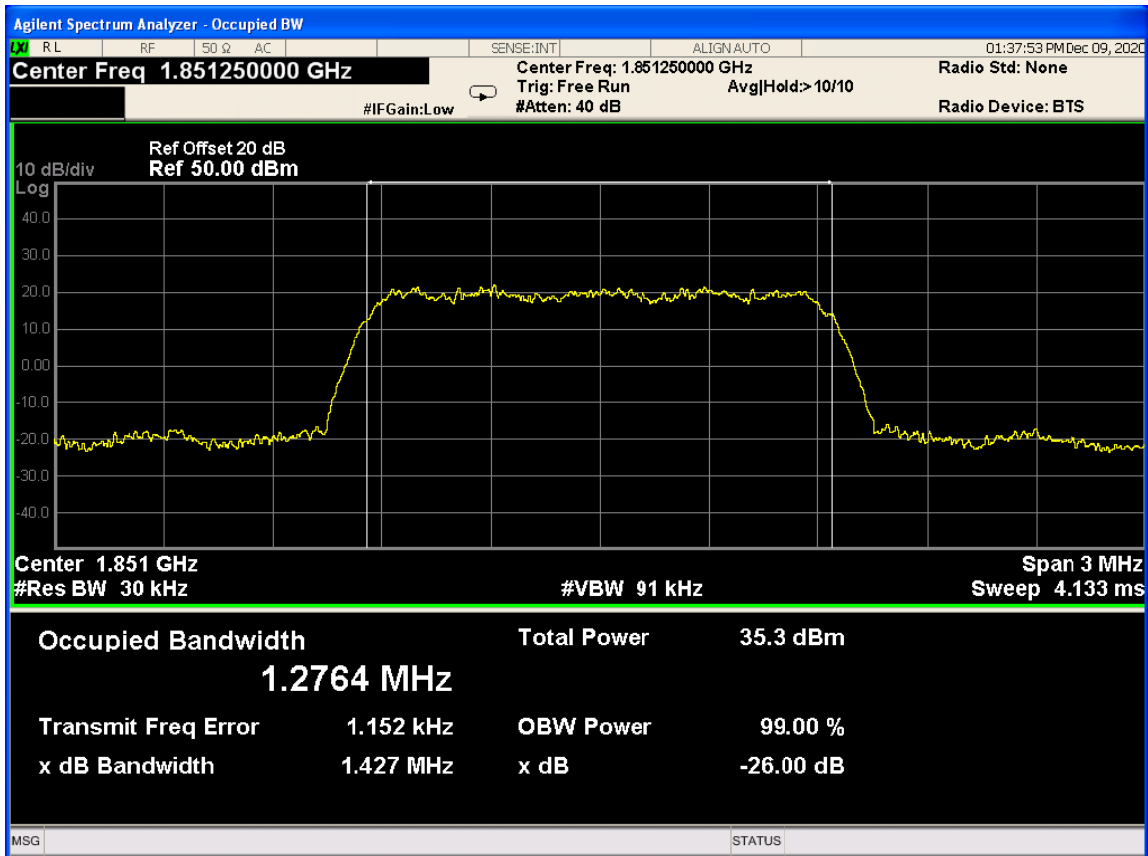


CDMA2000 BC1 1xRTT Channel=600

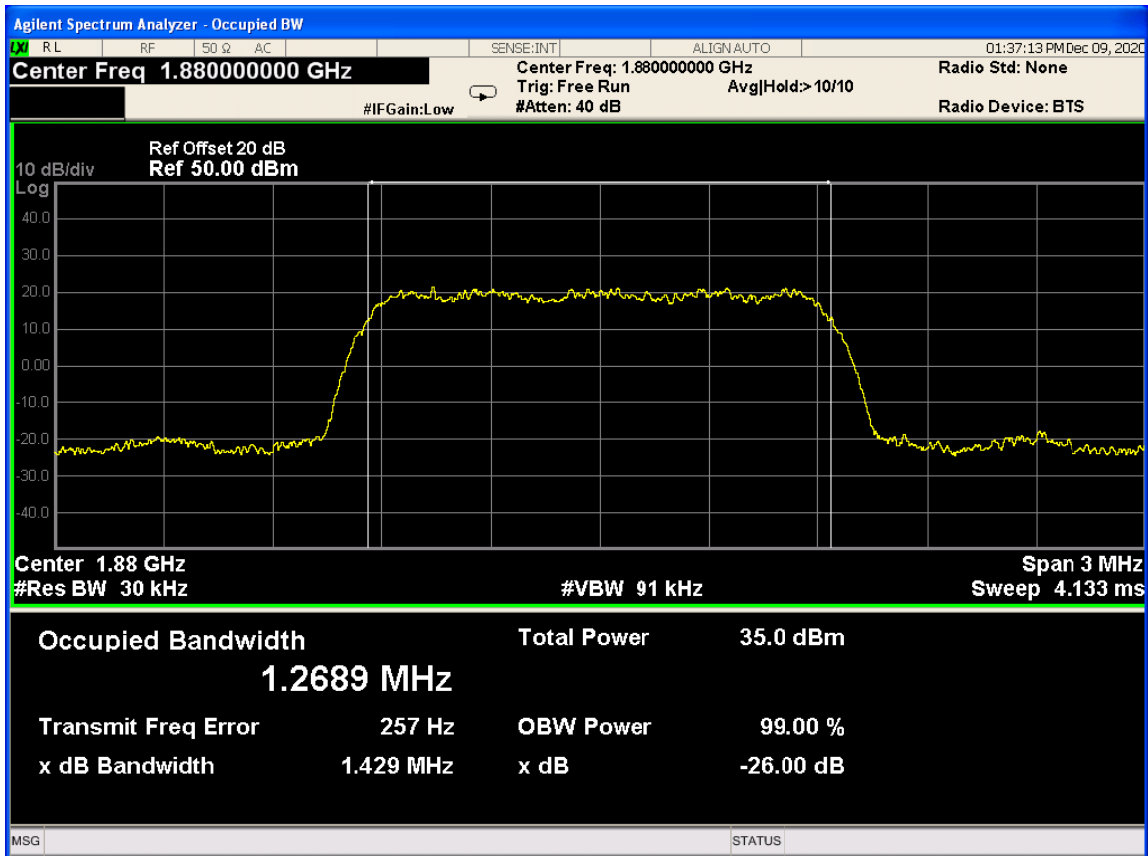


CDMA2000 BC1 1xRTT Channel=1175

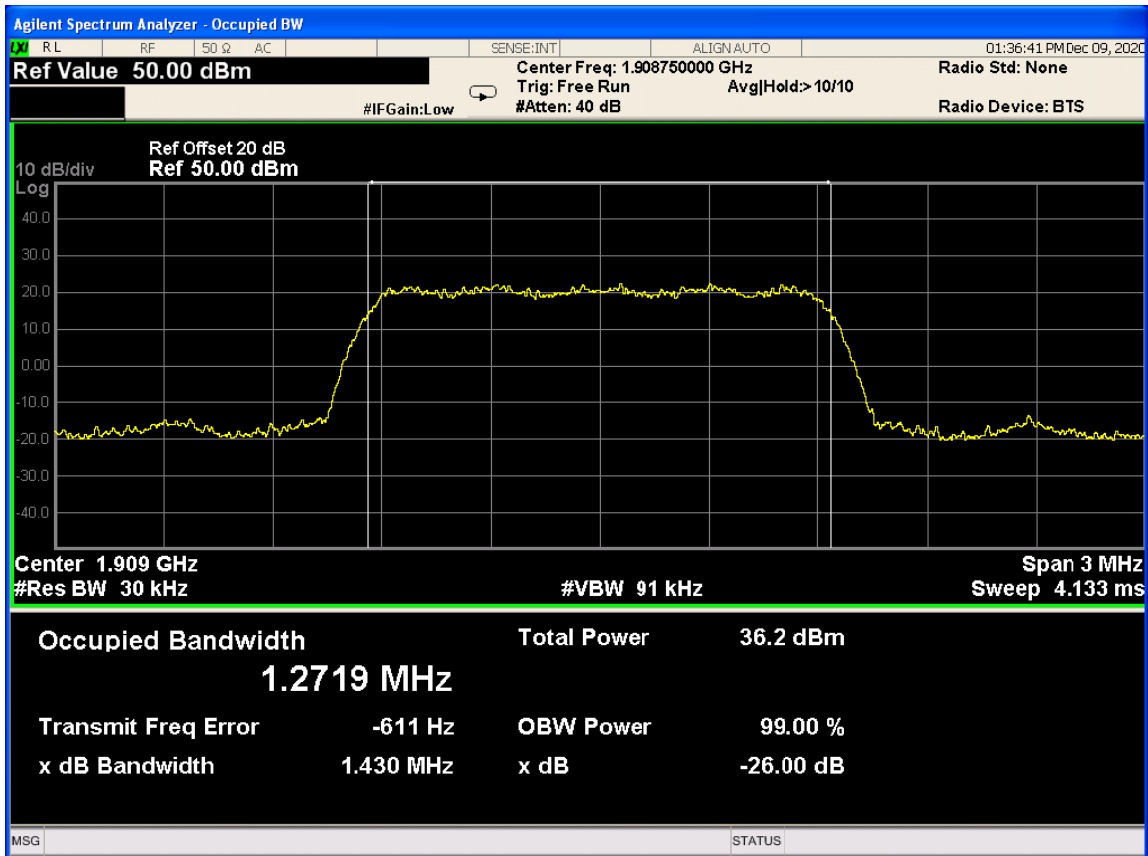


CDMA2000 BC1 1xEV-Do Rel.A Channel=25

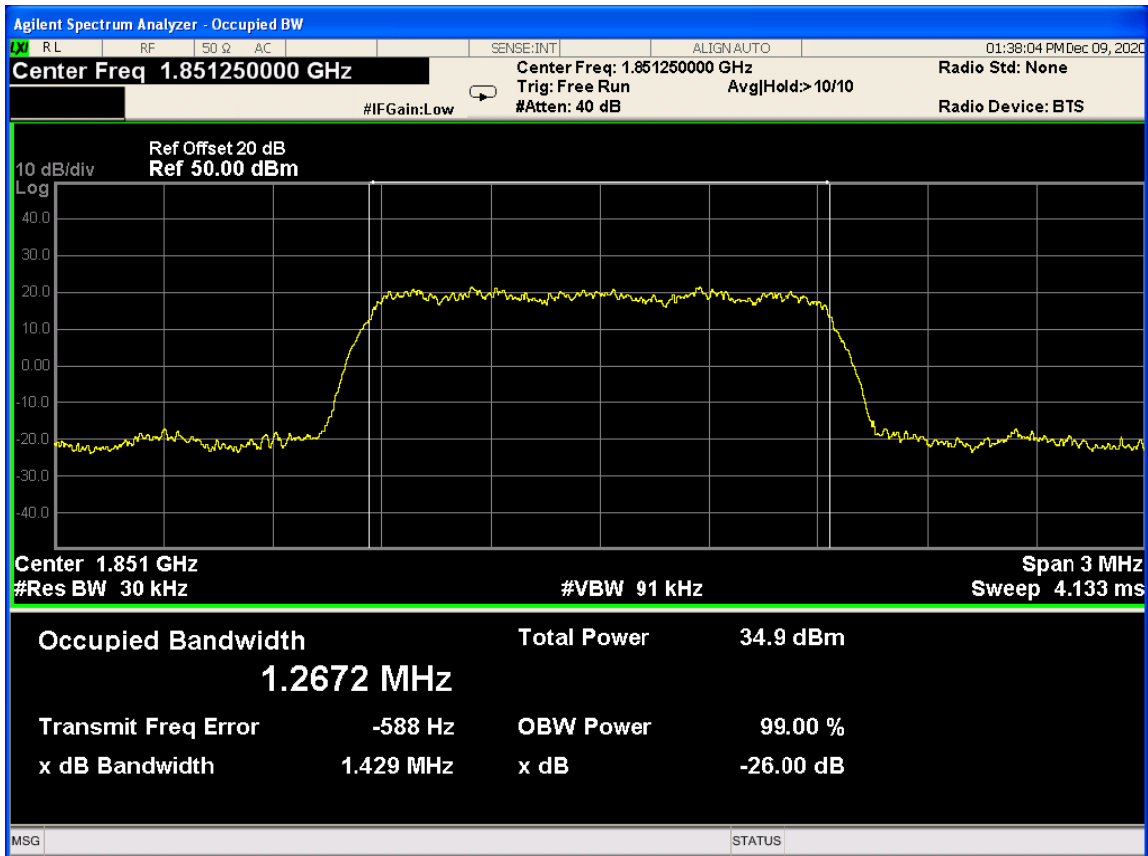


CDMA2000 BC1 1xEV-Do Rel.A Channel=600

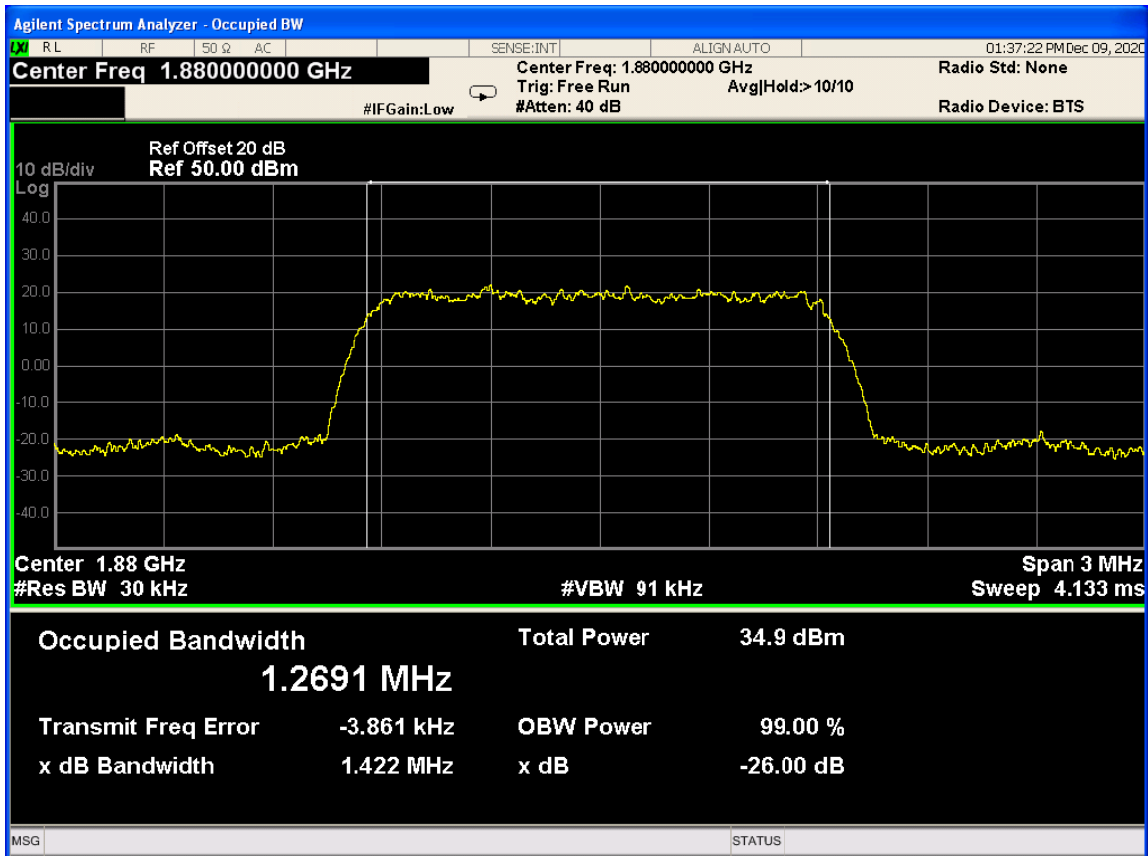


CDMA2000 BC1 1xEV-Do Rel.A Channel=1175

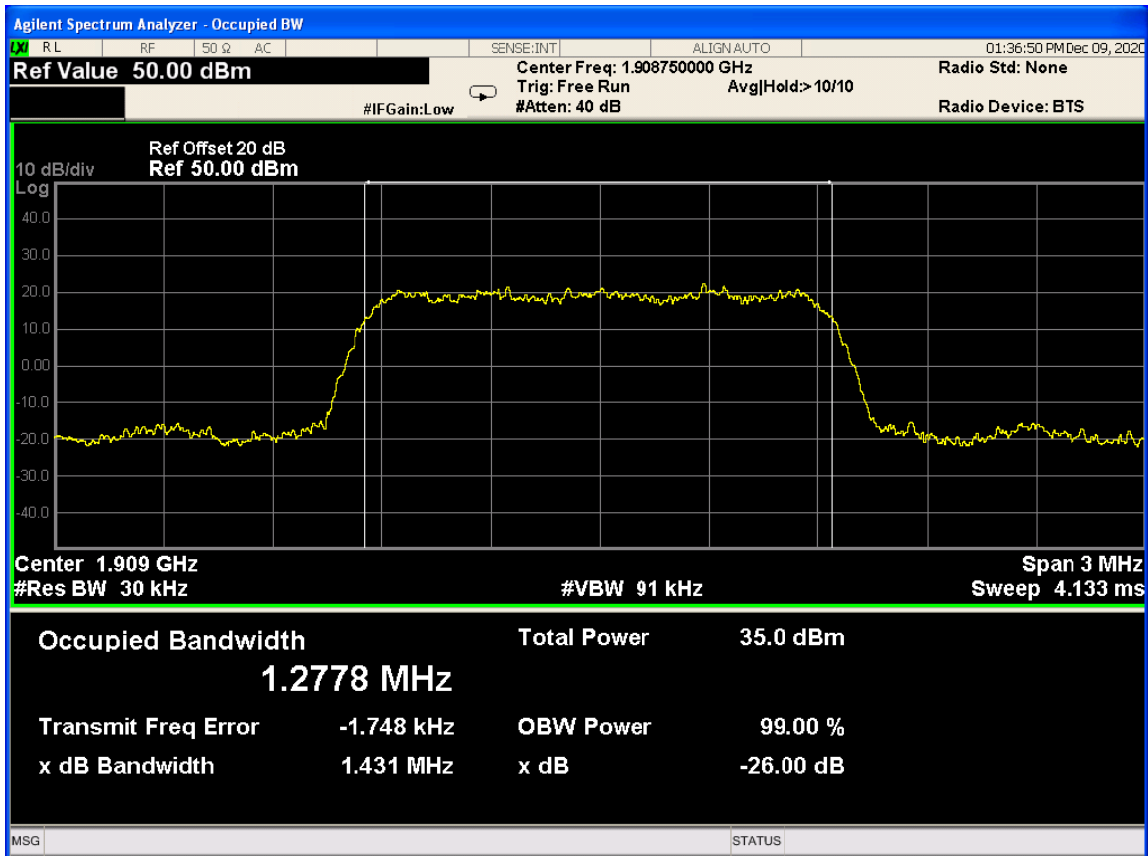


CDMA2000 BC10 1xRTT Channel=450

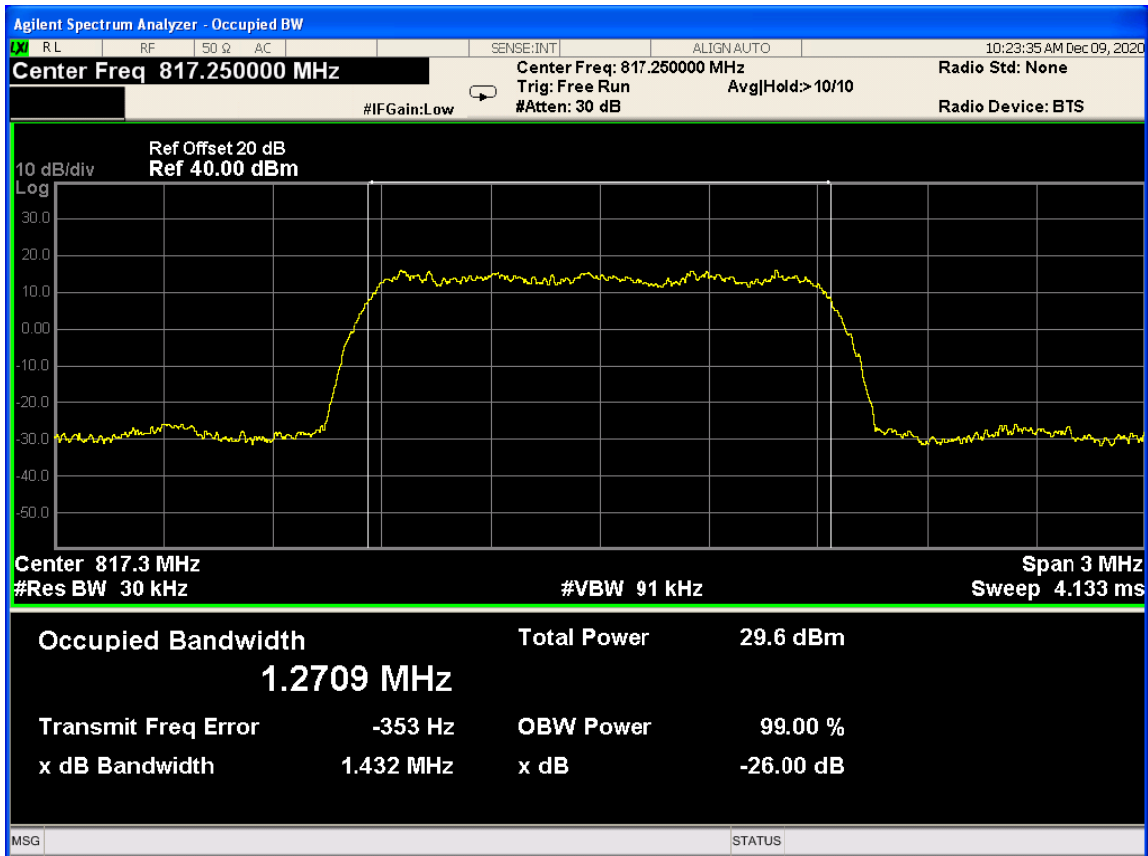


CDMA2000 BC10 1xRTT Channel=560

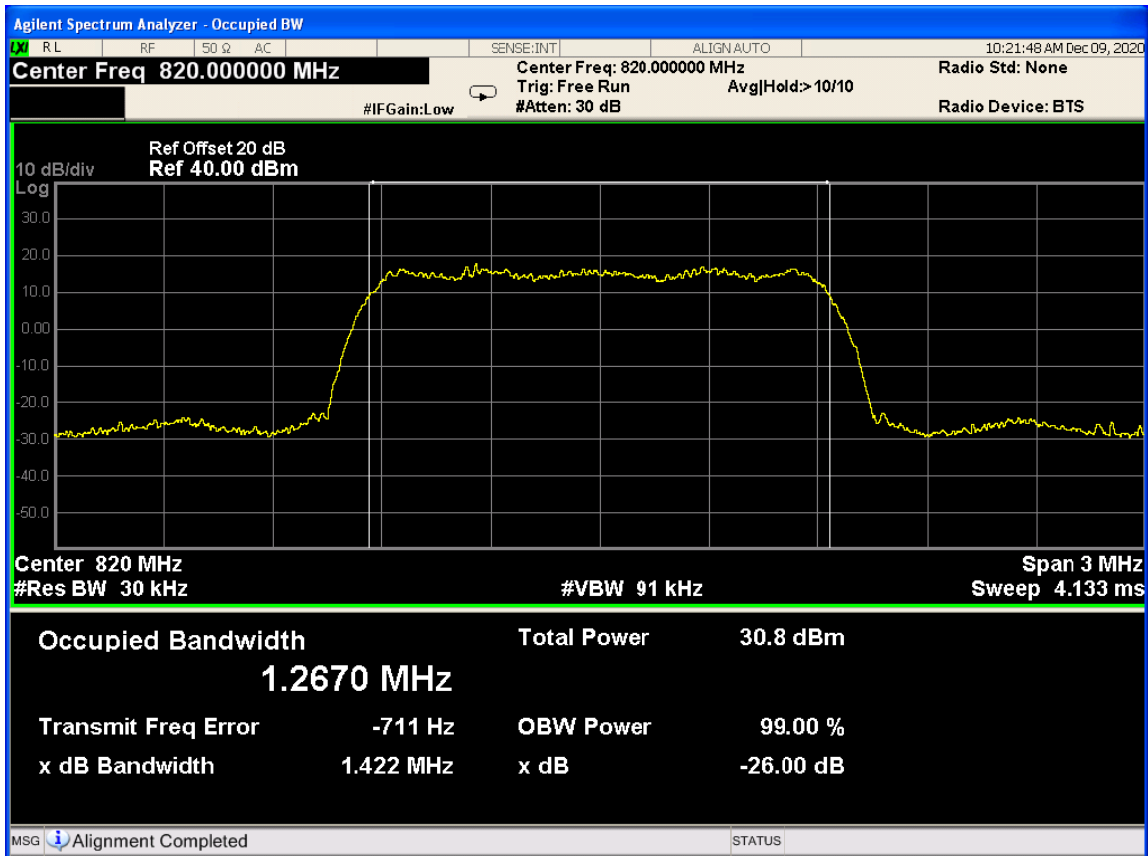


CDMA2000 BC10 1xRTT Channel=670

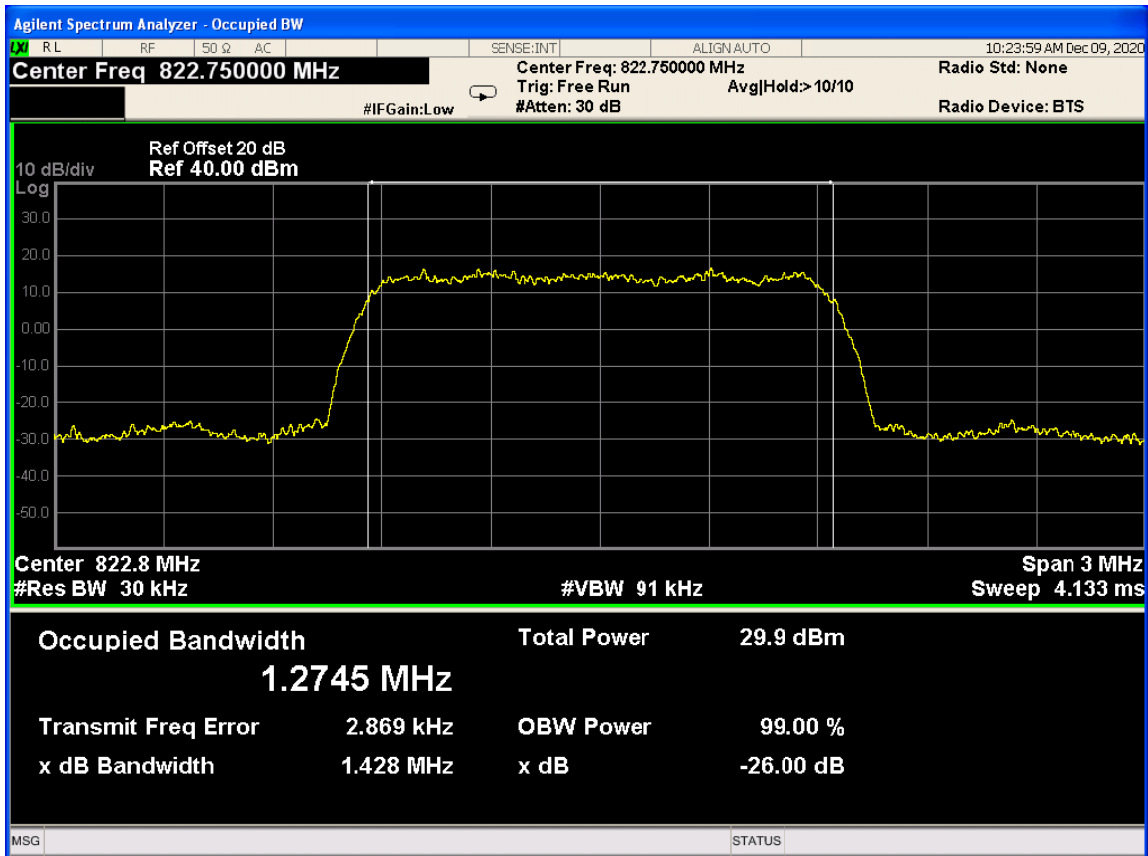


CDMA2000 BC10 1xEV-Do Rel.A Channel=450

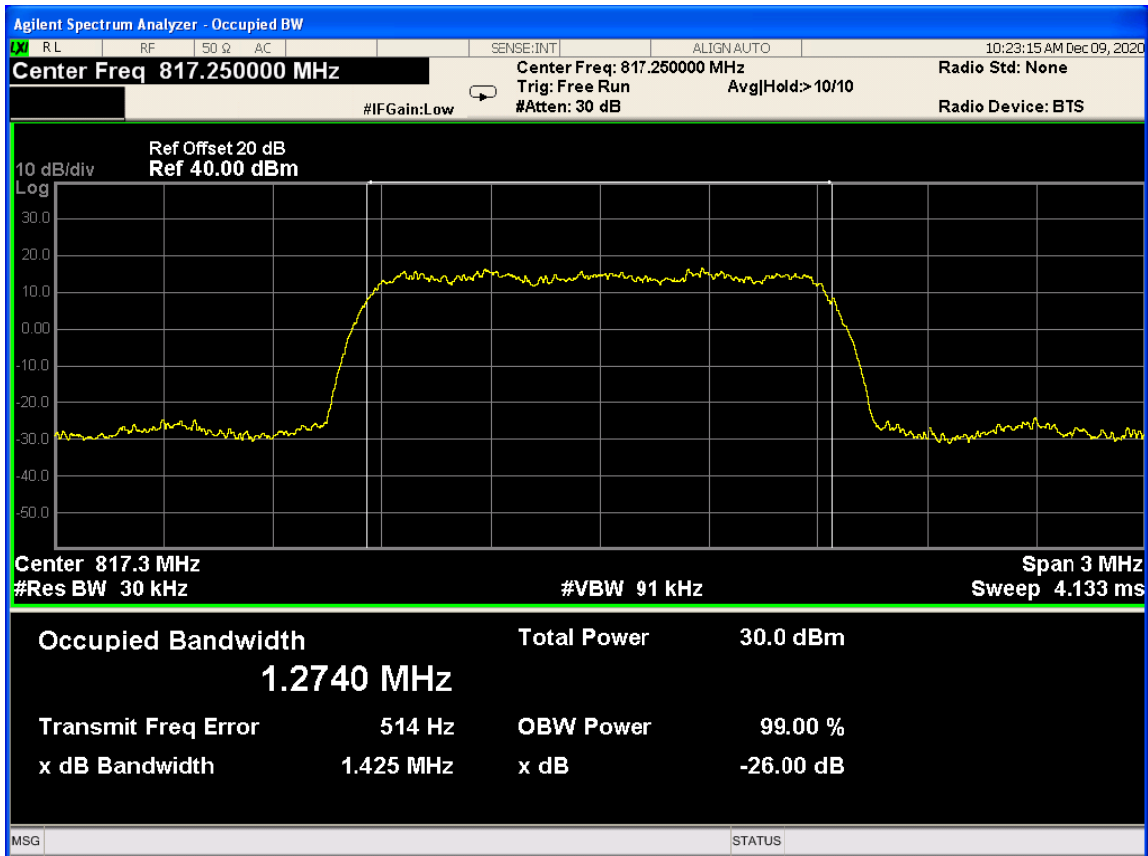

CDMA2000 BC10 1xEV-Do Rel.A Channel=560

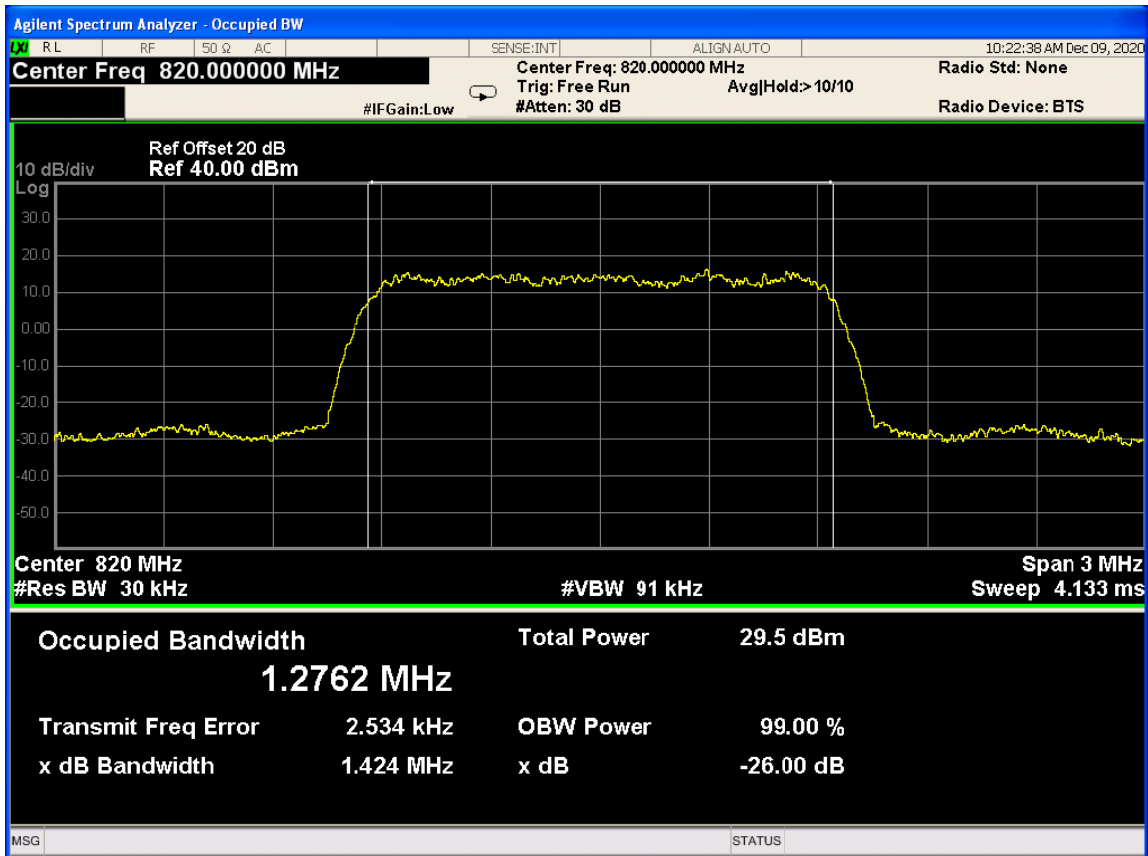


CDMA2000 BC10 1xEV-Do Rel.A Channel=670

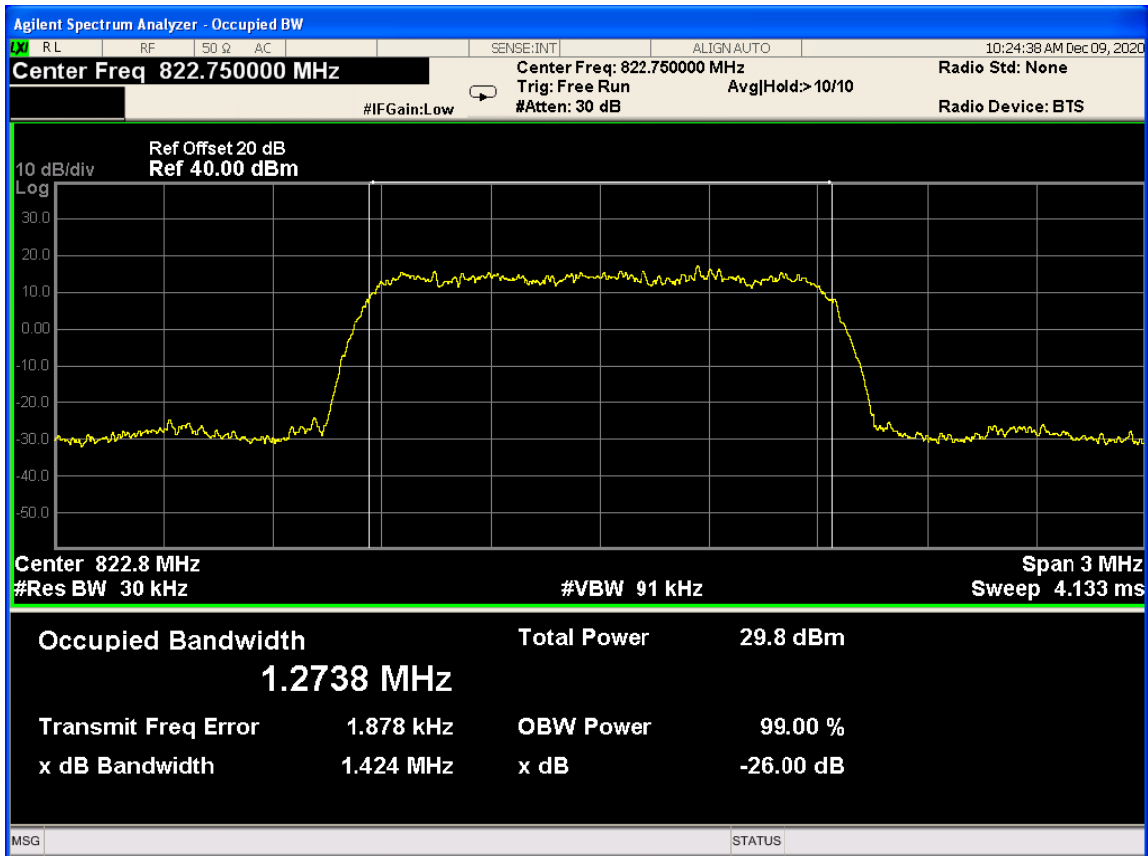


4 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM850	128	824.2	823.98	-23.87	-13	PASS
GSM850	251	848.8	849.02	-22.25	-13	PASS
GSM1900	512	1850.2	1850.00	-24.14	-13	PASS
GSM1900	810	1909.8	1910.02	-26.27	-13	PASS
GPRS850	128	824.2	823.98	-24.34	-13	PASS
GPRS850	251	848.8	849.01	-24.21	-13	PASS
GPRS1900	512	1850.2	1849.99	-26.34	-13	PASS
GPRS1900	810	1909.8	1910.02	-25.75	-13	PASS
EGPRS850	128	824.2	824.00	-29.52	-13	PASS
EGPRS850	251	848.8	849.02	-32.83	-13	PASS
EGPRS1900	512	1850.2	1849.98	-31.24	-13	PASS
EGPRS1900	810	1909.8	1910.00	-31.01	-13	PASS
WCDMA Band2	9262	1852.4	1850.00	-24.57	-13	PASS
WCDMA Band2	9538	1907.6	1910.00	-25.82	-13	PASS
WCDMA Band4	1312	1712.4	1709.99	-21.81	-13	PASS
WCDMA Band4	1513	1752.6	1755.08	-20.48	-13	PASS
WCDMA Band5	4132	826.4	823.99	-22.39	-13	PASS
WCDMA Band5	4233	846.6	849.00	-22.21	-13	PASS
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	1013	824.7	824	-17.28	-13	PASS
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	777	848.31	849	-14.305	-13	PASS
CDMA2000 BC0 1xEV-Do Rel.A	1013	824.7	824	-17.749	-13	PASS
CDMA2000 BC0 1xEV-Do Rel.A	777	848.31	849	-13.594	-13	PASS
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	25	1851.25	1850	-31.046	-13	PASS
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	1175	1908.75	1910	-29.669	-13	PASS
CDMA2000 BC1 1xEV-Do Rel.A	25	1851.25	1850	-30.9	-13	PASS
CDMA2000 BC1 1xEV-Do Rel.A	1175	1908.75	1910	-29.93	-13	PASS
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	450	817.25	816	-39.6	-20	PASS
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	670	822.75	824	-38.1	-20	PASS
CDMA2000 BC10 1xEV-Do Rel.A	450	817.25	816	-39.3	-20	PASS
CDMA2000 BC10 1xEV-Do Rel.A	670	822.75	824	-36.7	-20	PASS


GSM850 Channel=128

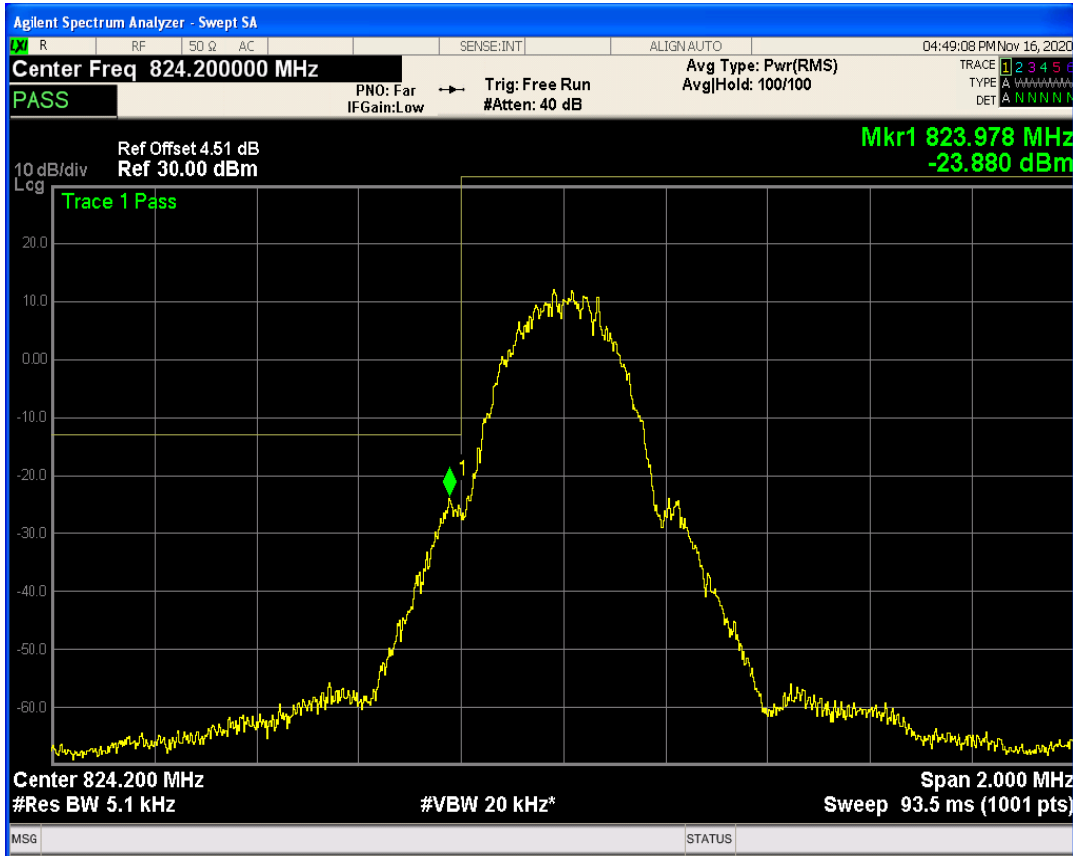


GSM850 Channel=251

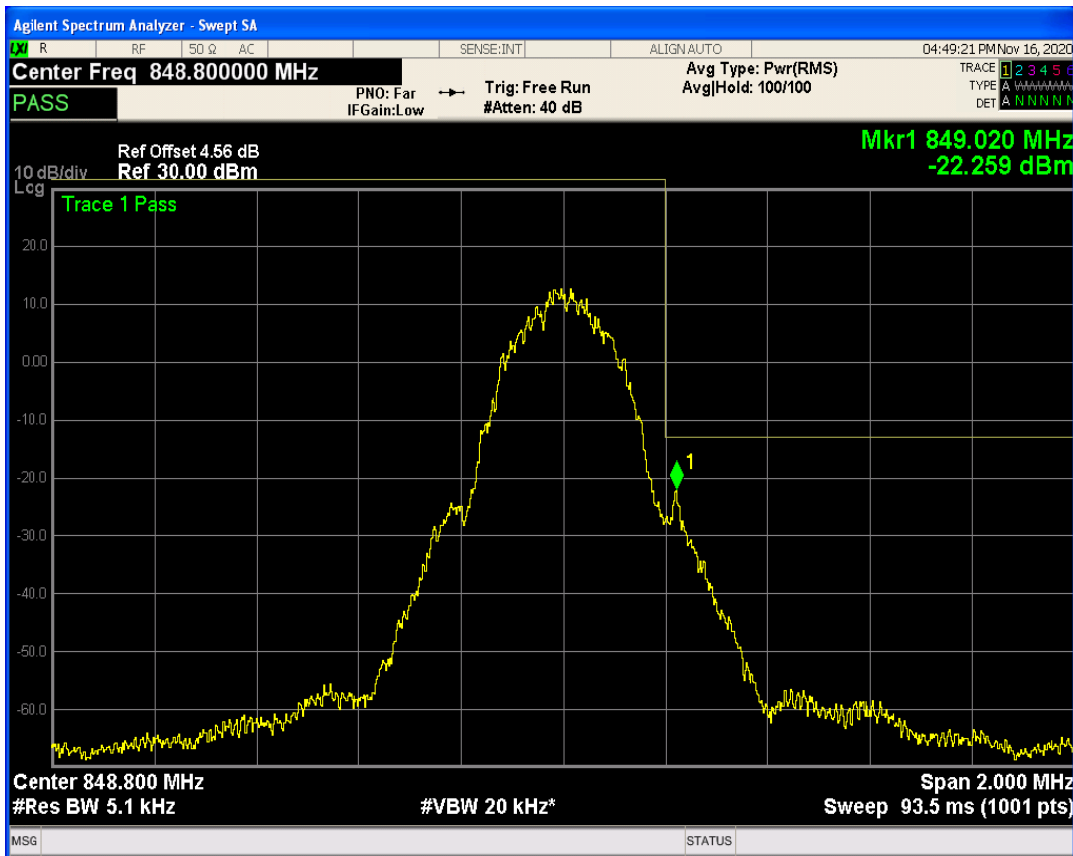


GSM1900 Channel=810

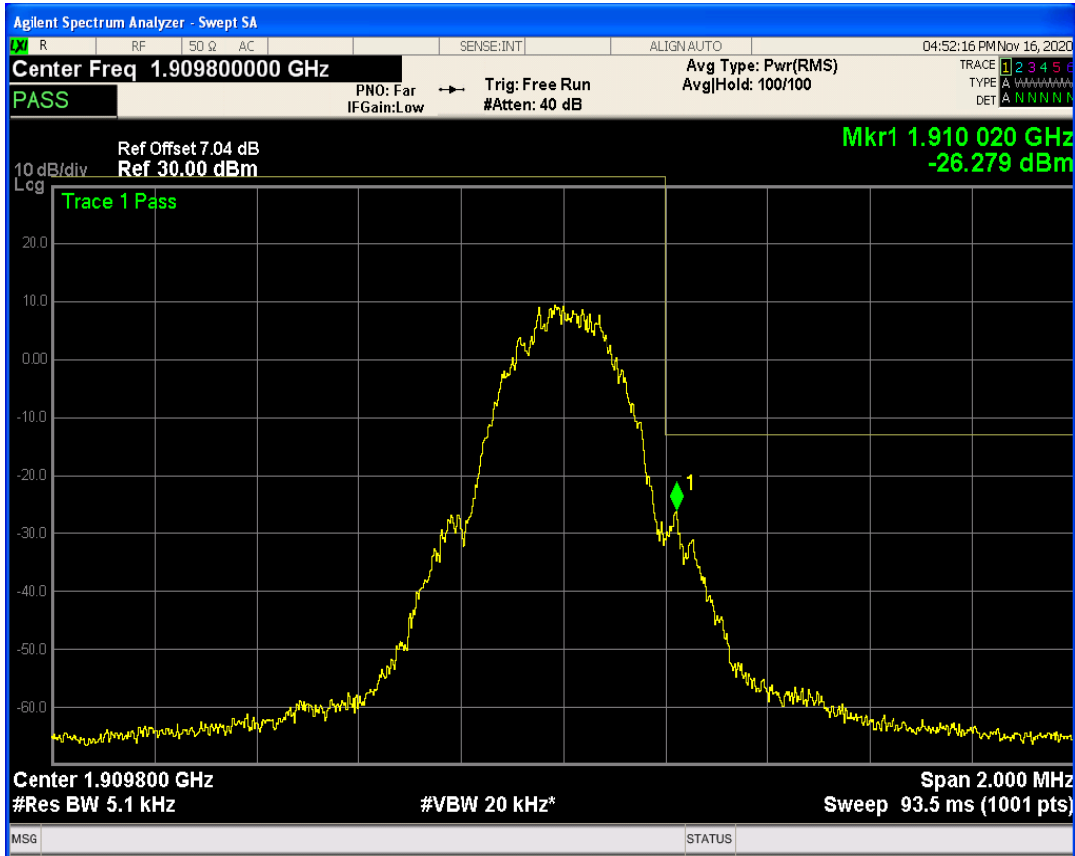


GSM1900 Channel=512

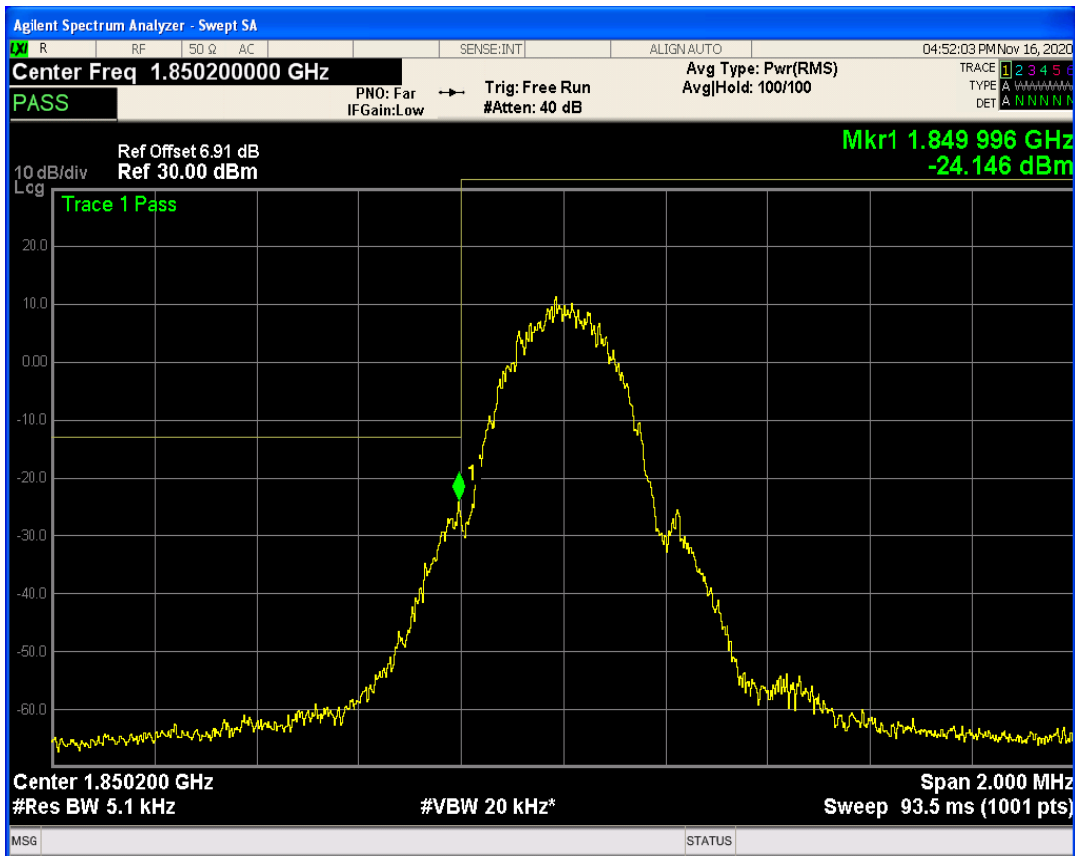


GPRS850 Channel=128

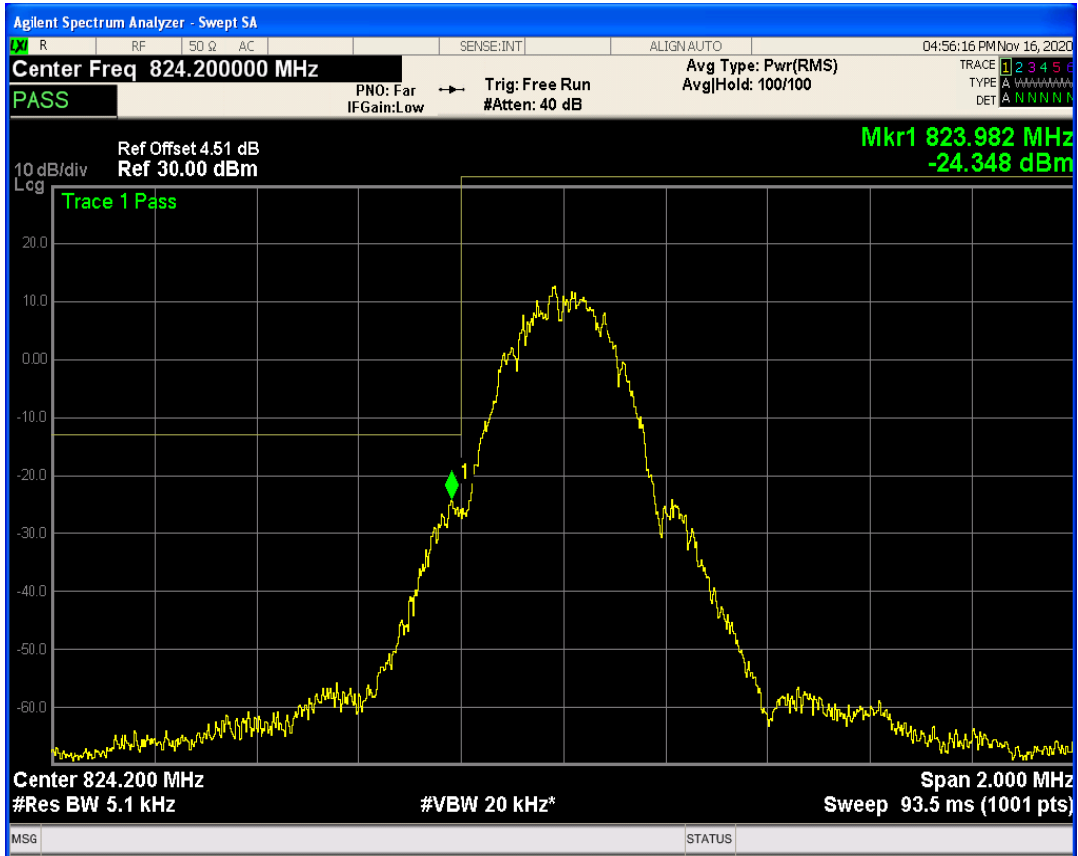


GPRS850 Channel=251

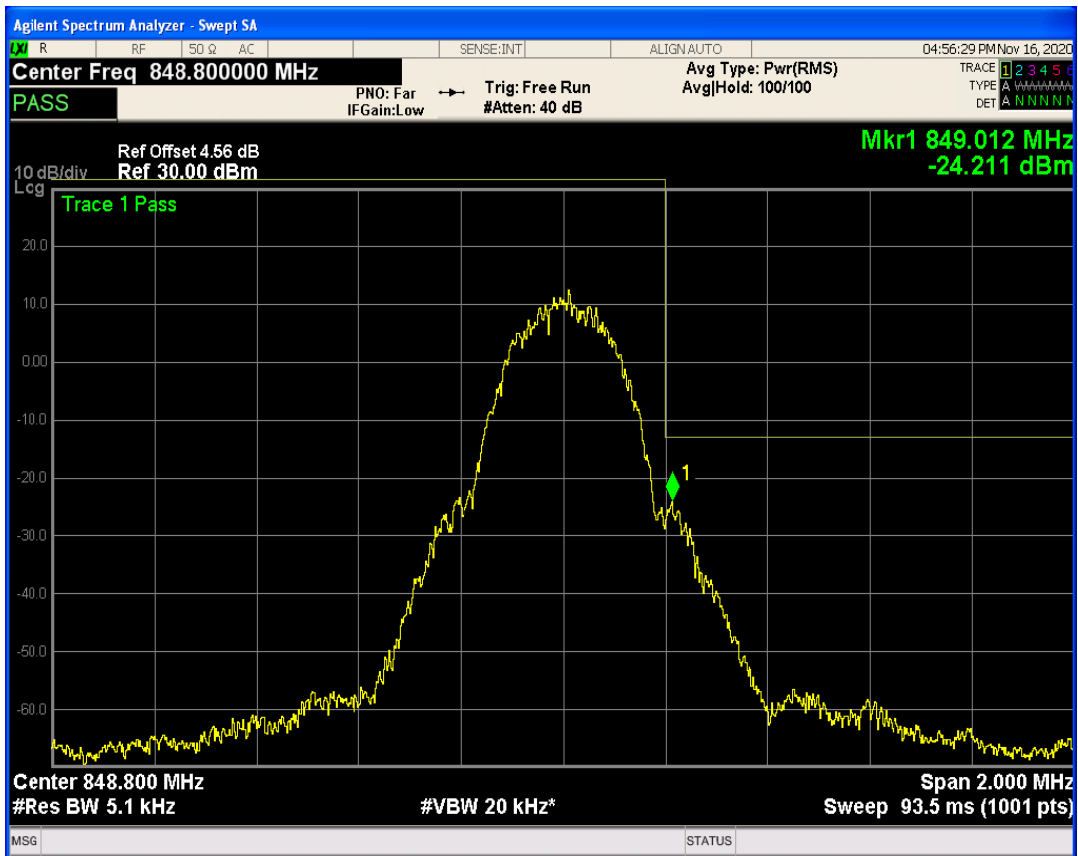


GPRS1900 Channel=512

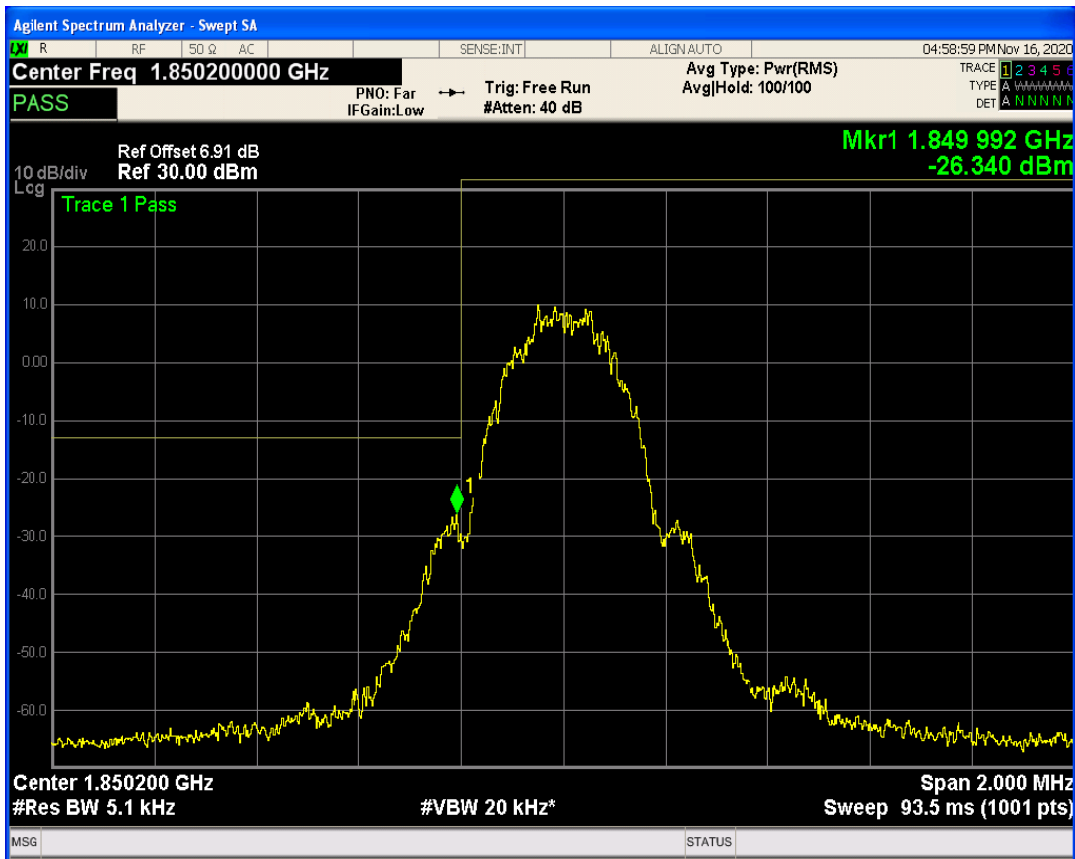


GPRS1900 Channel=810

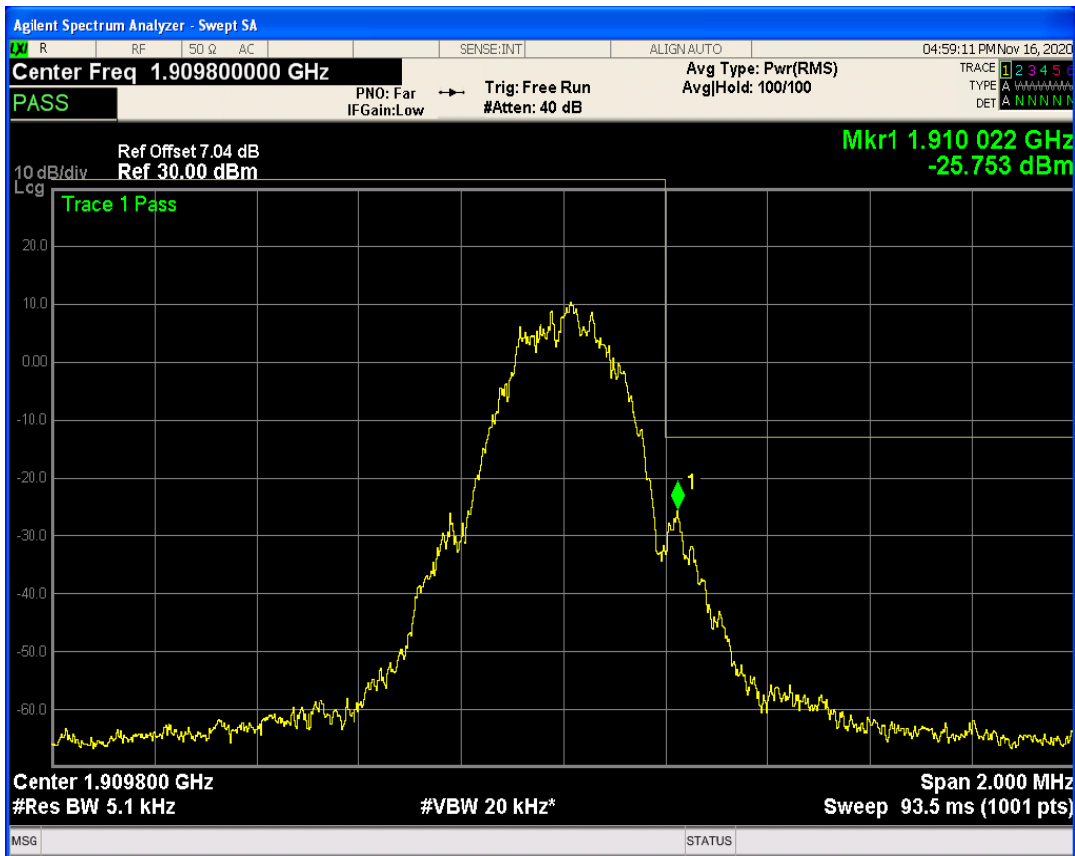


EGPRS850 Channel=128

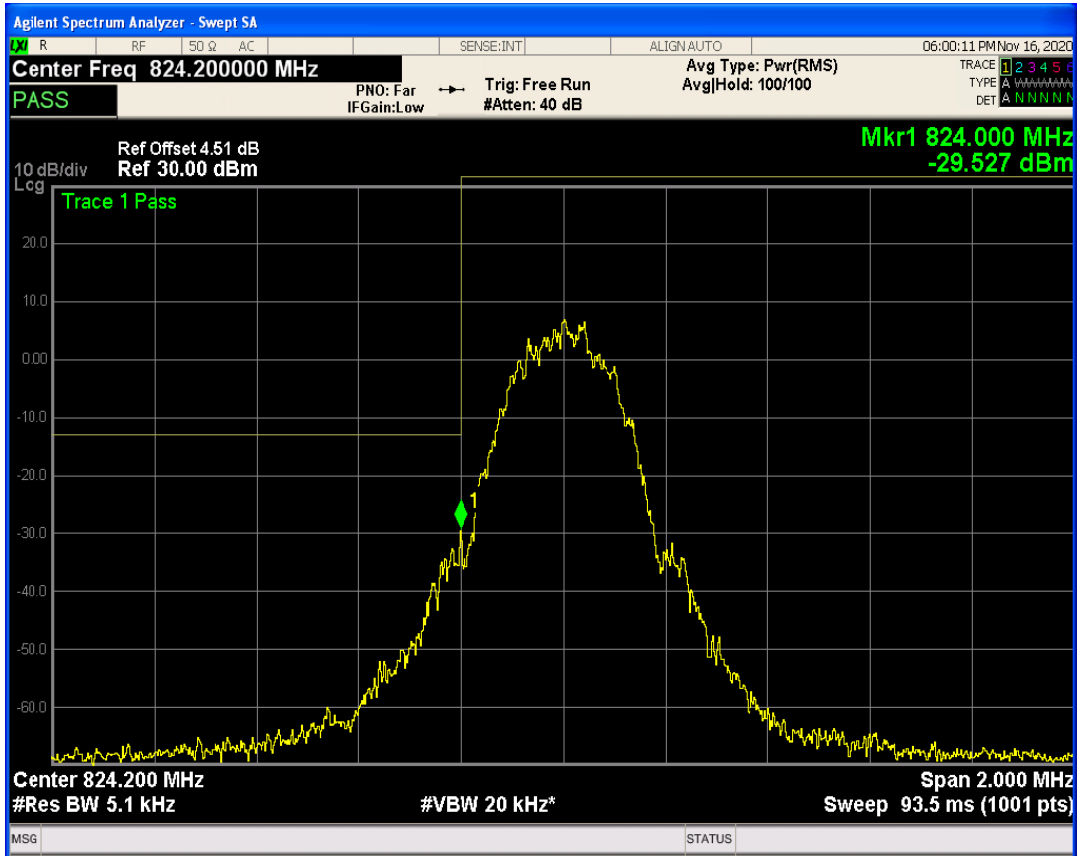


EGPRS850 Channel=251

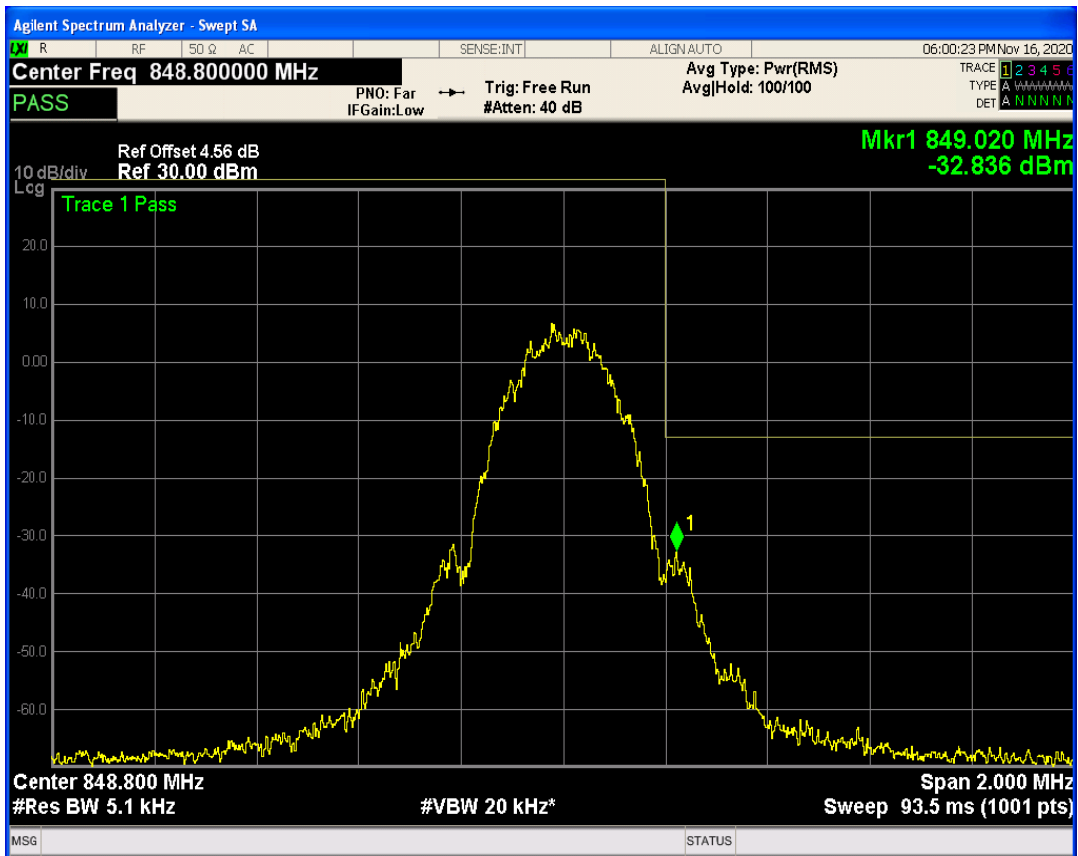

EGPRS1900 Channel=512

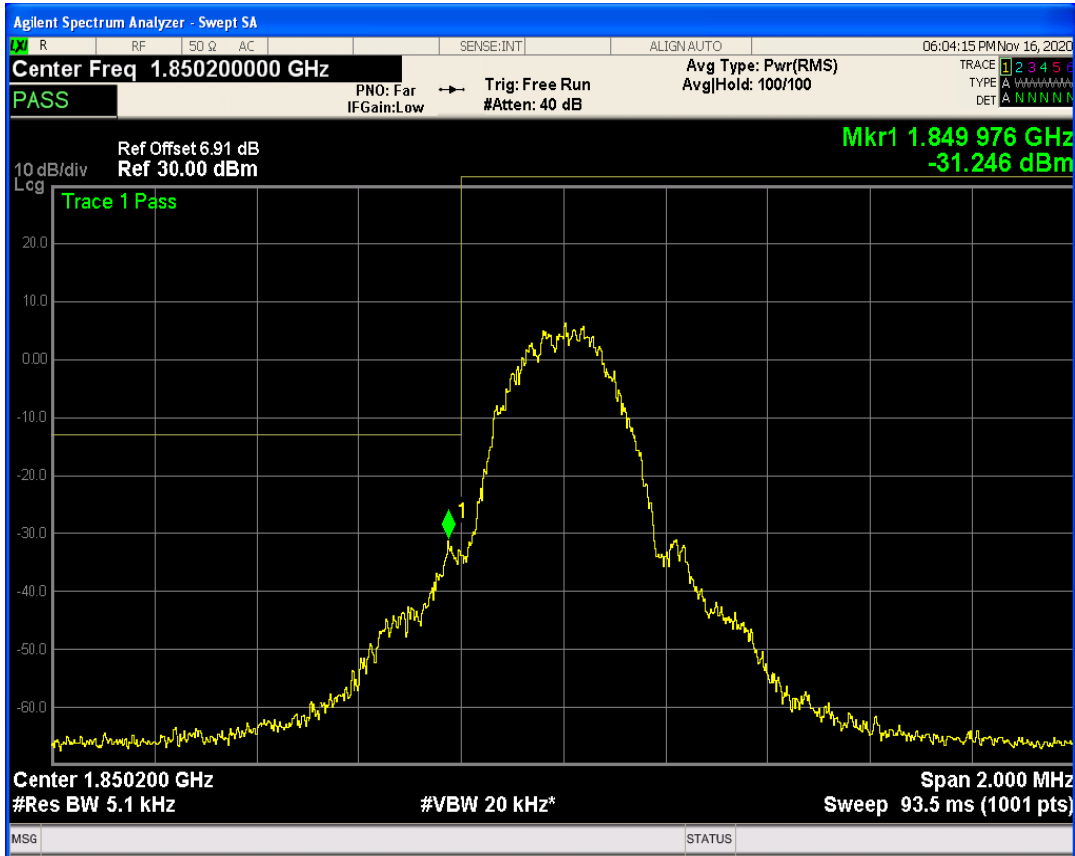

EGPRS1900 Channel=810

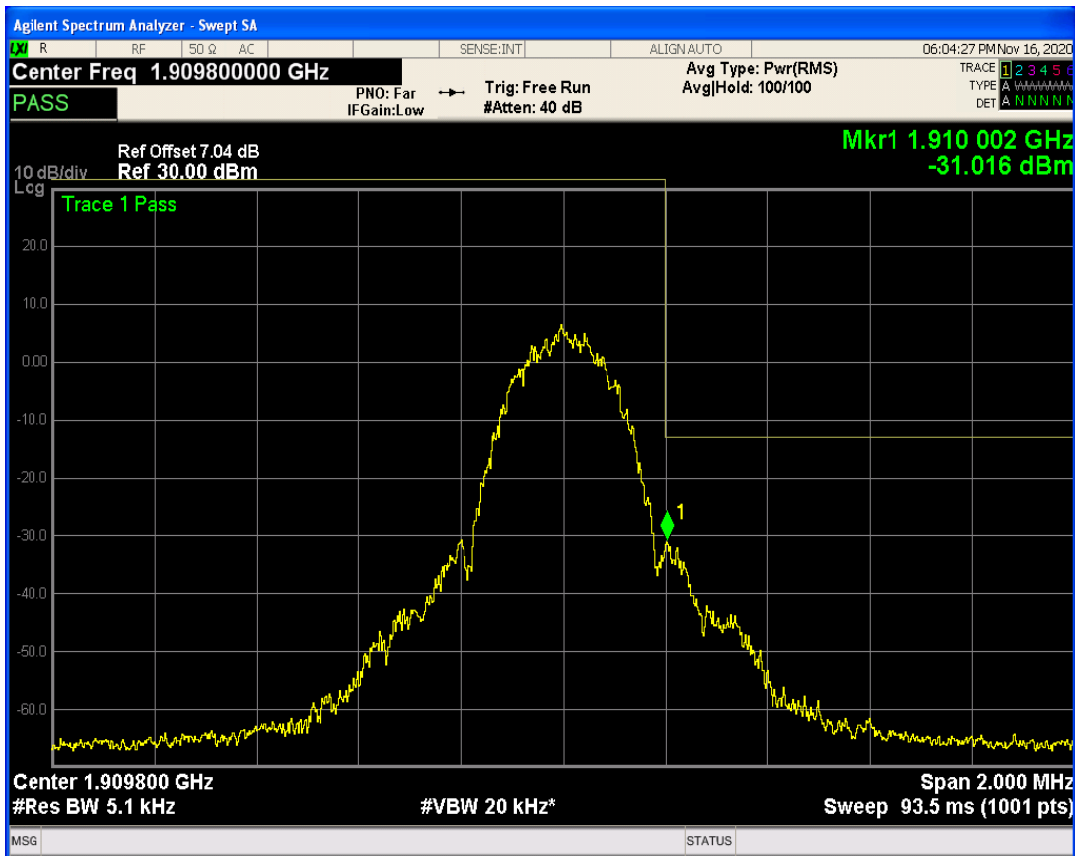

WCDMA Band2 Channel=9538



WCDMA Band2 Channel=9262



WCDMA Band4 Channel=1312



WCDMA Band4 Channel=1513




WCDMA Band5 Channel=4132




WCDMA Band5 Channel=4233




CDMA2000 BC0 1xRTT Channel=1013

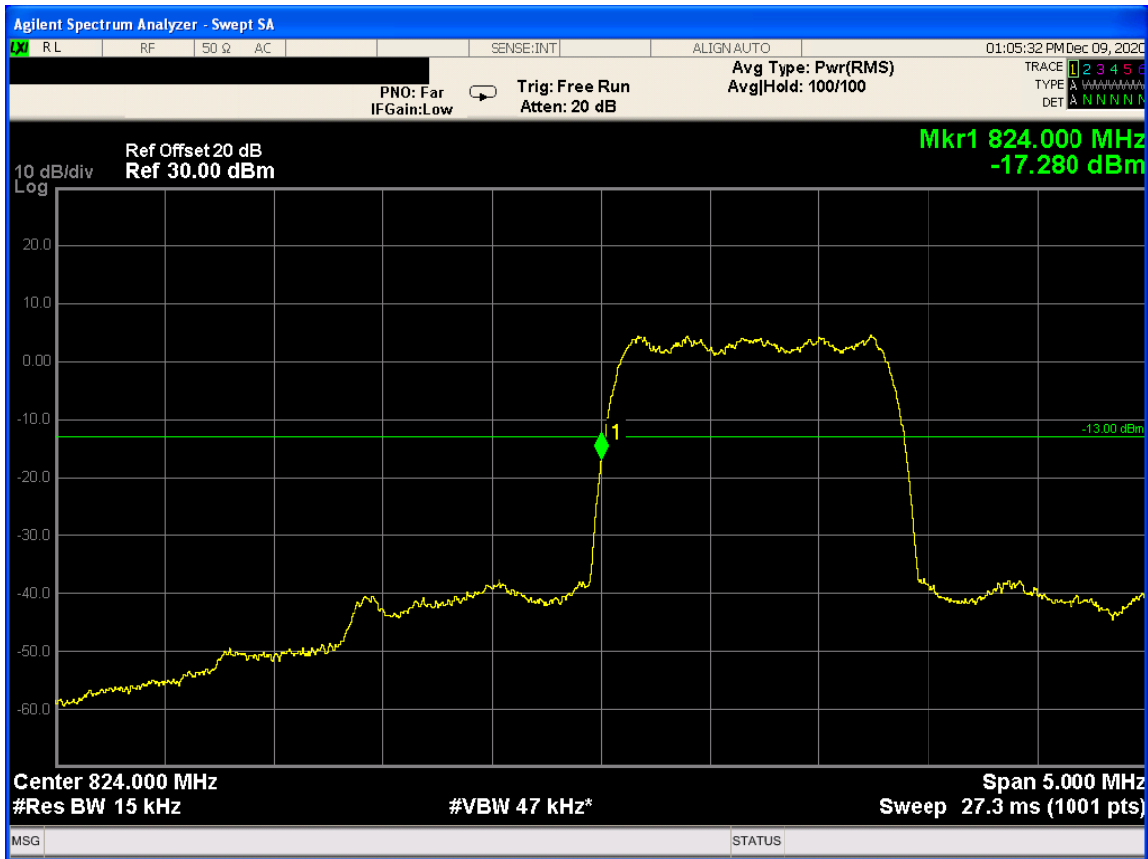


CDMA2000 BC0 1xRTT Channel=777

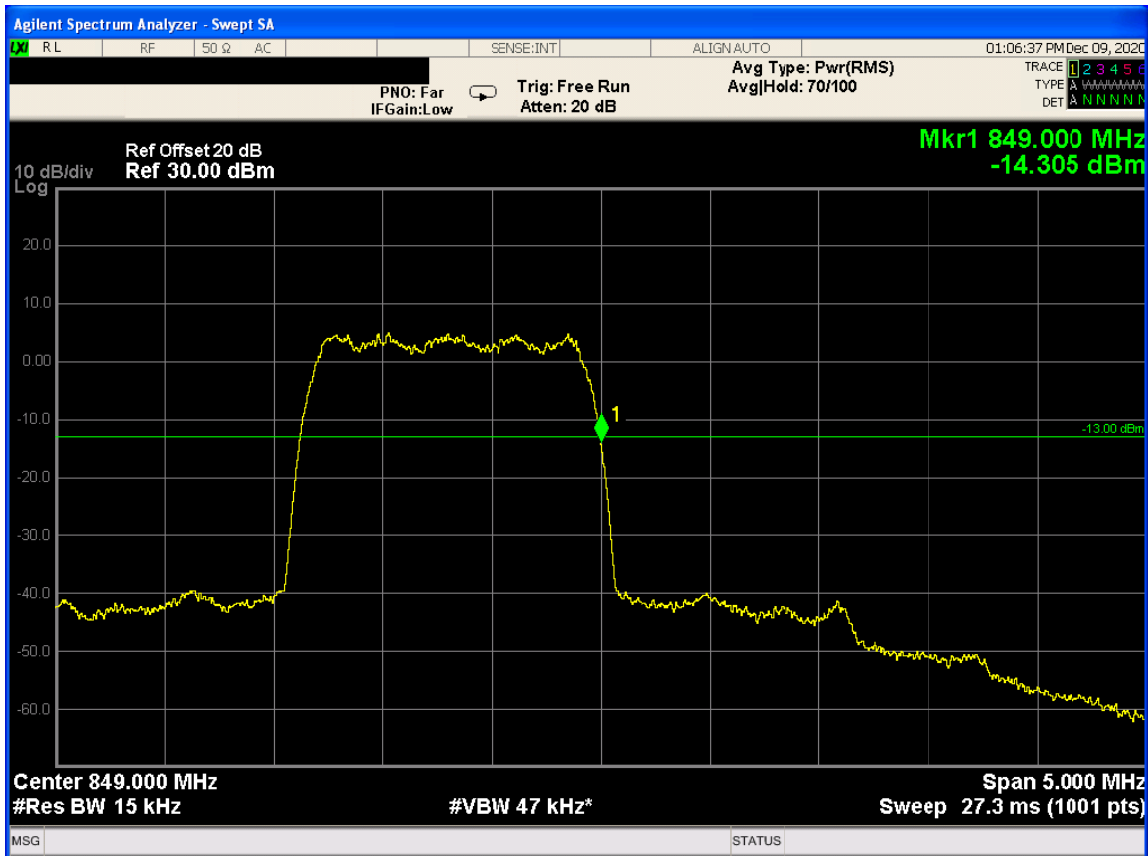


CDMA2000 BC0 1xEV-Do Rel.A Channel=1013

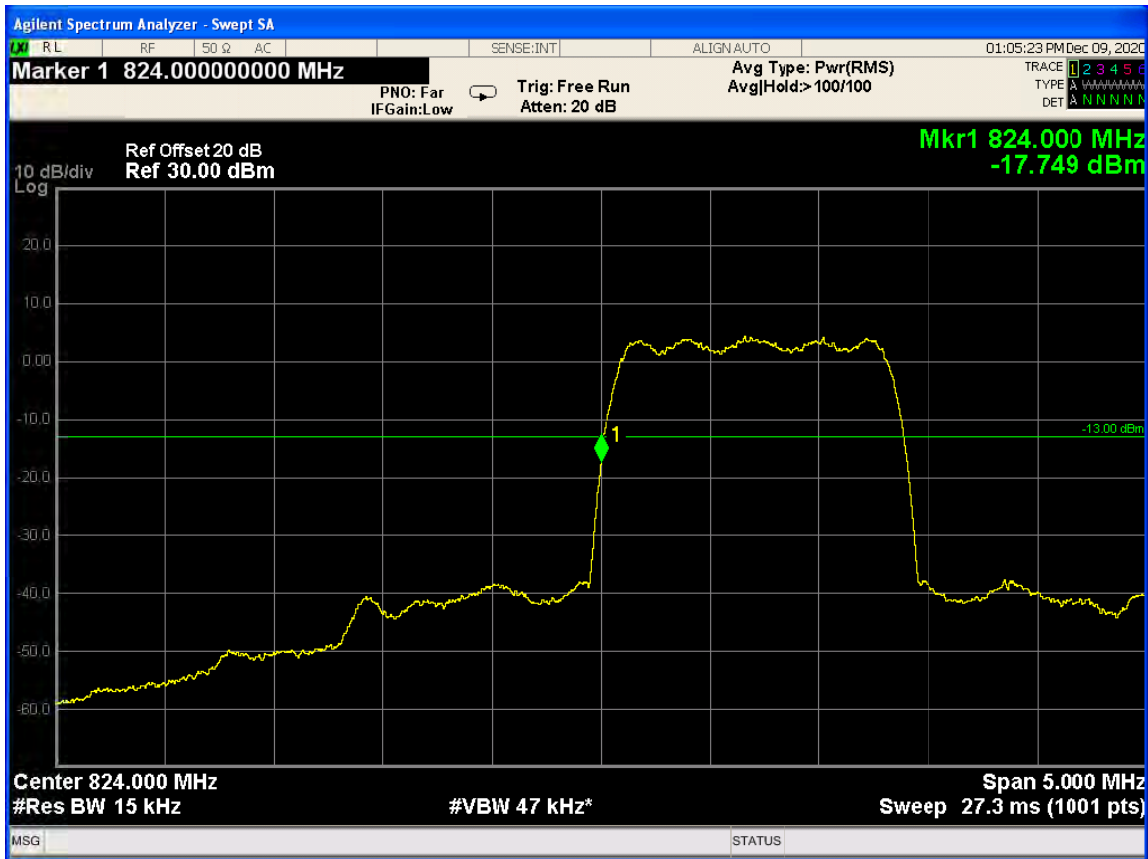


CDMA2000 BC0 1xEV-Do Rel.A Channel=777

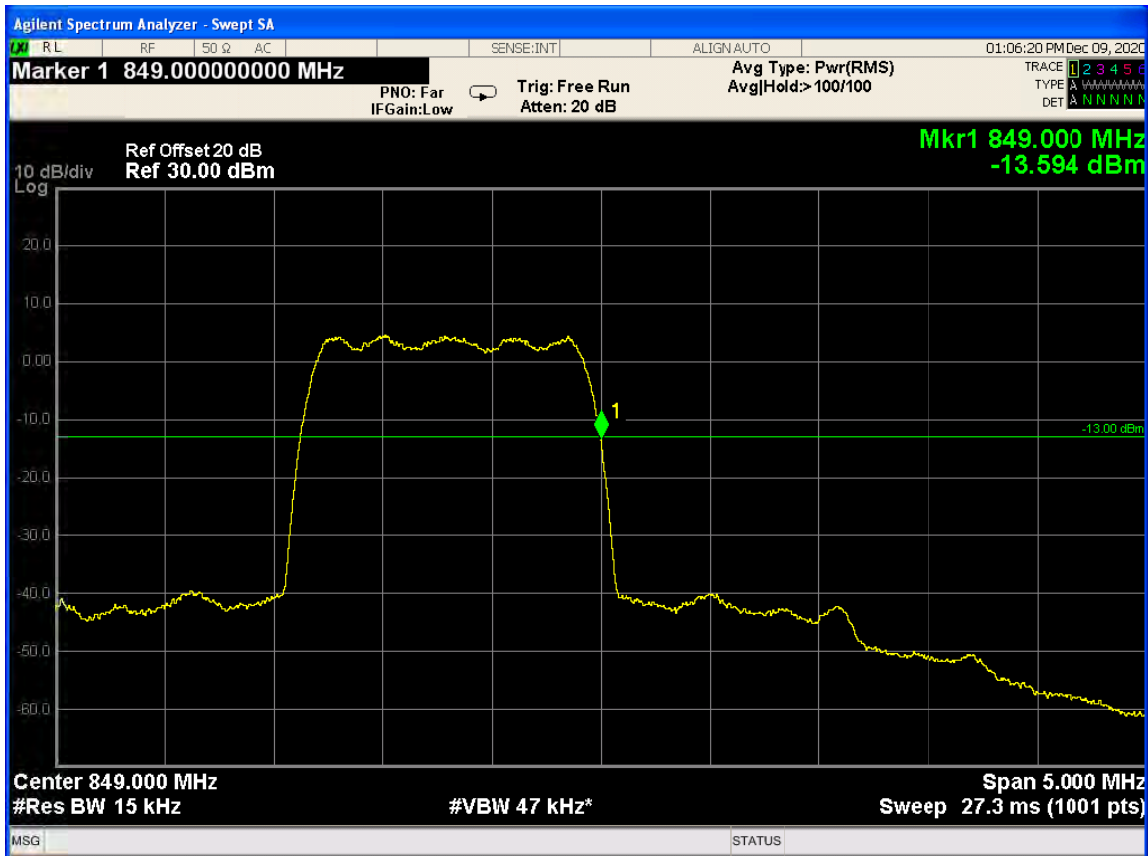


CDMA2000 BC1 1xRTT Channel=25

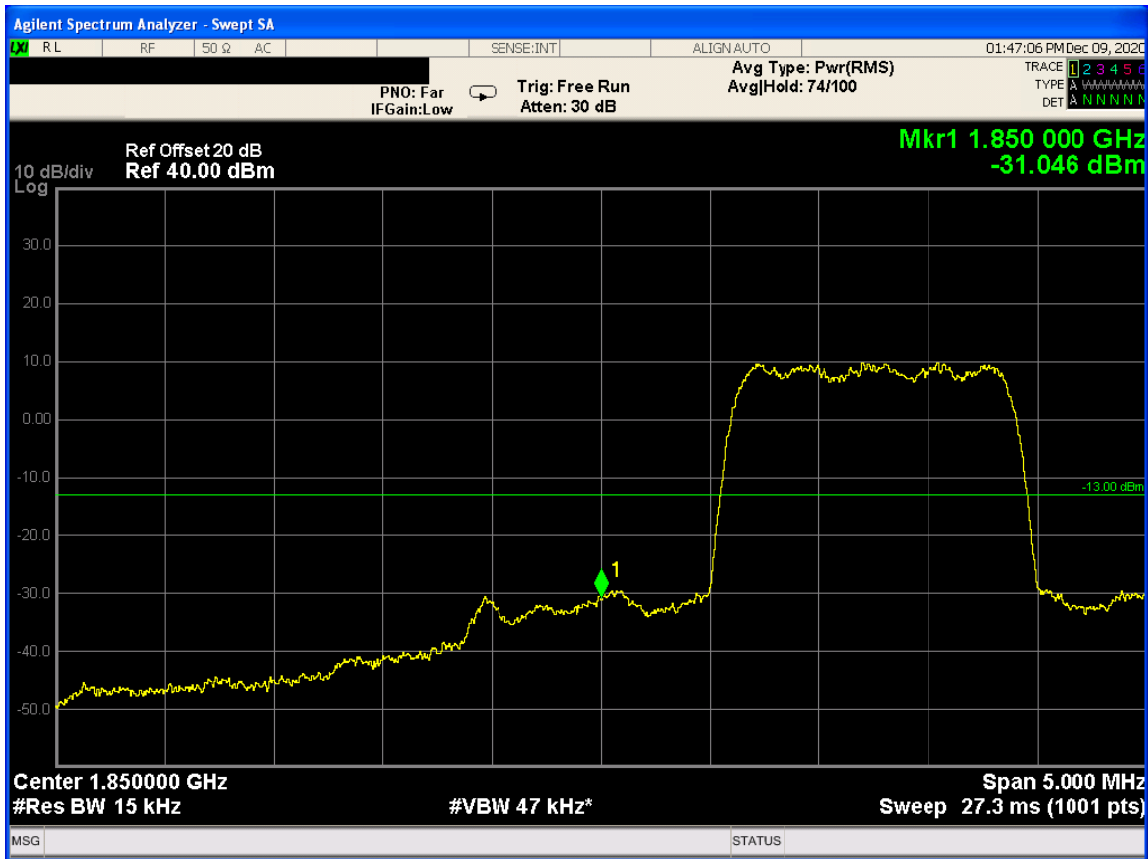


CDMA2000 BC1 1xRTT Channel=1175

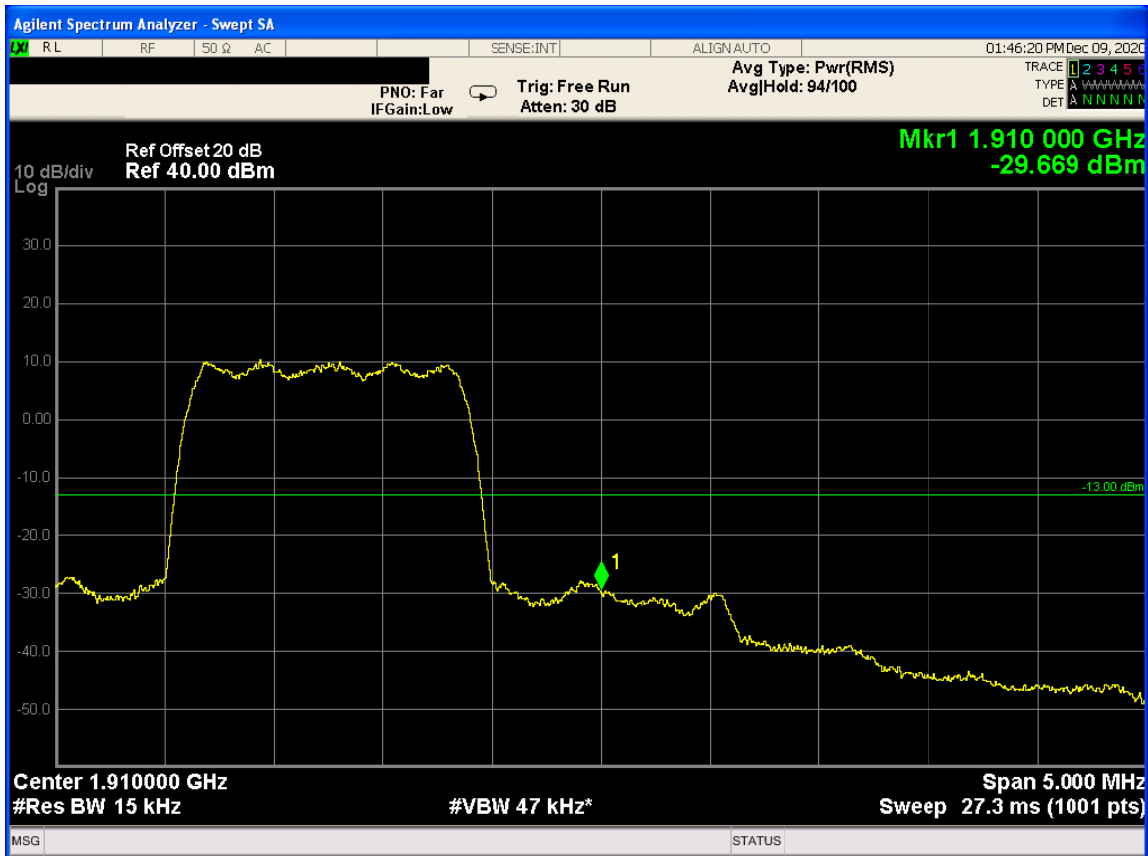


CDMA2000 BC1 1xEV-Do Rel.A Channel=25

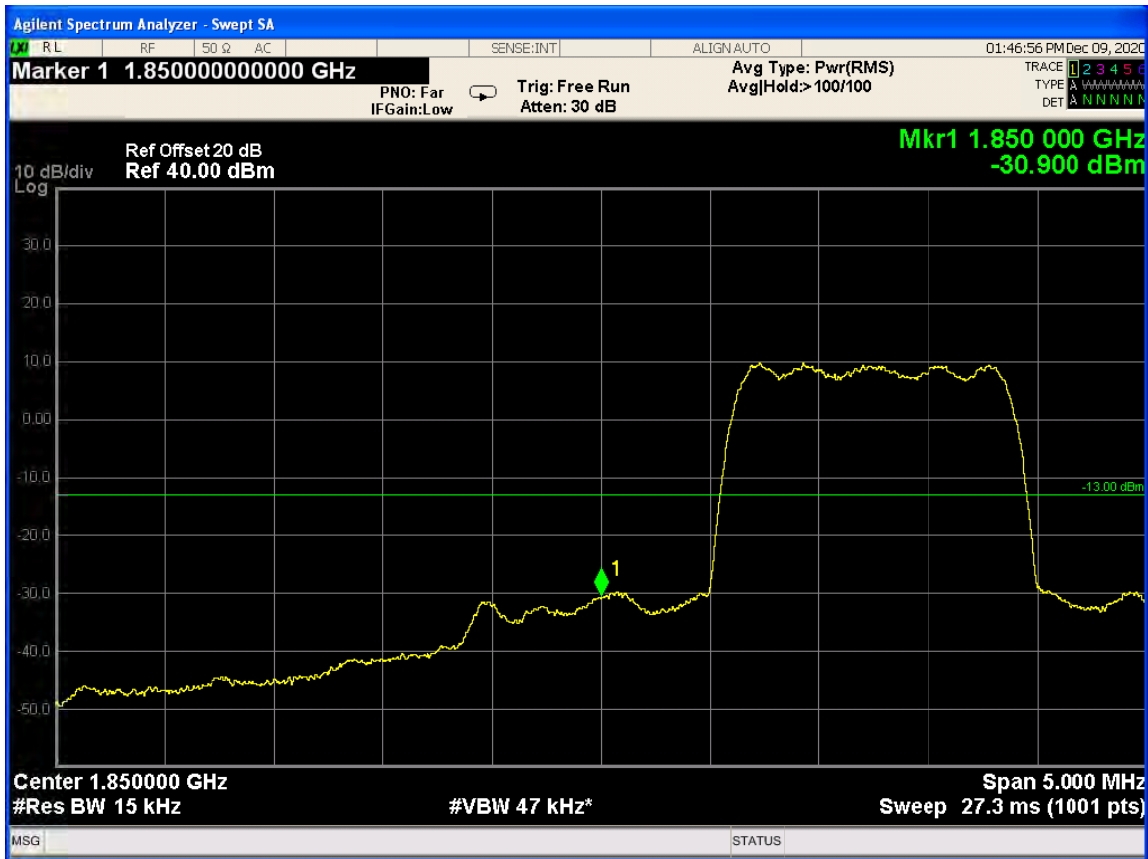


CDMA2000 BC1 1xEV-Do Rel.A Channel=1175

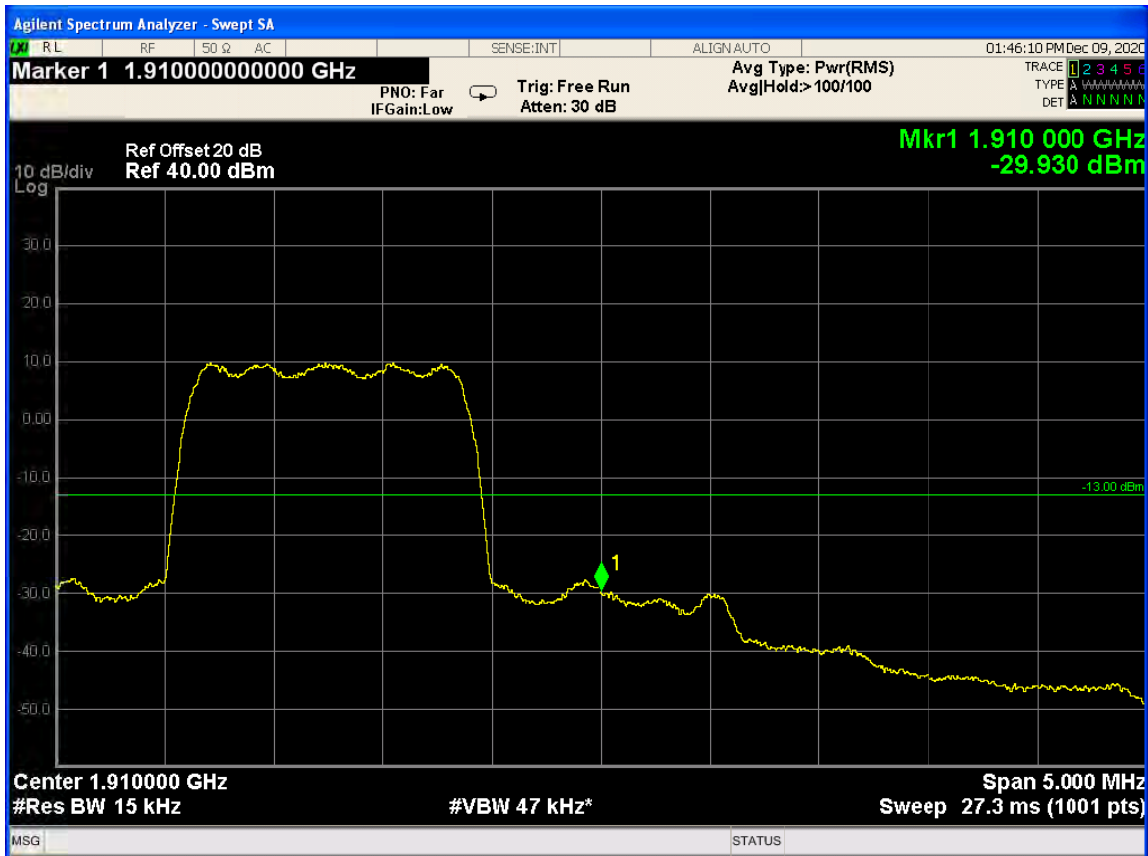


CDMA2000 BC10 1xRTT Channel=450

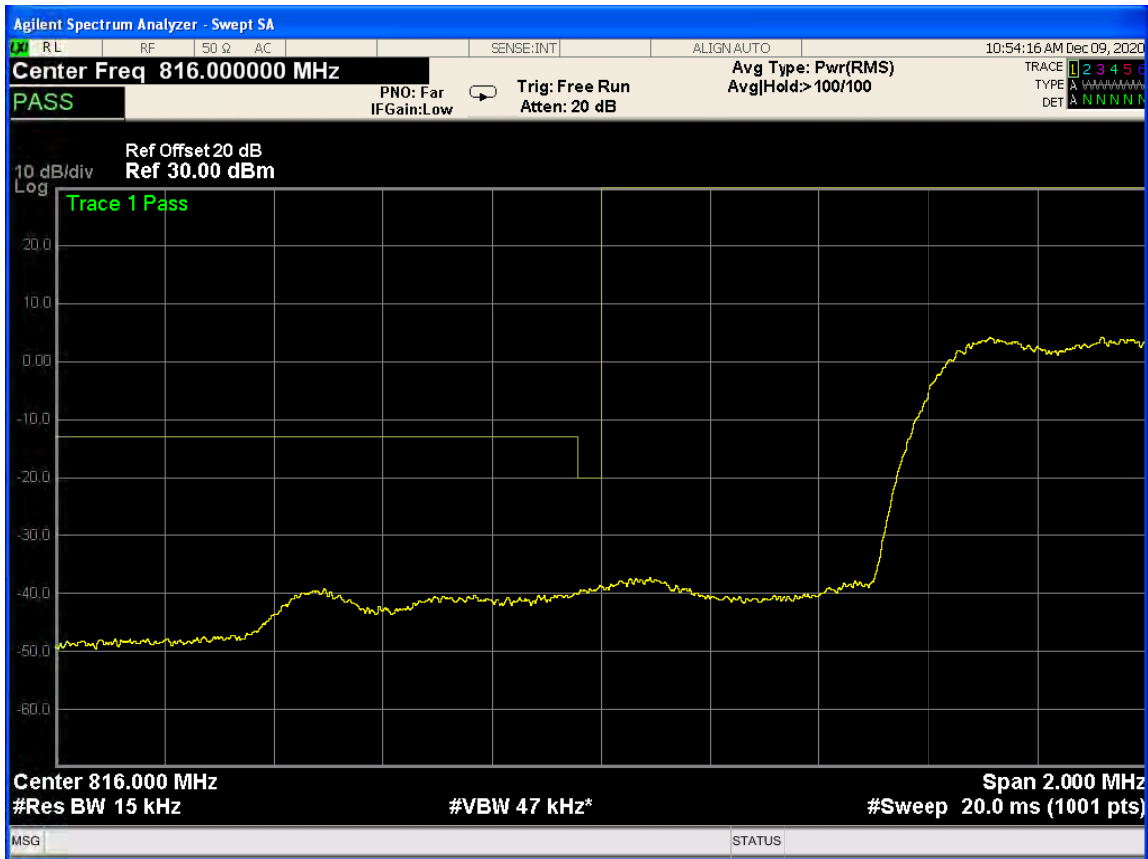

CDMA2000 BC10 1xRTT Channel=670

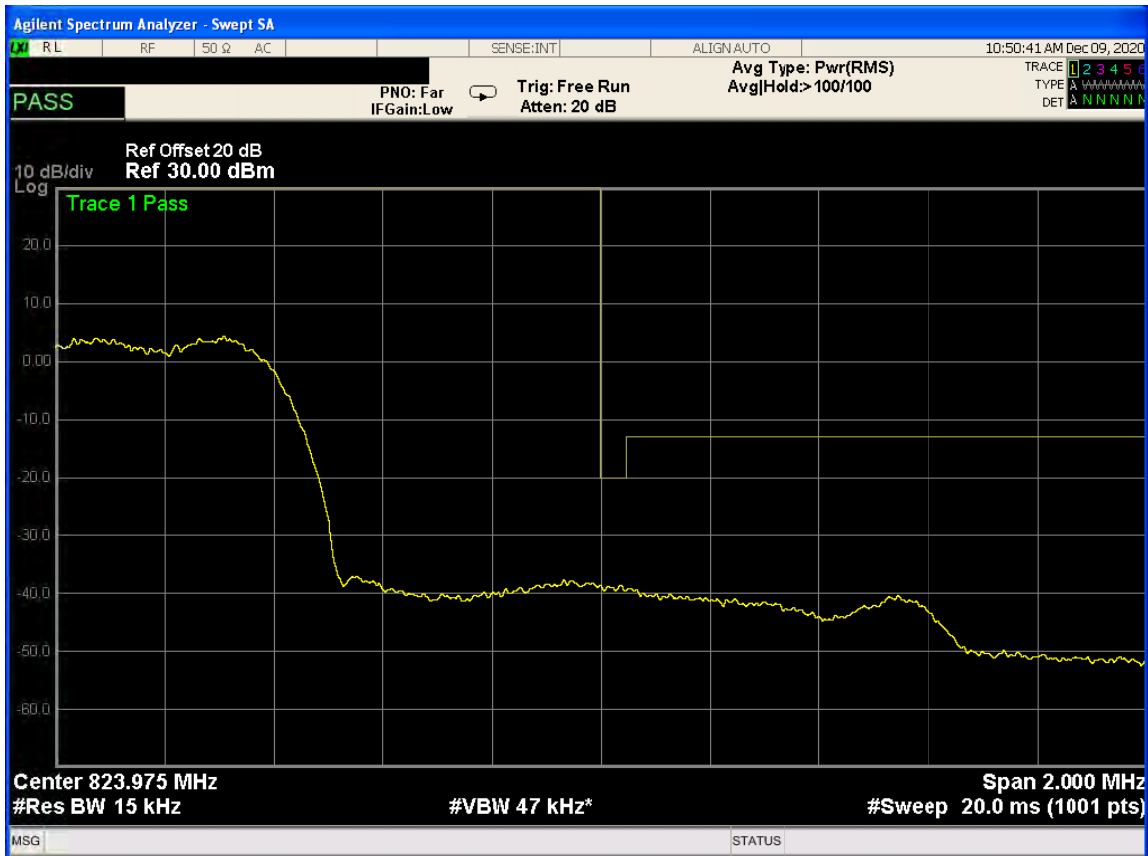

CDMA2000 BC10 1xEV-Do Rel.A Channel=450

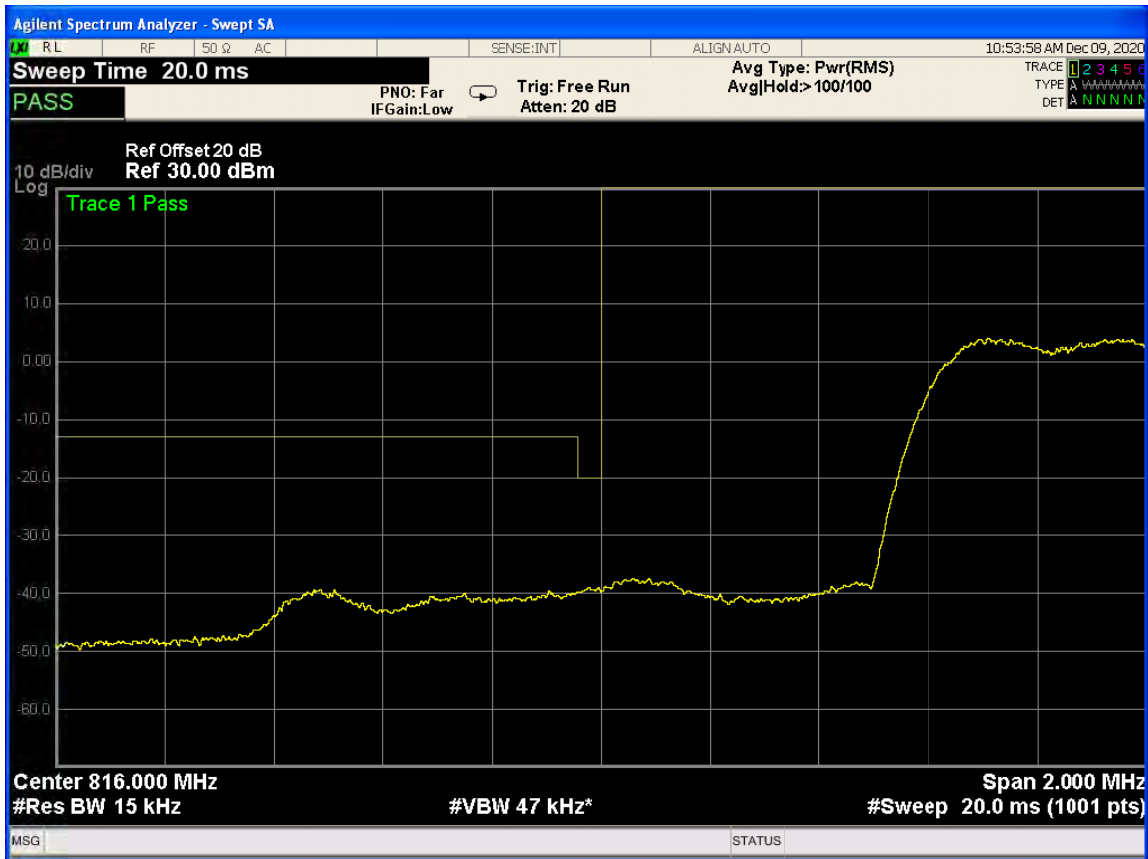

CDMA2000 BC10 1xEV-Do Rel.A Channel=670




5 Out-of-band emissions


Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM850	128	824.2	1648.38	-28.54	-13	PASS
GSM850	189	836.4	1673.06	-28.34	-13	PASS
GSM850	251	848.8	1697.73	-28.81	-13	PASS
GSM1900	512	1850.2	18532.21	-24.54	-13	PASS
GSM1900	661	1880	19970.54	-24.23	-13	PASS
GSM1900	810	1909.8	18983.53	-23.81	-13	PASS
GPRS850	128	824.2	1648.38	-28.95	-13	PASS
GPRS850	189	836.4	1672.81	-29.23	-13	PASS
GPRS850	251	848.8	1697.73	-28.83	-13	PASS
GPRS1900	512	1850.2	19908.14	-24.69	-13	PASS
GPRS1900	661	1880	17050.93	-24.99	-13	PASS
GPRS1900	810	1909.8	19908.14	-24.39	-13	PASS
EGPRS850	128	824.2	1648.63	-28.70	-13	PASS
EGPRS850	189	836.4	3160.33	-31.33	-13	PASS
EGPRS850	251	848.8	3053.40	-32.13	-13	PASS
EGPRS1900	512	1850.2	19768.35	-25.33	-13	PASS
EGPRS1900	661	1880	19635.05	-24.44	-13	PASS
EGPRS1900	810	1909.8	19950.08	-25.02	-13	PASS
WCDMA Band2	9262	1852.4	19985.02	-25.49	-13	PASS
WCDMA Band2	9400	1880	19967.05	-25.50	-13	PASS
WCDMA Band2	9538	1907.6	19628.56	-25.21	-13	PASS
WCDMA Band4	1312	1712.4	19842.24	-25.61	-13	PASS
WCDMA Band4	1412	1732.4	19942.59	-25.37	-13	PASS
WCDMA Band4	1513	1752.6	1786.86	-20.73	-13	PASS
WCDMA Band5	4132	826.4	3156.09	-32.01	-13	PASS
WCDMA Band5	4182	836.4	3169.55	-32.01	-13	PASS
WCDMA Band5	4233	846.6	8017.71	-31.84	-13	PASS
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	1013	824.7	2474.39	-35.589	-13	PASS
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	384	836.52	2509.54	-31.95	-13	PASS
CDMA2000 BC0 1xRTT(RC3,SO32(+F-SCH))	777	848.31	2544.93	-35.459	-13	PASS
CDMA2000 BC0 1xEV-Do Rel.A	1013	824.7	3189.74	-35.761	-13	PASS
CDMA2000 BC0 1xEV-Do Rel.A	384	836.52	2509.29	-34.054	-13	PASS
CDMA2000 BC0 1xEV-Do Rel.A	777	848.31	3170.8	-36.112	-13	PASS
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	25	1851.25	19780.8	-22.413	-13	PASS
CDMA2000 BC1 1xRTT(RC3,SO32(+F-SCH))	600	1880	19929.6	-21.976	-13	PASS
CDMA2000 BC1	1175	1908.75	17930.6	-21.945	-13	PASS

1xRTT(RC3,SO32(+F-SCH))						
CDMA2000 BC1 1xEV-Do Rel.A	25	1851.25	19041.4	-21.739	-13	PASS
CDMA2000 BC1 1xEV-Do Rel.A	600	1880	18920.1	-22.415	-13	PASS
CDMA2000 BC1 1xEV-Do Rel.A	1175	1908.75	18556.2	-22.22	-13	PASS
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	450	817.25	2452.71	-35.263	-13	PASS
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	560	820	2460.19	-33.546	-13	PASS
CDMA2000 BC10 1xRTT(RC3,SO32(+F-SCH))	670	822.75	2467.91	-35.364	-13	PASS
CDMA2000 BC10 1xEV-Do Rel.A	450	817.25	2453.21	-33.887	-13	PASS
CDMA2000 BC10 1xEV-Do Rel.A	560	820	2460.44	-33.809	-13	PASS
CDMA2000 BC10 1xEV-Do Rel.A	670	822.75	2468.16	-34.742	-13	PASS


GSM850 Channel=128

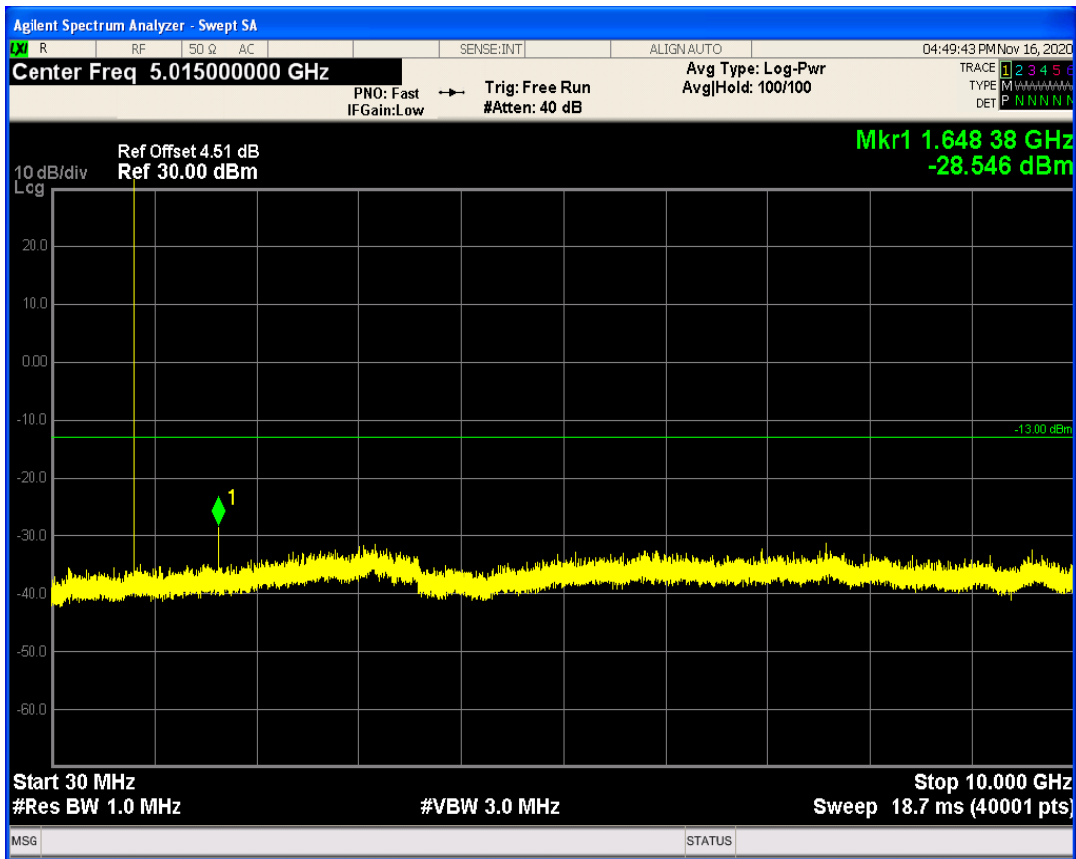


GSM850 Channel=189

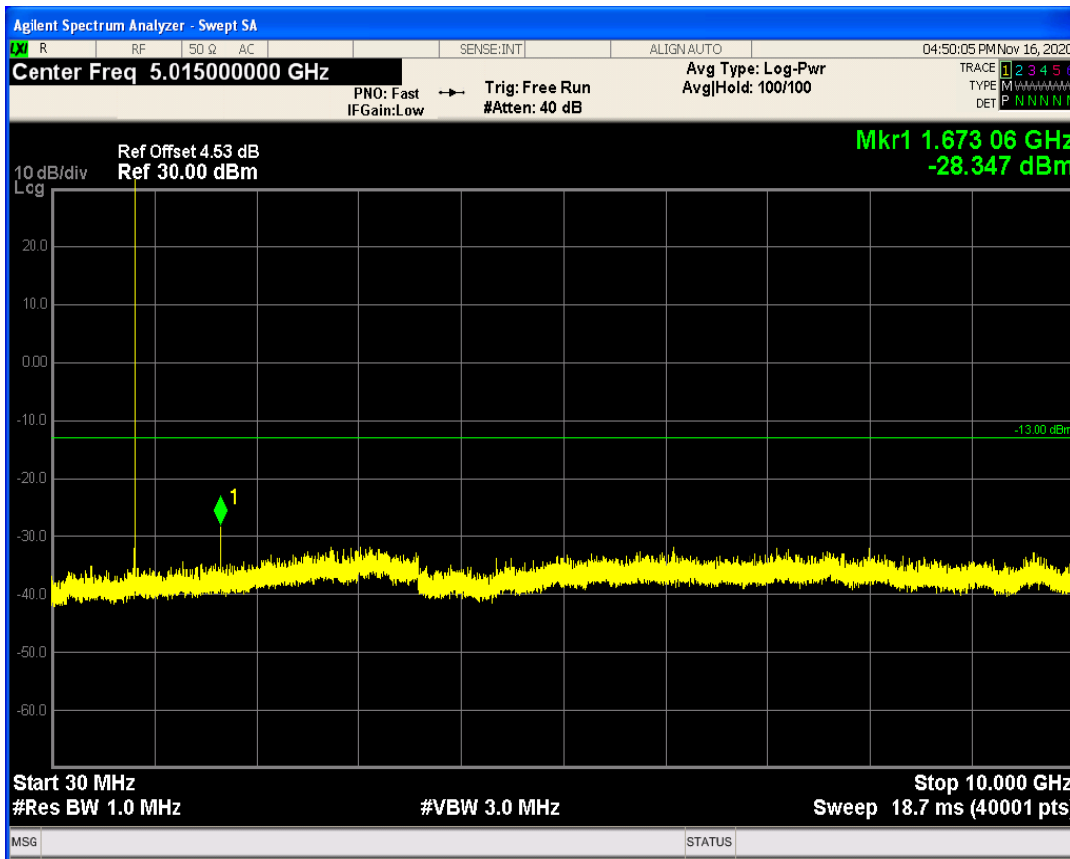


GSM850 Channel=251

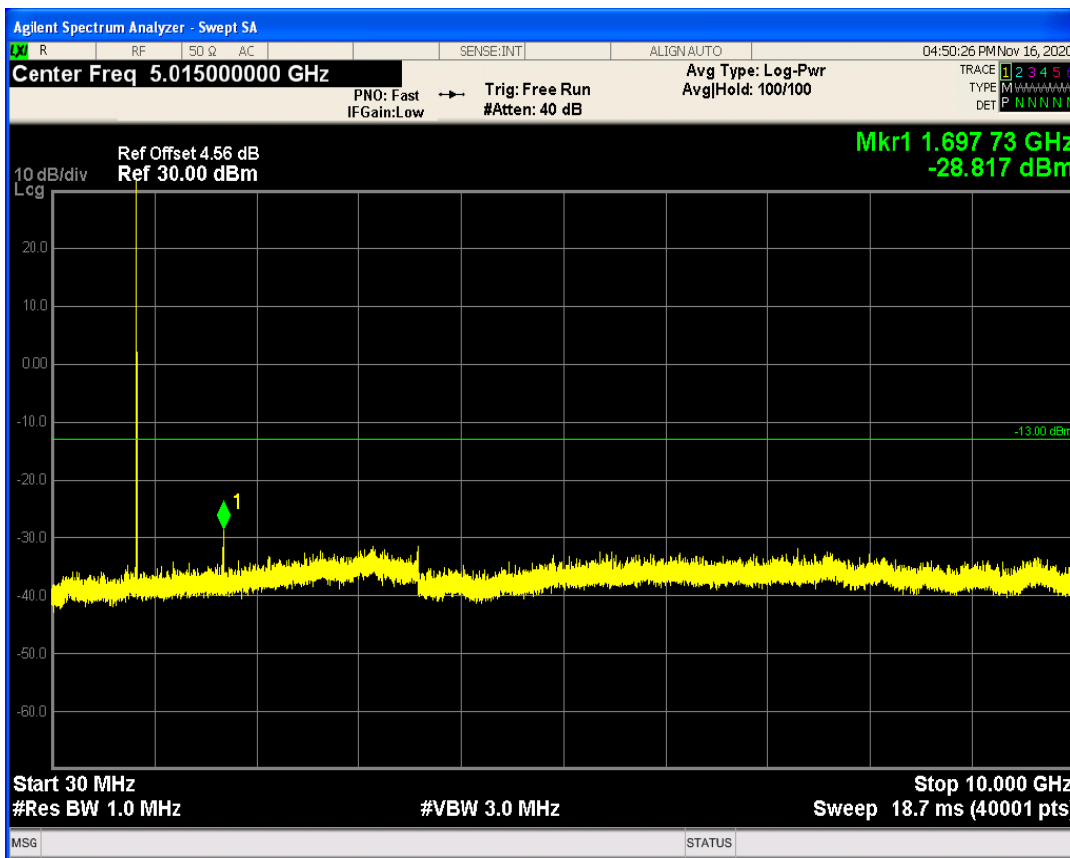


GSM1900 Channel=512

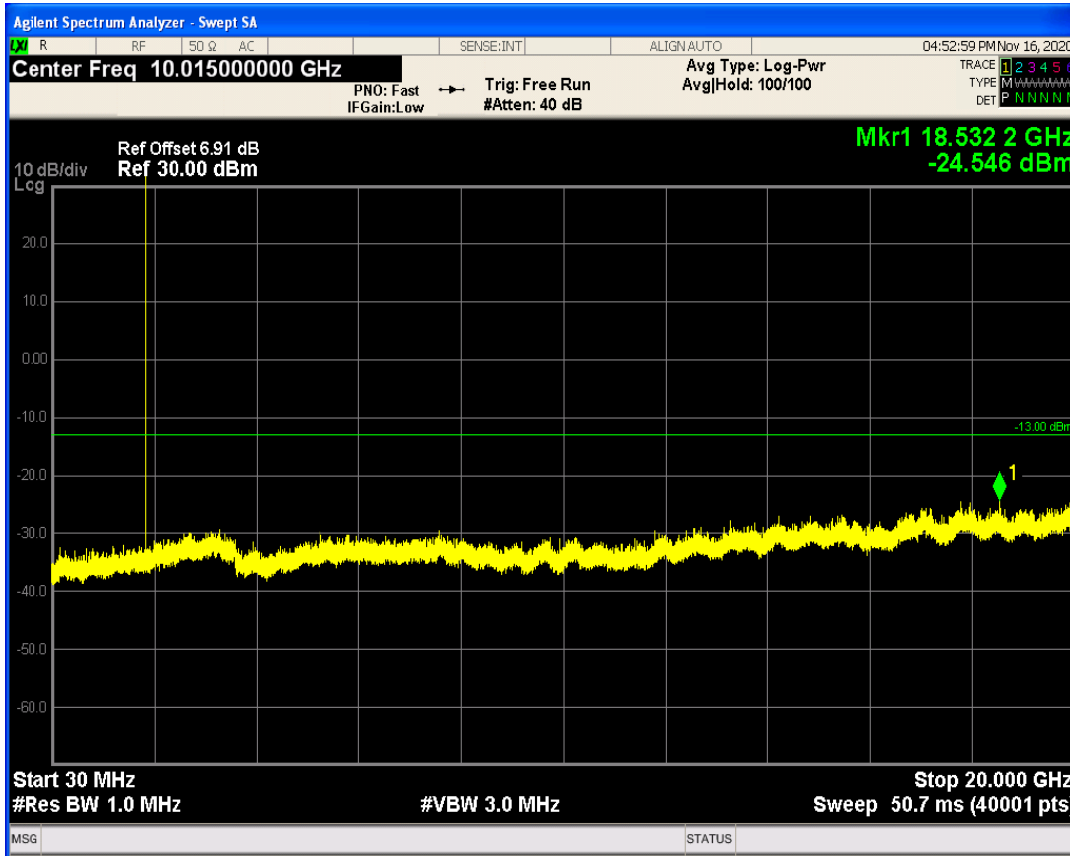


GSM1900 Channel=661

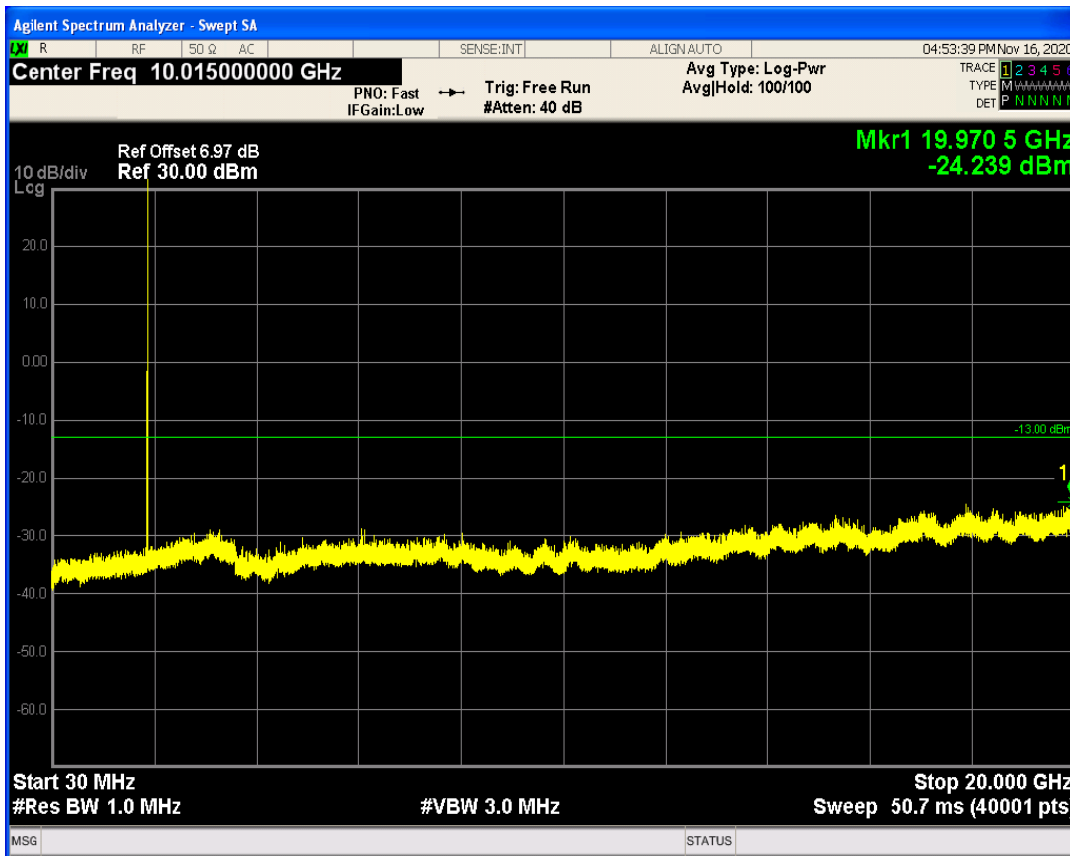


GSM1900 Channel=810

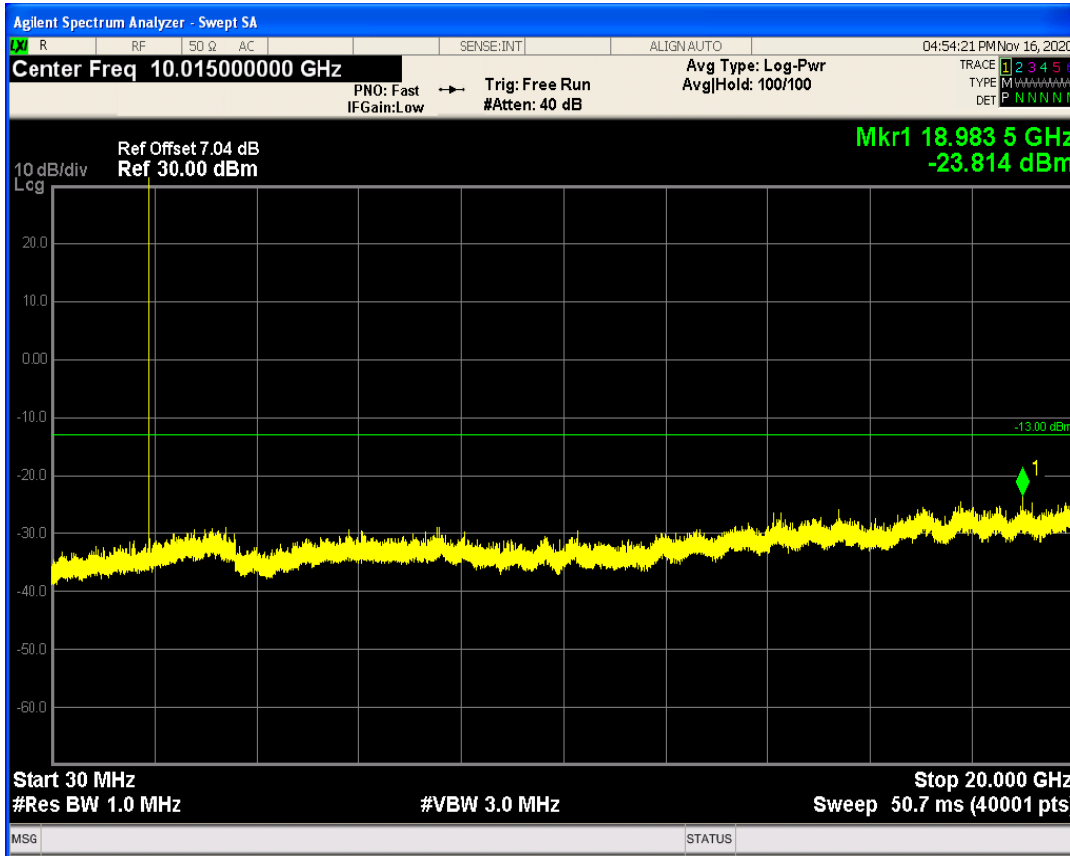


GPRS850 Channel=128

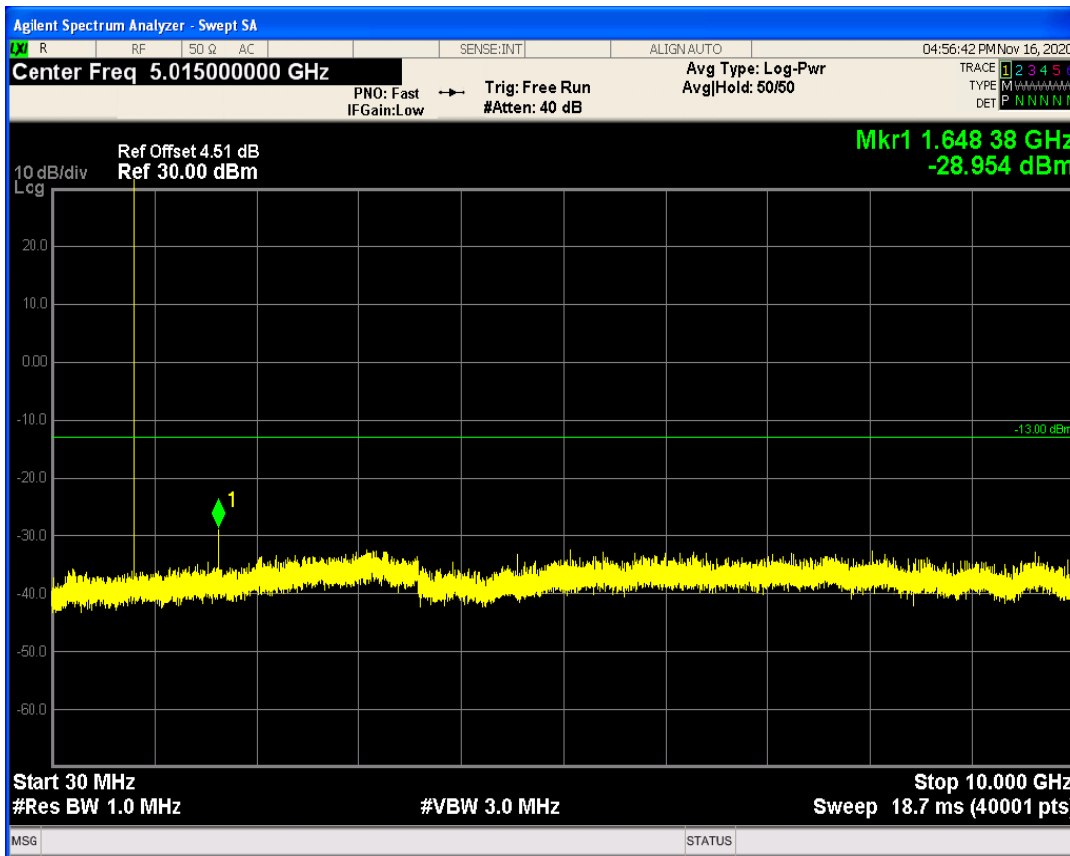


GPRS850 Channel=251

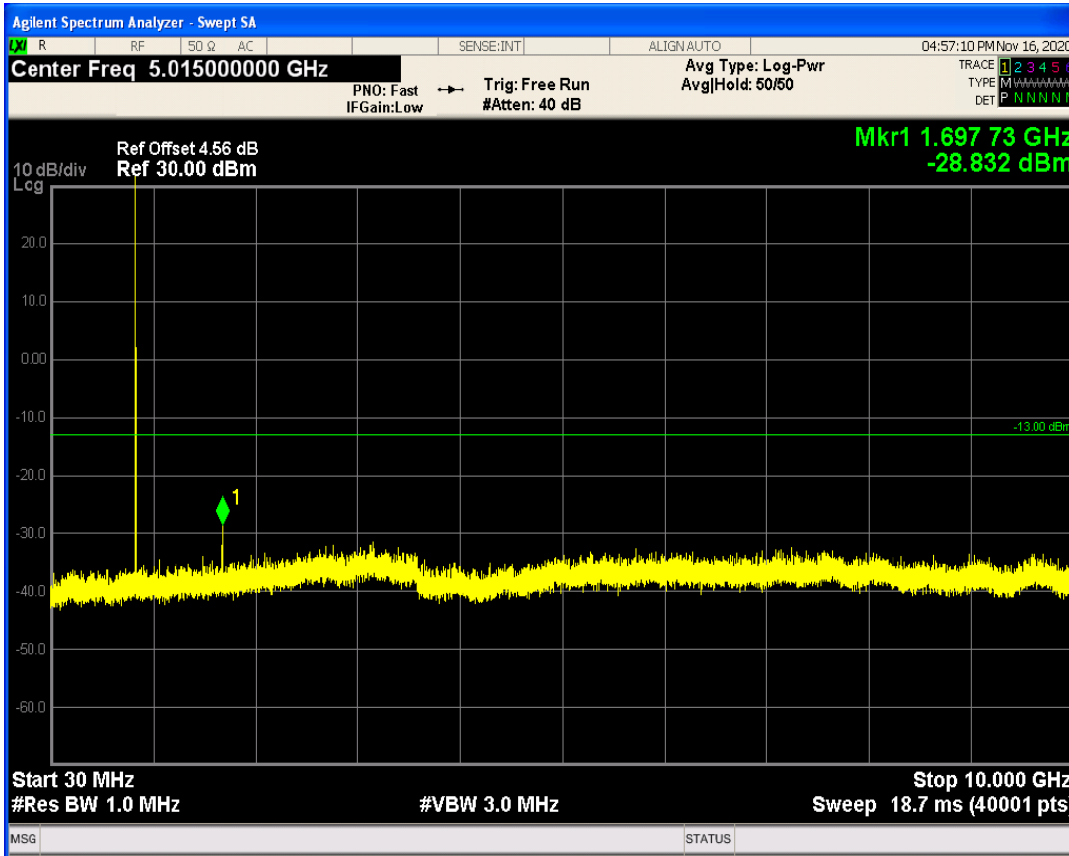


GPRS850 Channel=189

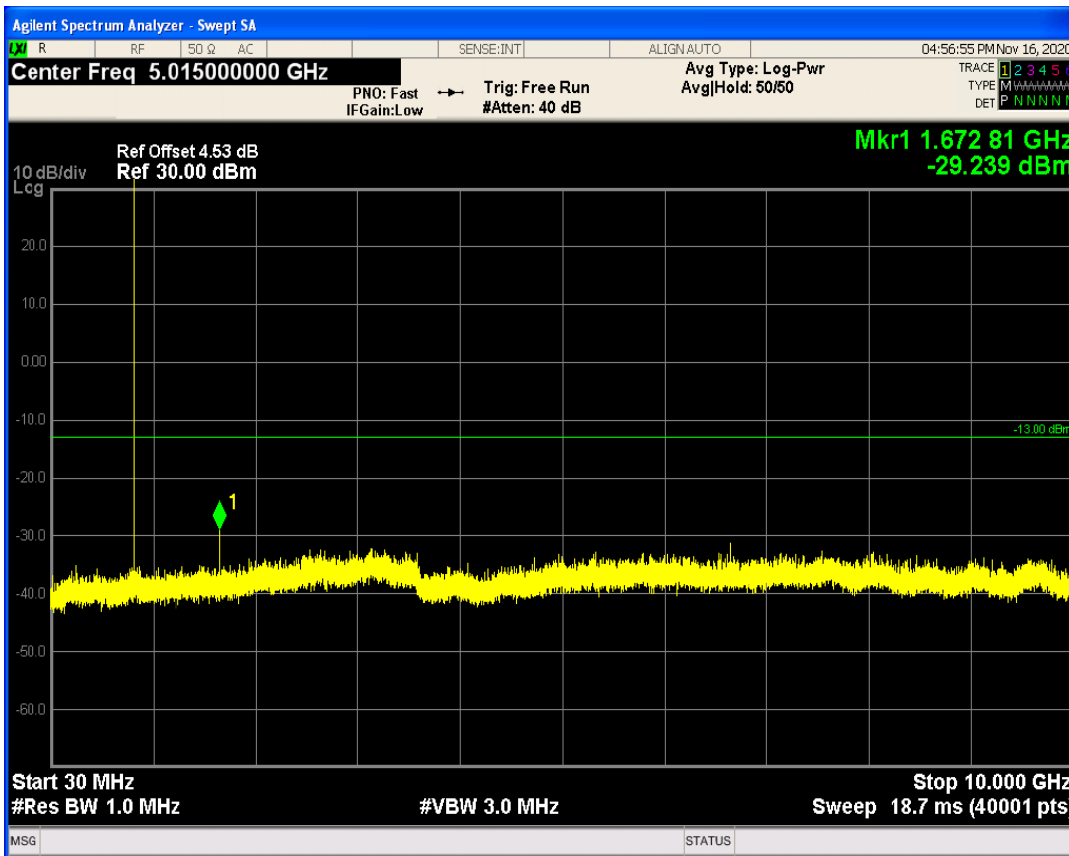


GPRS1900 Channel=512

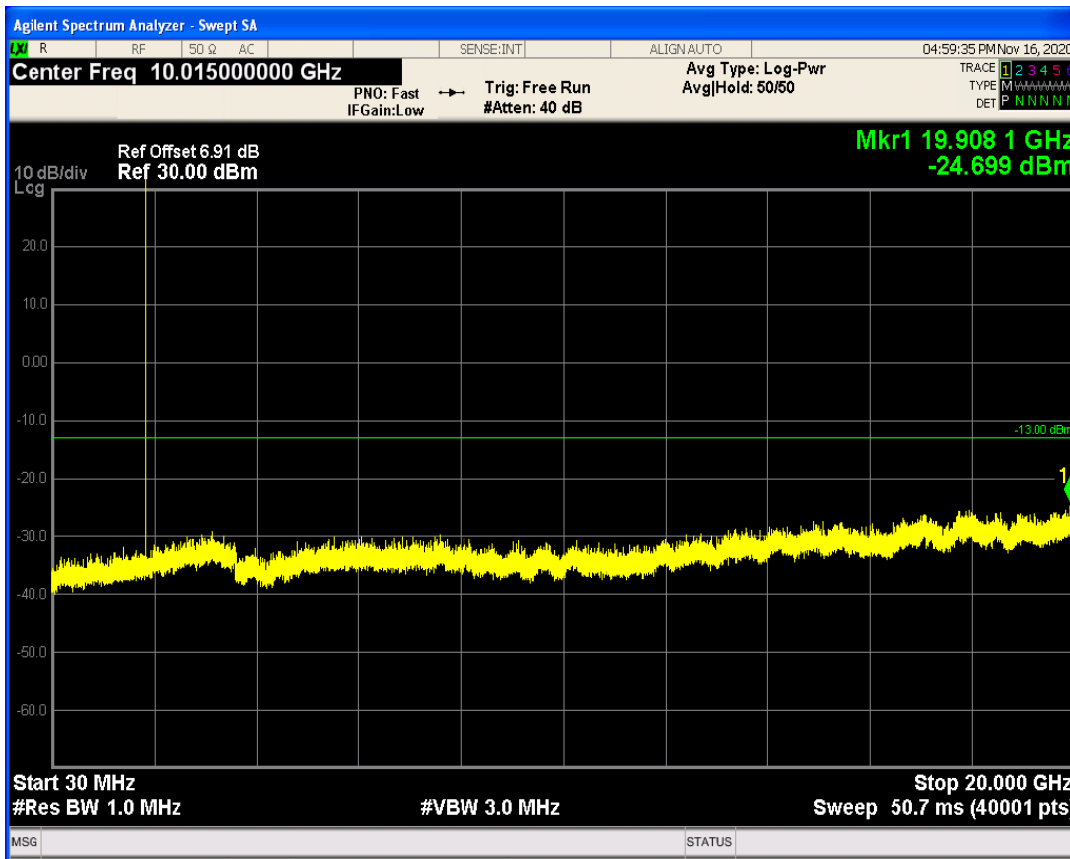


GPRS1900 Channel=661

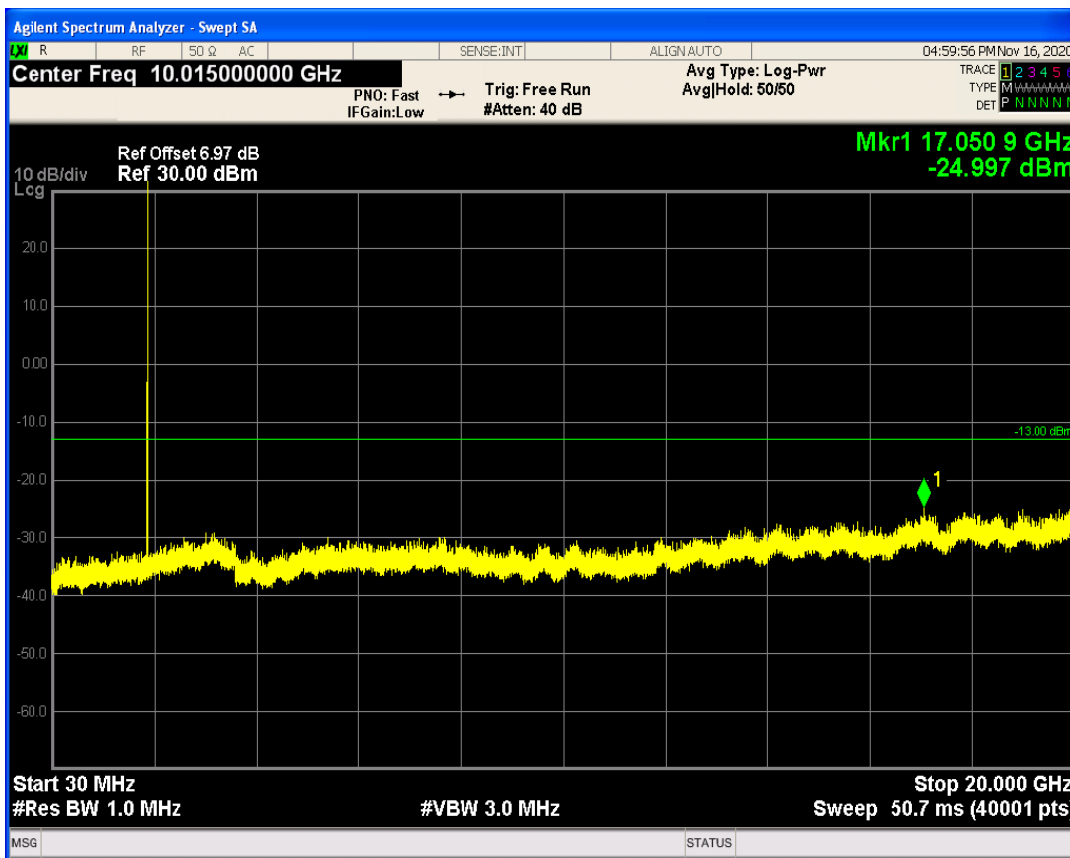


GPRS1900 Channel=810

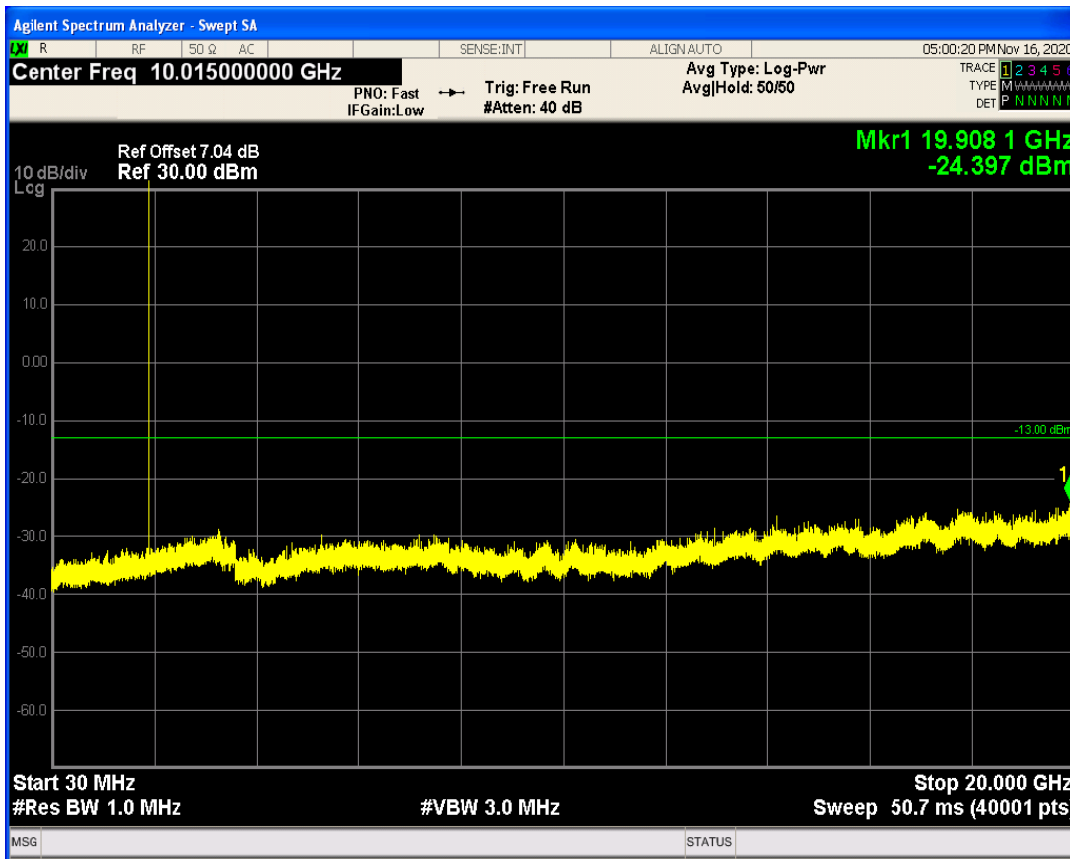


EGPRS850 Channel=128

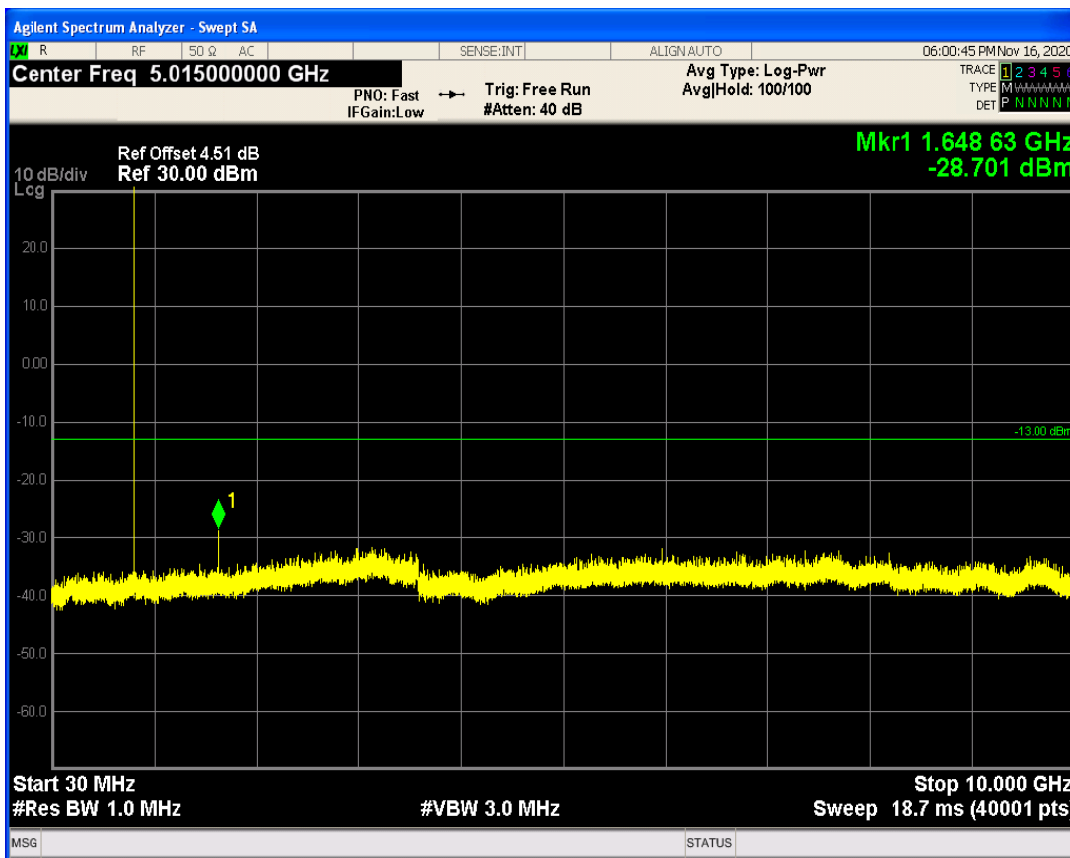


EGPRS850 Channel=251

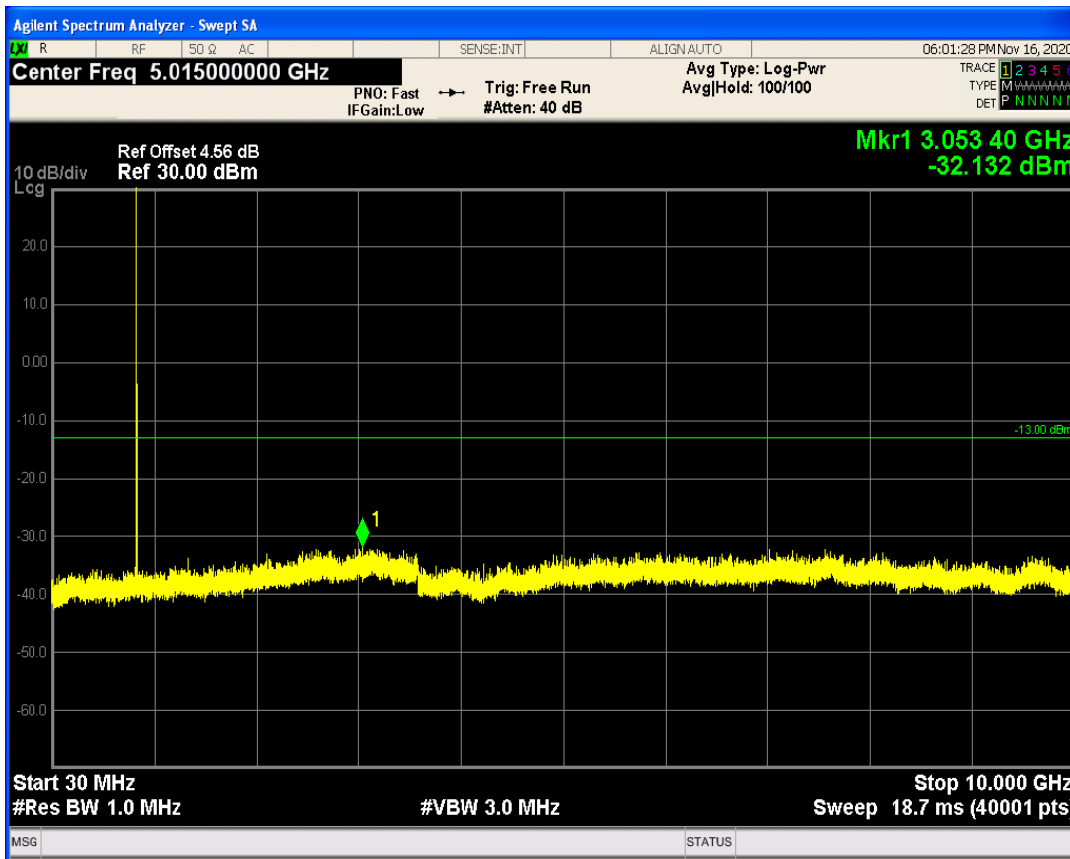


EGPRS850 Channel=189

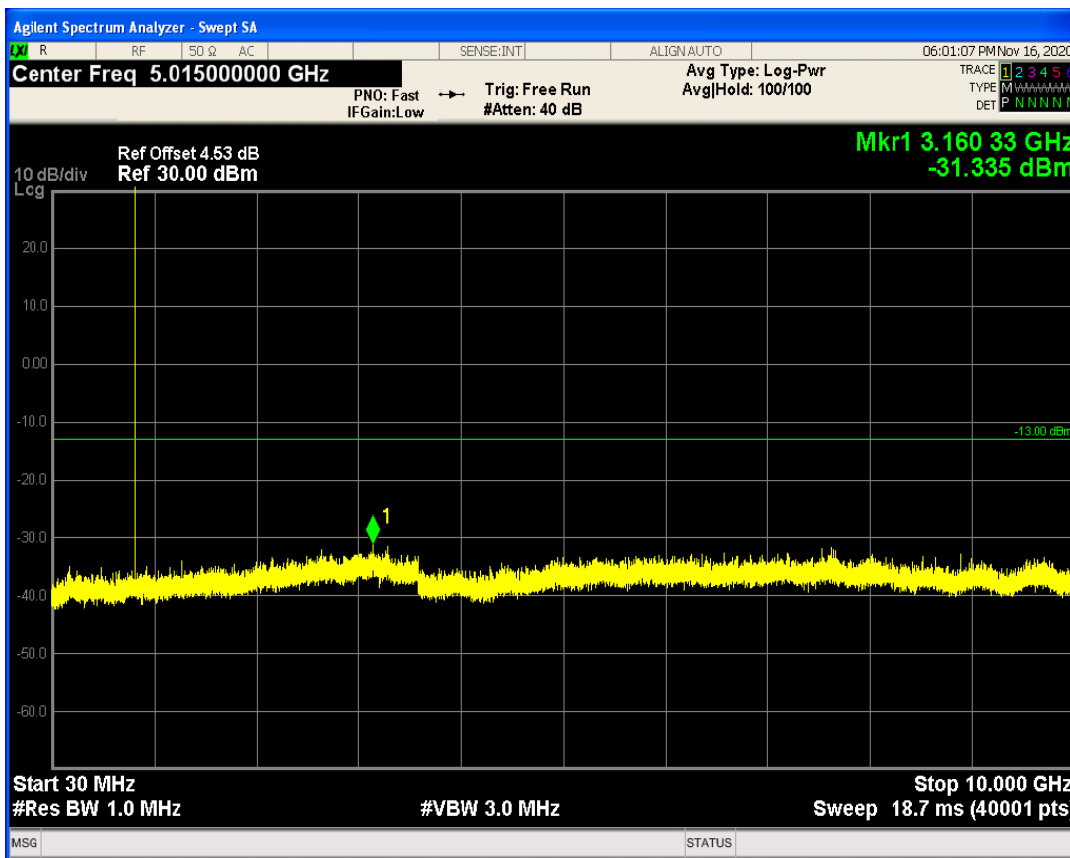


EGPRS1900 Channel=512

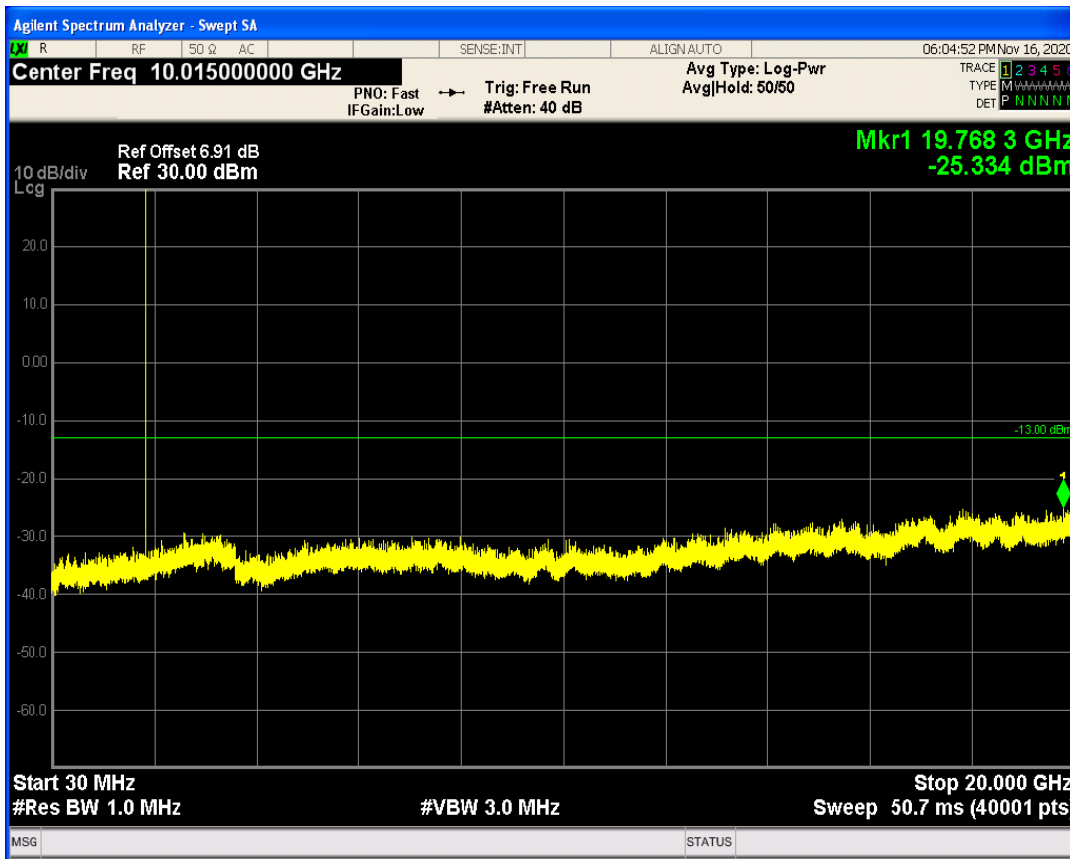


EGPRS1900 Channel=661

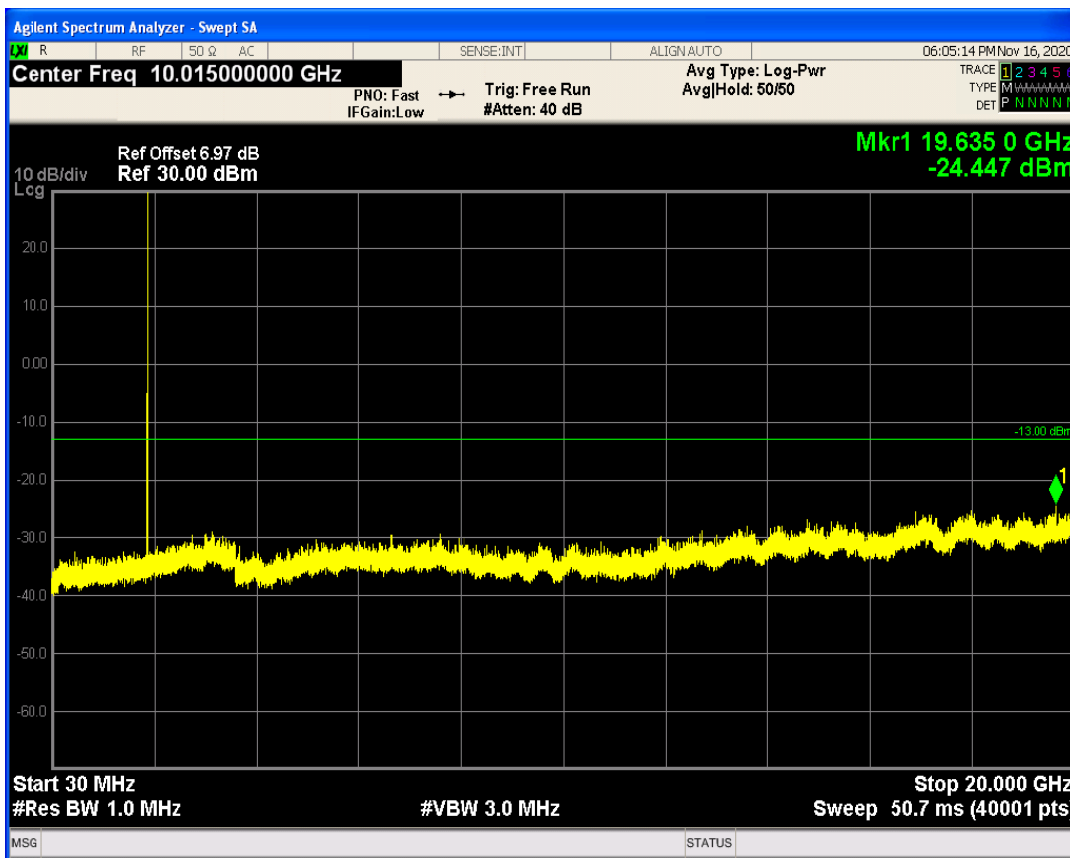


EGPRS1900 Channel=810

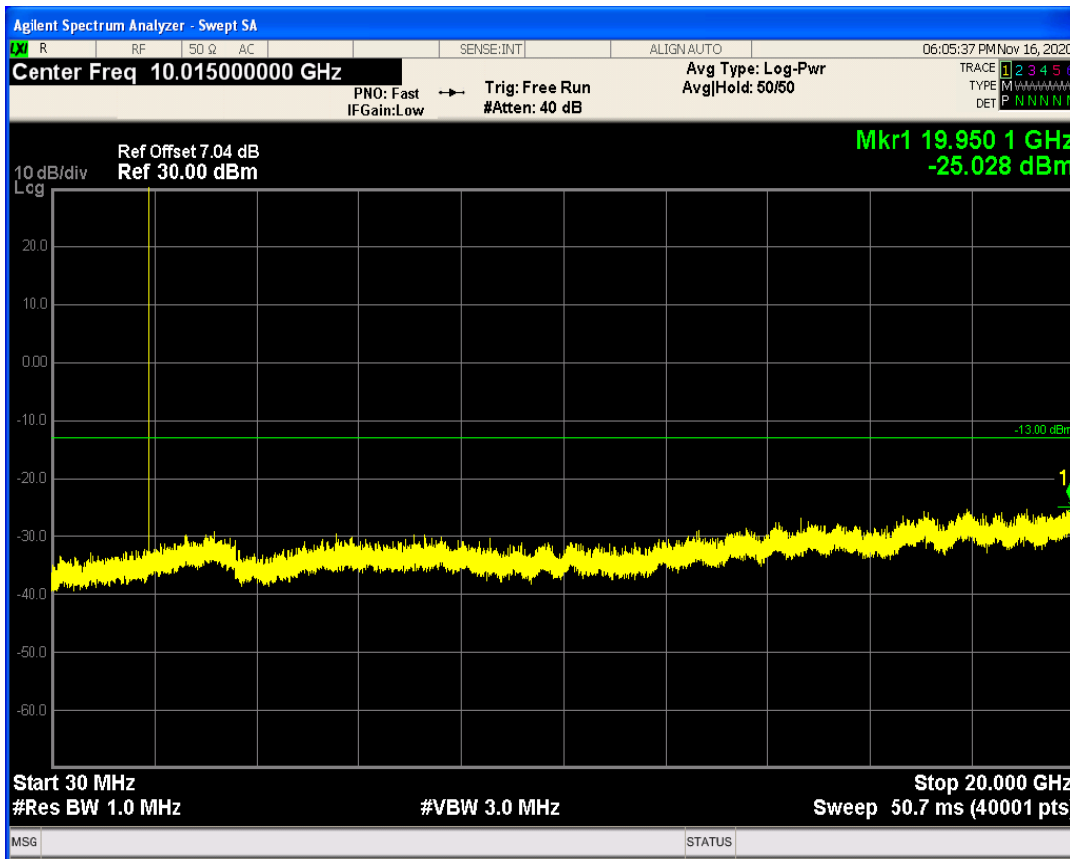


WCDMA Band2 Channel=9262

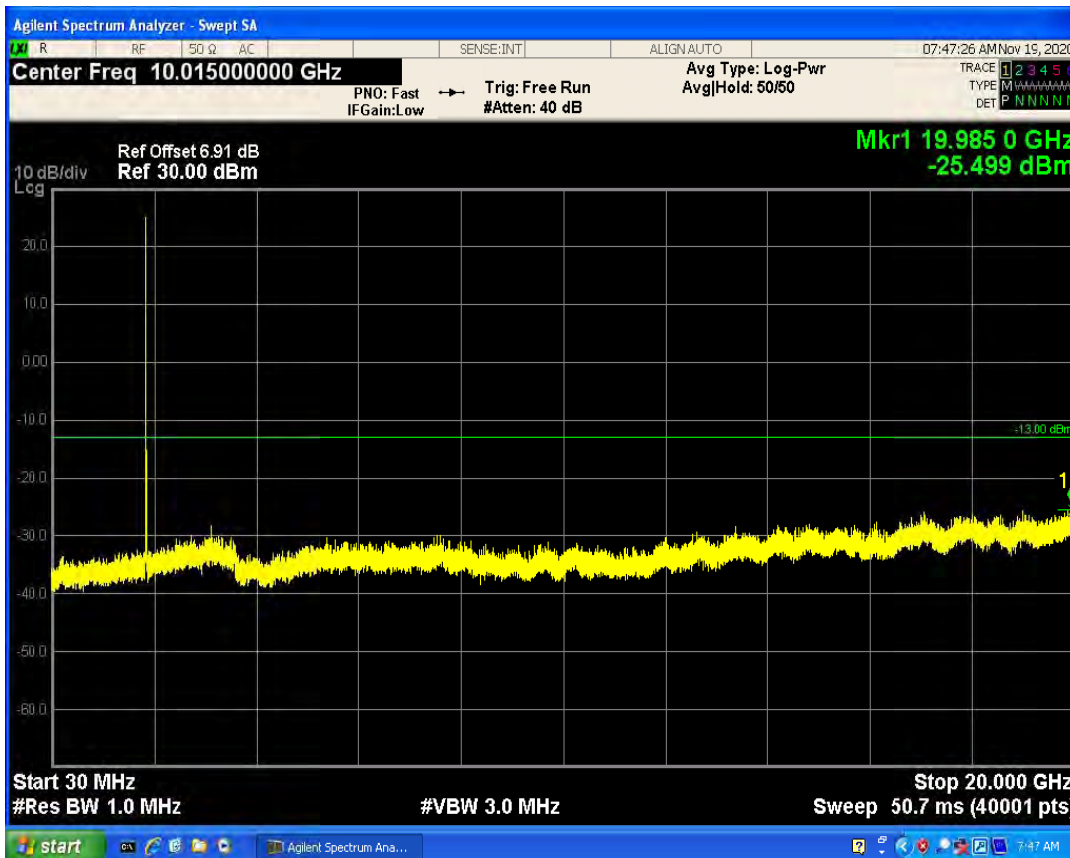


WCDMA Band2 Channel=9538

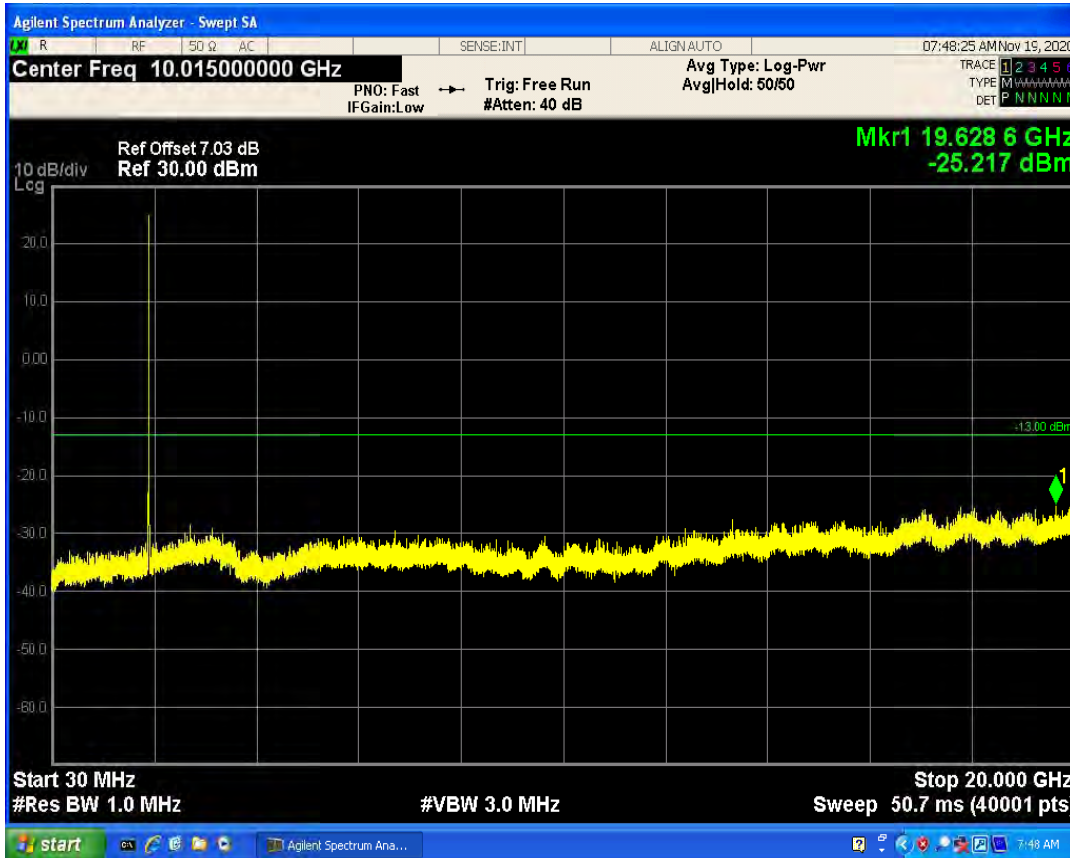


WCDMA Band2 Channel=9400

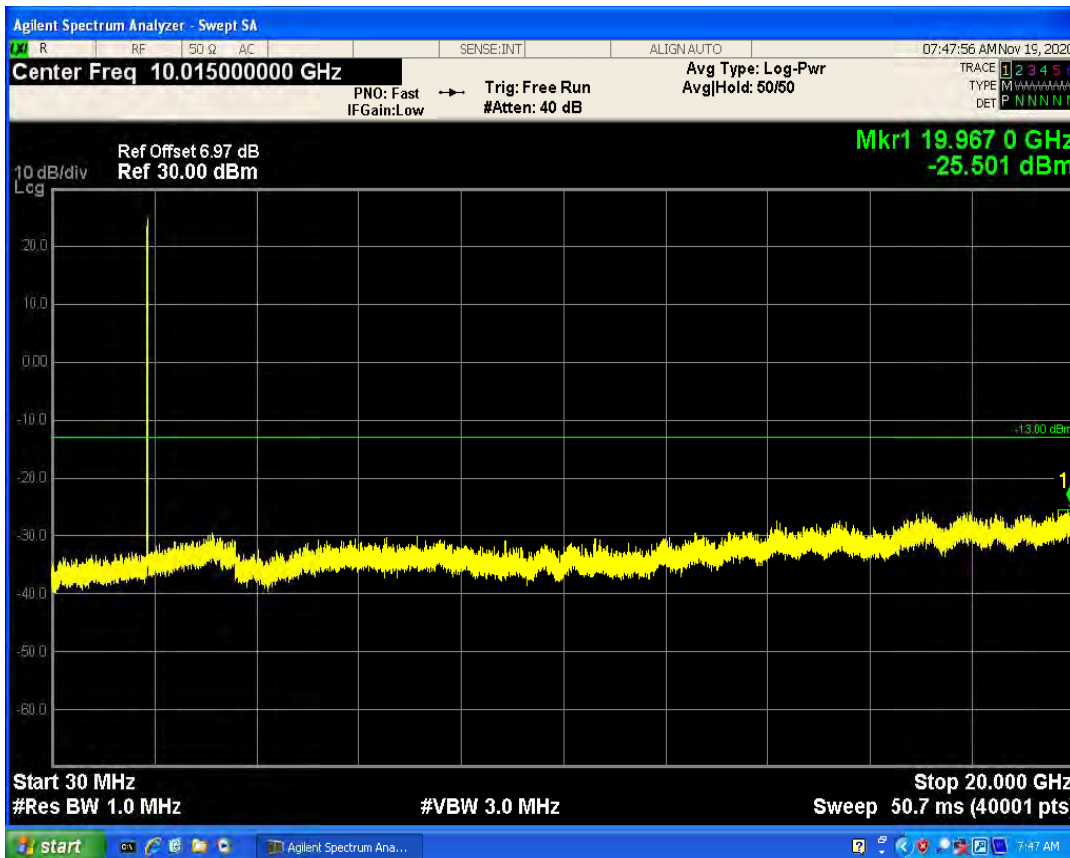


WCDMA Band4 Channel=1412

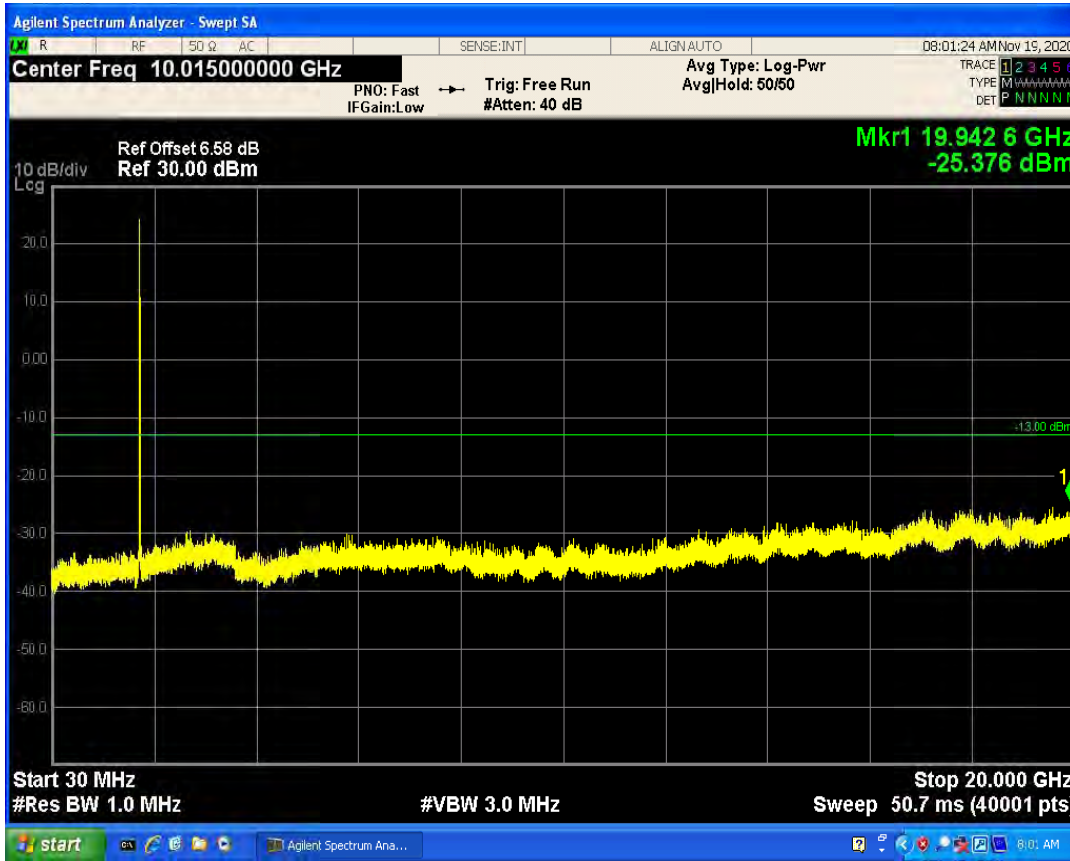


WCDMA Band4 Channel=1312

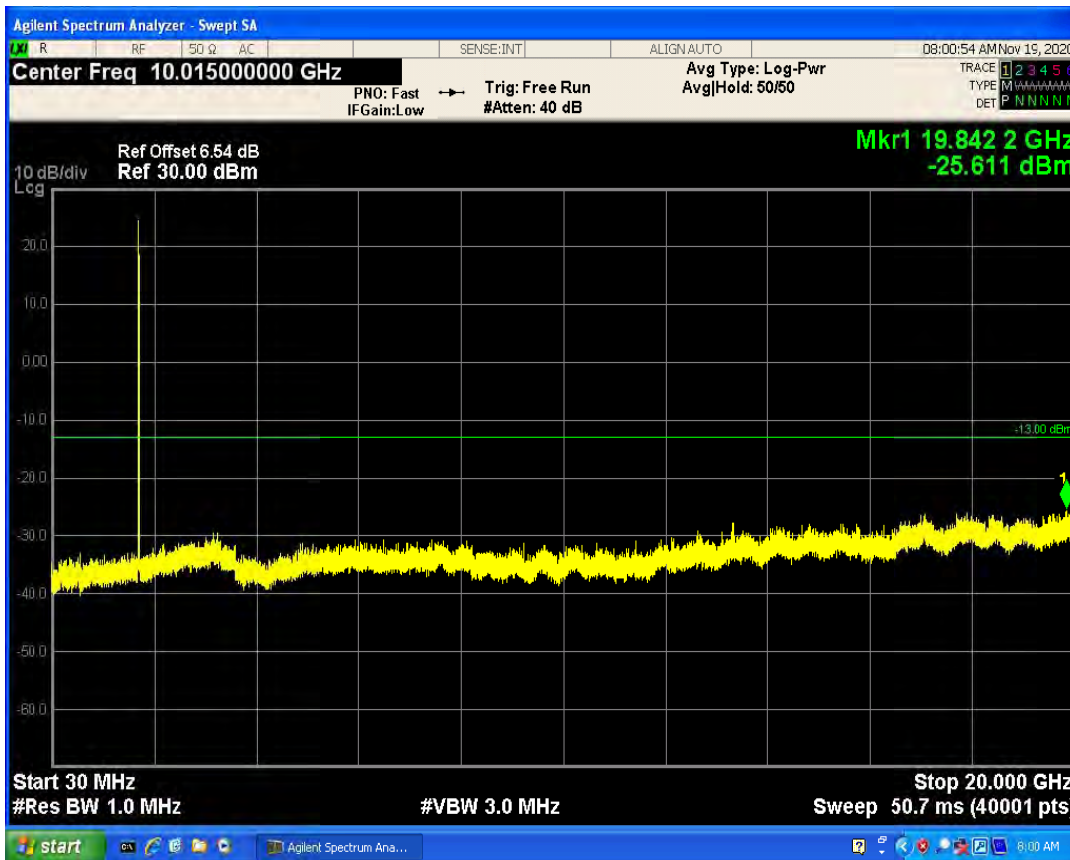


WCDMA Band4 Channel=1513

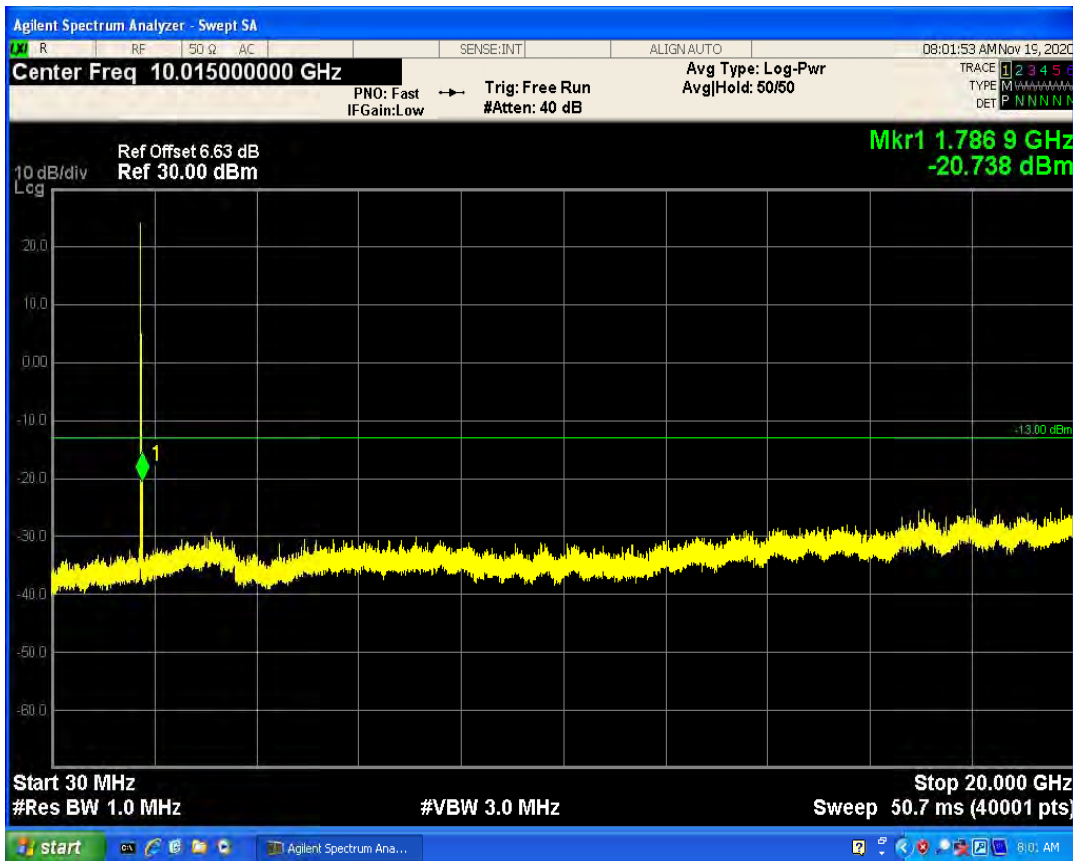


WCDMA Band5 Channel=4132

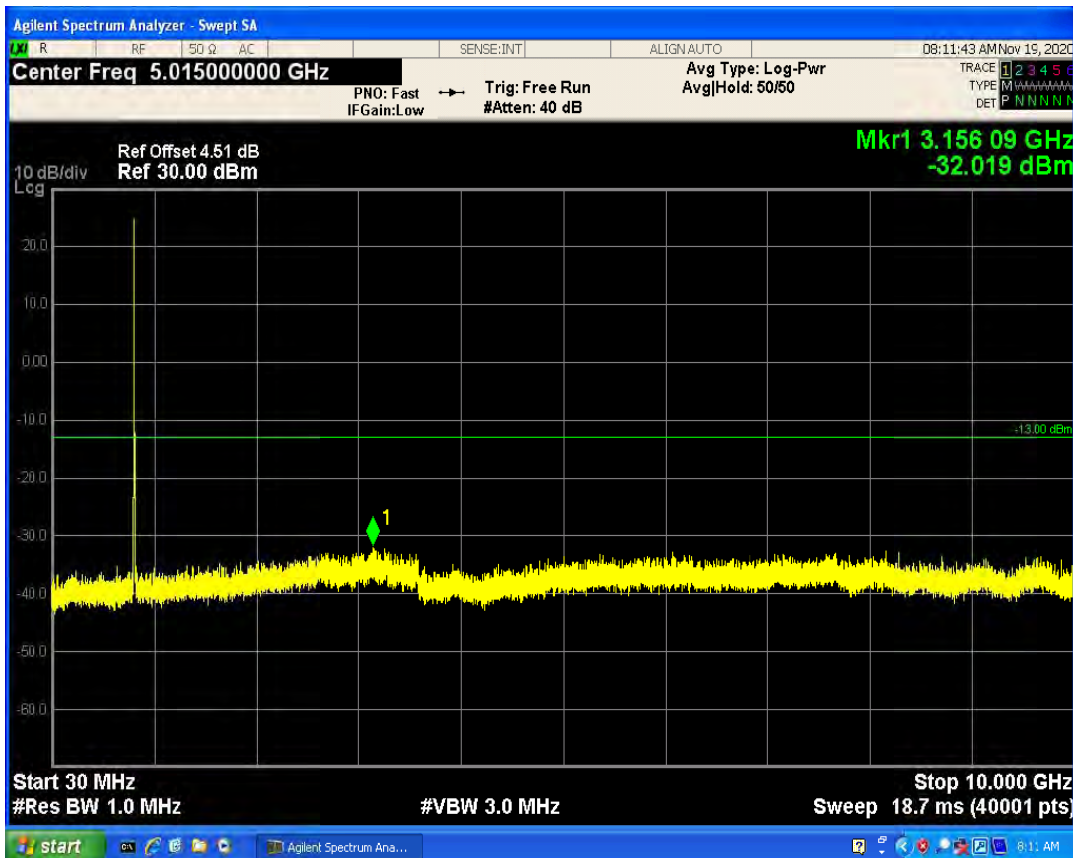


WCDMA Band5 Channel=4182

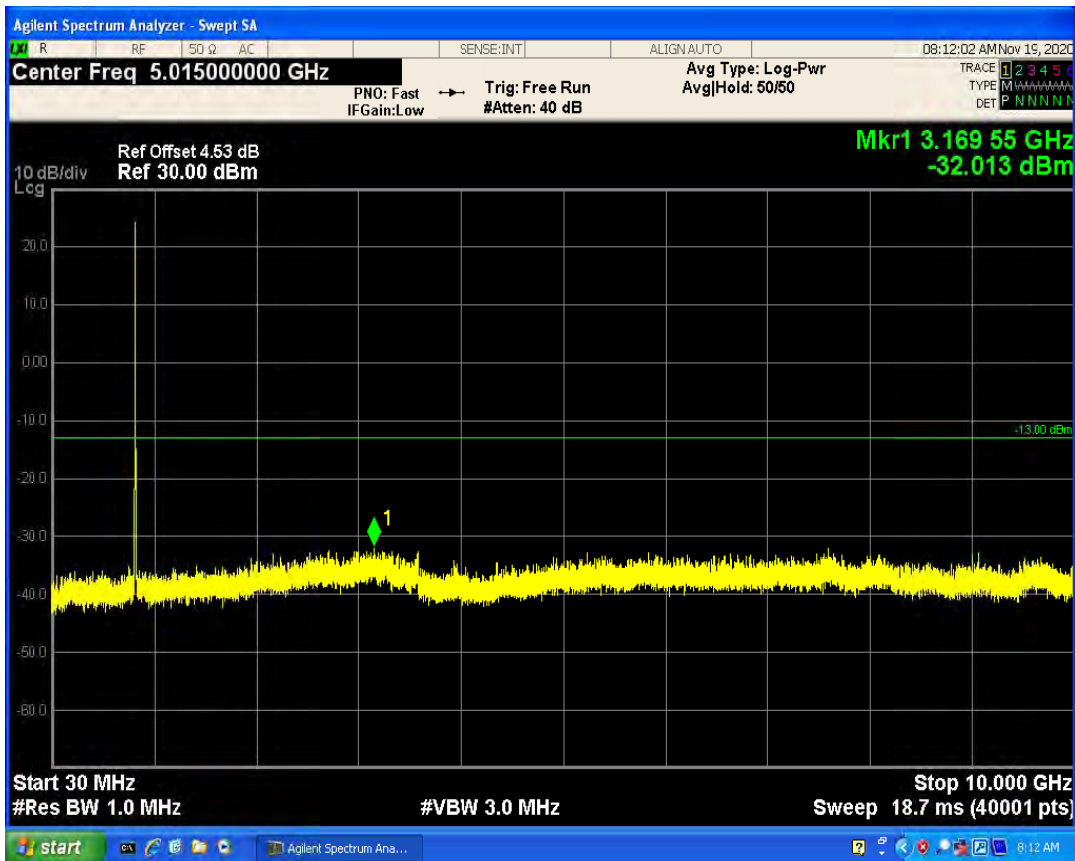


WCDMA Band5 Channel=4233

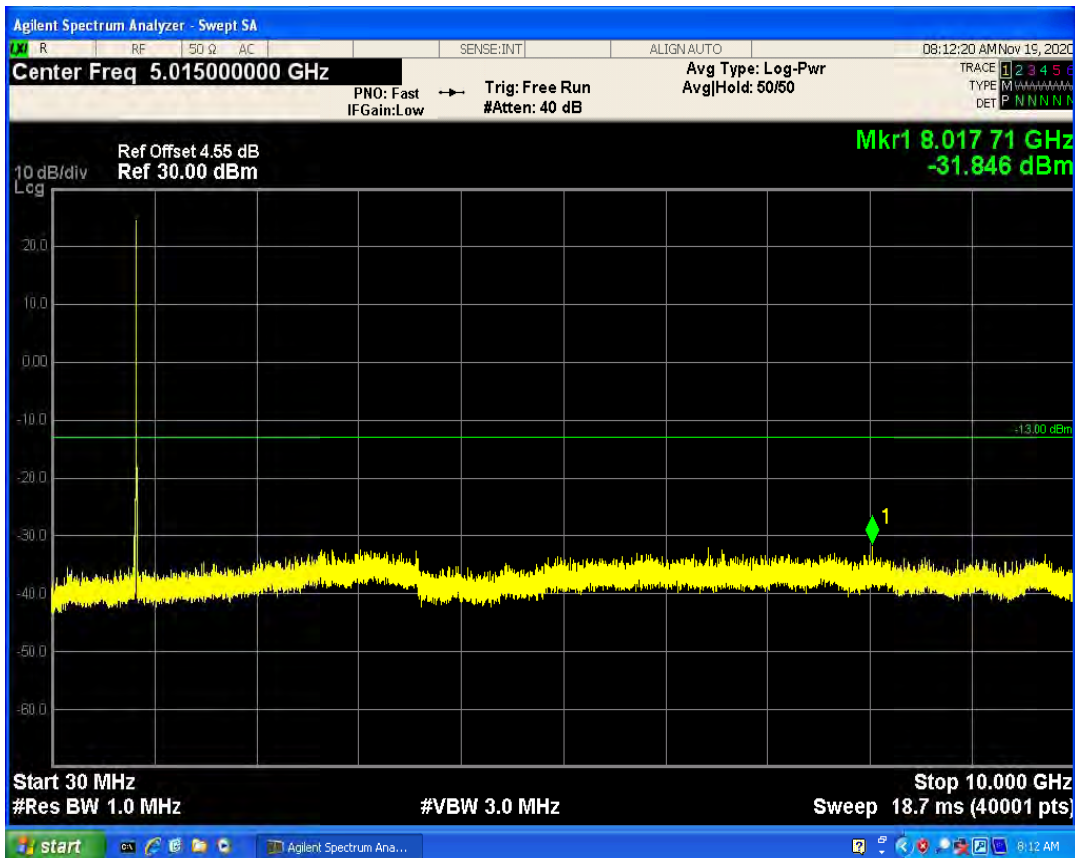


CDMA2000 BC0 1xRTT Channel=1013

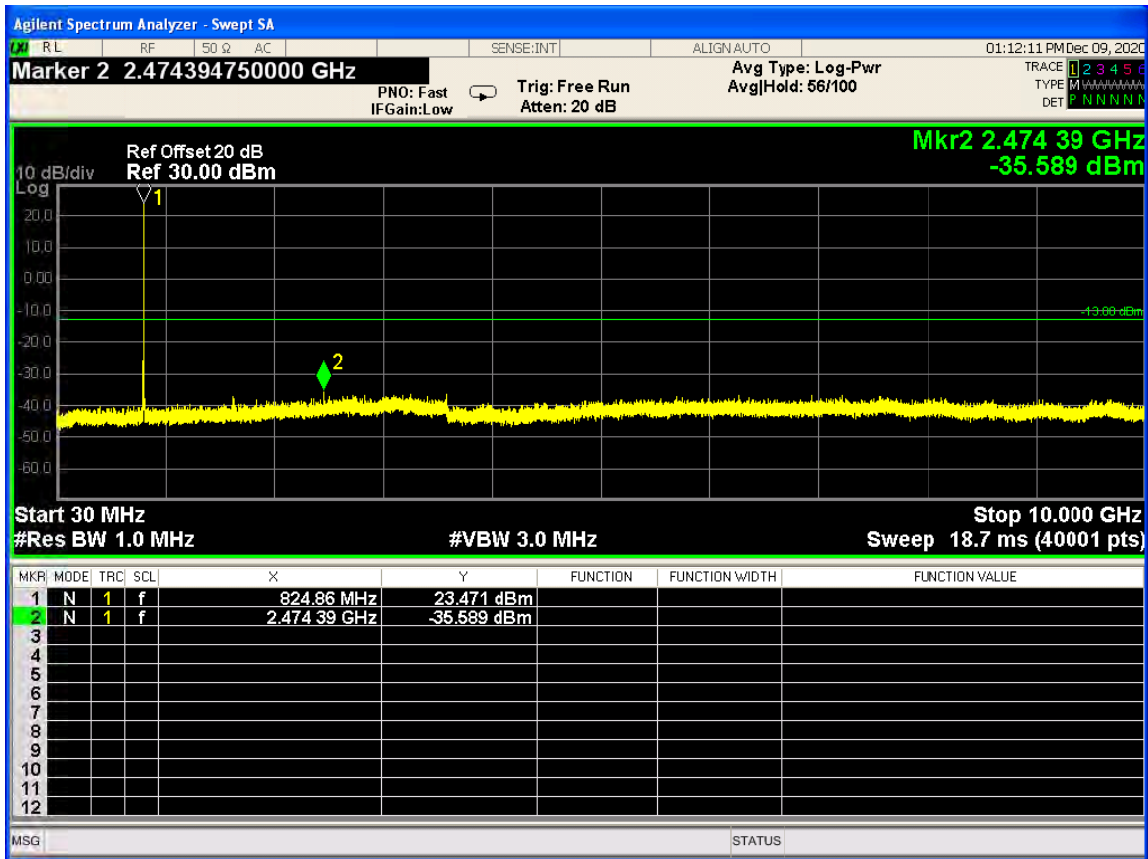


CDMA2000 BC0 1xRTT Channel=384

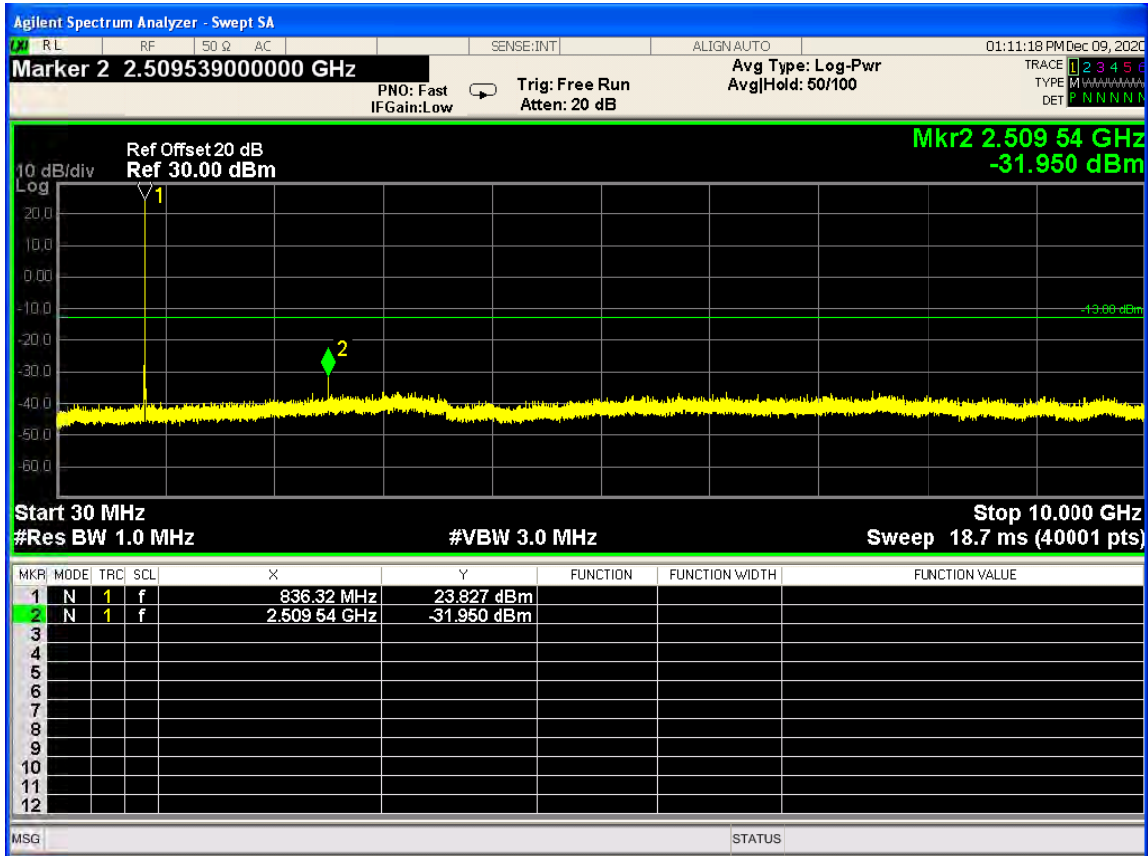


CDMA2000 BC0 1xRTT Channel=777

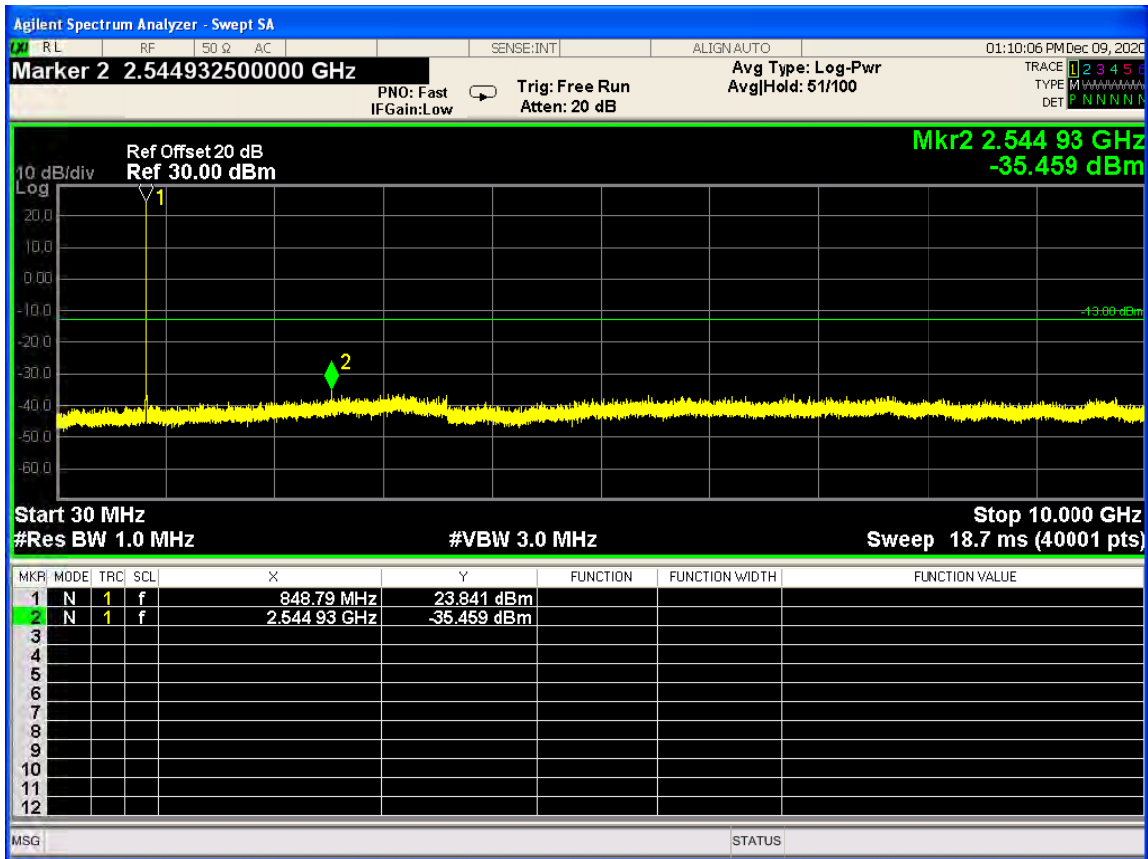


CDMA2000 BC0 1xEV-Do Rel.A Channel=1013

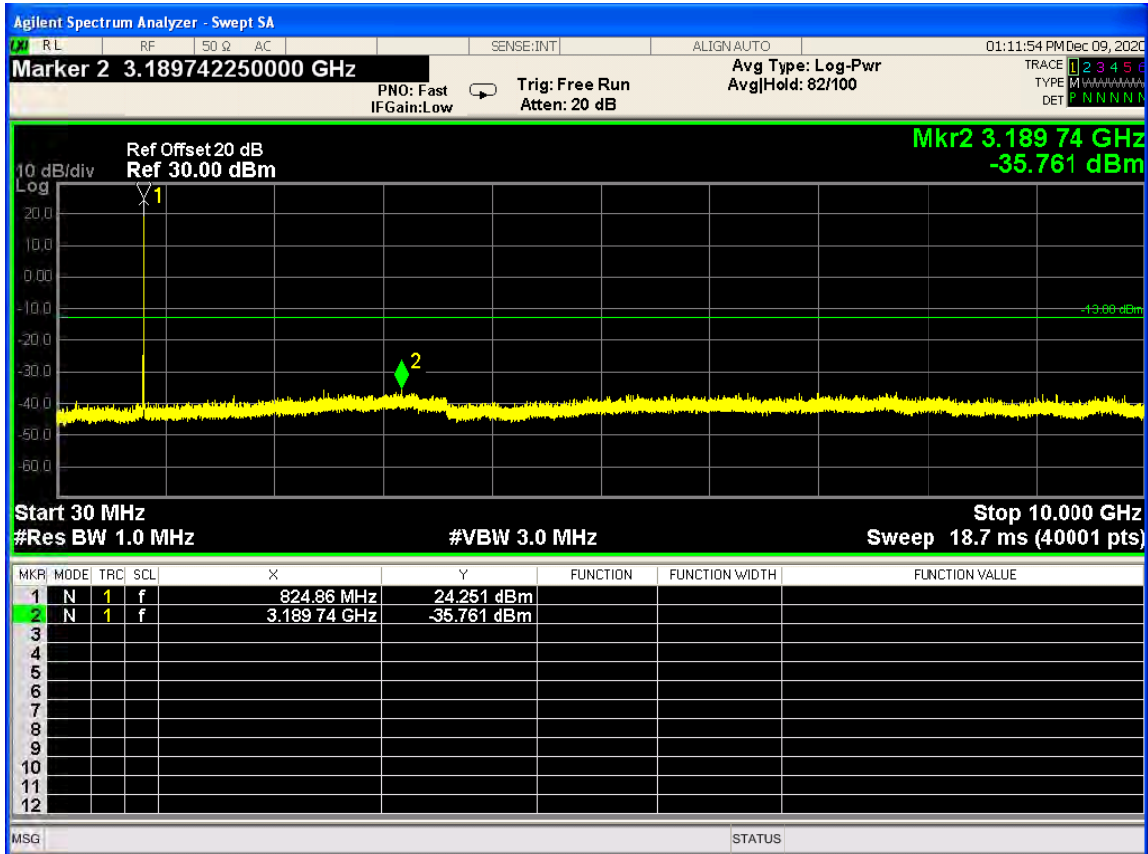


CDMA2000 BC0 1xEV-Do Rel.A Channel=384

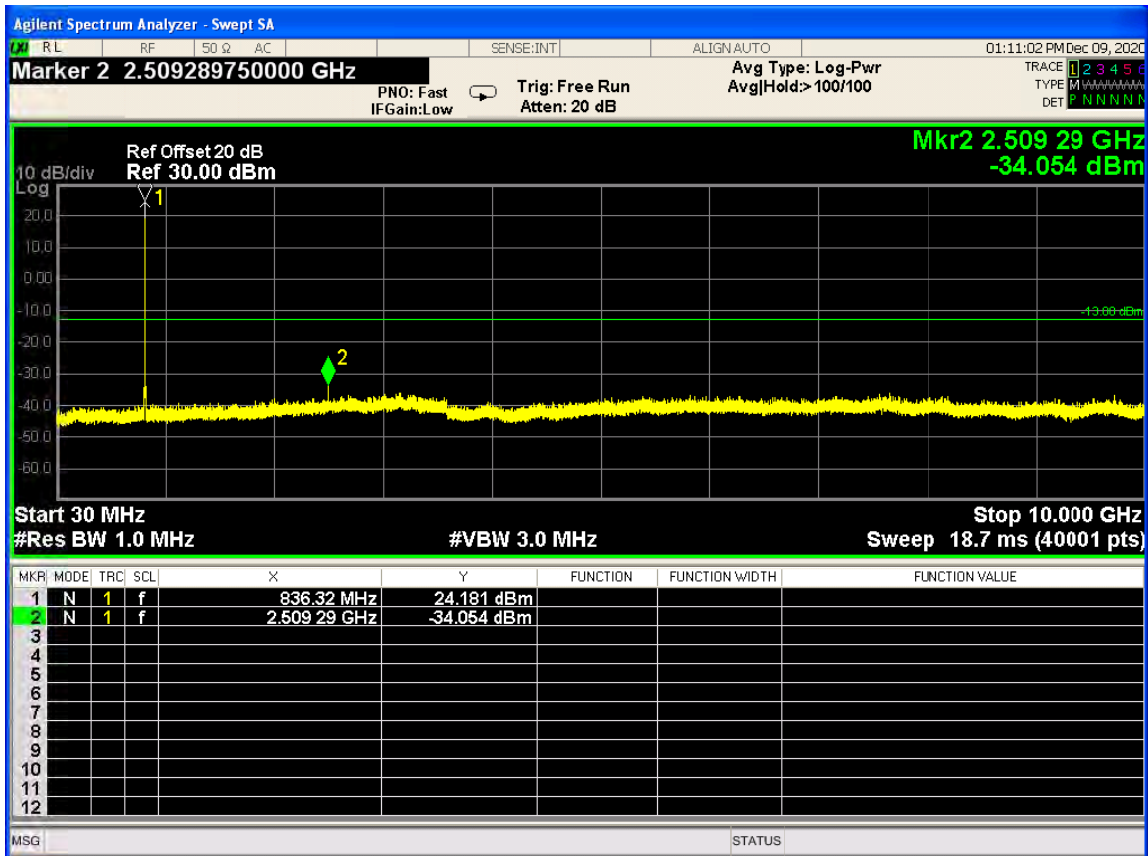


CDMA2000 BC0 1xEV-Do Rel.A Channel=777

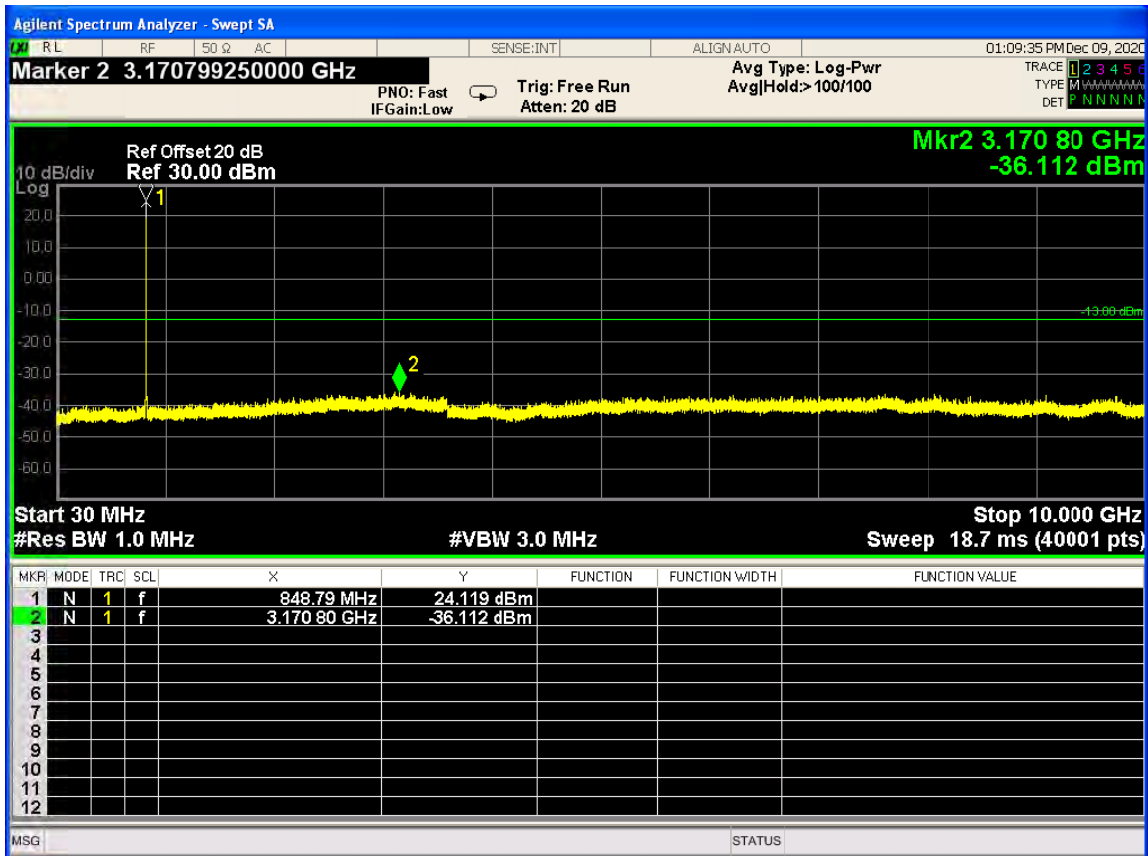


CDMA2000 BC1 1xRTT Channel=25

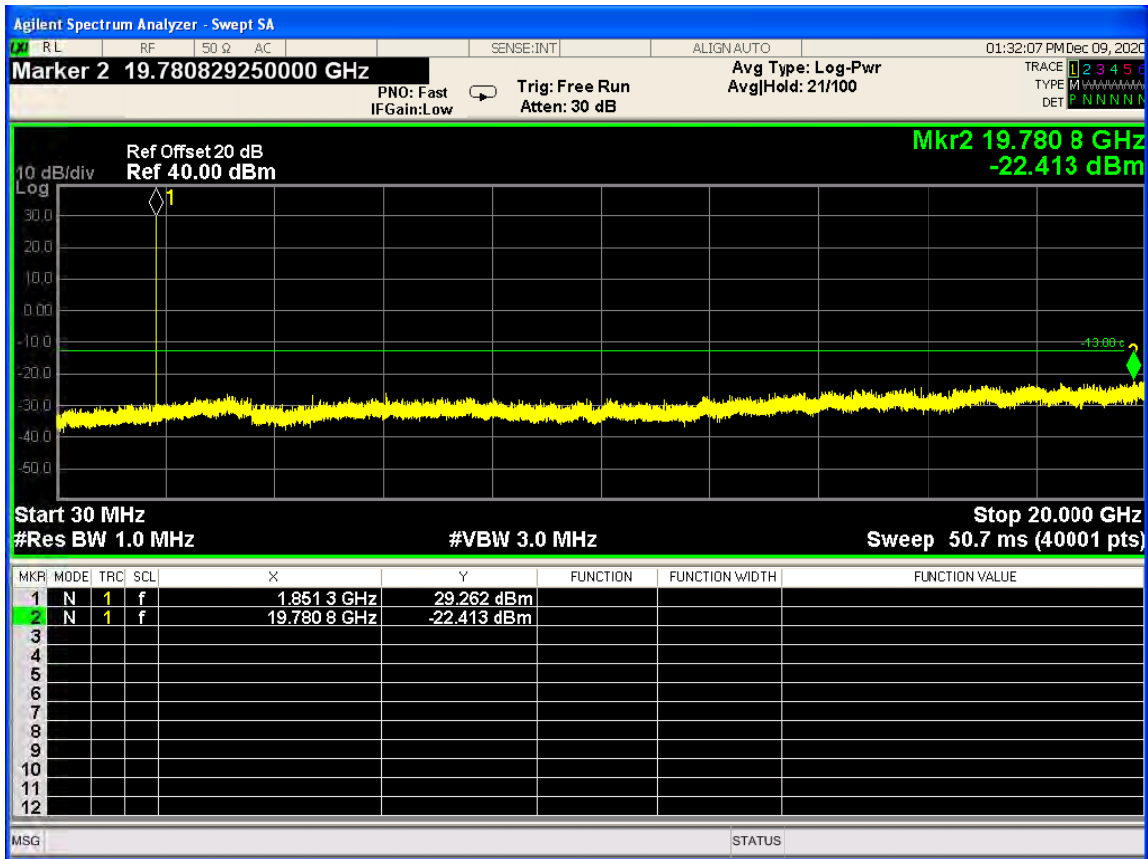


CDMA2000 BC1 1xRTT Channel=600

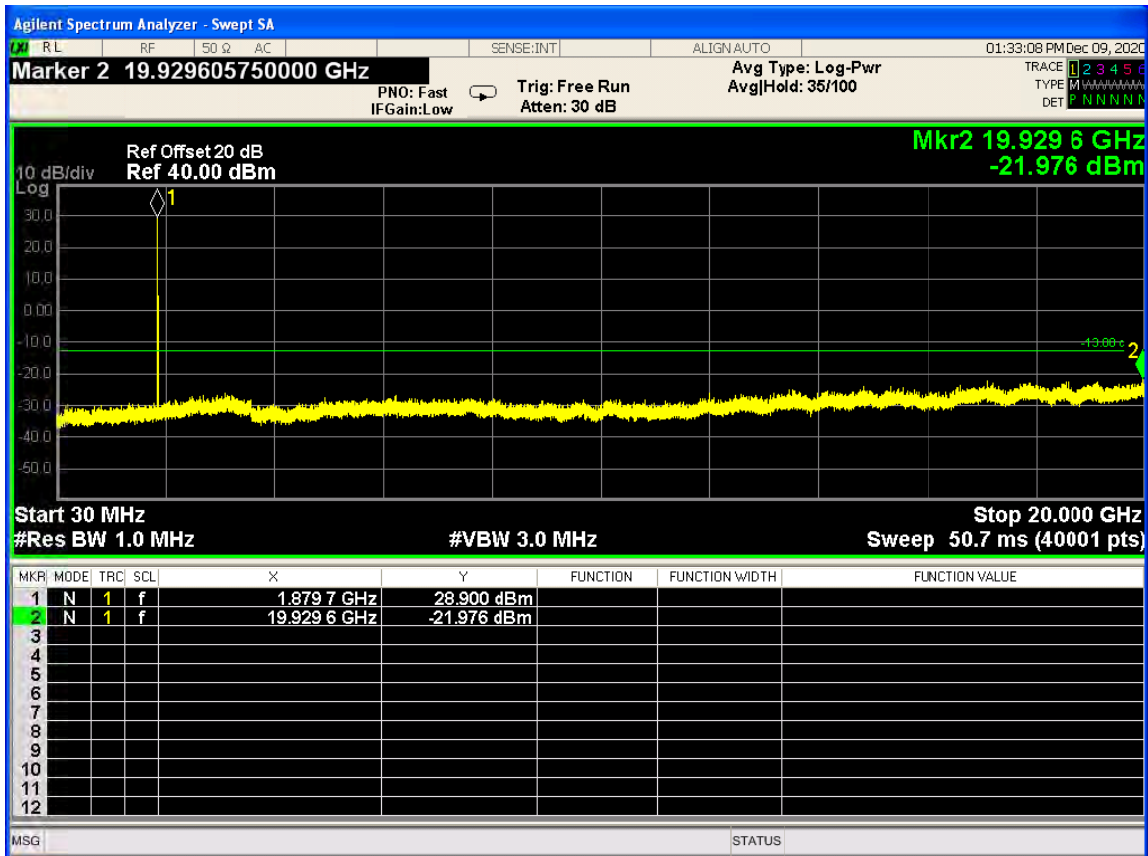


CDMA2000 BC1 1xRTT Channel=1175

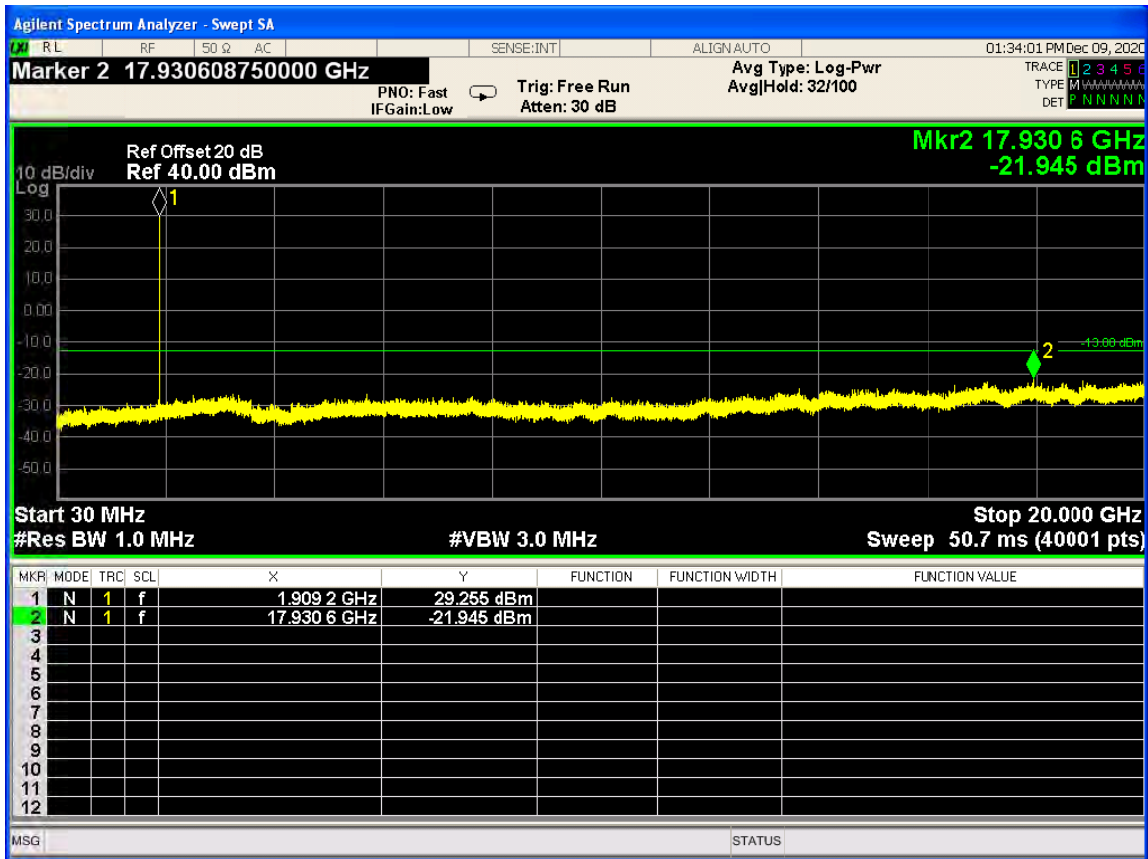


CDMA2000 BC1 1xEV-Do Rel.A Channel=25

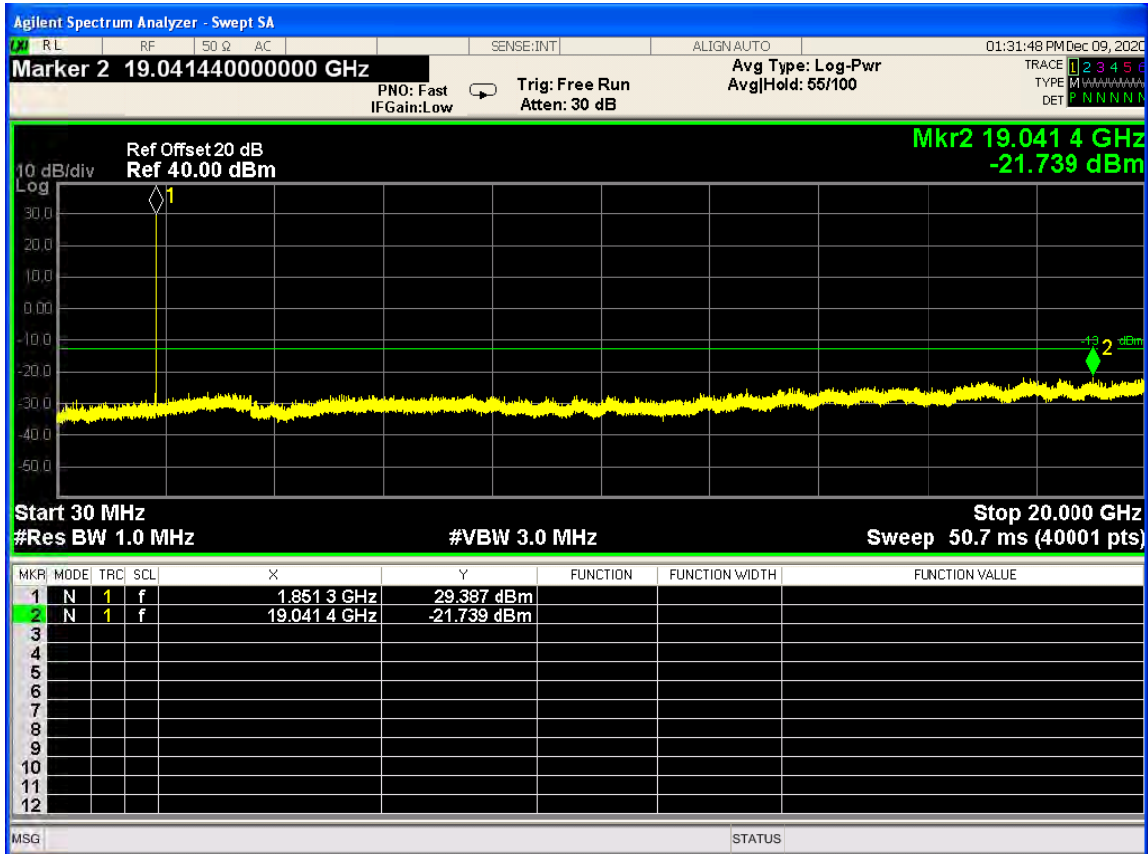


CDMA2000 BC1 1xEV-Do Rel.A Channel=600

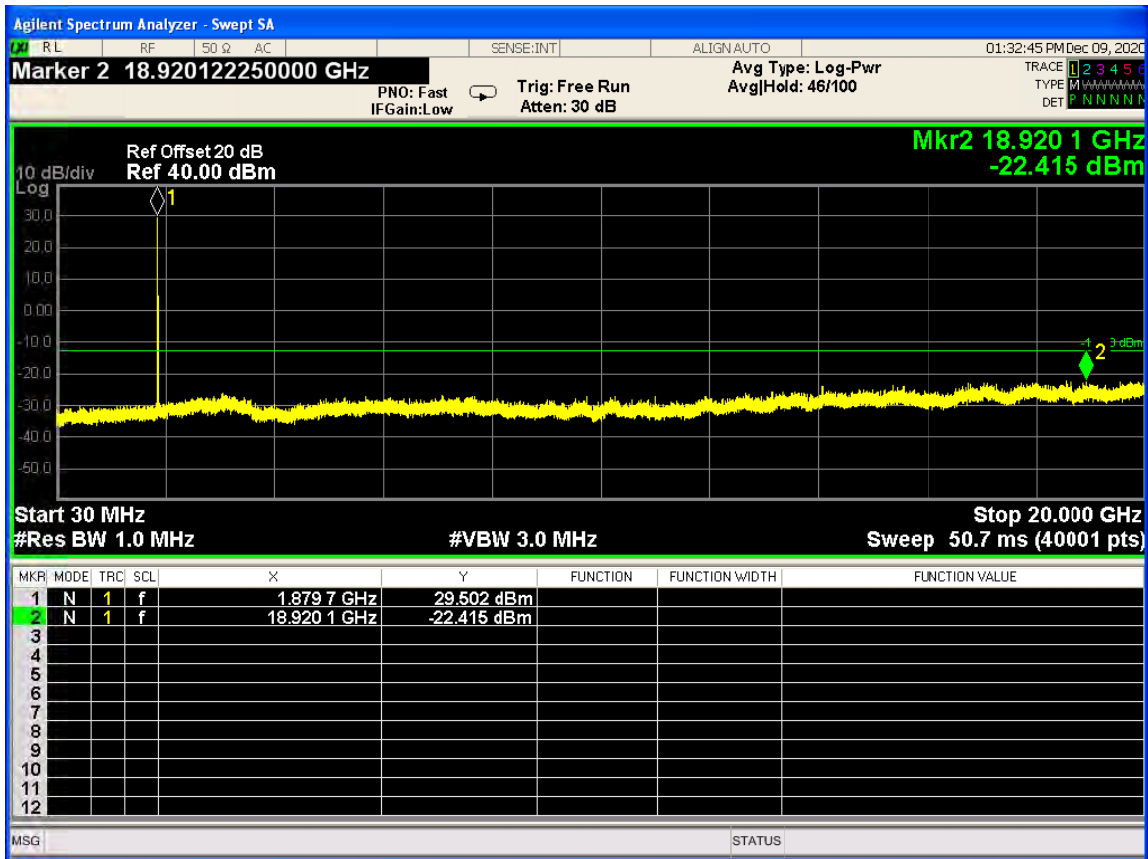


CDMA2000 BC1 1xEV-Do Rel.A Channel=1175

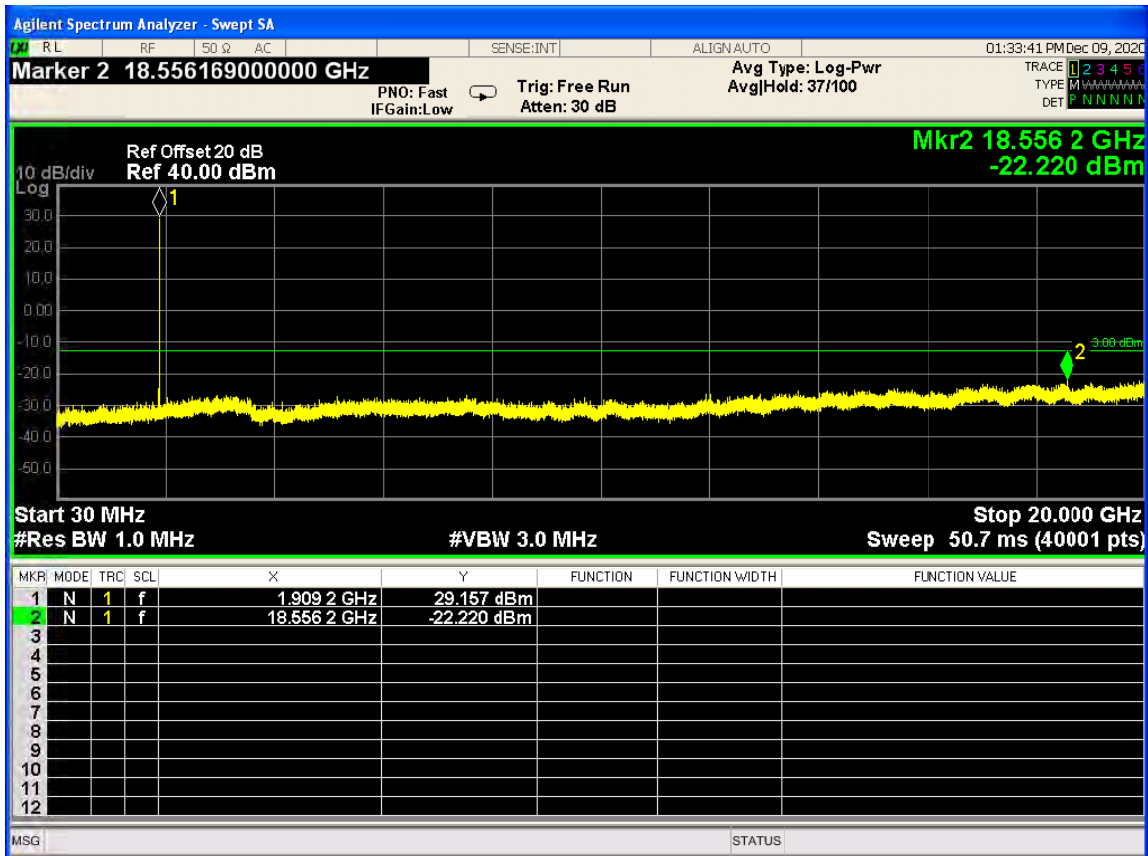


CDMA2000 BC10 1xRTT Channel=450

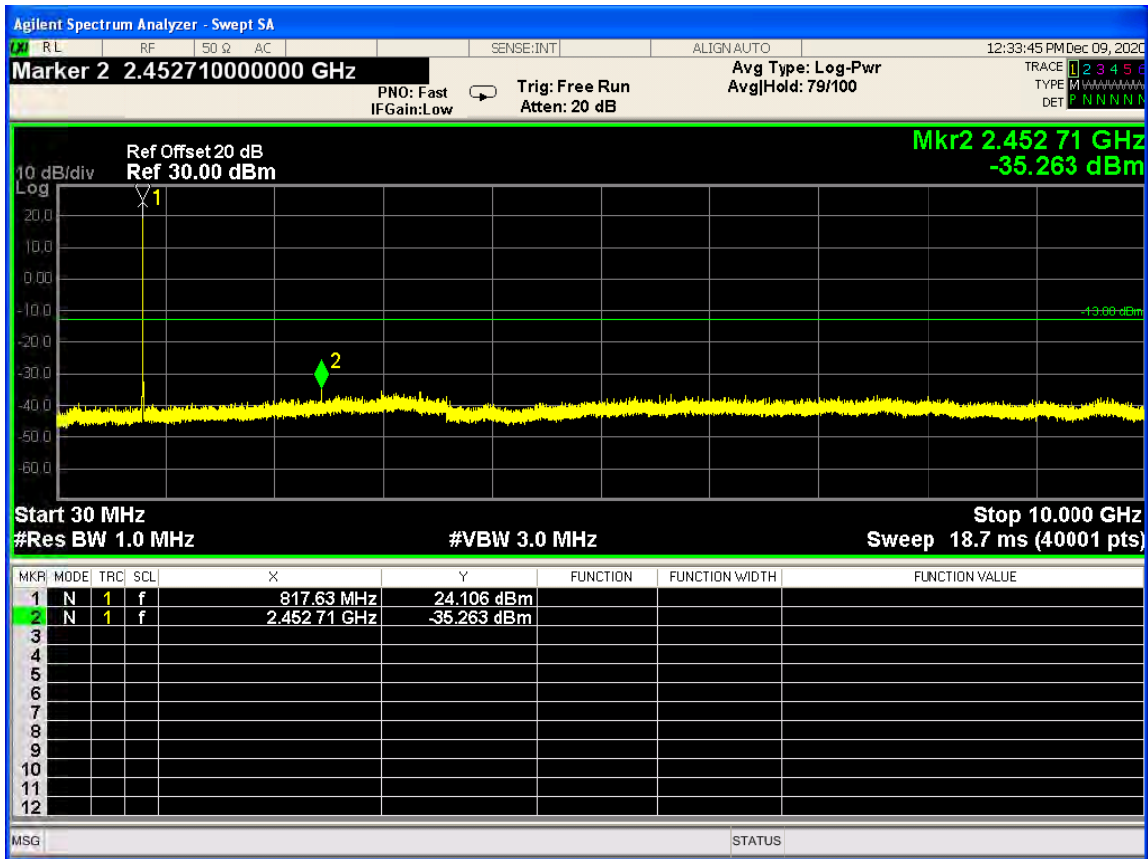


CDMA2000 BC10 1xRTT Channel=560

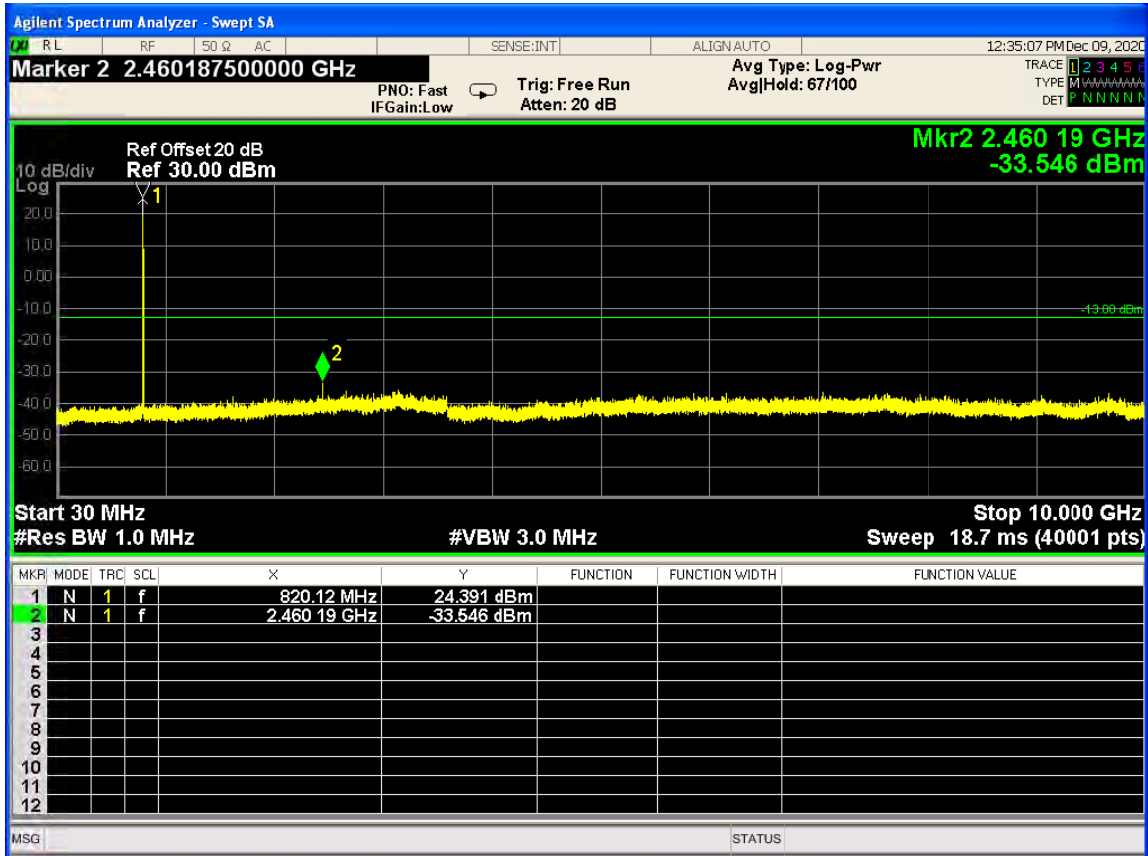


CDMA2000 BC10 1xRTT Channel=670

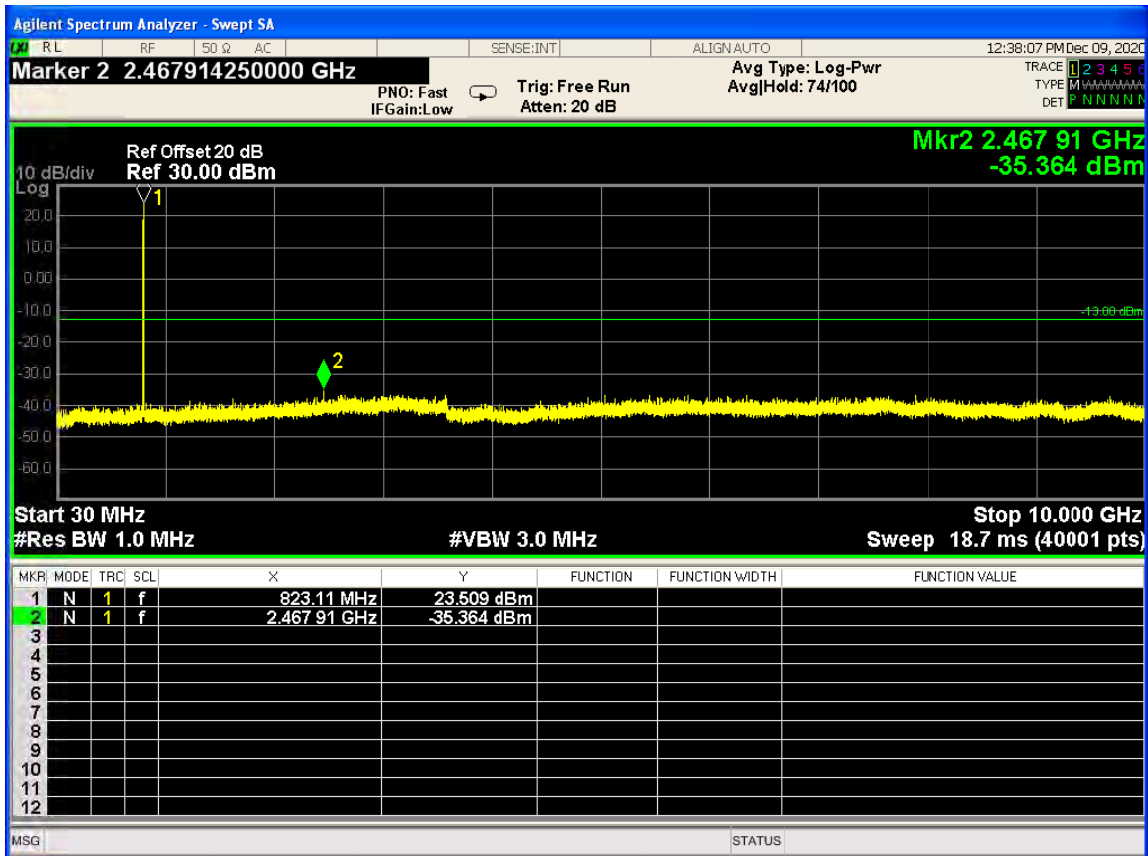

CDMA2000 BC10 1xEV-Do Rel.A Channel=450

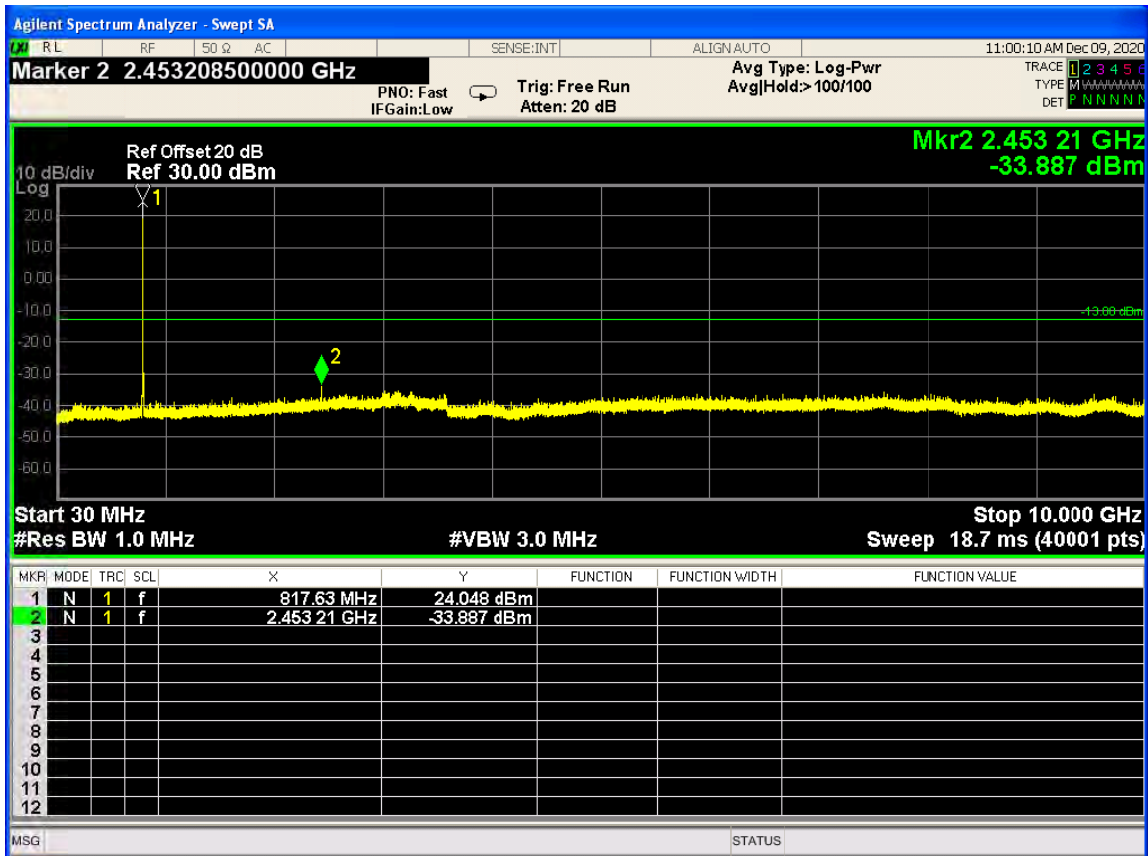

CDMA2000 BC10 1xEV-Do Rel.A Channel=5600

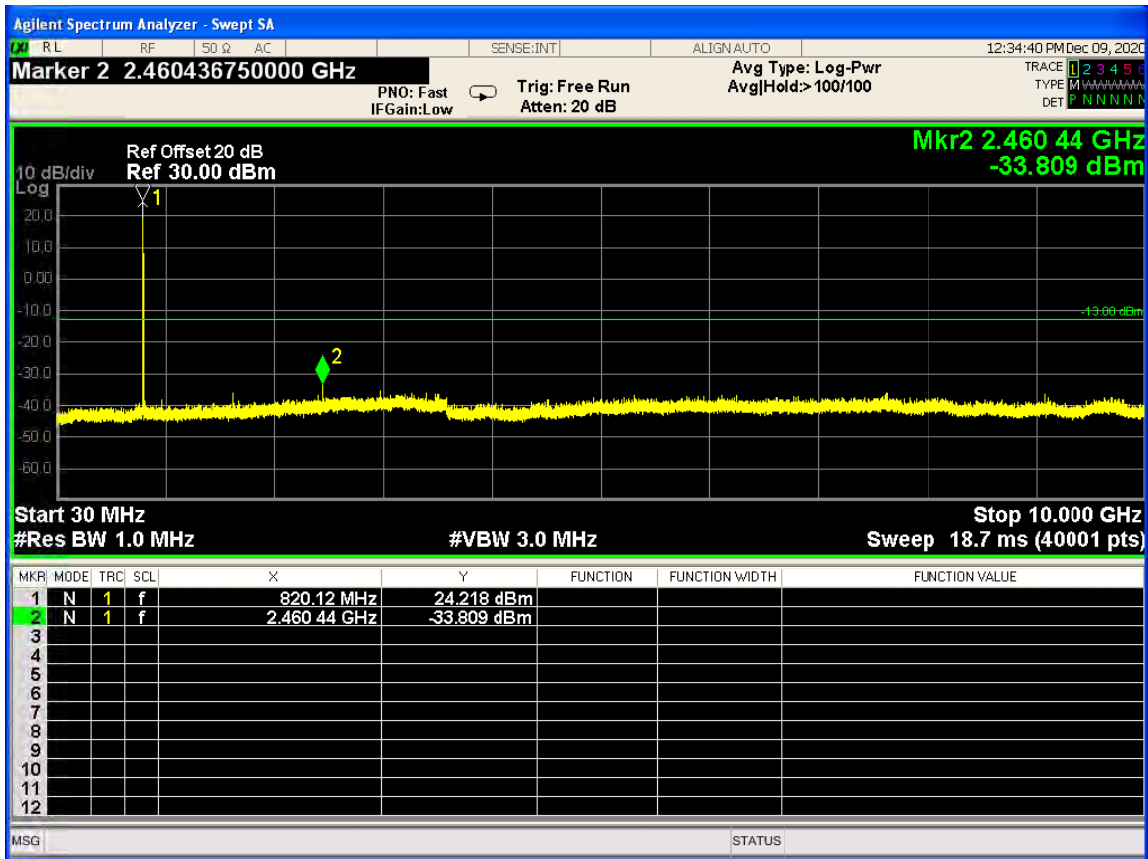

CDMA2000 BC10 1xEV-Do Rel.A Channel=670

