

Appendix C

RF Test Data for 2.4G WIFI (Conducted Measurement)
Product Name: 4-gang Wi-Fi Smart Switch with RF Control

Trade Mark: 

Test Model: 4CHPROR3


Environmental Conditions

Temperature:	23.4 ° C
Relative Humidity:	53.7%
ATM Pressure:	100.0 kPa
Test Engineer:	Diamond.Lu
Supervised by:	Wang.Chuang


C.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
11B	2437	Ant1	100	PASS
11G	2437	Ant1	100	PASS
11N20SISO	2437	Ant1	100	PASS


Duty Cycle_11B_2437_Ant1

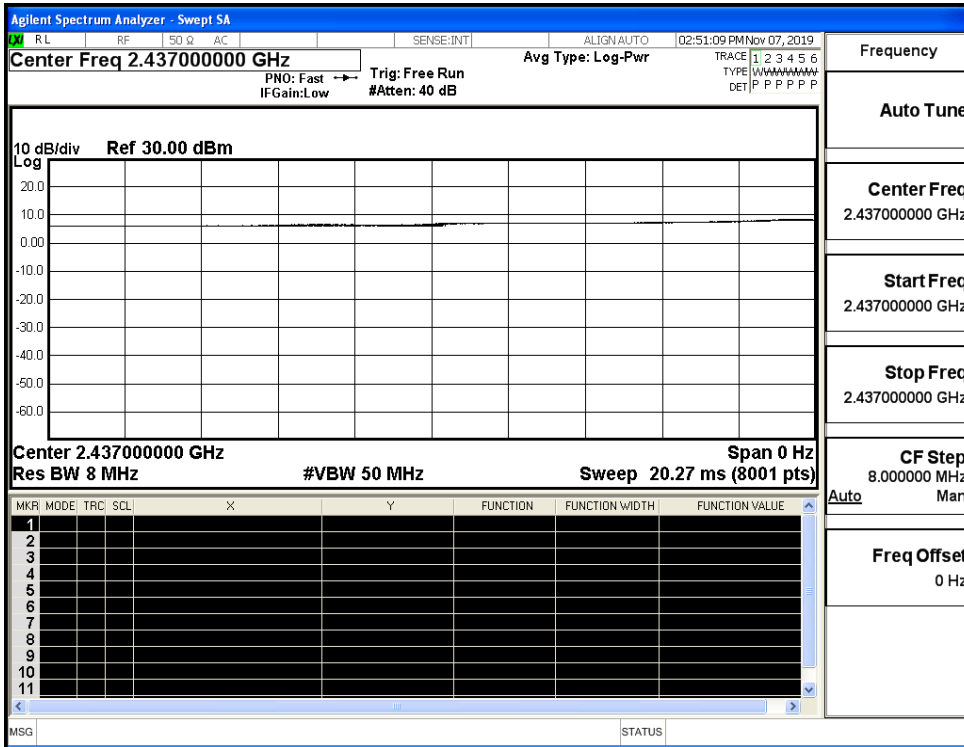

Duty Cycle_11G_2437_Ant1

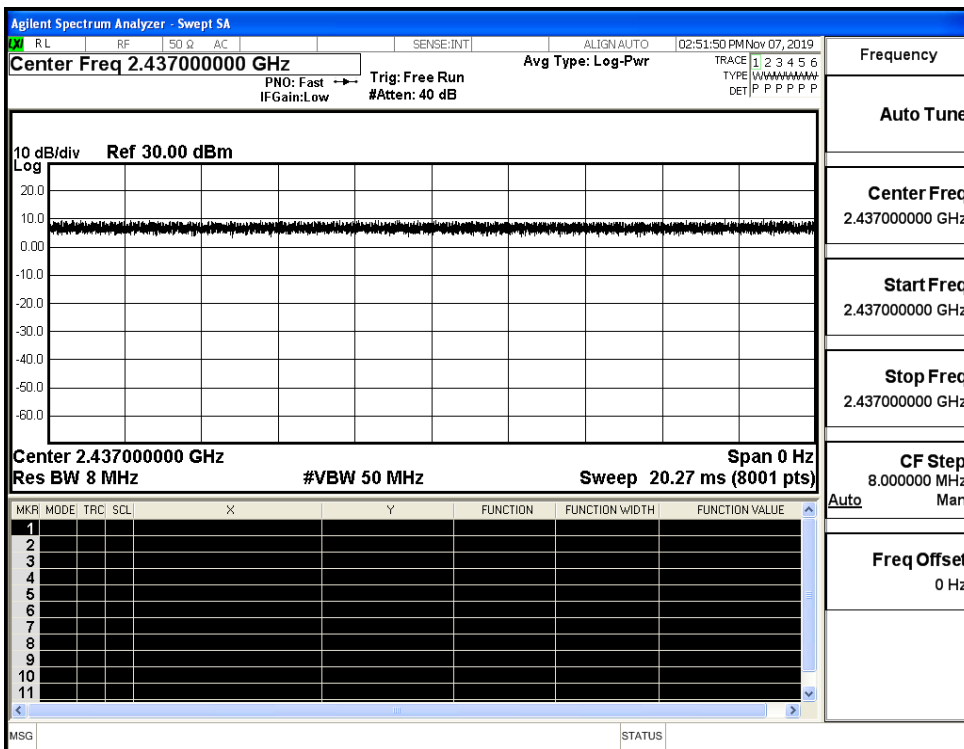

Duty Cycle_11N20SISO_2437_Ant1

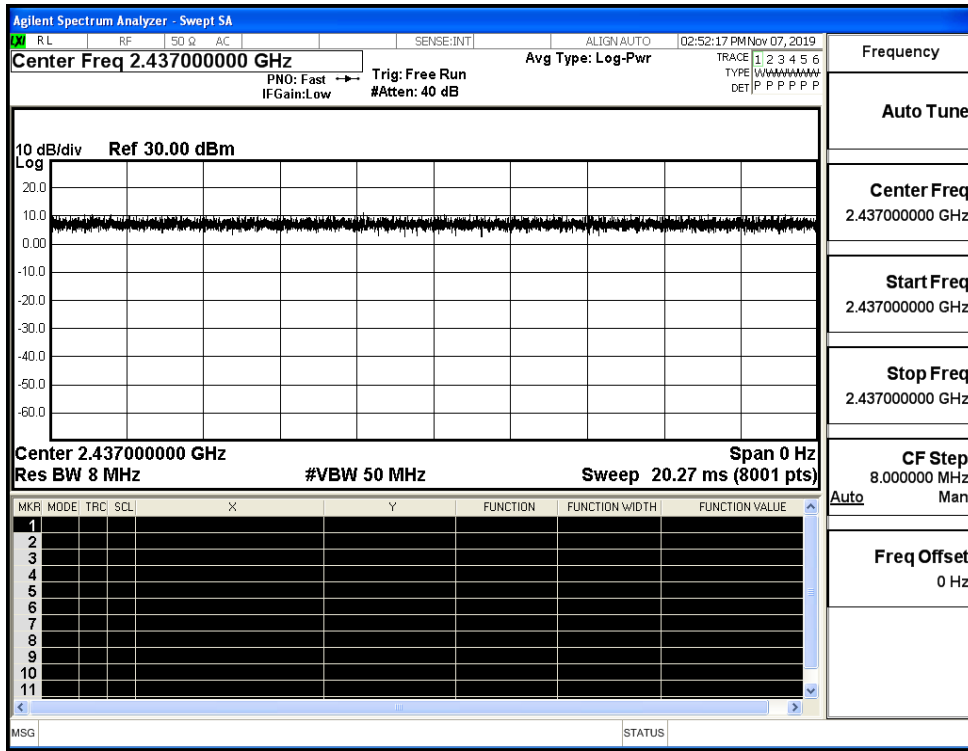

C.2 Maximum Conducted Output Power

Mode	Channel	Meas.Level [dBm]	Limit [dBm]	Verdict
11B	LCH	16.23	30	PASS
	MCH	16.15	30	PASS
	HCH	15.61	30	PASS
11G	LCH	17.31	30	PASS
	MCH	16.12	30	PASS
	HCH	17.23	30	PASS
11N20SISO	LCH	17.11	30	PASS
	MCH	17.83	30	PASS
	HCH	18.37	30	PASS

C.3 Maximum Power Spectral Density

Mode	Channel	Meas.Level [dBm/30KHz]	Limit [dBm/3KHz]	Verdict
11B	LCH	4.106	8	PASS
	MCH	0.250	8	PASS
	HCH	0.408	8	PASS
11G	LCH	-5.710	8	PASS
	MCH	-3.707	8	PASS
	HCH	-3.443	8	PASS
11N20SISO	LCH	-4.711	8	PASS
	MCH	-3.513	8	PASS
	HCH	-3.232	8	PASS

C.4 6dB Bandwidth


Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
11B	LCH	9.076	≥ 0.5	PASS
	MCH	10.09	≥ 0.5	PASS
	HCH	8.610	≥ 0.5	PASS
11G	LCH	15.12	≥ 0.5	PASS
	MCH	15.68	≥ 0.5	PASS
	HCH	13.86	≥ 0.5	PASS
11N20SISO	LCH	15.12	≥ 0.5	PASS
	MCH	16.30	≥ 0.5	PASS
	HCH	13.83	≥ 0.5	PASS

C.5 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
11B	LCH	8.233	-37.276	-11.767	PASS
	MCH	4.572	-37.644	-15.428	PASS
	HCH	4.615	-36.962	-15.385	PASS
11G	LCH	0.002	-36.816	-19.998	PASS
	MCH	1.306	-36.634	-18.694	PASS
	HCH	1.983	-37.198	-18.017	PASS
11N20 SISO	LCH	-0.209	-37.126	-20.209	PASS
	MCH	0.999	-37.443	-19.001	PASS
	HCH	1.968	-36.588	-18.032	PASS

11B_LCH_Graphs

Pref/11B/LCH

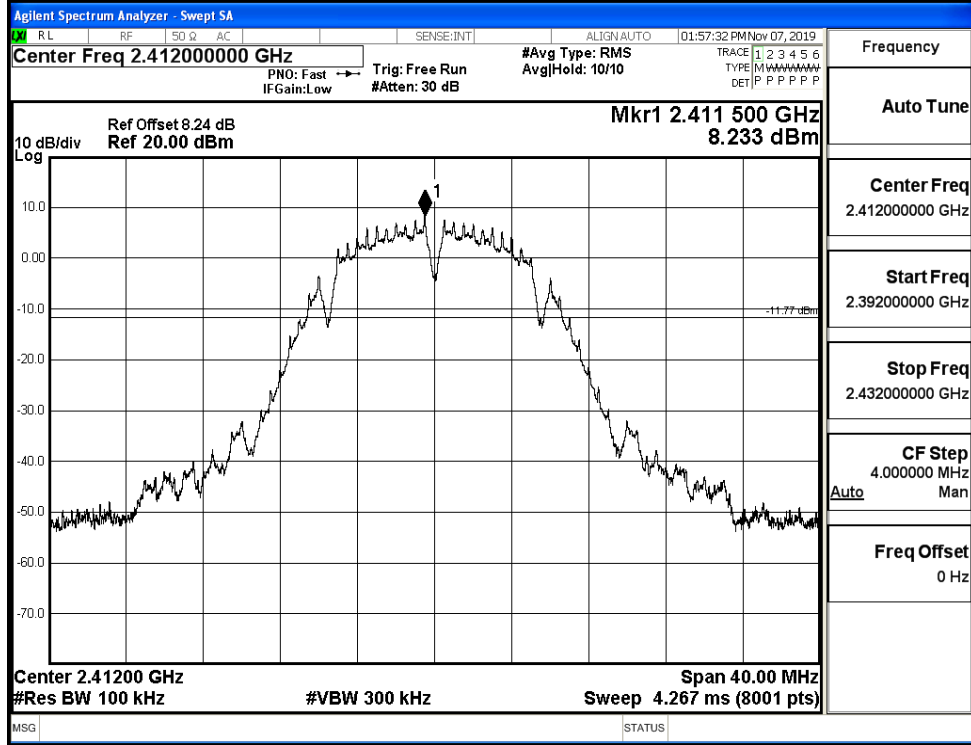


Puw/11B/LCH

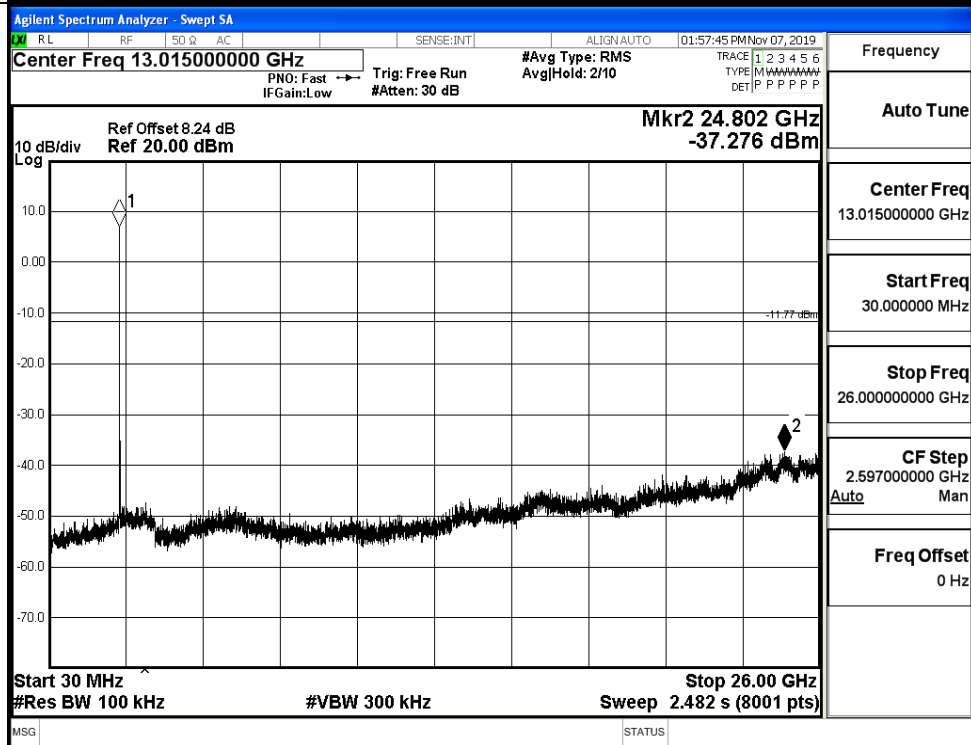


11B_MCH_Graphs

Pref/11B/MCH

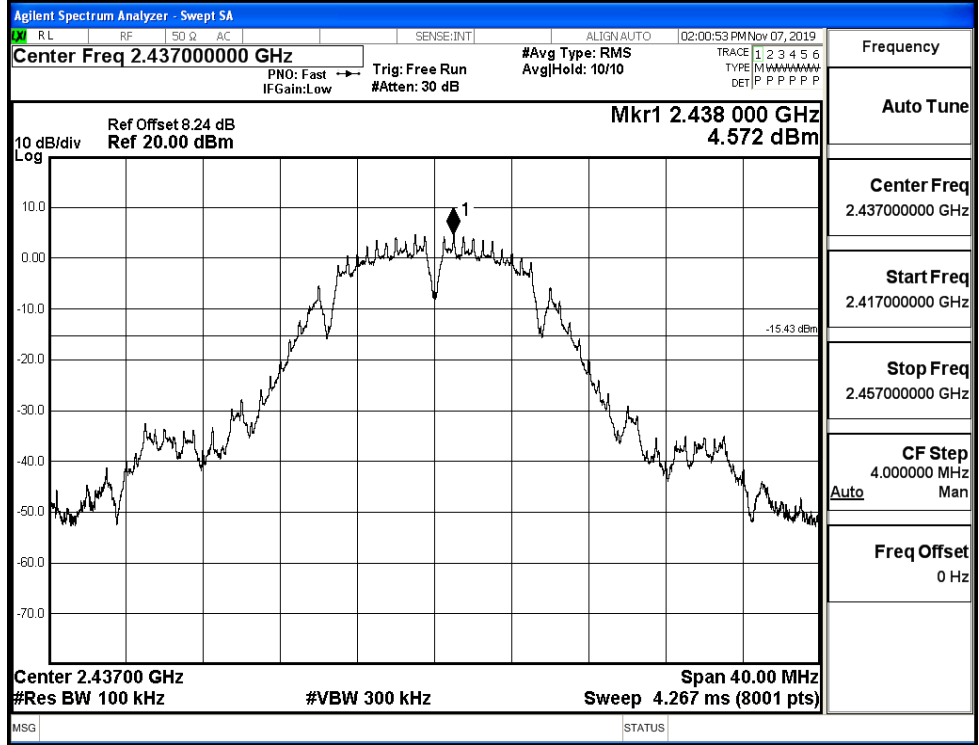


Puw/11B/MCH

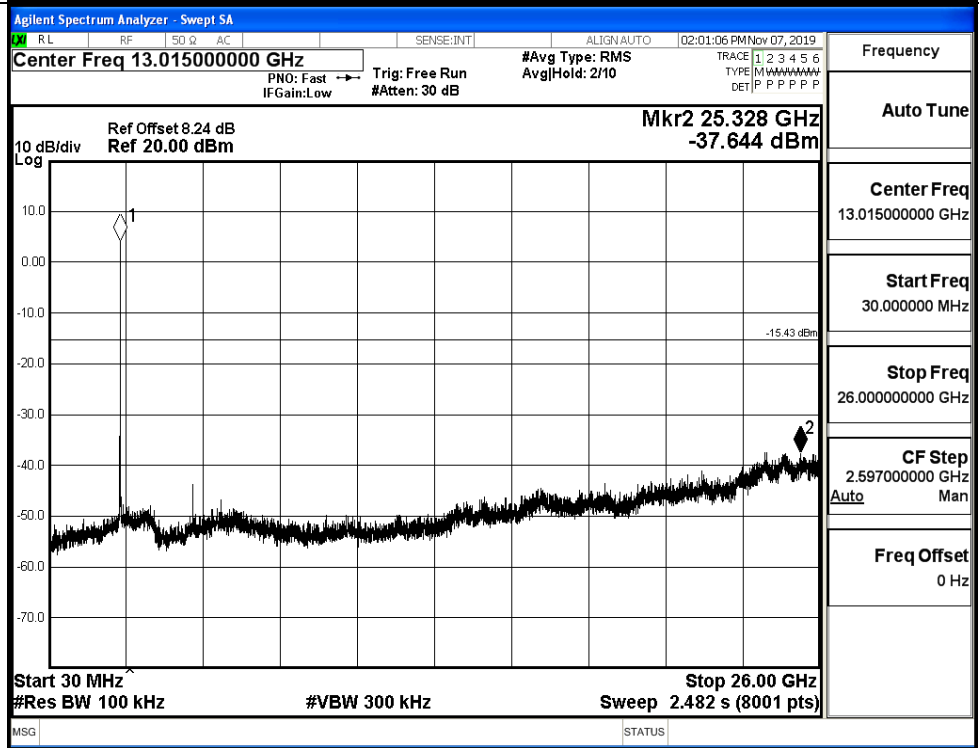


11B_HCH_Graphs

Pref/11B/HCH

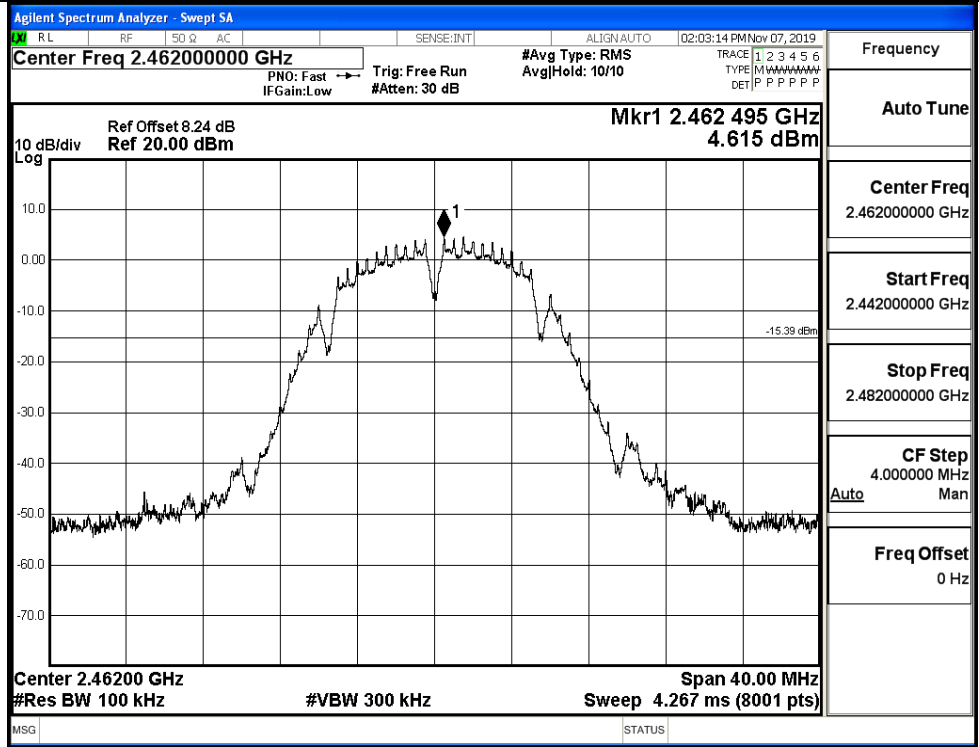


Puw/11B/HCH

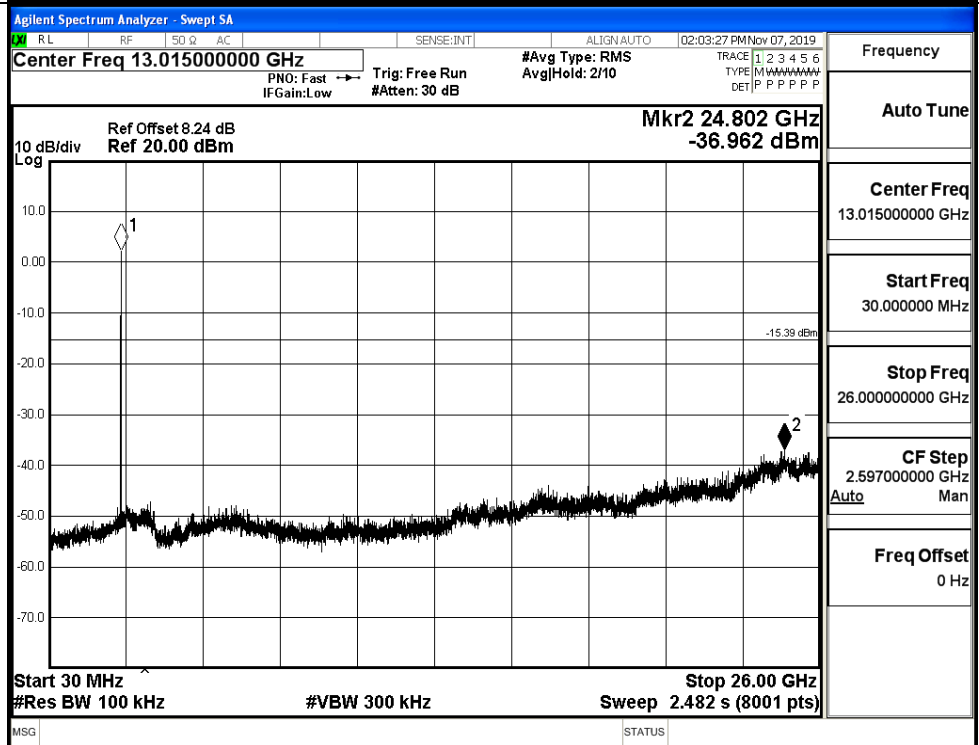


11G_LCH_Graphs

Pref/11G/LCH

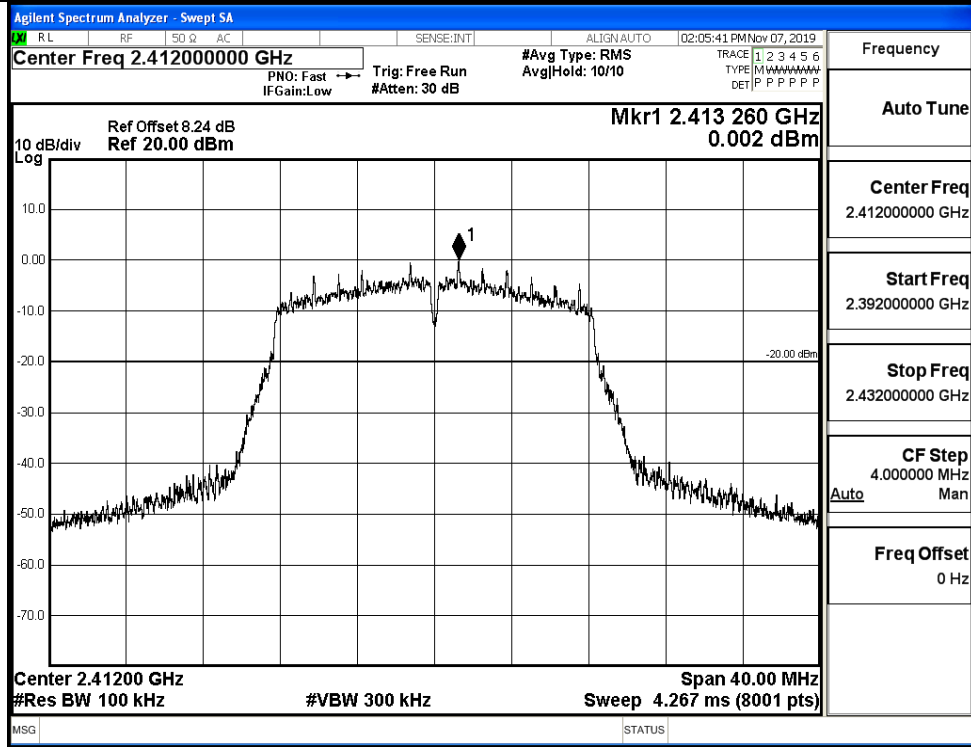


Puw/11G/LCH

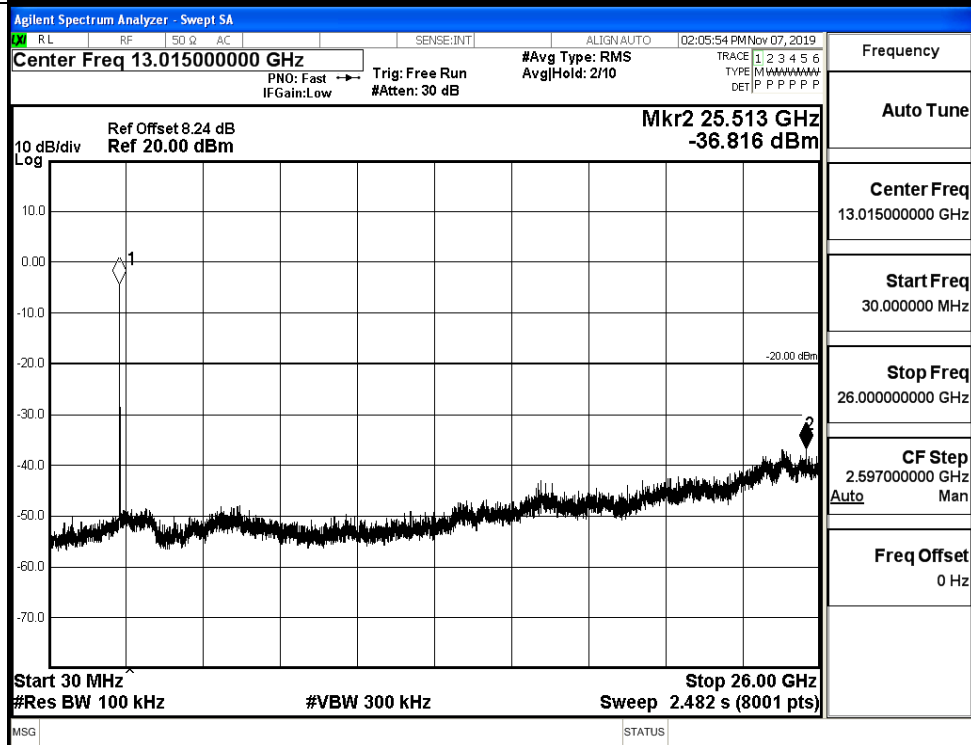


11G_MCH_Graphs

Pref/11G/MCH

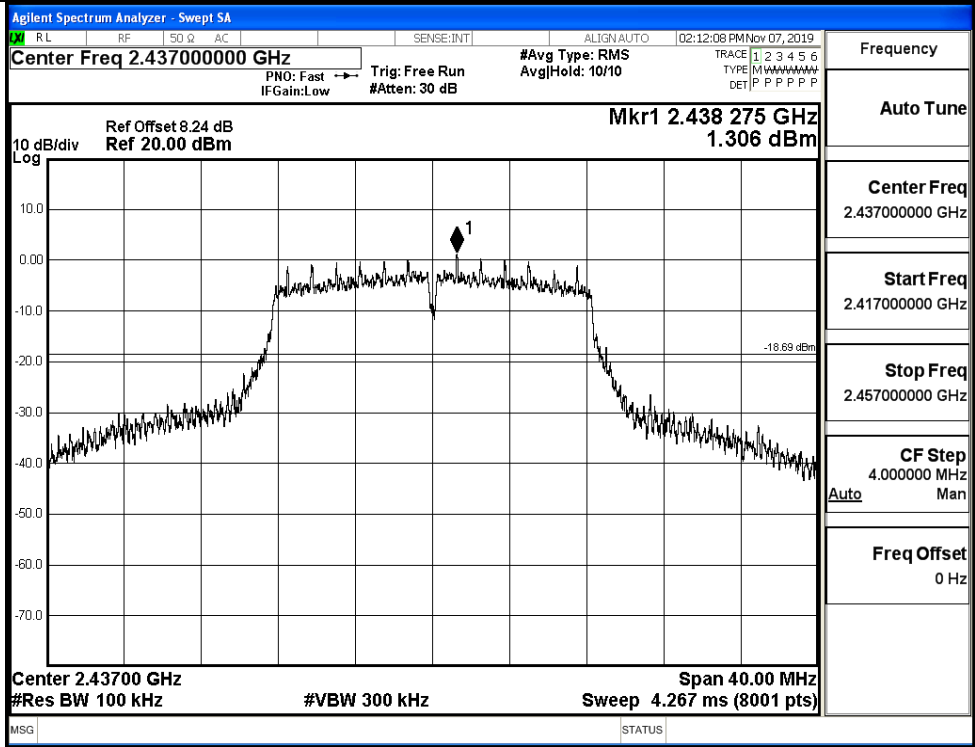


Puw/11G/MCH

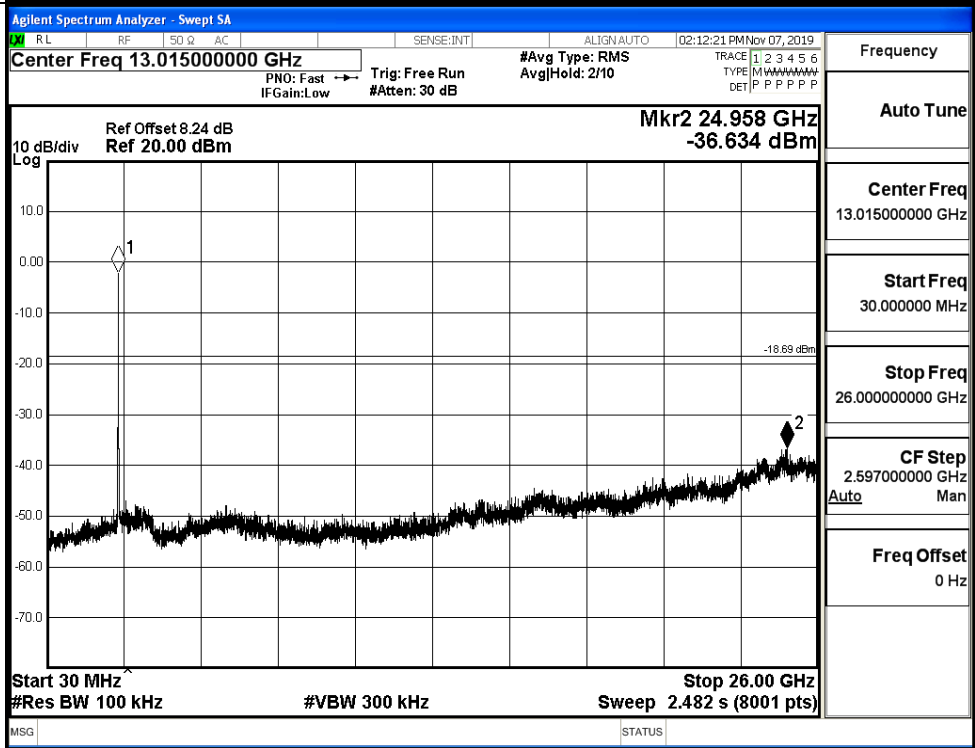


11G_HCH_Graphs

Pref/11G/HCH

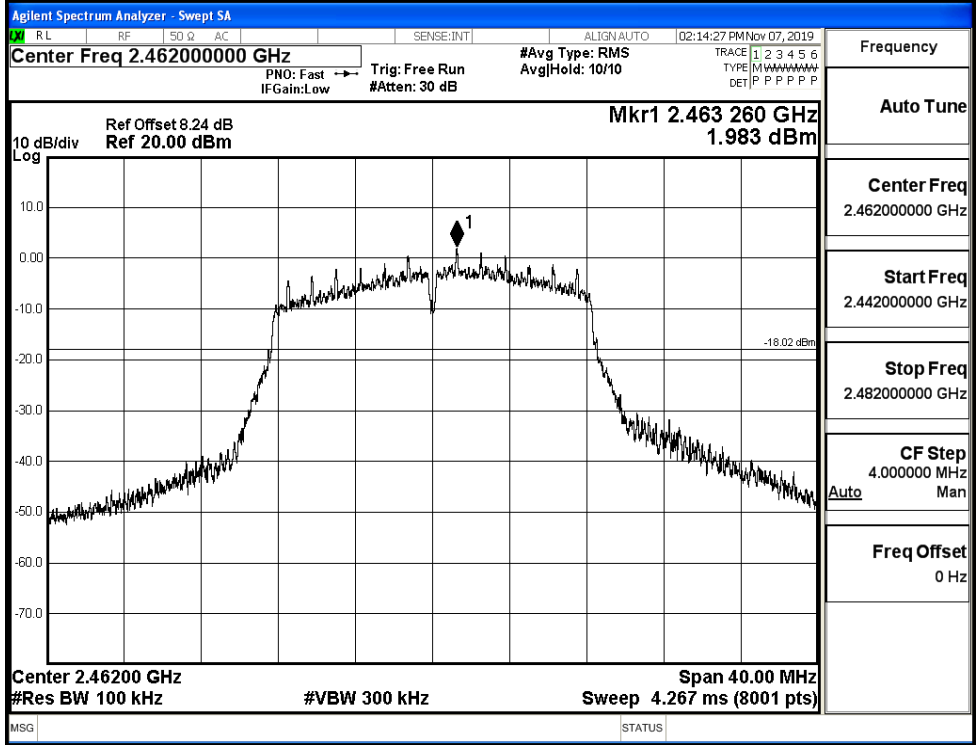


Puw/11G/HCH

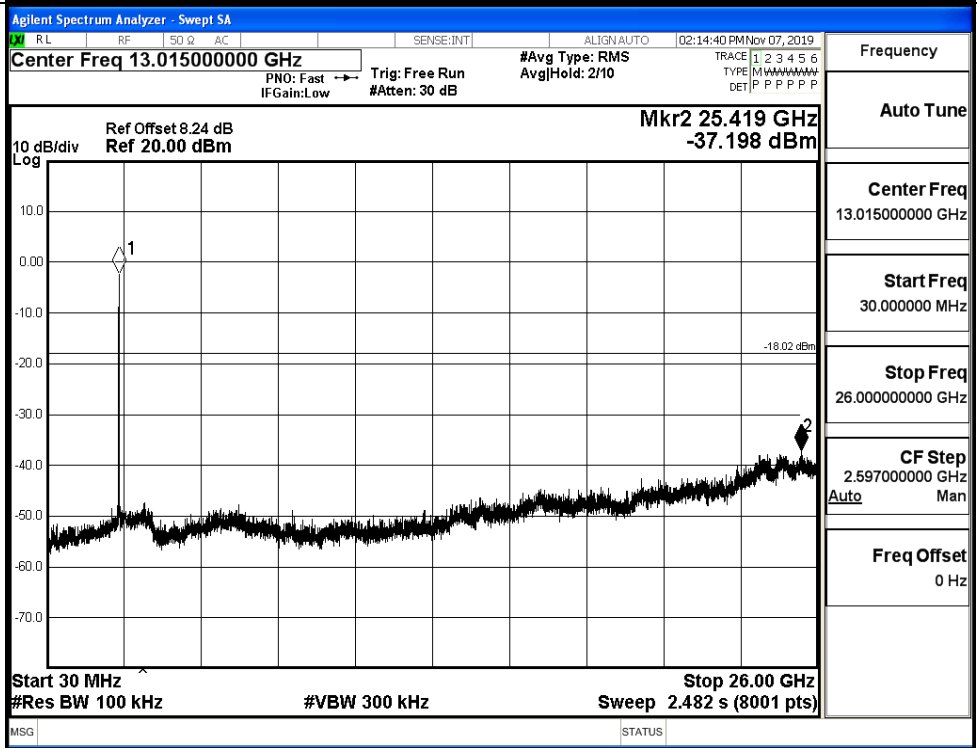


11N20SISO_LCH_Graphs

Pref/11N20SIS
O/LCH

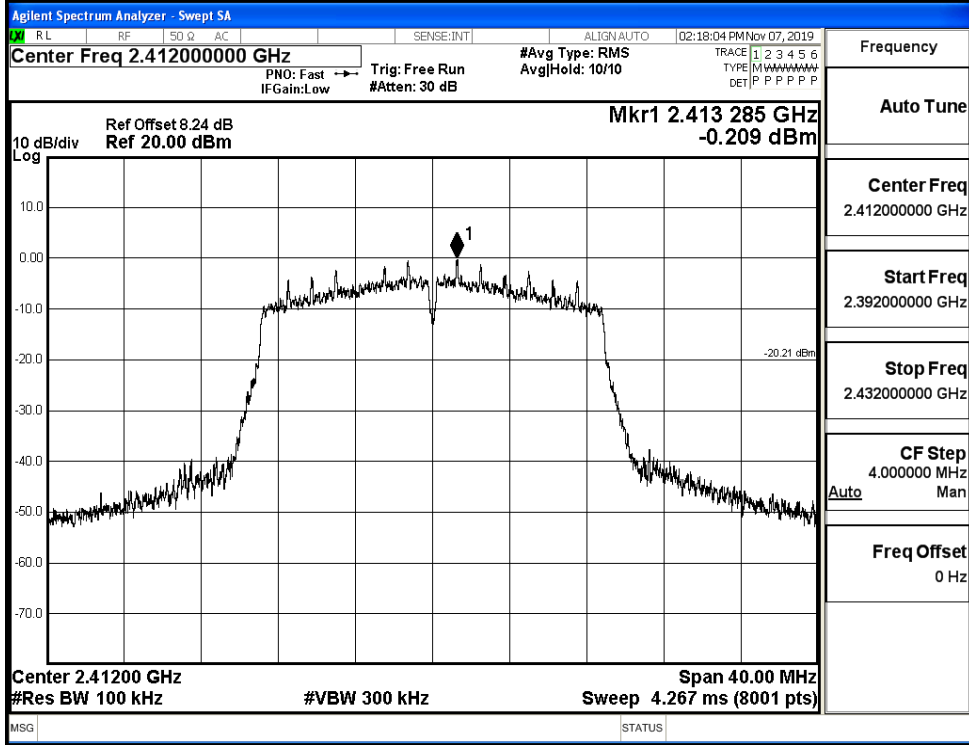


Puw/11N20
SISO/LCH

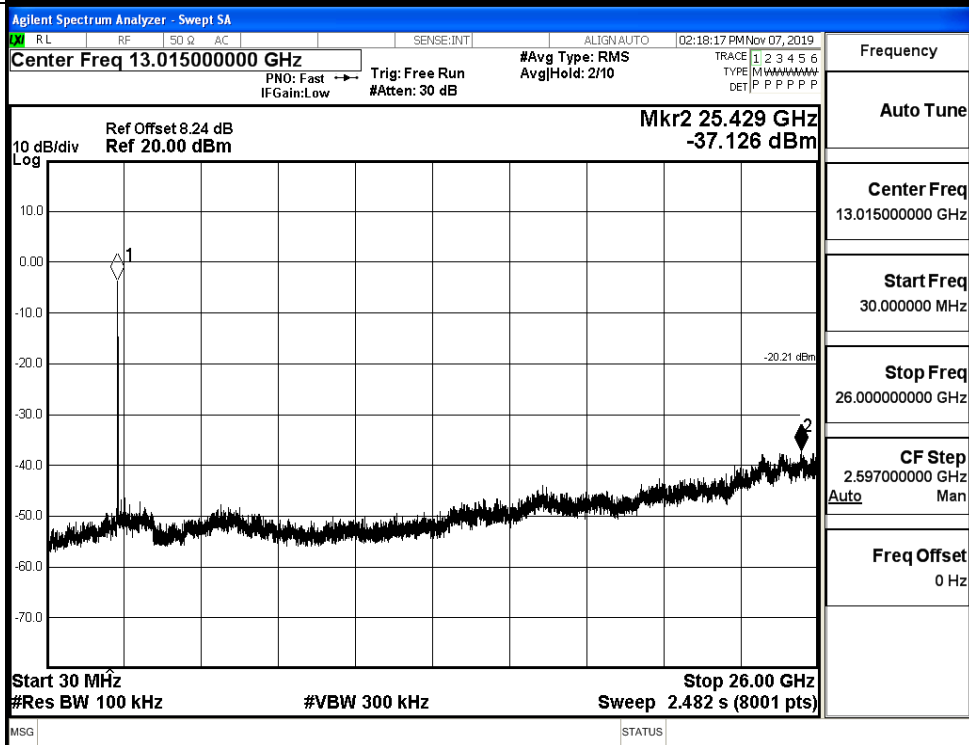


11N20SISO_MCH_Graphs

Pref/11N20
SISO/MCH

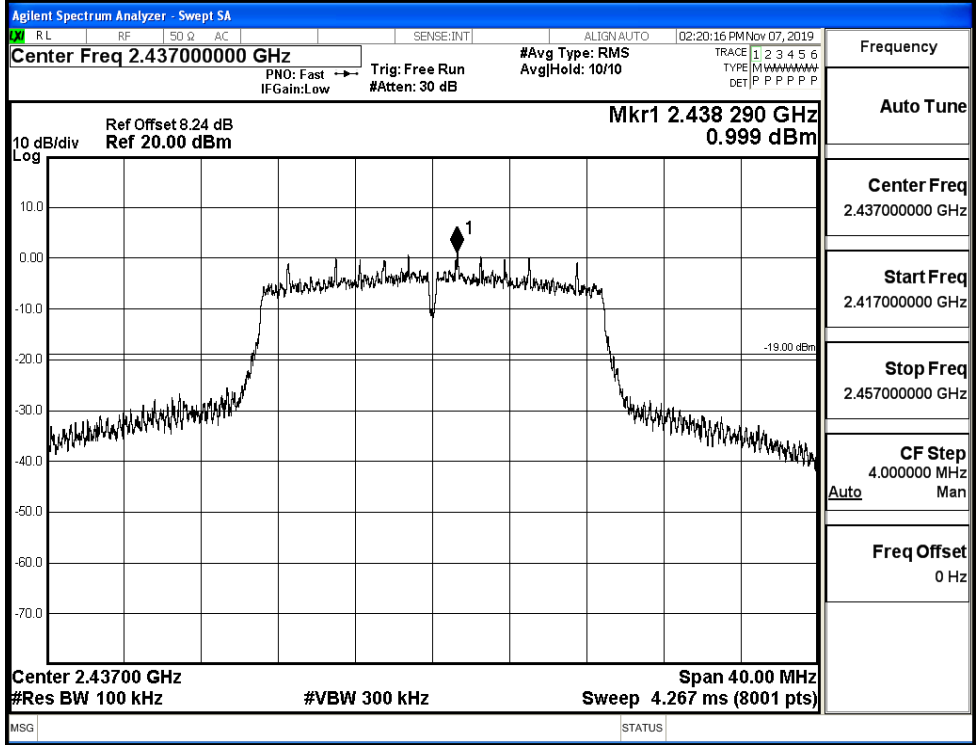


Puw/11N20
SISO/MCH

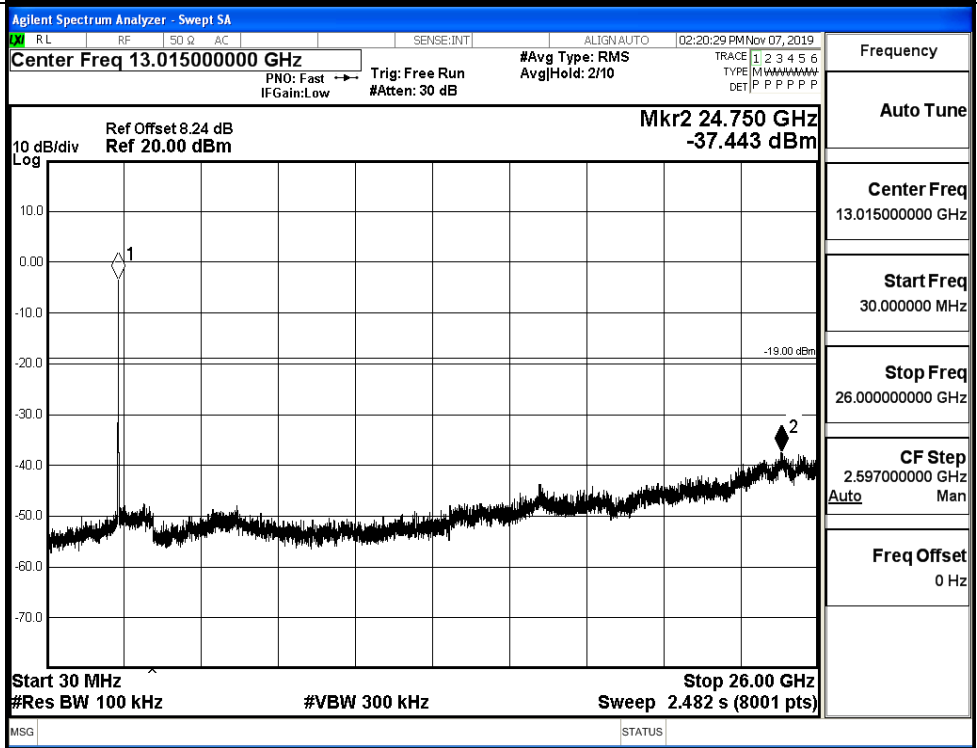


11N20SISO_HCH_Graphs

Pref/11N20
SISO/HCH

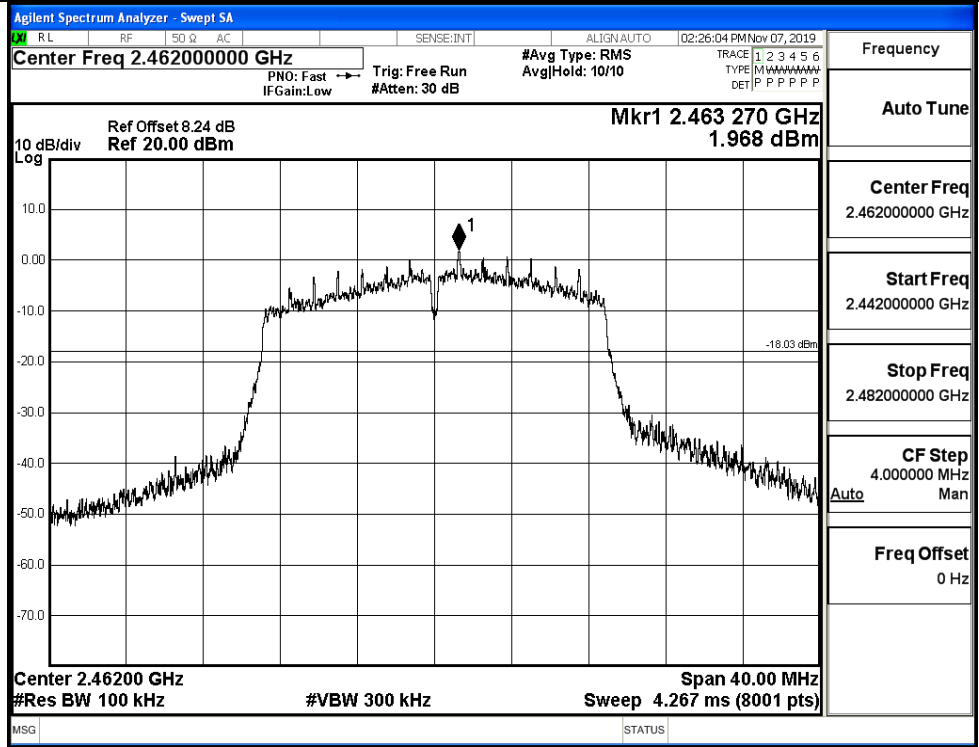


Puw/11N20
SISO/HCH

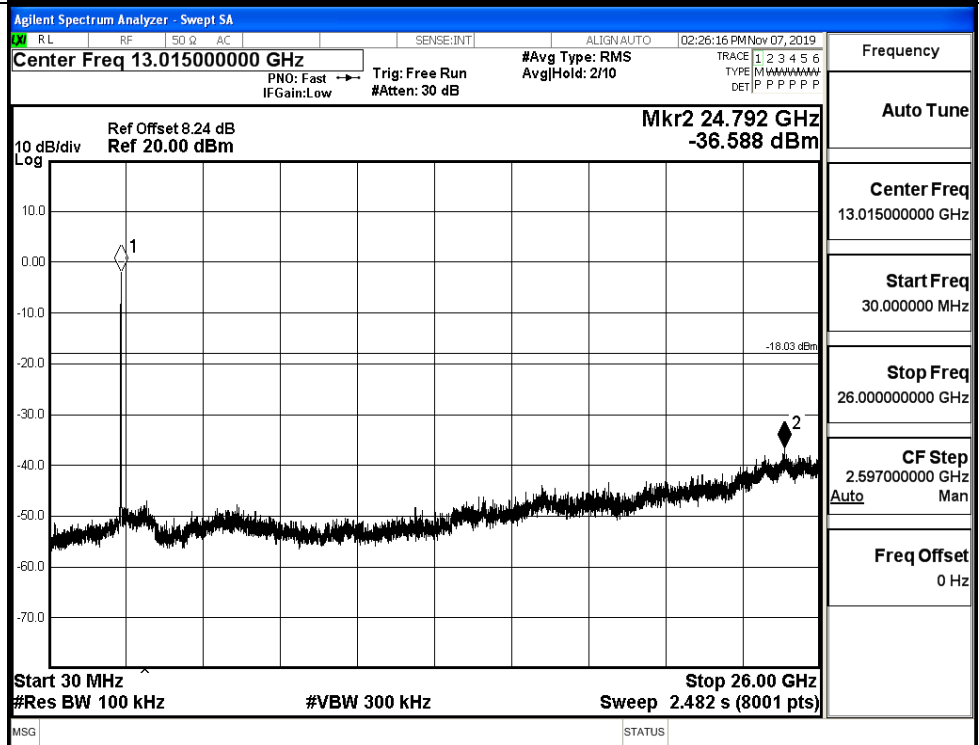


C.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	7.771	-49.140	-12.23	PASS
	HCH	4.397	-47.838	-15.6	PASS
11G	LCH	-0.781	-48.782	-20.78	PASS
	HCH	1.136	-46.802	-18.86	PASS
11N20SISO	LCH	-0.569	-48.171	-20.57	PASS
	HCH	0.892	-44.974	-19.11	PASS

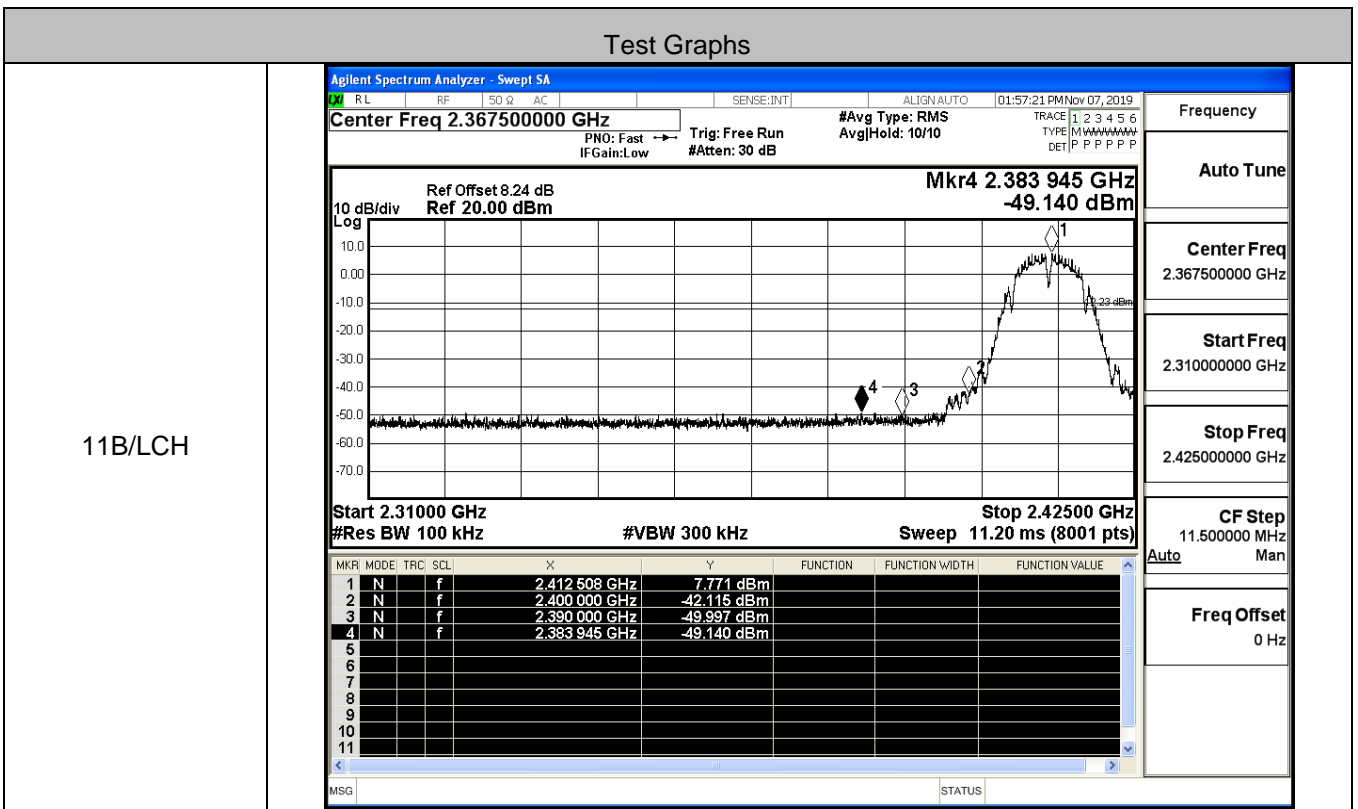


11B/HCH

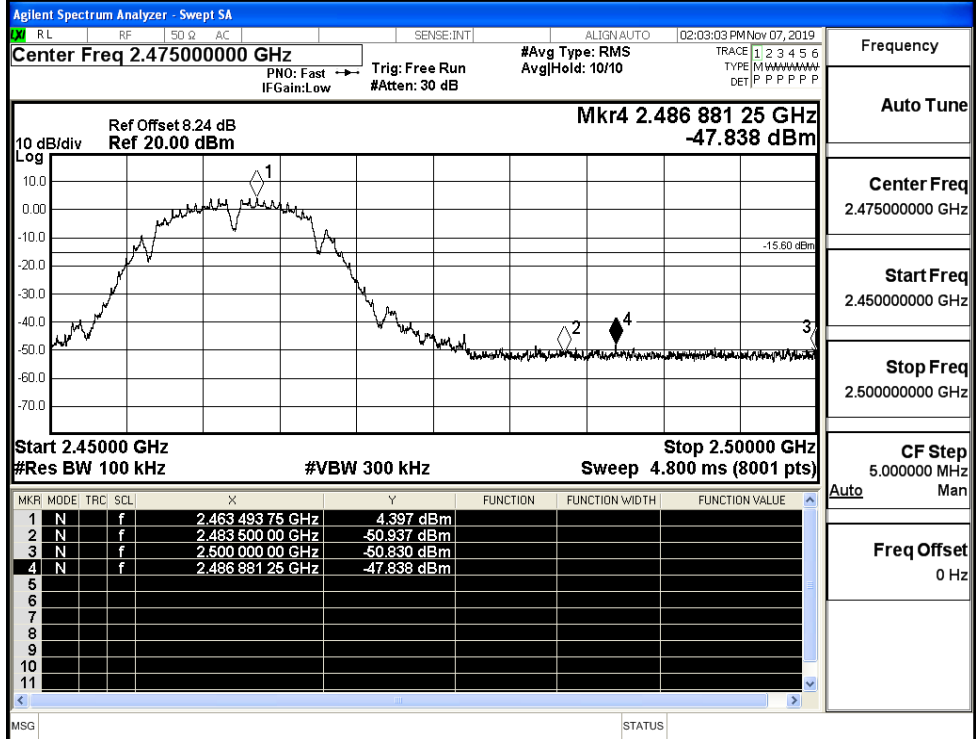


Frequency	2.475000000 GHz
Auto Tune	
Center Freq	2.475000000 GHz
Start Freq	2.450000000 GHz
Stop Freq	2.500000000 GHz
CF Step	5.000000 MHz
Freq Offset	0 Hz

11G/LCH

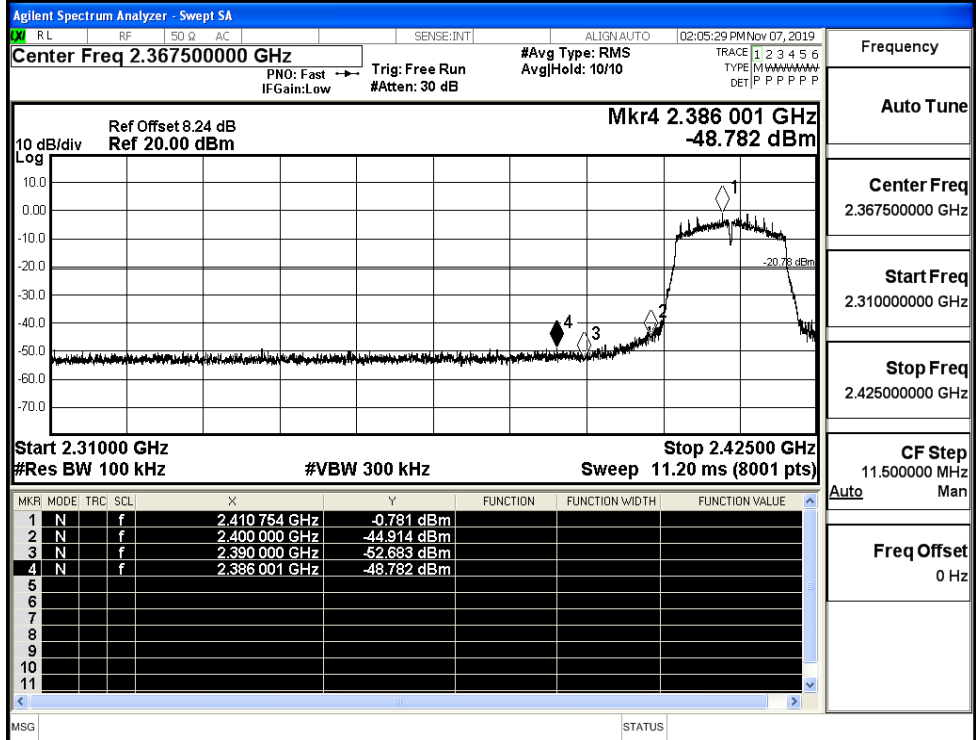


Frequency	2.367500000 GHz
Auto Tune	
Center Freq	2.367500000 GHz
Start Freq	2.310000000 GHz
Stop Freq	2.425000000 GHz
CF Step	11.500000 MHz
Freq Offset	0 Hz

11G/HCH

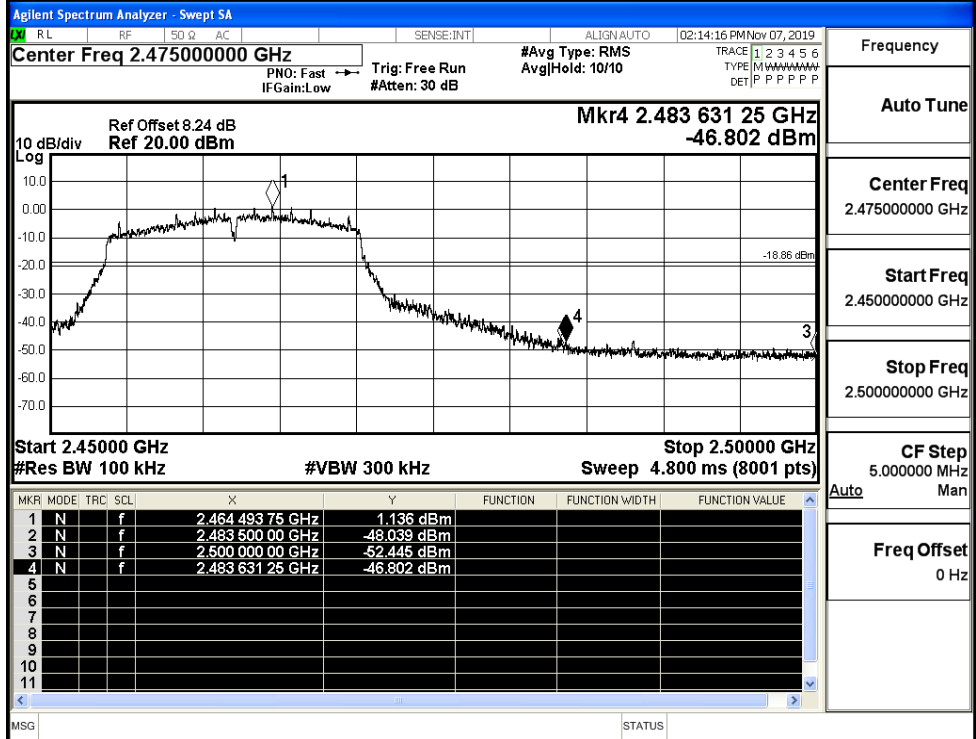


Frequency	2.475000000 GHz
Auto Tune	
Center Freq	2.475000000 GHz
Start Freq	2.450000000 GHz
Stop Freq	2.500000000 GHz
CF Step	5.000000 MHz
Freq Offset	0 Hz

11N20SISO/LCH

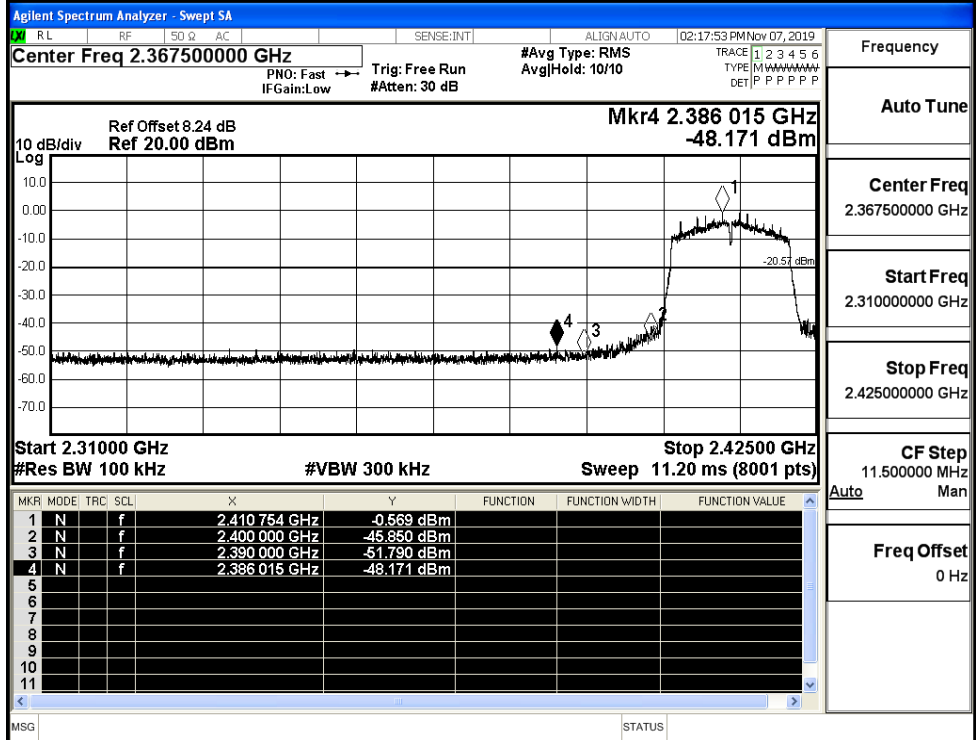

Frequency	2.367500000 GHz
Auto Tune	
Center Freq	2.367500000 GHz
Start Freq	2.310000000 GHz
Stop Freq	2.425000000 GHz
CF Step	11.500000 MHz
Freq Offset	0 Hz

11N20SISO/HCH

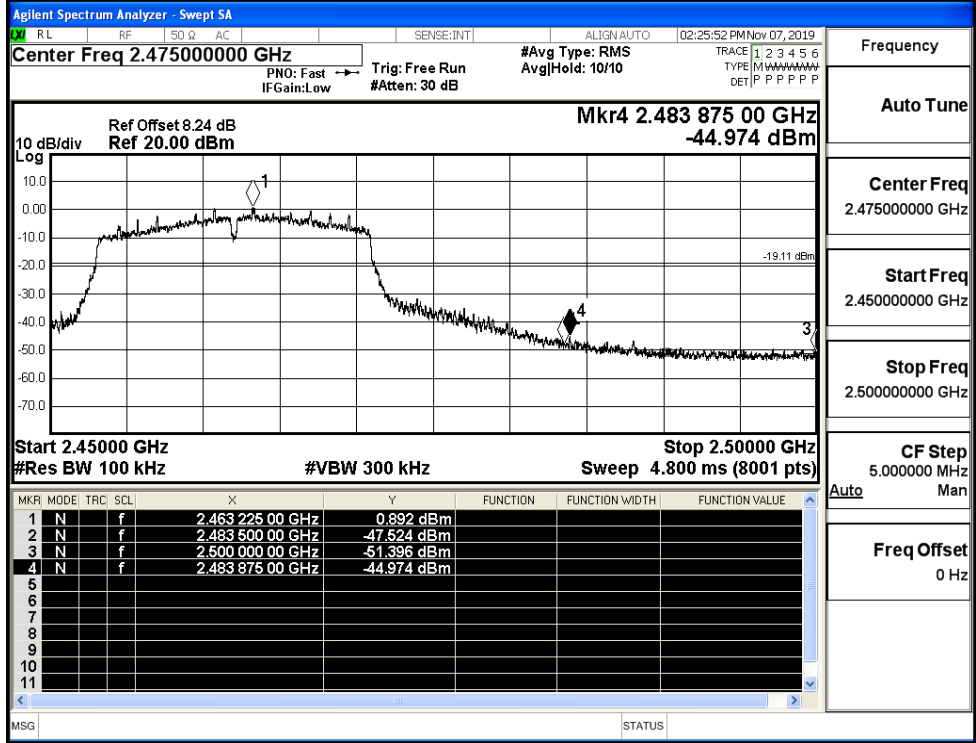

Frequency

Auto Tune

Center Freq
2.475000000 GHz

Start Freq
2.450000000 GHz

Stop Freq
2.500000000 GHz

CF Step
5.000000 MHz


Auto Man

Freq Offset
0 Hz


C.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBu V/m]	Verdict
11B	2412	Ant1	2310.0	-43.65	1.0	0	51.61	PEAK	74	PASS
	2412	Ant1	2310.0	-53.33	1.0	0	41.93	AV	54	PASS
	2412	Ant1	2390.0	-41.54	1.0	0	53.72	PEAK	74	PASS
	2412	Ant1	2390.0	-52.88	1.0	0	42.38	AV	54	PASS
	2462	Ant1	2483.5	-42.44	1.0	0	52.81	PEAK	74	PASS
	2462	Ant1	2483.5	-52.53	1.0	0	42.73	AV	54	PASS
	2462	Ant1	2500.0	-41.42	1.0	0	53.84	PEAK	74	PASS
	2462	Ant1	2500.0	-52.27	1.0	0	42.99	AV	54	PASS
11G	2412	Ant1	2310.0	-42.35	1.0	0	52.91	PEAK	74	PASS
	2412	Ant1	2310.0	-53.28	1.0	0	41.98	AV	54	PASS
	2412	Ant1	2390.0	-42.33	1.0	0	52.93	PEAK	74	PASS
	2412	Ant1	2390.0	-52.87	1.0	0	42.39	AV	54	PASS
	2462	Ant1	2483.5	-42.55	1.0	0	52.71	PEAK	74	PASS
	2462	Ant1	2483.5	-52.56	1.0	0	42.70	AV	54	PASS
	2462	Ant1	2500.0	-41.51	1.0	0	53.75	PEAK	74	PASS
	2462	Ant1	2500.0	-52.34	1.0	0	42.92	AV	54	PASS
11N20 SISO	2412	Ant1	2310.0	-42.82	1.0	0	52.44	PEAK	74	PASS
	2412	Ant1	2310.0	-53.33	1.0	0	41.93	AV	54	PASS
	2412	Ant1	2390.0	-43.25	1.0	0	52.01	PEAK	74	PASS
	2412	Ant1	2390.0	-52.92	1.0	0	42.34	AV	54	PASS
	2462	Ant1	2483.5	-42.42	1.0	0	52.84	PEAK	74	PASS
	2462	Ant1	2483.5	-52.53	1.0	0	42.72	AV	54	PASS
	2462	Ant1	2500.0	-41.66	1.0	0	53.59	PEAK	74	PASS
	2462	Ant1	2500.0	-52.33	1.0	0	42.93	AV	54	PASS


Restrict-band band-edge measurements_11B_2412_Ant1_PEAK

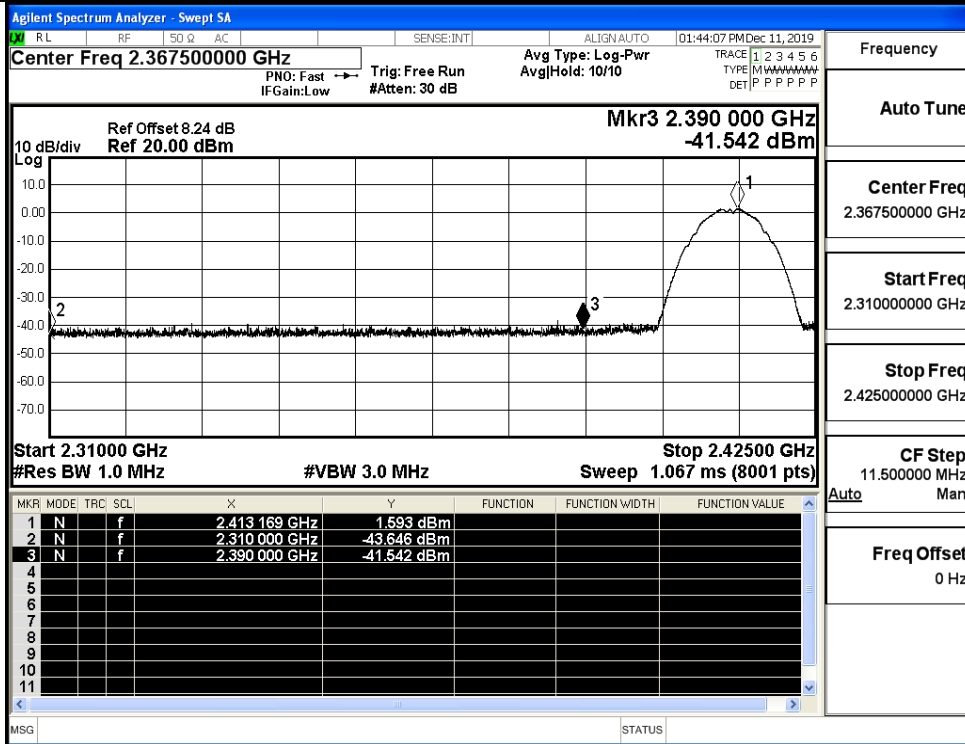


Restrict-band band-edge measurements_11B_2412_Ant1_AV

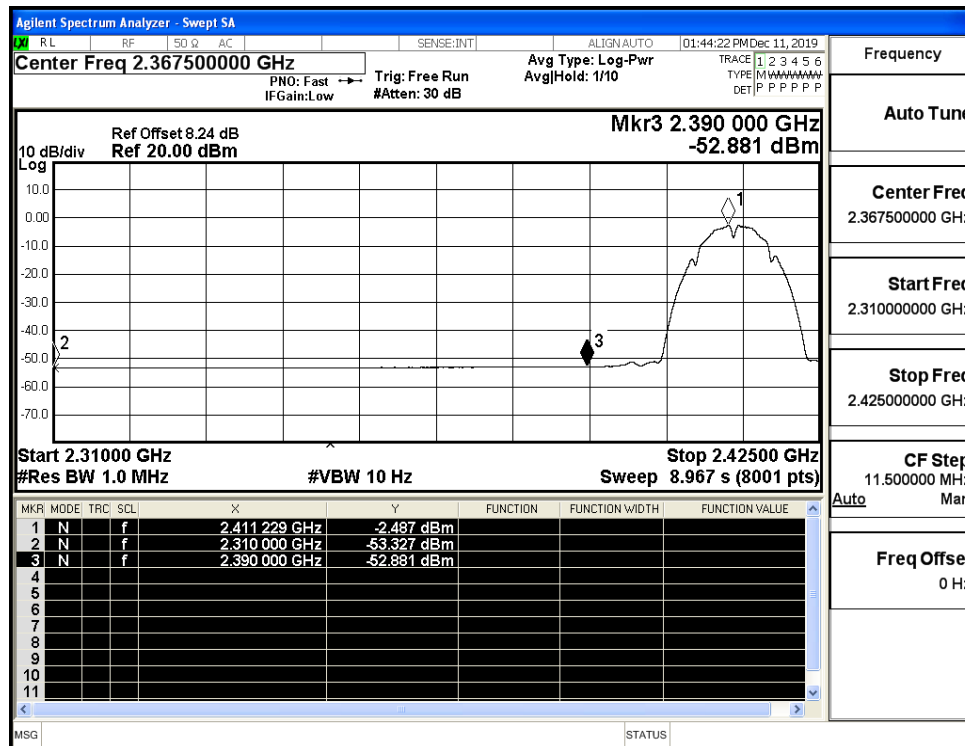


Restrict-band band-edge measurements_11B_2462_Ant1_PEAK

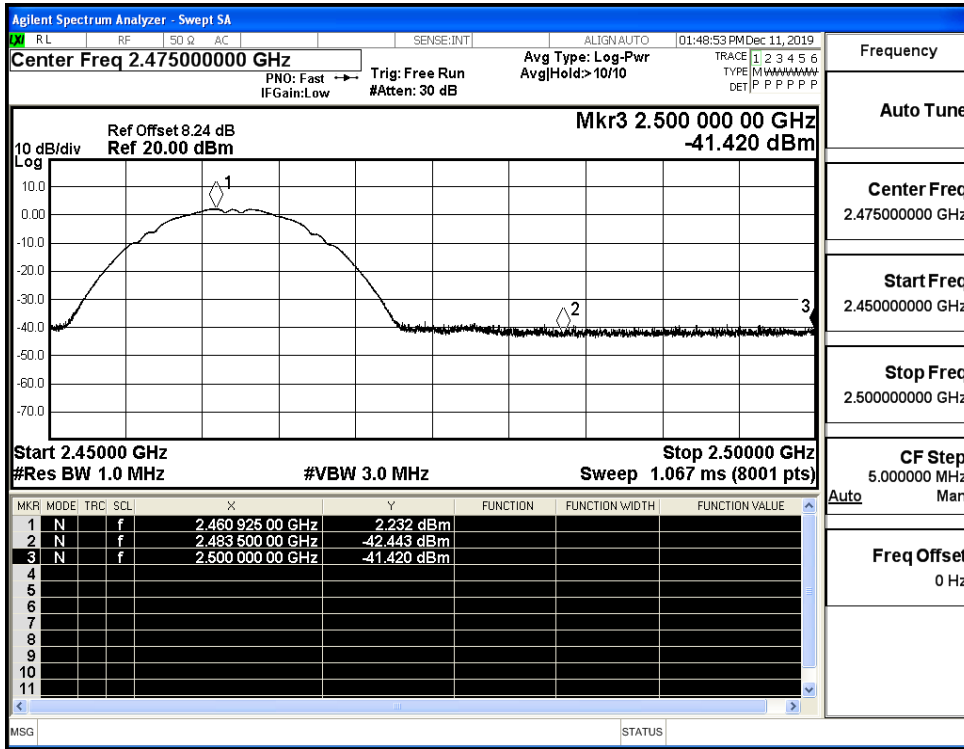


Restrict-band band-edge measurements_11B_2462_Ant1_AV

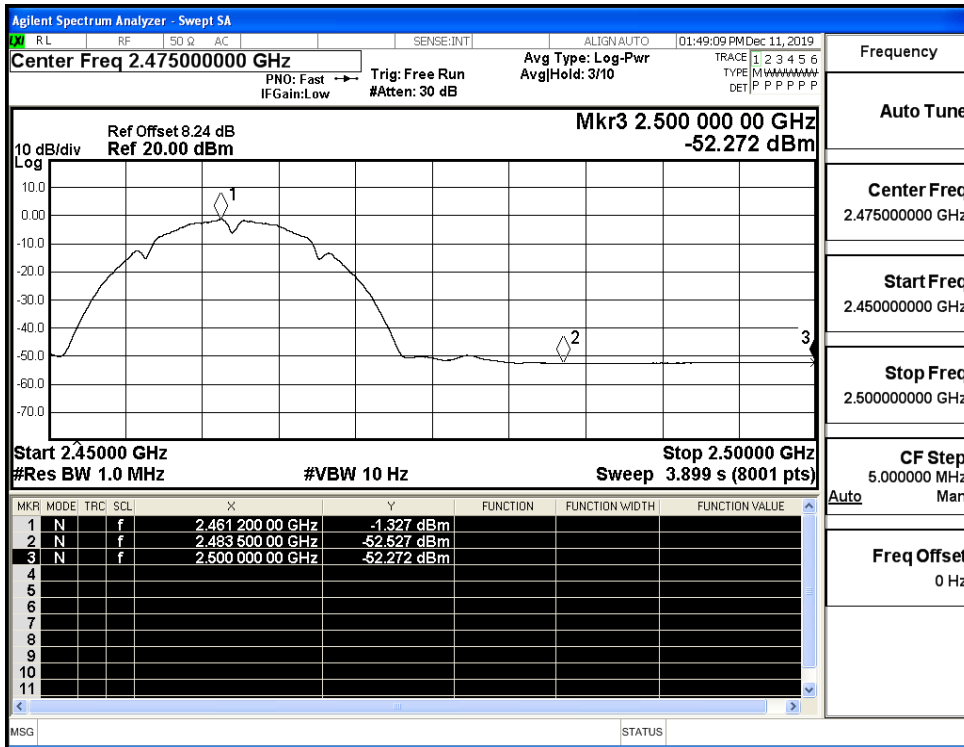


Restrict-band band-edge measurements_11G_2412_Ant1_PEAK

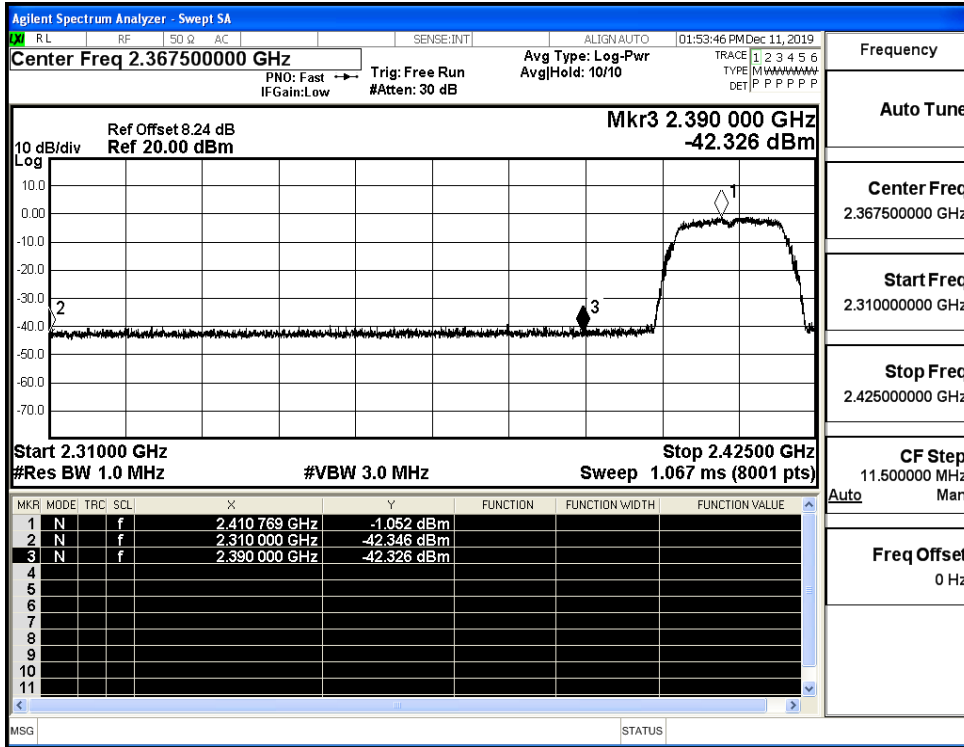


Restrict-band band-edge measurements_11G_2412_Ant1_AV

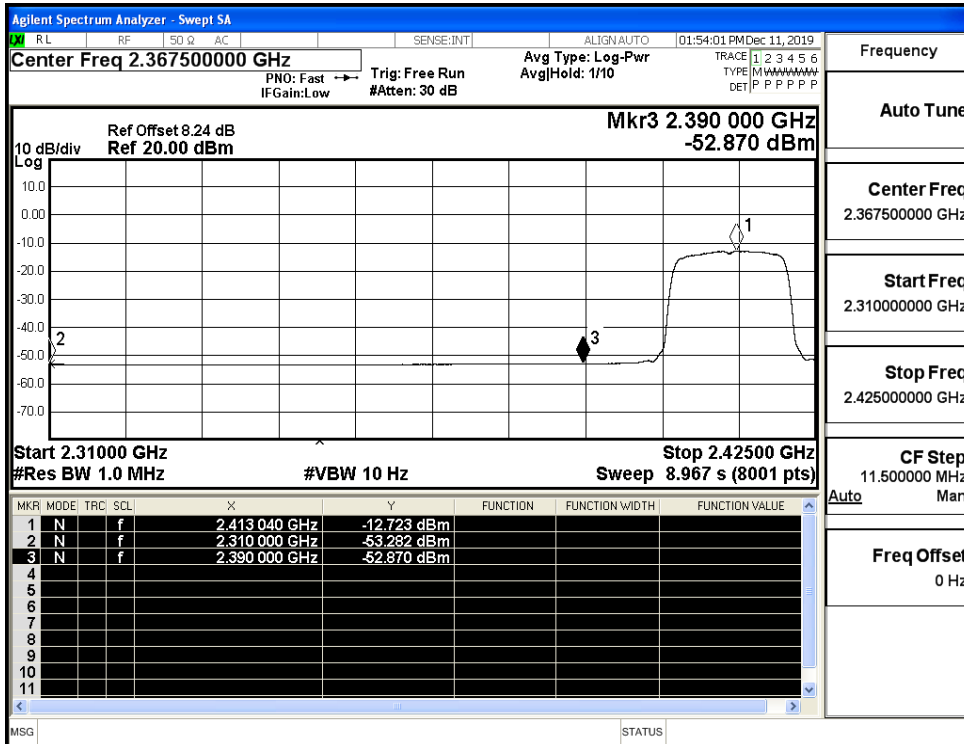


Restrict-band band-edge measurements_11G_2462_Ant1_PEAK

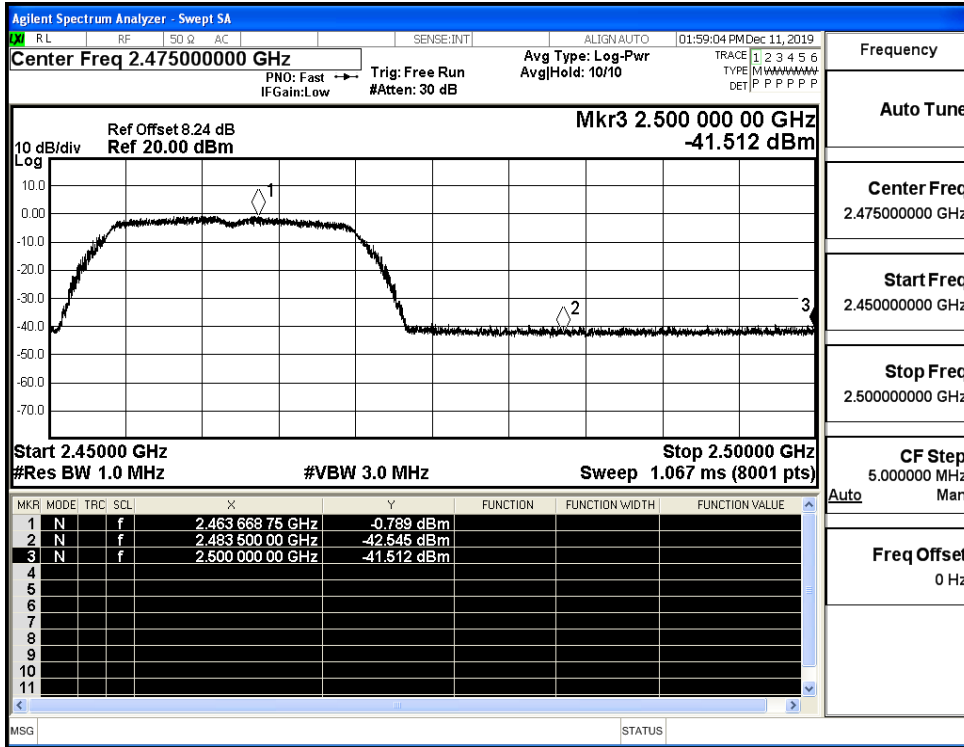


Restrict-band band-edge measurements_11G_2462_Ant1_AV

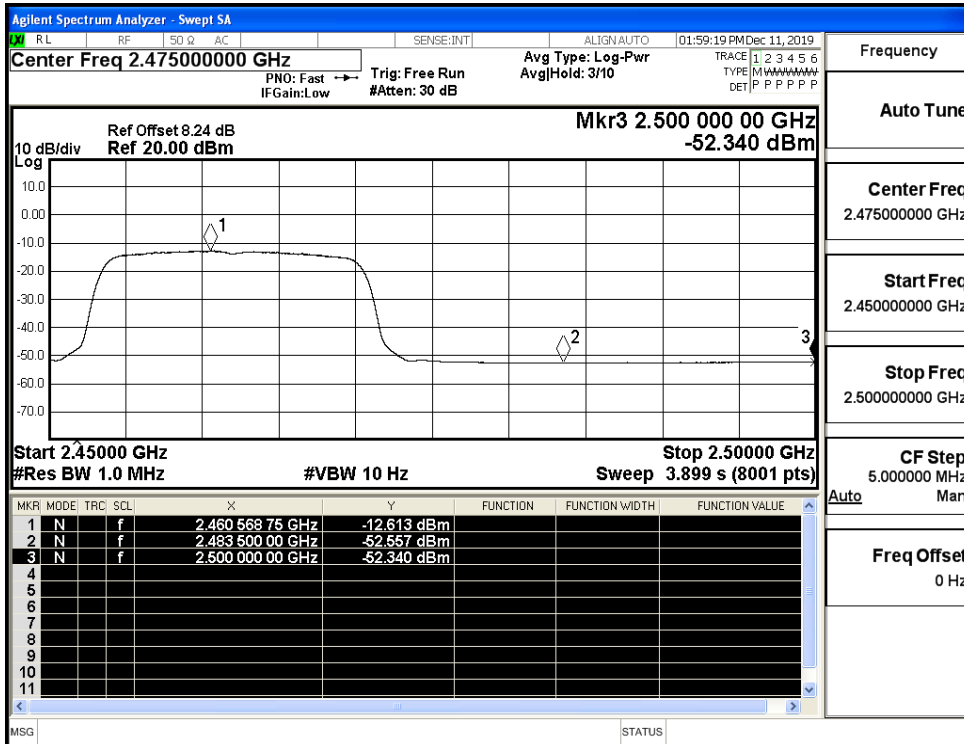


Restrict-band band-edge measurements_11N20SISO_2412_Ant1_PEAK

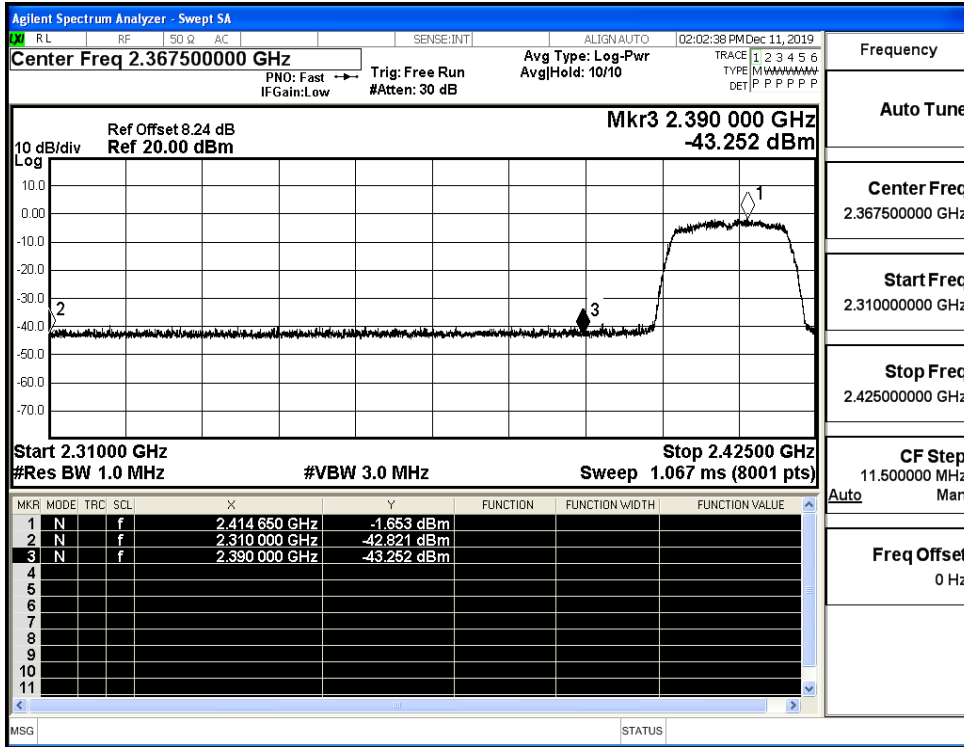

Restrict-band band-edge measurements_11N20SISO_2412_Ant1_AV

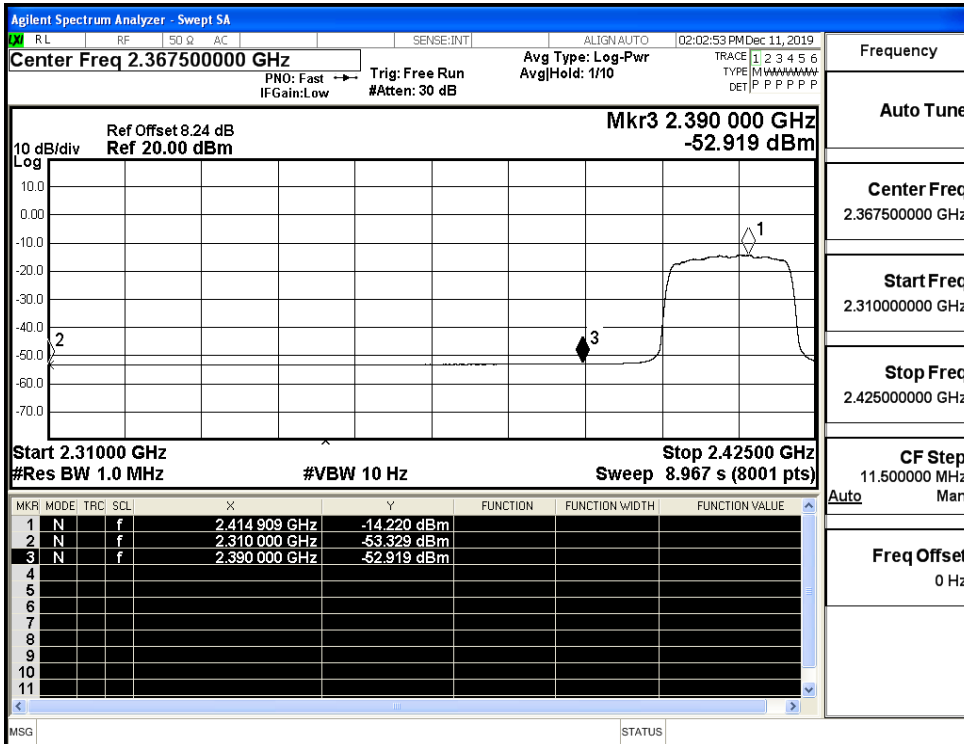

Restrict-band band-edge measurements_11N20SISO_2462_Ant1_PEAK

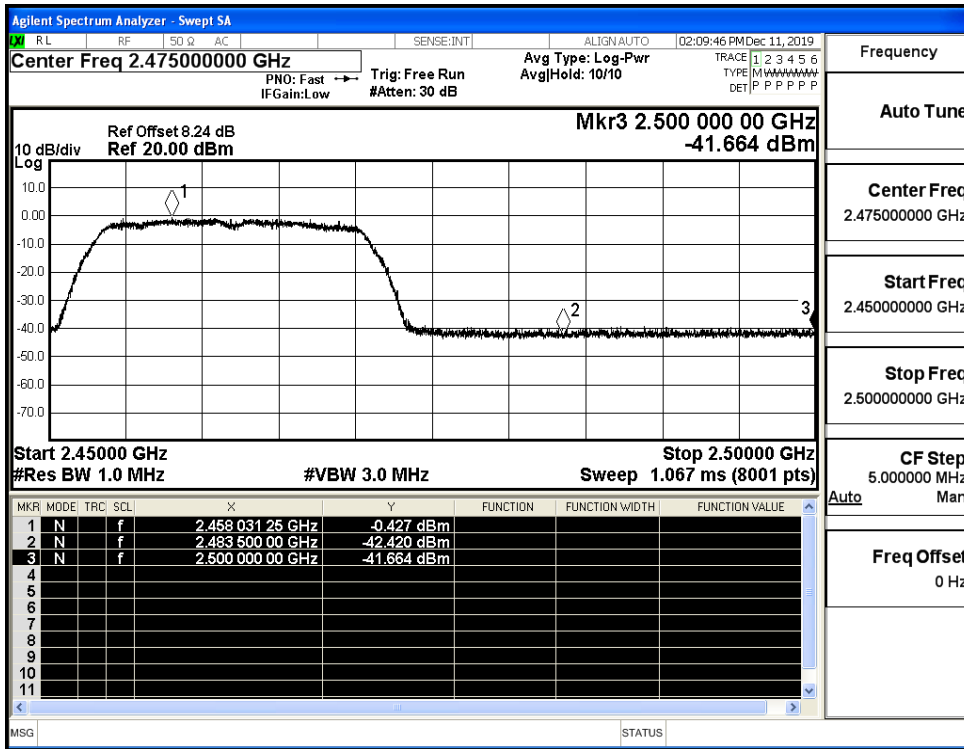

Restrict-band band-edge measurements_11N20SISO_2462_Ant1_AV

