



802.11n-HT20 6dB Bandwidth - Ant B


Channel 149 (5745MHz)

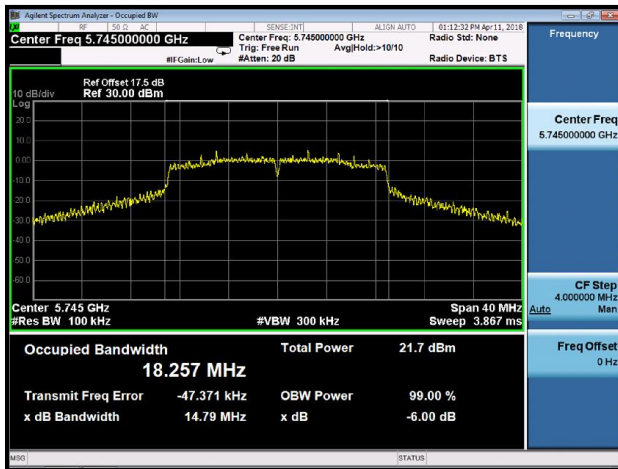

Channel 157 (5785MHz)

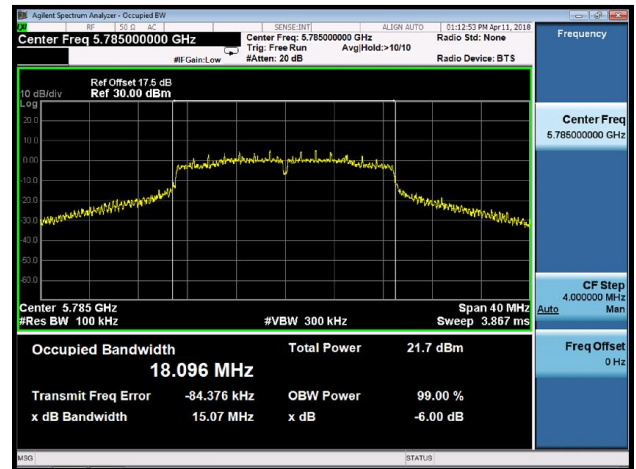


Channel 165 (5825MHz)

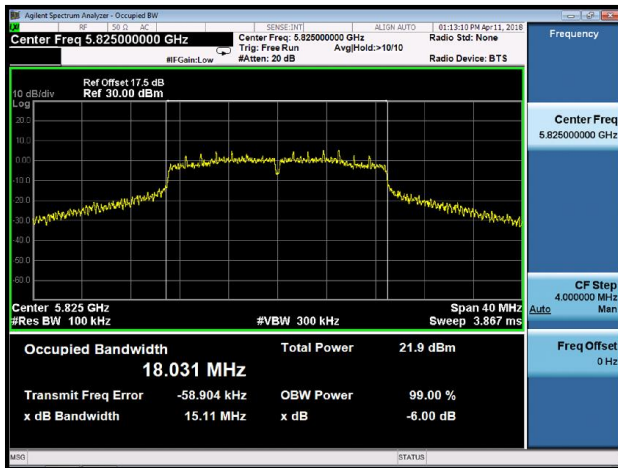


802.11n-HT40 6dB Bandwidth - Ant B

Channel 151 (5755MHz)

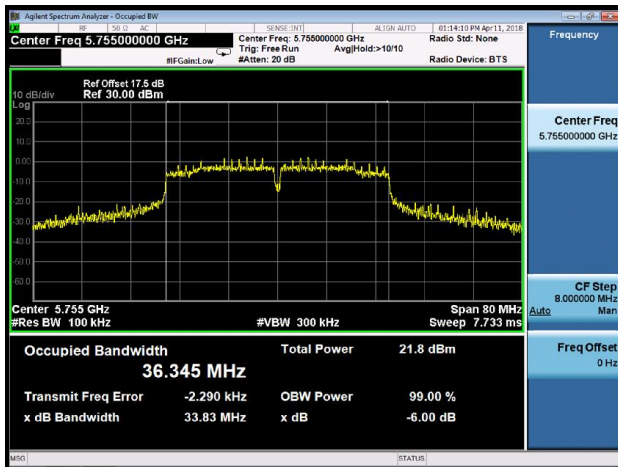


Channel 159 (5795MHz)

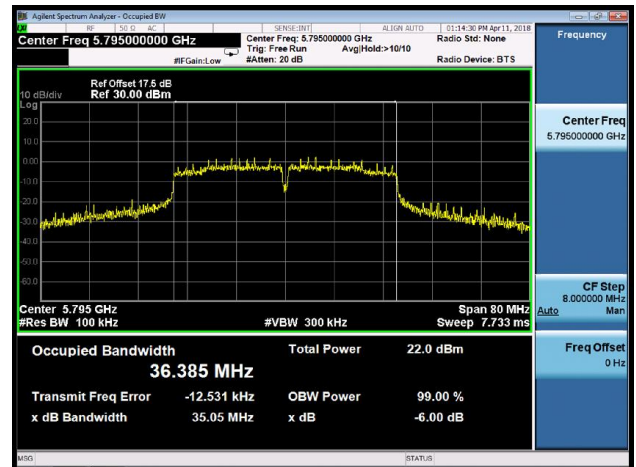


802.11ac-VHT20 6dB Bandwidth - Ant B


Channel 149 (5745MHz)

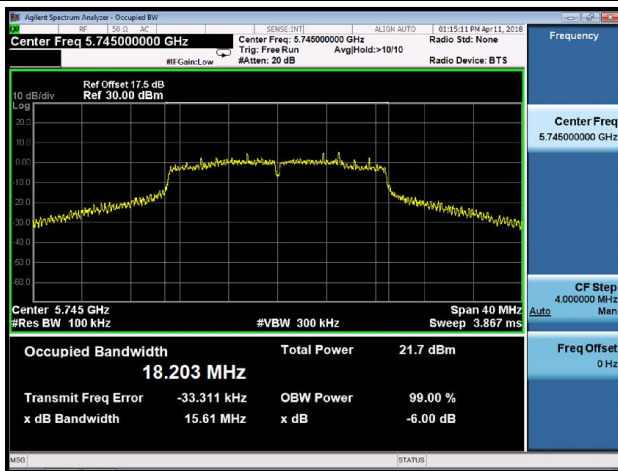

Channel 157 (5785MHz)

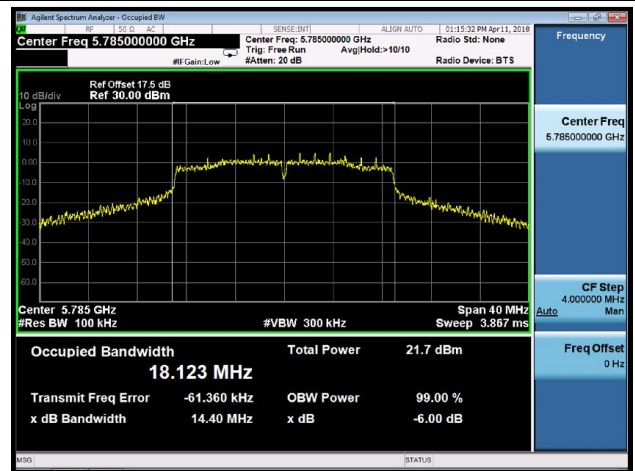


Channel 165 (5825MHz)

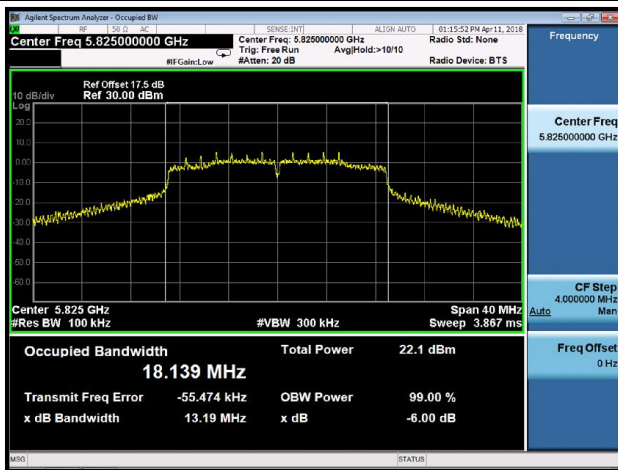


802.11ac-VHT40 6dB Bandwidth - Ant B

Channel 151 (5755MHz)

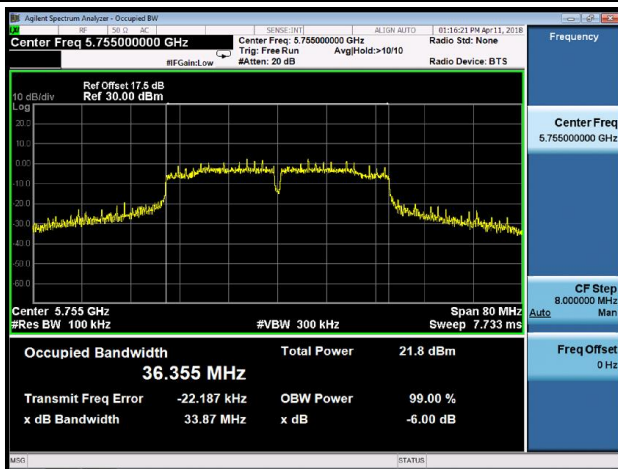


Channel 159 (5795MHz)

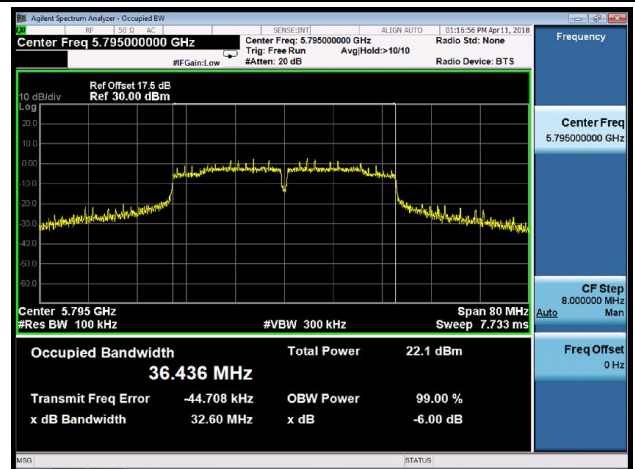

802.11ac-VHT80 6dB Bandwidth - Ant B

Channel 155 (5775MHz)

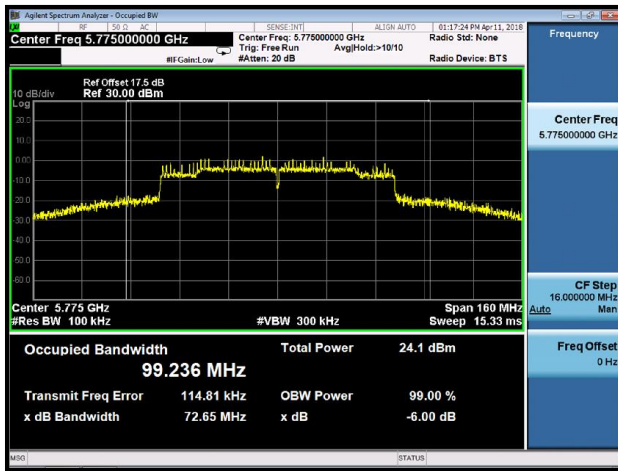

7.4. Output Power Measurement

7.4.1. Test Limit

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.4.2. Test Procedure Used

KDB 789033 D02v02r01 - Section E) 3) b) Method PM-G

7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.4.4. Test Setup

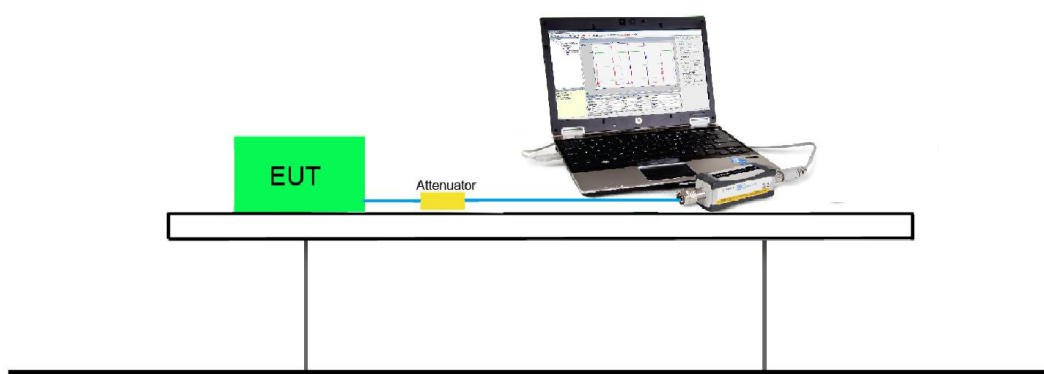

7.4.5. Test Result

Power output test was verified over all data rates of each mode shown as below table, and then choose the maximum power output (gray marker) for final test of each channel.

For Ant A:

Test Mode	Bandwidth	Channel	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
802.11a	20	36	5180	6Mbps	15.83
				24Mbps	15.62
				54Mbps	15.38
802.11n	20	36	5180	MCS0	16.11
				MCS4	15.92
				MCS7	15.68
802.11n	40	38	5190	MCS0	14.27
				MCS4	14.05
				MCS7	13.86
802.11ac	20	36	5180	MCS0	15.66
				MCS4	15.47
				MCS8	15.32
802.11ac	40	38	5190	MCS0	14.29
				MCS4	14.08
				MCS9	13.85
802.11ac	80	42	5210	MCS0	12.01
				MCS4	11.84
				MCS9	11.65

Product	Acute Angle PC	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	64%
Test Site	SR2	Test Date	2018/03/22

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant A Average Power (dBm)	Ant B Average Power (dBm)	Average Power Limit (dBm)	Result
11a	6Mbps	36	5180	15.83	16.29	≤ 23.98	Pass
11a	6Mbps	44	5220	17.23	17.25	≤ 23.98	Pass
11a	6Mbps	48	5240	17.11	17.17	≤ 23.98	Pass
11a	6Mbps	52	5260	17.39	17.41	≤ 23.98	Pass
11a	6Mbps	60	5300	17.03	17.15	≤ 23.98	Pass
11a	6Mbps	64	5320	16.31	16.98	≤ 23.98	Pass
11a	6Mbps	100	5500	15.48	16.19	≤ 23.98	Pass
11a	6Mbps	120	5600	16.44	16.42	≤ 23.98	Pass
11a	6Mbps	140	5700	16.58	16.09	≤ 23.98	Pass
11a	6Mbps	144	5720	16.35	16.36	≤ 23.98	Pass
11a	6Mbps	149	5745	16.51	16.31	≤ 30.00	Pass
11a	6Mbps	157	5785	16.16	16.42	≤ 30.00	Pass
11a	6Mbps	165	5825	15.83	16.24	≤ 30.00	Pass
11n-HT20	MCS0	36	5180	16.11	15.71	≤ 23.98	Pass
11n-HT20	MCS0	44	5220	17.34	17.19	≤ 23.98	Pass
11n-HT20	MCS0	48	5240	17.28	17.11	≤ 23.98	Pass
11n-HT20	MCS0	52	5260	17.17	17.04	≤ 23.98	Pass
11n-HT20	MCS0	60	5300	17.02	17.09	≤ 23.98	Pass
11n-HT20	MCS0	64	5320	16.15	16.99	≤ 23.98	Pass
11n-HT20	MCS0	100	5500	15.04	16.17	≤ 23.98	Pass
11n-HT20	MCS0	120	5600	16.63	16.74	≤ 23.98	Pass
11n-HT20	MCS0	140	5700	16.17	15.45	≤ 23.98	Pass
11n-HT20	MCS0	144	5720	16.58	16.35	≤ 23.98	Pass
11n-HT20	MCS0	149	5745	16.34	16.27	≤ 30.00	Pass
11n-HT20	MCS0	157	5785	15.72	16.37	≤ 30.00	Pass
11n-HT20	MCS0	165	5825	15.69	16.13	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant A Average Power (dBm)	Ant B Average Power (dBm)	Average Power Limit (dBm)	Result
11n-HT40	MCS0	38	5190	14.27	13.06	≤ 23.98	Pass
11n-HT40	MCS0	46	5230	17.25	17.05	≤ 23.98	Pass
11n-HT40	MCS0	54	5270	17.01	16.85	≤ 23.98	Pass
11n-HT40	MCS0	62	5310	15.46	14.62	≤ 23.98	Pass
11n-HT40	MCS0	102	5510	14.56	14.46	≤ 23.98	Pass
11n-HT40	MCS0	118	5590	15.82	16.31	≤ 23.98	Pass
11n-HT40	MCS0	134	5670	16.41	16.49	≤ 23.98	Pass
11n-HT40	MCS0	142	5710	16.11	16.35	≤ 23.98	Pass
11n-HT40	MCS0	151	5755	16.23	16.13	≤ 30.00	Pass
11n-HT40	MCS0	159	5795	15.74	16.31	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	15.66	15.28	≤ 23.98	Pass
11ac-VHT20	MCS0	44	5220	16.67	17.19	≤ 23.98	Pass
11ac-VHT20	MCS0	48	5240	17.29	17.13	≤ 23.98	Pass
11ac-VHT20	MCS0	52	5260	17.19	17.07	≤ 23.98	Pass
11ac-VHT20	MCS0	60	5300	16.96	17.05	≤ 23.98	Pass
11ac-VHT20	MCS0	64	5320	15.88	16.96	≤ 23.98	Pass
11ac-VHT20	MCS0	100	5500	14.73	16.21	≤ 23.98	Pass
11ac-VHT20	MCS0	120	5600	16.61	16.70	≤ 23.98	Pass
11ac-VHT20	MCS0	140	5700	16.09	15.72	≤ 23.98	Pass
11ac-VHT20	MCS0	144	5720	16.55	16.36	≤ 23.98	Pass
11ac-VHT20	MCS0	149	5745	16.36	16.28	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	16.08	16.35	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	15.64	16.18	≤ 30.00	Pass
11ac-VHT40	MCS0	38	5190	14.29	13.09	≤ 23.89	Pass
11ac-VHT40	MCS0	46	5230	16.83	17.12	≤ 23.89	Pass
11ac-VHT40	MCS0	54	5270	16.75	16.93	≤ 23.89	Pass
11ac-VHT40	MCS0	62	5310	15.52	15.44	≤ 23.98	Pass
11ac-VHT40	MCS0	102	5510	14.57	13.19	≤ 23.98	Pass
11ac-VHT40	MCS0	118	5590	16.30	16.32	≤ 23.98	Pass
11ac-VHT40	MCS0	134	5670	16.06	16.48	≤ 23.98	Pass
11ac-VHT40	MCS0	142	5710	16.58	16.32	≤ 23.98	Pass
11ac-VHT40	MCS0	151	5755	16.27	16.09	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	15.92	16.26	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant A Average Power (dBm)	Ant B Average Power (dBm)	Average Power Limit (dBm)	Result
11ac-VHT80	MCS0	42	5210	12.01	13.23	≤ 23.98	Pass
11ac-VHT80	MCS0	58	5290	13.24	12.34	≤ 23.98	Pass
11ac-VHT80	MCS0	106	5530	11.08	12.59	≤ 23.98	Pass
11ac-VHT80	MCS0	122	5610	17.60	17.81	≤ 23.98	Pass
11ac-VHT80	MCS0	138	5690	17.26	17.18	≤ 23.98	Pass
11ac-VHT80	MCS0	155	5775	15.22	17.55	≤ 30.00	Pass

Note: Average Power Limit Calculation as below:

For 5150-5250MHz: Limit (dBm) = 23.98dBm

For 5250-5350MHz & 5470-5725MHz:

20MHz Bandwidth: Limit (dBm) = $11 + 10 \cdot \log(23.73\text{MHz}) = 24.75\text{dBm} > 23.98\text{dBm}$

40MHz & 80MHz Bandwidth: Limit (dBm) = 23.98dBm

For 5725-5850MHz: Limit (dBm) = 30.00dBm.

7.5. Transmit Power Control

7.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


7.5.2. Test Procedure Used

KDB 789033 D02v01- Section E) 3) b) Method PM-G

7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.5.4. Test Setup

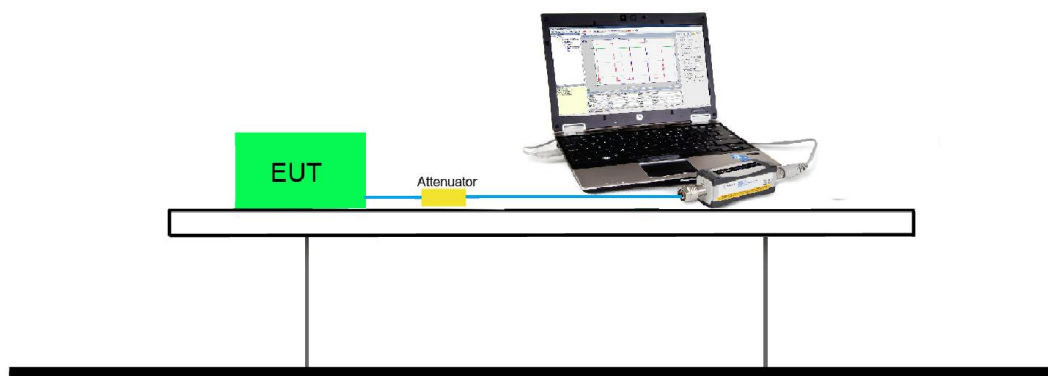

7.5.5. Test Result

A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

7.6. Power Spectral Density Measurement

7.6.1. Test Limit

For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.6.2. Test Procedure Used

KDB 789033 D02v02r01 - Section F

7.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
RBW = 100 kHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
11. When the measurement bandwidth of Maximum PSD is specified in 500 kHz, add a constant factor $10 \cdot \log(500\text{kHz}/100\text{kHz}) = 6.99$ dB to the measured result.

7.6.4. Test Setup

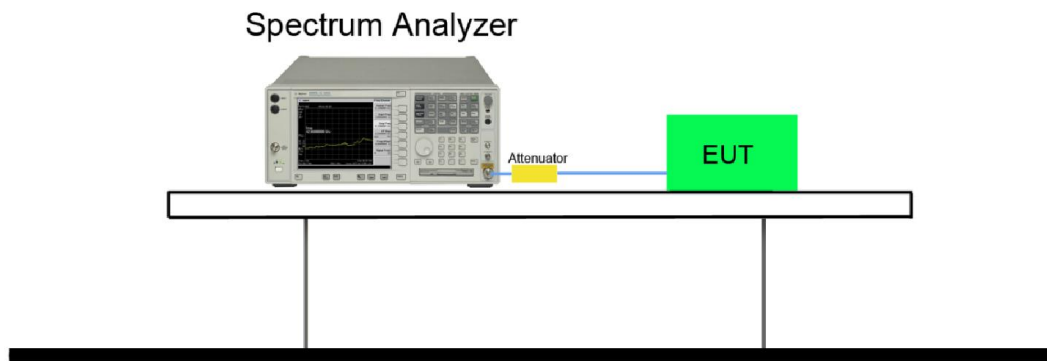

7.6.5.Test Result

Product	Acute Angle PC	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	64%
Test Site	SR2	Test Date	2018/04/11
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2A & UNII-2C)		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant A PSD (dBm/MHz)	Ant B PSD (dBm/MHz)	Duty Cycle (%)	Final Ant A PSD (dBm/MHz)	Final Ant B PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11a	6Mbps	36	5180	4.90	5.40	98.51	4.90	5.40	≤ 11.00	Pass
11a	6Mbps	44	5220	6.75	6.23	98.51	6.75	6.23	≤ 11.00	Pass
11a	6Mbps	48	5240	6.35	6.46	98.51	6.35	6.46	≤ 11.00	Pass
11a	6Mbps	52	5260	6.37	6.60	98.51	6.37	6.60	≤ 11.00	Pass
11a	6Mbps	60	5300	6.29	6.33	98.51	6.29	6.33	≤ 11.00	Pass
11a	6Mbps	64	5320	5.59	6.21	98.51	5.59	6.21	≤ 11.00	Pass
11a	6Mbps	100	5500	4.91	5.48	98.51	4.91	5.48	≤ 11.00	Pass
11a	6Mbps	120	5600	5.79	5.93	98.51	5.79	5.93	≤ 11.00	Pass
11a	6Mbps	140	5700	4.82	4.92	98.51	4.82	4.92	≤ 11.00	Pass
11a	6Mbps	144	5720	4.89	5.18	98.51	4.89	5.18	≤ 11.00	Pass
11n-HT20	6Mbps	36	5180	4.45	4.19	98.45	4.45	4.19	≤ 11.00	Pass
11n-HT20	6Mbps	44	5220	5.61	5.95	98.45	5.61	5.95	≤ 11.00	Pass
11n-HT20	6Mbps	48	5240	5.74	5.99	98.45	5.74	5.99	≤ 11.00	Pass
11n-HT20	6Mbps	52	5260	6.14	6.13	98.45	6.14	6.13	≤ 11.00	Pass
11n-HT20	6Mbps	60	5300	6.04	5.90	98.45	6.04	5.90	≤ 11.00	Pass
11n-HT20	6Mbps	64	5320	5.19	5.93	98.45	5.19	5.93	≤ 11.00	Pass
11n-HT20	6Mbps	100	5500	4.03	5.12	98.45	4.03	5.12	≤ 11.00	Pass
11n-HT20	6Mbps	120	5600	5.67	5.58	98.45	5.67	5.58	≤ 11.00	Pass
11n-HT20	6Mbps	140	5700	4.72	4.12	98.45	4.72	4.12	≤ 11.00	Pass
11n-HT20	6Mbps	144	5720	4.54	5.15	98.45	4.54	5.15	≤ 11.00	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant A PSD (dBm/MHz)	Ant B PSD (dBm/MHz)	Duty Cycle (%)	Final Ant A PSD (dBm/MHz)	Final Ant B PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11n-HT40	MCS0	38	5190	-1.15	-2.07	96.98	-1.02	-1.94	≤ 11.00	Pass
11n-HT40	MCS0	46	5230	2.61	2.83	96.98	2.74	2.96	≤ 11.00	Pass
11n-HT40	MCS0	54	5270	2.84	2.94	96.98	2.97	3.07	≤ 11.00	Pass
11n-HT40	MCS0	62	5310	1.30	0.05	96.98	1.43	0.18	≤ 11.00	Pass
11n-HT40	MCS0	102	5510	0.81	0.30	96.98	0.94	0.43	≤ 11.00	Pass
11n-HT40	MCS0	118	5590	2.27	2.19	96.98	2.40	2.32	≤ 11.00	Pass
11n-HT40	MCS0	134	5670	1.40	1.56	96.98	1.53	1.69	≤ 11.00	Pass
11n-HT40	MCS0	142	5710	1.55	1.44	96.98	1.68	1.57	≤ 11.00	Pass
11ac-VHT20	MCS0	36	5180	4.38	3.85	98.45	4.38	3.85	≤ 11.00	Pass
11ac-VHT20	MCS0	44	5220	5.72	5.73	98.45	5.72	5.73	≤ 11.00	Pass
11ac-VHT20	MCS0	48	5240	5.76	5.88	98.45	5.76	5.88	≤ 11.00	Pass
11ac-VHT20	MCS0	52	5260	6.54	6.17	98.45	6.54	6.17	≤ 11.00	Pass
11ac-VHT20	MCS0	60	5300	5.81	6.27	98.45	5.81	6.27	≤ 11.00	Pass
11ac-VHT20	MCS0	64	5320	4.65	5.83	98.45	4.65	5.83	≤ 11.00	Pass
11ac-VHT20	MCS0	100	5500	3.77	5.84	98.45	3.77	5.84	≤ 11.00	Pass
11ac-VHT20	MCS0	120	5600	5.64	5.73	98.45	5.64	5.73	≤ 11.00	Pass
11ac-VHT20	MCS0	140	5700	4.42	4.27	98.45	4.42	4.27	≤ 11.00	Pass
11ac-VHT20	MCS0	144	5720	5.03	4.91	98.45	5.03	4.91	≤ 11.00	Pass
11ac-VHT40	MCS0	38	5190	-0.97	-1.55	97.27	-0.85	-1.43	≤ 11.00	Pass
11ac-VHT40	MCS0	46	5230	2.45	2.78	97.27	2.57	2.90	≤ 11.00	Pass
11ac-VHT40	MCS0	54	5270	2.66	3.09	97.27	2.78	3.21	≤ 11.00	Pass
11ac-VHT40	MCS0	62	5310	1.13	0.85	97.27	1.25	0.97	≤ 11.00	Pass
11ac-VHT40	MCS0	102	5510	0.50	-1.10	97.27	0.62	-0.98	≤ 11.00	Pass
11ac-VHT40	MCS0	118	5590	2.24	2.33	97.27	2.36	2.45	≤ 11.00	Pass
11ac-VHT40	MCS0	134	5670	1.50	1.62	97.27	1.62	1.74	≤ 11.00	Pass
11ac-VHT40	MCS0	142	5710	1.81	1.46	97.27	1.93	1.58	≤ 11.00	Pass
11ac-VHT80	MCS0	42	5210	-6.00	-4.75	93.75	-5.72	-4.47	≤ 11.00	Pass
11ac-VHT80	MCS0	58	5290	-5.04	-5.86	93.75	-4.76	-5.58	≤ 11.00	Pass
11ac-VHT80	MCS0	106	5530	-6.19	-4.71	93.75	-5.91	-4.43	≤ 11.00	Pass
11ac-VHT80	MCS0	122	5610	-0.24	0.16	93.75	0.04	0.44	≤ 11.00	Pass
11ac-VHT80	MCS0	138	5690	-0.76	-0.81	93.75	-0.48	-0.53	≤ 11.00	Pass

Note 1: When EUT duty cycle ≥ 98%, Final Ant A PSD (dBm/ MHz) = Ant A PSD (dBm/ MHz).

Final Ant B PSD (dBm/ MHz) = Ant B PSD (dBm/ MHz).

Note 2: When EUT duty cycle < 98%, Final Ant A PSD (dBm/ MHz) = Ant A PSD (dBm/ MHz) + 10*log (1/Duty Cycle).

Final Ant B PSD (dBm/ MHz) = Ant B PSD (dBm/ MHz) + 10*log (1/Duty Cycle).

Note 3: PSD Limit Calculation as below:

For 5150-5250MHz & For 5250-5350MHz & 5470-5725MHz:

802.11ac-VHT20/ac-VHT40/ac-VHT80: Limit (dBm/MHz) = 11dBm/MHz.

Product	ACCESS POINT	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	64%
Test Site	SR2	Test Date	2018/04/11
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant A PSD (dBm/100kHz)	Ant B PSD (dBm/100kHz)	Duty Cycle (%)	Constant Factor (dB)	Final Ant A PSD (dBm/500kHz)	Final Ant B PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
11a	6Mbps	149	5745	-3.64	-3.78	98.51	6.99	3.35	3.21	≤ 30.00	Pass
11a	6Mbps	157	5785	-4.05	-3.16	98.51	6.99	2.94	3.83	≤ 30.00	Pass
11a	6Mbps	165	5825	-4.30	-3.99	98.51	6.99	2.69	3.00	≤ 30.00	Pass
11n-HT20	MCS0	149	5745	-3.74	-3.82	98.45	6.99	3.25	3.17	≤ 30.00	Pass
11n-HT20	MCS0	157	5785	-4.36	-4.24	98.45	6.99	2.63	2.75	≤ 30.00	Pass
11n-HT20	MCS0	165	5825	-4.41	-3.72	98.45	6.99	2.58	3.27	≤ 30.00	Pass
11n-HT40	MCS0	151	5755	-7.12	-7.10	96.98	6.99	0.00	0.02	≤ 30.00	Pass
11n-HT40	MCS0	159	5795	-7.64	-6.75	96.98	6.99	-0.52	0.37	≤ 30.00	Pass
11ac-VHT20	MCS0	149	5745	-4.41	-4.27	98.45	6.99	2.58	2.72	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	-4.54	-4.03	98.45	6.99	2.45	2.96	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	-4.57	-4.25	98.45	6.99	2.42	2.74	≤ 30.00	Pass
11ac-VHT40	MCS0	151	5755	-7.17	-7.46	97.27	6.99	-0.06	-0.35	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	-7.66	-6.81	97.27	6.99	-0.55	0.30	≤ 30.00	Pass
11ac-VHT80	MCS0	155	5775	-11.22	-8.42	93.75	6.99	-3.95	-1.15	≤ 30.00	Pass

Note 1: When EUT duty cycle ≥ 98%, Final Ant A PSD (dBm/ 500kHz) = Ant A PSD (dBm/ 100kHz) + Constant Factor (dB).

Final Ant B PSD (dBm/ 500kHz) = Ant B PSD (dBm/ 100kHz) + Constant Factor (dB).

Note 2: When EUT duty cycle < 98%, Final Ant A PSD (dBm/ 500kHz) = Ant A PSD (dBm/ 100kHz) + Constant Factor (dB) + 10*log (1/Duty Cycle).

Final Ant B PSD (dBm/ 500kHz) = Ant B PSD (dBm/ 100kHz) + Constant Factor (dB) + 10*log (1/Duty Cycle).

Note 3: PSD Limit Calculation as below:

For 802.11a/ac-VHT20/ac-VHT40/ac-VHT80: Limit (dBm/500kHz) = 30dBm/500kHz.

802.11a Power Spectral Density - Ant A

Channel 36 (5180MHz)




Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 52 (5260MHz)

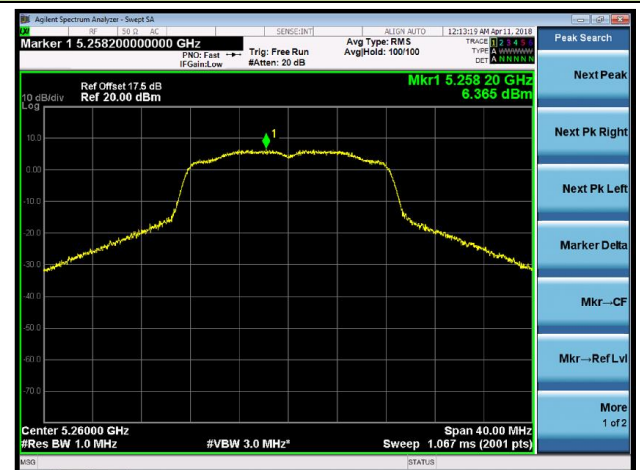

Channel 60 (5300MHz)



Channel 64 (5320MHz)



802.11a Power Spectral Density - Ant A

Channel 100 (5500MHz)



Channel 120 (5600MHz)




Channel 140 (5700MHz)




Channel 144 (5720MHz)



Channel 149 (5745MHz)

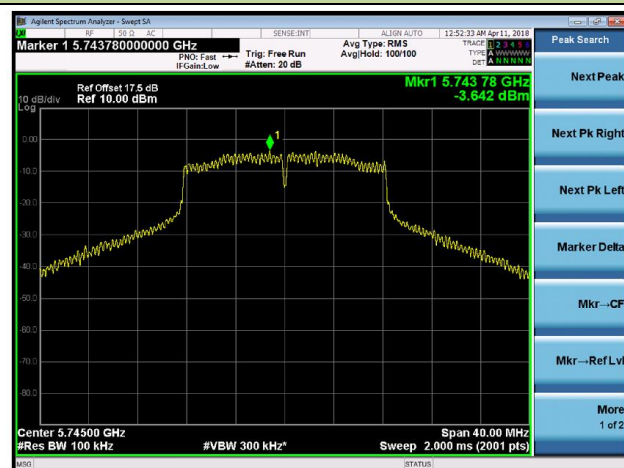


Channel 157 (5785MHz)

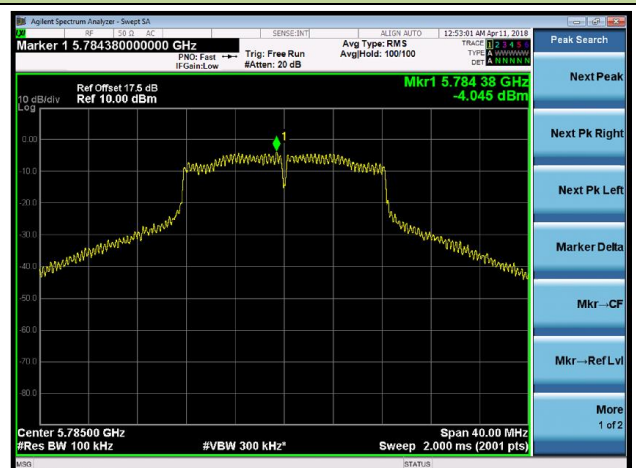

802.11a Power Spectral Density - Ant A

Channel 165 (5825MHz)

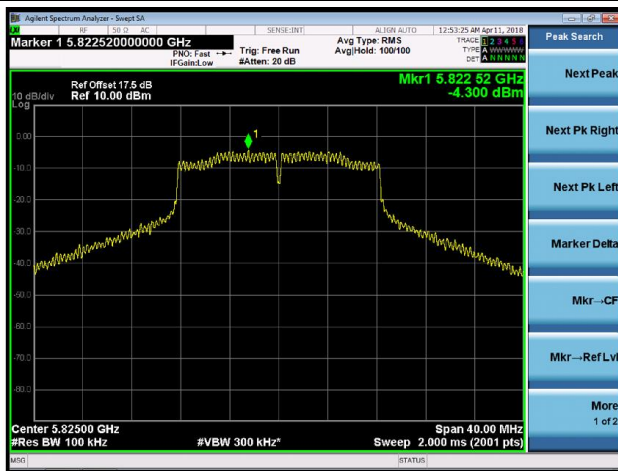

802.11n-HT20 Power Spectral Density - Ant A

Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 52 (5260MHz)



Channel 60 (5300MHz)



Channel 64 (5320MHz)



802.11n-HT20 Power Spectral Density - Ant A

Channel 100 (5500MHz)




Channel 120 (5600MHz)




Channel 140 (5700MHz)




Channel 144 (5720MHz)

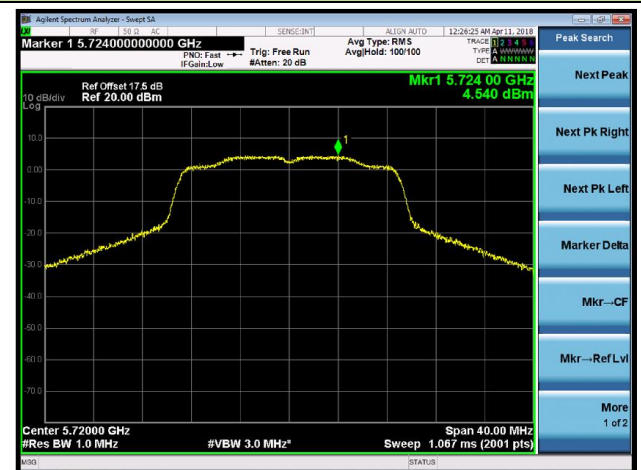

Channel 149 (5745MHz)

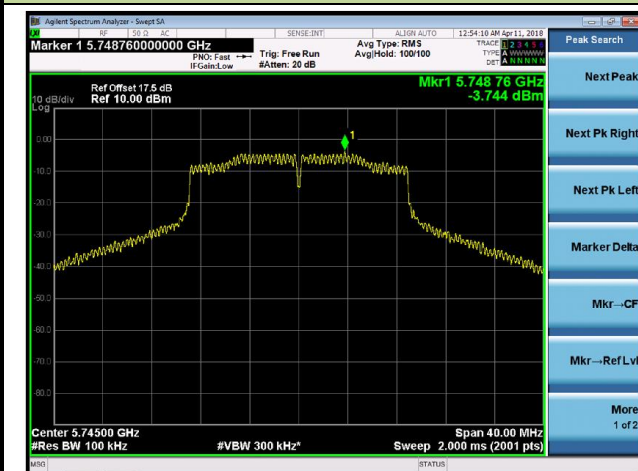

Channel 157 (5785MHz)

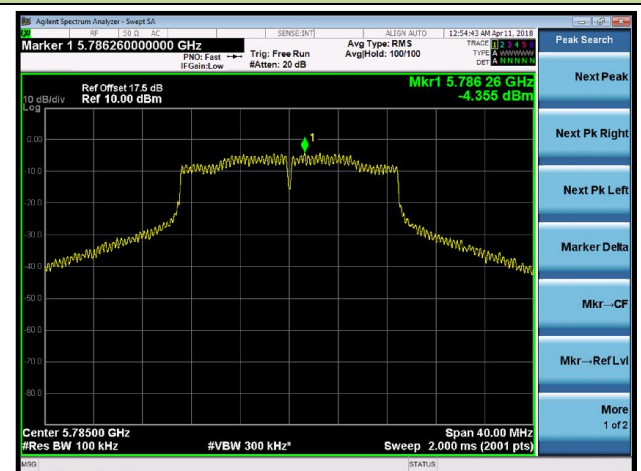

802.11n-HT20 Power Spectral Density - Ant A

Channel 165 (5825MHz)



802.11n-HT40 Power Spectral Density - Ant A


Channel 38 (5190MHz)



Channel 46 (5230MHz)



Channel 54 (5270MHz)

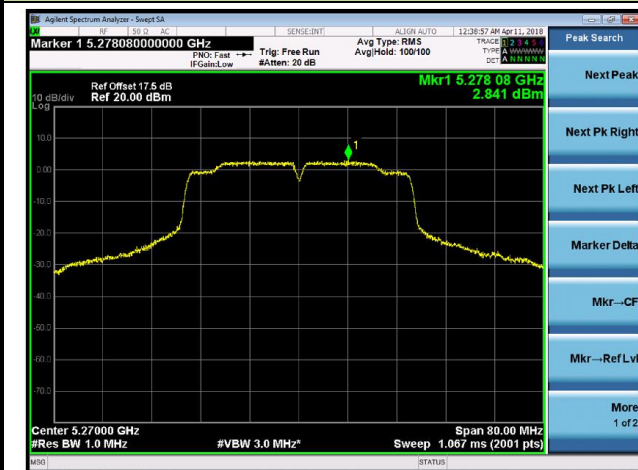

Channel 62 (5310MHz)



Channel 102 (5510MHz)



Channel 118 (5590MHz)




802.11n-HT40 Power Spectral Density - Ant A


Channel 134 (5670MHz)



Channel 142 (5710MHz)

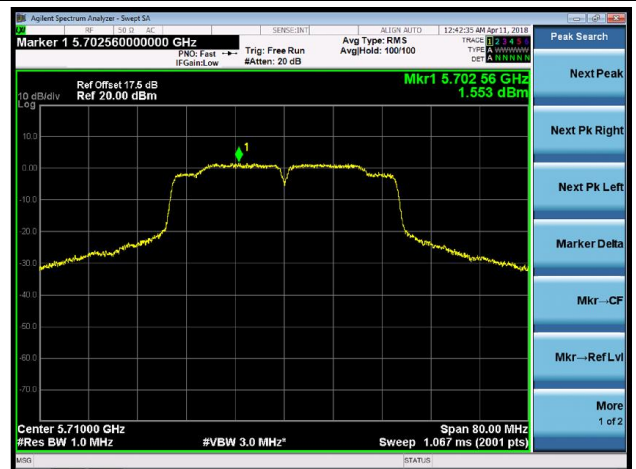

Channel 151 (5755MHz)

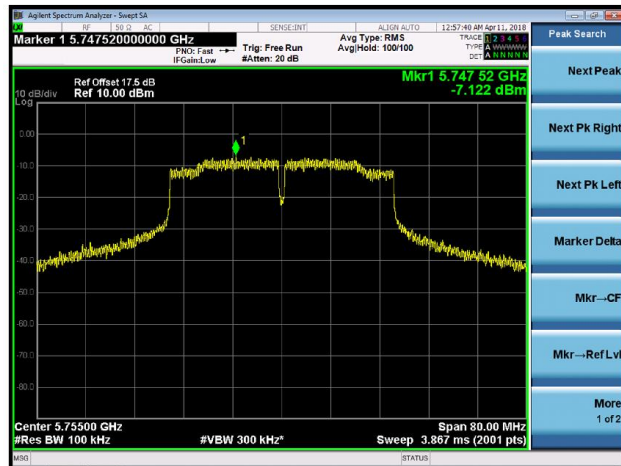

Channel 159 (5795MHz)



802.11ac-VHT20 Power Spectral Density - Ant A

Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)




Channel 52 (5260MHz)



Channel 60 (5300MHz)



Channel 64 (5320MHz)

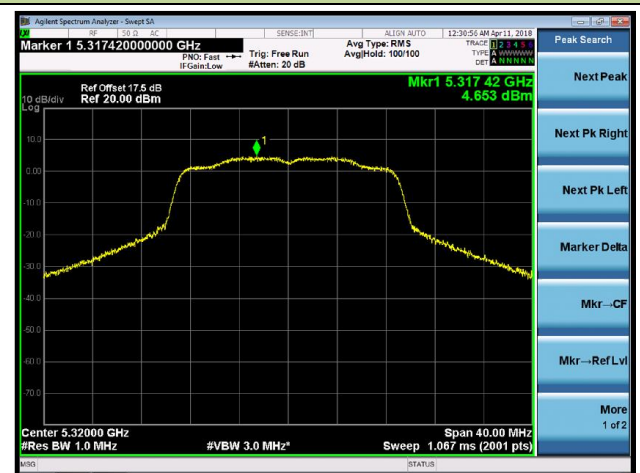

802.11ac-VHT20 Power Spectral Density - Ant A

Channel 100 (5500MHz)



Channel 120 (5600MHz)




Channel 140 (5700MHz)



Channel 144 (5720MHz)



Channel 149 (5745MHz)

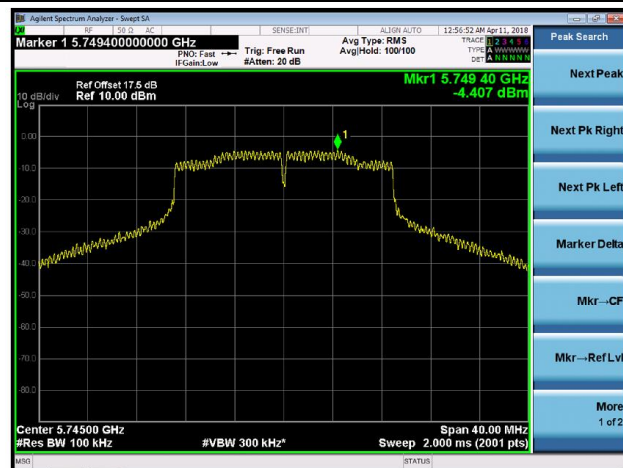

Channel 157 (5785MHz)




802.11ac-VHT20 Power Spectral Density - Ant A

Channel 165 (5825MHz)



802.11ac-VHT40 Power Spectral Density - Ant A


Channel 38 (5190MHz)

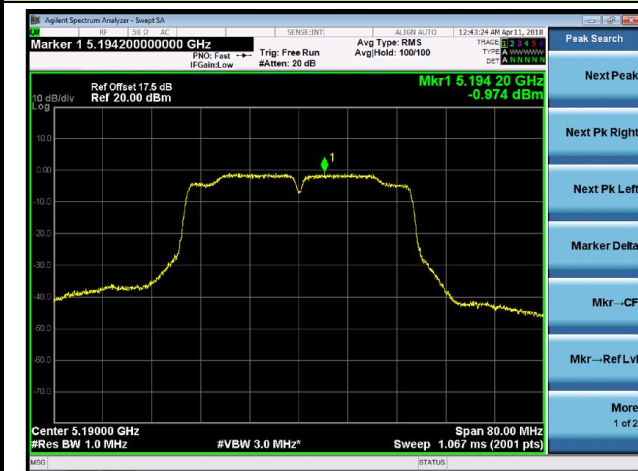


Channel 46 (5230MHz)



Channel 54 (5270MHz)

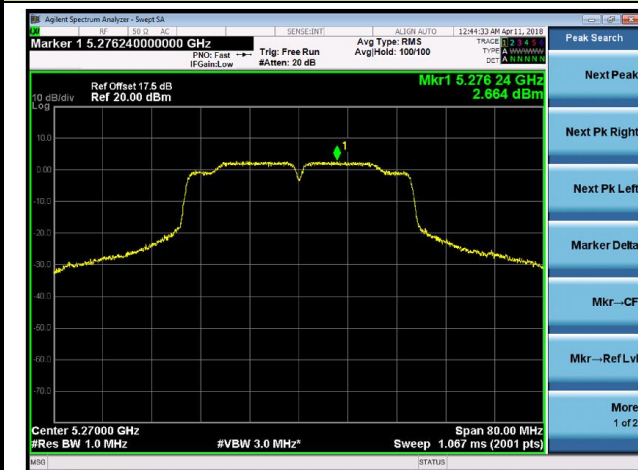

Channel 62 (5310MHz)

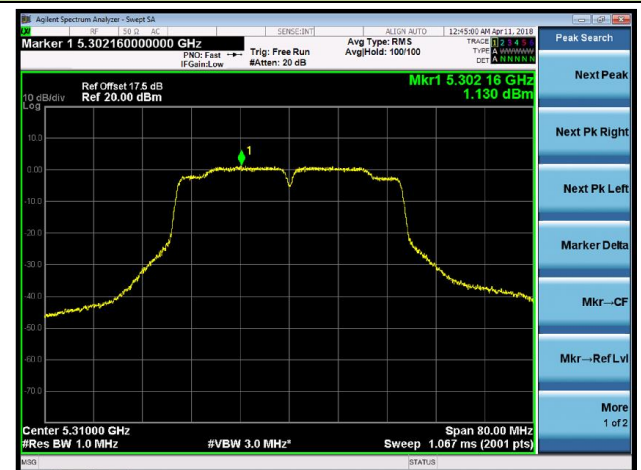

Channel 102 (5510MHz)




Channel 118 (5590MHz)




802.11ac-VHT40 Power Spectral Density - Ant A


Channel 134 (5670MHz)

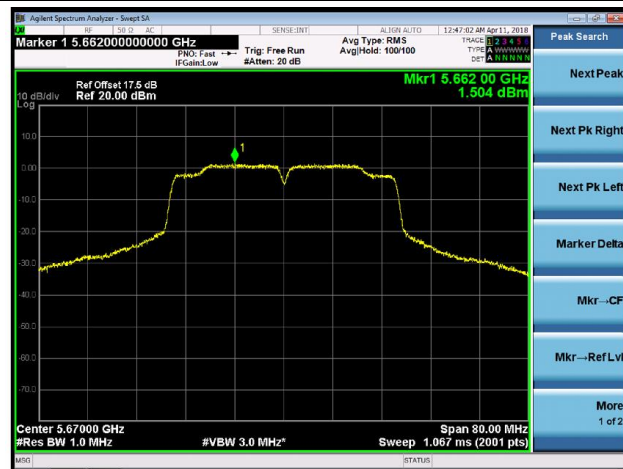


Channel 142 (5710MHz)

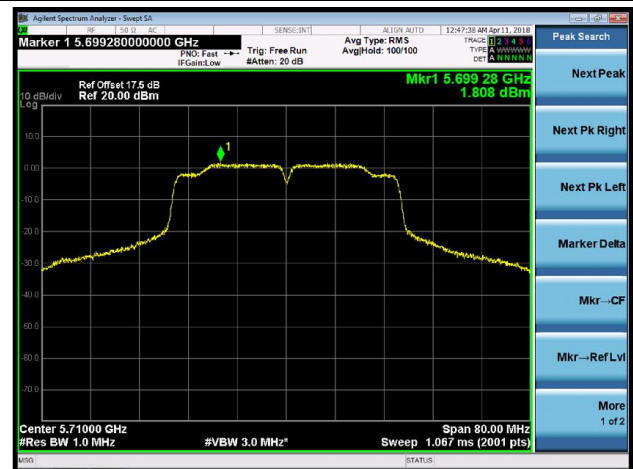

Channel 151 (5755MHz)

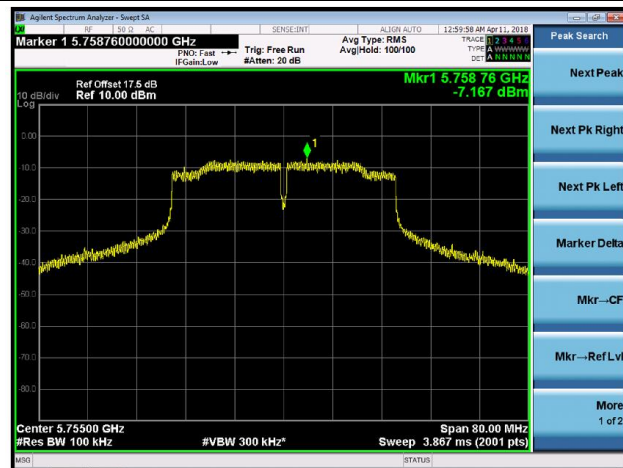

Channel 159 (5795MHz)

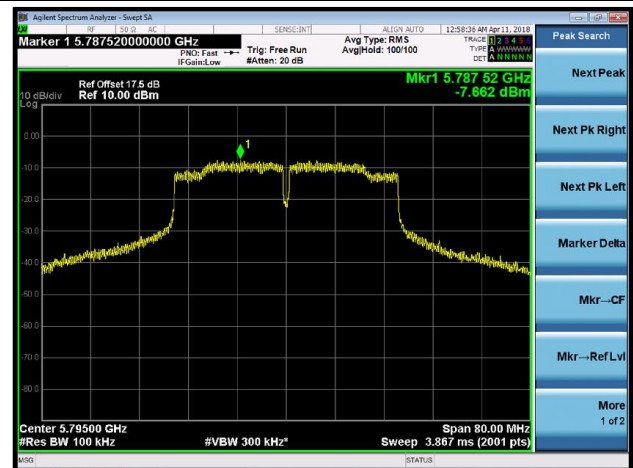

802.11ac-VHT80 Power Spectral Density - Ant A

Channel 42 (5210MHz)



Channel 58 (5290MHz)



Channel 106 (5530MHz)



Channel 122 (5610MHz)



Channel 138 (5690MHz)



Channel 155 (5775MHz)



802.11a Power Spectral Density - Ant B

Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)




Channel 52 (5260MHz)



Channel 60 (5300MHz)



Channel 64 (5320MHz)

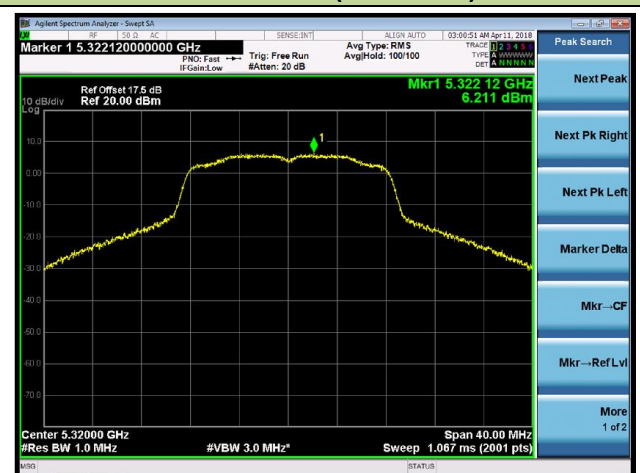

802.11a Power Spectral Density - Ant B


Channel 100 (5500MHz)



Channel 120 (5600MHz)




Channel 140 (5700MHz)

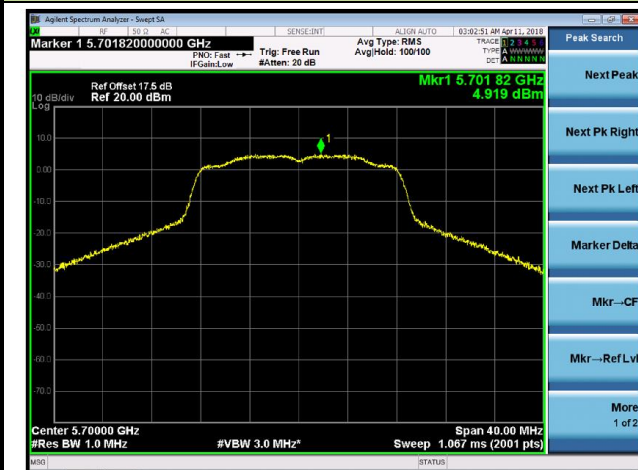


Channel 144 (5720MHz)



Channel 149 (5745MHz)

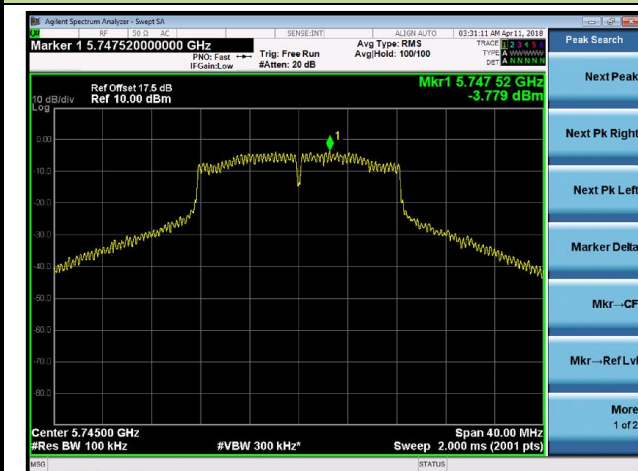

Channel 157 (5785MHz)

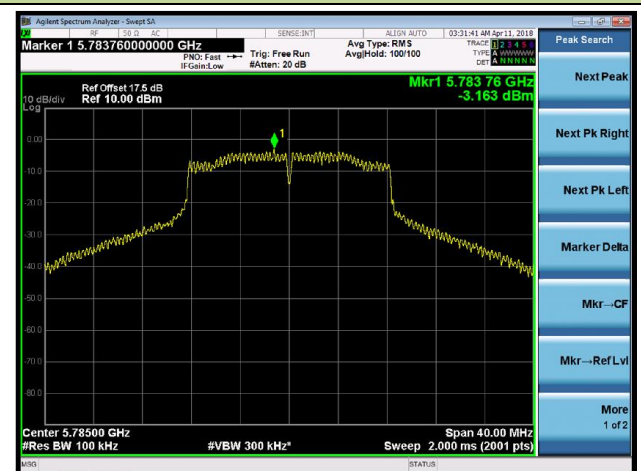

802.11a Power Spectral Density - Ant B

Channel 165 (5825MHz)

