

TEST REPORT

Product : ACOUSTIC GUITAR AMP
Trade mark : AROMA
Model/Type reference : AG-60A
Serial Number : N/A
Report Number : EED32L00247001
FCC ID : 2APP6AG-60A
Date of Issue: : Dec. 23, 2019
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Aroma Music Co., Ltd.
Floor 6 , Building 56 Baotian Industry Zone,
Baotian 3 Road Bao An District, Shenzhen 518102 China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

mark.chen.

Mark Chen

Compiled by:

sunlight sun

Sunlight Sun

Reviewed by:

Ware Xin

Ware Xin

Approved by:

Kevin Yang

Kevin Yang

Date:

Dec. 23, 2019

Check No.: 3096307268



2 Version

Version No.	Date	Description
00	Dec. 23, 2019	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 Test Requirement.....	5
5.1 Test setup.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 Test Environment.....	6
5.3 Test Condition.....	6
6 GENERAL INFORMATION	7
6.1 Client Information.....	7
6.2 General Description of EUT.....	7
6.3 Product Specification subjective to this standard.....	8
6.4 Description of Support Units.....	9
6.5 Test Location.....	9
6.6 Abnormalities from Standard Conditions.....	9
6.7 Other Information Requested by the Customer.....	9
6.8 Measurement Uncertainty(95% confidence levels, k=2).....	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	14
Appendix A): 20dB Occupied Bandwidth.....	16
Appendix B): Carrier Frequency Separation.....	23
Appendix C): Dwell Time.....	27
Appendix D): Hopping Channel Number.....	32
Appendix E): Conducted Peak Output Power.....	34
Appendix F): Band-edge for RF Conducted Emissions.....	38
Appendix G): RF Conducted Spurious Emissions.....	43
Appendix H) Pseudorandom Frequency Hopping Sequence.....	51
Appendix I)Antenna Requirement.....	52
Appendix J) AC Power Line Conducted Emission.....	53
Appendix K) Restricted bands around fundamental frequency (Radiated).....	56
Appendix L) Radiated Spurious Emissions.....	73
PHOTOGRAPHS OF TEST SETUP.....	80
PHOTOGRAPHS OF EUT Constructional Details.....	83

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

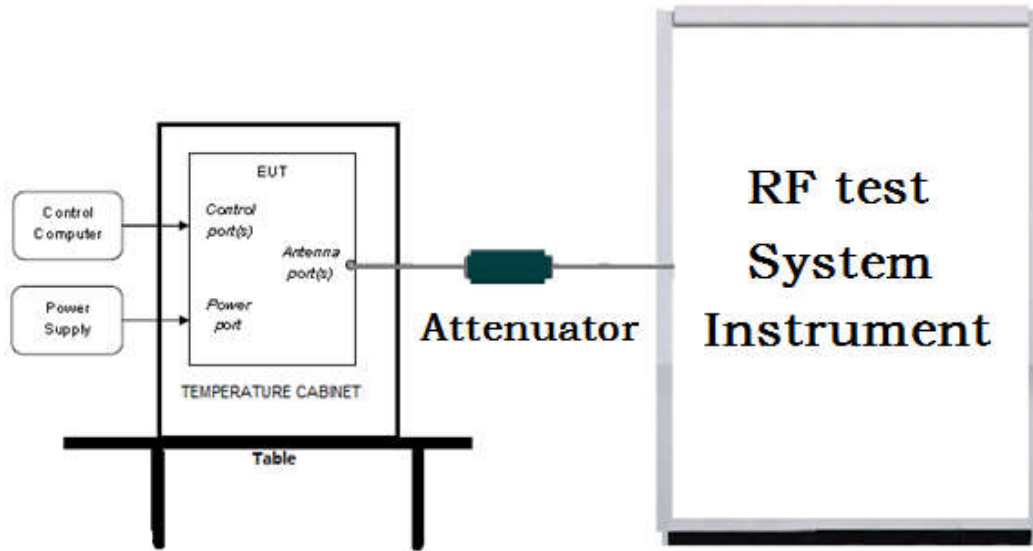

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

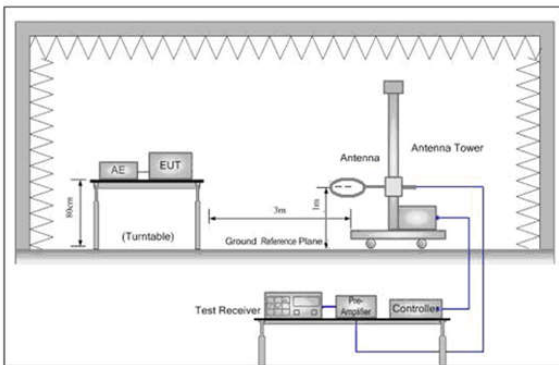


Figure 1. Below 30MHz

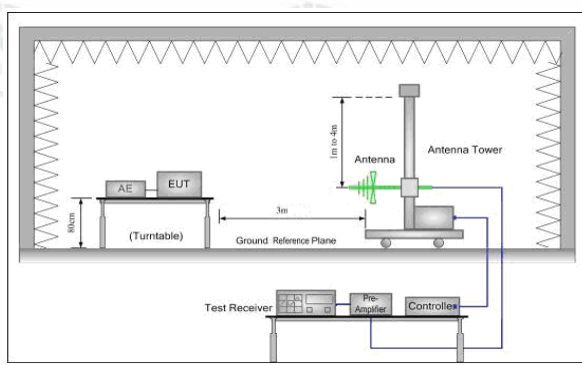


Figure 2. 30MHz to 1GHz


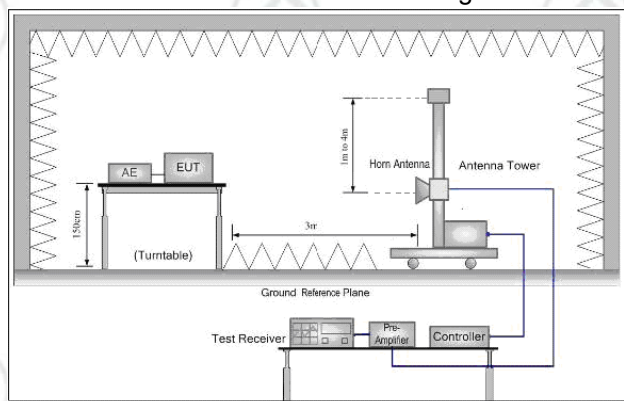


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

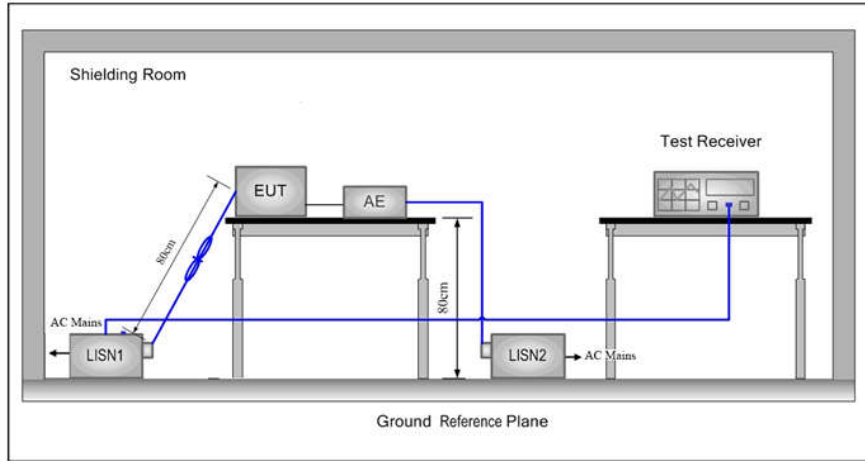

5.2 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel 79
		2402MHz	2441MHz	2480MHz

6 General Information

6.1 Client Information

Applicant:	Aroma Music Co., Ltd.
Address of Applicant:	Floor 6 , Building 56 Baotian Industry Zone, Baotian 3 Road Bao An District, Shenzhen 518102 China
Manufacturer:	Aroma Music Co., Ltd.
Address of Manufacturer:	Floor 6 , Building 56 Baotian Industry Zone, Baotian 3 Road Bao An District, Shenzhen 518102 China
Factory:	Aroma Music Co., Ltd.
Address of Factory:	Floor 6 , Building 56 Baotian Industry Zone, Baotian 3 Road Bao An District, Shenzhen 518102 China

6.2 General Description of EUT

Product Name:	ACOUSTIC GUITAR AMP	
Model No.(EUT):	AG-60A	
Tark mark:	AROMA	
EUT Supports Radios application	BT 5.0 Single mode	
Power Supply:	Battery	18.5V 2200mAH
	Adapter	MODEL: A361-24015001 INPUT: 100-240V~50/60HZ 1.5A OUTPUT:24V 1500mA
Sample Received Date:	Sep. 02, 2019	
Sample tested Date:	Sep. 02, 2019 to Oct. 10, 2019	

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz to 2480MHz
Bluetooth Version:	5.0
Modulation Type:	GFSK, $\pi/4$ DQPSK
Number of Channel:	79
Test Power Grade:	GFSK:10/10/10; $\pi/4$ DQPSK:6/6/6
Test Software of EUT:	PUTTY
Antenna Type:	PCB antenna
Antenna Gain:	-0.68 dBi
Test Voltage:	DC 24V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested independently

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd
Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China
Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

None.

6.6 Abnormalities from Standard Conditions

None.

6.7 Other Information Requested by the Customer

None.

6.8 Measurement Uncertainty(95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-28-2020
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-28-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-28-2020
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
DC Power	Keysight	E3642A	MY54426035	03-01-2019	02-28-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-28-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-2	15860006	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-1	15860004	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-4	158060007	03-01-2019	02-28-2020
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-01-2019	02-28-2020
Temperature/Humidity Indicator	biaozhi	HM10	1804186	07-26-2019	07-25-2020

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-18-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-12-2020
Communication test set	Agilent	E5515C	GB47050 534	03-01-2019	02-28-2020
Communication test set	R&S	CMW500	152394	03-01-2019	02-28-2020
LISN	R&S	ENV216	100098	05-08-2019	05-06-2020
LISN	schwarzbeck	NNLK8121	8121-529	05-08-2019	05-06-2020
Voltage Probe	R&S	ESH2-Z3 0299.7810.5 6	100042	06-13-2017	06-11-2020
Current Probe	R&S	EZ-17 816.2063.03	100106	05-20-2019	05-18-2020
ISN	TESEQ	ISN T800	30297	01-06-2019	01-15-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-18-2020

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-22-2020
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	12-21-2018	12-20-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-24-2020
Microwave Preamplifier	Agilent	8449B	3008A02425	07-12-2019	07-10-2020
Microwave Preamplifier	Tonscend	EMC051845SE	980380	01-16-2019	01-15-2020
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-25-2018	04-23-2021
Horn Antenna	ETS-LINDGREN	3117	00057410	06-05-2018	06-03-2021
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	374	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041.6041	07-26-2019	07-24-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-25-2021
Spectrum Analyzer	R&S	FSP40	100416	04-28-2019	04-26-2020
Receiver	R&S	ESCI	100435	05-20-2019	05-18-2020
Receiver	R&S	ESCI7	100938-003	11-23-2018	11-22-2019
Multi device Controller	maturio	NCD/070/10711112	---	01-09-2019	01-08-2020
LISN	schwarzbeck	NNBM8125	81251547	05-08-2019	05-06-2020
LISN	schwarzbeck	NNBM8125	81251548	05-08-2019	05-06-2020
Signal Generator	Agilent	E4438C	MY45095744	03-01-2019	02-28-2020
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-28-2020
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	10-12-2018	10-11-2019
Communication test set	Agilent	E5515C	GB47050534	03-01-2019	02-28-2020
Cable line	Fulai(7M)	SF106	5219/6A	01-09-2019	01-08-2020
Cable line	Fulai(6M)	SF106	5220/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5216/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5217/6A	01-09-2019	01-08-2020
Communication test set	R&S	CMW500	104466	01-18-2019	01-17-2020
High-pass filter	Sinoscite	FL3CX03WG18NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA09CL12-0395-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA08CL12-0393-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA04CL12-0396-002	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA03CL12-0394-001	---	01-09-2019	01-08-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-26-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-075	04-25-2018	04-24-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-829	04-25-2018	04-24-2021
Communication Antenna	Schwarzbeck	CLSA 0110L	1014	02-14-2019	02-13-2020
Biconical antenna	Schwarzbeck	VUBA 9117	9117-381	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	5-21-2020
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	Agilent	8449B	3008A02425	07-12-2019	07-11-2020
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-29-2020
Signal Generator	KEYSIGHT	E8257D	MY53401106	03-01-2019	02-29-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2019	01-08-2020

8 Radio Technical Requirements Specification


Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

Duty Cycle			
Configuration	TX ON(ms)	TX ALL(ms)	Duty Cycle(%)
BDR-1Mbps	2.875	6.25	46.00%
EDR-2Mbps	2.883	6.249	46.14%

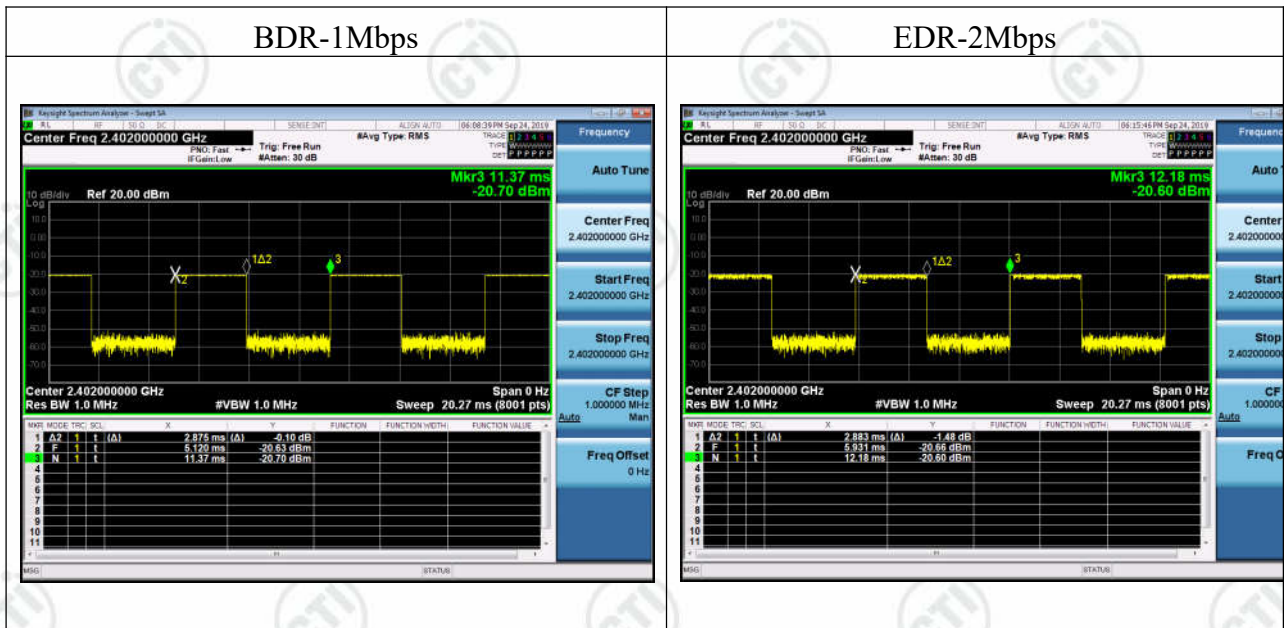

Appendix A): 20dB Occupied Bandwidth Test Limit

According to §15.247(a) (1),

20 dB Bandwidth : For reporting purposes only.


Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as Section 8.1 and ANSI C63.10: 2013 clause 7.8.7,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =30kHz, VBW = 100kHz and Detector = Peak, to measurement 20dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.


Test Setup

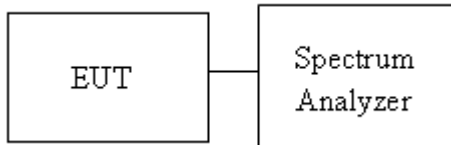

Test Result

Mode	Channel.	99% OBW [MHz]	Verdict
GFSK	LCH	0.84665	PASS
GFSK	MCH	0.84205	PASS
GFSK	HCH	0.84734	PASS
π /4DQPSK	LCH	1.1780	PASS
π /4DQPSK	MCH	1.1876	PASS
π /4DQPSK	HCH	1.1800	PASS

Test Graph

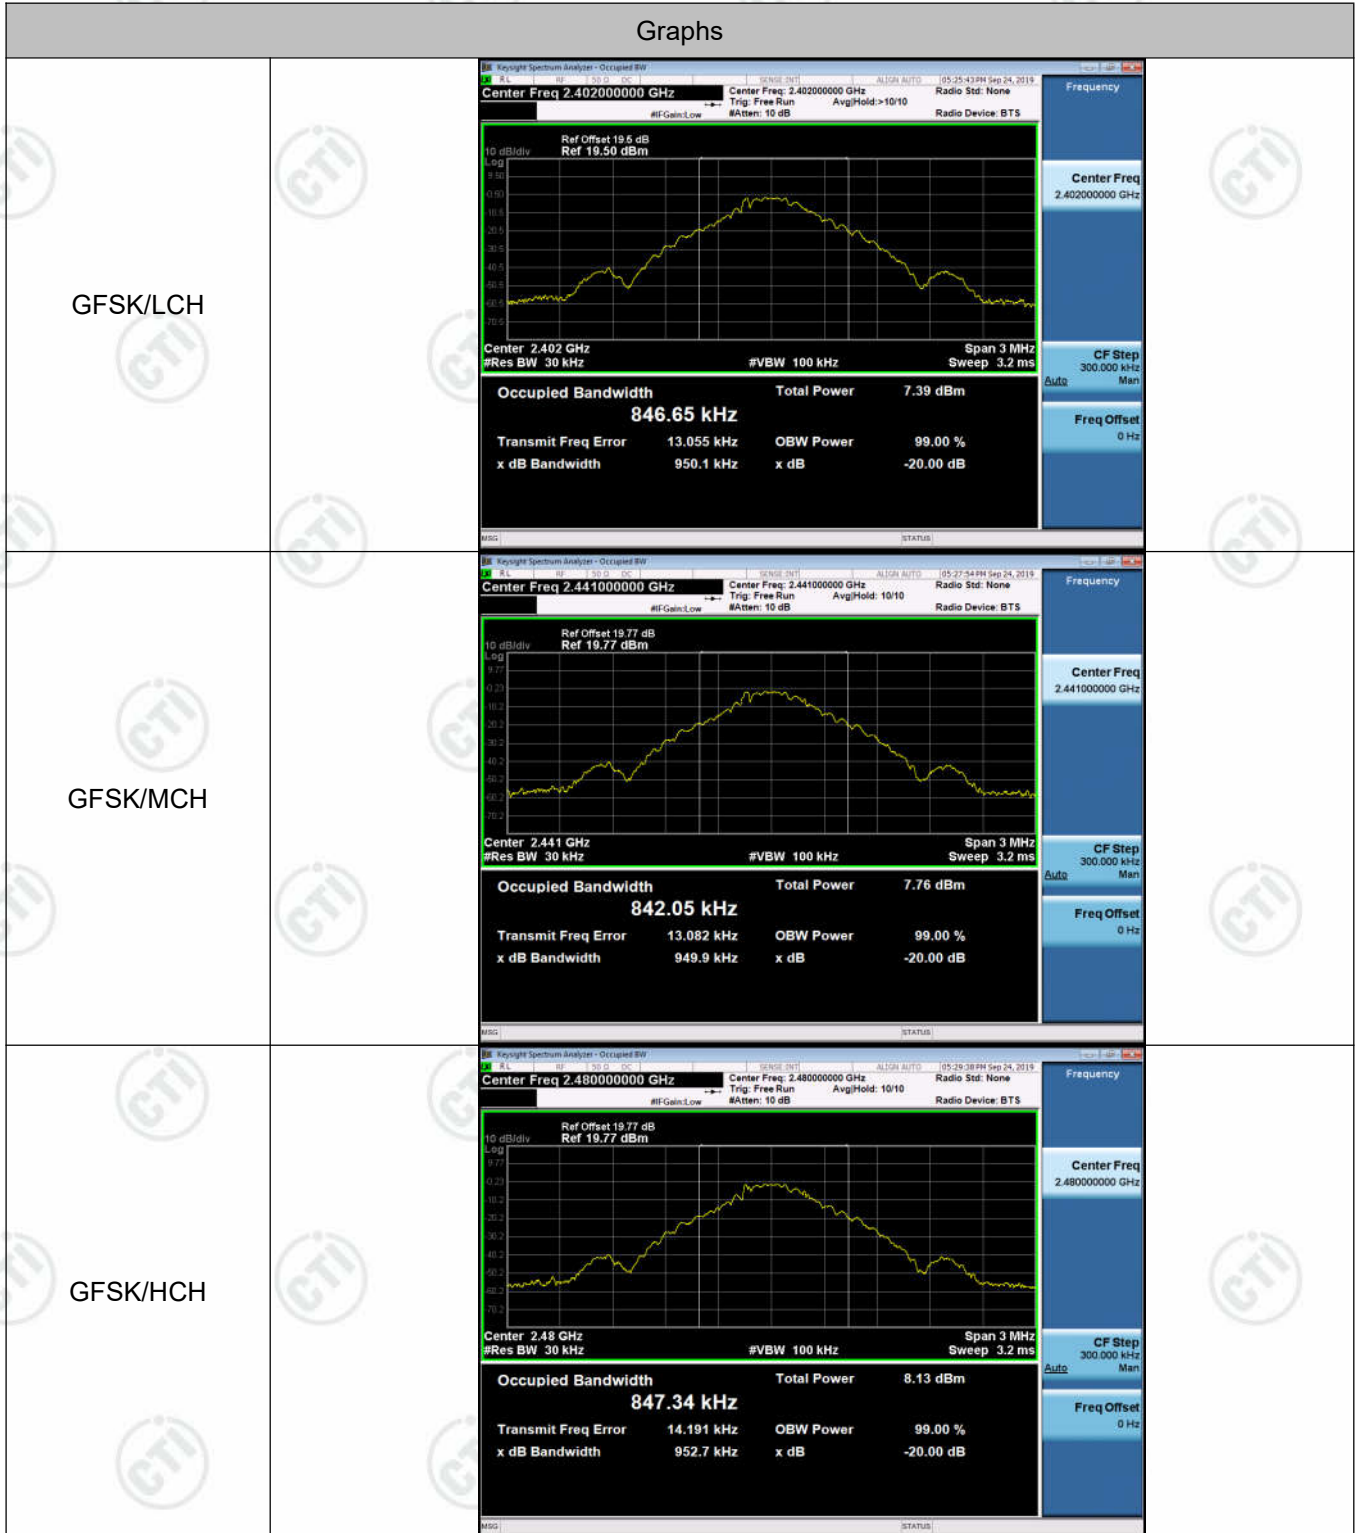

<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

Mode	Channel.	20dB Bandwidth [MHz]	Verdict
GFSK	LCH	1.093	PASS
GFSK	MCH	1.093	PASS
GFSK	HCH	1.089	PASS
π /4DQPSK	LCH	1.367	PASS
π /4DQPSK	MCH	1.370	PASS
π /4DQPSK	HCH	1.374	PASS

Test Graph



<p>$\pi/4$DQPSK/LCH</p>	<p>Center Freq 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.2149 MHz Total Power 5.49 dBm Transmit Freq Error 11.986 kHz OBW Power 99.00 % x dB Bandwidth 1.367 MHz x dB -20.00 dB</p>
<p>$\pi/4$DQPSK/MCH</p>	<p>Center Freq 2.441 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.2125 MHz Total Power 6.00 dBm Transmit Freq Error 12.226 kHz OBW Power 99.00 % x dB Bandwidth 1.370 MHz x dB -20.00 dB</p>
<p>$\pi/4$DQPSK/HCH</p>	<p>Center Freq 2.480 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.2126 MHz Total Power 6.46 dBm Transmit Freq Error 12.795 kHz OBW Power 99.00 % x dB Bandwidth 1.374 MHz x dB -20.00 dB</p>

Appendix B): Carrier Frequency Separation

Test Limit

According to §15.247(a)(1),


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto.
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency


Test Setup

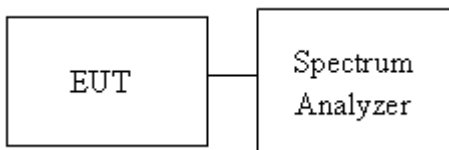

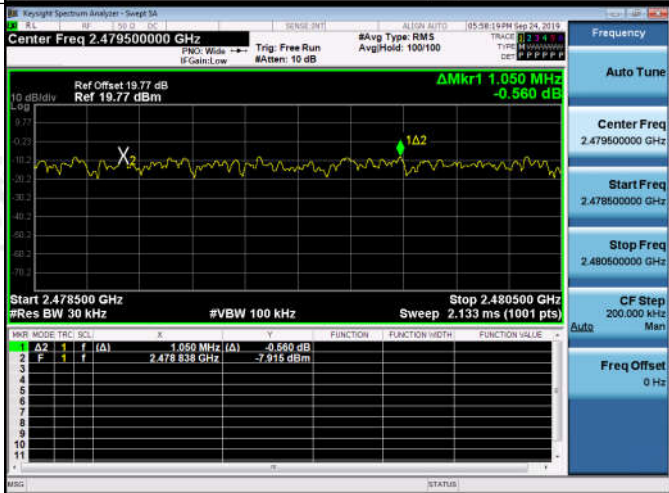


Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.174	PASS
GFSK	MCH	1.062	PASS
GFSK	HCH	1.054	PASS
$\pi/4$ DQPSK	LCH	1.130	PASS
$\pi/4$ DQPSK	MCH	0.976	PASS
$\pi/4$ DQPSK	HCH	1.050	PASS

Test Graph

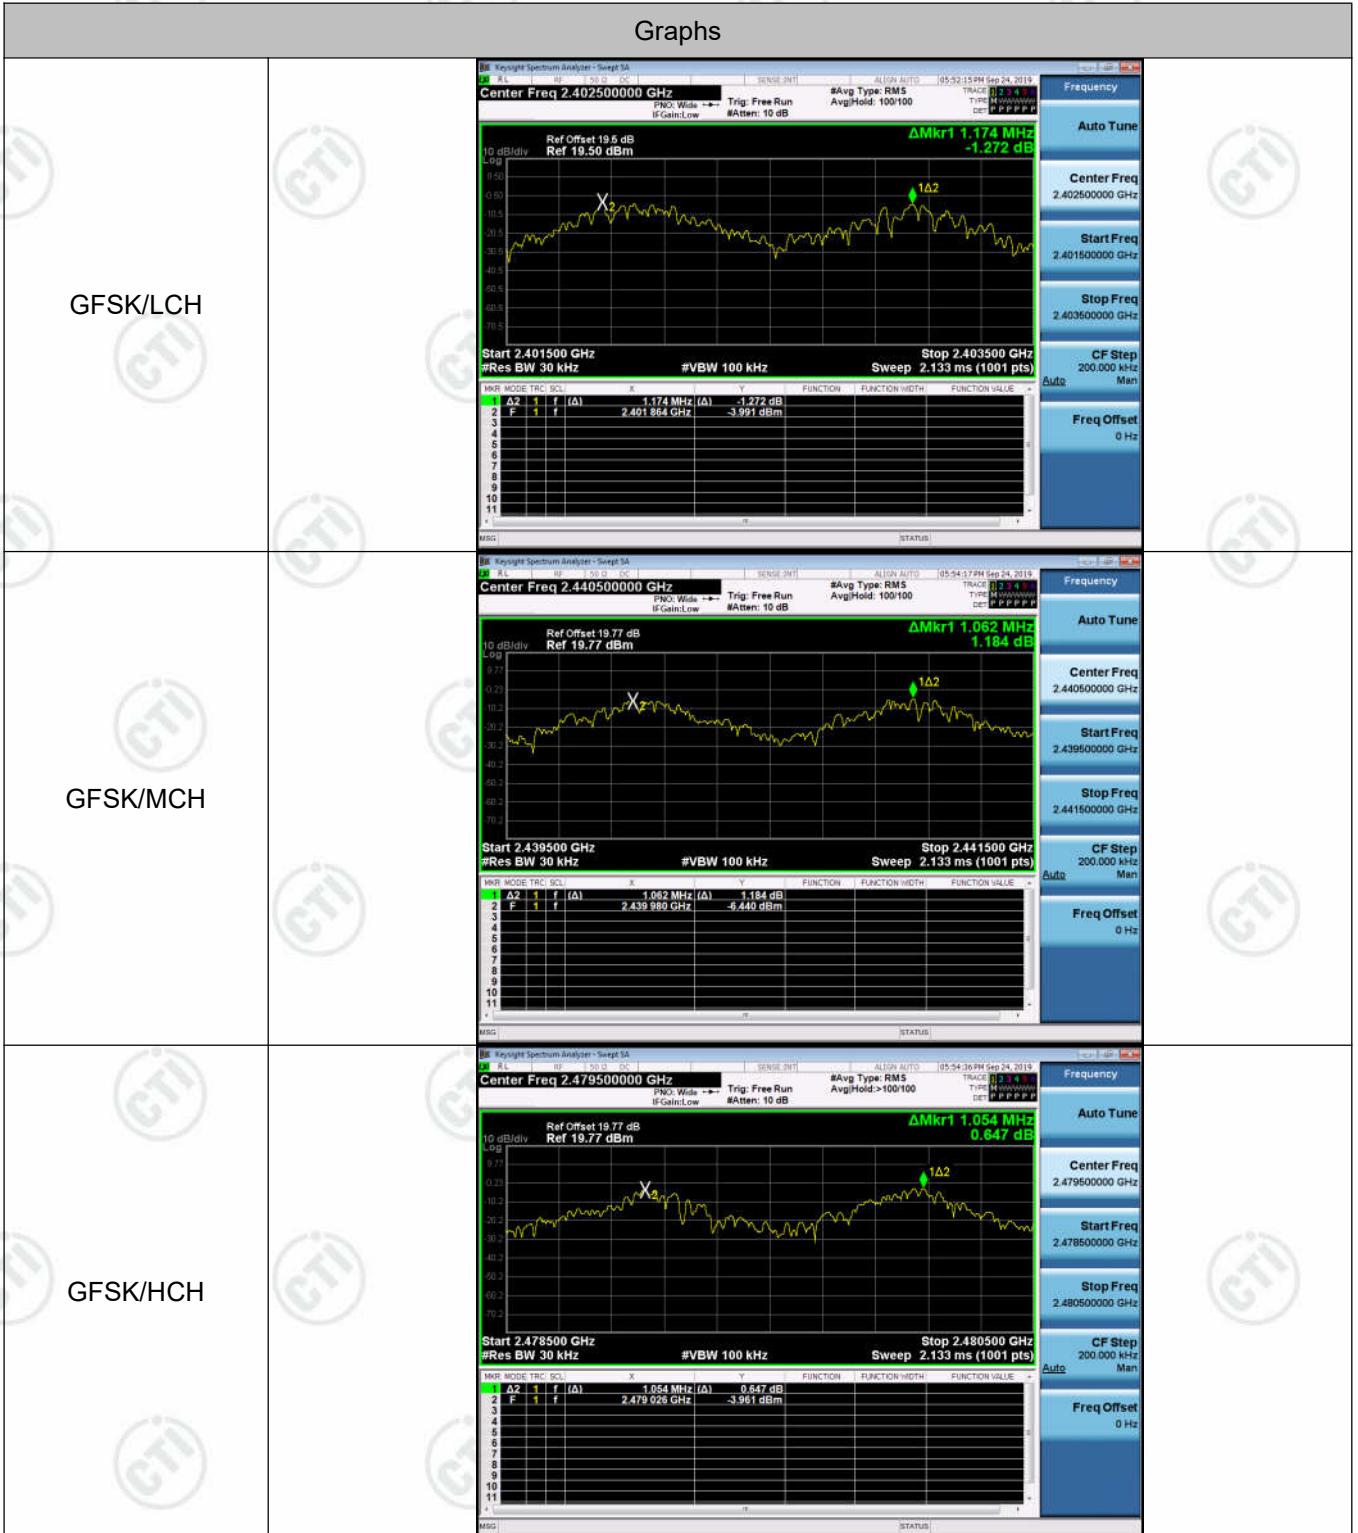
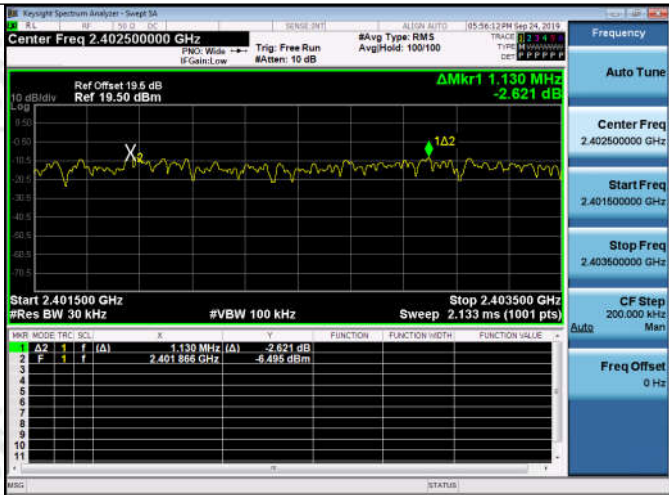
<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

Appendix C): Dwell Time

Test Limit


According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms


Test Setup

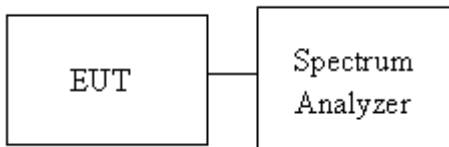


**The worst mode
Result Table**

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.373667	320	0.12	0.30	PASS
GFSK	DH1	MCH	0.374934	320	0.12	0.30	PASS
GFSK	DH1	HCH	0.37493	320	0.12	0.30	PASS
GFSK	DH3	LCH	1.6302	160	0.261	0.43	PASS
GFSK	DH3	MCH	1.6302	160	0.261	0.43	PASS
GFSK	DH3	HCH	1.6302	160	0.261	0.43	PASS
GFSK	DH5	LCH	2.8612	106.7	0.305	0.46	PASS
GFSK	DH5	MCH	2.8612	106.7	0.305	0.46	PASS
GFSK	DH5	HCH	2.8612	106.7	0.305	0.46	PASS

Test Graph

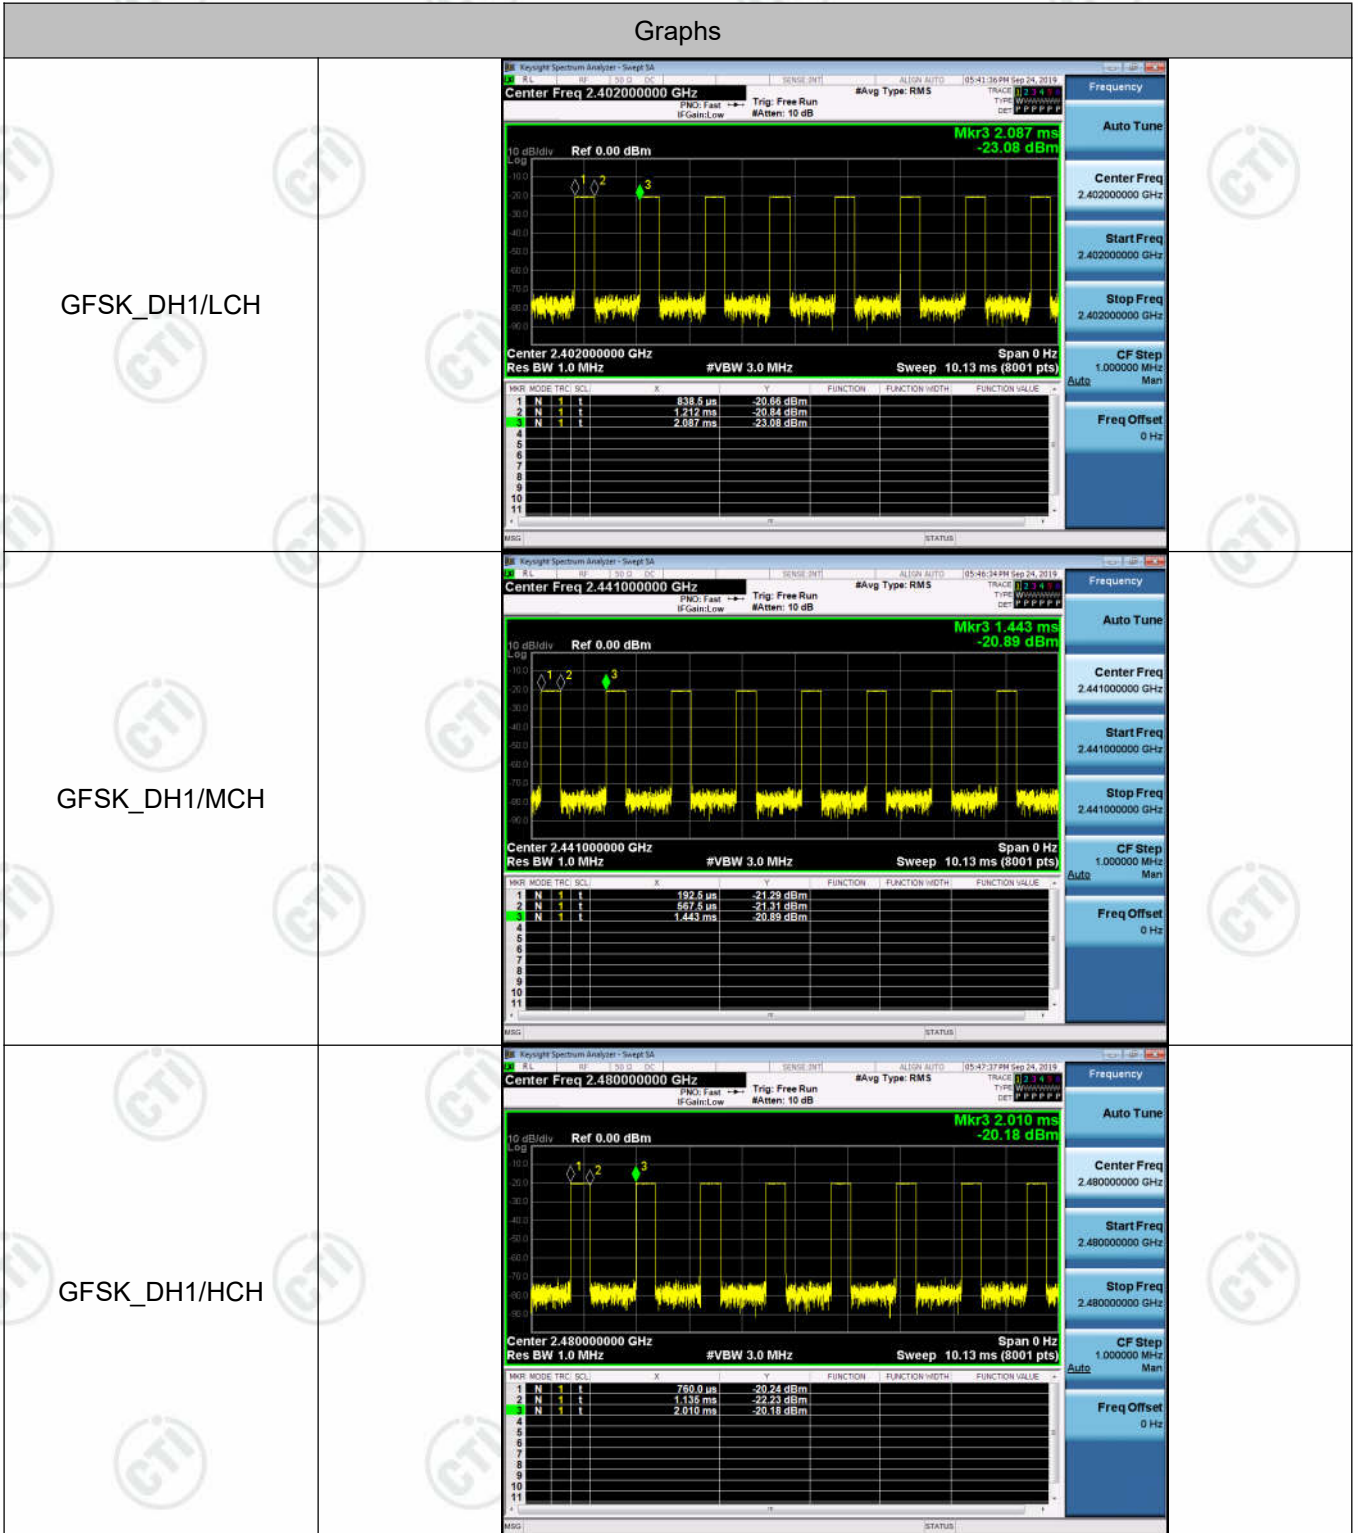

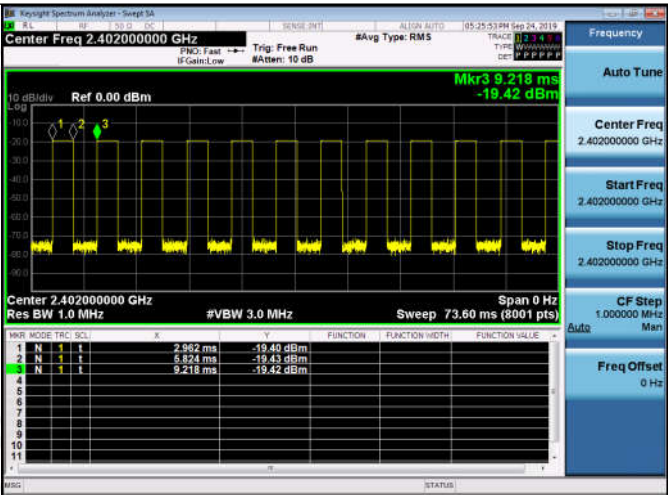

<p>GFSK_DH5/LCH</p>	 <p>Center Freq 2.40200000 GHz</p> <p>Center 2.40200000 GHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>1</td> <td>2.962 ms</td> <td>-19.40 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>1</td> <td>6.823 ms</td> <td>-19.43 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>1</td> <td>9.218 ms</td> <td>-19.42 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	2.962 ms	-19.40 dBm				2	N	1	1	6.823 ms	-19.43 dBm				3	N	1	1	9.218 ms	-19.42 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	2.962 ms	-19.40 dBm																																
2	N	1	1	6.823 ms	-19.43 dBm																																
3	N	1	1	9.218 ms	-19.42 dBm																																
<p>GFSK_DH5/MCH</p>	 <p>Center Freq 2.44100000 GHz</p> <p>Center 2.44100000 GHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>1</td> <td>3.185 ms</td> <td>-19.39 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>1</td> <td>9.026 ms</td> <td>-19.42 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>1</td> <td>9.421 ms</td> <td>-19.42 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	3.185 ms	-19.39 dBm				2	N	1	1	9.026 ms	-19.42 dBm				3	N	1	1	9.421 ms	-19.42 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	3.185 ms	-19.39 dBm																																
2	N	1	1	9.026 ms	-19.42 dBm																																
3	N	1	1	9.421 ms	-19.42 dBm																																
<p>GFSK_DH5/HCH</p>	 <p>Center Freq 2.48000000 GHz</p> <p>Center 2.48000000 GHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>1</td> <td>1.874 ms</td> <td>-18.94 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>1</td> <td>4.536 ms</td> <td>-18.96 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>1</td> <td>7.930 ms</td> <td>-18.96 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	1.874 ms	-18.94 dBm				2	N	1	1	4.536 ms	-18.96 dBm				3	N	1	1	7.930 ms	-18.96 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	1.874 ms	-18.94 dBm																																
2	N	1	1	4.536 ms	-18.96 dBm																																
3	N	1	1	7.930 ms	-18.96 dBm																																

Appendix D): Hopping Channel Number Test Limit

According to §15.247(a)(1)(iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW =100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.


Test Setup

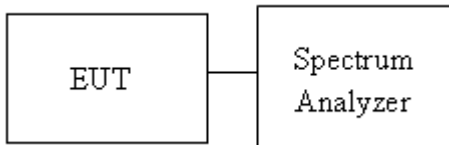

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS

Test Graph

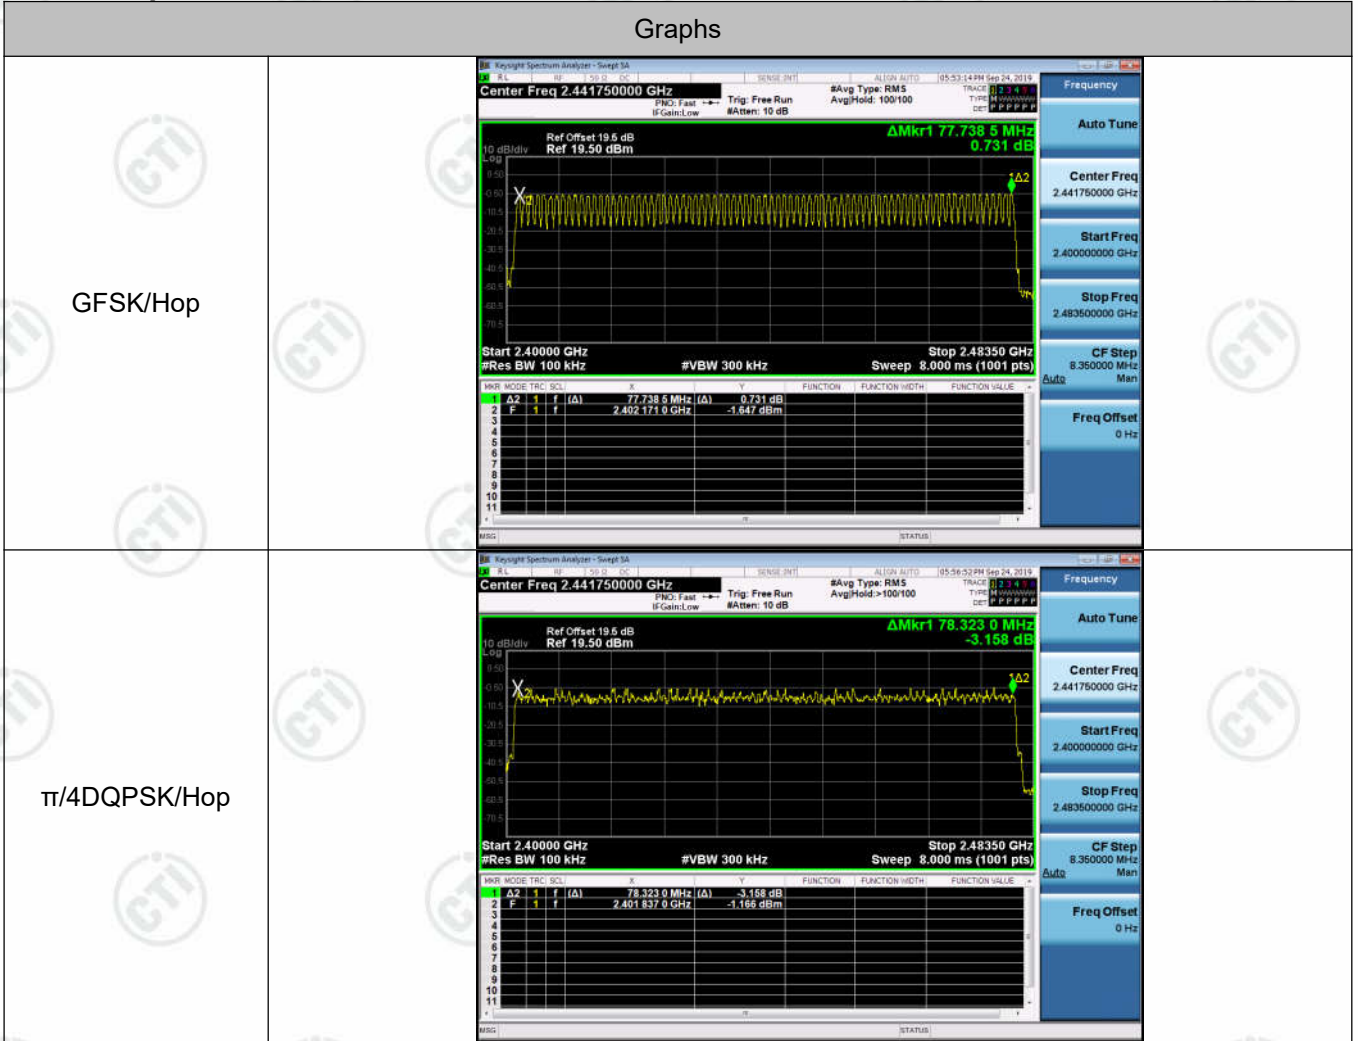

Appendix E): Conducted Peak Output Power Test Limit

According to §15.247(b)(1).

Peak output power:

FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi: 21dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi: 21dBm [Limit = 30 – (DG – 6)]
-------	---

Average output power: For reporting purposes only.

Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.


Test Setup

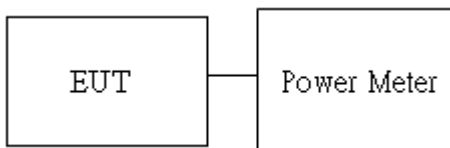

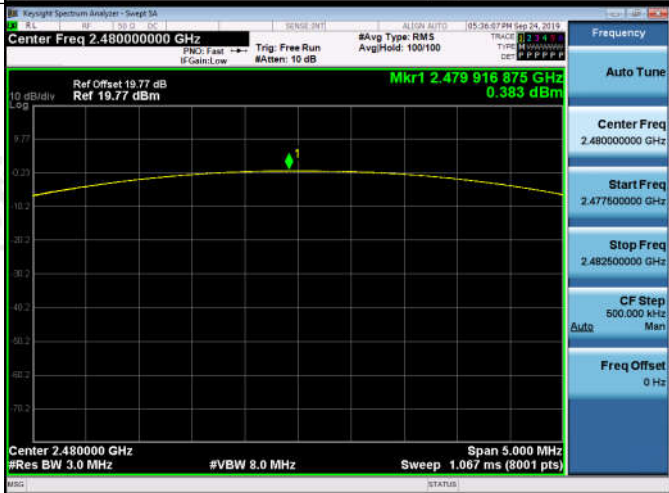


Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	0.199	PASS
GFSK	MCH	0.476	PASS
GFSK	HCH	0.928	PASS
$\pi/4$ DQPSK	LCH	-0.334	PASS
$\pi/4$ DQPSK	MCH	-0.064	PASS
$\pi/4$ DQPSK	HCH	0.383	PASS

Test Graph

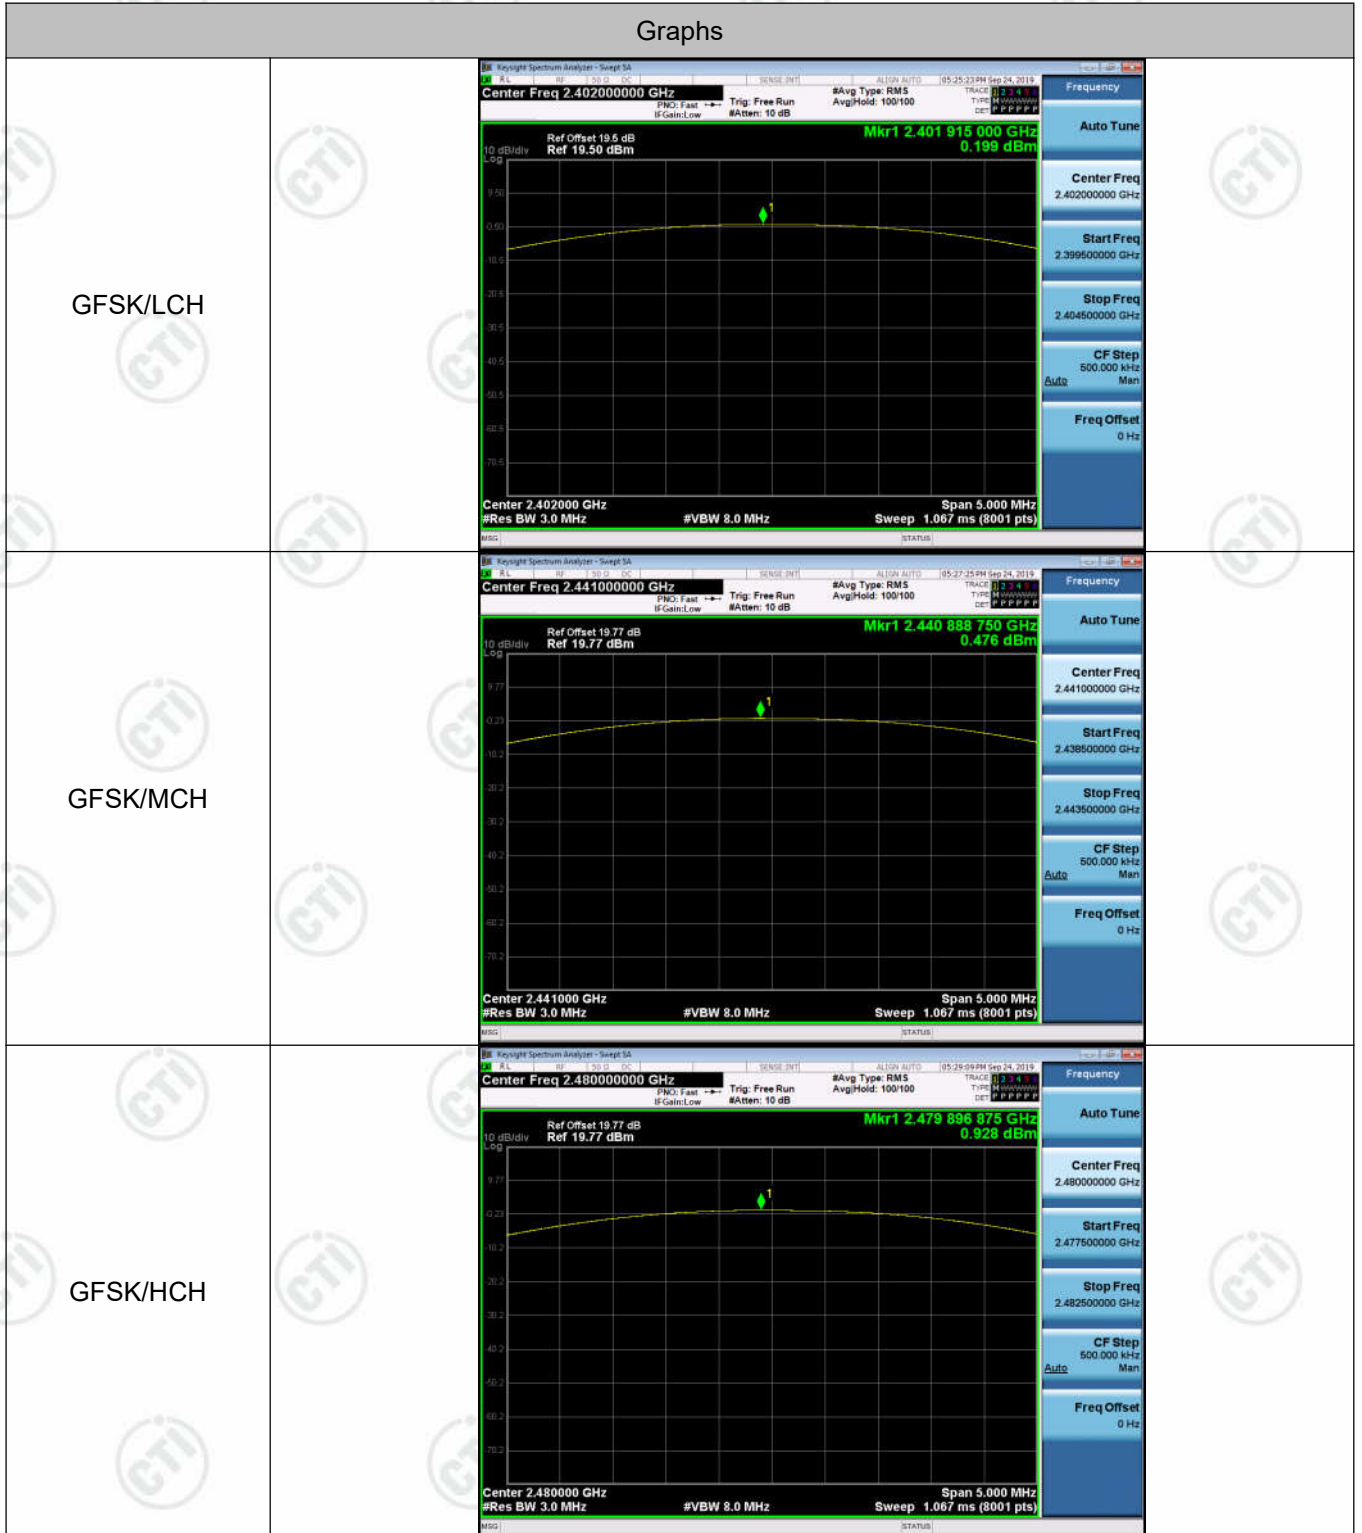
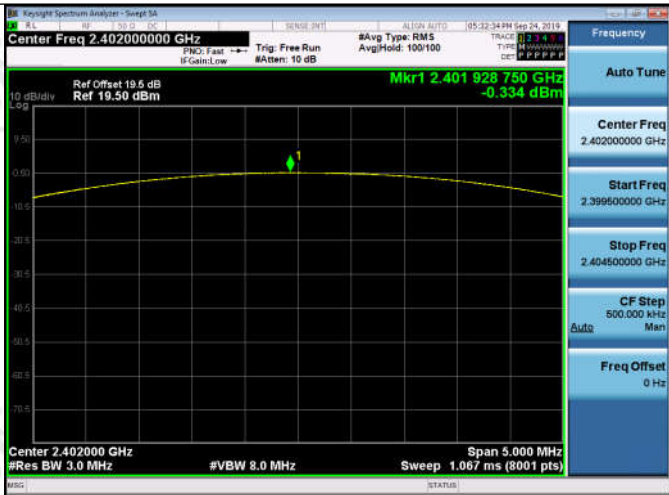
<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

Appendix F): Band-edge for RF Conducted Emissions Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.


Test Setup

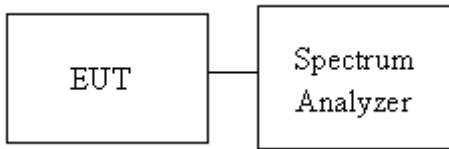



Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	0.018	Off	-59.758	-19.98	PASS
			-1.126	On	-59.353	-21.13	PASS
GFSK	HCH	2480	0.893	Off	-49.119	-19.11	PASS
			-0.454	On	-50.186	-20.45	PASS
π/4DQPSK	LCH	2402	-1.227	Off	-59.286	-21.23	PASS
			-1.208	On	-60.022	-21.21	PASS
π/4DQPSK	HCH	2480	-0.367	Off	-50.819	-20.37	PASS
			-0.343	On	-52.888	-20.34	PASS

Test Graph

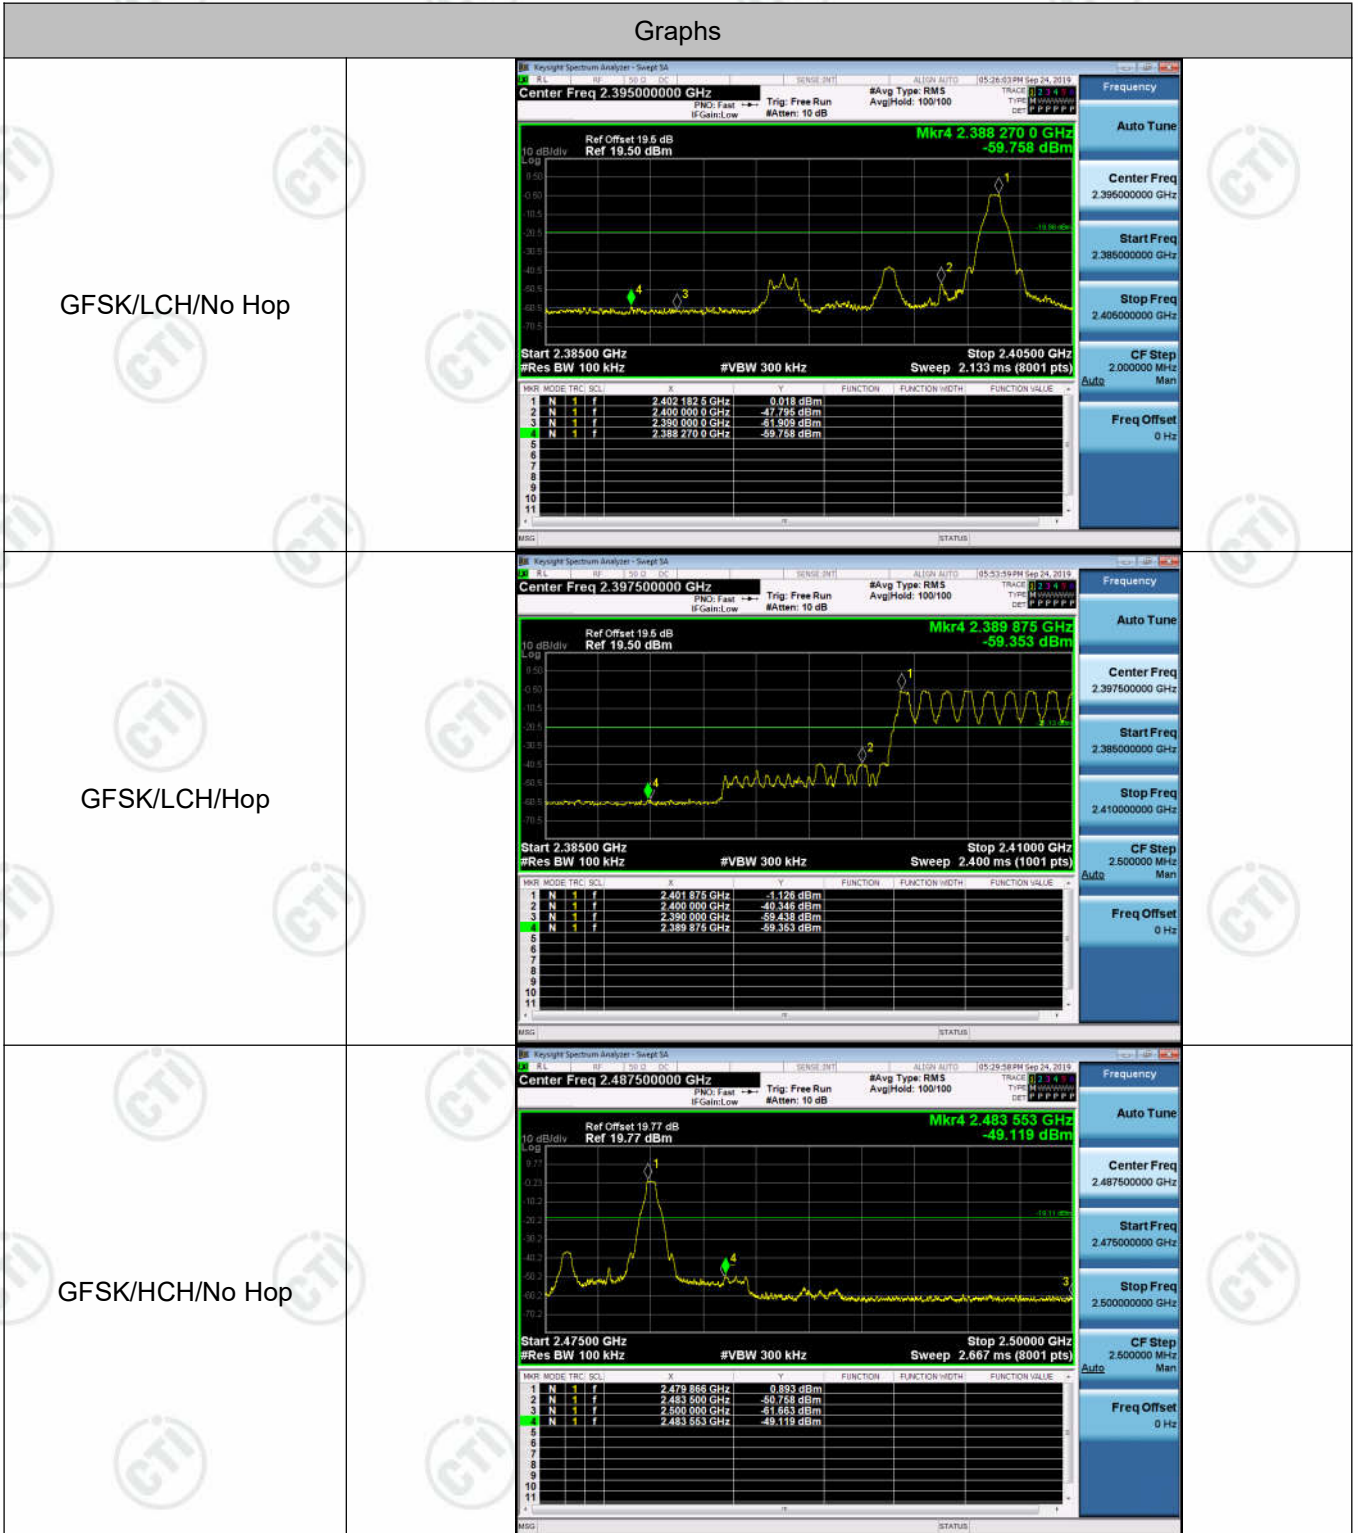

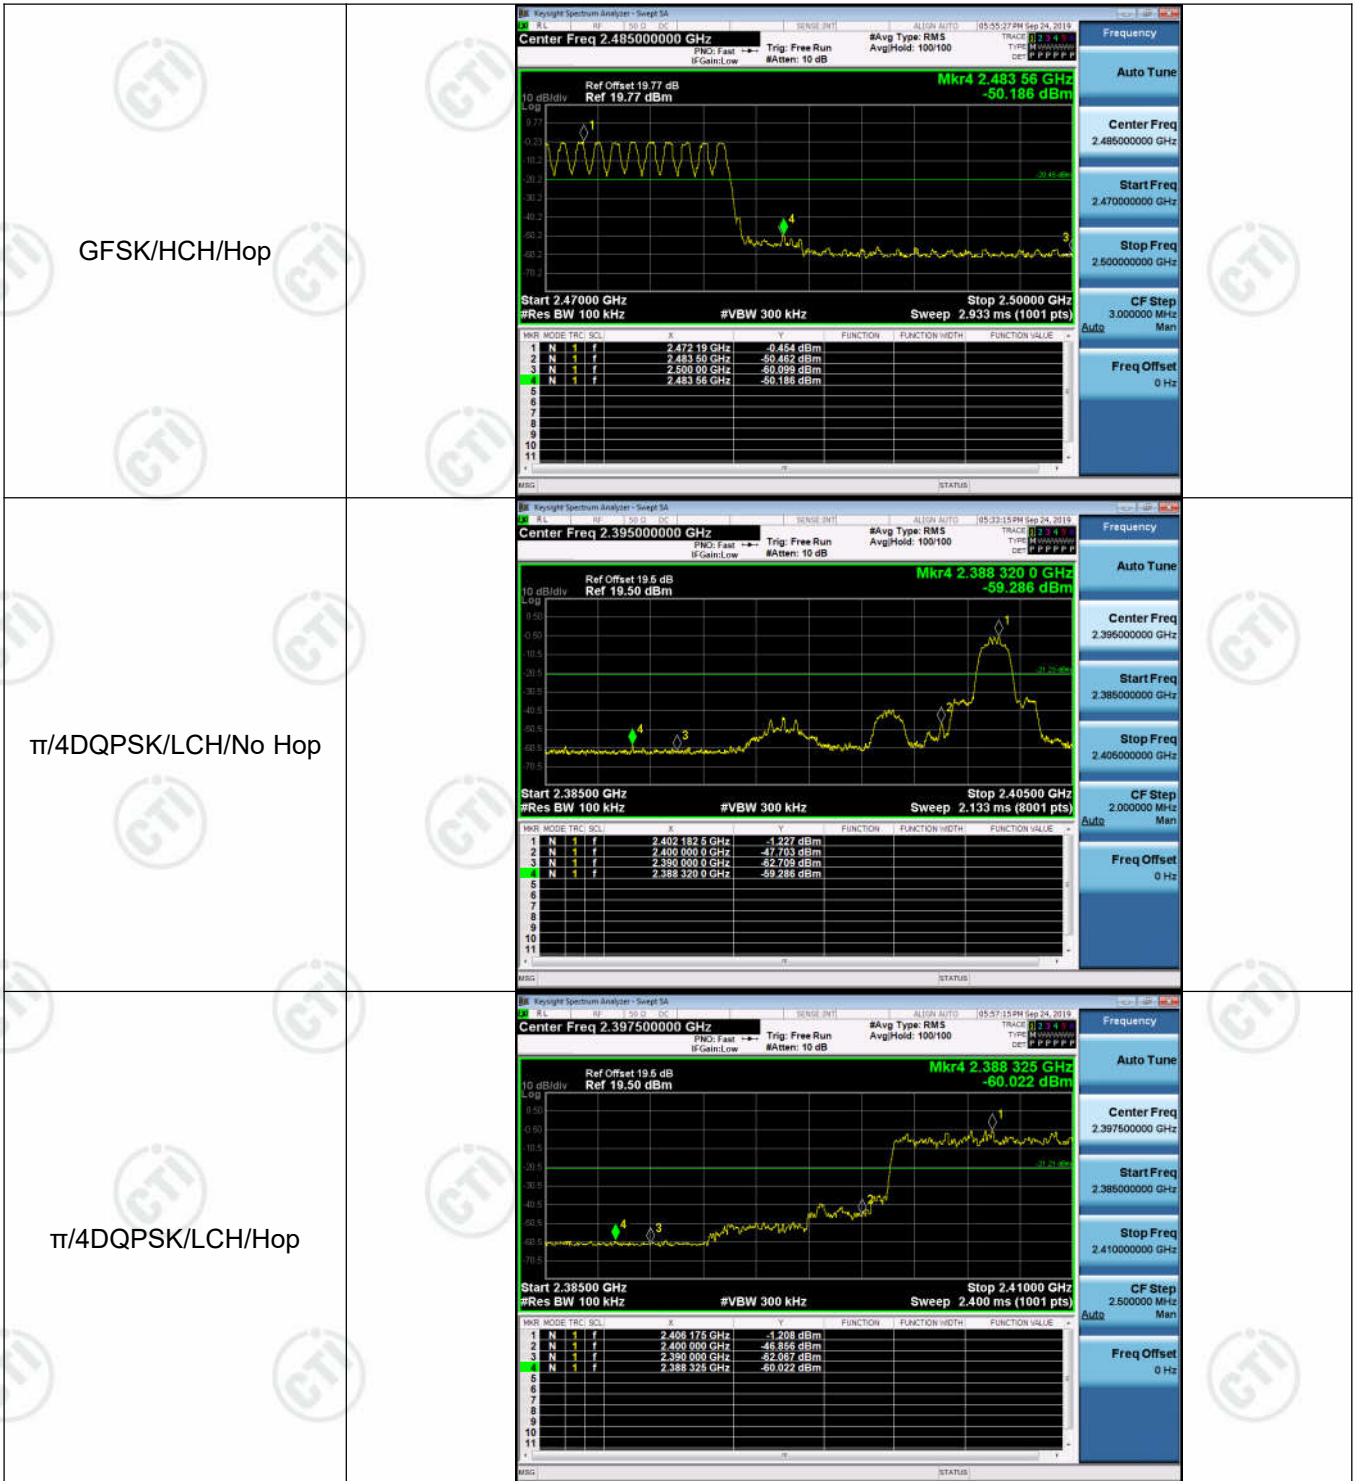

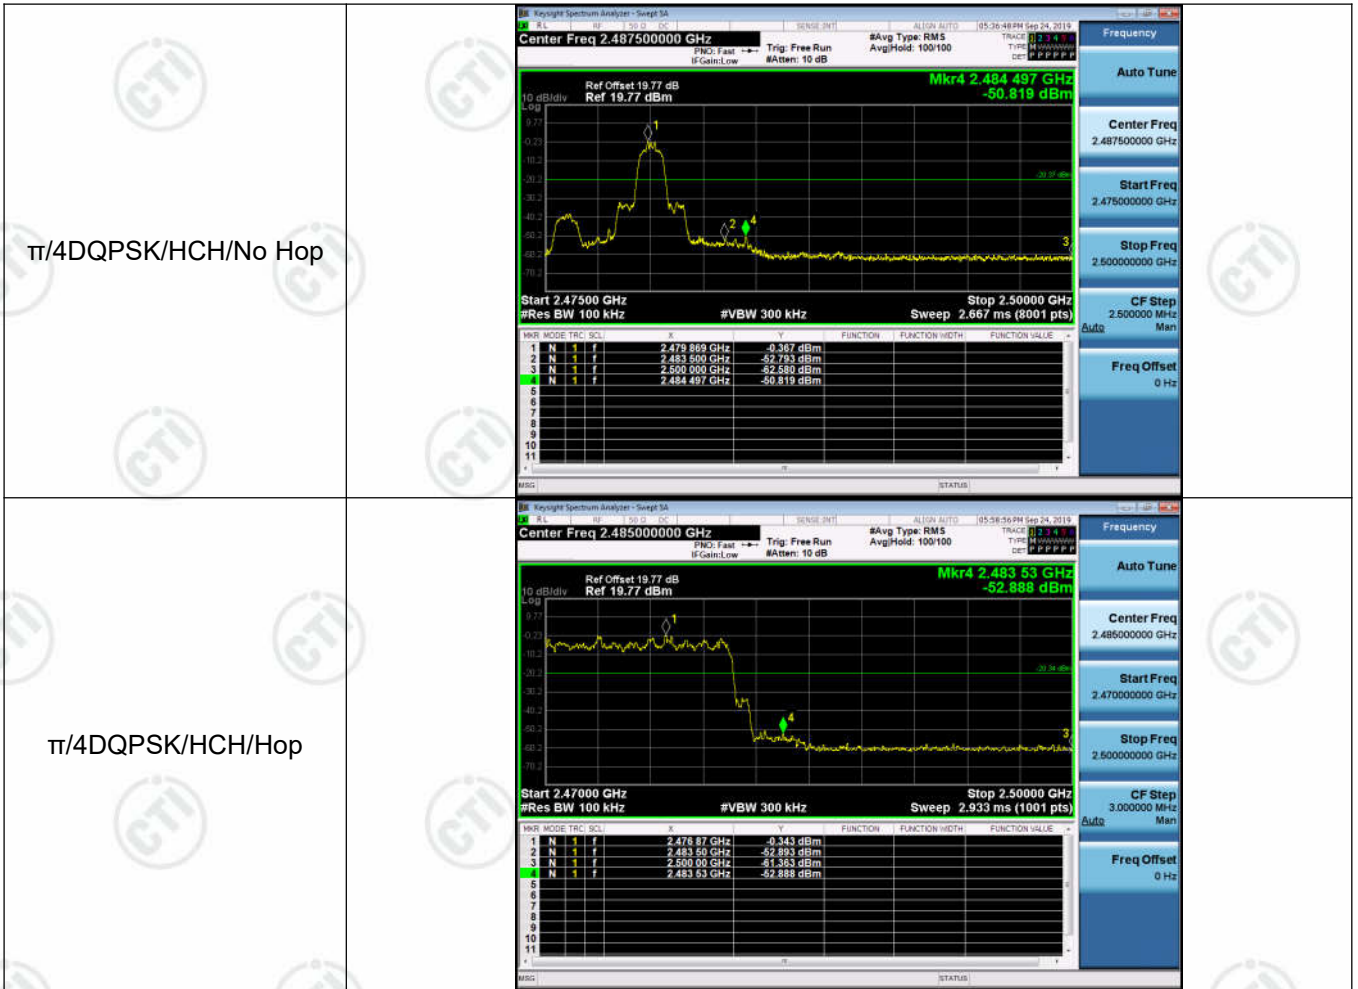

Appendix G): RF Conducted Spurious Emissions

Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.


Test Setup

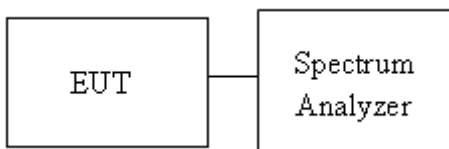


Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	0.146	<Limit	PASS
GFSK	MCH	0.41	<Limit	PASS
GFSK	HCH	0.85	<Limit	PASS
$\pi/4$ DQPSK	LCH	-1.188	<Limit	PASS
$\pi/4$ DQPSK	MCH	-0.91	<Limit	PASS
$\pi/4$ DQPSK	HCH	-0.474	<Limit	PASS


Test Graph

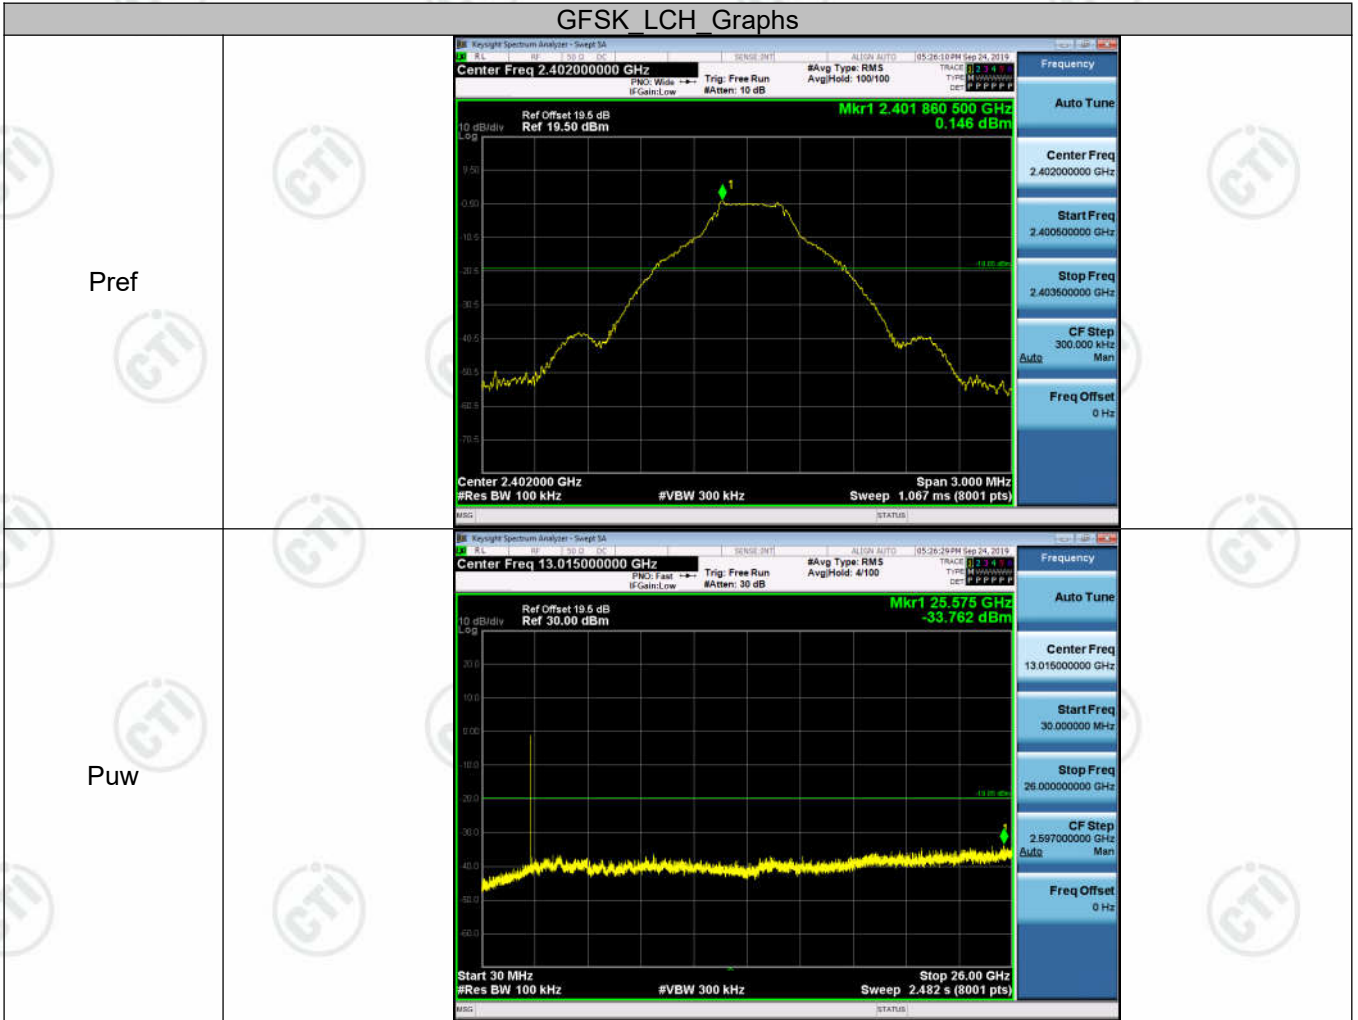


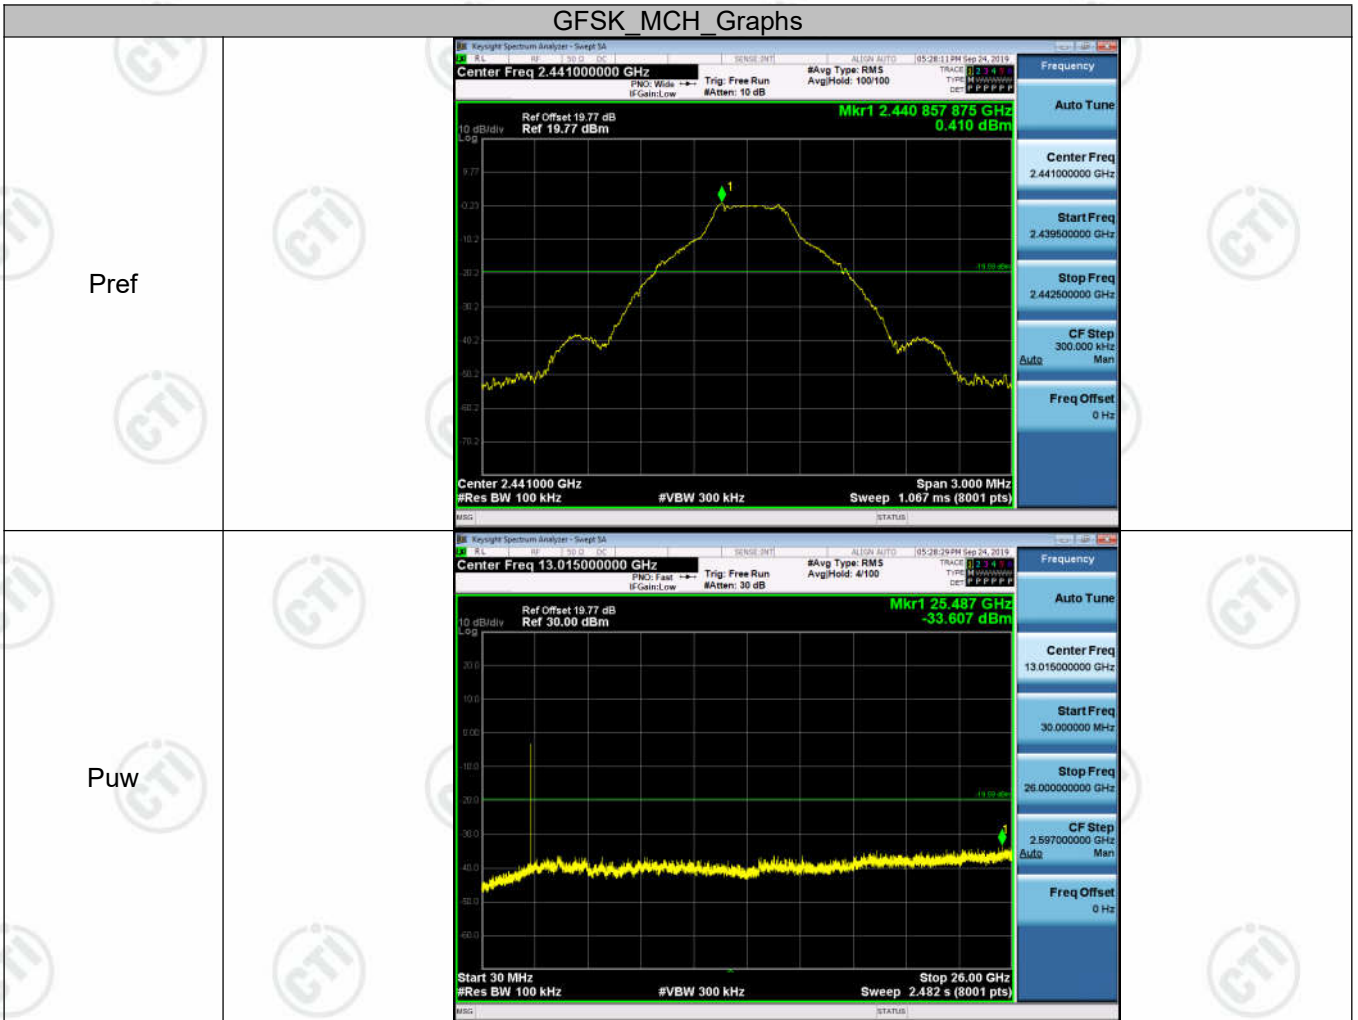


GFSK_HCH_Graphs



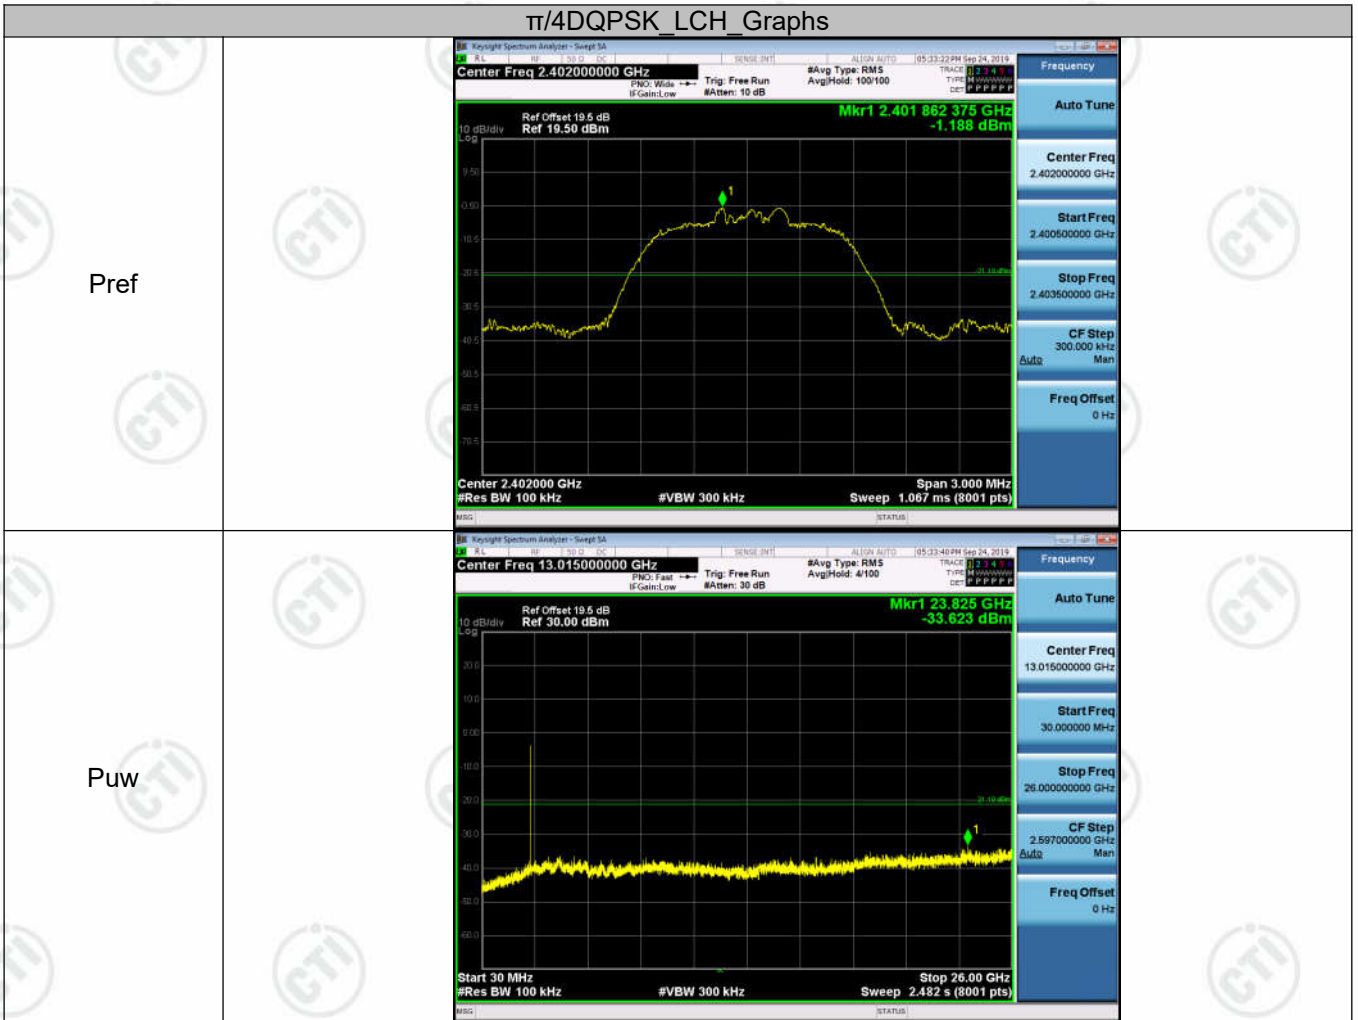

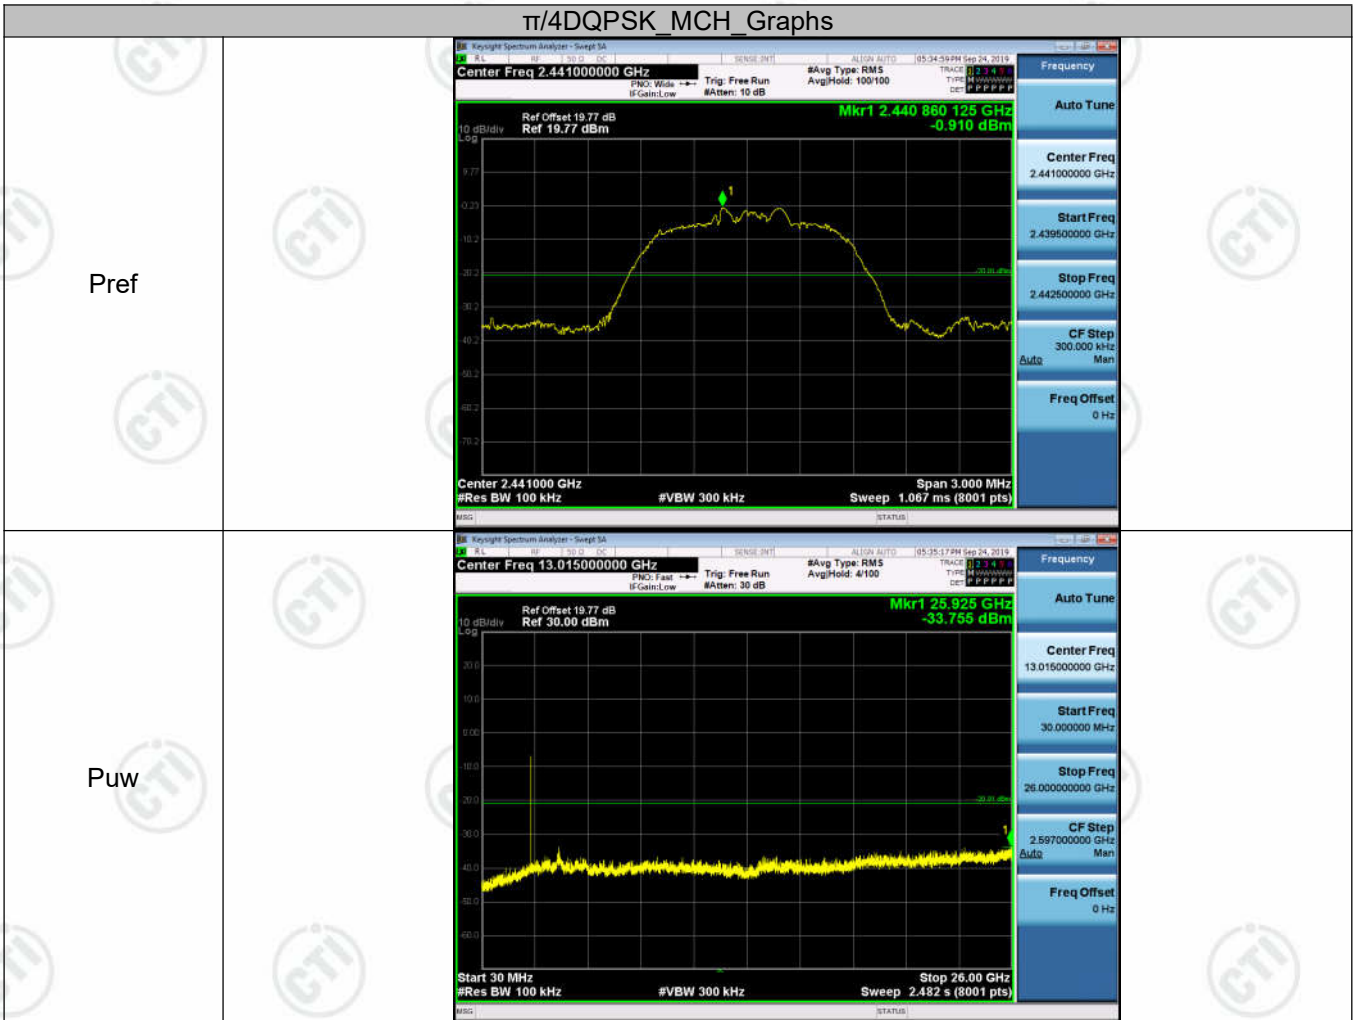

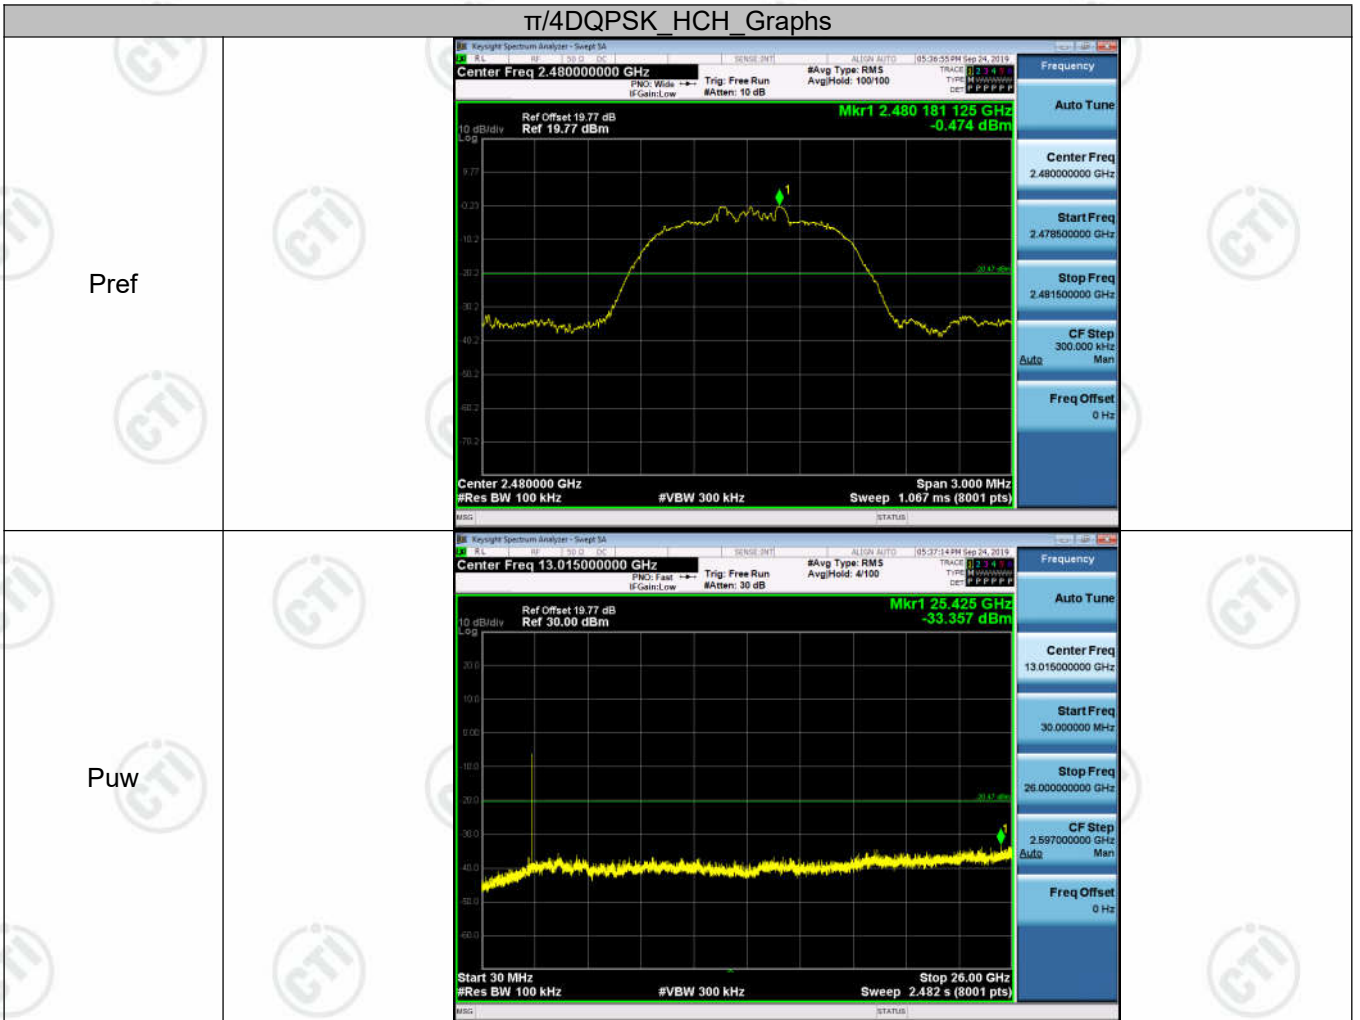

Appendix H) Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="317 952 1369 1099" style="text-align: center;"> </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="288 1198 1273 1346" style="text-align: center;"> </div> <p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> <p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

Appendix I)Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:



The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.68 dBi

Appendix J) AC Power Line Conducted Emission


<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 																
<p>Limit:</p>	<table border="1" data-bbox="497 1144 1369 1361"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

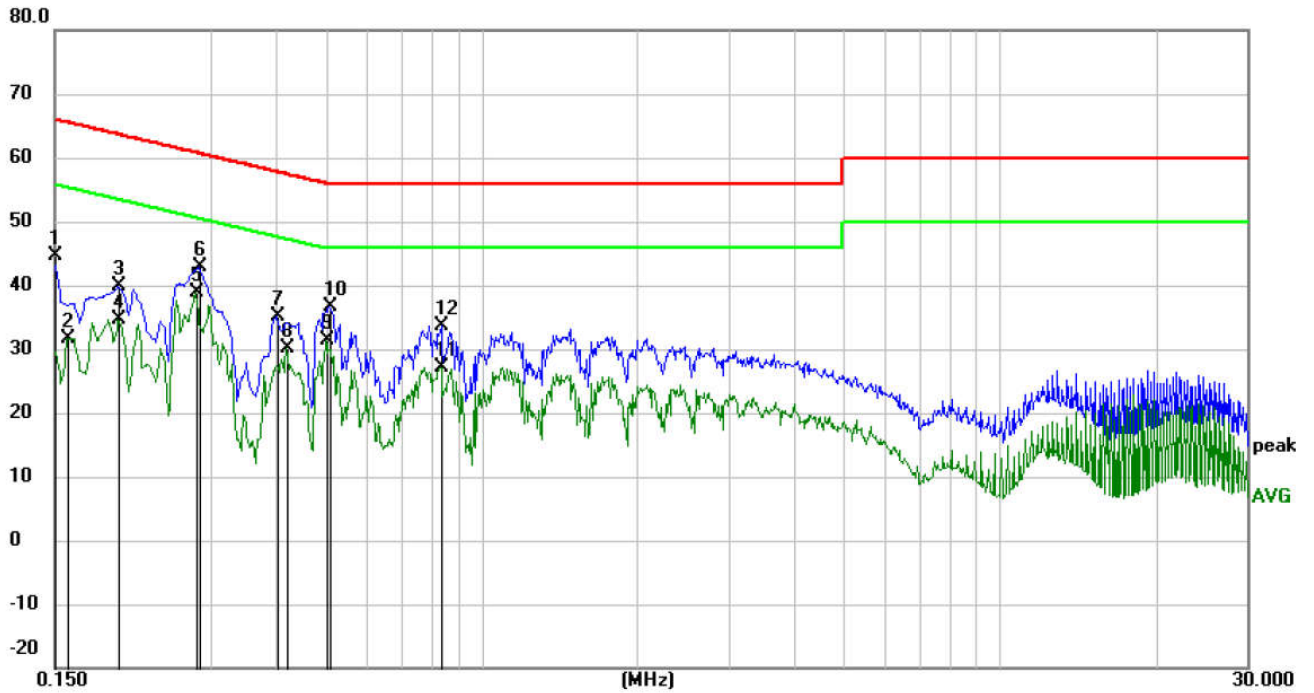

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	34.62	9.97	44.59	66.00	-21.41	peak	
2		0.1590	21.63	9.98	31.61	55.52	-23.91	AVG	
3		0.1995	29.76	10.02	39.78	63.63	-23.85	peak	
4		0.1995	24.51	10.02	34.53	53.63	-19.10	AVG	
5	*	0.2805	28.72	10.08	38.80	50.80	-12.00	AVG	
6		0.2850	32.76	10.09	42.85	60.67	-17.82	peak	
7		0.4020	25.05	10.00	35.05	57.81	-22.76	peak	
8		0.4200	20.04	10.00	30.04	47.45	-17.41	AVG	
9		0.5010	21.41	10.00	31.41	46.00	-14.59	AVG	
10		0.5100	26.58	10.01	36.59	56.00	-19.41	peak	
11		0.8340	17.31	9.91	27.22	46.00	-18.78	AVG	
12		0.8385	23.72	9.91	33.63	56.00	-22.37	peak	

Neutral line:

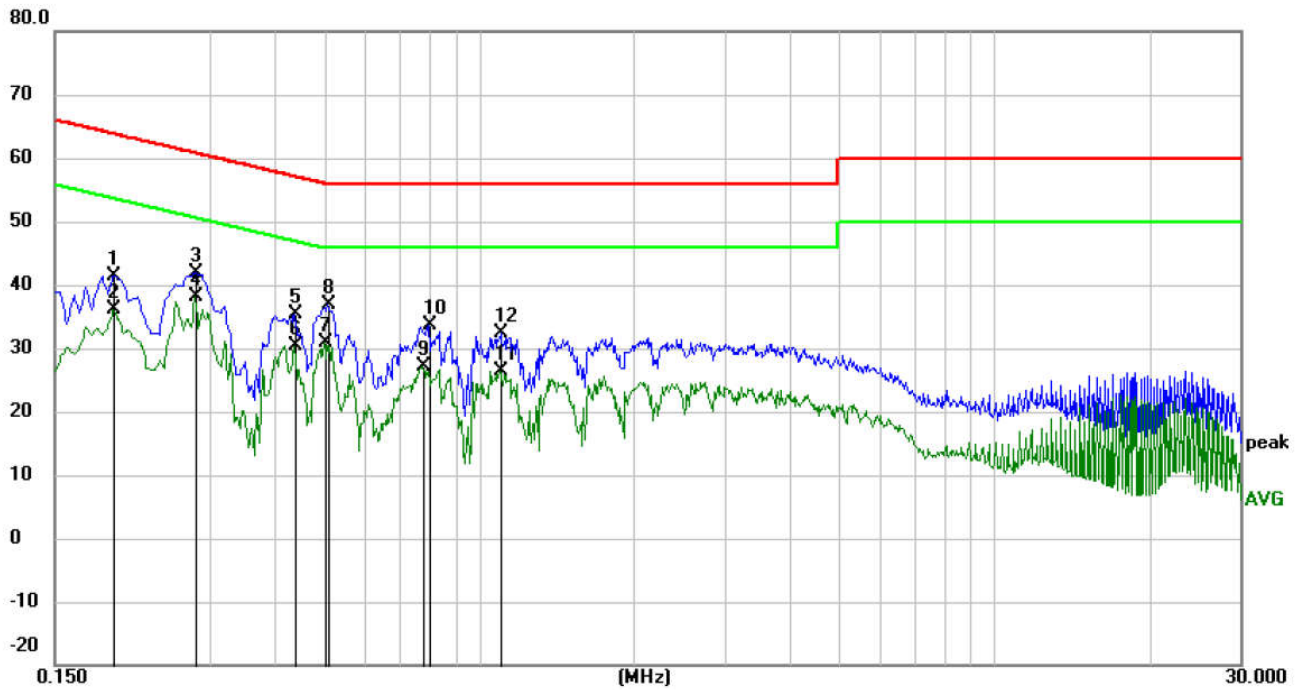

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1949	31.43	10.02	41.45	63.83	-22.38	peak	
2		0.1949	26.02	10.02	36.04	53.83	-17.79	AVG	
3		0.2805	31.83	10.08	41.91	60.80	-18.89	peak	
4	*	0.2805	28.06	10.08	38.14	50.80	-12.66	AVG	
5		0.4380	25.33	10.00	35.33	57.10	-21.77	peak	
6		0.4380	20.31	10.00	30.31	47.10	-16.79	AVG	
7		0.5010	20.89	10.00	30.89	46.00	-15.11	AVG	
8		0.5100	26.79	10.01	36.80	56.00	-19.20	peak	
9		0.7755	17.24	9.84	27.08	46.00	-18.92	AVG	
10		0.7980	23.76	9.90	33.66	56.00	-22.34	peak	
11		1.0995	16.53	9.90	26.43	46.00	-19.57	AVG	
12		1.1040	22.38	9.90	32.28	56.00	-23.72	peak	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


Appendix K) Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). b. Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 				
Limit:	Frequency	Limit (dBuV/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

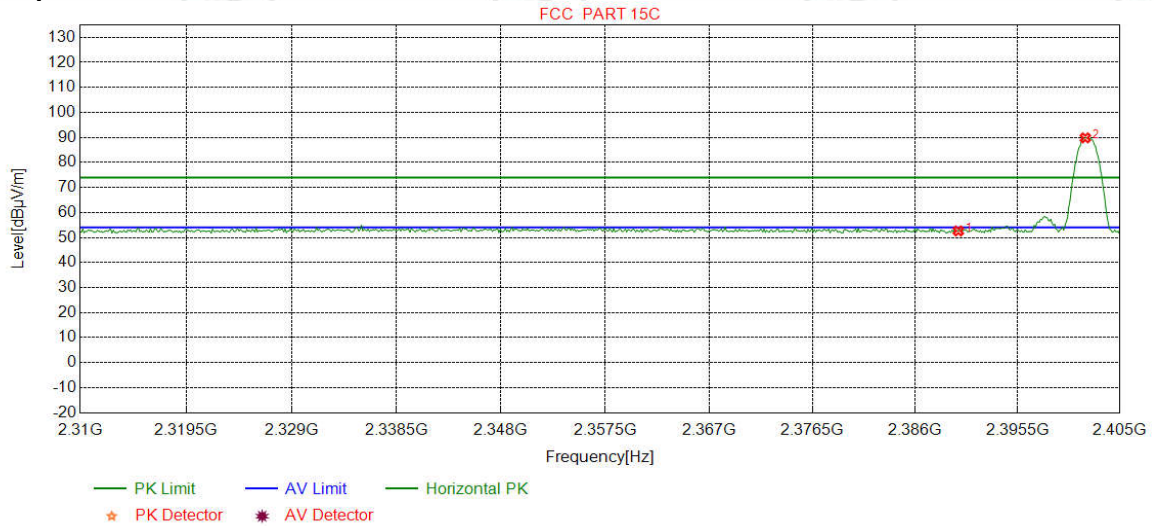

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.44	52.62	74.00	21.38	Pass	Horizontal
2	2401.7897	32.26	13.31	-42.43	86.69	89.83	74.00	-15.83	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

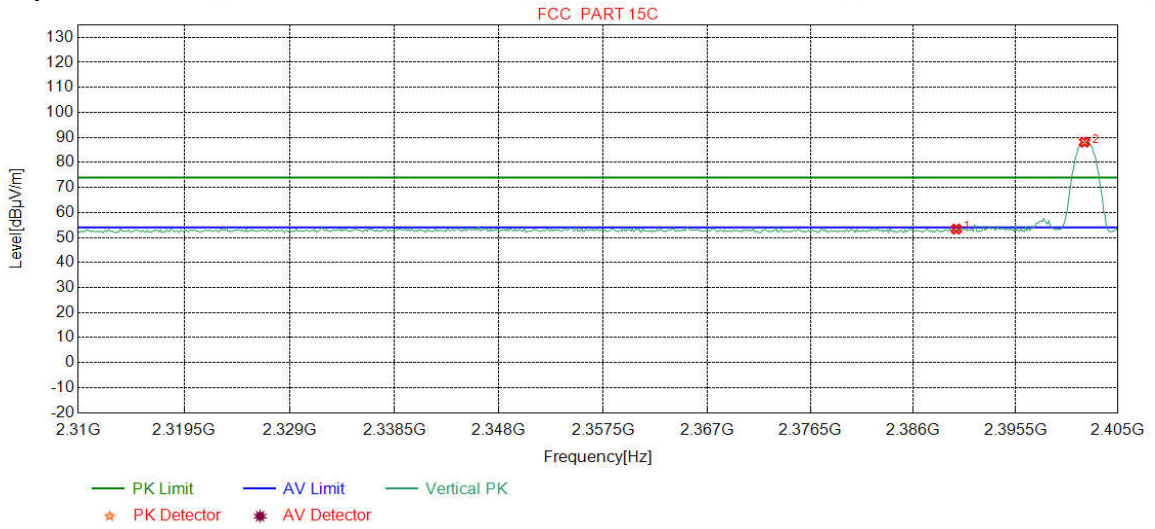

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	50.18	53.36	74.00	20.64	Pass	Vertical
2	2401.9086	32.26	13.31	-42.43	84.98	88.12	74.00	-14.12	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

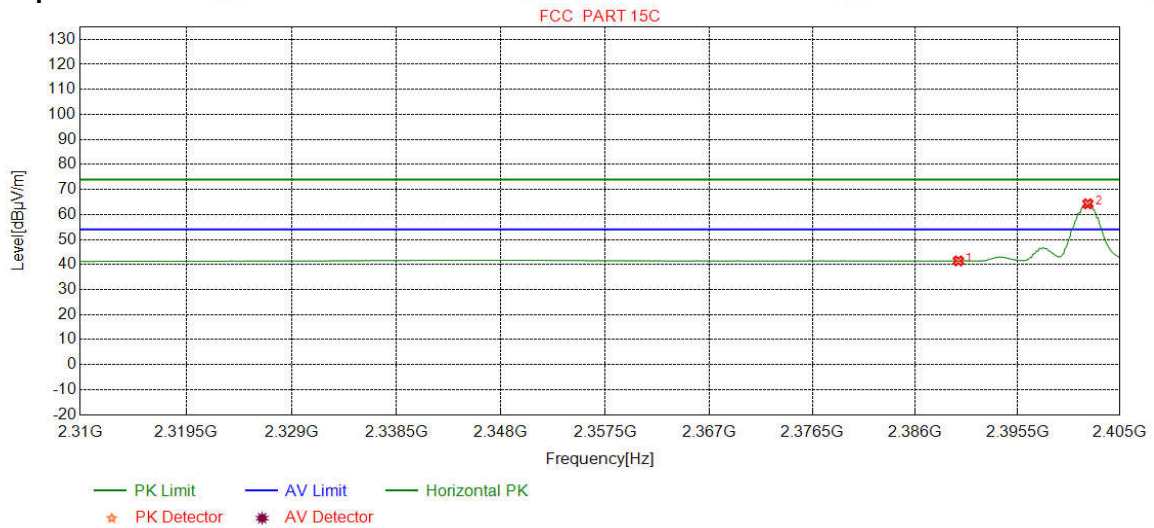

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.26	41.44	54.00	12.56	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	61.12	64.26	54.00	-10.26	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

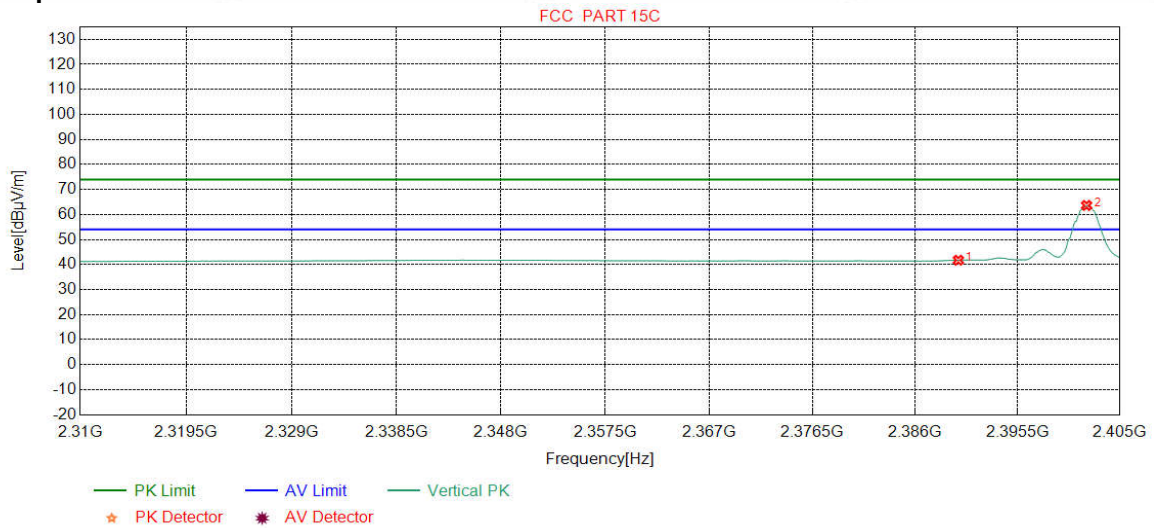

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.55	41.73	54.00	12.27	Pass	Vertical
2	2401.9086	32.26	13.31	-42.43	60.48	63.62	54.00	-9.62	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

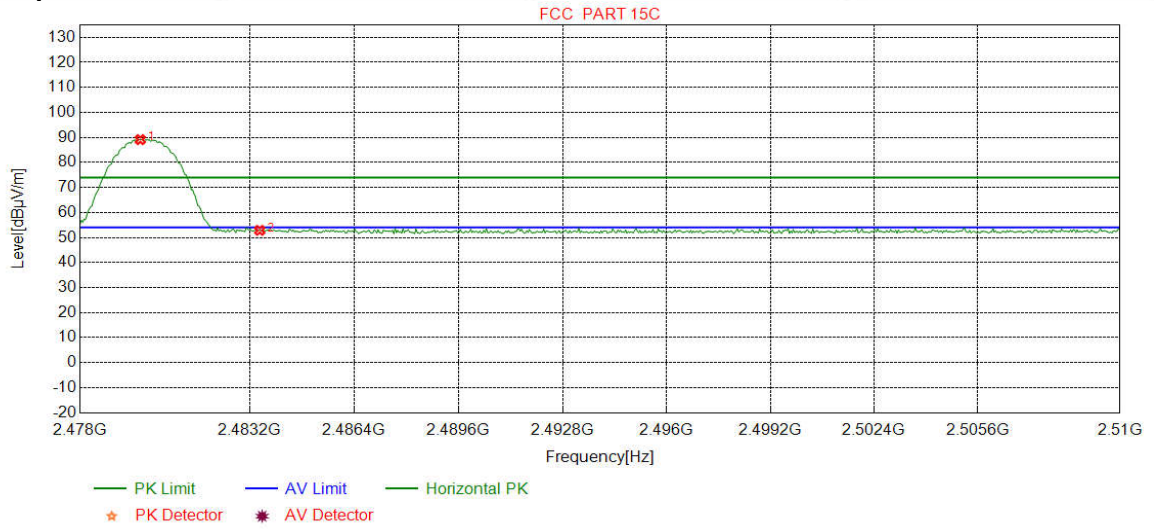

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.8423	32.37	13.39	-42.39	85.75	89.12	74.00	-15.12	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.50	52.86	74.00	21.14	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

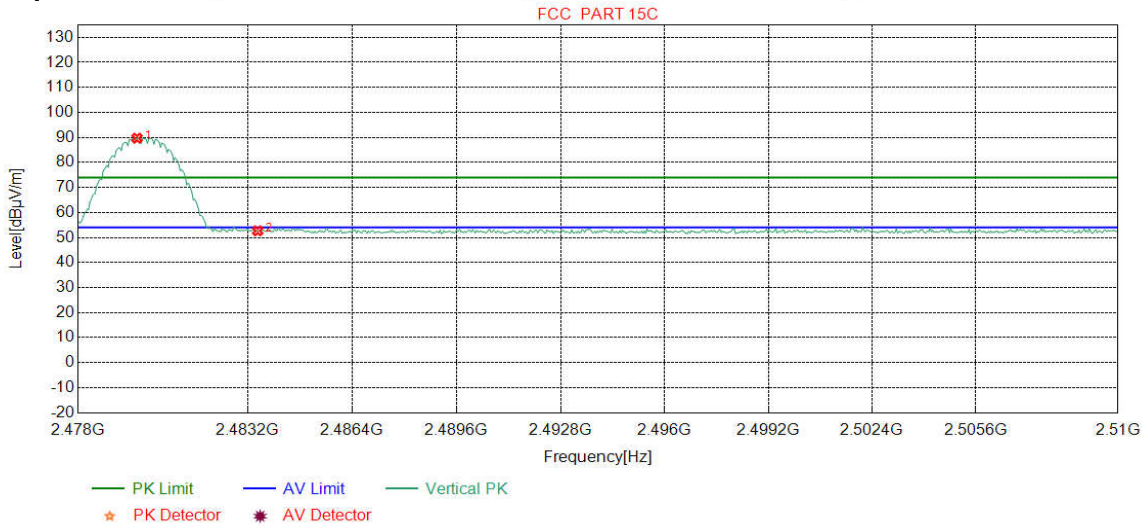

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.8023	32.37	13.39	-42.39	86.35	89.72	74.00	-15.72	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.30	52.66	74.00	21.34	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

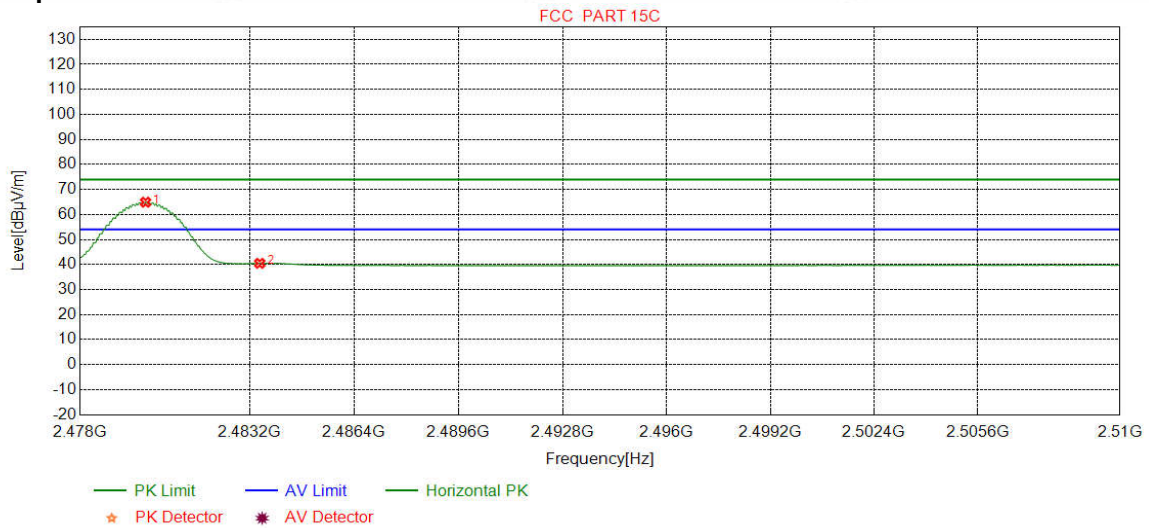

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2480.0025	32.37	13.39	-42.39	61.54	64.91	54.00	-10.91	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	37.12	40.48	54.00	13.52	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

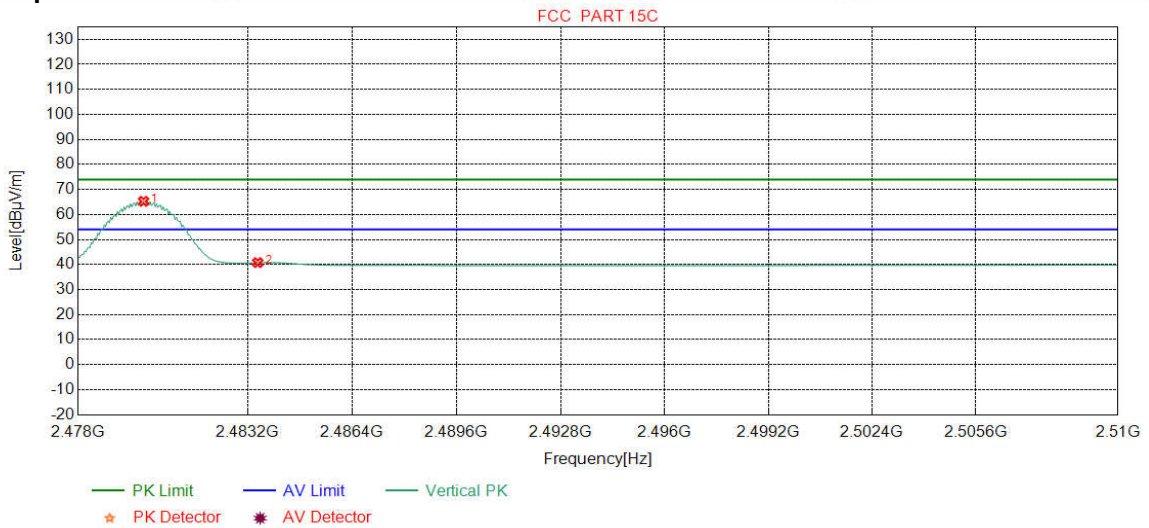

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2480.0025	32.37	13.39	-42.39	61.90	65.27	54.00	-11.27	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	37.40	40.76	54.00	13.24	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

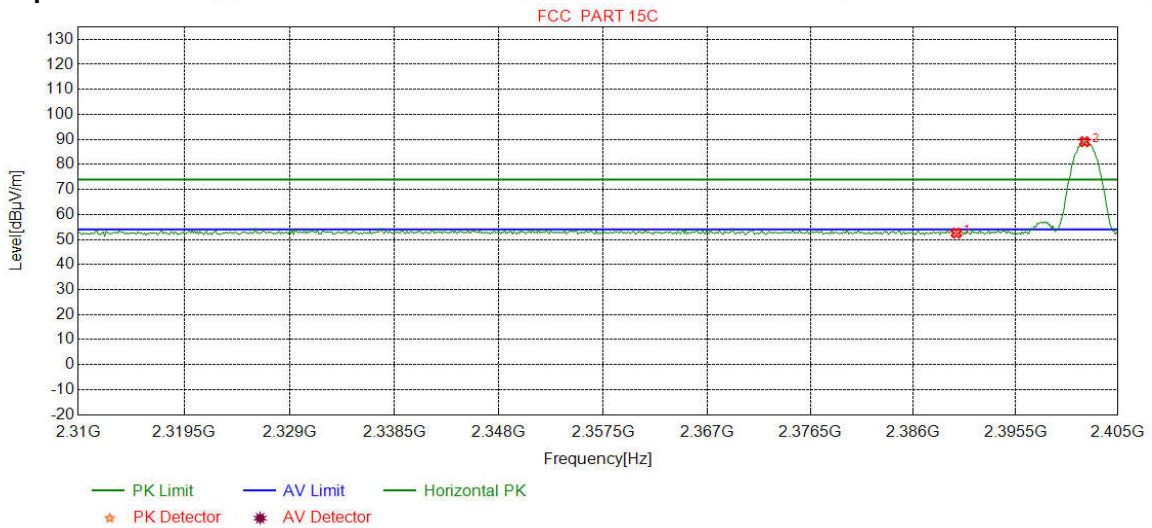

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.39	52.57	74.00	21.43	Pass	Horizontal
2	2401.9086	32.26	13.31	-42.43	85.93	89.07	74.00	-15.07	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

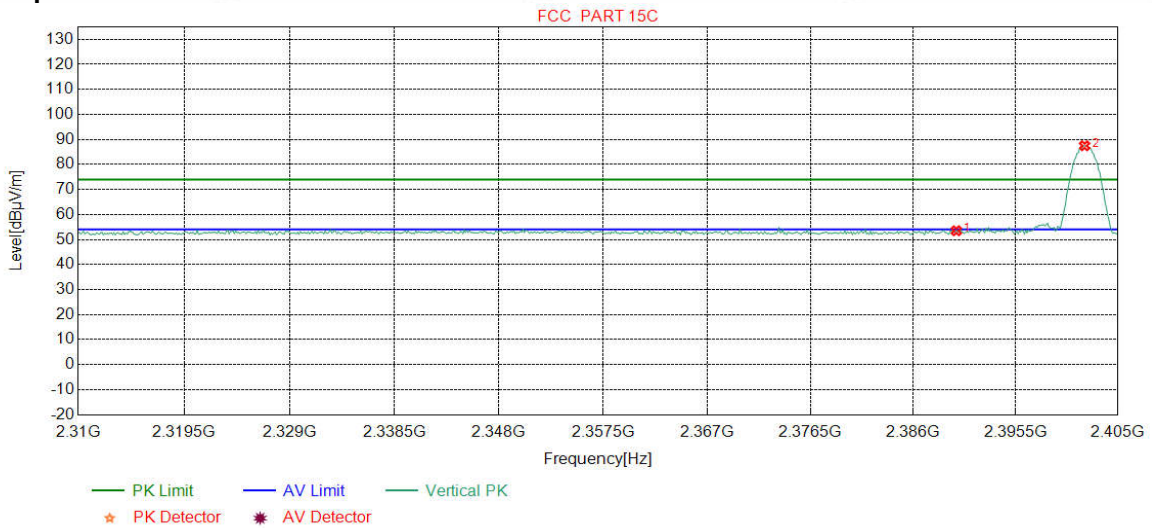

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	50.32	53.50	74.00	20.50	Pass	Vertical
2	2401.9086	32.26	13.31	-42.43	84.32	87.46	74.00	-13.46	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

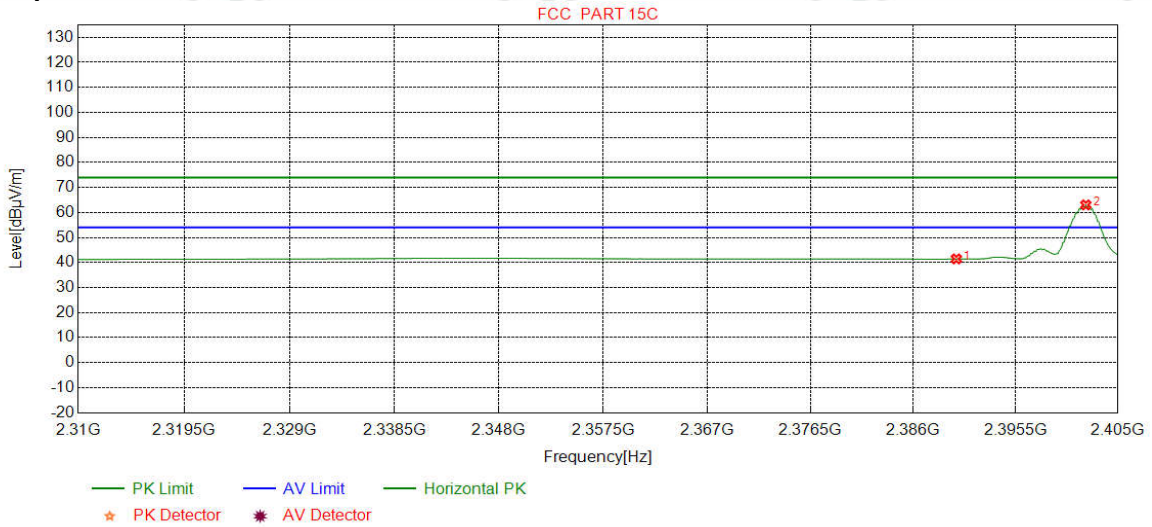

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.26	41.44	54.00	12.56	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	59.88	63.02	54.00	-9.02	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

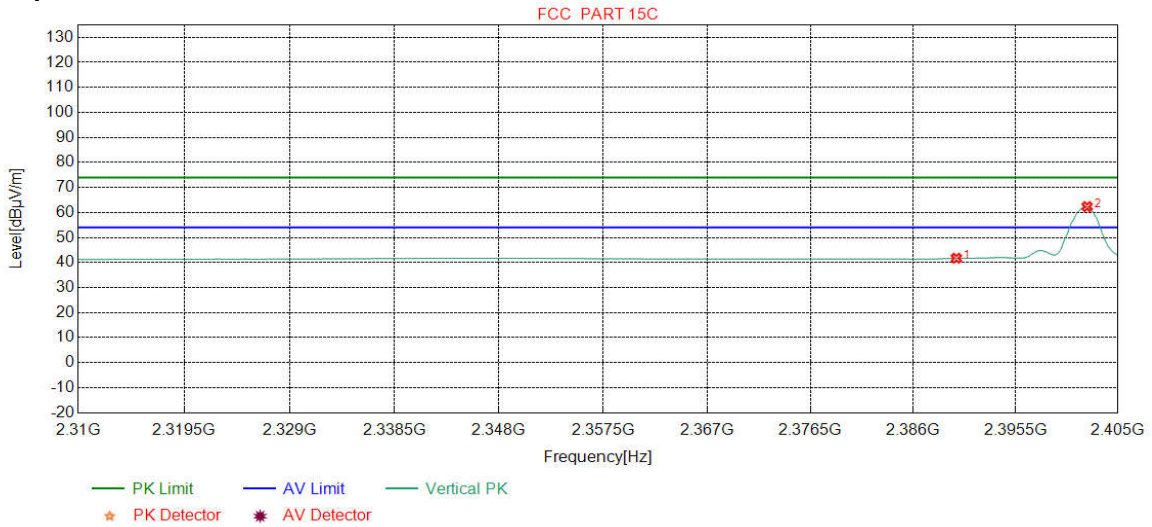

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.54	41.72	54.00	12.28	Pass	Vertical
2	2402.1464	32.26	13.31	-42.43	59.21	62.35	54.00	-8.35	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

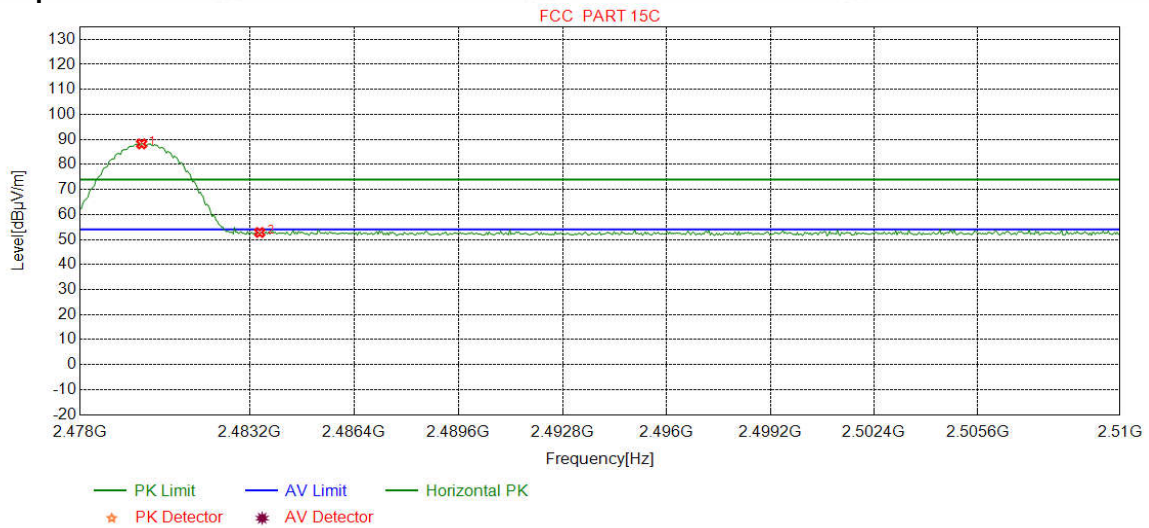

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8824	32.37	13.39	-42.39	84.85	88.22	74.00	-14.22	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.45	52.81	74.00	21.19	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

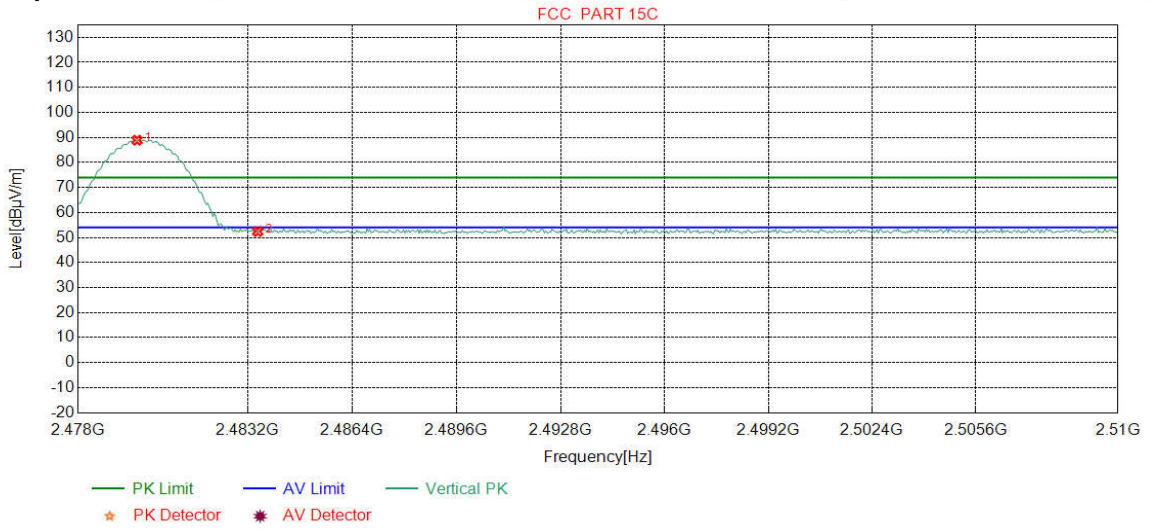

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2479.8023	32.37	13.39	-42.39	85.52	88.89	74.00	-14.89	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.05	52.41	74.00	21.59	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

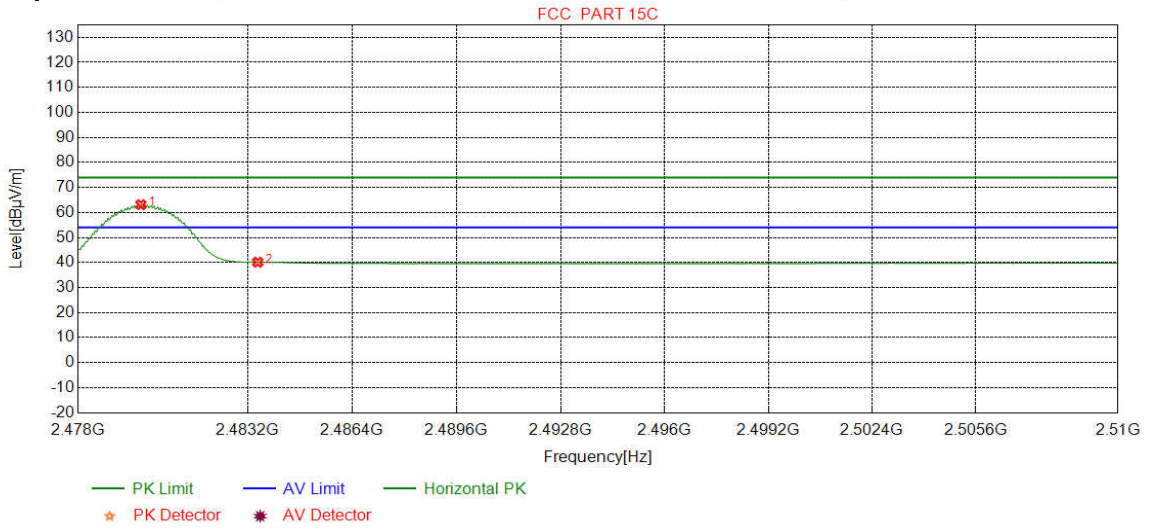

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9224	32.37	13.39	-42.39	59.76	63.13	54.00	-9.13	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.77	40.13	54.00	13.87	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		

Test Graph

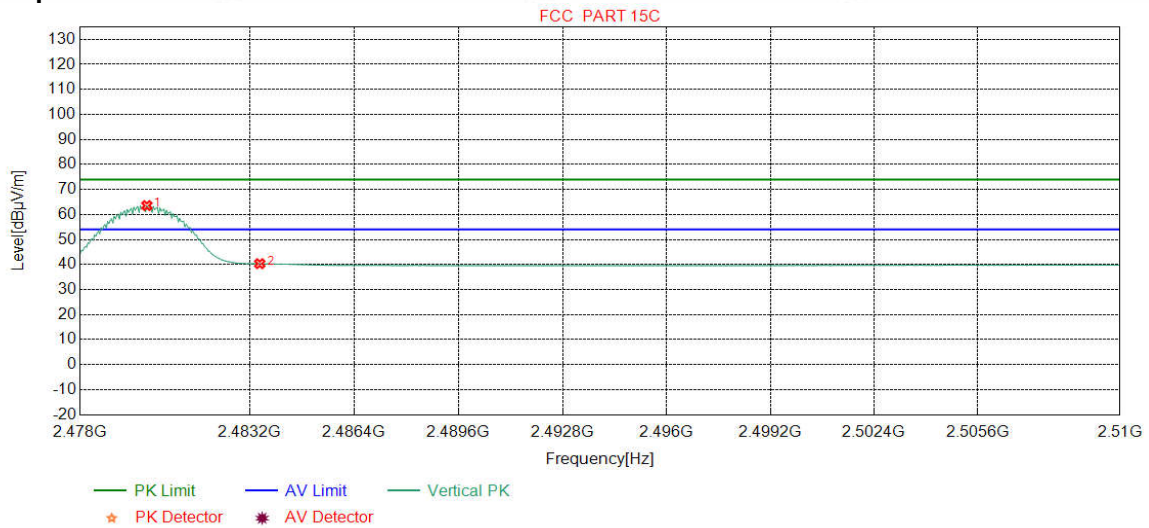

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-42.39	60.18	63.55	54.00	-9.55	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	36.97	40.33	54.00	13.67	Pass	Vertical

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} - \text{Correct Factor}$$

$$\text{Correct Factor} = \text{Preamplifier Factor} - \text{Antenna Factor} - \text{Cable Factor}$$

Appendix L) Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak	
	Peak	1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3	
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

Radiated Spurious Emissions test Data: Radiated Emission below 1GHz

Mode:		GFSK Transmitting					Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	51.99	31.79	40.00	8.21	Pass	H	PK
2	120.0250	9.20	1.30	-32.07	56.87	35.30	43.50	8.20	Pass	H	PK
3	156.0156	7.76	1.46	-31.99	61.19	38.42	43.50	5.08	Pass	H	PK
4	288.0458	12.96	2.02	-31.89	44.70	27.79	46.00	18.21	Pass	H	PK
5	467.9988	16.49	2.58	-31.87	43.10	30.30	46.00	15.70	Pass	H	PK
6	873.5964	21.78	3.54	-31.71	26.24	19.85	46.00	26.15	Pass	H	PK
7	44.4544	13.10	0.75	-32.12	49.34	31.07	40.00	8.93	Pass	V	PK
8	156.0156	7.76	1.46	-31.99	60.38	37.61	43.50	5.89	Pass	V	PK
9	240.0260	11.94	1.84	-31.90	51.61	33.49	46.00	12.51	Pass	V	PK
10	372.0562	14.79	2.30	-31.88	45.55	30.76	46.00	15.24	Pass	V	PK
11	467.9988	16.49	2.58	-31.87	44.57	31.77	46.00	14.23	Pass	V	PK
12	910.8481	22.17	3.60	-31.47	38.28	32.58	46.00	13.42	Pass	V	PK

Mode:		GFSK Transmitting					Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	44.4544	13.10	0.75	-32.12	49.40	31.13	40.00	8.87	Pass	H	PK
2	157.8588	7.83	1.47	-32.00	63.63	40.93	43.50	2.57	Pass	H	PK
3	216.0646	11.32	1.75	-31.95	60.03	41.15	46.00	4.85	Pass	H	PK
4	288.0458	12.96	2.02	-31.89	55.31	38.40	46.00	7.60	Pass	H	PK
5	372.0562	14.79	2.30	-31.88	50.88	36.09	46.00	9.91	Pass	H	PK
6	468.0958	16.49	2.58	-31.87	53.14	40.34	46.00	5.66	Pass	H	PK
7	44.4544	13.10	0.75	-32.12	49.47	31.20	40.00	8.80	Pass	V	PK
8	120.0250	9.20	1.30	-32.07	58.23	36.66	43.50	6.84	Pass	V	PK
9	204.0354	11.00	1.69	-31.94	55.12	35.87	43.50	7.63	Pass	V	PK
10	240.0260	11.94	1.84	-31.90	50.13	32.01	46.00	13.99	Pass	V	PK
11	467.9988	16.49	2.58	-31.87	44.49	31.69	46.00	14.31	Pass	V	PK
12	649.9890	19.40	3.10	-32.07	39.51	29.94	46.00	16.06	Pass	V	PK

Mode:		GFSK Transmitting					Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	44.4544	13.10	0.75	-32.12	50.67	32.40	40.00	7.60	Pass	H	PK
2	95.9666	10.35	1.13	-32.07	60.85	40.26	43.50	3.24	Pass	H	PK
3	215.9676	11.32	1.75	-31.96	60.27	41.38	43.50	2.12	Pass	H	PK
4	288.0458	12.96	2.02	-31.89	54.83	37.92	46.00	8.08	Pass	H	PK
5	467.9988	16.49	2.58	-31.87	52.82	40.02	46.00	5.98	Pass	H	PK
6	891.0581	21.99	3.58	-31.61	37.33	31.29	46.00	14.71	Pass	H	PK
7	35.5296	10.87	0.66	-32.12	53.36	32.77	40.00	7.23	Pass	V	PK
8	120.0250	9.20	1.30	-32.07	58.54	36.97	43.50	6.53	Pass	V	PK
9	168.0448	8.34	1.52	-31.96	58.87	36.77	43.50	6.73	Pass	V	PK
10	240.0260	11.94	1.84	-31.90	51.97	33.85	46.00	12.15	Pass	V	PK
11	372.0562	14.79	2.30	-31.88	44.89	30.10	46.00	15.90	Pass	V	PK
12	649.9890	19.40	3.10	-32.07	39.61	30.04	46.00	15.96	Pass	V	PK

Mode:		π /4DQPSK Transmitting					Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	35.5296	10.87	0.66	-32.12	57.11	36.52	40.00	3.48	Pass	H	PK
2	96.0636	10.37	1.13	-32.07	60.97	40.40	43.50	3.10	Pass	H	PK
3	227.9968	11.63	1.79	-31.92	58.33	39.83	46.00	6.17	Pass	H	PK
4	288.0458	12.96	2.02	-31.89	54.76	37.85	46.00	8.15	Pass	H	PK
5	396.0176	15.31	2.37	-31.78	50.55	36.45	46.00	9.55	Pass	H	PK
6	467.9988	16.49	2.58	-31.87	52.77	39.97	46.00	6.03	Pass	H	PK
7	35.6266	10.90	0.66	-32.12	58.79	38.23	40.00	1.77	Pass	V	PK
8	120.0250	9.20	1.30	-32.07	58.25	36.68	43.50	6.82	Pass	V	PK
9	204.0354	11.00	1.69	-31.94	54.64	35.39	43.50	8.11	Pass	V	PK
10	372.0562	14.79	2.30	-31.88	45.36	30.57	46.00	15.43	Pass	V	PK
11	468.0958	16.49	2.58	-31.87	44.92	32.12	46.00	13.88	Pass	V	PK
12	890.9611	21.99	3.58	-31.61	41.20	35.16	46.00	10.84	Pass	V	PK

Mode:		π/4DQPSK Transmitting					Channel:		2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	44.4544	13.10	0.75	-32.12	49.41	31.14	40.00	8.86	Pass	H	PK
2	95.9666	10.35	1.13	-32.07	60.11	39.52	43.50	3.98	Pass	H	PK
3	216.0646	11.32	1.75	-31.95	60.29	41.41	46.00	4.59	Pass	H	PK
4	288.0458	12.96	2.02	-31.89	55.06	38.15	46.00	7.85	Pass	H	PK
5	467.9988	16.49	2.58	-31.87	52.90	40.10	46.00	5.90	Pass	H	PK
6	891.0581	21.99	3.58	-31.61	42.07	36.03	46.00	9.97	Pass	H	PK
7	44.4544	13.10	0.75	-32.12	49.93	31.66	40.00	8.34	Pass	V	PK
8	120.0250	9.20	1.30	-32.07	58.16	36.59	43.50	6.91	Pass	V	PK
9	168.0448	8.34	1.52	-31.96	59.88	37.78	43.50	5.72	Pass	V	PK
10	204.0354	11.00	1.69	-31.94	54.84	35.59	43.50	7.91	Pass	V	PK
11	372.0562	14.79	2.30	-31.88	45.18	30.39	46.00	15.61	Pass	V	PK
12	668.2268	19.55	3.08	-32.07	39.28	29.84	46.00	16.16	Pass	V	PK

Mode:		π/4DQPSK Transmitting					Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	44.4544	13.10	0.75	-32.12	49.66	31.39	40.00	8.61	Pass	H	PK
2	95.9666	10.35	1.13	-32.07	60.48	39.89	43.50	3.61	Pass	H	PK
3	215.9676	11.32	1.75	-31.96	61.01	42.12	43.50	1.38	Pass	H	PK
4	288.0458	12.96	2.02	-31.89	54.71	37.80	46.00	8.20	Pass	H	PK
5	468.0958	16.49	2.58	-31.87	53.48	40.68	46.00	5.32	Pass	H	PK
6	890.9611	21.99	3.58	-31.61	39.28	33.24	46.00	12.76	Pass	H	PK
7	44.4544	13.10	0.75	-32.12	50.32	32.05	40.00	7.95	Pass	V	PK
8	120.0250	9.20	1.30	-32.07	58.37	36.80	43.50	6.70	Pass	V	PK
9	156.0156	7.76	1.46	-31.99	61.68	38.91	43.50	4.59	Pass	V	PK
10	300.0750	13.20	2.06	-31.85	47.23	30.64	46.00	15.36	Pass	V	PK
11	467.9988	16.49	2.58	-31.87	44.96	32.16	46.00	13.84	Pass	V	PK
12	879.7080	21.86	3.55	-31.66	38.96	32.71	46.00	13.29	Pass	V	PK

Transmitter Emission above 1GHz

Mode:		GFSK Transmitting					Channel:			2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark	
1	1999.0999	31.69	3.47	-42.61	56.50	49.05	74.00	24.95	Pass	H	PK	
2	3594.0396	33.48	4.35	-41.63	49.52	45.72	74.00	28.28	Pass	H	PK	
3	4804.0000	34.50	4.55	-40.66	42.77	41.16	74.00	32.84	Pass	H	PK	
4	7205.2804	36.31	5.82	-41.03	52.72	53.82	74.00	20.18	Pass	H	PK	
5	9608.0000	37.64	6.63	-40.76	41.78	45.29	74.00	28.71	Pass	H	PK	
6	12010.0000	39.31	7.60	-41.21	40.17	45.87	74.00	28.13	Pass	H	PK	
7	1594.0594	29.02	3.07	-42.89	58.42	47.62	74.00	26.38	Pass	V	PK	
8	4804.0000	34.50	4.55	-40.66	44.95	43.34	74.00	30.66	Pass	V	PK	
9	7206.0000	36.31	5.81	-41.02	49.17	50.27	74.00	23.73	Pass	V	PK	
10	9608.0000	37.64	6.63	-40.76	41.37	44.88	74.00	29.12	Pass	V	PK	
11	12010.0000	39.31	7.60	-41.21	40.06	45.76	74.00	28.24	Pass	V	PK	
12	15570.8381	41.04	9.60	-43.05	41.69	49.28	74.00	24.72	Pass	V	PK	

Mode:		GFSK Transmitting					Channel:			2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark	
1	1794.4794	30.34	3.31	-42.70	56.20	47.15	74.00	26.85	Pass	H	PK	
2	4882.0000	34.50	4.81	-40.60	42.32	41.03	74.00	32.97	Pass	H	PK	
3	7323.0000	36.42	5.85	-40.92	51.87	53.22	74.00	20.78	Pass	H	PK	
4	9764.0000	37.71	6.71	-40.62	40.76	44.56	74.00	29.44	Pass	H	PK	
5	12205.0000	39.42	7.67	-41.16	40.44	46.37	74.00	27.63	Pass	H	PK	
6	17072.9382	42.27	10.99	-43.31	42.40	52.35	74.00	21.65	Pass	H	PK	
7	1396.6397	28.30	2.89	-42.68	55.43	43.94	74.00	30.06	Pass	V	PK	
8	2997.1997	33.20	4.54	-42.12	50.86	46.48	74.00	27.52	Pass	V	PK	
9	4882.0000	34.50	4.81	-40.60	44.28	42.99	74.00	31.01	Pass	V	PK	
10	7323.0000	36.42	5.85	-40.92	48.94	50.29	74.00	23.71	Pass	V	PK	
11	9764.0000	37.71	6.71	-40.62	40.42	44.22	74.00	29.78	Pass	V	PK	
12	12205.0000	39.42	7.67	-41.16	40.61	46.54	74.00	27.46	Pass	V	PK	

Mode:		GFSK Transmitting					Channel:			2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark	
1	1791.8792	30.33	3.31	-42.71	58.46	49.39	74.00	24.61	Pass	H	PK	
2	4960.0000	34.50	4.82	-40.53	45.84	44.63	74.00	29.37	Pass	H	PK	
3	7440.0000	36.54	5.85	-40.82	51.18	52.75	74.00	21.25	Pass	H	PK	
4	9920.0000	37.77	6.79	-40.48	39.39	43.47	74.00	30.53	Pass	H	PK	
5	12400.0000	39.54	7.86	-41.12	39.96	46.24	74.00	27.76	Pass	H	PK	
6	17560.9707	42.65	11.41	-43.66	41.90	52.30	74.00	21.70	Pass	H	PK	
7	1312.2312	28.21	2.77	-42.77	59.02	47.23	74.00	26.77	Pass	V	PK	
8	4960.0000	34.50	4.82	-40.53	47.54	46.33	74.00	27.67	Pass	V	PK	
9	7440.0000	36.54	5.85	-40.82	50.92	52.49	74.00	21.51	Pass	V	PK	
10	9920.0000	37.77	6.79	-40.48	39.41	43.49	74.00	30.51	Pass	V	PK	
11	12400.0000	39.54	7.86	-41.12	40.47	46.75	74.00	27.25	Pass	V	PK	
12	17035.9357	42.24	11.08	-43.28	42.58	52.62	74.00	21.38	Pass	V	PK	

Mode:		π /4DQPSK Transmitting					Channel:			2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark	
1	1797.6798	30.36	3.32	-42.71	56.65	47.62	74.00	26.38	Pass	H	PK	
2	3213.0142	33.29	4.60	-42.00	50.20	46.09	74.00	27.91	Pass	H	PK	
3	4804.0000	34.50	4.55	-40.66	42.94	41.33	74.00	32.67	Pass	H	PK	
4	7206.0000	36.31	5.81	-41.02	49.71	50.81	74.00	23.19	Pass	H	PK	
5	9608.0000	37.64	6.63	-40.76	41.30	44.81	74.00	29.19	Pass	H	PK	
6	12010.0000	39.31	7.60	-41.21	39.17	44.87	74.00	29.13	Pass	H	PK	
7	1399.2399	28.30	2.90	-42.68	57.46	45.98	74.00	28.02	Pass	V	PK	
8	4804.0000	34.50	4.55	-40.66	43.85	42.24	74.00	31.76	Pass	V	PK	
9	7206.0000	36.31	5.81	-41.02	47.36	48.46	74.00	25.54	Pass	V	PK	
10	9608.0000	37.64	6.63	-40.76	42.18	45.69	74.00	28.31	Pass	V	PK	
11	12010.0000	39.31	7.60	-41.21	39.19	44.89	74.00	29.11	Pass	V	PK	
12	15606.8405	41.11	9.69	-43.07	40.61	48.34	74.00	25.66	Pass	V	PK	

Mode:		π/4DQPSK Transmitting					Channel:			2441		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark	
1	1798.0798	30.37	3.32	-42.72	54.51	45.48	74.00	28.52	Pass	H	PK	
2	3448.0299	33.38	4.44	-41.86	48.93	44.89	74.00	29.11	Pass	H	PK	
3	4882.0000	34.50	4.81	-40.60	41.68	40.39	74.00	33.61	Pass	H	PK	
4	7323.0000	36.42	5.85	-40.92	50.63	51.98	74.00	22.02	Pass	H	PK	
5	9764.0000	37.71	6.71	-40.62	39.82	43.62	74.00	30.38	Pass	H	PK	
6	12205.0000	39.42	7.67	-41.16	38.88	44.81	74.00	29.19	Pass	H	PK	
7	1598.8599	29.05	3.07	-42.90	57.14	46.36	74.00	27.64	Pass	V	PK	
8	4882.0000	34.50	4.81	-40.60	42.19	40.90	74.00	33.10	Pass	V	PK	
9	7323.0000	36.42	5.85	-40.92	48.07	49.42	74.00	24.58	Pass	V	PK	
10	9764.0000	37.71	6.71	-40.62	39.47	43.27	74.00	30.73	Pass	V	PK	
11	12205.0000	39.42	7.67	-41.16	38.50	44.43	74.00	29.57	Pass	V	PK	
12	16896.9265	42.22	11.10	-43.33	40.73	50.72	74.00	23.28	Pass	V	PK	

Mode:		π/4DQPSK Transmitting					Channel:			2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark	
1	1797.4797	30.36	3.32	-42.71	57.43	48.40	74.00	25.60	Pass	H	PK	
2	4960.0000	34.50	4.82	-40.53	45.45	44.24	74.00	29.76	Pass	H	PK	
3	7440.2960	36.54	5.85	-40.82	52.07	53.64	74.00	20.36	Pass	H	PK	
4	9920.0000	37.77	6.79	-40.48	39.39	43.47	74.00	30.53	Pass	H	PK	
5	12400.0000	39.54	7.86	-41.12	39.72	46.00	74.00	28.00	Pass	H	PK	
6	17047.9365	42.25	11.24	-43.29	40.95	51.15	74.00	22.85	Pass	H	PK	
7	1396.8397	28.30	2.89	-42.68	54.58	43.09	74.00	30.91	Pass	V	PK	
8	4960.0000	34.50	4.82	-40.53	45.76	44.55	74.00	29.45	Pass	V	PK	
9	7440.0000	36.54	5.85	-40.82	49.18	50.75	74.00	23.25	Pass	V	PK	
10	9920.0000	37.77	6.79	-40.48	39.67	43.75	74.00	30.25	Pass	V	PK	
11	12400.0000	39.54	7.86	-41.12	41.46	47.74	74.00	26.26	Pass	V	PK	
12	17058.9373	42.26	11.16	-43.30	40.88	51.00	74.00	23.00	Pass	V	PK	

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 17GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.