



Appendix E

RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: Wi-Fi Router

Test Model: WR3000

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Taylor Hu
Supervised by:	Ling Zhu





E.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant0	16.335	>=0.5	Pass
NVNT	a	5785	Ant0	16.323	>=0.5	Pass
NVNT	a	5825	Ant0	15.915	>=0.5	Pass
NVNT	n20	5745	Ant0	17.31	>=0.5	Pass
NVNT	n20	5785	Ant0	17.552	>=0.5	Pass
NVNT	n20	5825	Ant0	15.925	>=0.5	Pass
NVNT	n40	5755	Ant0	35.111	>=0.5	Pass
NVNT	n40	5795	Ant0	35.104	>=0.5	Pass
NVNT	ac20	5745	Ant0	17.289	>=0.5	Pass
NVNT	ac20	5785	Ant0	16.497	>=0.5	Pass
NVNT	ac20	5825	Ant0	16.535	>=0.5	Pass
NVNT	ac40	5755	Ant0	35.098	>=0.5	Pass
NVNT	ac40	5795	Ant0	35.086	>=0.5	Pass
NVNT	ac80	5775	Ant0	75.091	>=0.5	Pass
NVNT	ax20	5745	Ant0	18.471	>=0.5	Pass
NVNT	ax20	5785	Ant0	18.32	>=0.5	Pass
NVNT	ax20	5825	Ant0	18.356	>=0.5	Pass
NVNT	ax40	5755	Ant0	35.067	>=0.5	Pass
NVNT	ax40	5795	Ant0	35.071	>=0.5	Pass
NVNT	ax80	5775	Ant0	73.845	>=0.5	Pass






Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant0

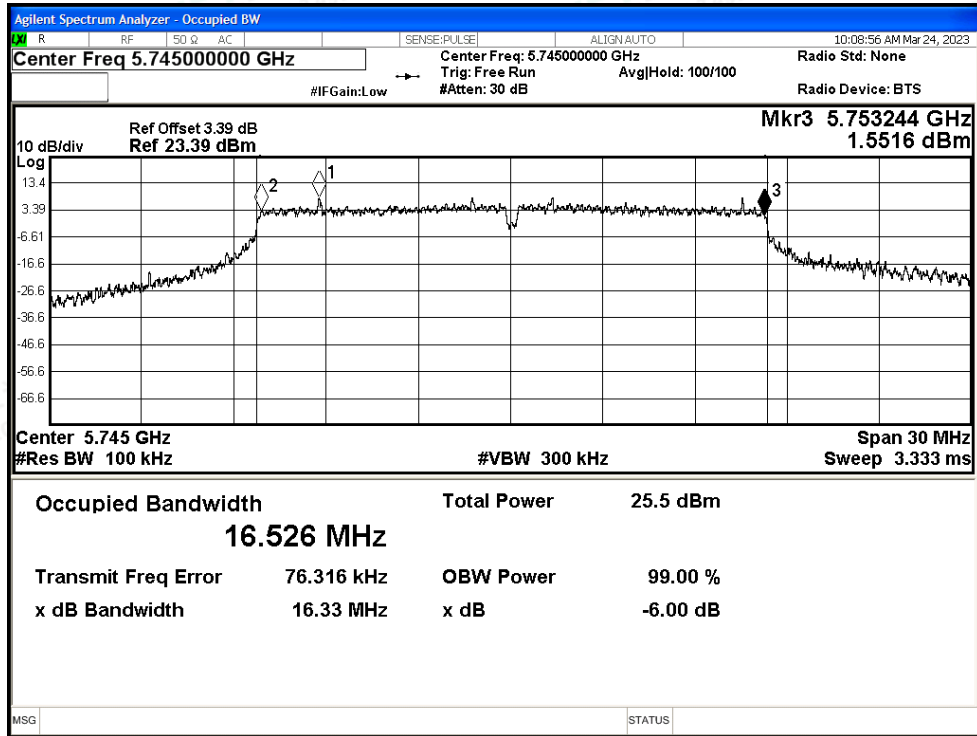


-6dB Bandwidth NVNT a 5785MHz Ant0

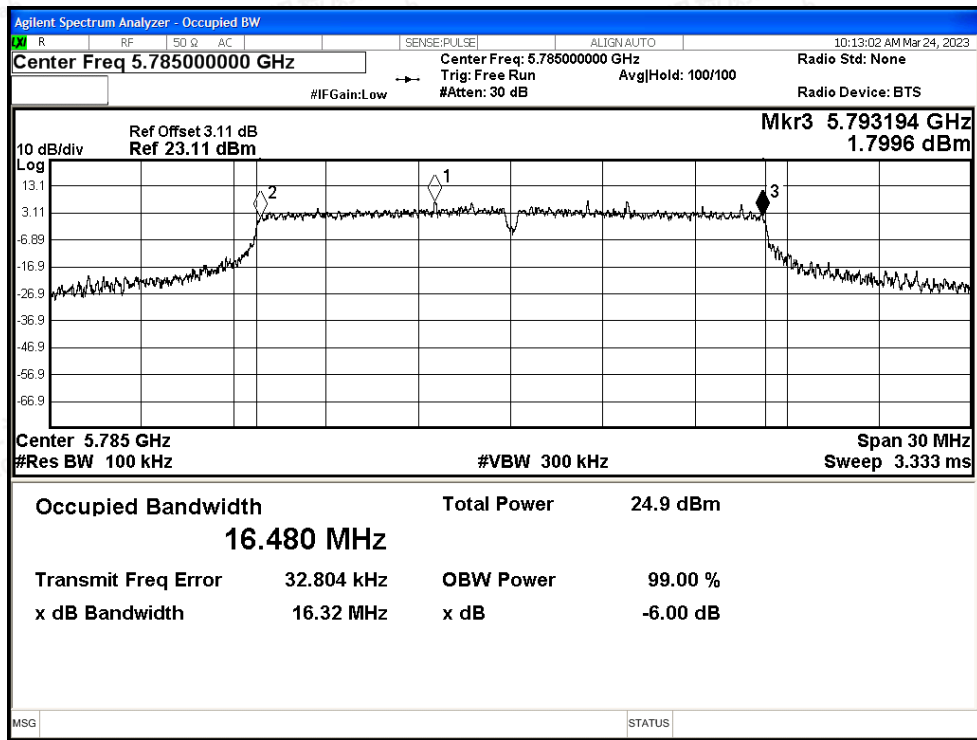




-6dB Bandwidth NVNT a 5825MHz Ant0

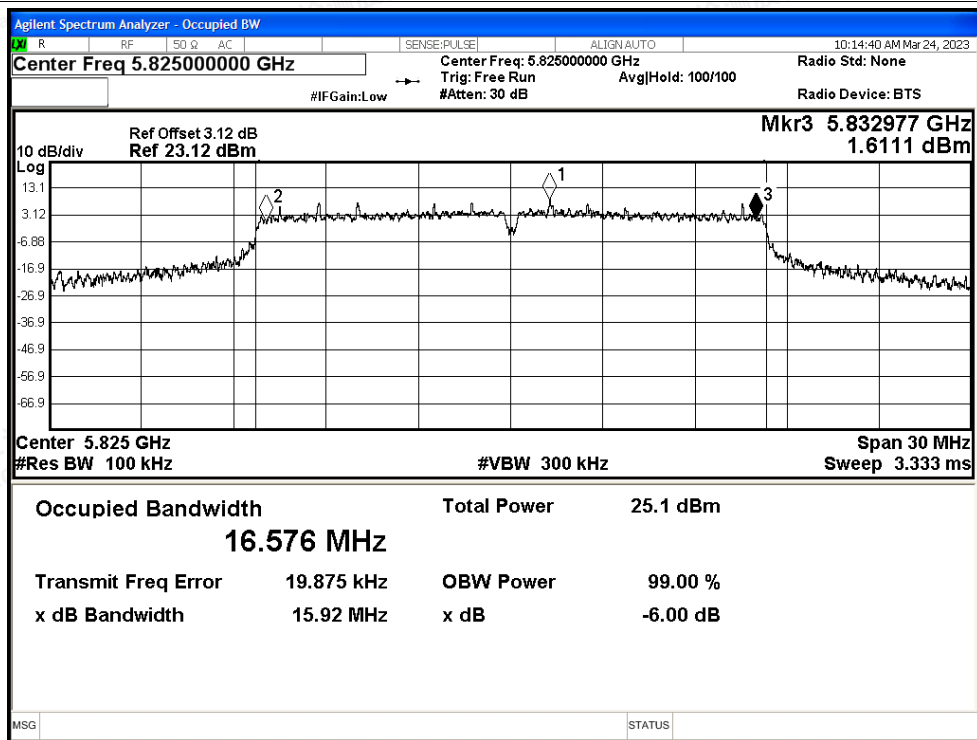


-6dB Bandwidth NVNT n20 5745MHz Ant0

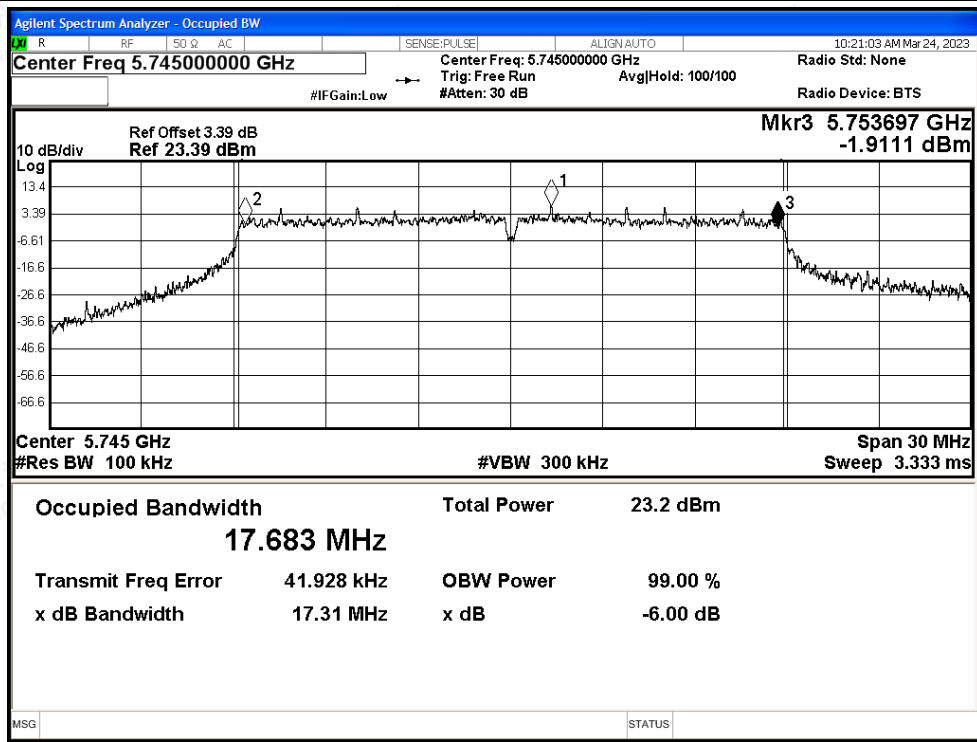




-6dB Bandwidth NVNT n20 5785MHz Ant0

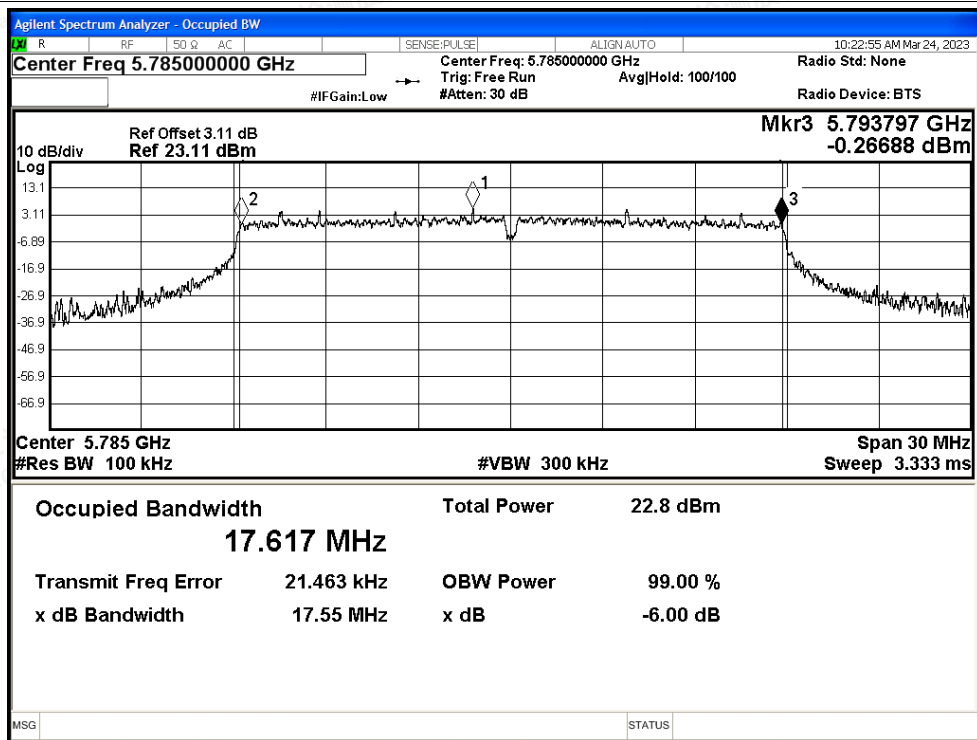


-6dB Bandwidth NVNT n20 5825MHz Ant0

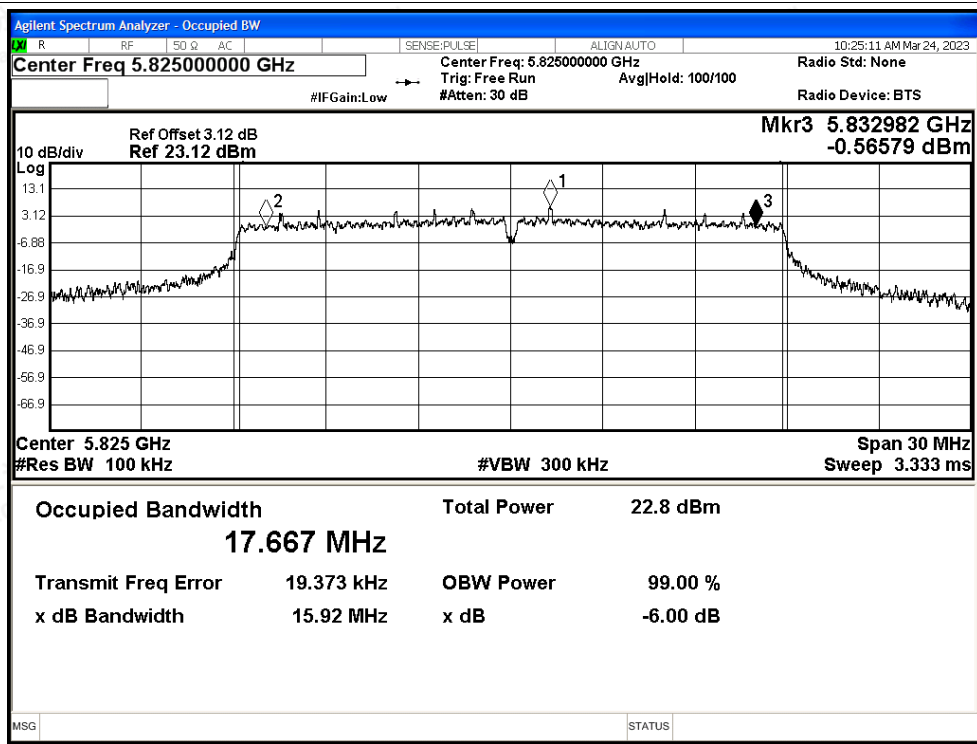






-6dB Bandwidth NVNT n40 5755MHz Ant0

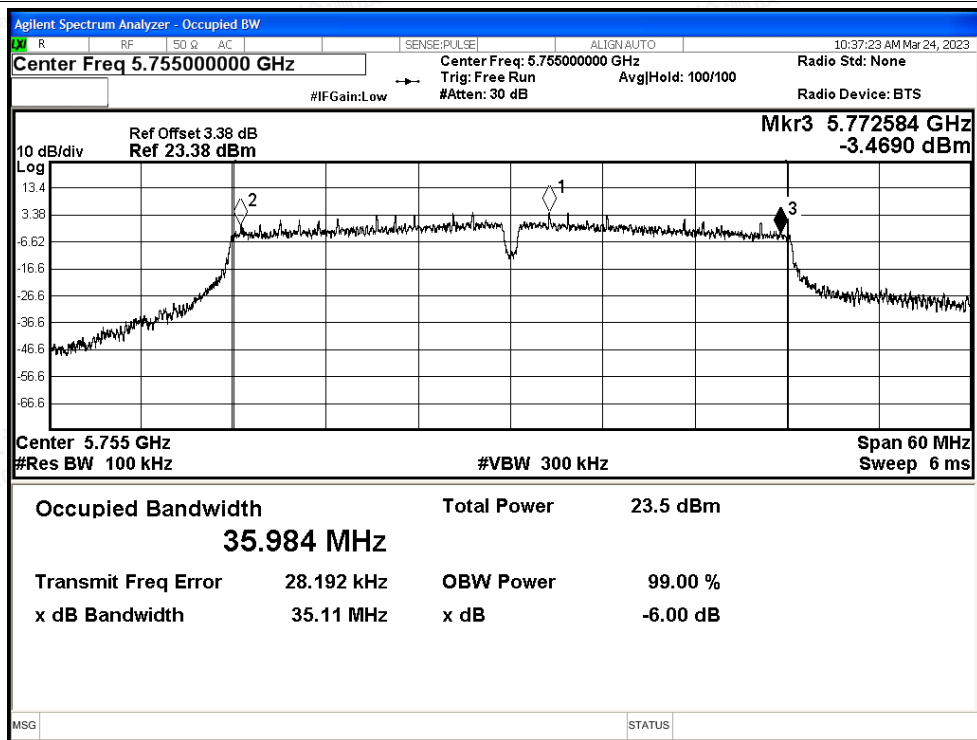


-6dB Bandwidth NVNT n40 5795MHz Ant0

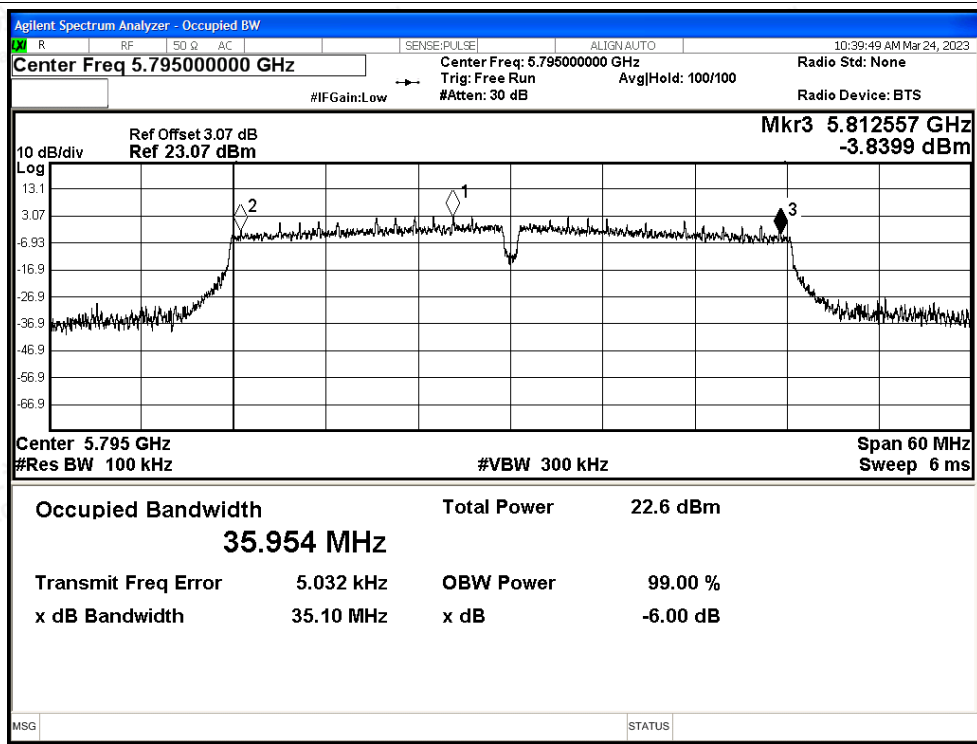

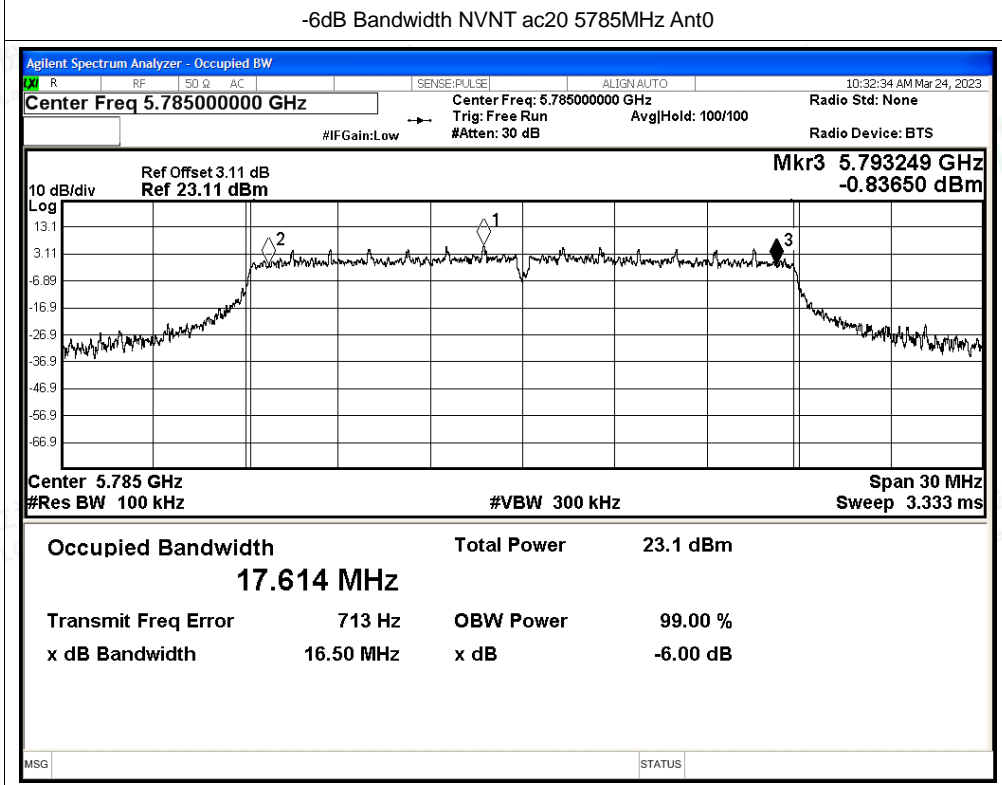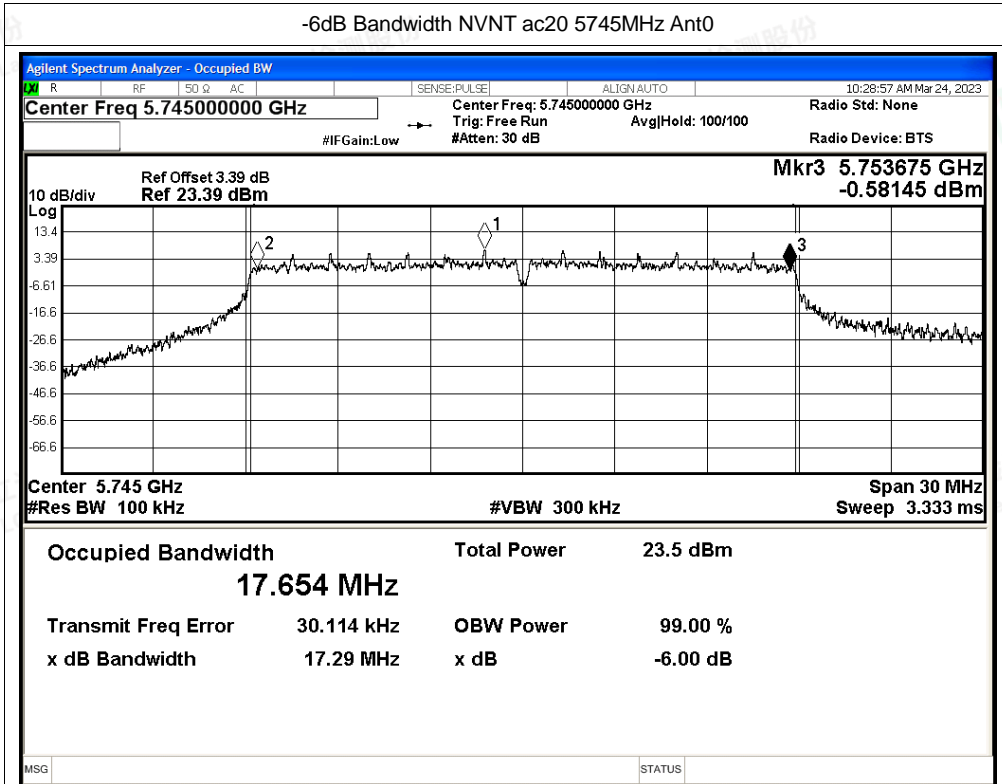






-6dB Bandwidth NVNT ac20 5825MHz Ant0

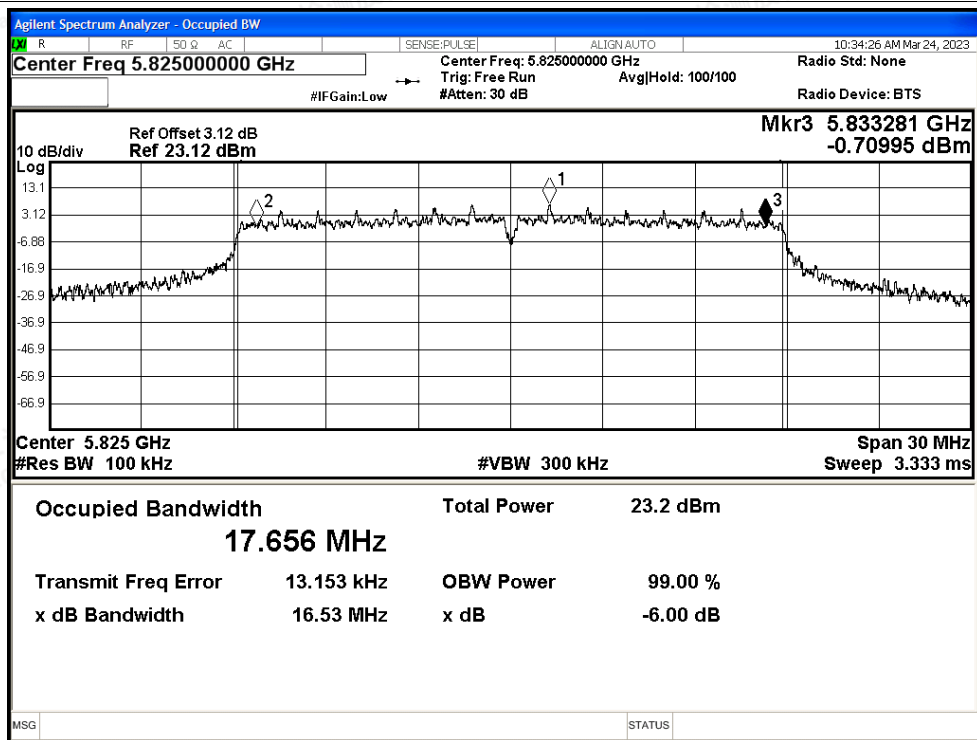


-6dB Bandwidth NVNT ac40 5755MHz Ant0

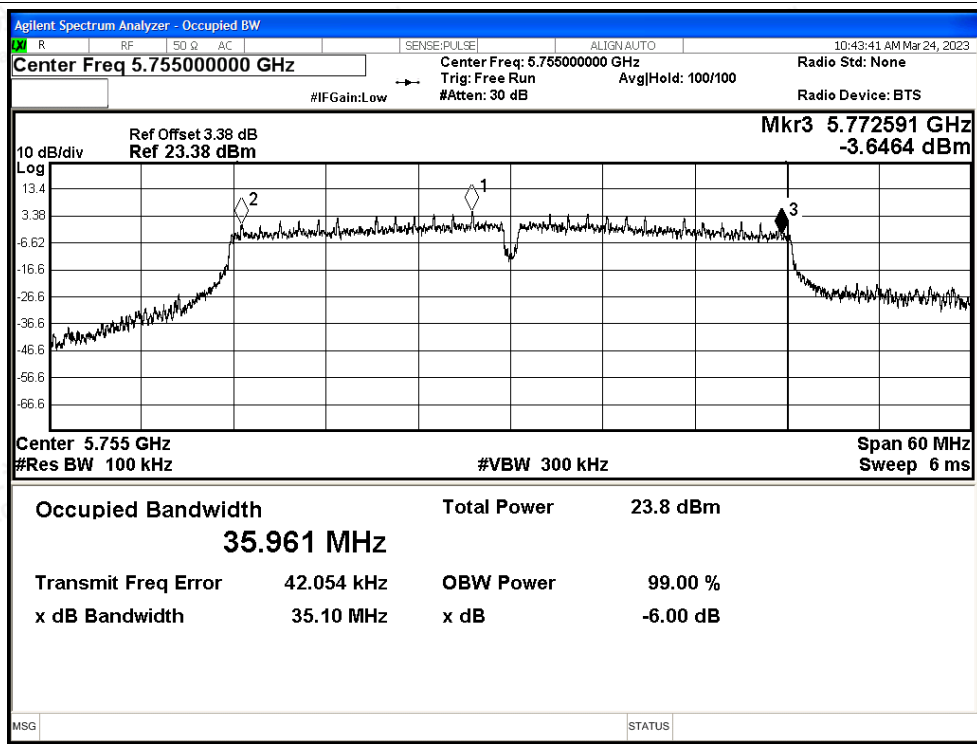

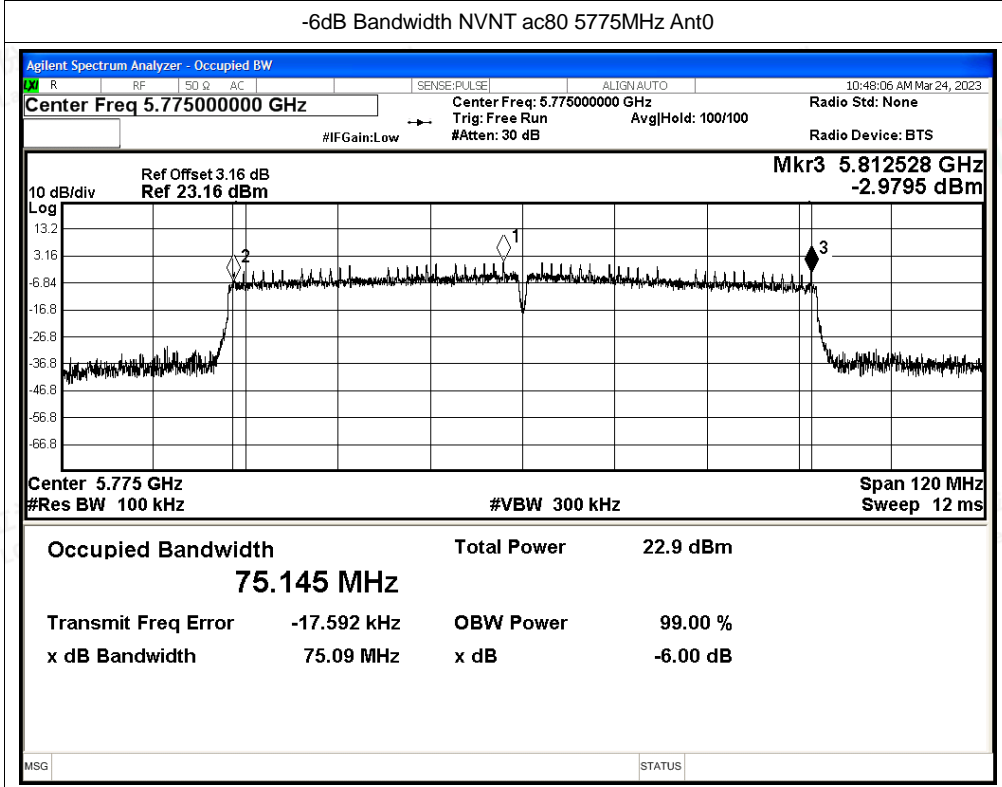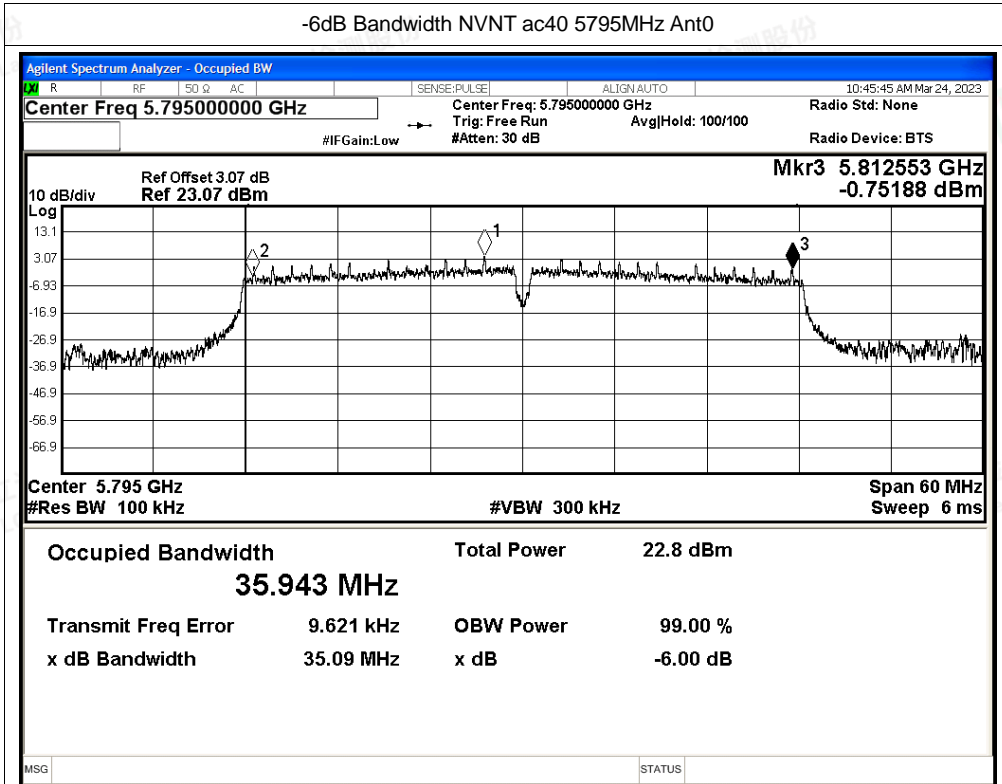




-6dB Bandwidth NVNT ax20 5745MHz Ant0

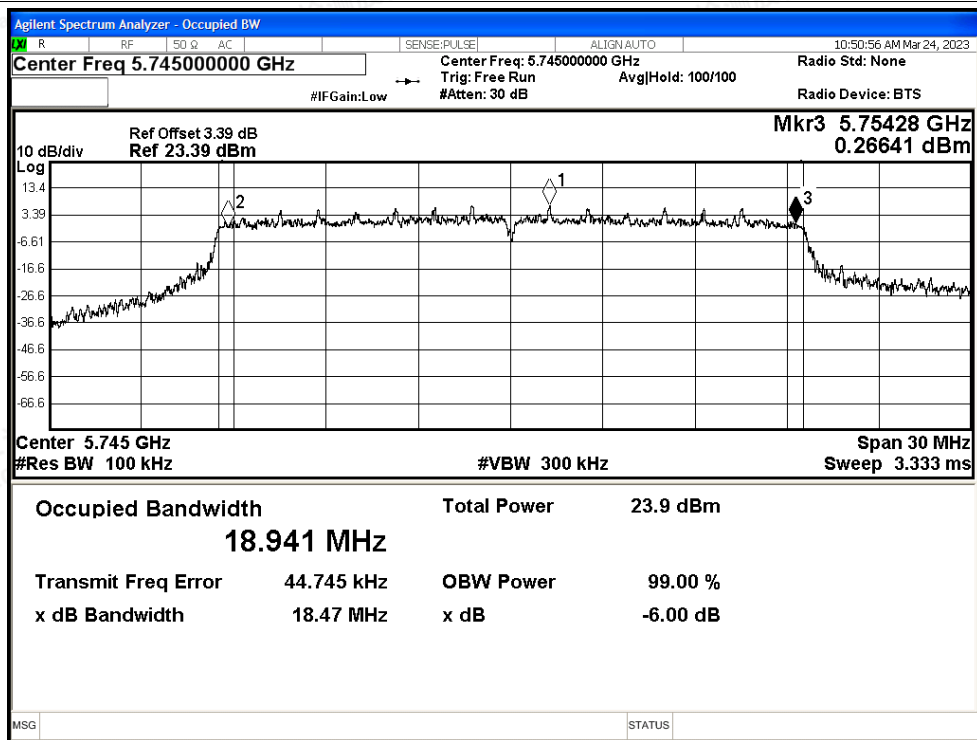


-6dB Bandwidth NVNT ax20 5785MHz Ant0

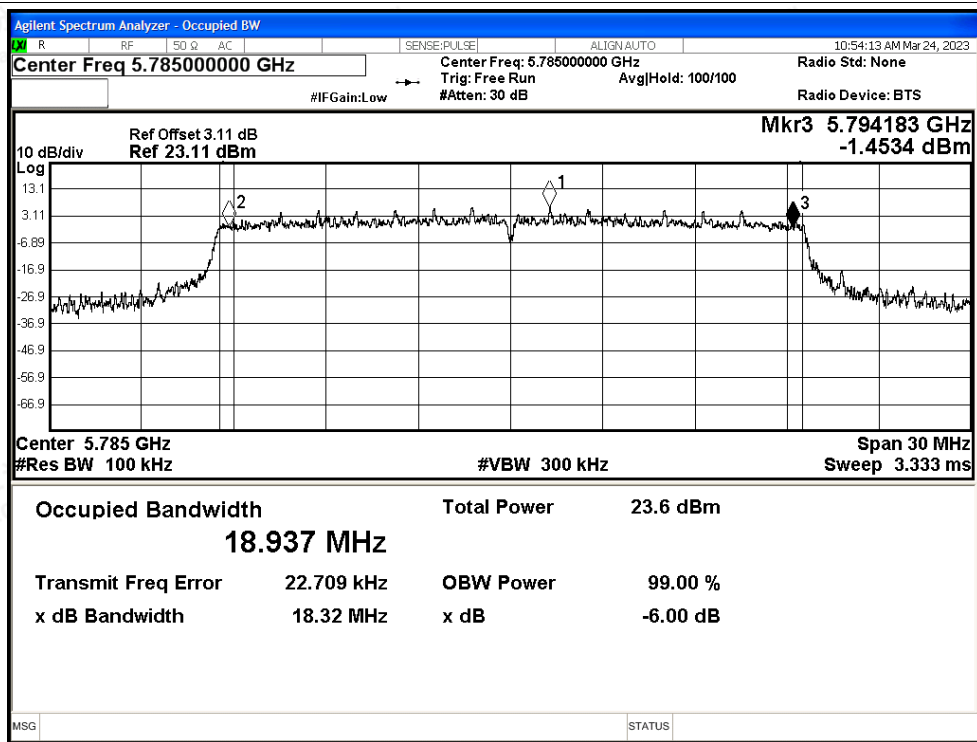




-6dB Bandwidth NVNT ax20 5825MHz Ant0

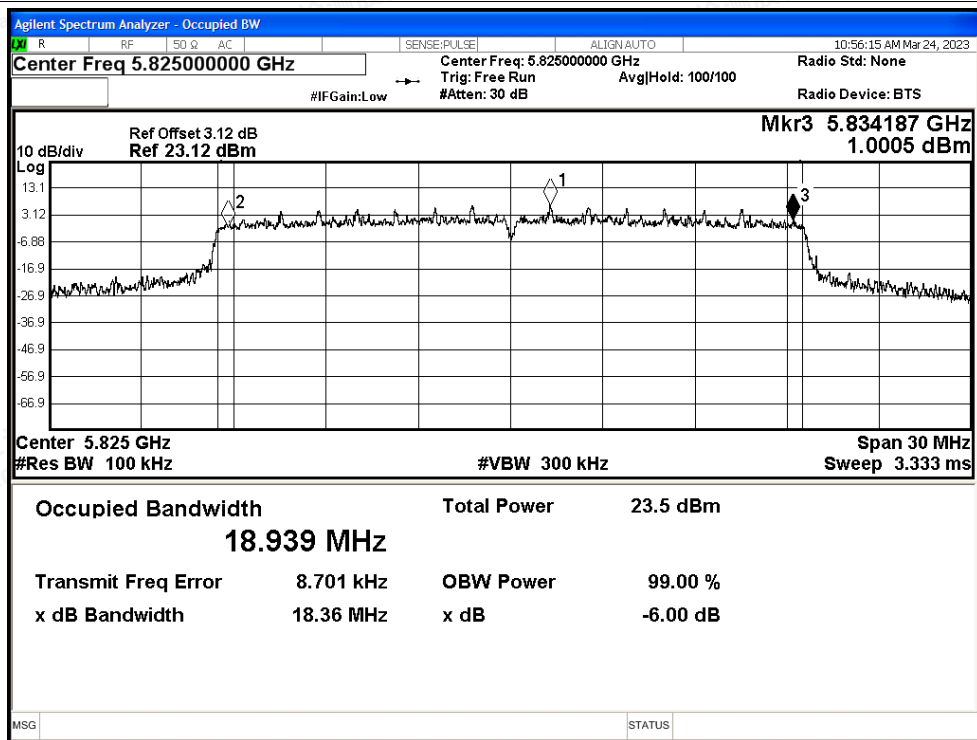


-6dB Bandwidth NVNT ax40 5755MHz Ant0

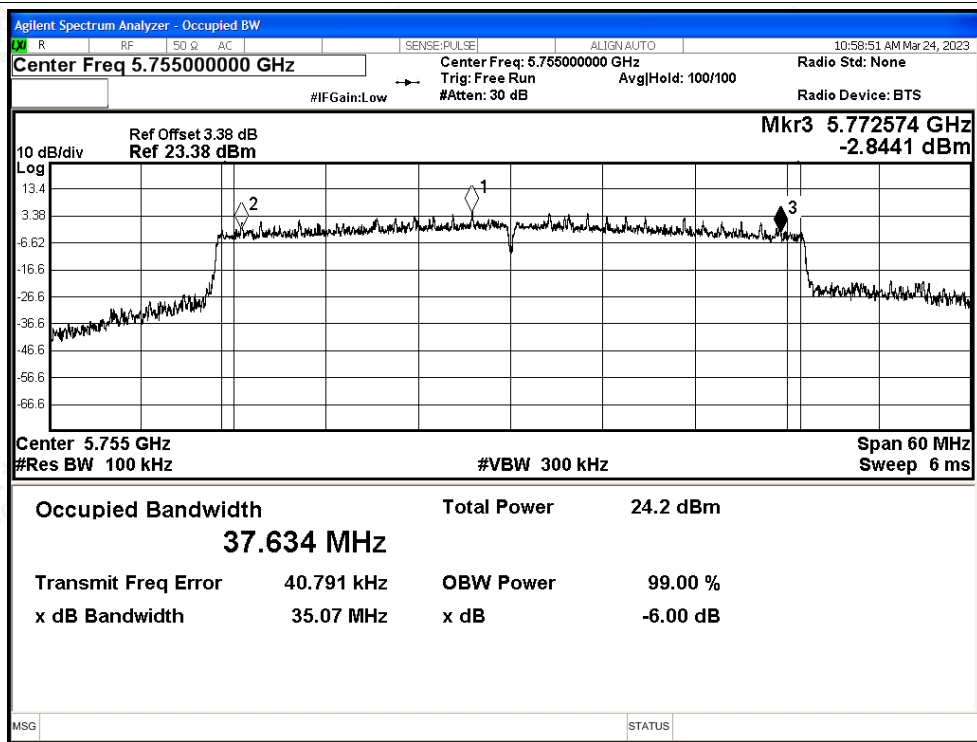




-6dB Bandwidth NVNT ax40 5795MHz Ant0

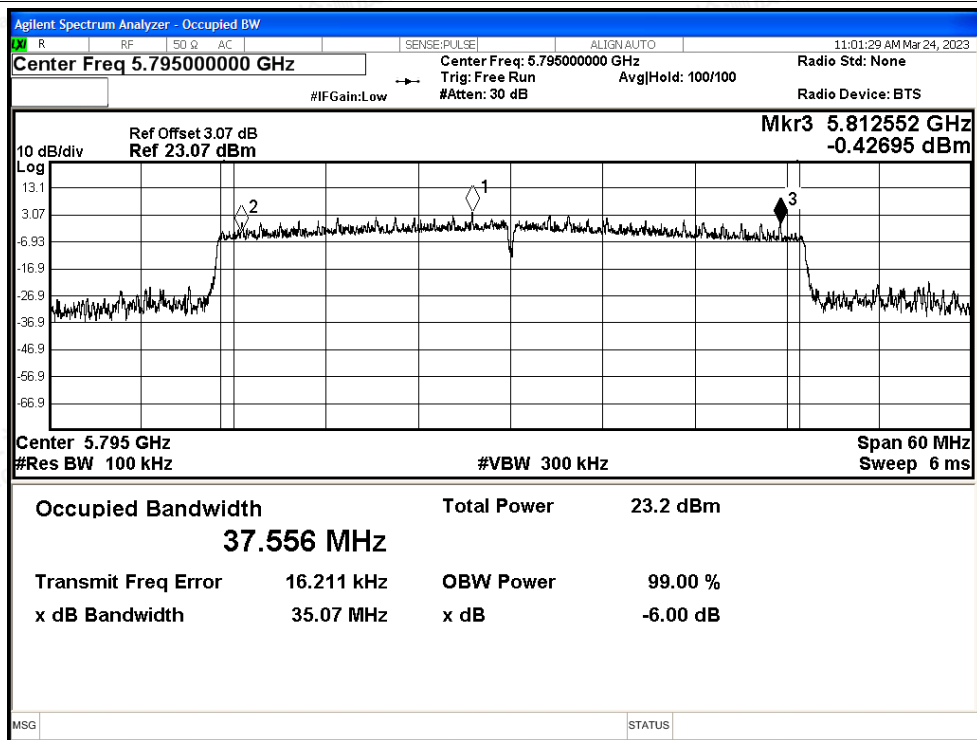

-6dB Bandwidth NVNT ax80 5775MHz Ant0

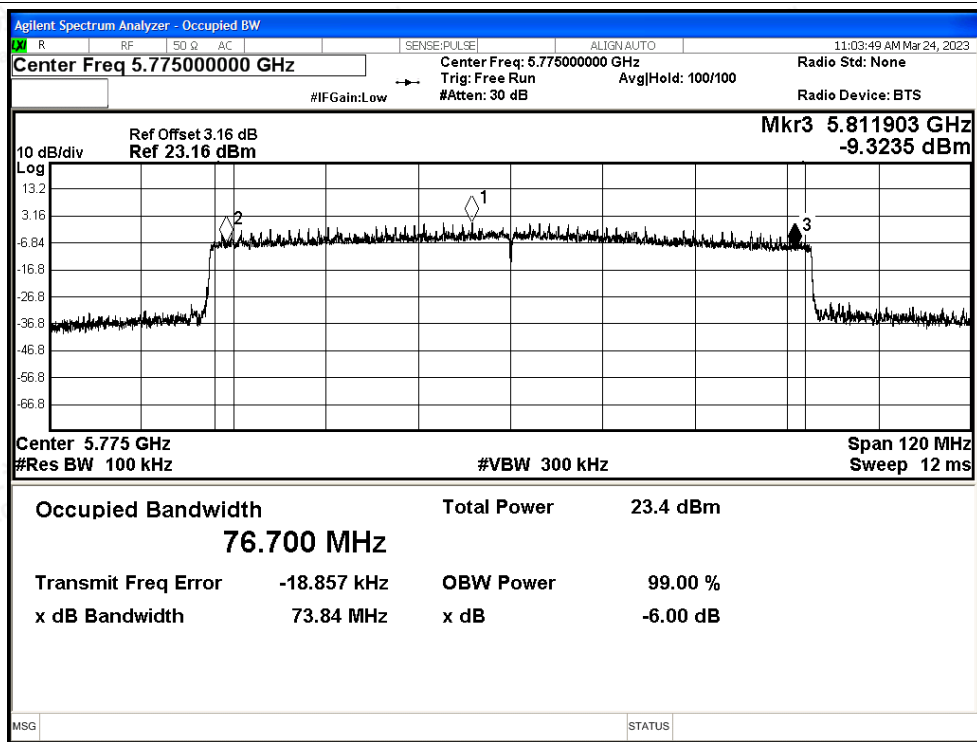




Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	15.778	>=0.5	Pass
NVNT	a	5785	Ant1	16.033	>=0.5	Pass
NVNT	a	5825	Ant1	16.309	>=0.5	Pass
NVNT	n20	5745	Ant1	17.567	>=0.5	Pass
NVNT	n20	5785	Ant1	17.572	>=0.5	Pass
NVNT	n20	5825	Ant1	17.165	>=0.5	Pass
NVNT	n40	5755	Ant1	35.1	>=0.5	Pass
NVNT	n40	5795	Ant1	35.115	>=0.5	Pass
NVNT	ac20	5745	Ant1	17.173	>=0.5	Pass
NVNT	ac20	5785	Ant1	17.537	>=0.5	Pass
NVNT	ac20	5825	Ant1	16.3	>=0.5	Pass
NVNT	ac40	5755	Ant1	35.096	>=0.5	Pass
NVNT	ac40	5795	Ant1	35.102	>=0.5	Pass
NVNT	ac80	5775	Ant1	75.108	>=0.5	Pass
NVNT	ax20	5745	Ant1	18.825	>=0.5	Pass
NVNT	ax20	5785	Ant1	17.887	>=0.5	Pass
NVNT	ax20	5825	Ant1	17.772	>=0.5	Pass
NVNT	ax40	5755	Ant1	35.978	>=0.5	Pass
NVNT	ax40	5795	Ant1	35.116	>=0.5	Pass
NVNT	ax80	5775	Ant1	75.098	>=0.5	Pass






Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1

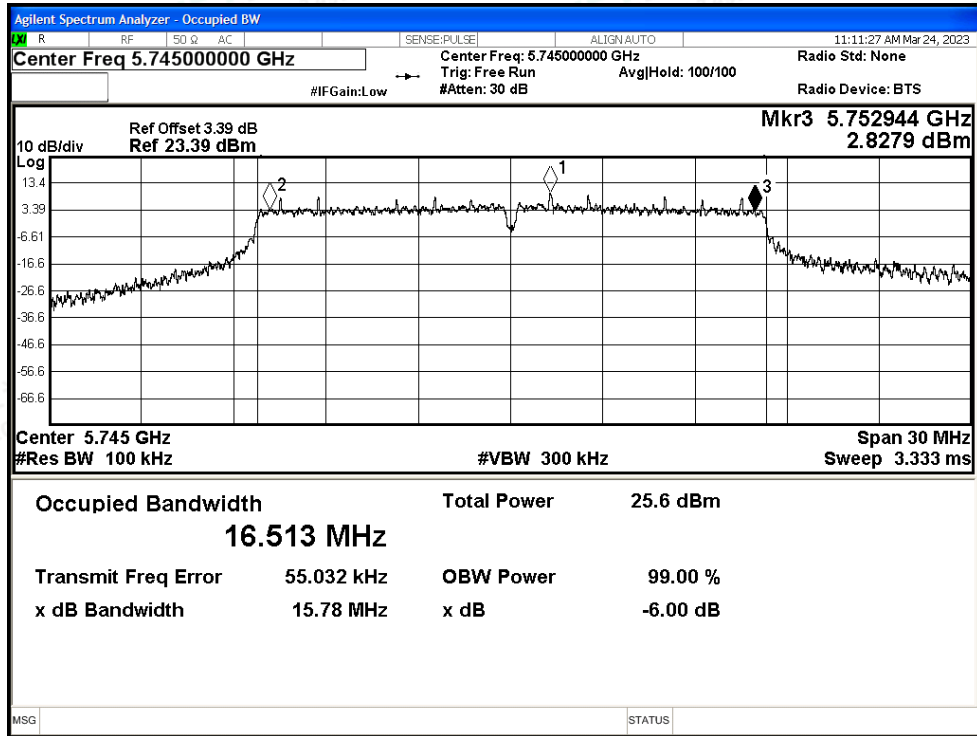


-6dB Bandwidth NVNT a 5785MHz Ant1

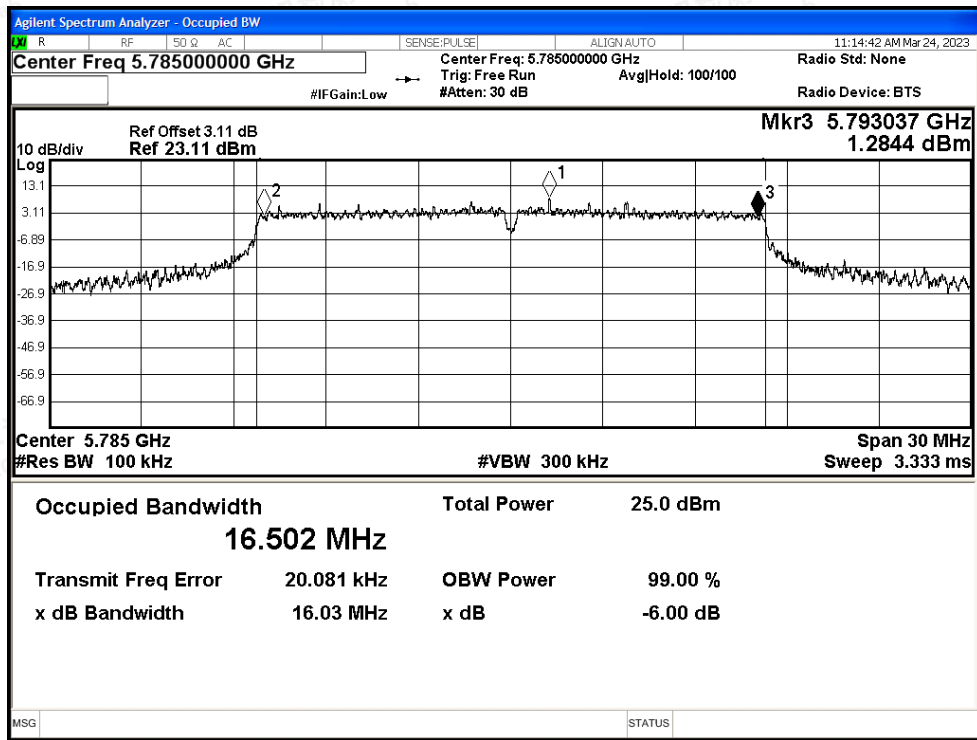




-6dB Bandwidth NVNT a 5825MHz Ant1

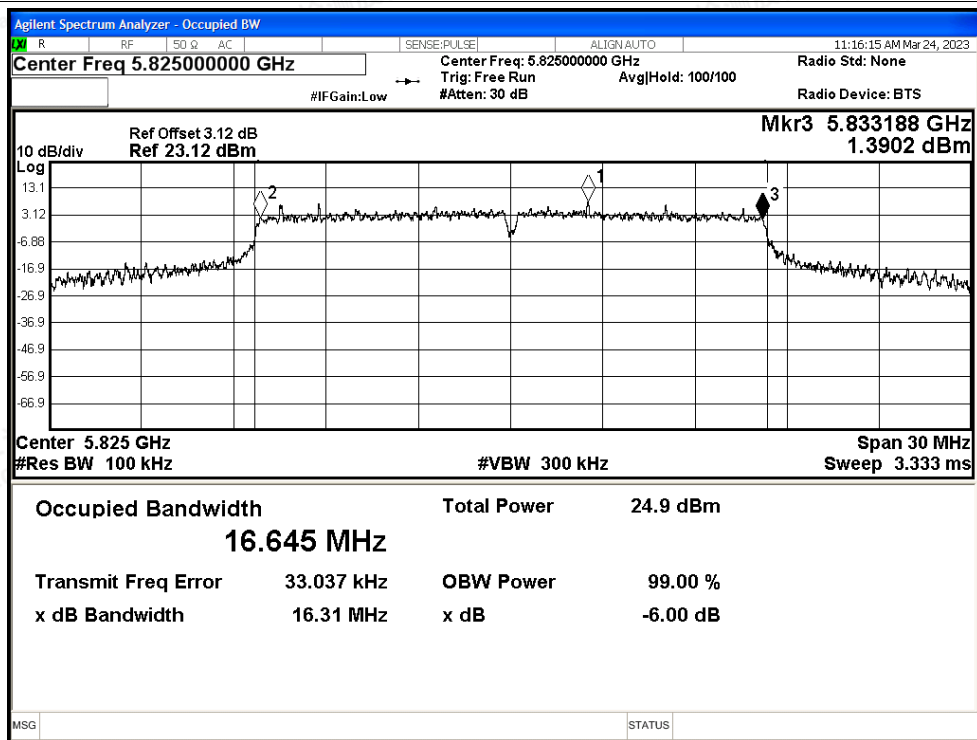


-6dB Bandwidth NVNT n20 5745MHz Ant1

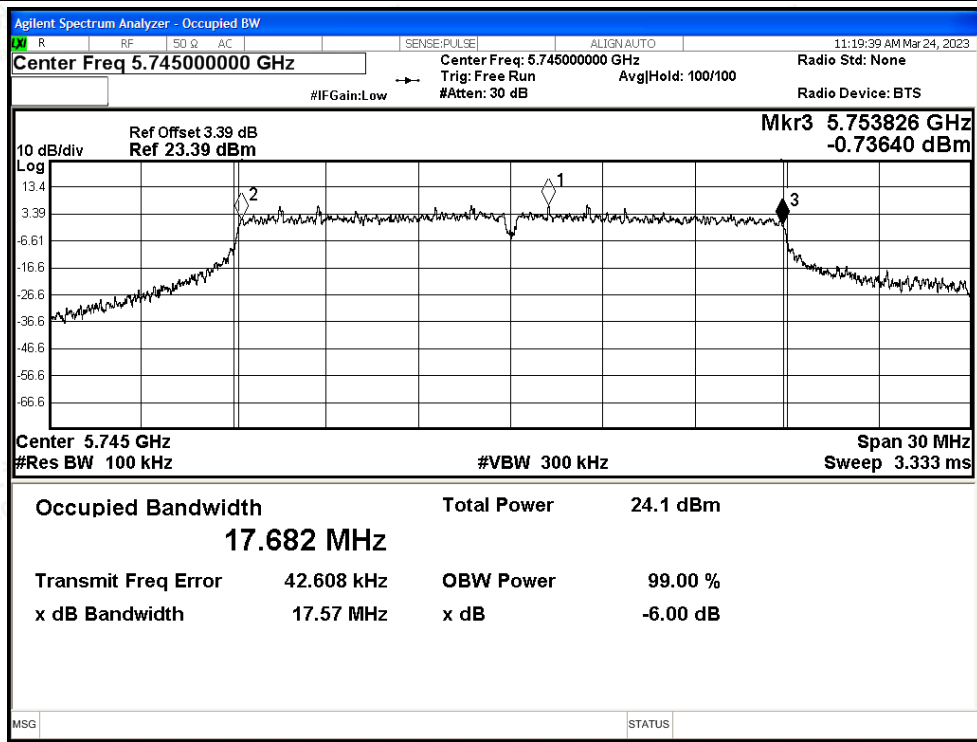




-6dB Bandwidth NVNT n20 5785MHz Ant1

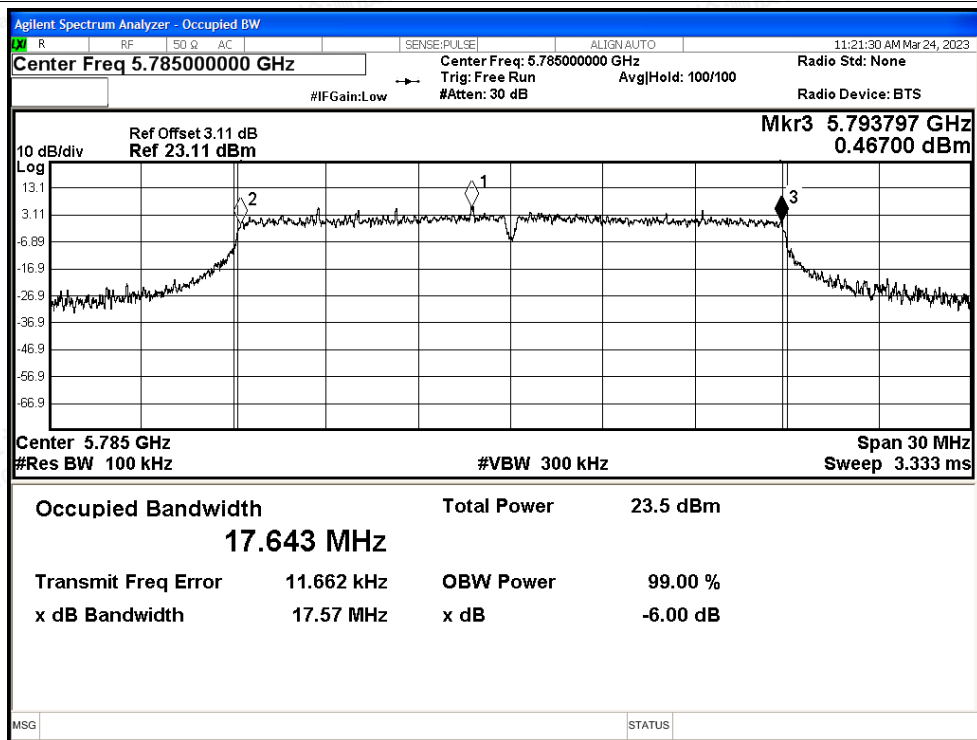


-6dB Bandwidth NVNT n20 5825MHz Ant1

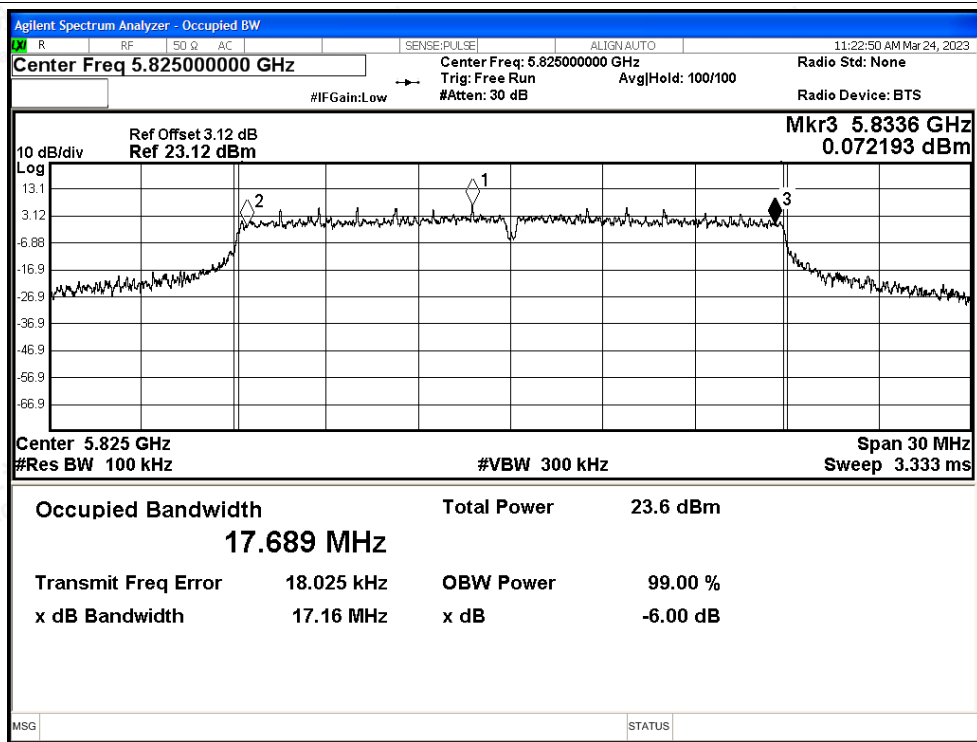




-6dB Bandwidth NVNT n40 5755MHz Ant1

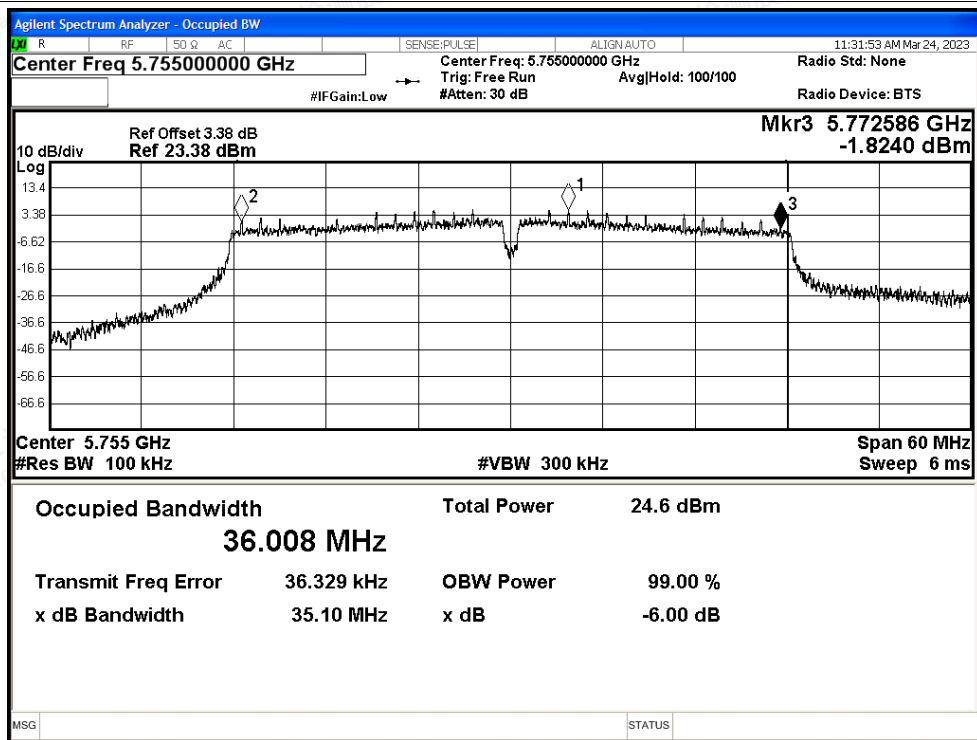


-6dB Bandwidth NVNT n40 5795MHz Ant1

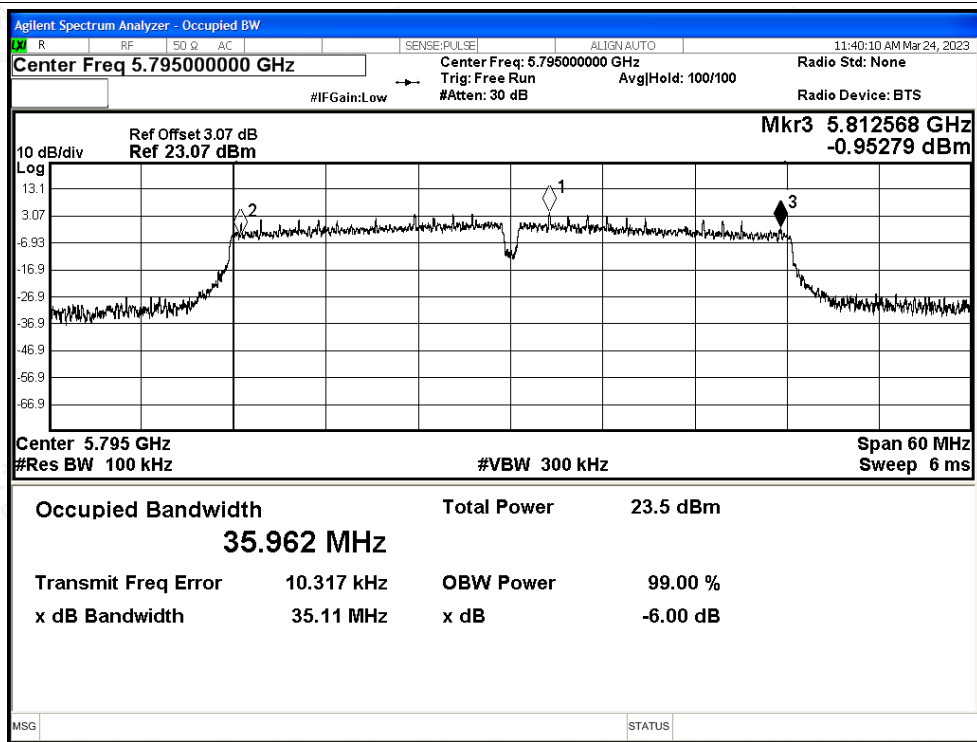






-6dB Bandwidth NVNT ac20 5745MHz Ant1

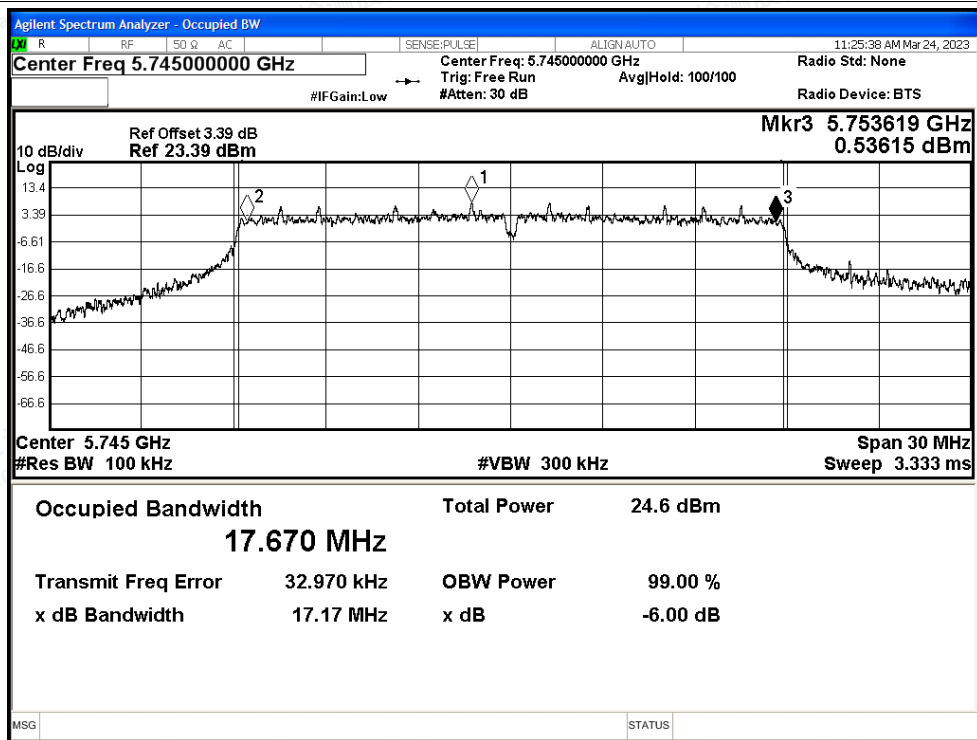


-6dB Bandwidth NVNT ac20 5785MHz Ant1

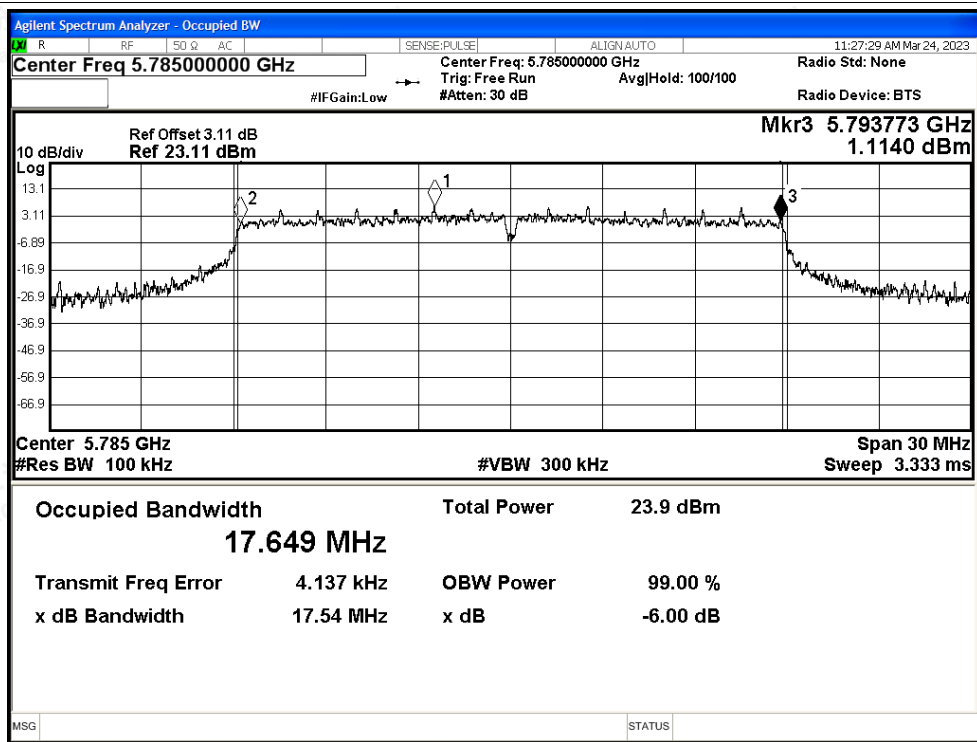

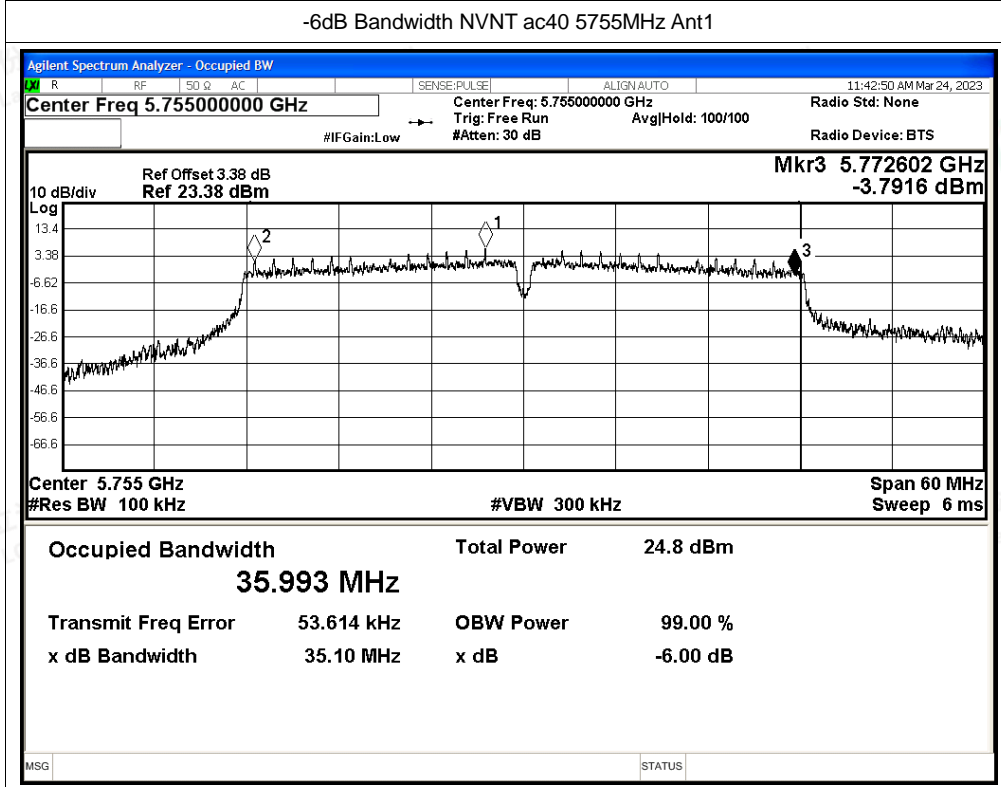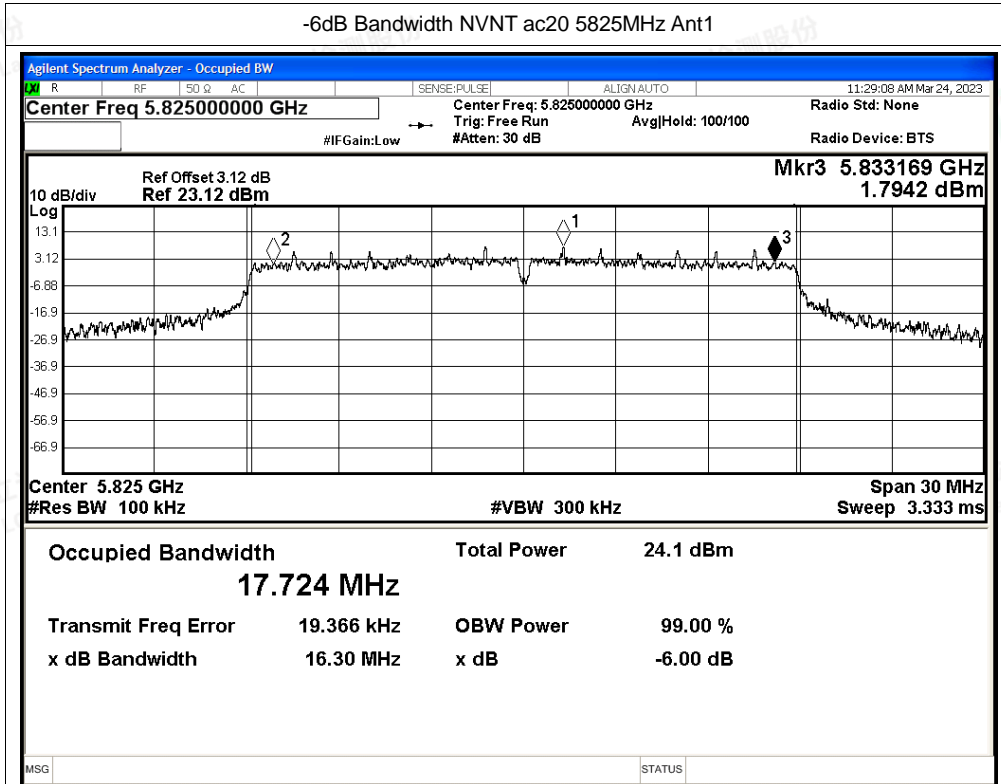








-6dB Bandwidth NVNT ac40 5795MHz Ant1

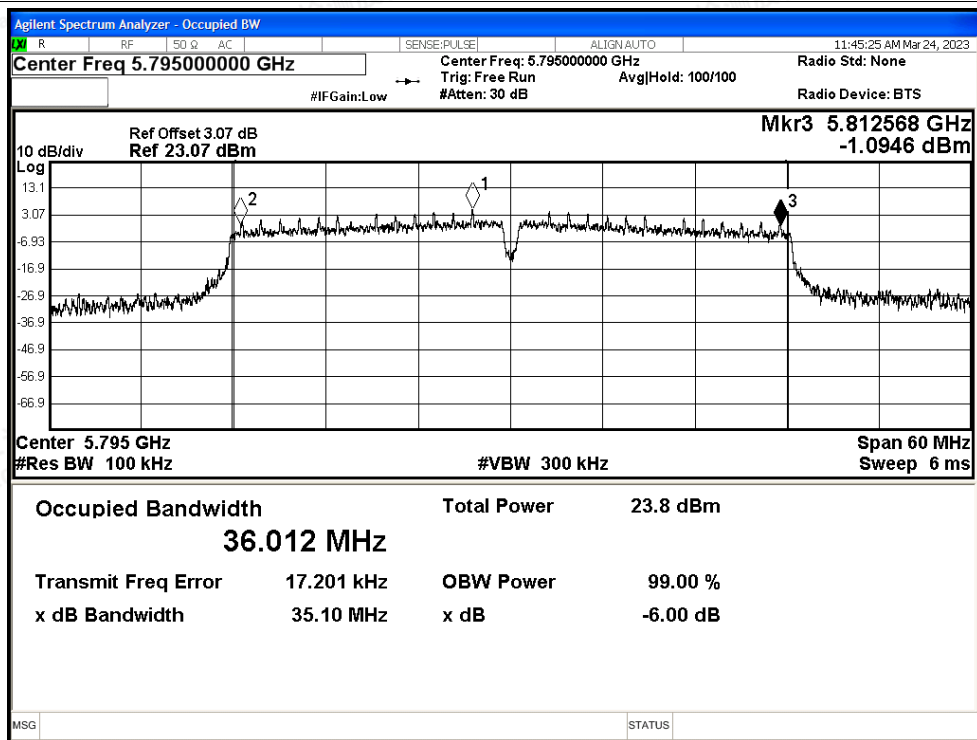

-6dB Bandwidth NVNT ac80 5775MHz Ant1

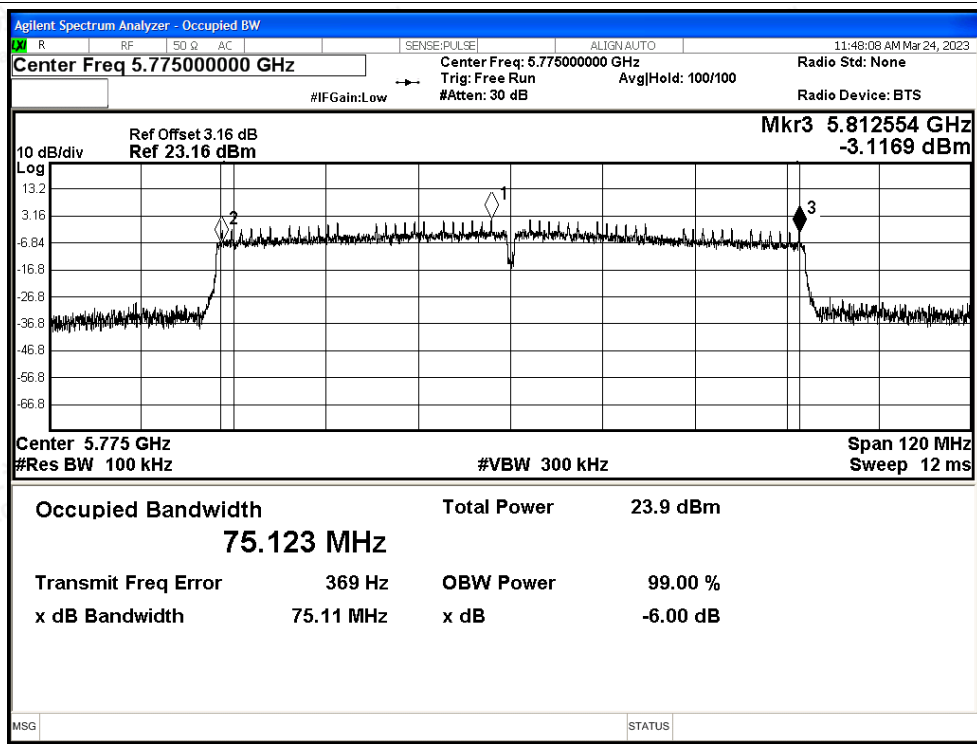


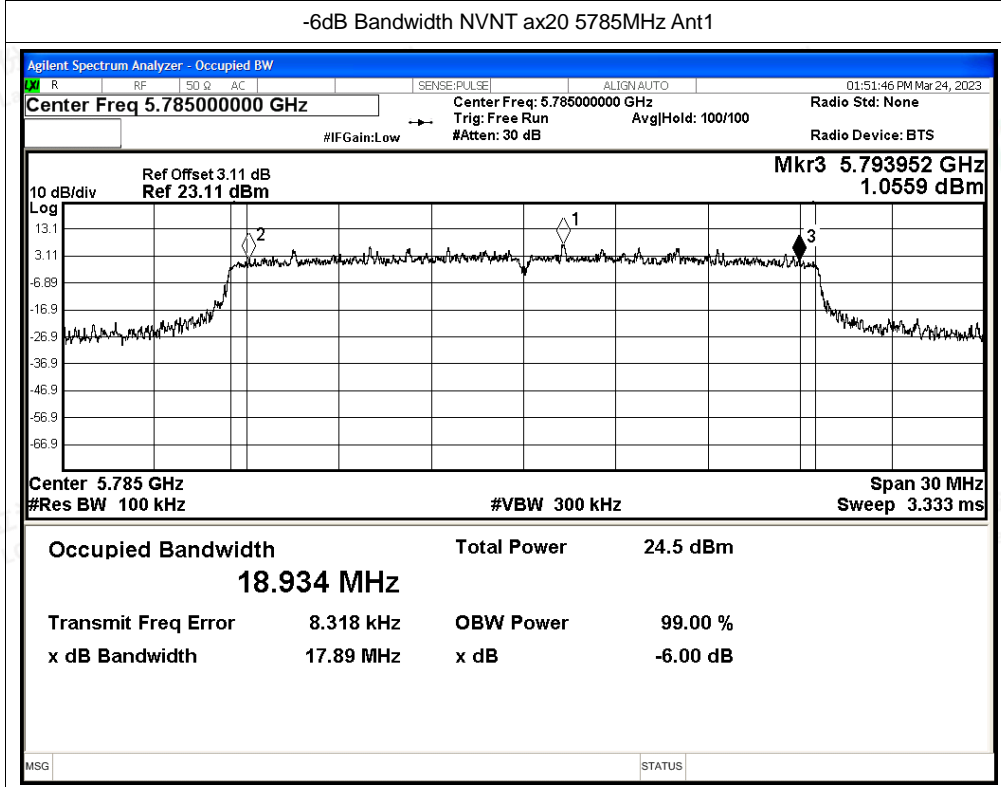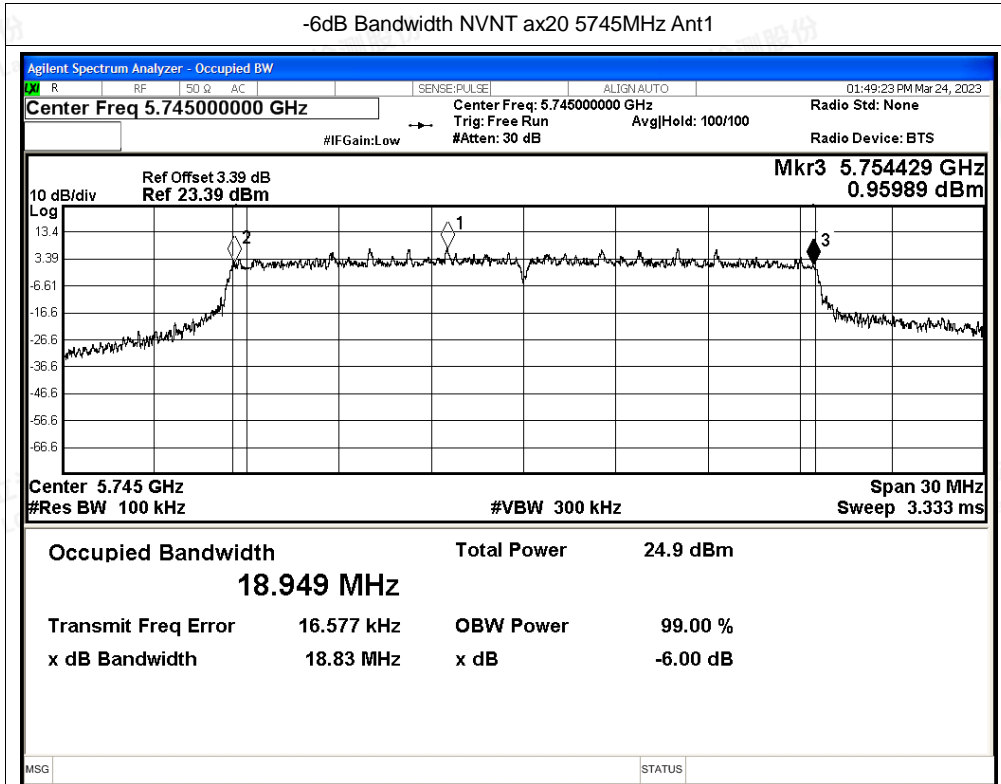

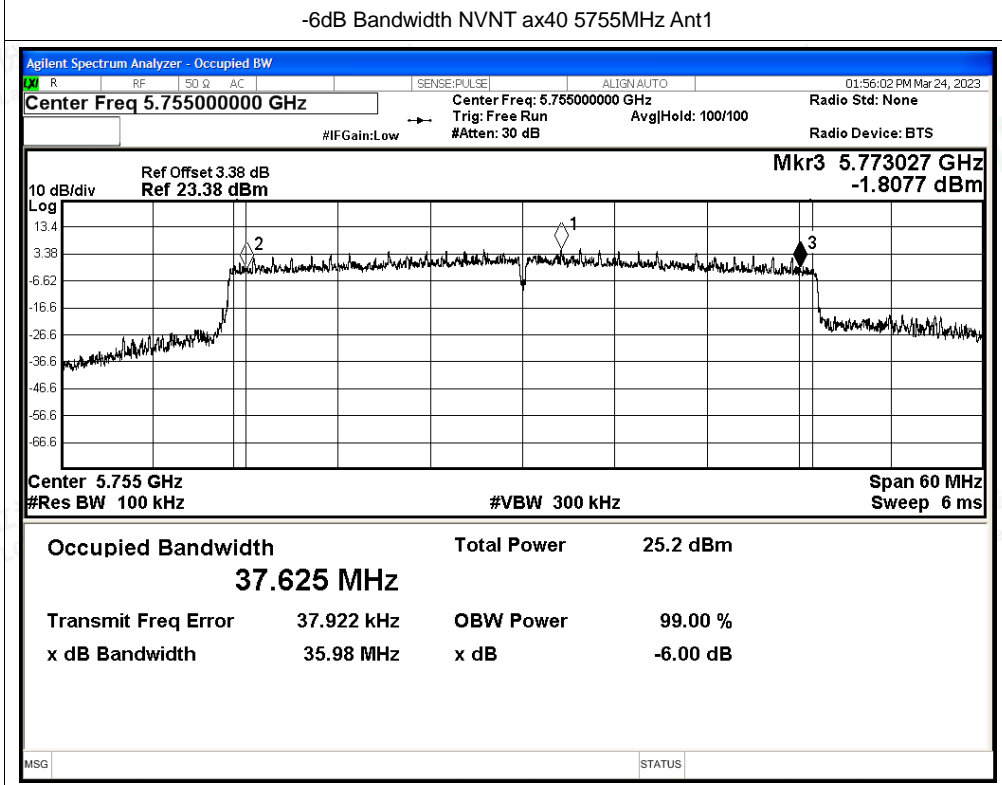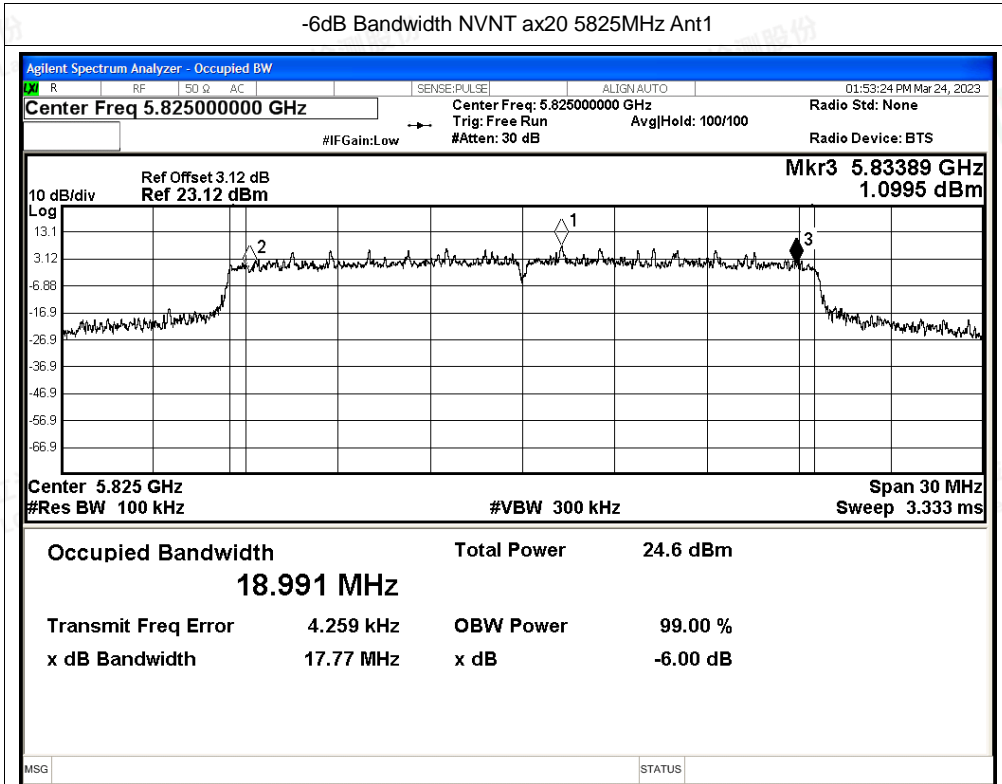




-6dB Bandwidth NVNT ax40 5795MHz Ant1

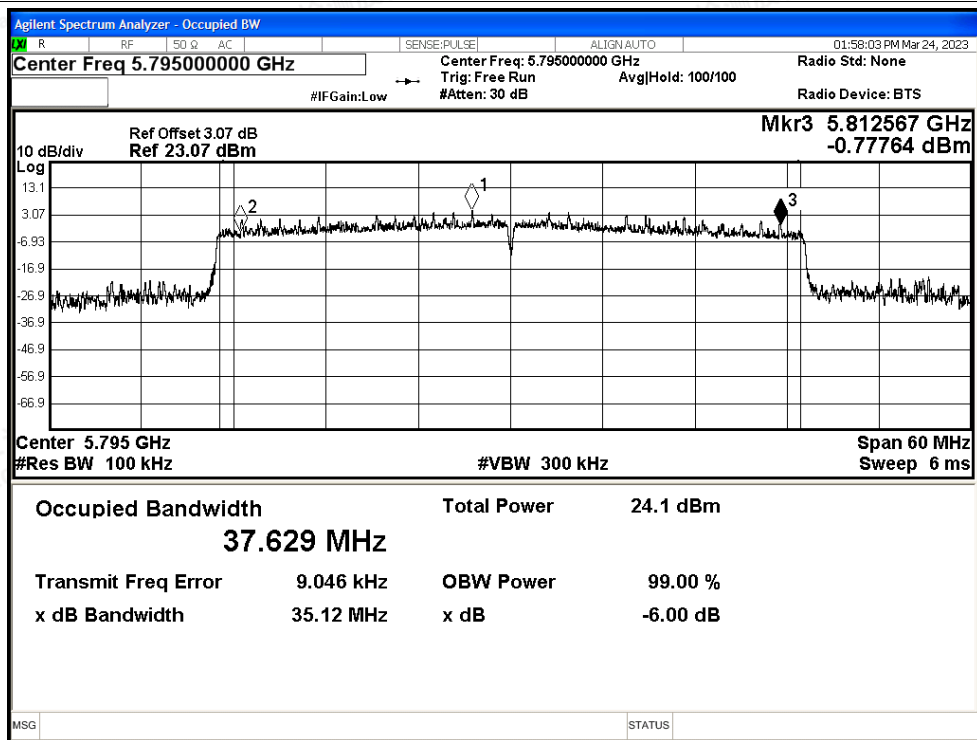

-6dB Bandwidth NVNT ax80 5775MHz Ant1

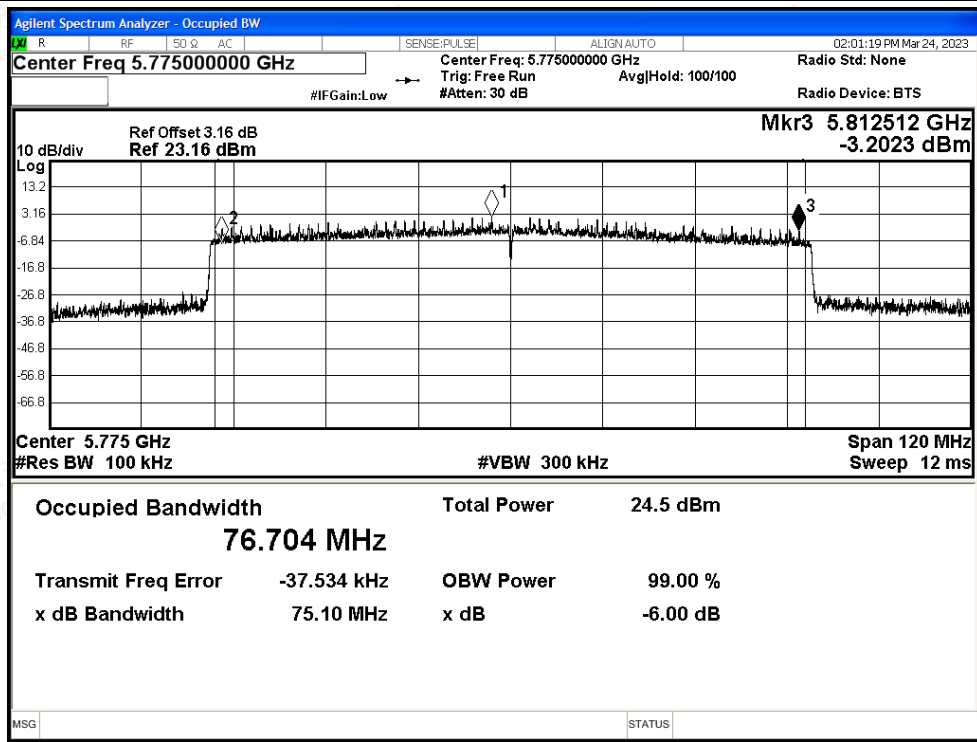




Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant2	16.271	>=0.5	Pass
NVNT	a	5785	Ant2	16.286	>=0.5	Pass
NVNT	a	5825	Ant2	16.296	>=0.5	Pass
NVNT	n20	5745	Ant2	17.466	>=0.5	Pass
NVNT	n20	5785	Ant2	17.308	>=0.5	Pass
NVNT	n20	5825	Ant2	17.27	>=0.5	Pass
NVNT	n40	5755	Ant2	35.113	>=0.5	Pass
NVNT	n40	5795	Ant2	35.008	>=0.5	Pass
NVNT	ac20	5745	Ant2	17.625	>=0.5	Pass
NVNT	ac20	5785	Ant2	17.566	>=0.5	Pass
NVNT	ac20	5825	Ant2	17.472	>=0.5	Pass
NVNT	ac40	5755	Ant2	33.868	>=0.5	Pass
NVNT	ac40	5795	Ant2	35.061	>=0.5	Pass
NVNT	ac80	5775	Ant2	73.862	>=0.5	Pass
NVNT	ax20	5745	Ant2	18.72	>=0.5	Pass
NVNT	ax20	5785	Ant2	18.671	>=0.5	Pass
NVNT	ax20	5825	Ant2	18.424	>=0.5	Pass
NVNT	ax40	5755	Ant2	35.086	>=0.5	Pass
NVNT	ax40	5795	Ant2	35.105	>=0.5	Pass
NVNT	ax80	5775	Ant2	75.895	>=0.5	Pass






Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant2

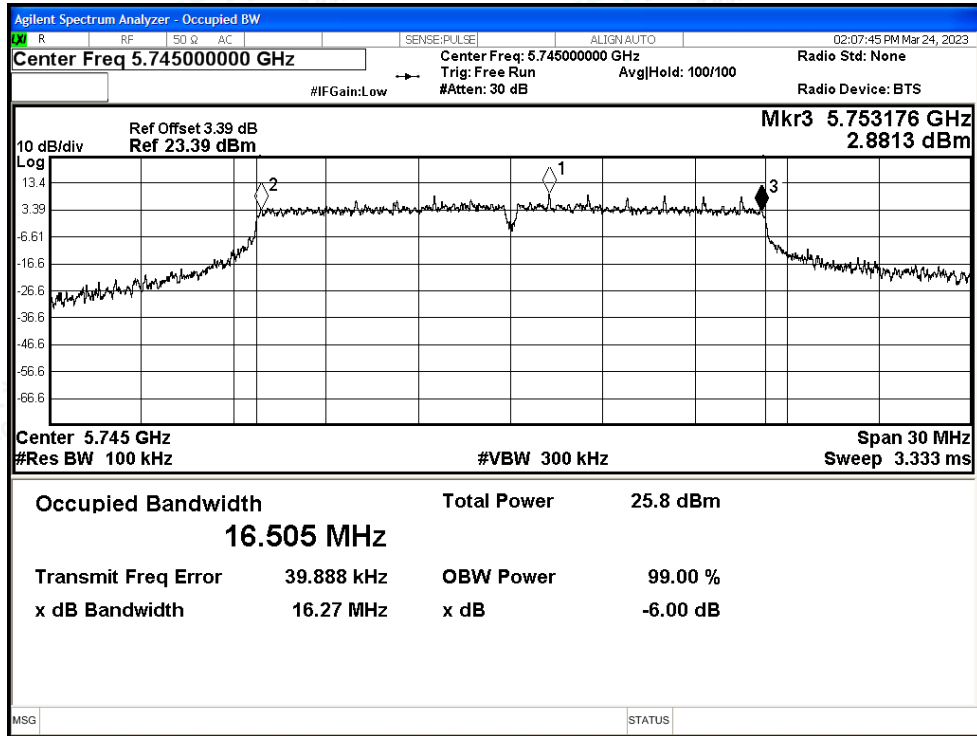


-6dB Bandwidth NVNT a 5785MHz Ant2

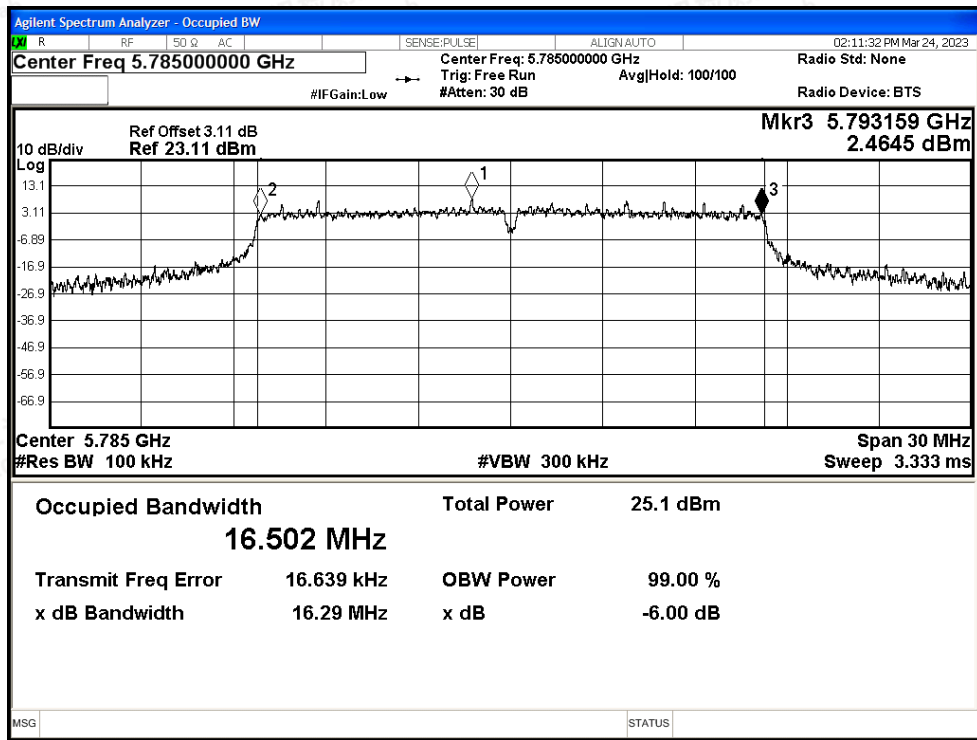




-6dB Bandwidth NVNT a 5825MHz Ant2

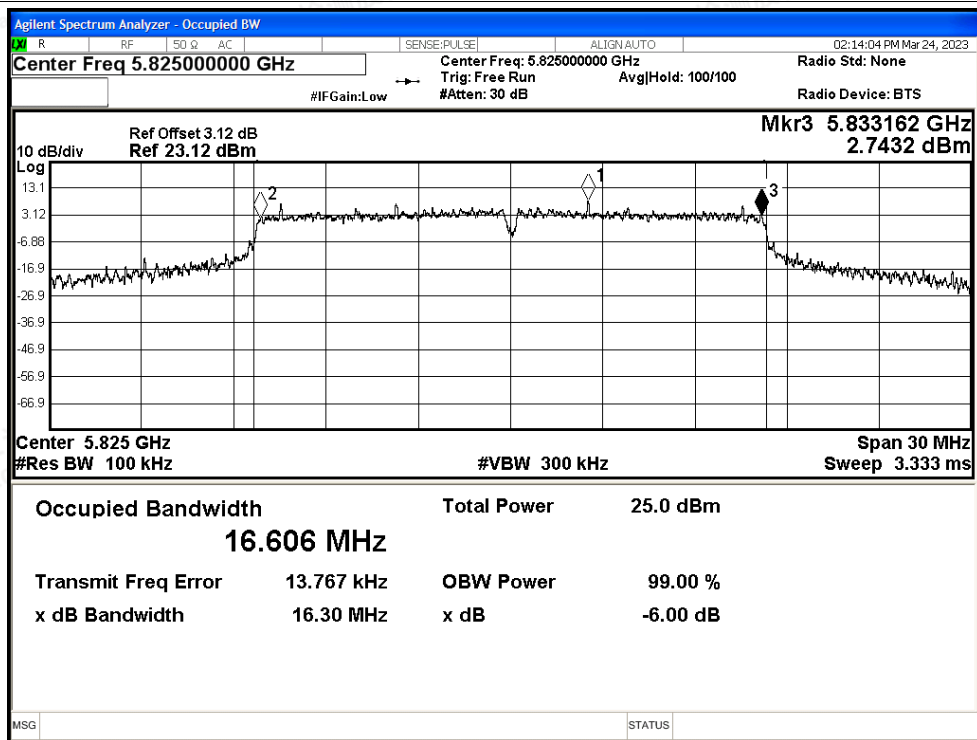


-6dB Bandwidth NVNT n20 5745MHz Ant2

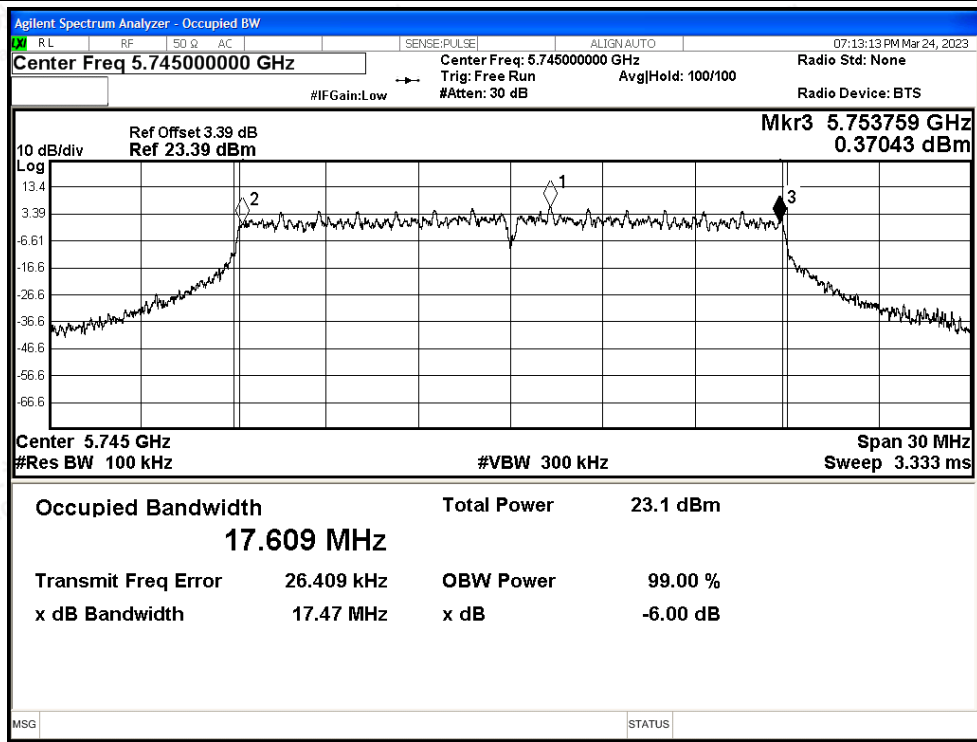




-6dB Bandwidth NVNT n20 5785MHz Ant2

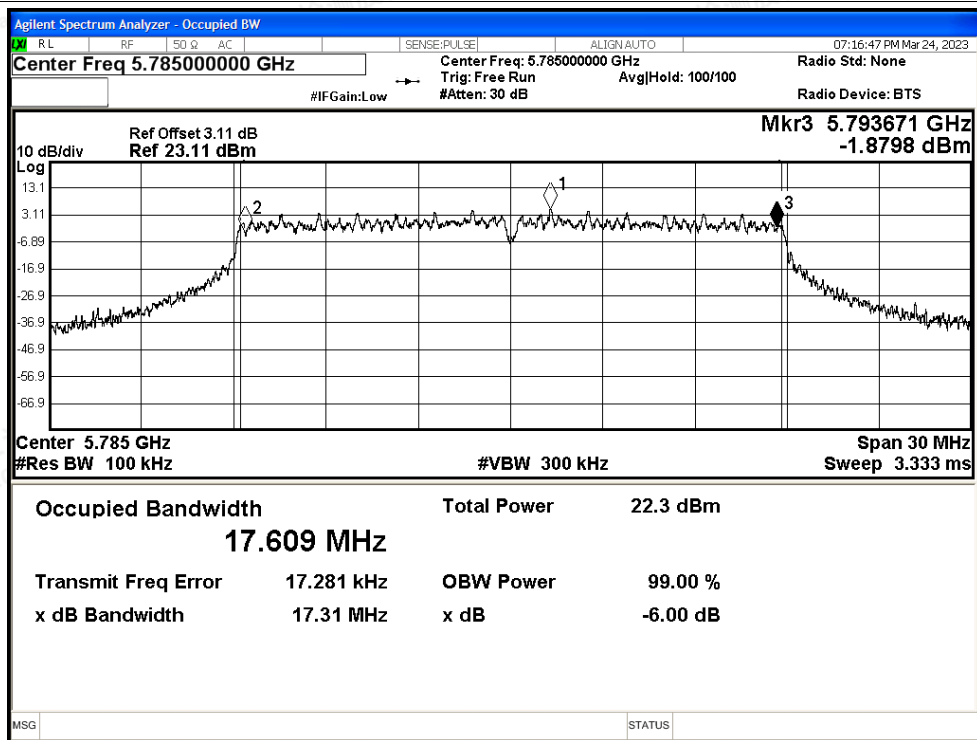


-6dB Bandwidth NVNT n20 5825MHz Ant2

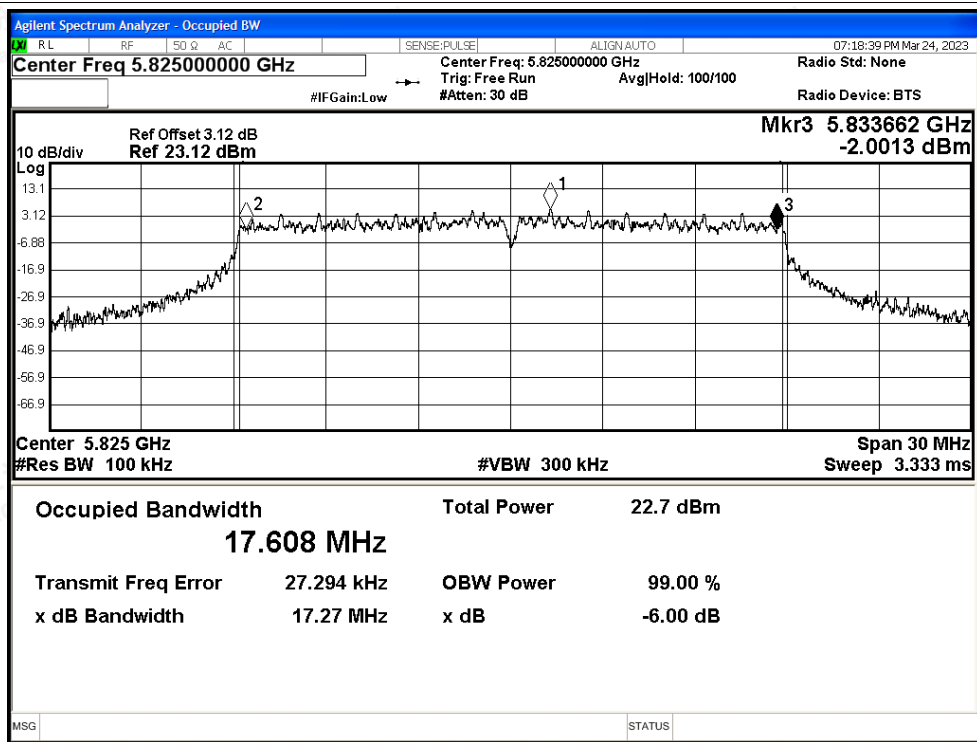






-6dB Bandwidth NVNT n40 5755MHz Ant2

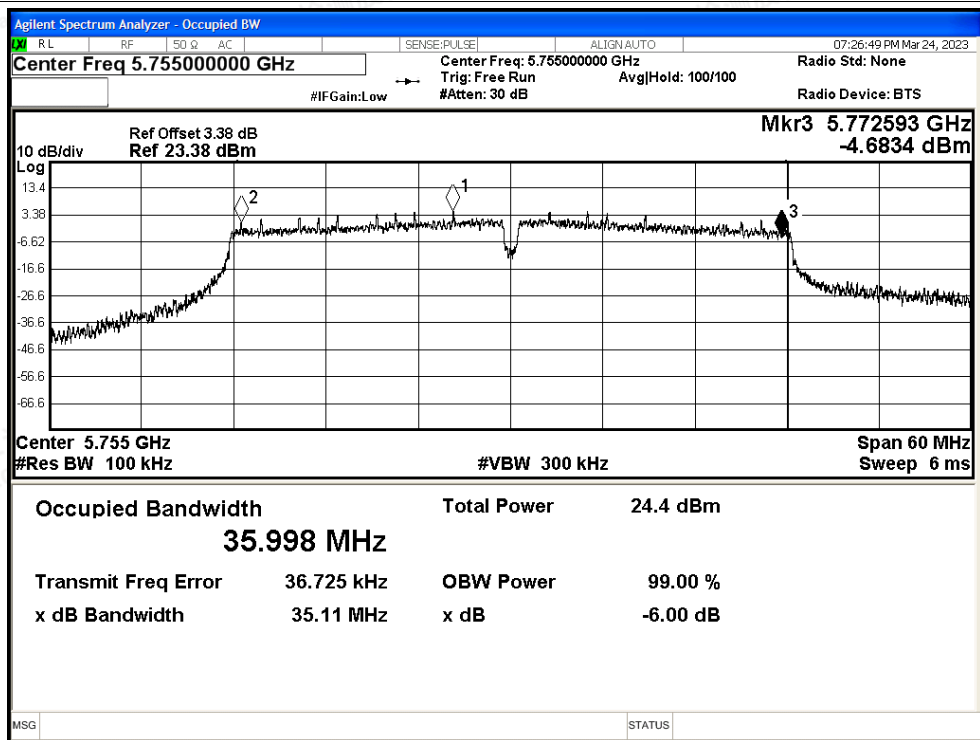


-6dB Bandwidth NVNT n40 5795MHz Ant2

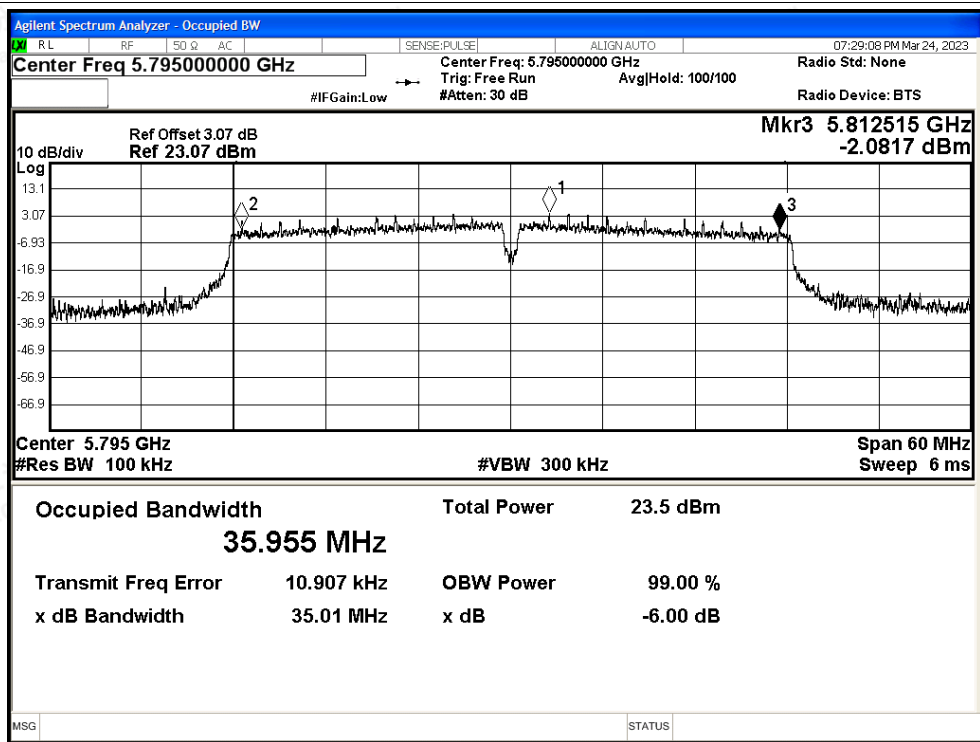

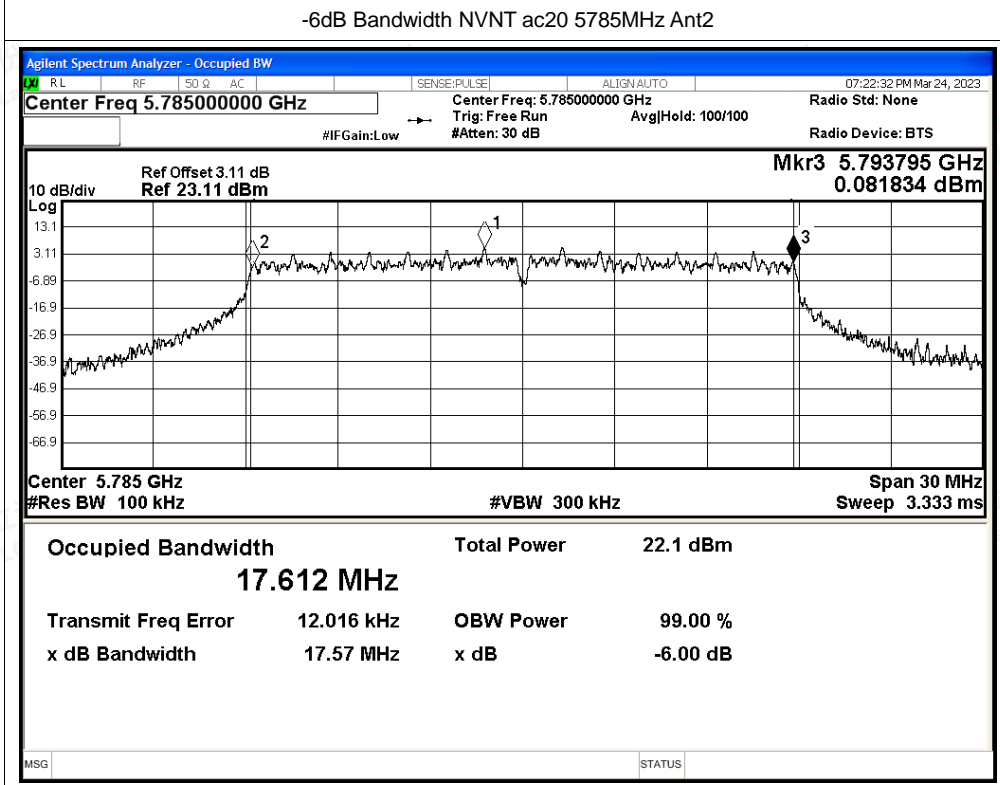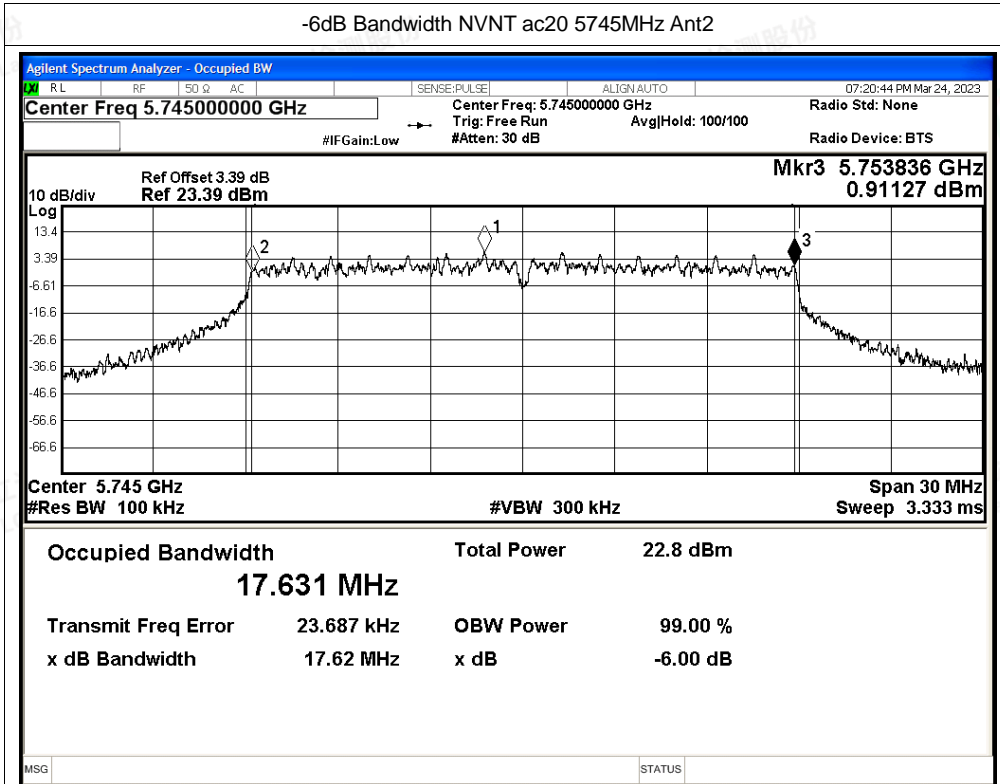




-6dB Bandwidth NVNT ac20 5825MHz Ant2

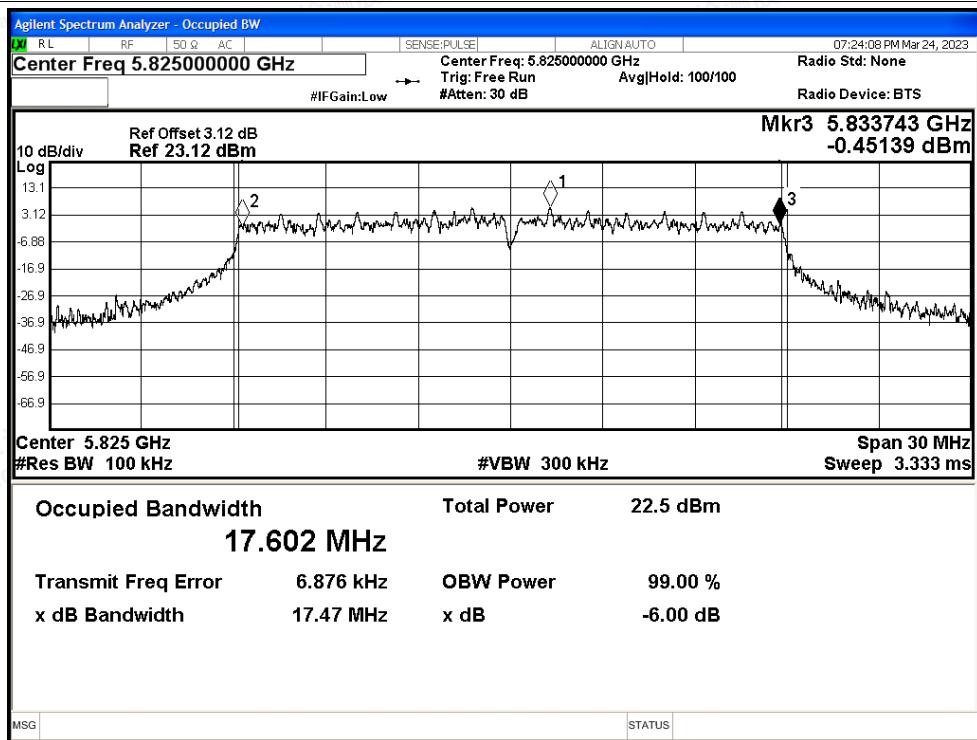


-6dB Bandwidth NVNT ac40 5755MHz Ant2

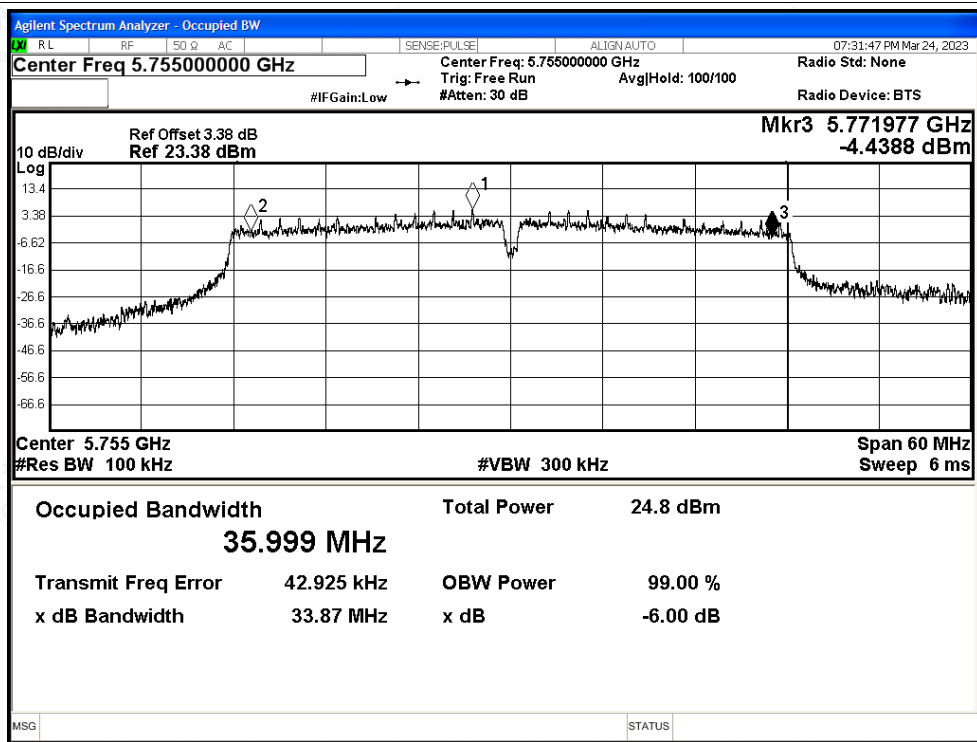




-6dB Bandwidth NVNT ac40 5795MHz Ant2

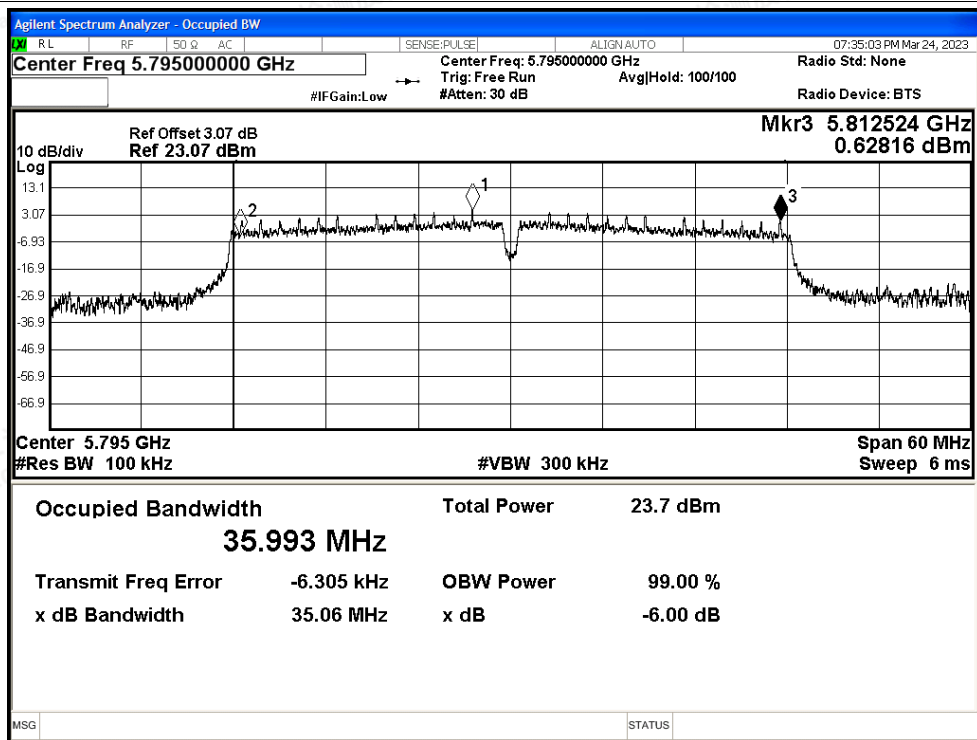


-6dB Bandwidth NVNT ac80 5775MHz Ant2

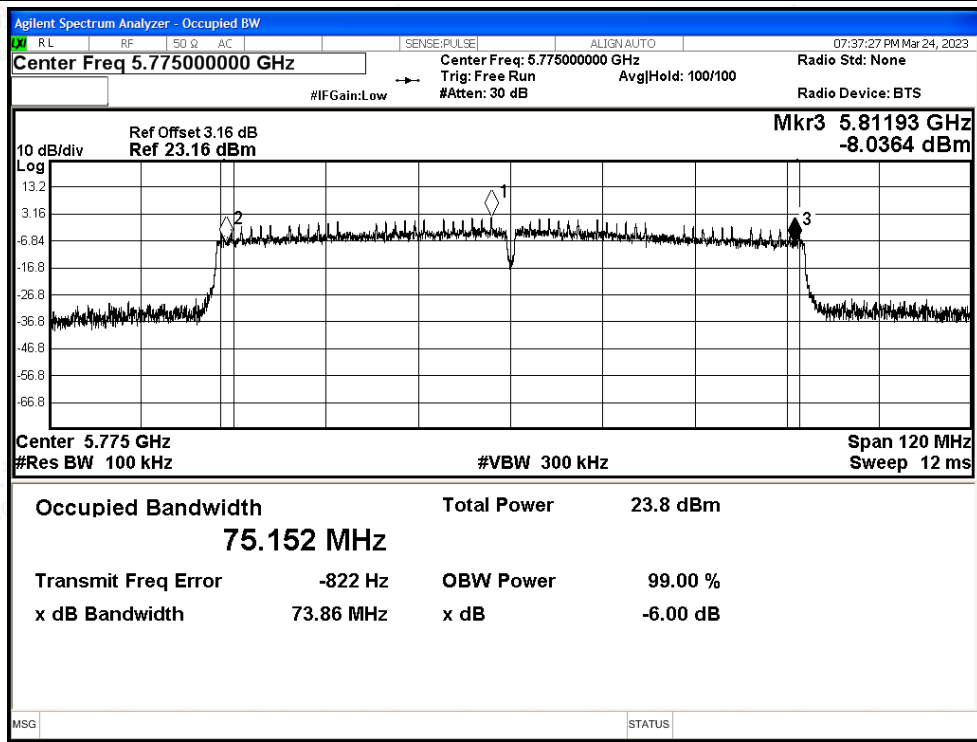




-6dB Bandwidth NVNT ax20 5745MHz Ant2

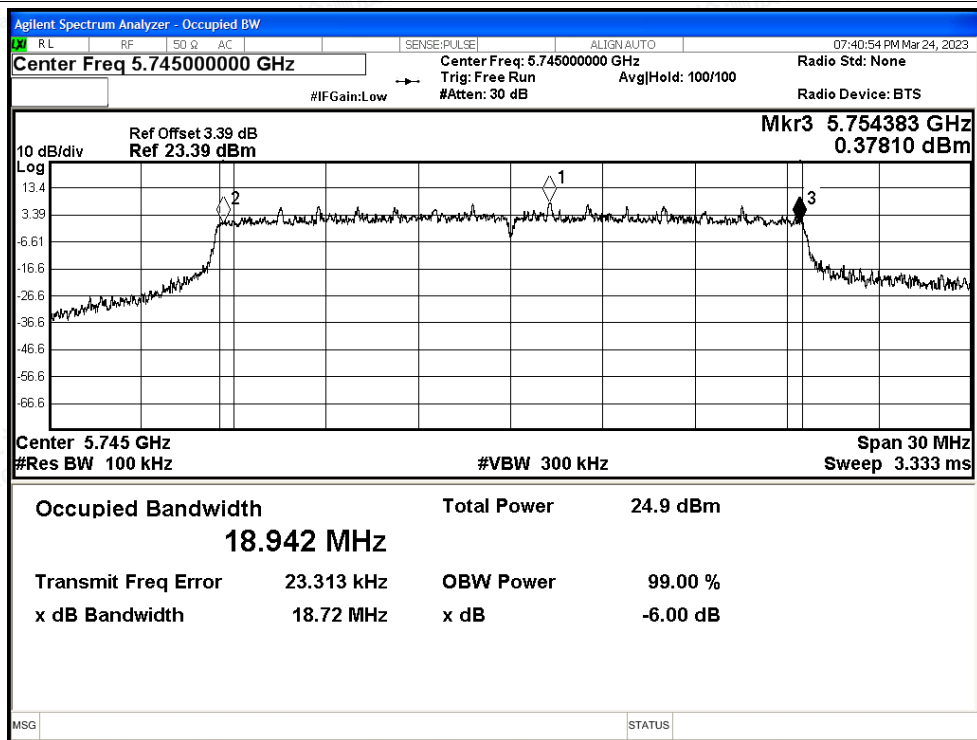


-6dB Bandwidth NVNT ax20 5785MHz Ant2

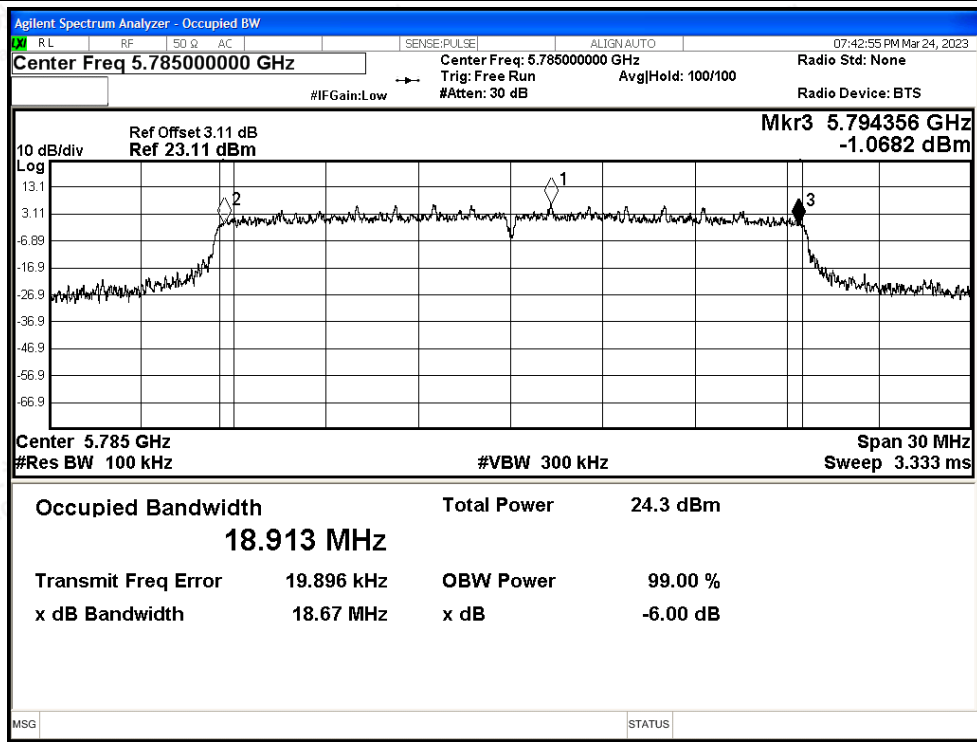




-6dB Bandwidth NVNT ax20 5825MHz Ant2

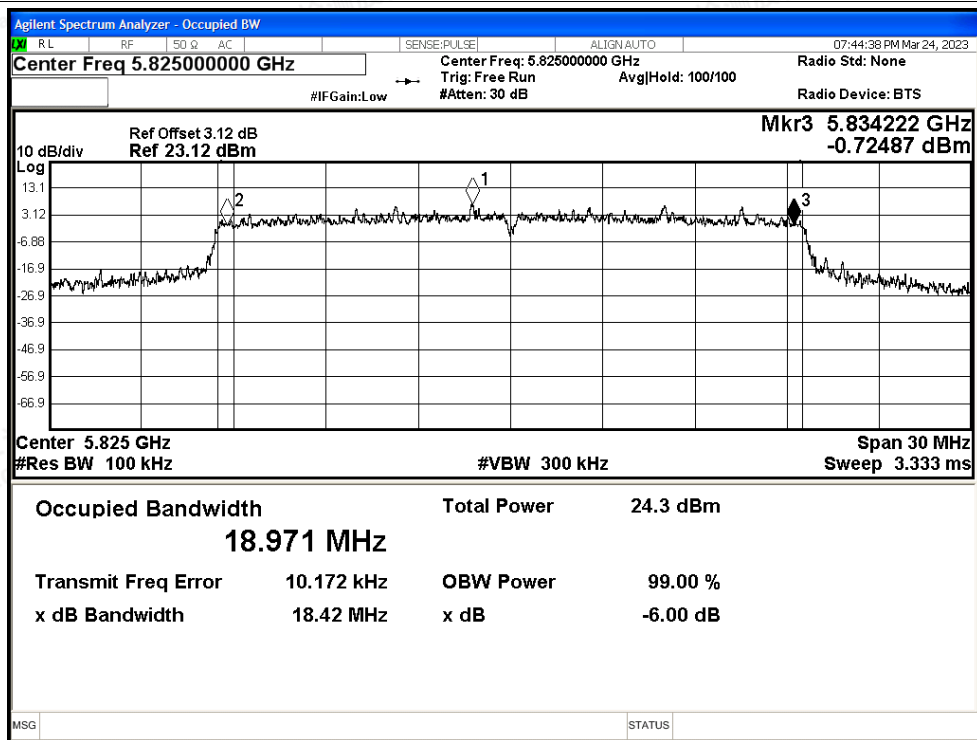


-6dB Bandwidth NVNT ax40 5755MHz Ant2

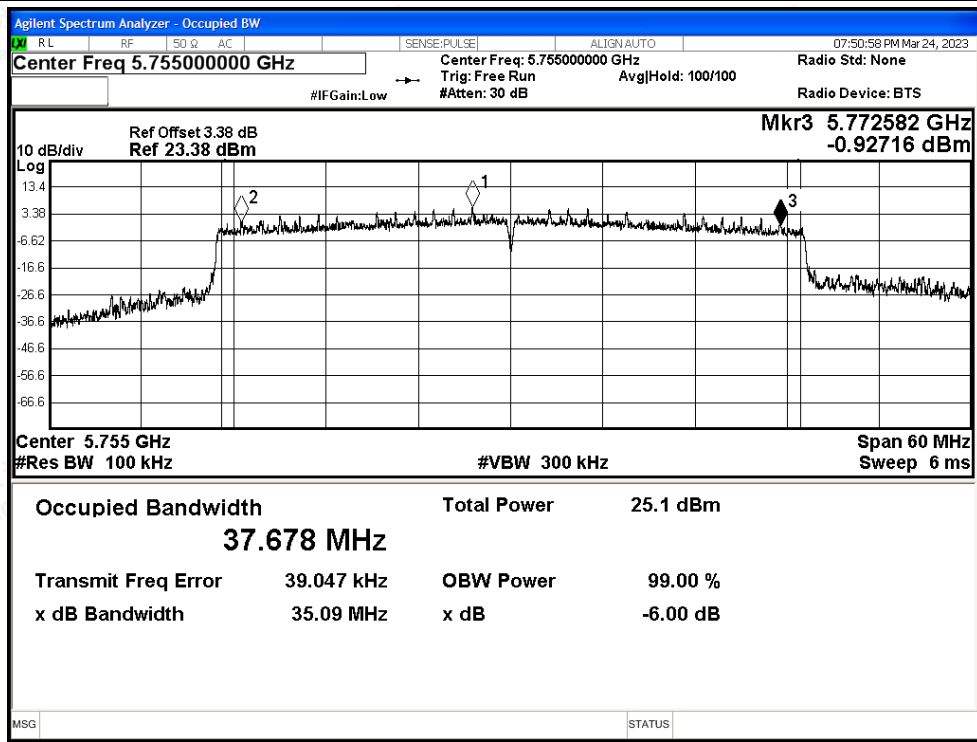




-6dB Bandwidth NVNT ax40 5795MHz Ant2

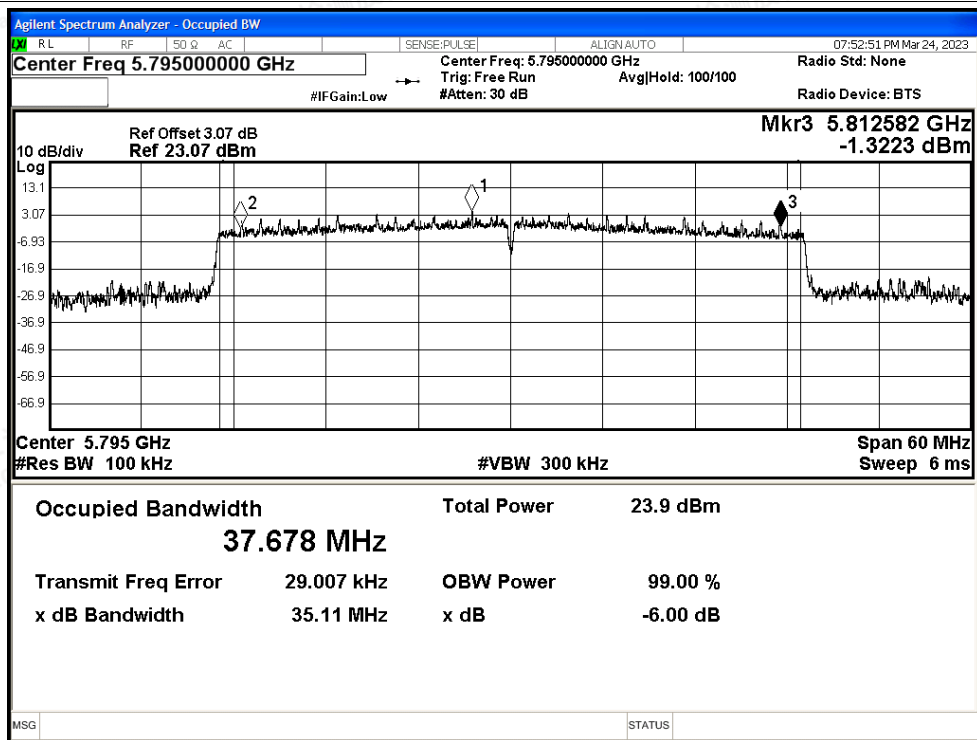

-6dB Bandwidth NVNT ax80 5775MHz Ant2

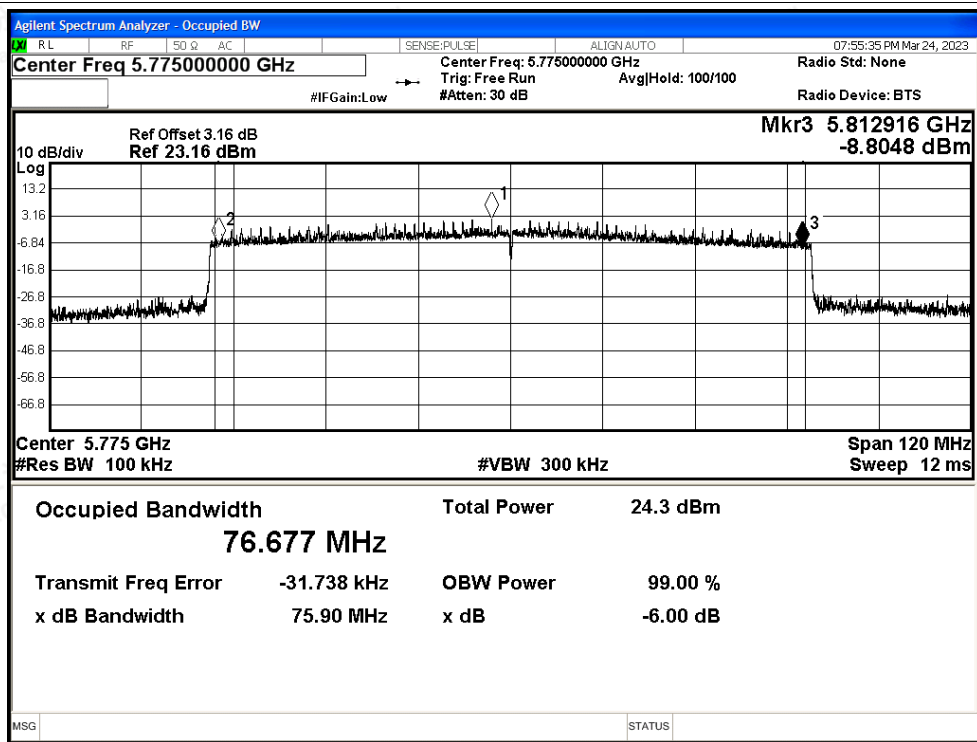



E.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant0	19.51	0.17	19.68	30	Pass
NVNT	a	5785	Ant0	18.99	0.17	19.16	30	Pass
NVNT	a	5825	Ant0	18.99	0.17	19.16	30	Pass
NVNT	n20	5745	Ant0	17.16	0.18	17.34	30	Pass
NVNT	n20	5785	Ant0	16.86	0.19	17.05	30	Pass
NVNT	n20	5825	Ant0	16.68	0.19	16.87	30	Pass
NVNT	n40	5755	Ant0	16.99	0.37	17.36	30	Pass
NVNT	n40	5795	Ant0	16.09	0.37	16.46	30	Pass
NVNT	ac20	5745	Ant0	17.03	0.48	17.51	30	Pass
NVNT	ac20	5785	Ant0	16.66	0.48	17.14	30	Pass
NVNT	ac20	5825	Ant0	16.64	0.49	17.13	30	Pass
NVNT	ac40	5755	Ant0	16.67	0.84	17.51	30	Pass
NVNT	ac40	5795	Ant0	15.68	0.84	16.52	30	Pass
NVNT	ac80	5775	Ant0	14.93	1.39	16.32	30	Pass
NVNT	ax20	5745	Ant0	17.07	0.49	17.56	30	Pass
NVNT	ax20	5785	Ant0	16.84	0.54	17.38	30	Pass
NVNT	ax20	5825	Ant0	16.72	0.53	17.25	30	Pass
NVNT	ax40	5755	Ant0	17.27	0.55	17.82	30	Pass
NVNT	ax40	5795	Ant0	16.29	0.54	16.83	30	Pass
NVNT	ax80	5775	Ant0	16.21	0.55	16.76	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	19.63	0.17	19.8	30	Pass
NVNT	a	5785	Ant1	19.02	0.17	19.19	30	Pass
NVNT	a	5825	Ant1	18.88	0.17	19.05	30	Pass
NVNT	n20	5745	Ant1	18.08	0.18	18.26	30	Pass
NVNT	n20	5785	Ant1	17.62	0.18	17.8	30	Pass
NVNT	n20	5825	Ant1	17.59	0.18	17.77	30	Pass
NVNT	n40	5755	Ant1	18.04	0.37	18.41	30	Pass
NVNT	n40	5795	Ant1	17.03	0.37	17.4	30	Pass
NVNT	ac20	5745	Ant1	17.94	0.49	18.43	30	Pass
NVNT	ac20	5785	Ant1	17.5	0.49	17.99	30	Pass
NVNT	ac20	5825	Ant1	17.55	0.49	18.04	30	Pass
NVNT	ac40	5755	Ant1	17.63	0.86	18.49	30	Pass
NVNT	ac40	5795	Ant1	16.63	0.84	17.47	30	Pass
NVNT	ac80	5775	Ant1	15.9	1.39	17.29	30	Pass
NVNT	ax20	5745	Ant1	18.23	0.53	18.76	30	Pass





NVNT	ax20	5785	Ant1	17.78	0.53	18.31	30	Pass
NVNT	ax20	5825	Ant1	17.75	0.53	18.28	30	Pass
NVNT	ax40	5755	Ant1	18.37	0.54	18.91	30	Pass
NVNT	ax40	5795	Ant1	17.18	0.54	17.72	30	Pass
NVNT	ax80	5775	Ant1	17.21	0.55	17.76	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant2	19.77	0.17	19.94	30	Pass
NVNT	a	5785	Ant2	19.13	0.17	19.3	30	Pass
NVNT	a	5825	Ant2	19.05	0.17	19.22	30	Pass
NVNT	n20	5745	Ant2	15.15	1.35	16.5	30	Pass
NVNT	n20	5785	Ant2	14.47	1.38	15.85	30	Pass
NVNT	n20	5825	Ant2	14.71	1.35	16.06	30	Pass
NVNT	n40	5755	Ant2	17.94	0.37	18.31	30	Pass
NVNT	n40	5795	Ant2	16.9	0.37	17.27	30	Pass
NVNT	ac20	5745	Ant2	14.6	2.02	16.62	30	Pass
NVNT	ac20	5785	Ant2	13.92	2.02	15.94	30	Pass
NVNT	ac20	5825	Ant2	14.32	1.98	16.3	30	Pass
NVNT	ac40	5755	Ant2	17.61	0.84	18.45	30	Pass
NVNT	ac40	5795	Ant2	16.55	0.86	17.41	30	Pass
NVNT	ac80	5775	Ant2	15.89	1.39	17.28	30	Pass
NVNT	ax20	5745	Ant2	18.2	0.53	18.73	30	Pass
NVNT	ax20	5785	Ant2	17.61	0.54	18.15	30	Pass
NVNT	ax20	5825	Ant2	17.59	0.53	18.12	30	Pass
NVNT	ax40	5755	Ant2	18.21	0.55	18.76	30	Pass
NVNT	ax40	5795	Ant2	17.1	0.54	17.64	30	Pass
NVNT	ax80	5775	Ant2	17.07	0.56	17.63	30	Pass





MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)				Limit (dBm)	Verdict
			Ant0	Ant1	Ant2	Ant0+Ant1+Ant2		
NVNT	n20	5745	17.34	18.26	16.5	22.20	26.96	Pass
NVNT	n20	5785	17.05	17.8	15.85	21.74	26.96	Pass
NVNT	n20	5825	16.87	17.77	16.06	21.73	26.96	Pass
NVNT	n40	5755	17.36	18.41	18.31	22.82	26.96	Pass
NVNT	n40	5795	16.46	17.4	17.27	21.83	26.96	Pass
NVNT	ac20	5745	17.51	18.43	16.62	22.35	26.96	Pass
NVNT	ac20	5785	17.14	17.99	15.94	21.87	26.96	Pass
NVNT	ac20	5825	17.13	18.04	16.3	21.99	26.96	Pass
NVNT	ac40	5755	17.51	18.49	18.45	22.94	26.96	Pass
NVNT	ac40	5795	16.52	17.47	17.41	21.93	26.96	Pass
NVNT	ac80	5775	16.32	17.29	17.28	21.76	26.96	Pass
NVNT	ax20	5745	17.56	18.76	18.73	23.16	26.96	Pass
NVNT	ax20	5785	17.38	18.31	18.15	22.74	26.96	Pass
NVNT	ax20	5825	17.25	18.28	18.12	22.68	26.96	Pass
NVNT	ax40	5755	17.82	18.91	18.76	23.29	26.96	Pass
NVNT	ax40	5795	16.83	17.72	17.64	22.19	26.96	Pass
NVNT	ax80	5775	16.76	17.76	17.63	22.18	26.96	Pass





E.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant0	4.83	0.17	5	30	Pass
NVNT	a	5785	Ant0	3.62	0.17	3.79	30	Pass
NVNT	a	5825	Ant0	2.72	0.17	2.89	30	Pass
NVNT	n20	5745	Ant0	0.66	0.18	0.84	30	Pass
NVNT	n20	5785	Ant0	0.37	0.19	0.56	30	Pass
NVNT	n20	5825	Ant0	1.41	0.19	1.6	30	Pass
NVNT	n40	5755	Ant0	-3.16	0.37	-2.79	30	Pass
NVNT	n40	5795	Ant0	-4.33	0.37	-3.96	30	Pass
NVNT	ac20	5745	Ant0	-2.22	0.48	-1.74	30	Pass
NVNT	ac20	5785	Ant0	-3.35	0.48	-2.87	30	Pass
NVNT	ac20	5825	Ant0	-1.69	0.49	-1.2	30	Pass
NVNT	ac40	5755	Ant0	-9.11	0.84	-8.27	30	Pass
NVNT	ac40	5795	Ant0	-9.64	0.84	-8.8	30	Pass
NVNT	ac80	5775	Ant0	-17.41	1.39	-16.02	30	Pass
NVNT	ax20	5745	Ant0	-1.73	0.49	-1.24	30	Pass
NVNT	ax20	5785	Ant0	-2.95	0.54	-2.41	30	Pass
NVNT	ax20	5825	Ant0	-1.69	0.53	-1.16	30	Pass
NVNT	ax40	5755	Ant0	-3.87	0.55	-3.32	30	Pass
NVNT	ax40	5795	Ant0	-5	0.54	-4.46	30	Pass
NVNT	ax80	5775	Ant0	-8.57	0.55	-8.02	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	2.87	0.17	3.04	30	Pass
NVNT	a	5785	Ant1	2.12	0.17	2.29	30	Pass
NVNT	a	5825	Ant1	3.3	0.17	3.47	30	Pass
NVNT	n20	5745	Ant1	1.98	0.18	2.16	30	Pass
NVNT	n20	5785	Ant1	2.06	0.18	2.24	30	Pass
NVNT	n20	5825	Ant1	2.63	0.18	2.81	30	Pass
NVNT	n40	5755	Ant1	-1.56	0.37	-1.19	30	Pass
NVNT	n40	5795	Ant1	-4.08	0.37	-3.71	30	Pass
NVNT	ac20	5745	Ant1	-1.21	0.49	-0.72	30	Pass
NVNT	ac20	5785	Ant1	-2.32	0.49	-1.83	30	Pass
NVNT	ac20	5825	Ant1	-1.11	0.49	-0.62	30	Pass
NVNT	ac40	5755	Ant1	-7.26	0.86	-6.4	30	Pass
NVNT	ac40	5795	Ant1	-7.31	0.84	-6.47	30	Pass
NVNT	ac80	5775	Ant1	-16.35	1.39	-14.96	30	Pass
NVNT	ax20	5745	Ant1	0.5	0.53	1.03	30	Pass
NVNT	ax20	5785	Ant1	0.08	0.53	0.61	30	Pass
NVNT	ax20	5825	Ant1	-2.04	0.53	-1.51	30	Pass





NVNT	ax40	5755	Ant1	-4.01	0.54	-3.47	30	Pass
NVNT	ax40	5795	Ant1	-6.34	0.54	-5.8	30	Pass
NVNT	ax80	5775	Ant1	-6.28	0.55	-5.73	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant2	3.57	0.17	3.74	30	Pass
NVNT	a	5785	Ant2	2.44	0.17	2.61	30	Pass
NVNT	a	5825	Ant2	3.15	0.17	3.32	30	Pass
NVNT	n20	5745	Ant2	-11.41	1.35	-10.06	30	Pass
NVNT	n20	5785	Ant2	-12.9	1.38	-11.52	30	Pass
NVNT	n20	5825	Ant2	-12	1.35	-10.65	30	Pass
NVNT	n40	5755	Ant2	-1.48	0.37	-1.11	30	Pass
NVNT	n40	5795	Ant2	-3.12	0.37	-2.75	30	Pass
NVNT	ac20	5745	Ant2	-17.45	2.02	-15.43	30	Pass
NVNT	ac20	5785	Ant2	-16.54	2.02	-14.52	30	Pass
NVNT	ac20	5825	Ant2	-15.72	1.98	-13.74	30	Pass
NVNT	ac40	5755	Ant2	-6.73	0.84	-5.89	30	Pass
NVNT	ac40	5795	Ant2	-7.23	0.86	-6.37	30	Pass
NVNT	ac80	5775	Ant2	-16.2	1.39	-14.81	30	Pass
NVNT	ax20	5745	Ant2	-1.7	0.53	-1.17	30	Pass
NVNT	ax20	5785	Ant2	-1.08	0.54	-0.54	30	Pass
NVNT	ax20	5825	Ant2	-1.31	0.53	-0.78	30	Pass
NVNT	ax40	5755	Ant2	-3.82	0.55	-3.27	30	Pass
NVNT	ax40	5795	Ant2	-5.44	0.54	-4.9	30	Pass
NVNT	ax80	5775	Ant2	-6.67	0.56	-6.11	30	Pass





MIMO


Condition	Mode	Frequency (MHz)	Total PSD (dBm/500KHz)				Limit (dBm/500KHz)	Verdict
			Ant0	Ant1	Ant2	Ant0+Ant1+Ant2		
NVNT	n20	5745	0.84	2.16	-10.06	22.20	26.96	Pass
NVNT	n20	5785	0.56	2.24	-11.52	21.74	26.96	Pass
NVNT	n20	5825	1.6	2.81	-10.65	21.73	26.96	Pass
NVNT	n40	5755	-2.79	-1.19	-1.11	22.82	26.96	Pass
NVNT	n40	5795	-3.96	-3.71	-2.75	21.83	26.96	Pass
NVNT	ac20	5745	-1.74	-0.72	-15.43	22.35	26.96	Pass
NVNT	ac20	5785	-2.87	-1.83	-14.52	21.87	26.96	Pass
NVNT	ac20	5825	-1.2	-0.62	-13.74	21.99	26.96	Pass
NVNT	ac40	5755	-8.27	-6.4	-5.89	22.94	26.96	Pass
NVNT	ac40	5795	-8.8	-6.47	-6.37	21.93	26.96	Pass
NVNT	ac80	5775	-16.02	-14.96	-14.81	21.76	26.96	Pass
NVNT	ax20	5745	-1.24	1.03	-1.17	23.16	26.96	Pass
NVNT	ax20	5785	-2.41	0.61	-0.54	22.74	26.96	Pass
NVNT	ax20	5825	-1.16	-1.51	-0.78	22.68	26.96	Pass
NVNT	ax40	5755	-3.32	-3.47	-3.27	23.29	26.96	Pass
NVNT	ax40	5795	-4.46	-5.8	-4.9	22.19	26.96	Pass
NVNT	ax80	5775	-8.02	-5.73	-6.11	22.18	26.96	Pass








Test Graphs



PSD NVNT a 5745MHz Ant0


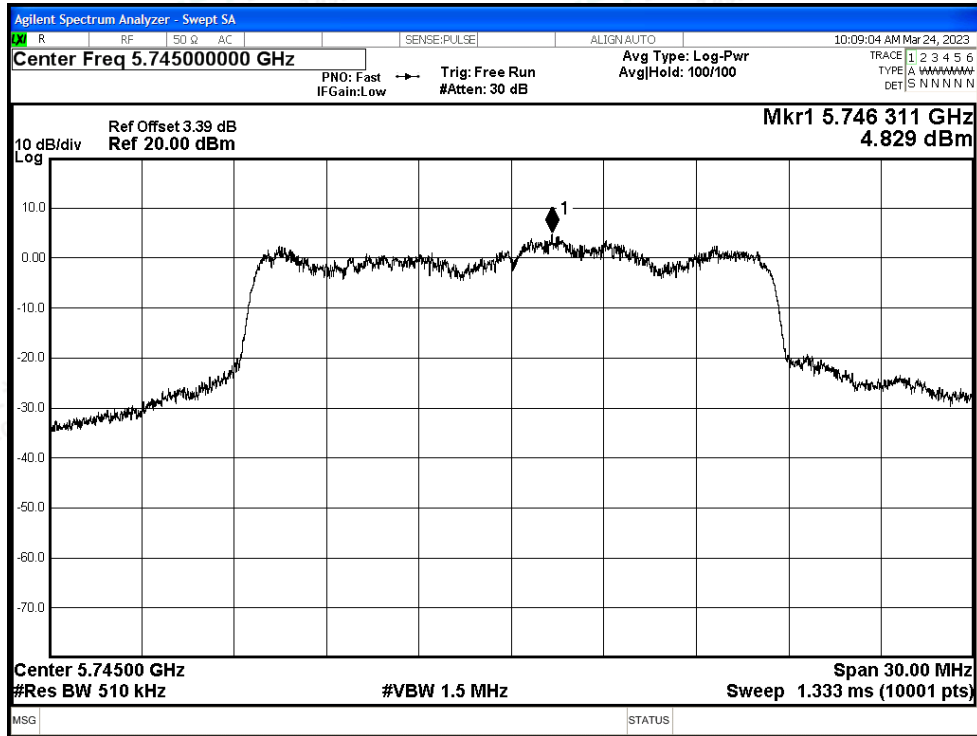




PSD NVNT a 5785MHz Ant0


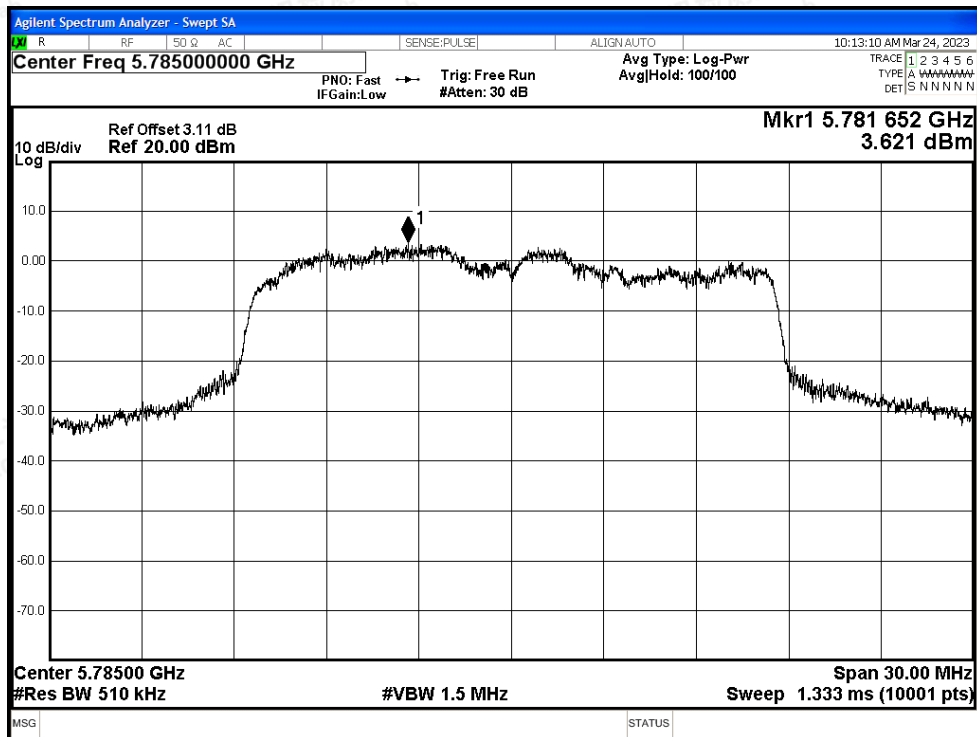


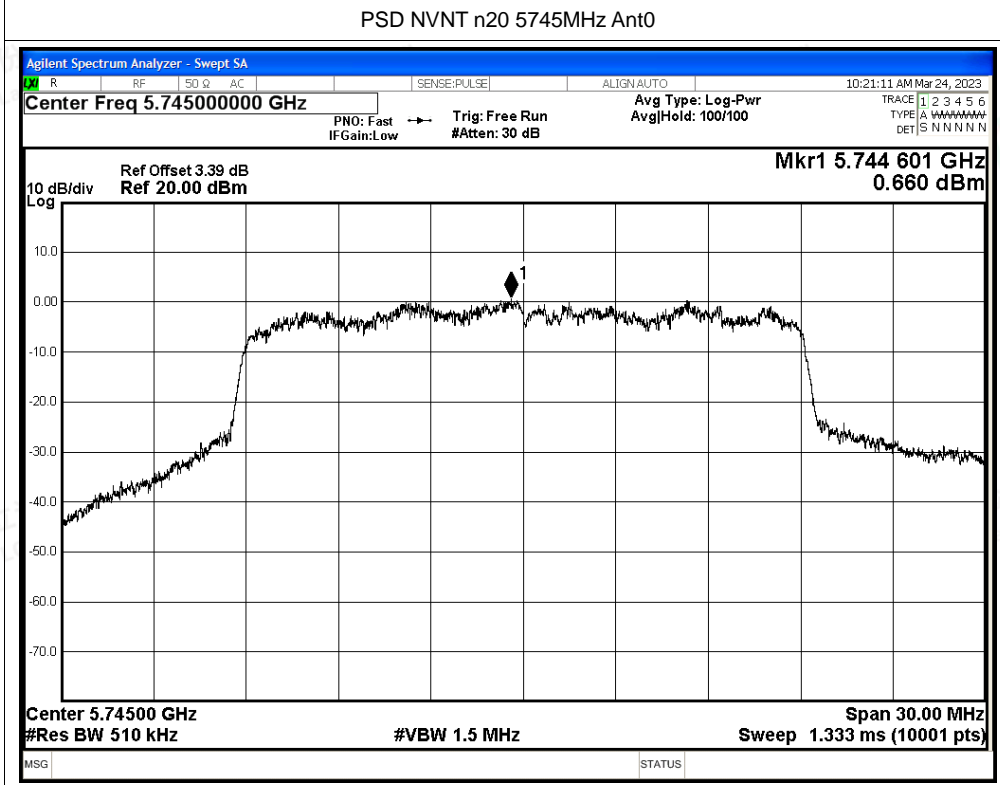
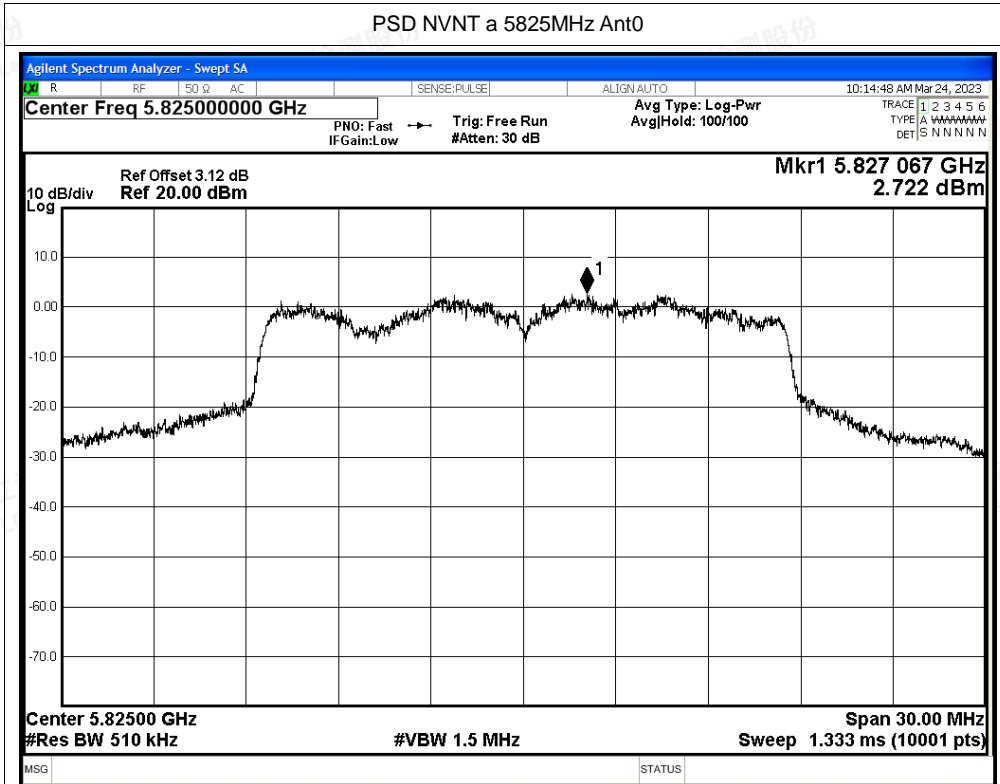


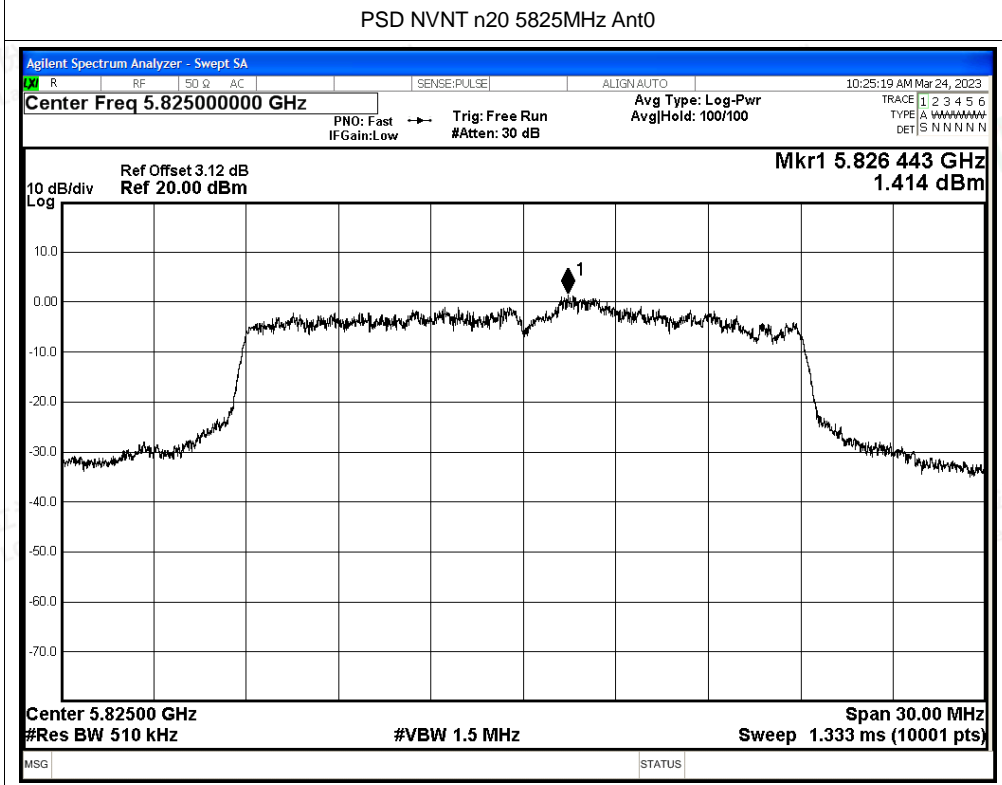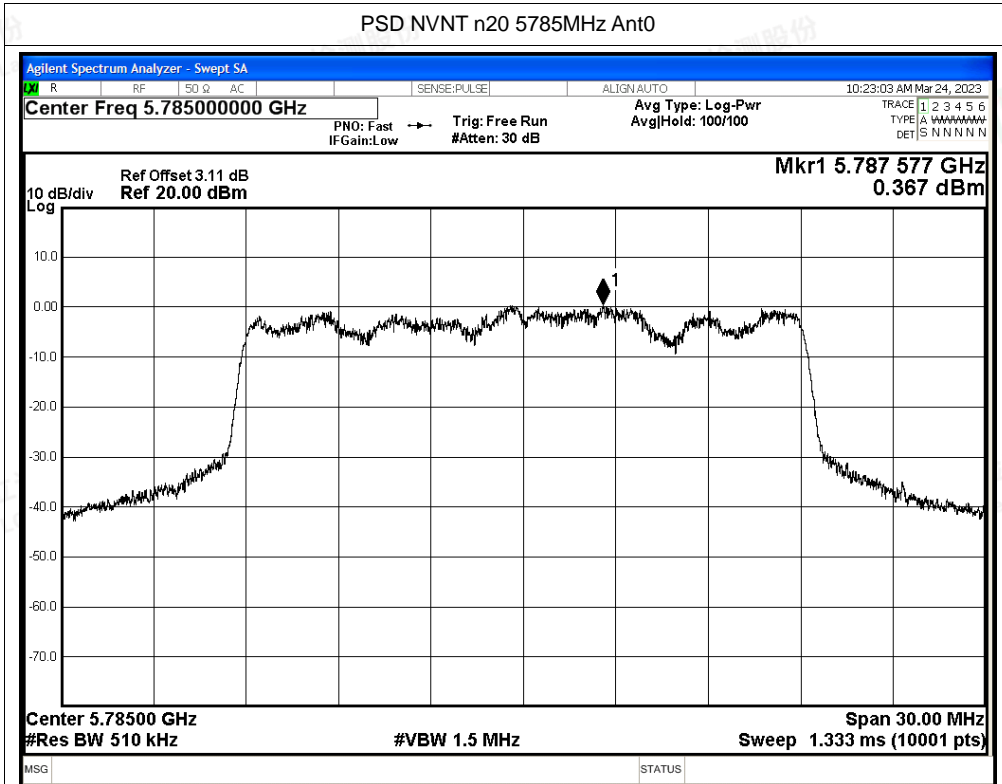

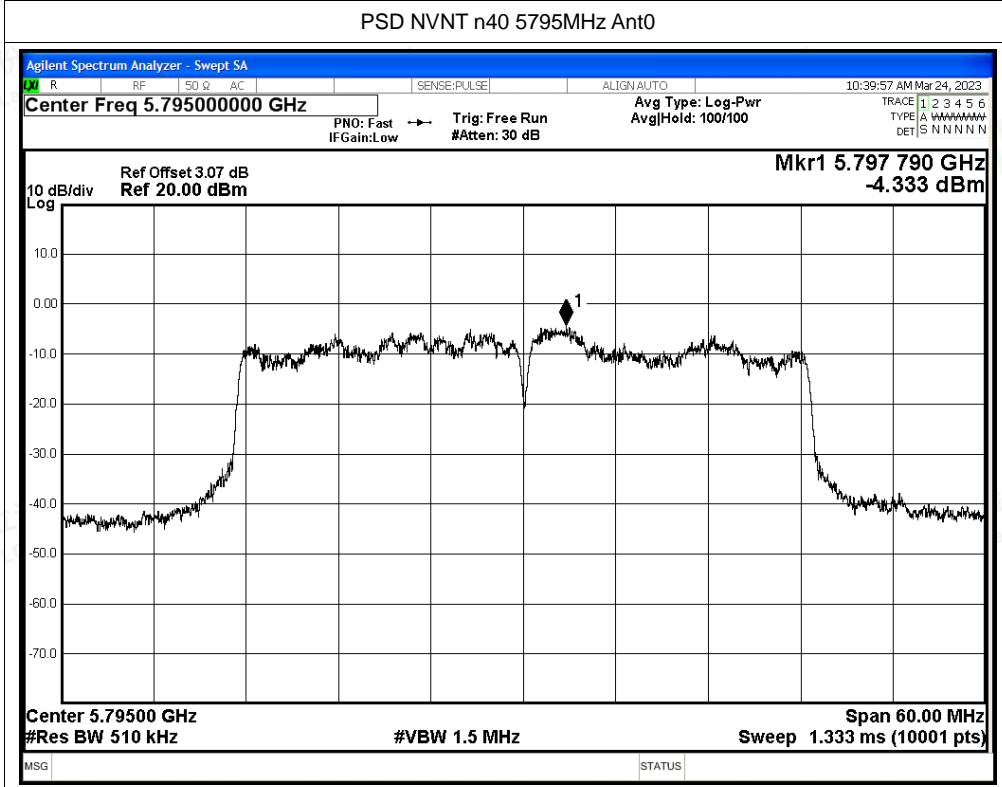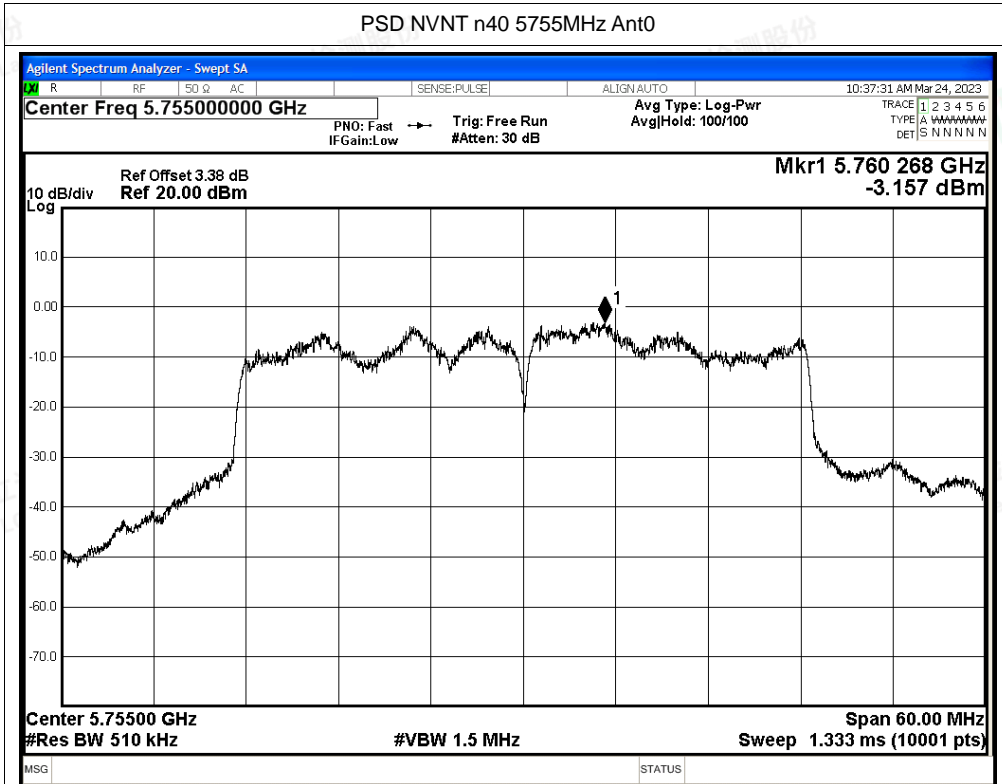

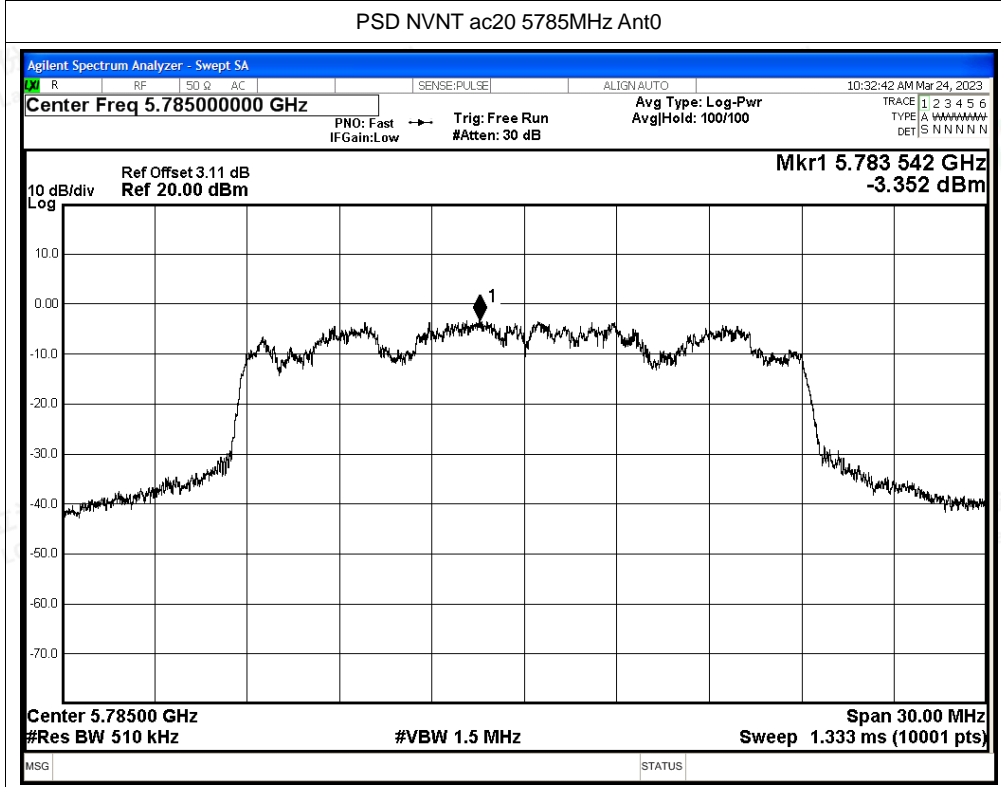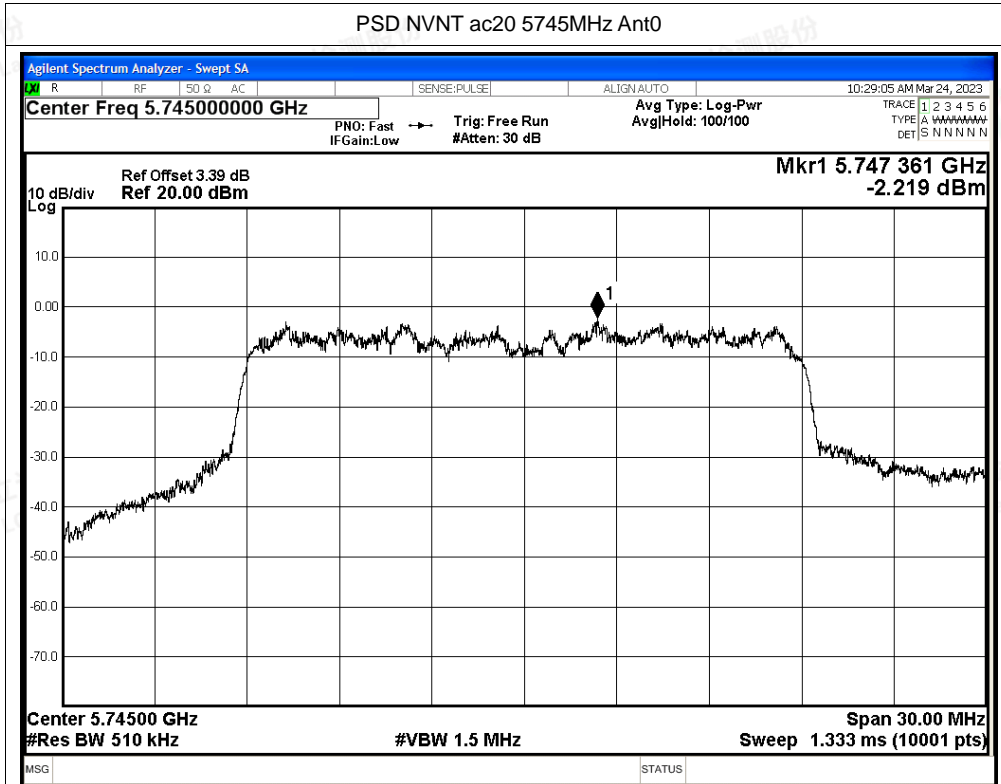


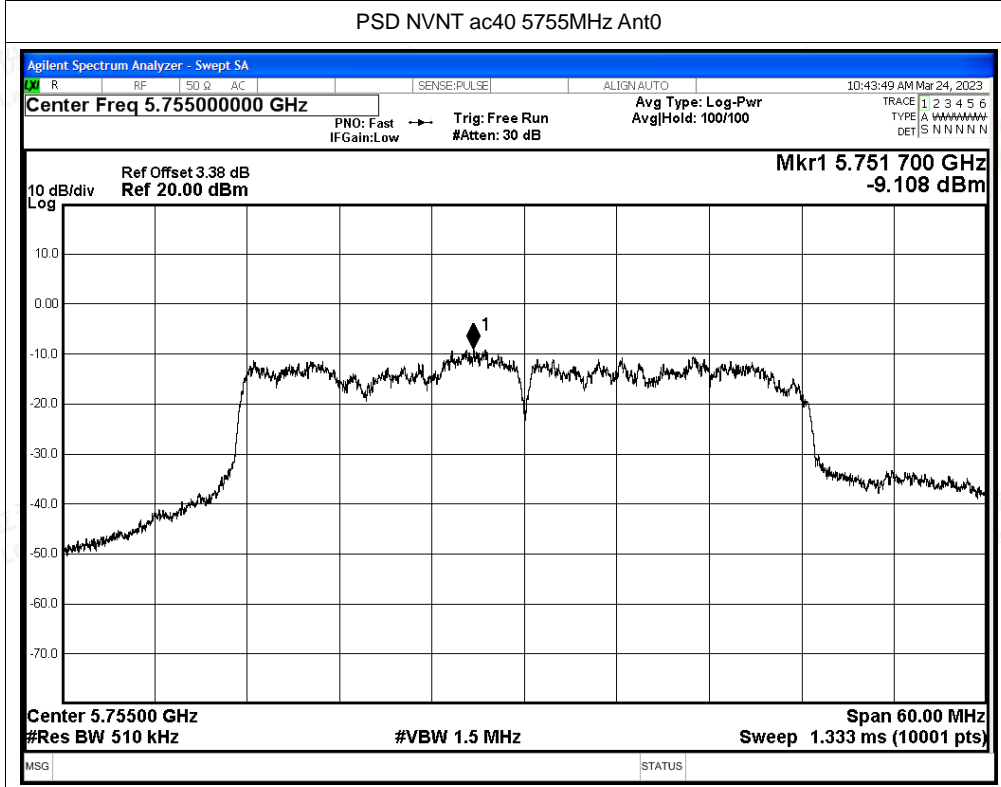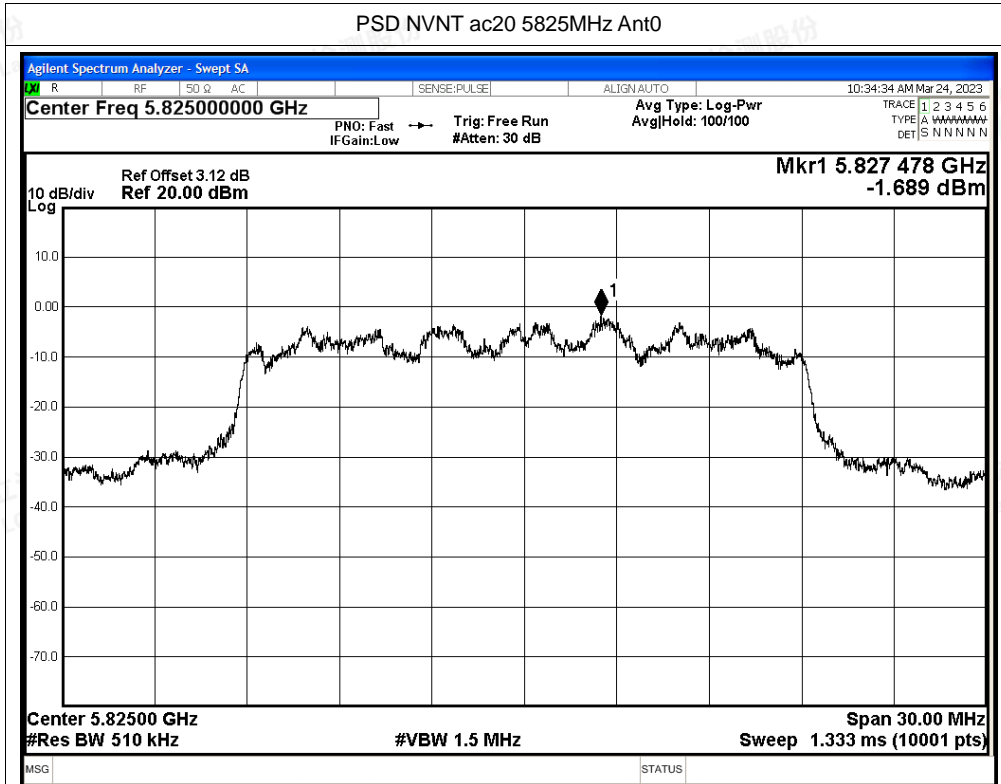

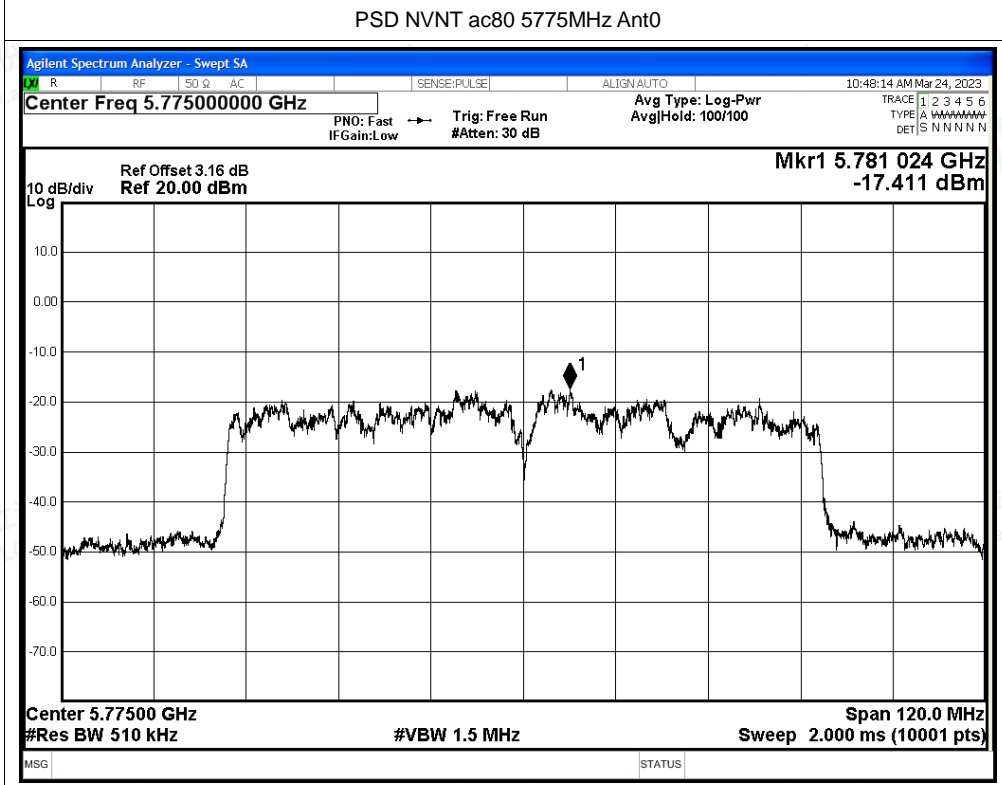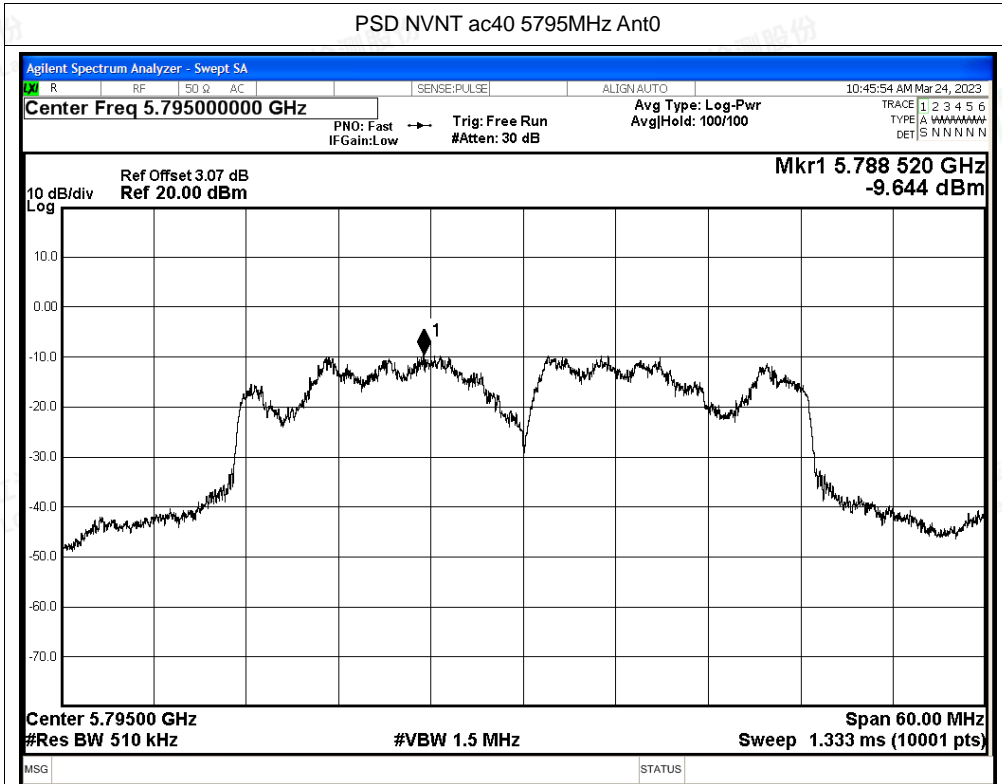




PSD NVNT ax20 5745MHz Ant0

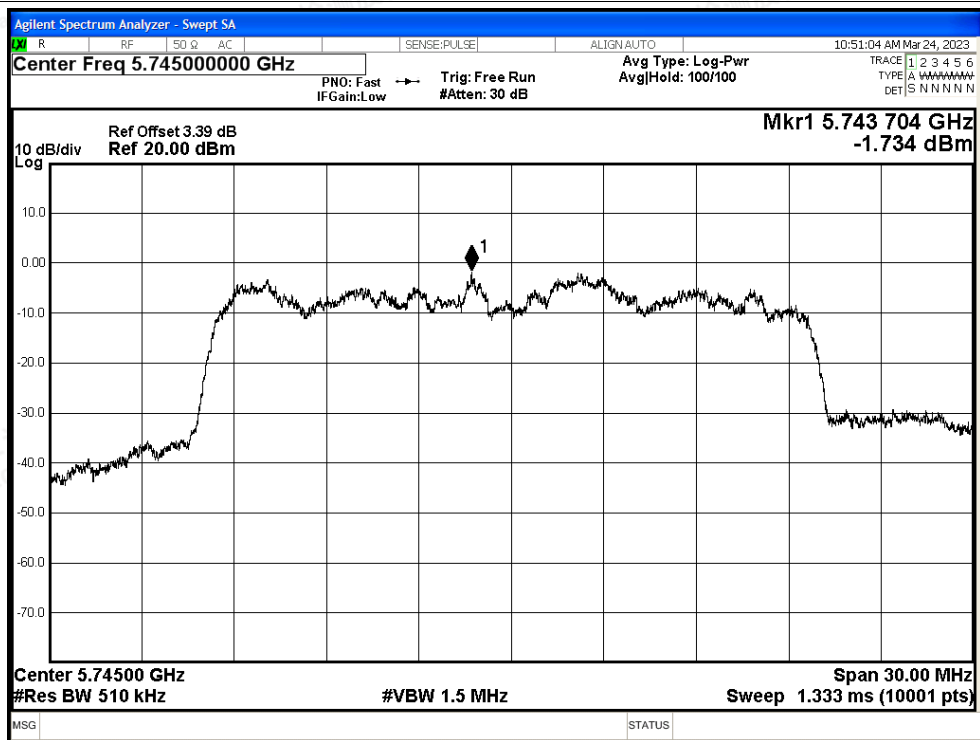


PSD NVNT ax20 5785MHz Ant0

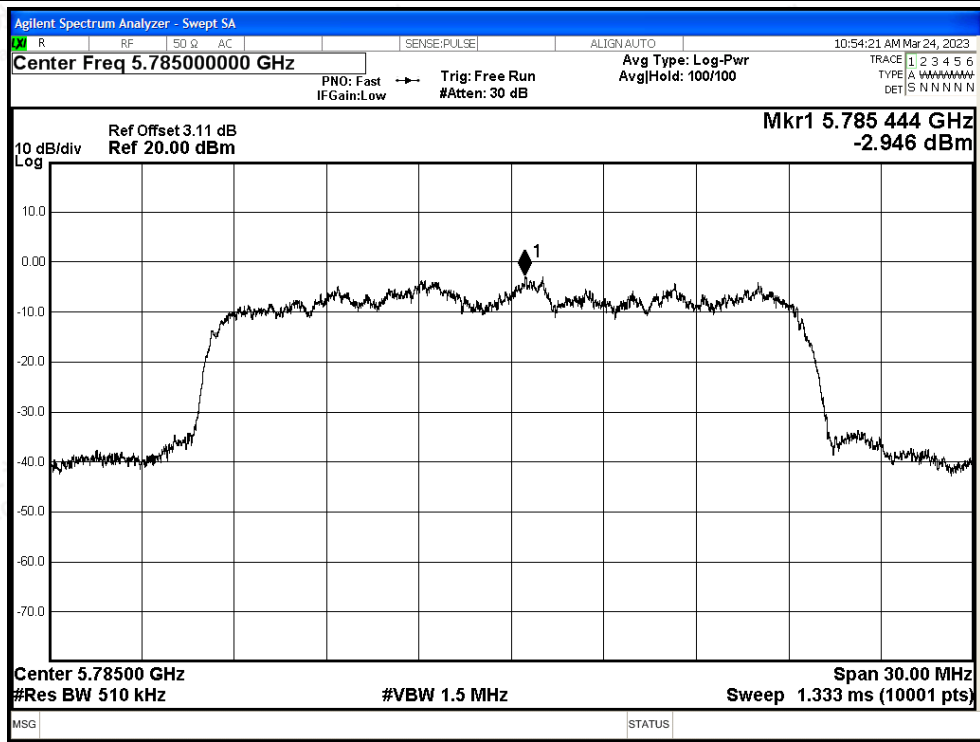






PSD NVNT ax20 5825MHz Ant0

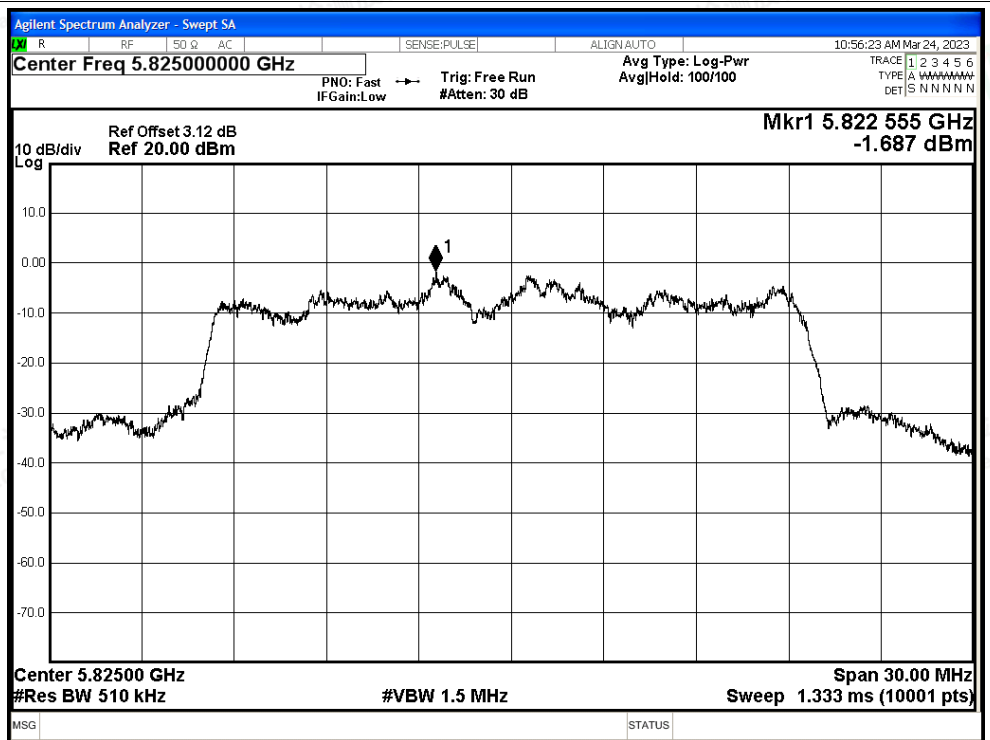

PSD NVNT ax40 5755MHz Ant0

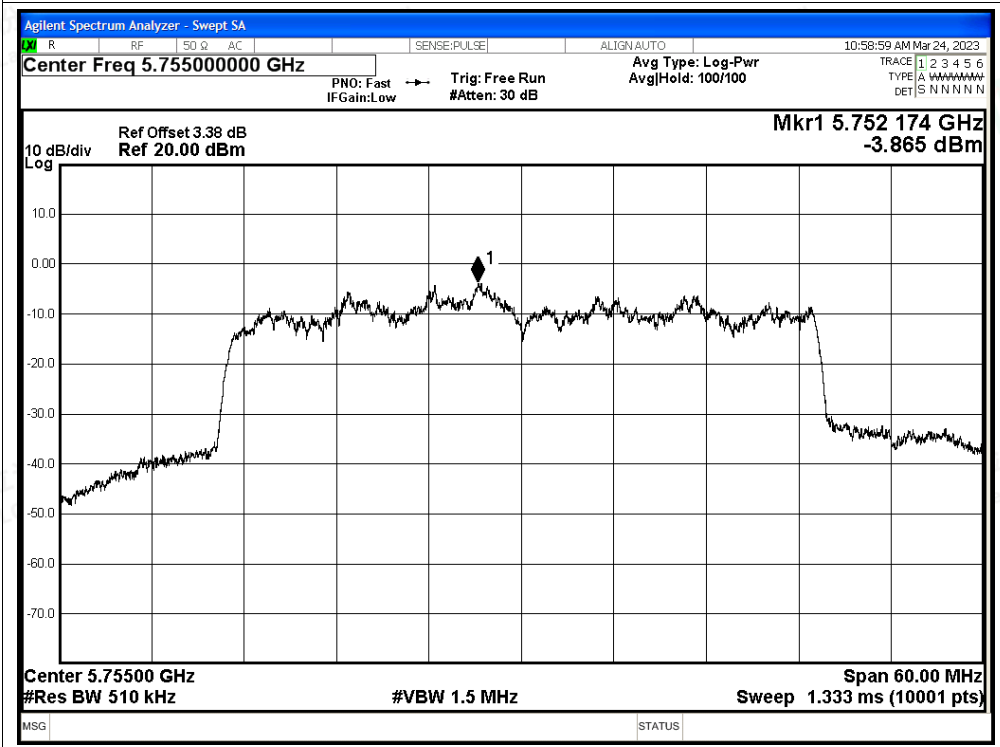

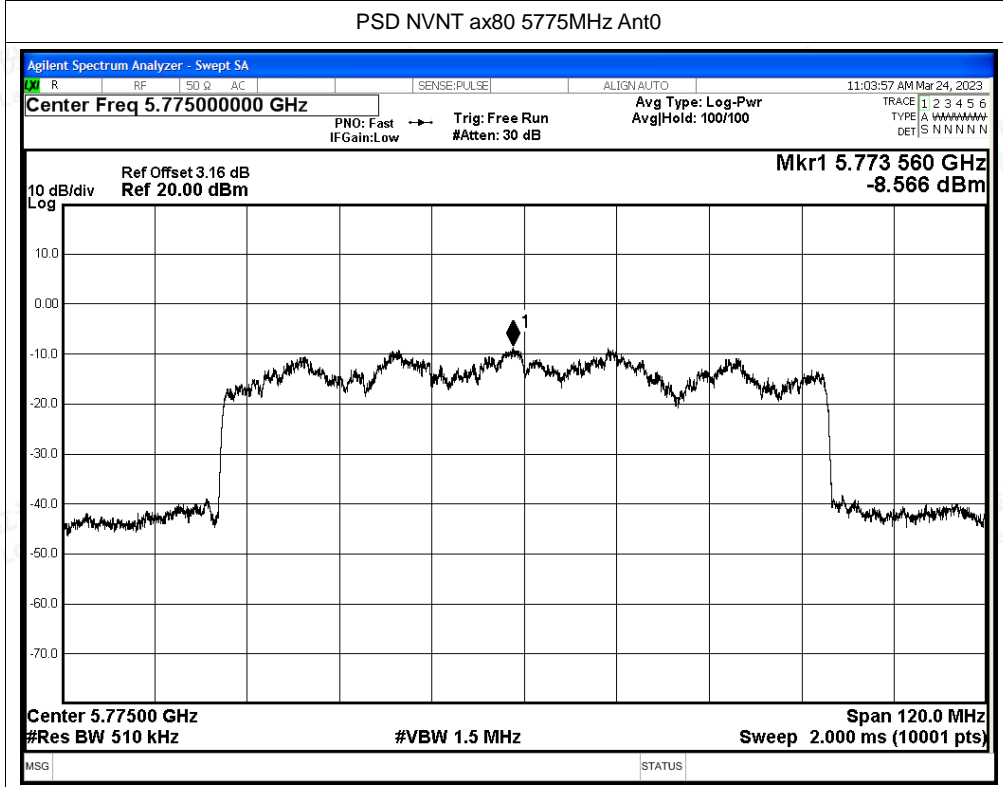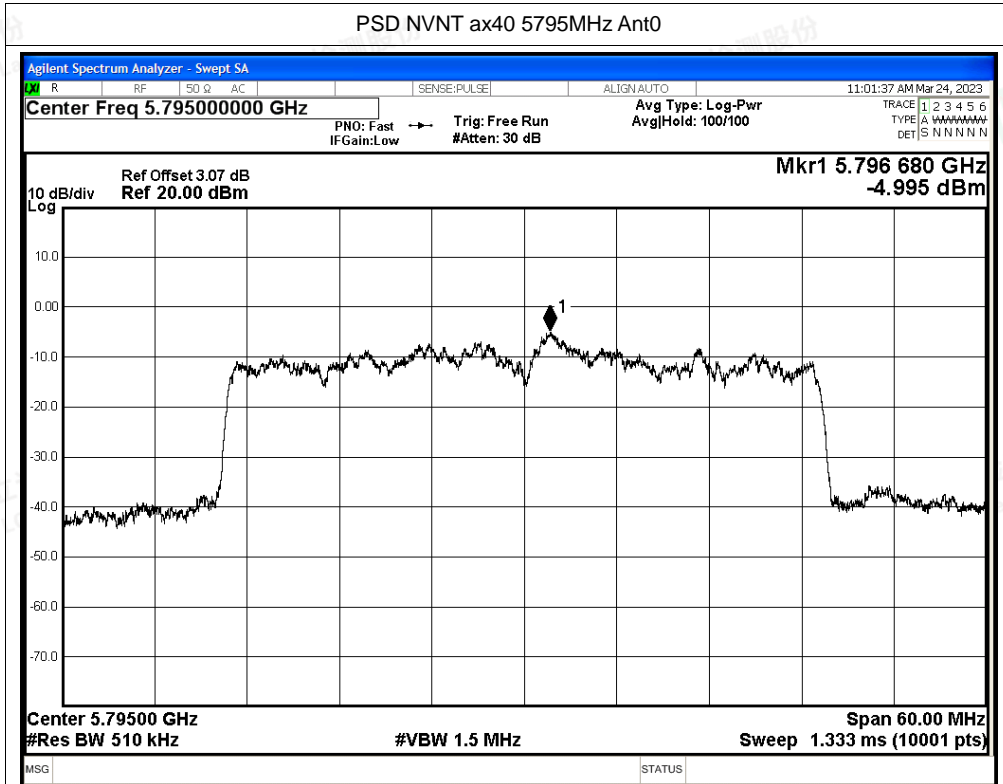



E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	EIRP Power (dBm)	Detector	Limit (dBm)	Verdict
NVNT	a- Ant1	5745	Ant1	5650	-48.43	4.84	-43.59	Peak	-27	Pass
NVNT	a- Ant1	5745	Ant1	5650	-56.28	4.84	-51.44	Average	-27	Pass
NVNT	a- Ant1	5745	Ant1	5700	-41.19	4.84	-36.35	Peak	10	Pass
NVNT	a- Ant1	5745	Ant1	5700	-51.15	4.84	-46.31	Average	10	Pass
NVNT	a- Ant1	5745	Ant1	5720	-30.84	4.84	-26	Peak	15.6	Pass
NVNT	a- Ant1	5745	Ant1	5720	-42.56	4.84	-37.72	Average	15.6	Pass
NVNT	a- Ant1	5745	Ant1	5725	-27.35	4.84	-22.51	Peak	27	Pass
NVNT	a- Ant1	5745	Ant1	5725	-38.33	4.84	-33.49	Average	27	Pass
NVNT	a- Ant1	5825	Ant1	5850	-26.52	4.84	-21.68	Peak	27	Pass
NVNT	a- Ant1	5825	Ant1	5850	-38.78	4.84	-33.94	Average	27	Pass
NVNT	a- Ant1	5825	Ant1	5855	-28.04	4.84	-23.2	Peak	15.6	Pass
NVNT	a- Ant1	5825	Ant1	5855	-41.32	4.84	-36.48	Average	15.6	Pass
NVNT	a- Ant1	5825	Ant1	5875	-39.73	4.84	-34.89	Peak	10	Pass
NVNT	a- Ant1	5825	Ant1	5875	-49.32	4.84	-44.48	Average	10	Pass
NVNT	a- Ant1	5825	Ant1	5925	-45.55	4.84	-40.71	Peak	-27	Pass
NVNT	a- Ant1	5825	Ant1	5925	-55.06	4.84	-50.22	Average	-27	Pass
NVNT	n20 MIMO	5745	Ant1	5650	-46.79	9.04	-37.75	Peak	-27	Pass
NVNT	n20 MIMO	5745	Ant1	5650	-56.82	9.04	-47.78	Average	-27	Pass
NVNT	n20 MIMO	5745	Ant1	5700	-42.17	9.04	-33.13	Peak	10	Pass
NVNT	n20 MIMO	5745	Ant1	5700	-54.18	9.04	-45.14	Average	10	Pass
NVNT	n20 MIMO	5745	Ant1	5720	-35.52	9.04	-26.48	Peak	15.6	Pass
NVNT	n20 MIMO	5745	Ant1	5720	-48.05	9.04	-39.01	Average	15.6	Pass
NVNT	n20 MIMO	5745	Ant1	5725	-34.33	9.04	-25.29	Peak	27	Pass
NVNT	n20 MIMO	5745	Ant1	5725	-44.5	9.04	-35.46	Average	27	Pass
NVNT	n20 MIMO	5825	Ant1	5850	-30.99	9.04	-21.95	Peak	27	Pass
NVNT	n20 MIMO	5825	Ant1	5850	-42.69	9.04	-33.65	Average	27	Pass
NVNT	n20 MIMO	5825	Ant1	5855	-31.53	9.04	-22.49	Peak	15.6	Pass





NVNT	n20 MIMO	5825	Ant1	5855	-45.77	9.04	-36.73	Average	15.6	Pass
NVNT	n20 MIMO	5825	Ant1	5875	-42.1	9.04	-33.06	Peak	10	Pass
NVNT	n20 MIMO	5825	Ant1	5875	-52.84	9.04	-43.8	Average	10	Pass
NVNT	n20 MIMO	5825	Ant1	5925	-47.89	9.04	-38.85	Peak	-27	Pass
NVNT	n20 MIMO	5825	Ant1	5925	-55.66	9.04	-46.62	Average	-27	Pass
NVNT	n40 MIMO	5755	Ant1	5650	-46.25	9.04	-37.21	Peak	-27	Pass
NVNT	n40 MIMO	5755	Ant1	5650	-55.8	9.04	-46.76	Average	-27	Pass
NVNT	n40 MIMO	5755	Ant1	5700	-40.56	9.04	-31.52	Peak	10	Pass
NVNT	n40 MIMO	5755	Ant1	5700	-49.88	9.04	-40.84	Average	10	Pass
NVNT	n40 MIMO	5755	Ant1	5720	-33.69	9.04	-24.65	Peak	15.6	Pass
NVNT	n40 MIMO	5755	Ant1	5720	-45.05	9.04	-36.01	Average	15.6	Pass
NVNT	n40 MIMO	5755	Ant1	5725	-31.5	9.04	-22.46	Peak	27	Pass
NVNT	n40 MIMO	5755	Ant1	5725	-41.35	9.04	-32.31	Average	27	Pass
NVNT	n40 MIMO	5795	Ant1	5850	-31.35	9.04	-22.31	Peak	27	Pass
NVNT	n40 MIMO	5795	Ant1	5850	-43.85	9.04	-34.81	Average	27	Pass
NVNT	n40 MIMO	5795	Ant1	5855	-31.97	9.04	-22.93	Peak	15.6	Pass
NVNT	n40 MIMO	5795	Ant1	5855	-44.89	9.04	-35.85	Average	15.6	Pass
NVNT	n40 MIMO	5795	Ant1	5875	-37.97	9.04	-28.93	Peak	10	Pass
NVNT	n40 MIMO	5795	Ant1	5875	-49.63	9.04	-40.59	Average	10	Pass
NVNT	n40 MIMO	5795	Ant1	5925	-45.73	9.04	-36.69	Peak	-27	Pass
NVNT	n40 MIMO	5795	Ant1	5925	-54.94	9.04	-45.9	Average	-27	Pass
NVNT	ac20 MIMO	5745	Ant1	5650	-45	9.04	-35.96	Peak	-27	Pass





NVNT	ac20 MIMO	5745	Ant1	5650	-55.93	9.04	-46.89	Average	-27	Pass
NVNT	ac20 MIMO	5745	Ant1	5700	-41.51	9.04	-32.47	Peak	10	Pass
NVNT	ac20 MIMO	5745	Ant1	5700	-53.17	9.04	-44.13	Average	10	Pass
NVNT	ac20 MIMO	5745	Ant1	5720	-34.5	9.04	-25.46	Peak	15.6	Pass
NVNT	ac20 MIMO	5745	Ant1	5720	-46.23	9.04	-37.19	Average	15.6	Pass
NVNT	ac20 MIMO	5745	Ant1	5725	-31.65	9.04	-22.61	Peak	27	Pass
NVNT	ac20 MIMO	5745	Ant1	5725	-42.71	9.04	-33.67	Average	27	Pass
NVNT	ac20 MIMO	5825	Ant1	5850	-27.69	9.04	-18.65	Peak	27	Pass
NVNT	ac20 MIMO	5825	Ant1	5850	-40.05	9.04	-31.01	Average	27	Pass
NVNT	ac20 MIMO	5825	Ant1	5855	-32.81	9.04	-23.77	Peak	15.6	Pass
NVNT	ac20 MIMO	5825	Ant1	5855	-44.06	9.04	-35.02	Average	15.6	Pass
NVNT	ac20 MIMO	5825	Ant1	5875	-40.84	9.04	-31.8	Peak	10	Pass
NVNT	ac20 MIMO	5825	Ant1	5875	-51.17	9.04	-42.13	Average	10	Pass
NVNT	ac20 MIMO	5825	Ant1	5925	-45.75	9.04	-36.71	Peak	-27	Pass
NVNT	ac20 MIMO	5825	Ant1	5925	-55.24	9.04	-46.2	Average	-27	Pass
NVNT	ac40 MIMO	5755	Ant1	5650	-47.65	9.04	-38.61	Peak	-27	Pass
NVNT	ac40 MIMO	5755	Ant1	5650	-55.41	9.04	-46.37	Average	-27	Pass
NVNT	ac40 MIMO	5755	Ant1	5700	-39.17	9.04	-30.13	Peak	10	Pass
NVNT	ac40 MIMO	5755	Ant1	5700	-48.95	9.04	-39.91	Average	10	Pass
NVNT	ac40 MIMO	5755	Ant1	5720	-30.71	9.04	-21.67	Peak	15.6	Pass
NVNT	ac40 MIMO	5755	Ant1	5720	-42.03	9.04	-32.99	Average	15.6	Pass





NVNT	ac40 MIMO	5755	Ant1	5725	-28.62	9.04	-19.58	Peak	27	Pass
NVNT	ac40 MIMO	5755	Ant1	5725	-38.82	9.04	-29.78	Average	27	Pass
NVNT	ac40 MIMO	5795	Ant1	5850	-32.62	9.04	-23.58	Peak	27	Pass
NVNT	ac40 MIMO	5795	Ant1	5850	-42.4	9.04	-33.36	Average	27	Pass
NVNT	ac40 MIMO	5795	Ant1	5855	-29.63	9.04	-20.59	Peak	15.6	Pass
NVNT	ac40 MIMO	5795	Ant1	5855	-43.89	9.04	-34.85	Average	15.6	Pass
NVNT	ac40 MIMO	5795	Ant1	5875	-37.27	9.04	-28.23	Peak	10	Pass
NVNT	ac40 MIMO	5795	Ant1	5875	-48.29	9.04	-39.25	Average	10	Pass
NVNT	ac40 MIMO	5795	Ant1	5925	-45.05	9.04	-36.01	Peak	-27	Pass
NVNT	ac40 MIMO	5795	Ant1	5925	-55.08	9.04	-46.04	Average	-27	Pass
NVNT	ac80 MIMO	5775	Ant1	5650	-41.34	9.04	-32.3	Peak	-27	Pass
NVNT	ac80 MIMO	5775	Ant1	5650	-50.95	9.04	-41.91	Average	-27	Pass
NVNT	ac80 MIMO	5775	Ant1	5700	-25.84	9.04	-16.8	Peak	10	Pass
NVNT	ac80 MIMO	5775	Ant1	5700	-39.09	9.04	-30.05	Average	10	Pass
NVNT	ac80 MIMO	5775	Ant1	5720	-23.31	9.04	-14.27	Peak	15.6	Pass
NVNT	ac80 MIMO	5775	Ant1	5720	-34	9.04	-24.96	Average	15.6	Pass
NVNT	ac80 MIMO	5775	Ant1	5725	-20.59	9.04	-11.55	Peak	27	Pass
NVNT	ac80 MIMO	5775	Ant1	5725	-33.78	9.04	-24.74	Average	27	Pass
NVNT	ac80 MIMO	5775	Ant1	5850	-30.31	9.04	-21.27	Peak	27	Pass
NVNT	ac80 MIMO	5775	Ant1	5850	-41.74	9.04	-32.7	Average	27	Pass
NVNT	ac80 MIMO	5775	Ant1	5855	-26.75	9.04	-17.71	Peak	15.6	Pass
NVNT	ac80 MIMO	5775	Ant1	5855	-42.15	9.04	-33.11	Average	15.6	Pass





NVNT	ac80 MIMO	5775	Ant1	5875	-34.12	9.04	-25.08	Peak	10	Pass
NVNT	ac80 MIMO	5775	Ant1	5875	-47.33	9.04	-38.29	Average	10	Pass
NVNT	ac80 MIMO	5775	Ant1	5925	-37.98	9.04	-28.94	Peak	-27	Pass
NVNT	ac80 MIMO	5775	Ant1	5925	-54.12	9.04	-45.08	Average	-27	Pass
NVNT	ax20 MIMO	5745	Ant1	5650	-47.29	9.04	-38.25	Peak	-27	Pass
NVNT	ax20 MIMO	5745	Ant1	5650	-56.19	9.04	-47.15	Average	-27	Pass
NVNT	ax20 MIMO	5745	Ant1	5700	-39.21	9.04	-30.17	Peak	10	Pass
NVNT	ax20 MIMO	5745	Ant1	5700	-52.4	9.04	-43.36	Average	10	Pass
NVNT	ax20 MIMO	5745	Ant1	5720	-30.27	9.04	-21.23	Peak	15.6	Pass
NVNT	ax20 MIMO	5745	Ant1	5720	-42.25	9.04	-33.21	Average	15.6	Pass
NVNT	ax20 MIMO	5745	Ant1	5725	-24.87	9.04	-15.83	Peak	27	Pass
NVNT	ax20 MIMO	5745	Ant1	5725	-37.1	9.04	-28.06	Average	27	Pass
NVNT	ax20 MIMO	5825	Ant1	5850	-25.08	9.04	-16.04	Peak	27	Pass
NVNT	ax20 MIMO	5825	Ant1	5850	-37.95	9.04	-28.91	Average	27	Pass
NVNT	ax20 MIMO	5825	Ant1	5855	-30.86	9.04	-21.82	Peak	15.6	Pass
NVNT	ax20 MIMO	5825	Ant1	5855	-42.98	9.04	-33.94	Average	15.6	Pass
NVNT	ax20 MIMO	5825	Ant1	5875	-36.62	9.04	-27.58	Peak	10	Pass
NVNT	ax20 MIMO	5825	Ant1	5875	-49.91	9.04	-40.87	Average	10	Pass
NVNT	ax20 MIMO	5825	Ant1	5925	-45.97	9.04	-36.93	Peak	-27	Pass
NVNT	ax20 MIMO	5825	Ant1	5925	-54.88	9.04	-45.84	Average	-27	Pass
NVNT	ax40 MIMO	5755	Ant1	5650	-45.16	9.04	-36.12	Peak	-27	Pass





NVNT	ax40 MIMO	5755	Ant1	5650	-55.23	9.04	-46.19	Average	-27	Pass
NVNT	ax40 MIMO	5755	Ant1	5700	-36.18	9.04	-27.14	Peak	10	Pass
NVNT	ax40 MIMO	5755	Ant1	5700	-47.51	9.04	-38.47	Average	10	Pass
NVNT	ax40 MIMO	5755	Ant1	5720	-25.62	9.04	-16.58	Peak	15.6	Pass
NVNT	ax40 MIMO	5755	Ant1	5720	-40.18	9.04	-31.14	Average	15.6	Pass
NVNT	ax40 MIMO	5755	Ant1	5725	-26.58	9.04	-17.54	Peak	27	Pass
NVNT	ax40 MIMO	5755	Ant1	5725	-37.28	9.04	-28.24	Average	27	Pass
NVNT	ax40 MIMO	5795	Ant1	5850	-30.75	9.04	-21.71	Peak	27	Pass
NVNT	ax40 MIMO	5795	Ant1	5850	-41.15	9.04	-32.11	Average	27	Pass
NVNT	ax40 MIMO	5795	Ant1	5855	-29.06	9.04	-20.02	Peak	15.6	Pass
NVNT	ax40 MIMO	5795	Ant1	5855	-42.41	9.04	-33.37	Average	15.6	Pass
NVNT	ax40 MIMO	5795	Ant1	5875	-35.85	9.04	-26.81	Peak	10	Pass
NVNT	ax40 MIMO	5795	Ant1	5875	-47.31	9.04	-38.27	Average	10	Pass
NVNT	ax40 MIMO	5795	Ant1	5925	-42.01	9.04	-32.97	Peak	-27	Pass
NVNT	ax40 MIMO	5795	Ant1	5925	-54.36	9.04	-45.32	Average	-27	Pass
NVNT	ax80 MIMO	5775	Ant1	5850	-18.61	9.04	-9.57	Peak	27	Pass
NVNT	ax80 MIMO	5775	Ant1	5850	-33.44	9.04	-24.4	Average	27	Pass
NVNT	ax80 MIMO	5775	Ant1	5855	-24.1	9.04	-15.06	Peak	15.6	Pass
NVNT	ax80 MIMO	5775	Ant1	5855	-34.06	9.04	-25.02	Average	15.6	Pass
NVNT	ax80 MIMO	5775	Ant1	5875	-26.45	9.04	-17.41	Peak	10	Pass
NVNT	ax80 MIMO	5775	Ant1	5875	-38.28	9.04	-29.24	Average	10	Pass
NVNT	ax80 MIMO	5775	Ant1	5925	-35.95	9.04	-26.91	Peak	-27	Pass





NVNT	ax80 MIMO	5775	Ant1	5925	-47.96	9.04	-38.92	Average	-27	Pass
NVNT	ax80 MIMO	5775	Ant1	5650	-40.65	9.04	-31.61	Peak	-27	Pass
NVNT	ax80 MIMO	5775	Ant1	5650	-49.49	9.04	-40.45	Average	-27	Pass
NVNT	ax80 MIMO	5775	Ant1	5700	-25.67	9.04	-16.63	Peak	10	Pass
NVNT	ax80 MIMO	5775	Ant1	5700	-36.94	9.04	-27.9	Average	10	Pass
NVNT	ax80 MIMO	5775	Ant1	5720	-18.21	9.04	-9.17	Peak	15.6	Pass
NVNT	ax80 MIMO	5775	Ant1	5720	-32.62	9.04	-23.58	Average	15.6	Pass
NVNT	ax80 MIMO	5775	Ant1	5725	-21.55	9.04	-12.51	Peak	27	Pass
NVNT	ax80 MIMO	5775	Ant1	5725	-32.53	9.04	-23.49	Average	27	Pass


Note: 802.11a mode, only show the worst set of antenna data.






Test Graphs

Restrict Band NVNT a 5745MHz Ant1 Peak

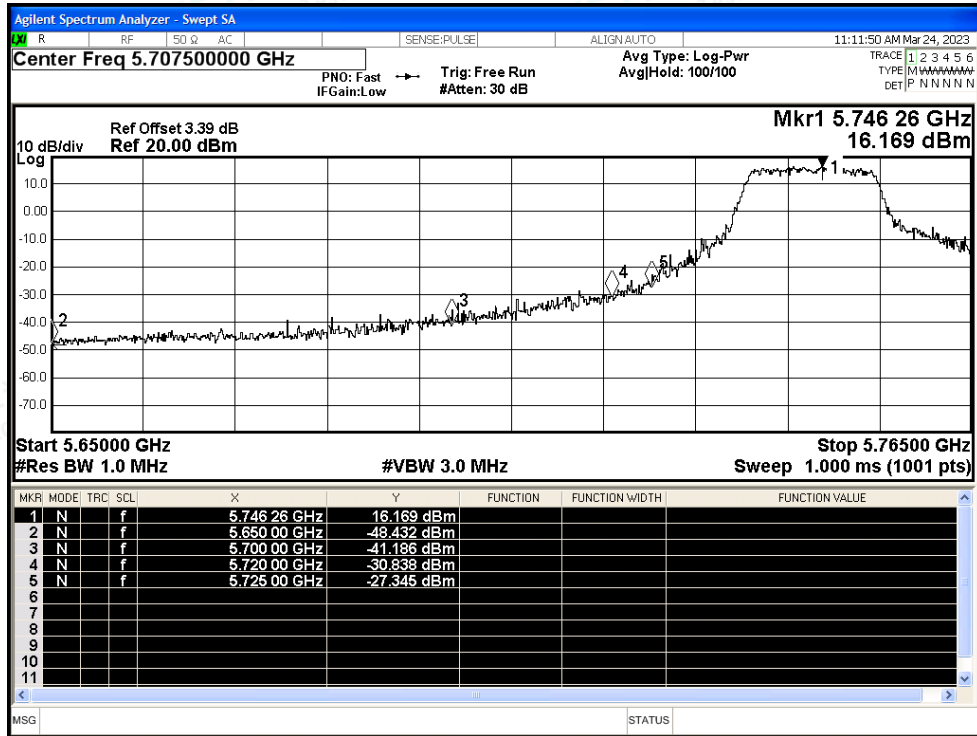


Restrict Band NVNT a 5745MHz Ant1 Average

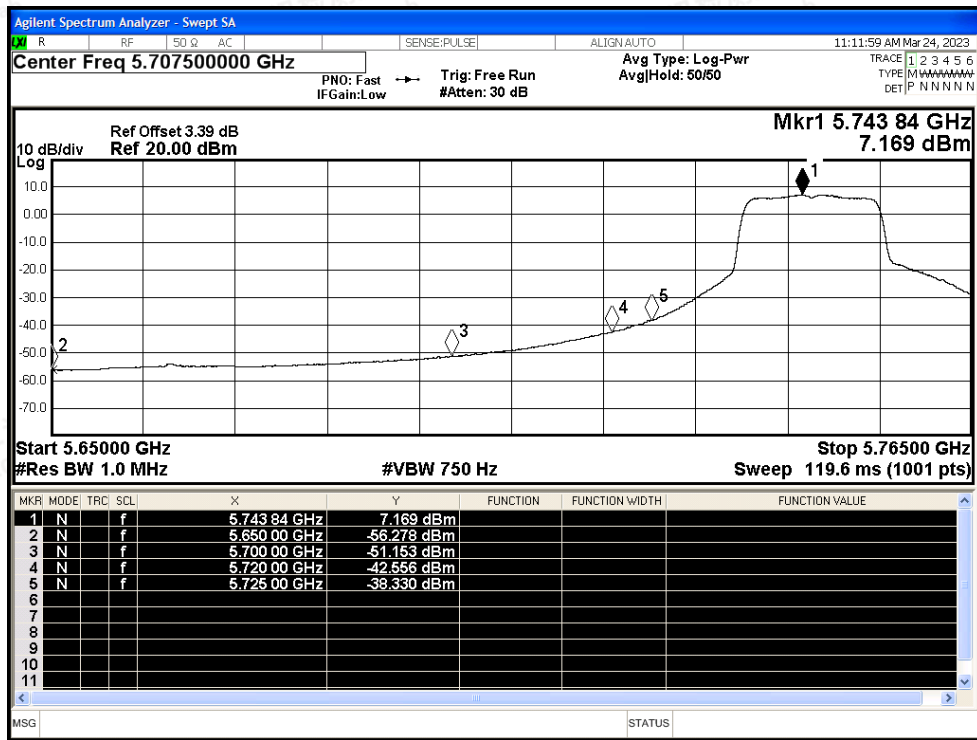




Restrict Band NVNT a 5825MHz Ant1 Peak

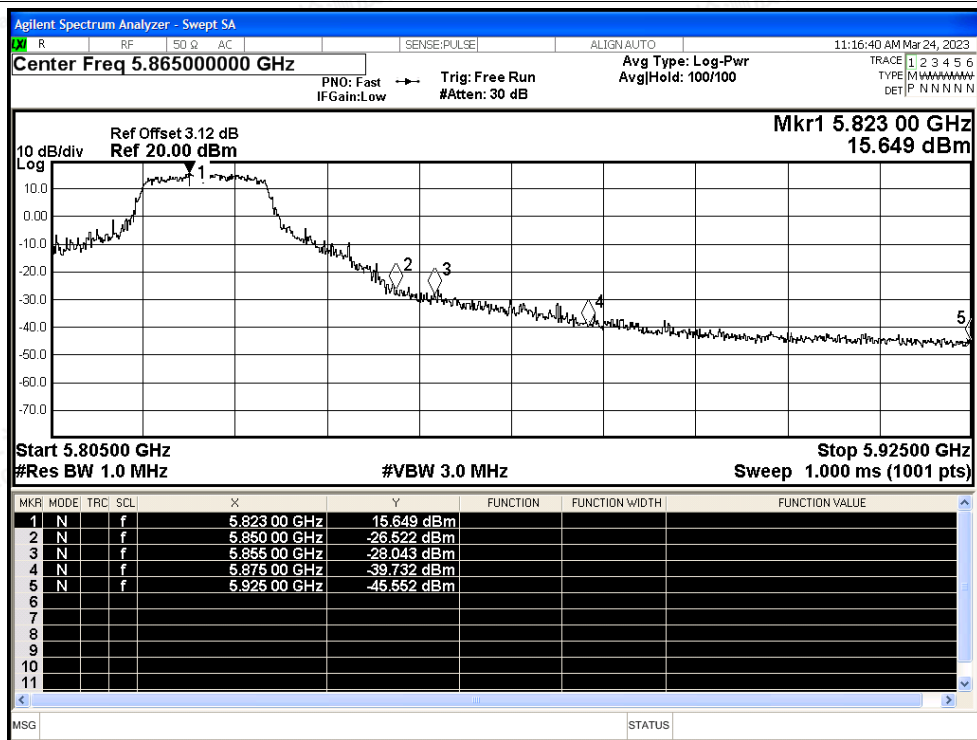


Restrict Band NVNT a 5825MHz Ant1 Average

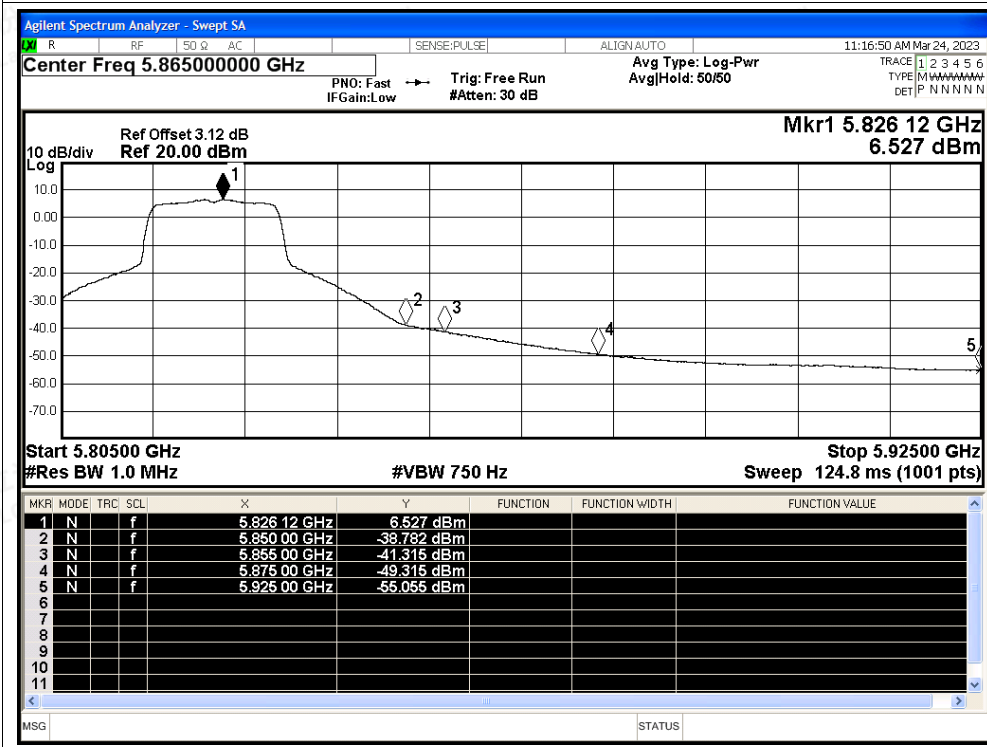




Restrict Band NVNT n20 5745MHz Ant1 Peak

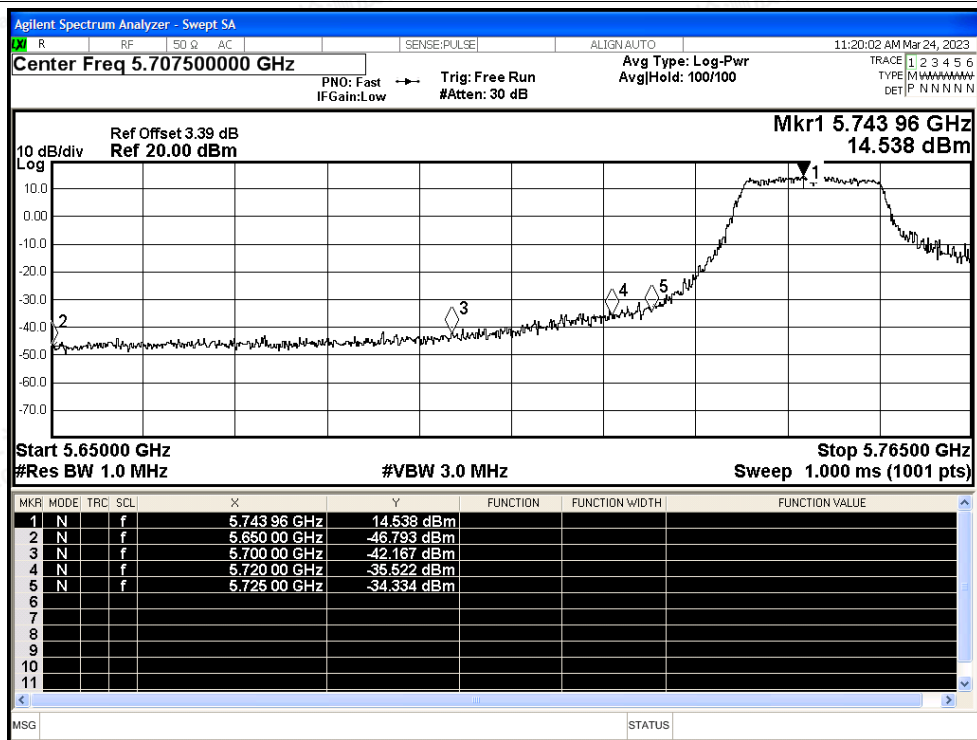


Restrict Band NVNT n20 5745MHz Ant1 Average

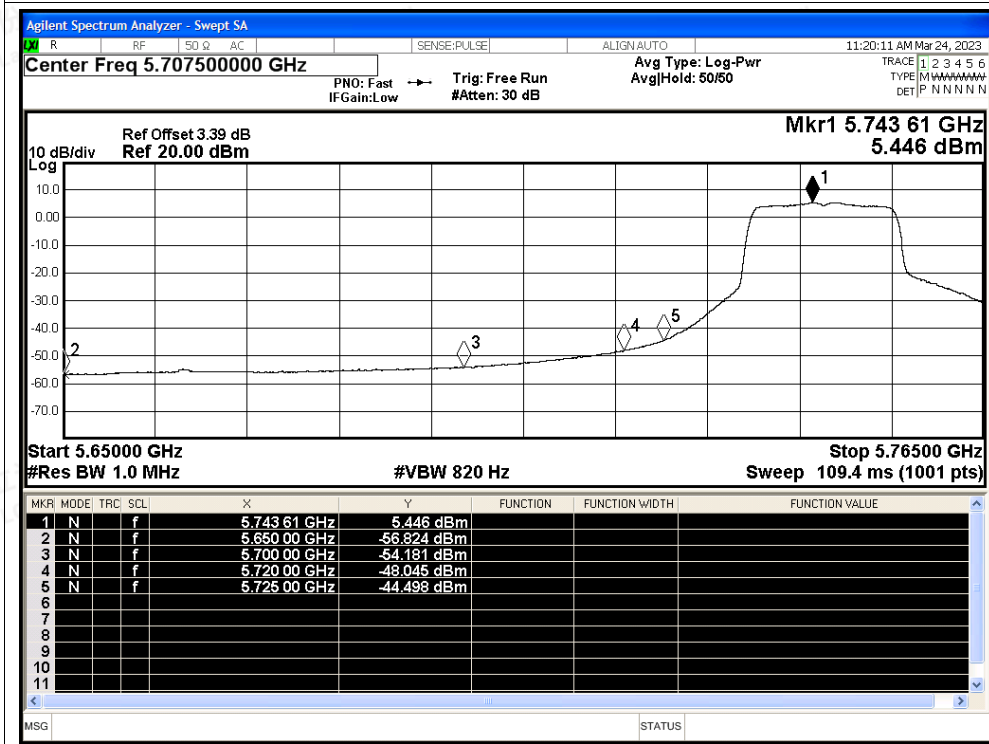




Restrict Band NVNT n20 5825MHz Ant1 Peak

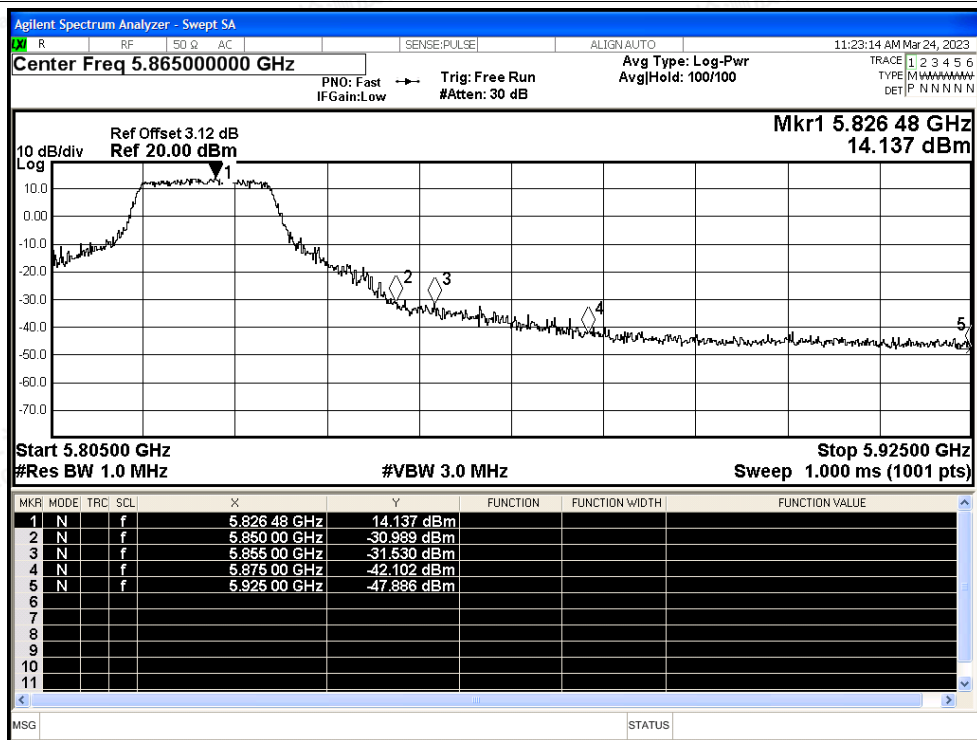


Restrict Band NVNT n20 5825MHz Ant1 Average

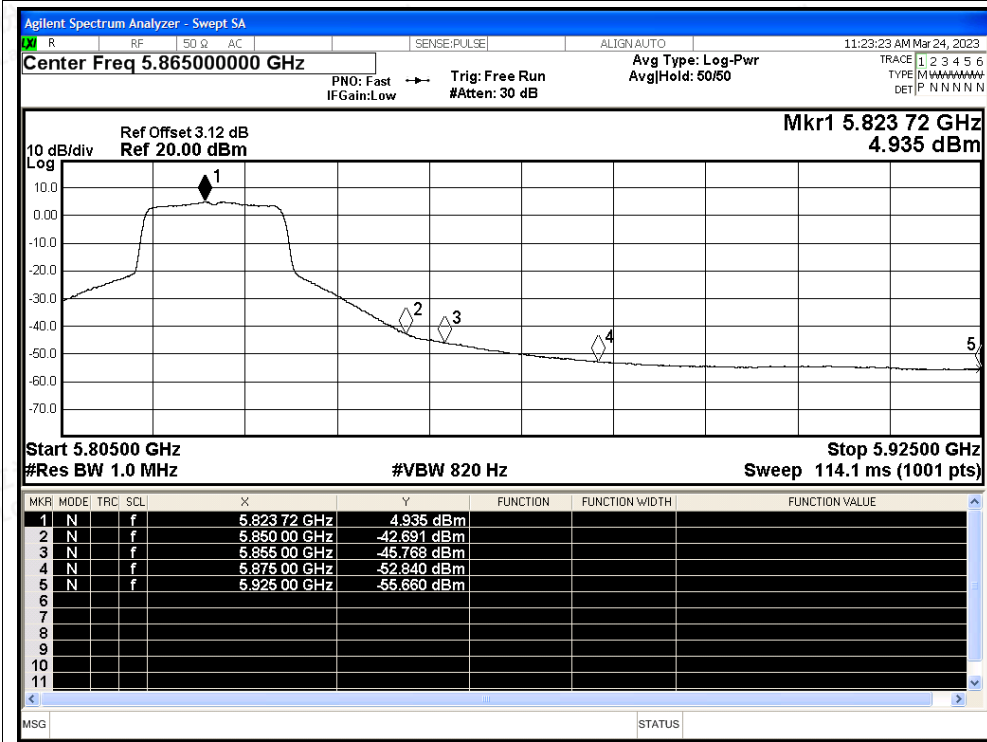




Restrict Band NVNT n40 5755MHz Ant1 Peak

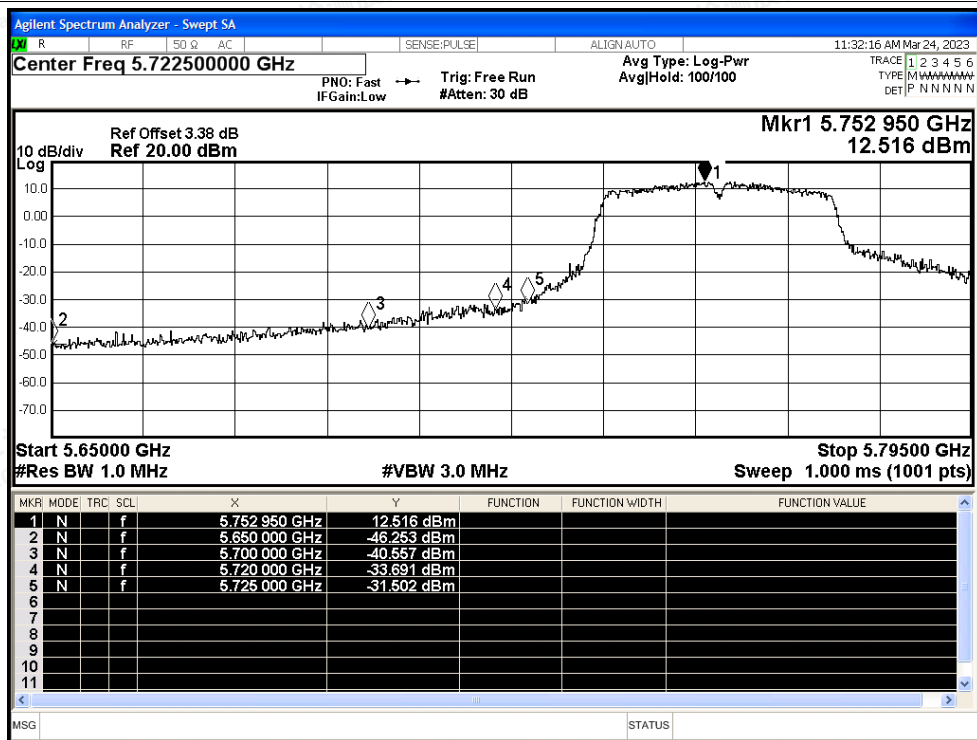


Restrict Band NVNT n40 5755MHz Ant1 Average

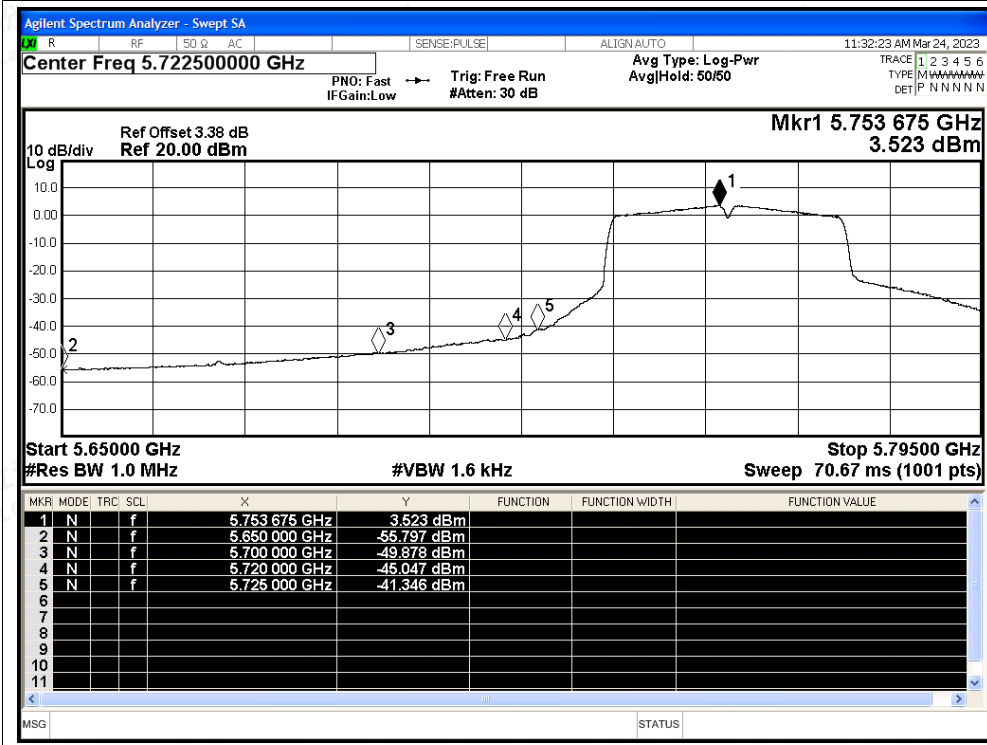




Restrict Band NVNT n40 5795MHz Ant1 Peak

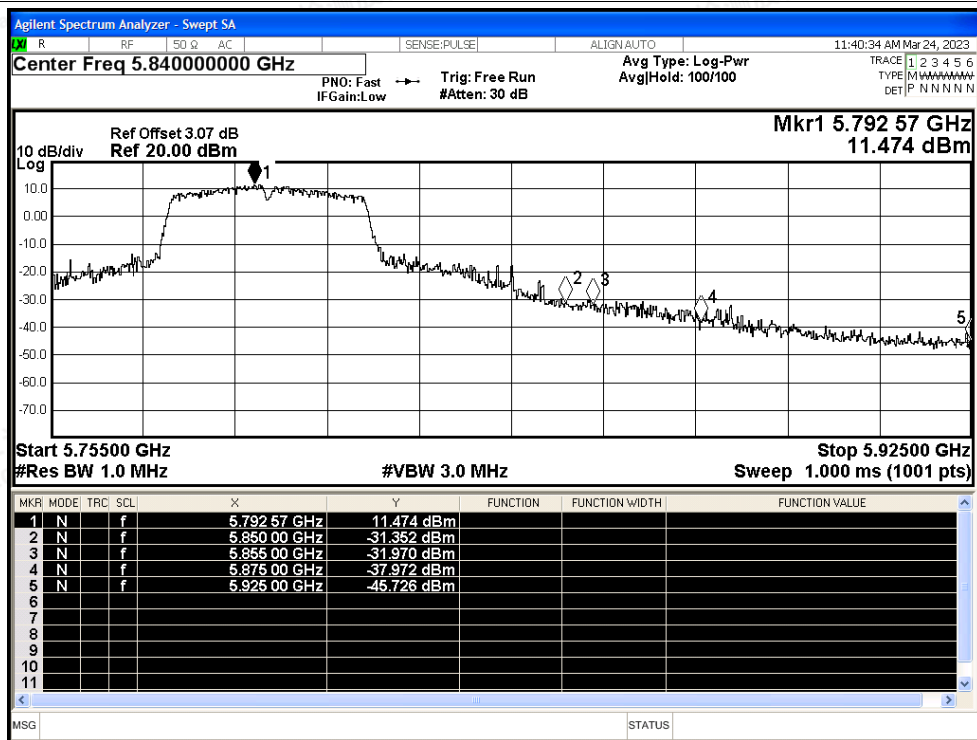


Restrict Band NVNT n40 5795MHz Ant1 Average

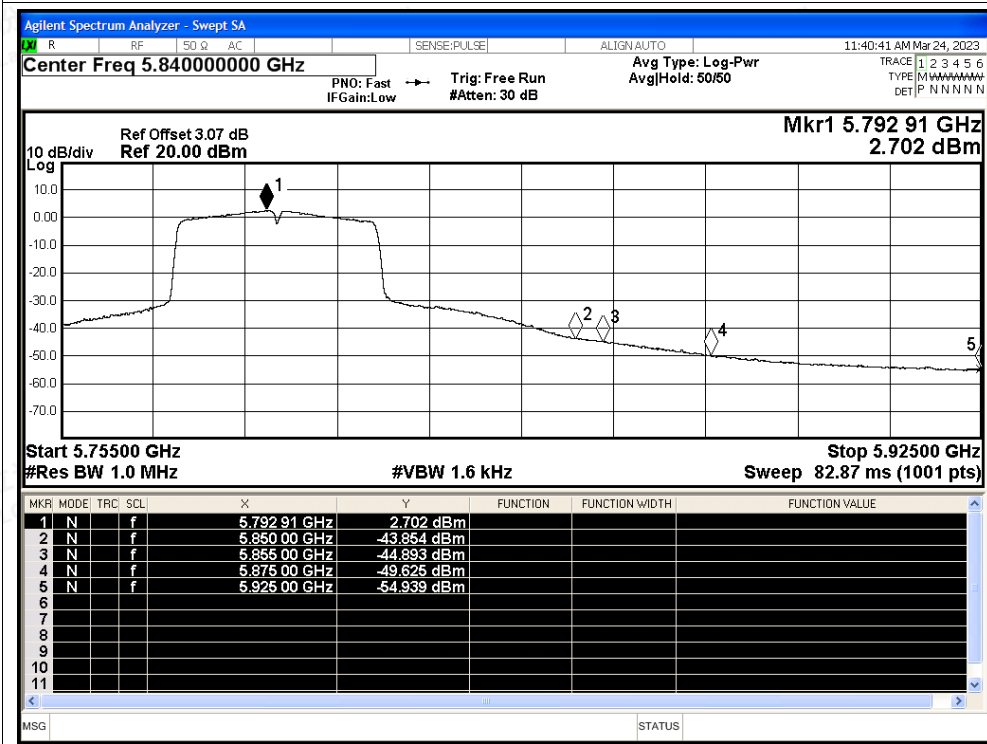




Restrict Band NVNT ac20 5745MHz Ant1 Peak

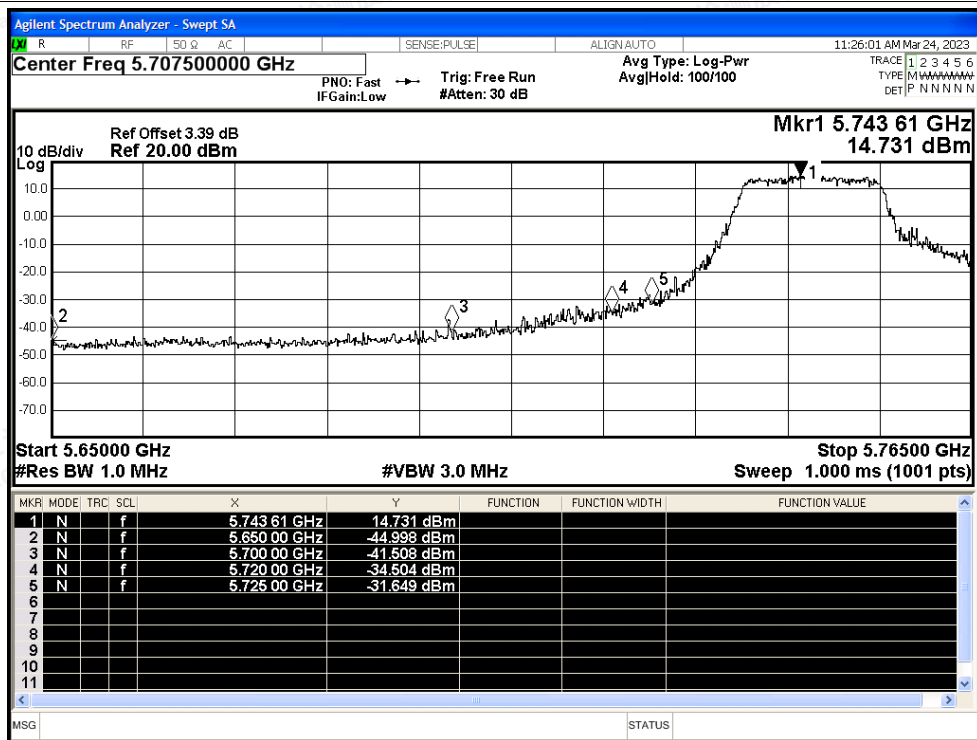


Restrict Band NVNT ac20 5745MHz Ant1 Average

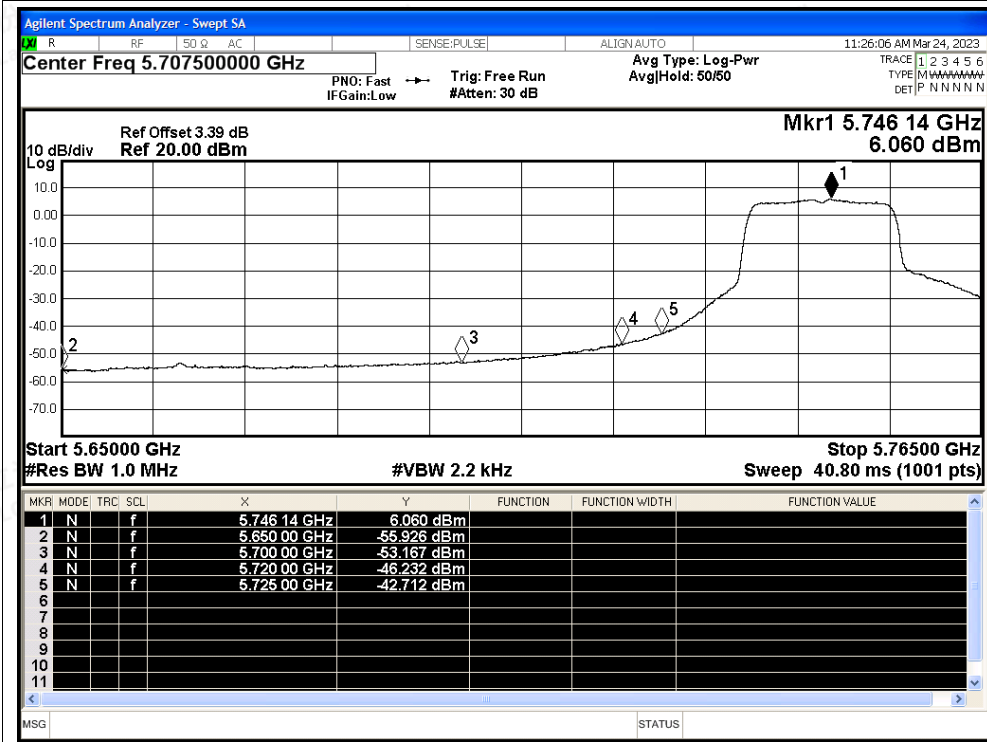



Restrict Band NVNT ac20 5825MHz Ant1 Peak

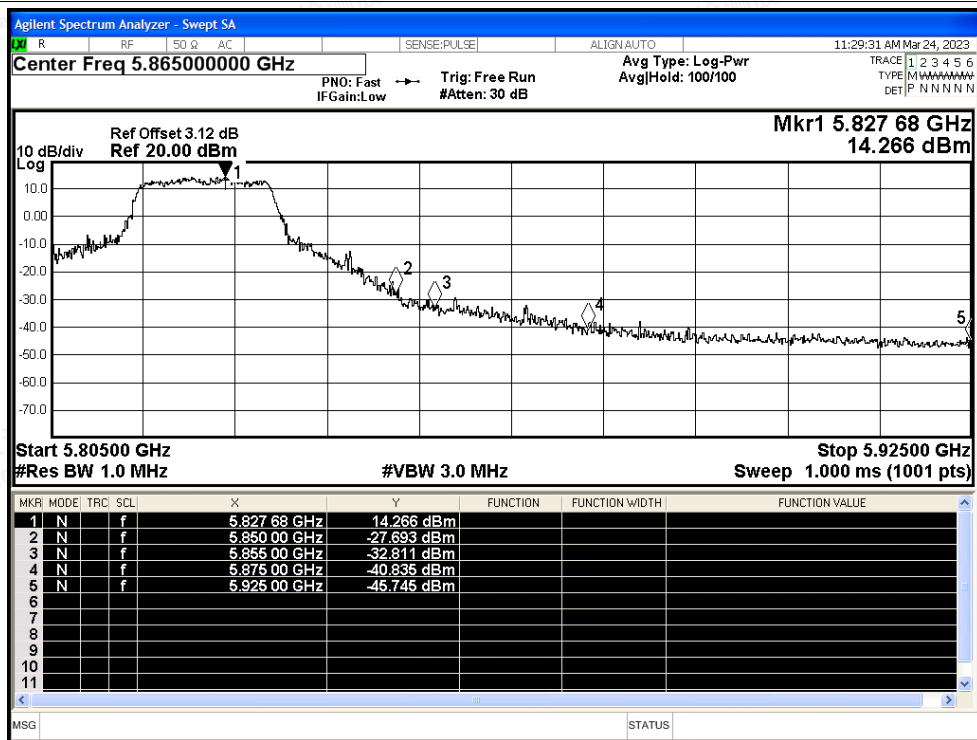

Restrict Band NVNT ac20 5825MHz Ant1 Average

