




TEST REPORT

<p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR20-SRF0081-A Page (1) of (76)</p>	
--	--	---

1. Client

- Name : DLOGIXS CO., LTD.
- Address : Dlogixs Building, 18, Beolmal-ro 118beon-gil Dongan-gu Anyang-si, Gyeonggi-do, South Korea
- Date of Receipt : 2019-12-03

2. Use of Report : Certification

3. Name of Product and Model : A1 / NRT-A1-01W



4. Manufacturer and Country of Origin : DLOGIXS CO., LTD. / Korea

5. FCC ID : 2APRMNRTA1

6. Date of Test : 2019-12-07 to 2019-12-24

7. Test Standards : FCC Part 15 Subpart C, 15.247

8. Test Results : Refer to the test result in the test report

Affirmation	Tested by Name : Taekyong Nam (Signature) 	Technical Manager Name : Heesu Ahn (Signature) 
-------------	--	---

2020-02-28

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

Report revision history

Date	Revision	Page No
2020-02-25	Initial report	-
2020-02-28	Updated	1,4,5,6,35,54,56,60

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.

Note. The report No. KR20-SRF0081 is superseded by the report No. KR20-SRF0081-A.



CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Accessory information	4
2.2.	Information about derivative model	5
2.3.	Frequency/channel operations	5
2.4.	Simultaneously transmission condition	5
3.	Antenna requirement	6
4.	Summary of tests	6
5.	Measurement uncertainty	7
6.	Measurement results explanation example	8
7.	Test results	9
7.1.	Maximum peak output power	9
7.2.	Carrier frequency separation	11
7.3.	20dB channel bandwidth	17
7.4.	Number of hopping channels	23
7.5.	Time of occupancy(Dwell time)	26
7.6.	Radiated spurious emissions & band edge	33
7.7.	Conducted Spurious Emission	66
7.8.	AC Conducted emission	73
8.	Measurement equipment	76

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A

Page (4) of (76)

KCTL

1. General information

Client : DLOGIXS CO., LTD.
Address : Dlogixs Building, 18, Beolmal-ro 118beon-gil Dongan-gu Anyang-si, Gyeonggi-do, South Korea
Manufacturer : DLOGIXS CO., LTD.
Address : Dlogixs Building, 18, Beolmal-ro 118beon-gil Dongan-gu Anyang-si, Gyeonggi-do, South Korea
Laboratory : KCTL Inc.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
Industry Canada Registration No. : 8035A
KOLAS No.: KT231

2. Device information

Equipment under test : A1
Model : NRT-A1-01W
Derivative model : NRT-A1-01B, NRT-A1-01G, NRT-A1-01D, NRT-A1-01I
Frequency range : 2 402 MHz ~ 2 480 MHz (Bluetooth(BDR/EDR), Bluetooth LE)
Modulation technique : Bluetooth(BDR/EDR)_ GFSK, $\pi/4$ DQPSK, 8DPSK
Bluetooth LE_GFSK
Number of channels : 79 ch (Bluetooth(BDR/EDR))
40 ch (Bluetooth LE)
Power source : DC 3.7 V
Antenna specification : PCB Antenna 1 (Bluetooth(BDR/EDR))
PCB Antenna 2 (Bluetooth(BDR/EDR) + Bluetooth LE)
Antenna gain : 1.83 dBi_Ant 1(Bluetooth(BDR/EDR))
1.14 dBi_Ant 2(Bluetooth(BDR/EDR) + Bluetooth LE)
Software version : 1.0.4
Hardware version : 0.7
Test device serial No. : N/A
Operation temperature : -5 °C ~ 40 °C

2.1. Accessory information

Equipment	Manufacturer	FCC ID	Model	Serial No.	Power source
TWS Bluetooth Earphone	ALON INC.	2APRM - NBCS00B10	User's TWS	-	Lithium polymer SL501012 3.7V / 40m Ah

2.2. Information about derivative model

The difference between basic model and derivative models is:

The basic and derivative model are electrically identical.

The derivative models are only for the simplified derivation based on buyer's model name.

2.3. Frequency/channel operations

This device contains the following capabilities:

Bluetooth(BDR/EDR), Bluetooth Low Energy

Ch.	Frequency (MHz)
00	2 402
⋮	⋮
39	2 441
⋮	⋮
78	2 480

Table 2.3.1. Bluetooth(BDR/EDR)

15.247 Requirements for Bluetooth transmitter:

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - 1) This system is hopping pseudo-randomly.
 - 2) Each frequency is used equally on the average by each transmitter.
 - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
 - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

2.4. Simultaneously transmission condition

Antenna	Modulation	Test mode	Frequency (MHz)
1	GFSK	Bluetooth (BDR)	2 480
2	GFSK	Bluetooth (BDR) Bluetooth LE (1M_37 Packet length)	2 480, 2 480

3. Antenna requirement

Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has permanently attached PCB Antenna (internal antenna) on board.

4. Summary of tests

FCC Part section(s)	Parameter	Test results
15.247(b)(1), (4)	Maximum peak output power	Pass
15.247(a)(1)	Carrier frequency separation	Pass
15.247(a)(1)	20dB channel bandwidth	Pass
15.247(a)(iii) 15.247(b)(1)	Number of hopping channel	Pass
15.247(a) (iii)	Time of occupancy(dwel time)	Pass
15.205(a), 15.209(a)	Spurious emission	Pass
15.247(d),	Band-edge, restricted band	Pass
15.207(a)	Conducted Emissions	Pass

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
3. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that X orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in X orientation
4. The test procedure(s) in this report were performed in accordance as following.
 - ◆ ANSI C63.10-2013
 - ◆ KDB 558074 D01 v05r02

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty(±)	
Conducted RF power	1.76 dB	
Conducted spurious emissions	4.03 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz	2.28 dB
	30 MHz ~ 300 MHz	4.98 dB
	300 MHz ~ 1 000 MHz	5.14 dB
	1 GHz ~ 6 GHz	6.70 dB
	Above 6 GHz	6.60 dB
Conducted emissions	9 kHz ~ 150 kHz	3.66 dB
	150 kHz ~ 30 MHz	3.26 dB

KCTL

6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.


Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	9.95	9 000	12.60
50	10.14	10 000	13.57
100	10.19	11 000	13.85
200	10.44	12 000	13.50
300	10.55	13 000	13.63
400	10.56	14 000	13.42
500	10.58	15 000	13.42
600	10.59	16 000	13.33
700	10.74	17 000	13.31
800	10.82	18 000	13.73
900	10.93	19 000	13.53
1 000	11.03	20 000	13.59
2 000	11.29	21 000	13.79
3 000	11.46	22 000	14.88
4 000	11.51	23 000	15.24
5 000	11.86	24 000	14.86
6 000	11.99	25 000	14.52
7 000	12.19	26 000	15.24
8 000	12.38	26 500	16.16

Note : Offset(dB) = RF cable loss(dB) + Attenuator(dB)

7 Test results

7.1. Maximum peak output power

Test setup



Limit

According to §15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), for frequency hopping systems operating in the 2 400-2 483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725-5 850 MHz band: 1 watt. For all other frequency hopping systems in the 2 400-2 483.5 MHz band: 0.125 watts.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test procedure

ANSI C63.10-2013 - Section 7.8.5

Test settings

The test follows ANSI C63.10-2013 – Section 7.8.5. Using the power sensor instead of a spectrum analyzer.

Note :

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A

Page (10) of (76)

KCTL**Test results****Ant 1**


Frequency(MHz)	Data rate(Mbps)	Measured output power(dBm)		Limit(dBm)
		Peak	Average	
2 402	1	4.20	3.46	20.97
2 441	1	5.14	4.51	
2 480	1	5.33	4.65	
2 402	2	2.31	-0.61	20.97
2 441	2	3.06	0.24	
2 480	2	3.71	0.87	
2 402	3	2.32	-0.88	20.97
2 441	3	3.19	0.04	
2 480	3	4.05	0.87	

Ant 2

Frequency(MHz)	Data rate(Mbps)	Measured output power(dBm)		Limit(dBm)
		Peak	Average	
2 402	1	6.74	6.46	20.97
2 441	1	7.13	6.85	
2 480	1	7.69	7.48	
2 402	2	6.23	4.69	20.97
2 441	2	6.72	5.50	
2 480	2	7.35	6.40	
2 402	3	6.37	4.70	20.97
2 441	3	6.83	5.51	
2 480	3	7.45	6.39	

7.2. Carrier frequency separation

Test setup



Limit

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test procedure

ANSI C63.10-2013 - Section 7.8.2

Test settings

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) \geq RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A

Page (12) of (76)

KCTL**Test results****Ant 1**

Frequency(MHz)	Data rate(Mbps)	Carrier frequency separation(MHz)	Limit(MHz)
2 402	1	1.002	0.663
2 441	1	1.002	0.625
2 480	1	1.017	0.627
2 402	2	0.987	0.883
2 441	2	0.993	0.831
2 480	2	1.167	0.829
2 402	3	1.023	0.859
2 441	3	1.314	0.855
2 480	3	1.122	0.849

Ant 2

Frequency(MHz)	Data rate(Mbps)	Carrier frequency separation(MHz)	Limit(MHz)
2 402	1	0.999	0.631
2 441	1	1.020	0.625
2 480	1	1.002	0.627
2 402	2	1.176	0.861
2 441	2	1.023	0.861
2 480	2	1.026	0.895
2 402	3	1.101	0.845
2 441	3	0.993	0.865
2 480	3	1.158	0.885

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A

Page (13) of (76)



Ant 1

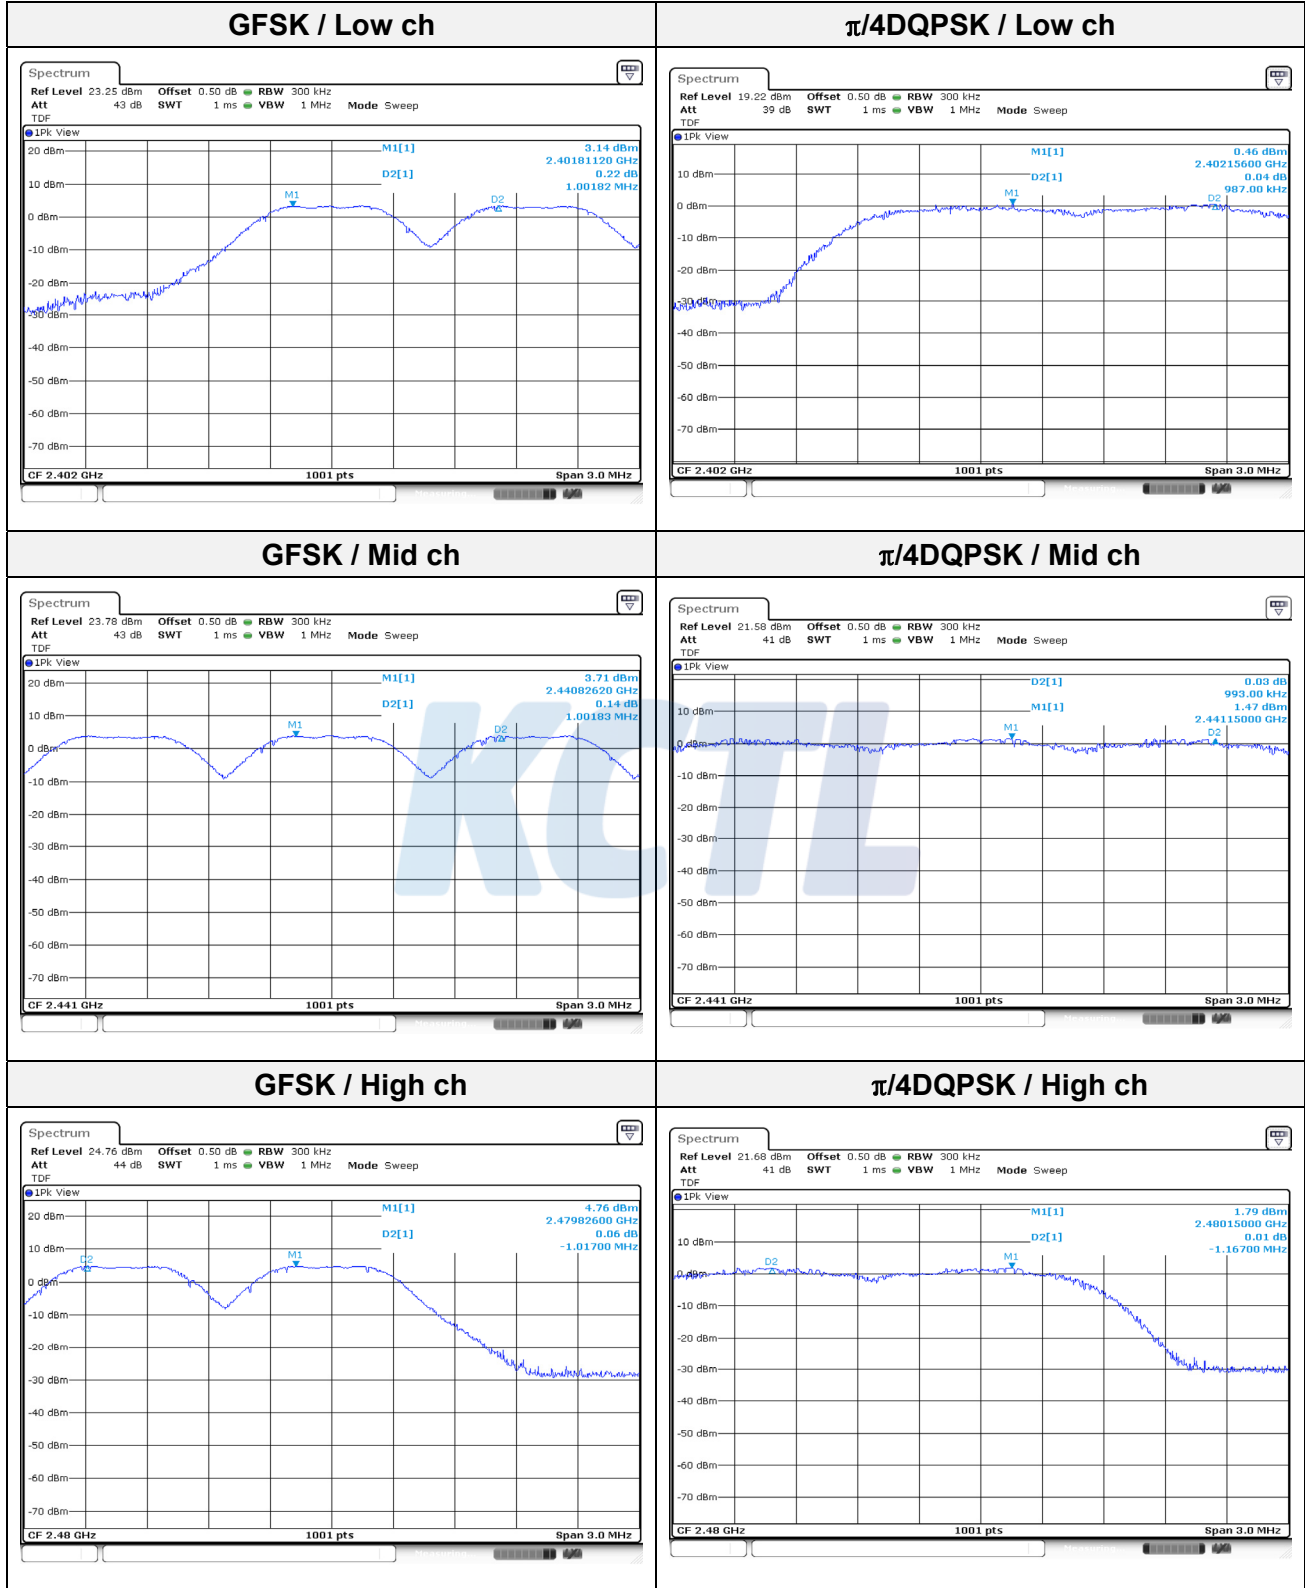

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (14) of (76)




8DPSK / Low ch

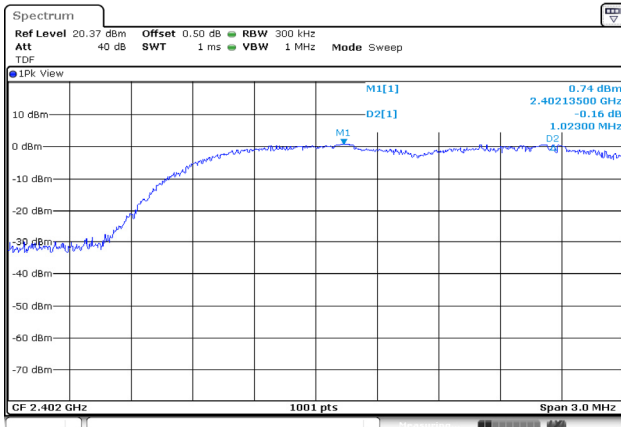

8DPSK / Mid ch

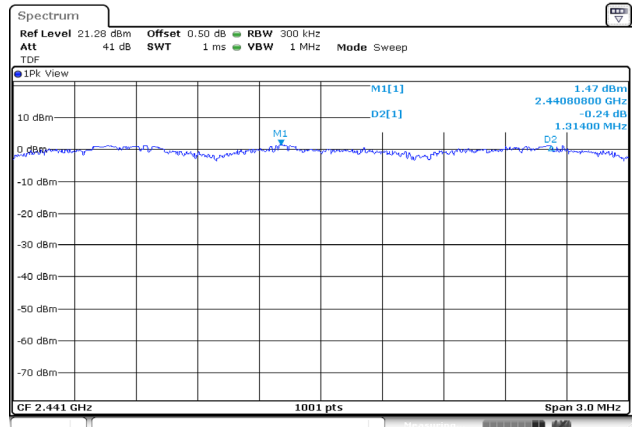


8DPSK / High ch

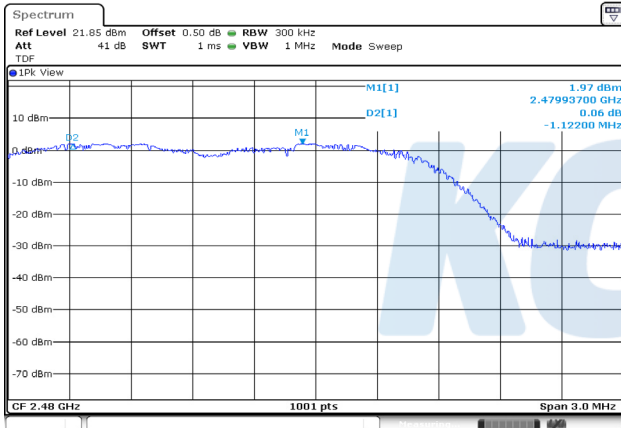

Blank

Ant 2

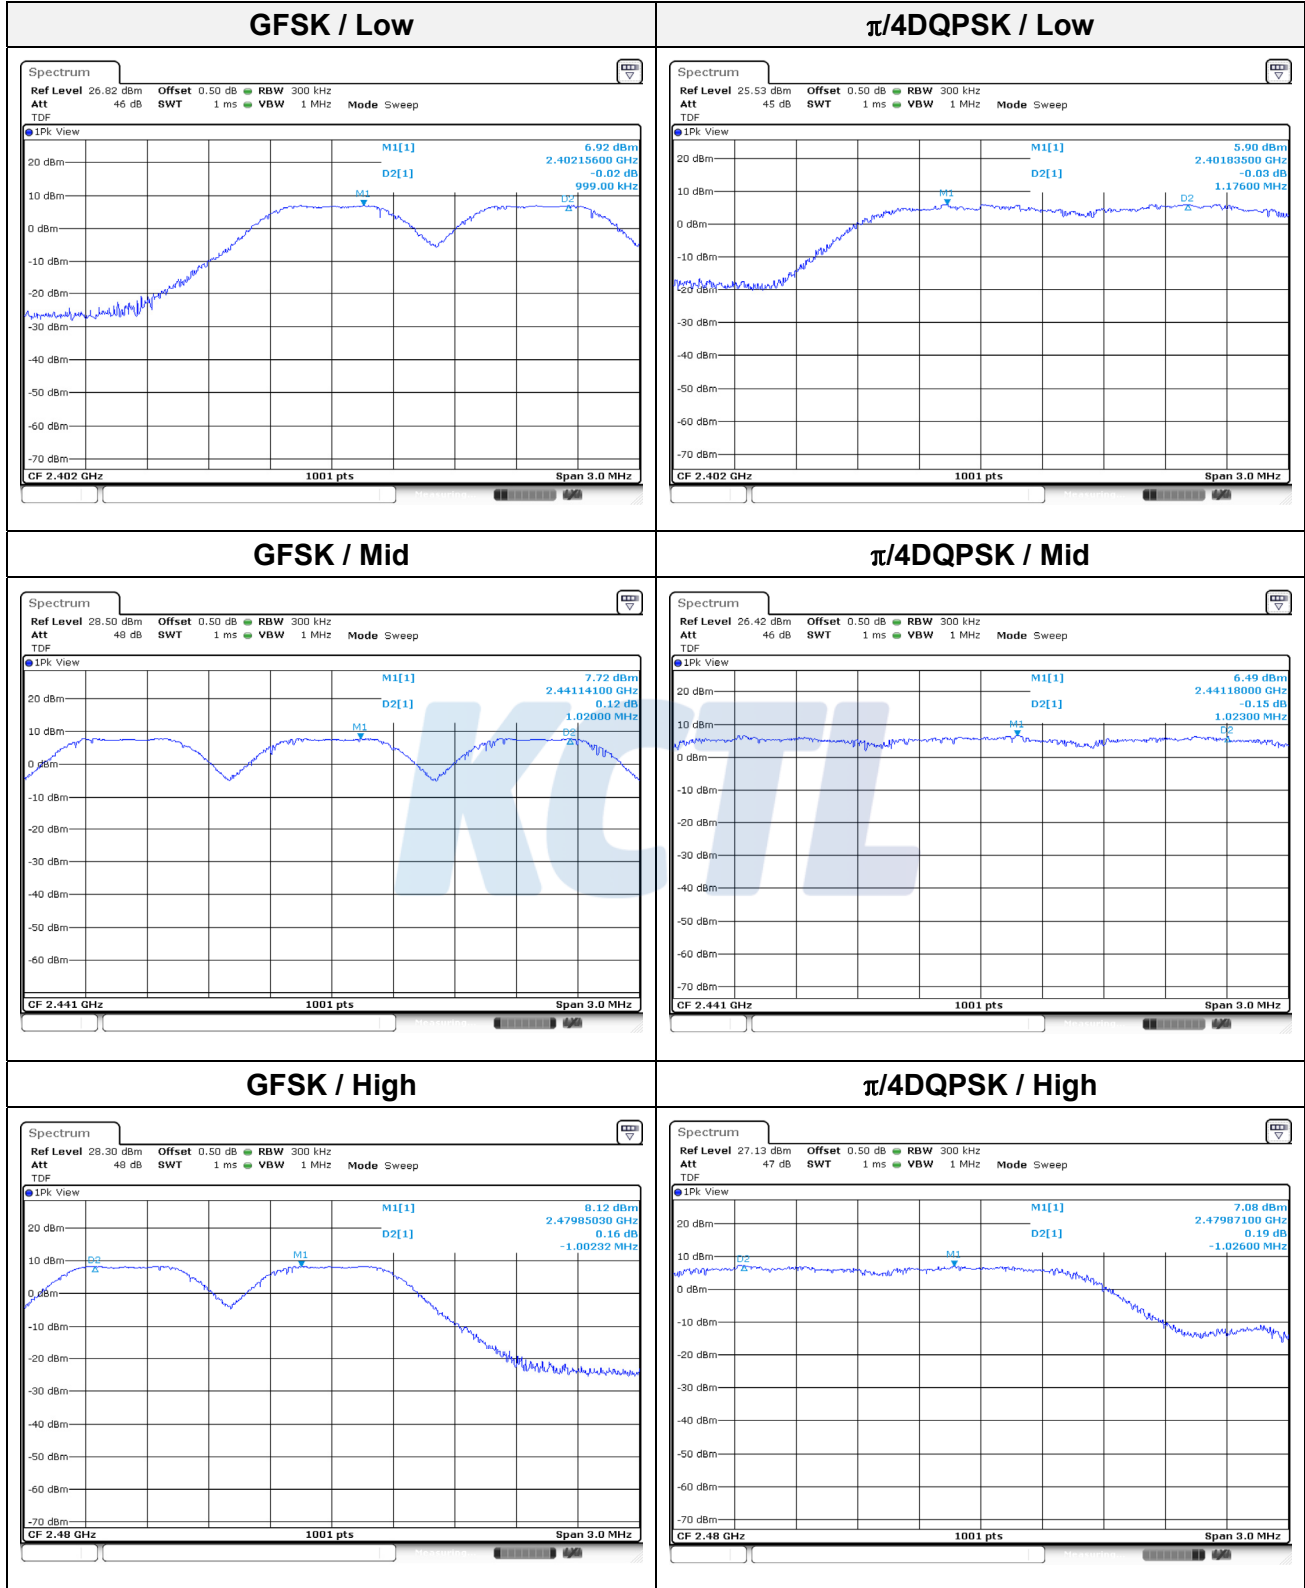

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (16) of (76)




8DPSK / Low

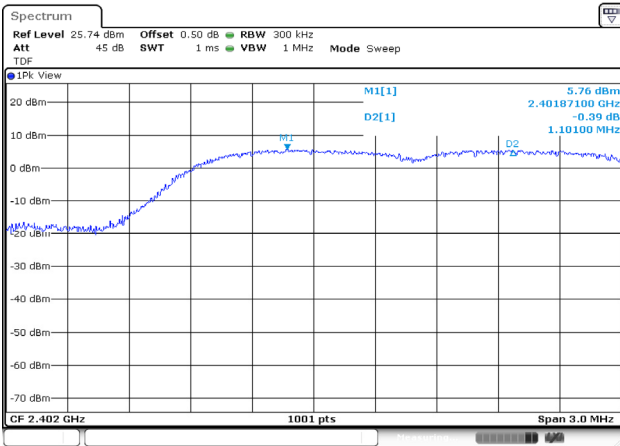

8DPSK / Low

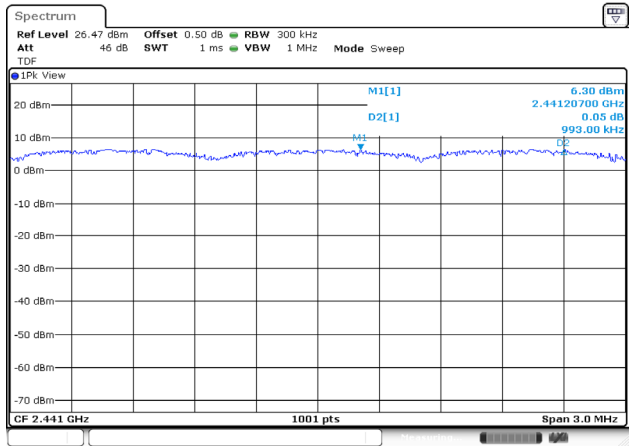


8DPSK / Low

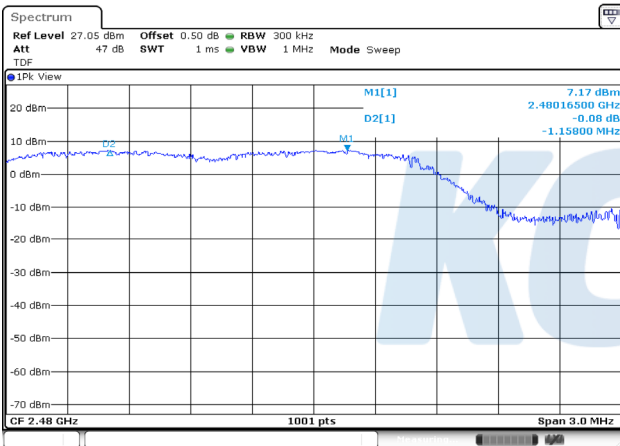

Blank

7.3. 20dB channel bandwidth

Test setup



Limit

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test procedure

ANSI C63.10-2013 - Section 6.9.2

Test settings

20dB channel bandwidth and Occupied bandwidth

The occupied bandwidth is measured as the width of the spectral envelope of the modulated signal, at an amplitude level reduced from a reference value by a specified ratio (or in decibels, a specified number of dB down from the reference value). Typical ratios, expressed in dB, are -6 dB, -20 dB, and -26 dB, corresponding to 6 dB BW, 20 dB BW, and 26 dB BW, respectively. In this subclause, the ratio is designated by “-xx dB.” The reference value is either the level of the unmodulated carrier or the highest level of the spectral envelope of the modulated signal, as stated by the applicable requirement. Some requirements might specify a specific maximum or minimum value for the “-xx dB” bandwidth; other requirements might specify that the “-xx dB” bandwidth be entirely contained within the authorized or designated frequency band.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
- b) Span: Two times and five times the OBW.
- c) RBW = 1 % to 5 % of the OBW and VBW ≥ 3 x RBW
- d) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Detector: peak
- g) Trace mode: max hold.
- h) Allow the trace to stabilize.
- i) Determine the “-xx dB down amplitude” using ((reference value) - xx). Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- j) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- k) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference

between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

Test results**Ant 1**


Frequency(MHz)	Data rate (Mbps)	20 dB Bandwidth (MHz)
2 402	1	0.994
2 441	1	0.938
2 480	1	0.941
2 402	2	1.325
2 441	2	1.247
2 480	2	1.244
2 402	3	1.289
2 441	3	1.283
2 480	3	1.274

Ant 2


Frequency(MHz)	Data rate (Mbps)	20 dB Bandwidth (MHz)
2 402	1	0.947
2 441	1	0.938
2 480	1	0.941
2 402	2	1.292
2 441	2	1.292
2 480	2	1.343
2 402	3	1.268
2 441	3	1.298
2 480	3	1.328

Ant 1


GFSK / Low ch.

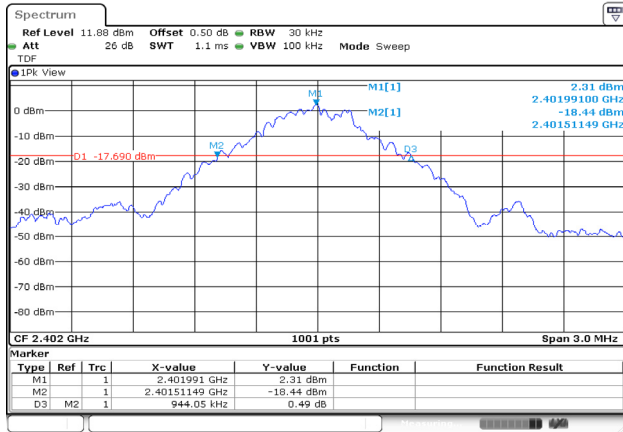


$\pi/4$ DQPSK / Low ch.

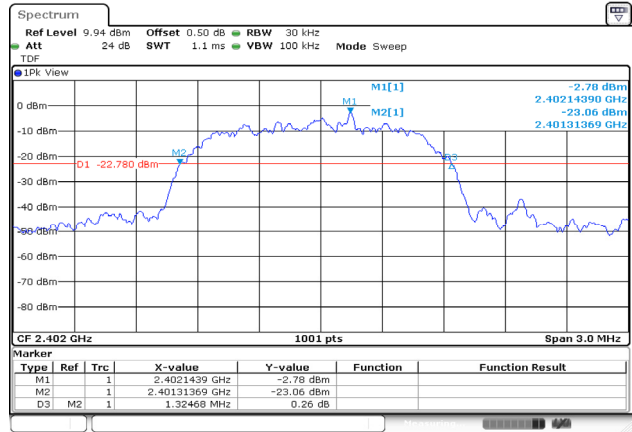


GFSK / Mid ch.

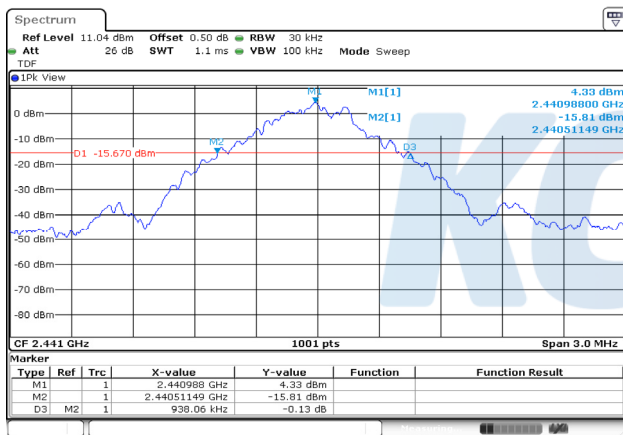


$\pi/4$ DQPSK / Mid ch.

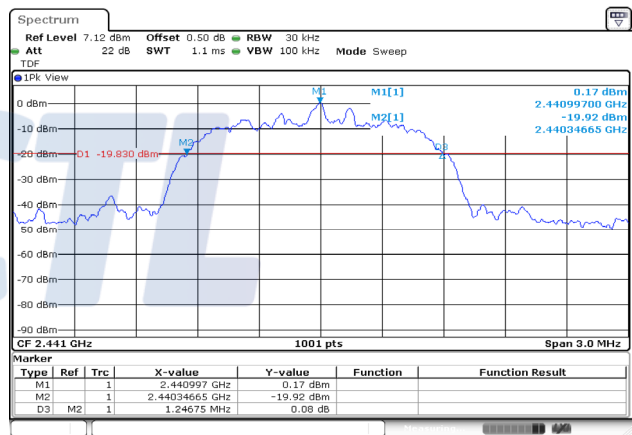

GFSK / High ch.

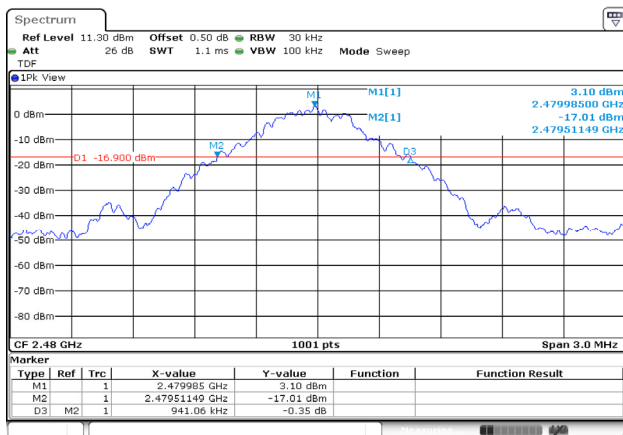

$\pi/4$ DQPSK / High ch.

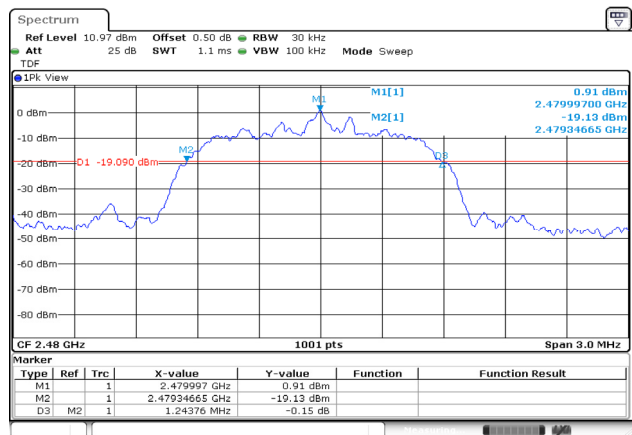

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (20) of (76)




8DPSK / Low ch.

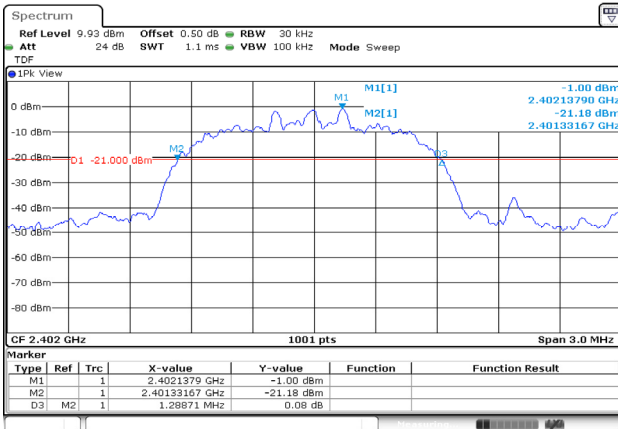

8DPSK / Mid ch.

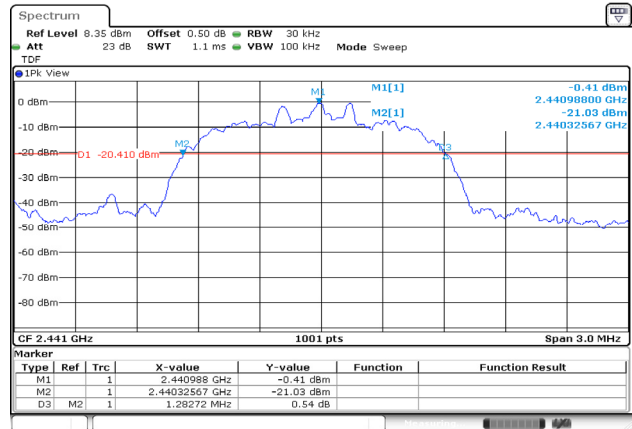

8DPSK / High ch.

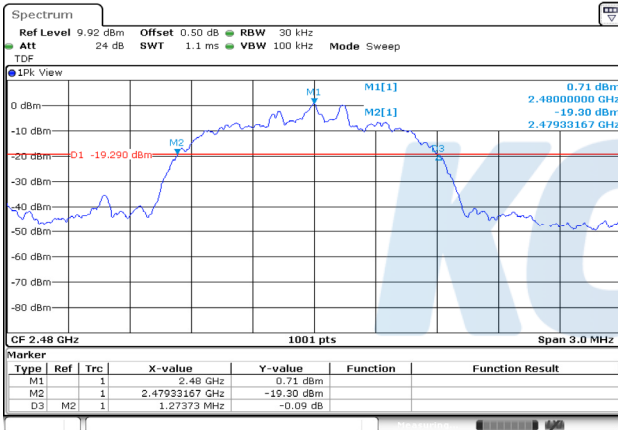

Blank

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR20-SRF0081-A

Page (21) of (76)




Ant 2


GFSK / Low ch.

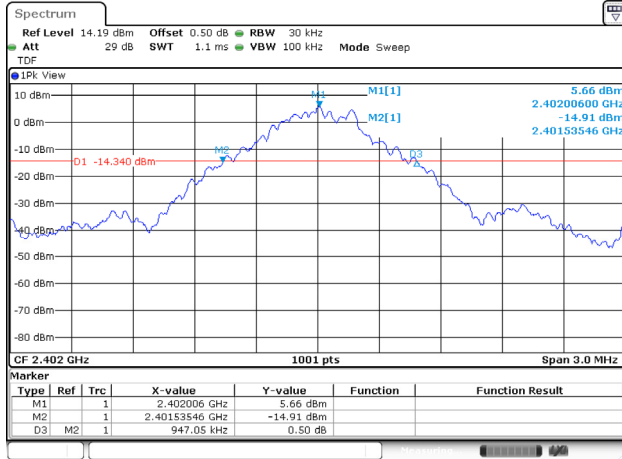


$\pi/4$ QPSK / Low ch.

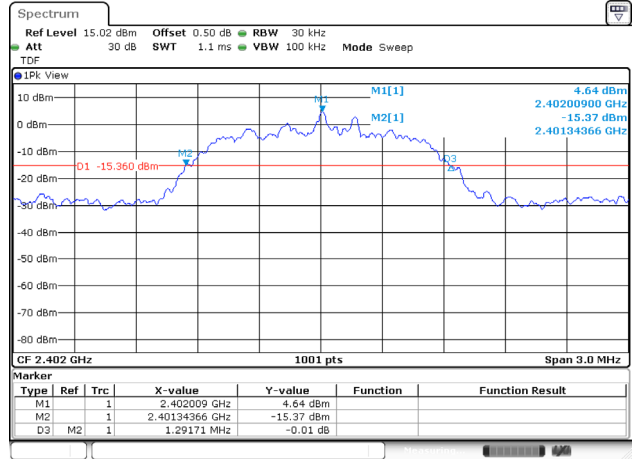


GFSK / Mid ch.

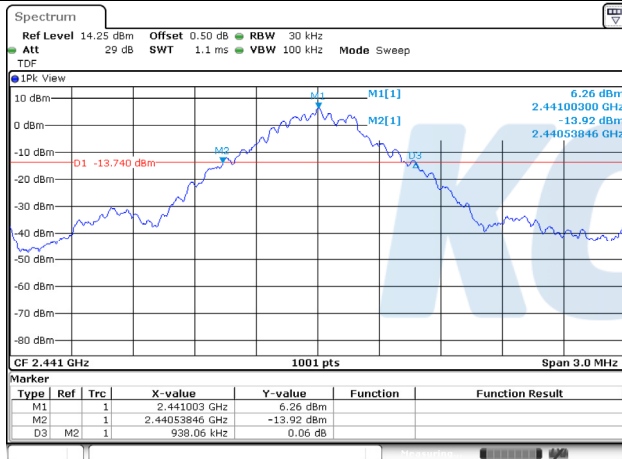


$\pi/4$ QPSK / Mid ch.

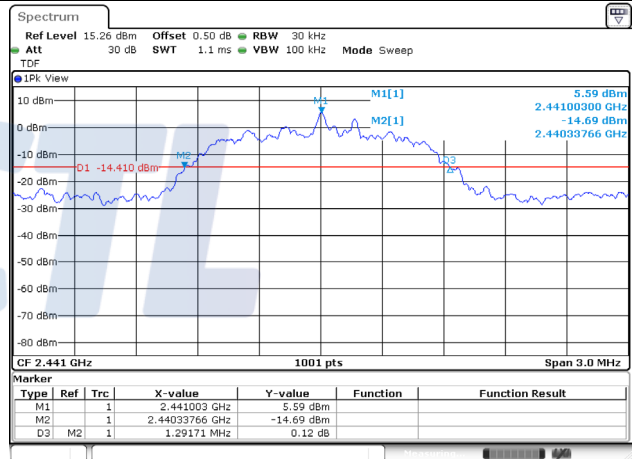

GFSK / High ch.

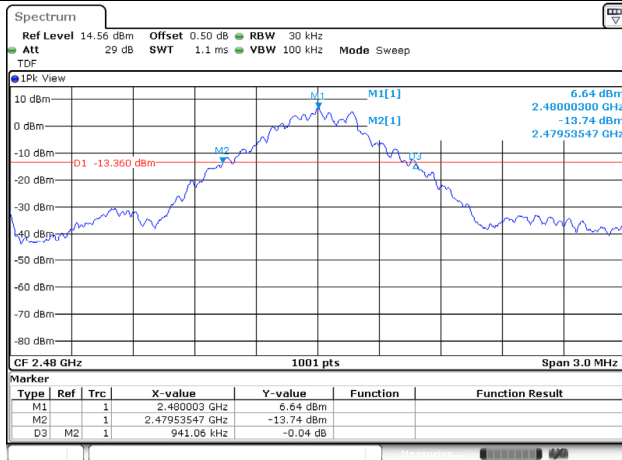

$\pi/4$ QPSK / High ch.

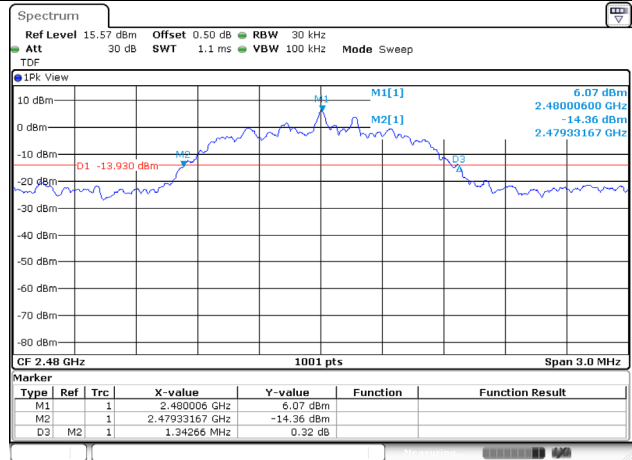

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A


Page (22) of (76)




8DPSK / Low ch.

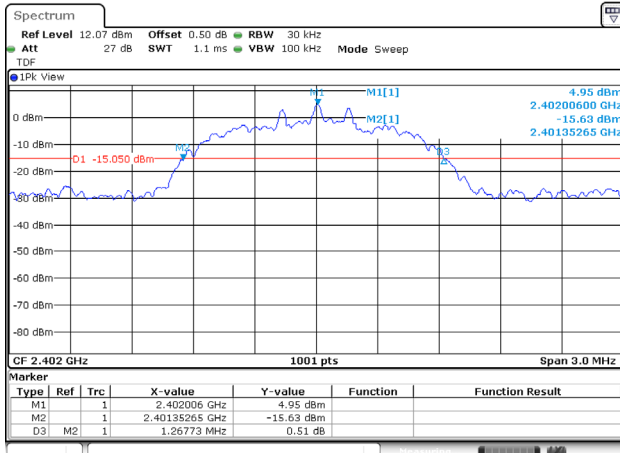

8DPSK / Mid ch.

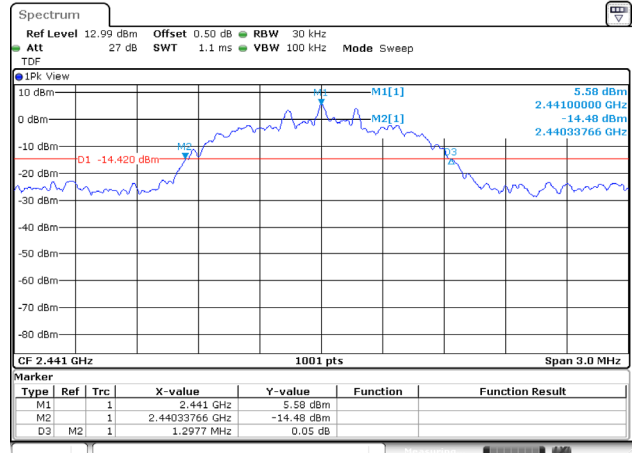


8DPSK / High ch.

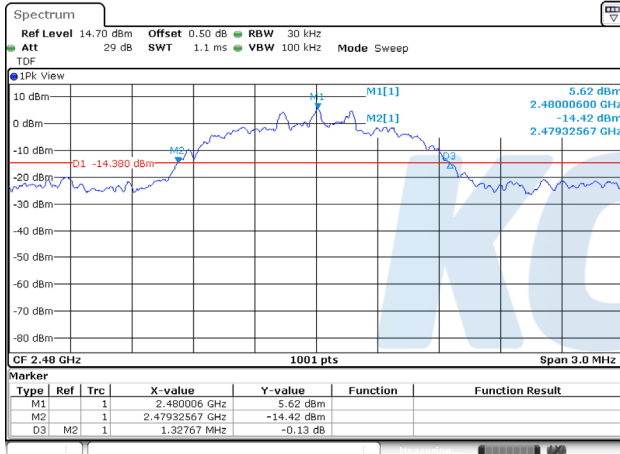

Blank

7.4. Number of hopping channels

Test setup



Limit

According to §15.247(a)(1)(iii), Frequency hopping systems in the 2 400-2 483.5 MHz band shall use at least 15 channels.

Test procedure

ANSI C63.10-2013 - Section 7.8.3

Test settings

- Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- VBW \geq RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Test results

Ant 1

Mode	Number of hopping channel	Limit
GFSK	79	≥ 15
$\pi/4$ DQPSK	79	≥ 15
8DPSK	79	≥ 15

Ant 2

Mode	Number of hopping channel	Limit
GFSK	79	≥ 15
$\pi/4$ DQPSK	79	≥ 15
8DPSK	79	≥ 15

Note : In case of AFH mode, minimum number of hopping channels is 20.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR20-SRF0081-A

Page (24) of (76)


KCTL

Ant 1


GFSK

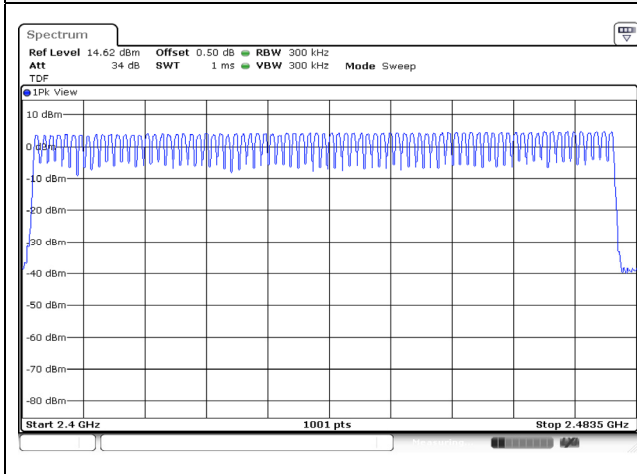

$\pi/4$ DQPSK

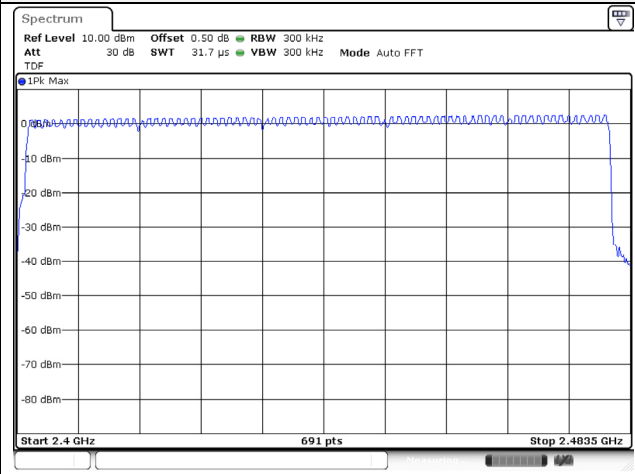

8DPSK

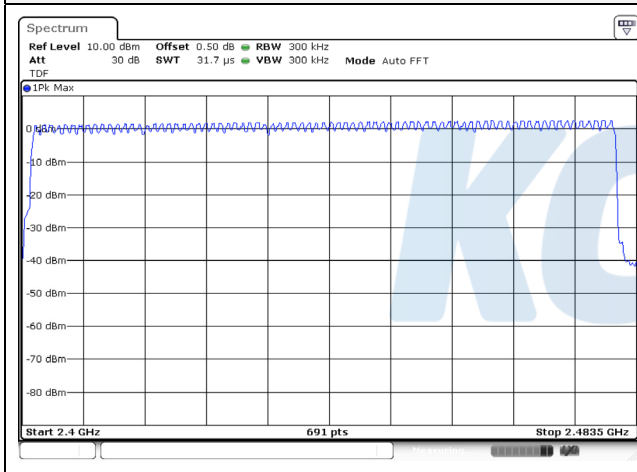

Blank

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR20-SRF0081-A

Page (25) of (76)




Ant 2


GFSK

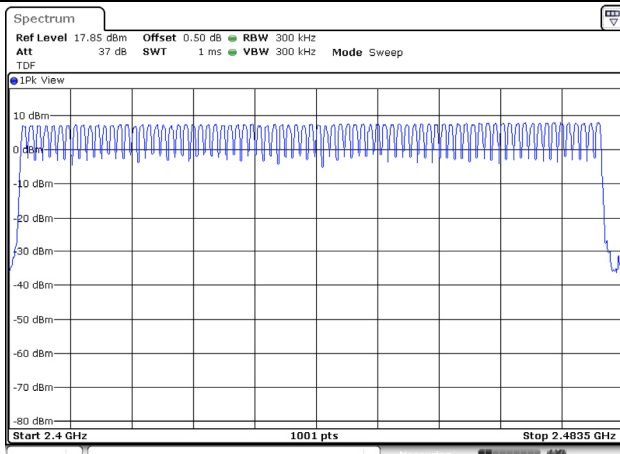

$\pi/4$ DQPSK

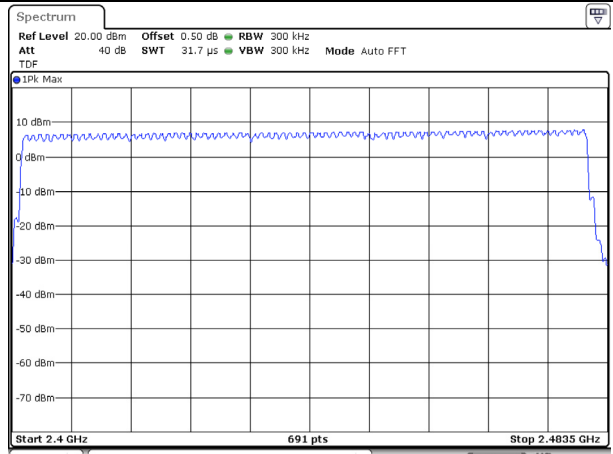


8DPSK

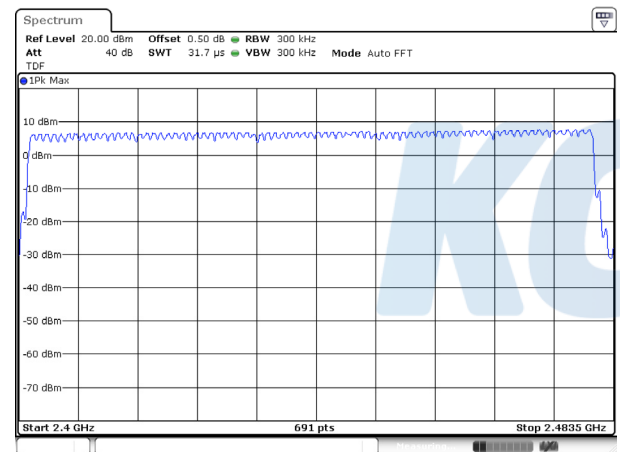

Blank

7.5. Time of occupancy(Dwell time)

Test setup



Limit

According to §15.247(a)(1)(iii), frequency hopping systems in the 2 400-2 483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test procedure

ANSI C63.10-2013 - Section 7.8.4

Test settings

- Span: Zero span, centered on a hopping channel.
- RBW \leq channel spacing and $\gg 1 / T$, where T is the expected dwell time per channel.
- Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- Detector function: Peak.
- Trace: Max hold.
- Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Test results**Ant 1****- Non-AFH**

Modulation	Frequency (MHz)	Pulse Width (ms)	Hopping rate (hop/s)	Number of Channels	Result (s)	Limit (s)
DH1	2 441	0.400	800.000	79	0.128	0.400
DH3	2 441	1.656	400.000	79	0.265	0.400
DH5	2 441	2.902	266.667	79	0.309	0.400
2-DH1	2 441	0.413	800.000	79	0.132	0.400
2-DH3	2 441	1.664	400.000	79	0.266	0.400
2-DH5	2 441	2.912	266.667	79	0.311	0.400
3-DH1	2 441	0.412	800.000	79	0.132	0.400
3-DH3	2 441	1.662	400.000	79	0.266	0.400
3-DH5	2 441	2.912	266.667	79	0.311	0.400

- AFH

Modulation	Frequency (MHz)	Pulse Width (ms)	Hopping rate (hop/s)	Number of Channels	Result (s)	Limit (s)
DH1	2 441	0.400	400.000	20	0.064	0.400
DH3	2 441	1.656	200.000	20	0.132	0.400
DH5	2 441	2.902	133.333	20	0.155	0.400
2-DH1	2 441	0.413	400.000	20	0.066	0.400
2-DH3	2 441	1.664	200.000	20	0.133	0.400
2-DH5	2 441	2.912	133.333	20	0.155	0.400
3-DH1	2 441	0.412	400.000	20	0.066	0.400
3-DH3	2 441	1.662	200.000	20	0.133	0.400
3-DH5	2 441	2.912	133.333	20	0.155	0.400

Notes :

1. Non-AFH

- Period Time: 0.4 sec x 79 channels = 31.6 sec
- Result (s)= (Hopping rate (hop/s/slot) / 79 channels) x 31.6 sec x Pulse width (ms)

2. AFH

- Period Time: 0.4 sec x 20 channels = 8 sec
- Result (s)= (Hopping rate (hop/s/slot) / 20 channels) x 8 sec x Pulse width (ms)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0081-A

Page (28) of (76)



Ant 2
- Non-AFH

Modulation	Frequency (MHz)	Pulse Width (ms)	Hopping rate (hop/s)	Number of Channels	Result (s)	Limit (s)
DH1	2 441	0.397	800.000	79	0.127	0.400
DH3	2 441	1.652	400.000	79	0.264	0.400
DH5	2 441	2.898	266.667	79	0.309	0.400
2-DH1	2 441	0.402	800.000	79	0.128	0.400
2-DH3	2 441	1.658	400.000	79	0.265	0.400
2-DH5	2 441	2.905	266.667	79	0.310	0.400
3-DH1	2 441	0.403	800.000	79	0.129	0.400
3-DH3	2 441	1.656	400.000	79	0.265	0.400
3-DH5	2 441	2.905	266.667	79	0.310	0.400

- AFH

Modulation	Frequency (MHz)	Pulse Width (ms)	Hopping rate (hop/s)	Number of Channels	Result (s)	Limit (s)
DH1	2 441	0.397	400.000	20	0.064	0.400
DH3	2 441	1.652	200.000	20	0.132	0.400
DH5	2 441	2.898	133.333	20	0.155	0.400
2-DH1	2 441	0.402	400.000	20	0.064	0.400
2-DH3	2 441	1.658	200.000	20	0.133	0.400
2-DH5	2 441	2.905	133.333	20	0.155	0.400
3-DH1	2 441	0.403	400.000	20	0.064	0.400
3-DH3	2 441	1.656	200.000	20	0.132	0.400
3-DH5	2 441	2.905	133.333	20	0.155	0.400

Notes :

1. Non-AFH

- Period Time: 0.4 sec x 79 channels = 31.6 sec
- Result (s)= (Hopping rate (hop/s/slot) / 79 channels) x 31.6 sec x Pulse width (ms)

2. AFH

- Period Time: 0.4 sec x 20 channels = 8 sec
- Result (s)= (Hopping rate (hop/s/slot) / 20 channels) x 8 sec x Pulse width (ms)