

TEST REPORT

Product Name: BLUETOOTH SPEAKER
FCC ID: 2APU8CQL1901-B
Trademark: Sure, LOMI, ART+SOUND, BROOKSTONE, POLAROID, ROOM 2 ROOM, MAHLI
Model Number: CQL1901-B, ARSKULLSPK
Prepared For: Conquer Industry Co., Ltd
Address: ROOM 1502-109, EASEY COMMERCIAL BUILDING, 253-261 HENNESSY ROAD, WANCHAI, Hong Kong
Manufacturer: Conquer Industry Co., Ltd
Address: ROOM 1502-109, EASEY COMMERCIAL BUILDING, 253-261 HENNESSY ROAD, WANCHAI, Hong Kong
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Nov. 29, 2022
Sample tested Date: Nov. 29, 2022 to Dec. 13, 2022
Issue Date: Dec. 13, 2022
Report No.: CTB221213001RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	34
8.1 Block Diagram Of Test Setup	34
8.2 Limit	34
8.3 Test procedure	34
8.4 Test Result	35
9. CONDUCTED PEAK OUTPUT POWER	42
9.1 Block Diagram Of Test Setup	42
9.2 Limit	42
9.3 Test procedure	42
9.4 Test Result	43
10. 20DB OCCUPIED BANDWIDTH	47
10.1 Block Diagram Of Test Setup	47
10.2 Limit	47
10.3 Test procedure	47
10.4 Test Result	47
11. CARRIER FREQUENCIES SEPARATION	51
11.1 Block Diagram Of Test Setup	51
11.2 Limit	51
11.3 Test procedure	51
11.4 Test Result	51
12. HOPPING CHANNEL NUMBER	55
12.1 Block Diagram Of Test Setup	55
12.2 Limit	55
12.3 Test procedure	55
12.4 Test Result	55

- 13. DWELL TIME** 57
- 13.1 Block Diagram Of Test Setup 57
- 13.2 Limit 57
- 13.3 Test procedure 57
- 13.4 Test Result 58
- 14. PSEUDORANDOM FREQUENCY** 62
- 14.1 Limit 62
- 14.2 Test procedure 62
- 14.3 Test Result 63
- 15. ANTENNA REQUIREMENT** 64
- 16. EUT TEST SETUP PHOTOGRAPHS** 65

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB221213001RFX	Dec. 13, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): CQL1901-B, ARSKULLSPK

Model Description: All the model are the same circuit and RF module, only for model name. Test sample model: CQL1901-B

Bluetooth Version: Bluetooth 5.0

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: Bluetooth: 2402-2480MHz

Max. RF output power: Bluetooth: 1.655dBm

Type of Modulation: Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK

Antenna installation: Bluetooth: PCB antenna

Antenna Gain: Bluetooth: -0.58dBi

Ratings: DC 5V charging from adapter
DC 3.7V from battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19

20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMAJ-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/


Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19



12	EZ-EMC	Frad	EMC-con3A1.1	/	/
----	--------	------	--------------	---	---

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

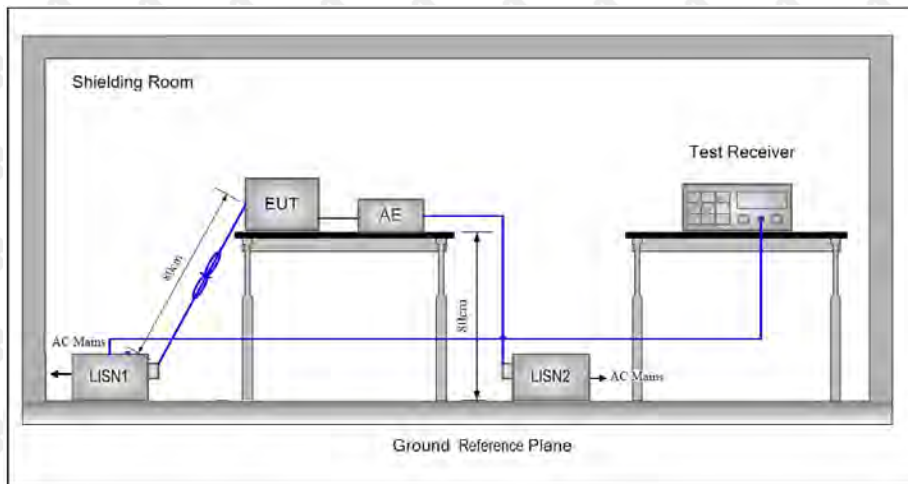

6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

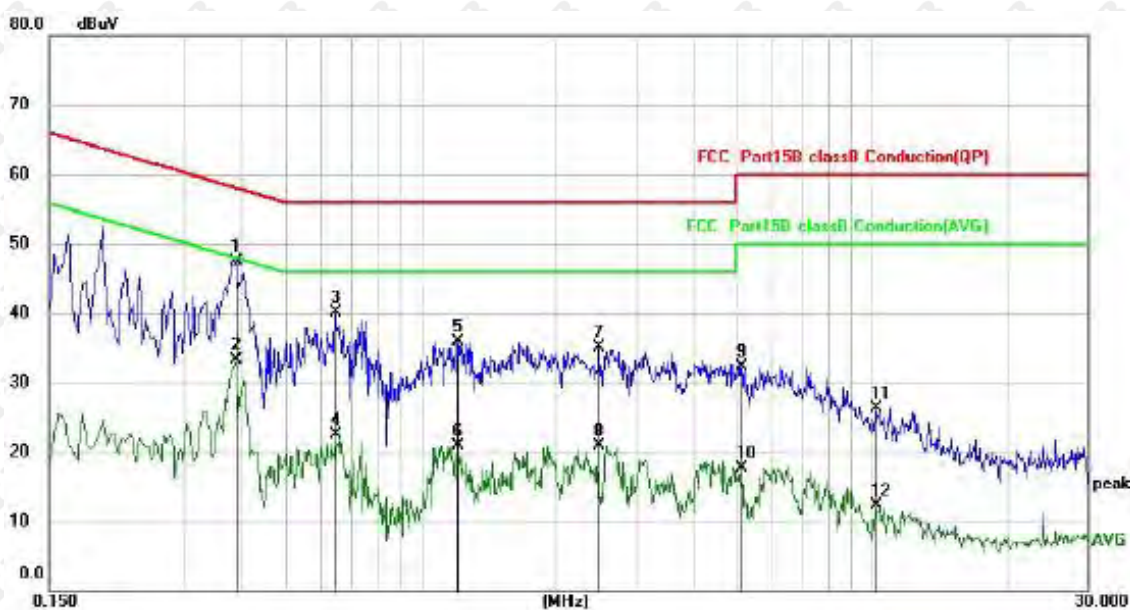


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.3899	37.46	9.98	47.44	58.07	-10.63	QP
2		0.3899	23.33	9.98	33.31	48.07	-14.76	AVG
3		0.6460	30.05	9.97	40.02	56.00	-15.98	QP
4		0.6460	12.61	9.97	22.58	46.00	-23.42	AVG
5		1.2059	25.90	9.99	35.89	56.00	-20.11	QP
6		1.2059	10.89	9.99	20.88	46.00	-25.12	AVG
7		2.4820	25.09	10.05	35.14	56.00	-20.86	QP
8		2.4820	10.84	10.05	20.89	46.00	-25.11	AVG
9		5.1180	22.20	10.17	32.37	60.00	-27.63	QP
10		5.1180	7.49	10.17	17.66	50.00	-32.34	AVG
11		10.2140	15.95	10.35	26.30	60.00	-33.70	QP
12		10.2140	2.00	10.35	12.35	50.00	-37.65	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

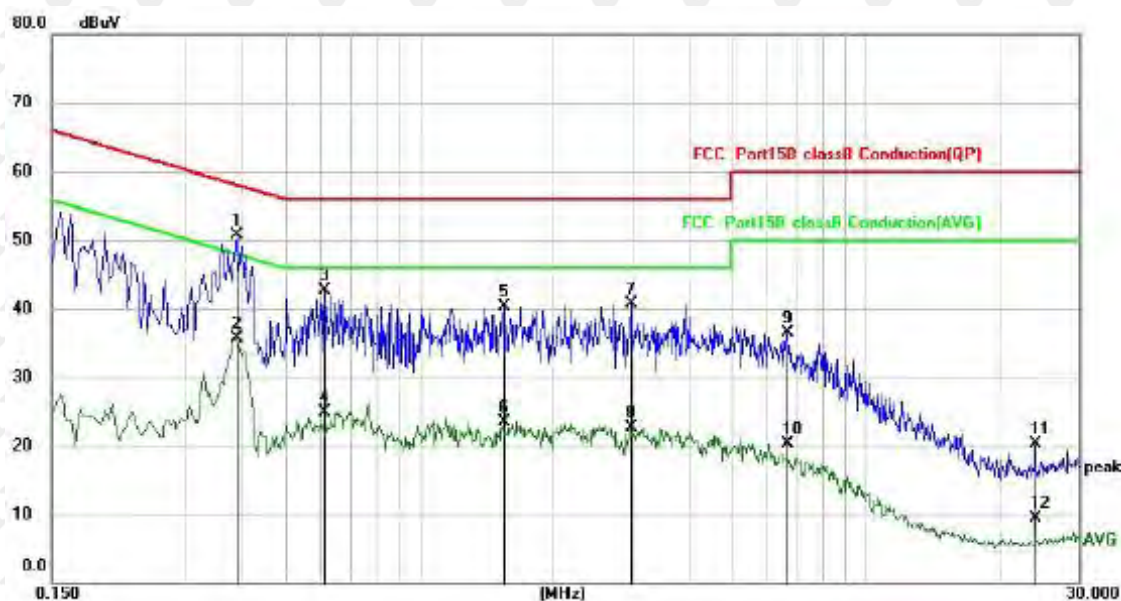

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.3899	40.68	9.98	50.66	58.07	-7.41	QP
2		0.3899	25.67	9.98	35.65	48.07	-12.42	AVG
3		0.6140	32.77	9.97	42.74	56.00	-13.26	QP
4		0.6140	14.90	9.97	24.87	46.00	-21.13	AVG
5		1.5500	30.25	10.01	40.26	56.00	-15.74	QP
6		1.5500	13.55	10.01	23.56	46.00	-22.44	AVG
7		2.9900	30.62	10.07	40.69	56.00	-15.31	QP
8		2.9900	12.61	10.07	22.68	46.00	-23.32	AVG
9		6.6380	26.35	10.23	36.58	60.00	-23.42	QP
10		6.6380	10.15	10.23	20.38	50.00	-29.62	AVG
11		24.0020	9.72	10.60	20.32	60.00	-39.68	QP
12		24.0020	-1.11	10.60	9.49	50.00	-40.51	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

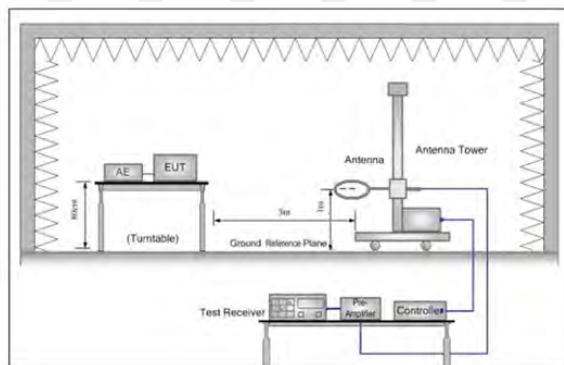


Figure 1. Below 30MHz

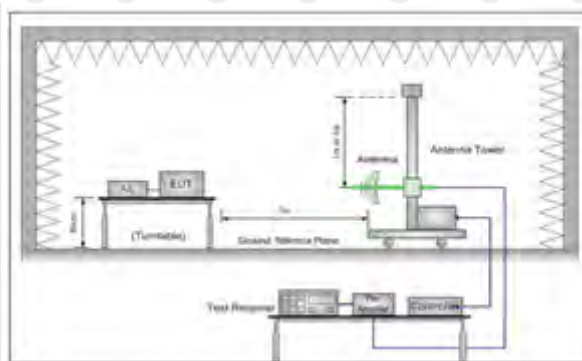


Figure 2. 30MHz to 1GHz

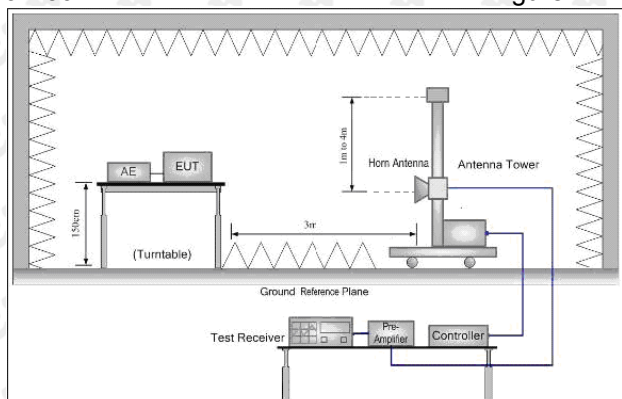


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
 Antenna polarity: H
 Worst case-GFSK(low channel)

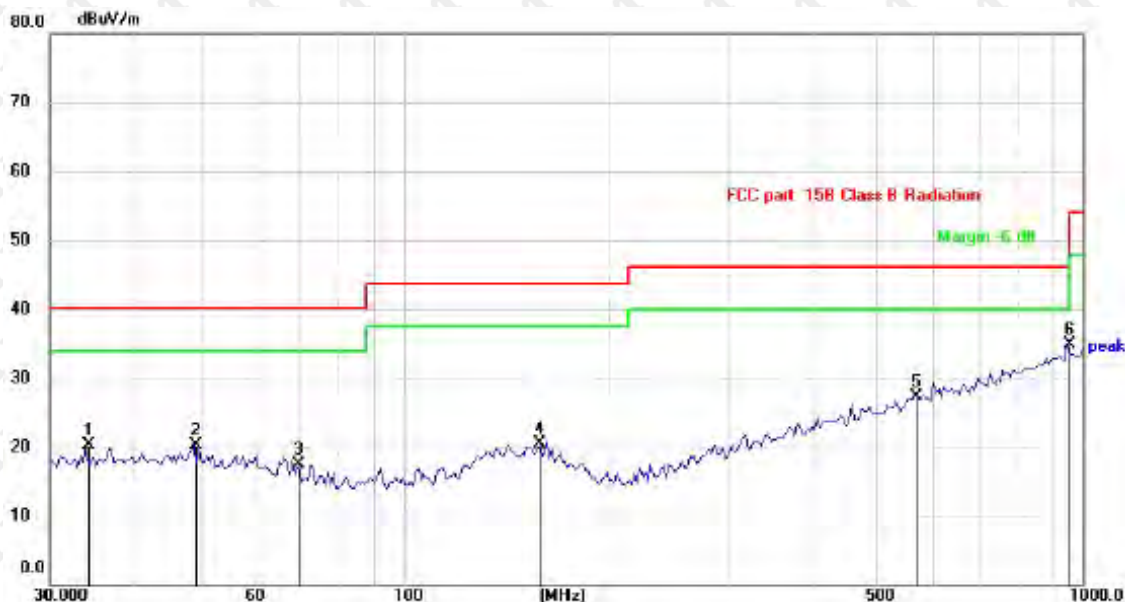

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		33.9174	26.92	-6.68	20.24	40.00	-19.76	QP
2		49.0145	26.94	-6.61	20.33	40.00	-19.67	QP
3		70.2132	26.58	-9.11	17.47	40.00	-22.53	QP
4		158.6677	25.90	-5.47	20.43	43.50	-23.07	QP
5		570.6100	25.66	1.74	27.40	46.00	-18.60	QP
6	*	948.7610	27.32	7.63	34.95	46.00	-11.05	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit

Antenna polarity: V
Worst case-GFSK(low channel)

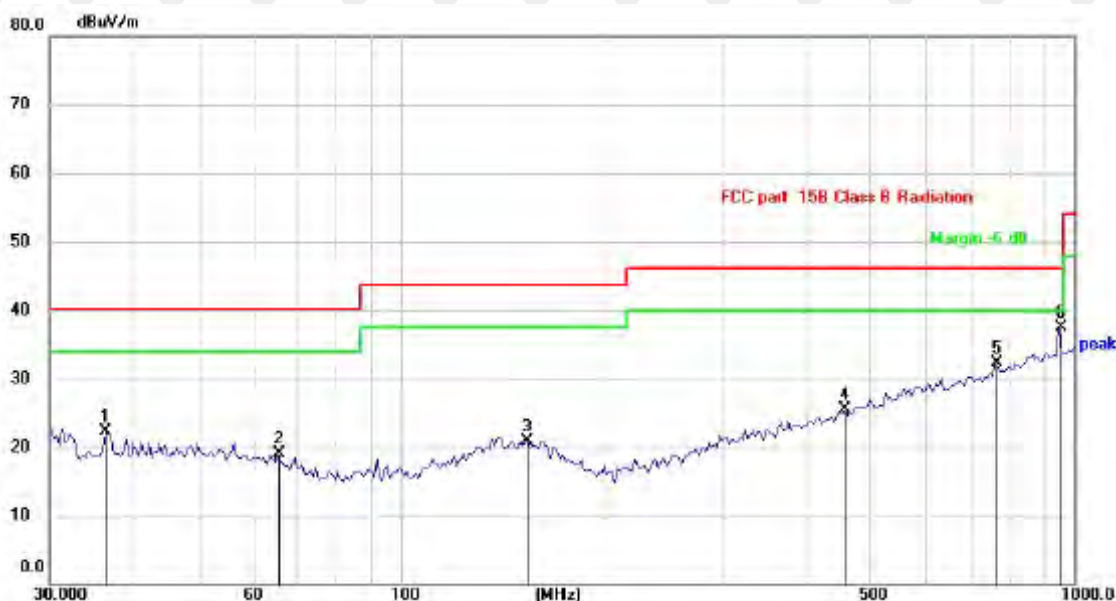

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		36.3814	28.95	-6.58	22.37	40.00	-17.63	QP
2		65.4579	27.48	-8.39	19.09	40.00	-20.91	QP
3		154.5493	26.35	-5.46	20.89	43.50	-22.61	QP
4		454.3100	26.69	-1.19	25.50	46.00	-20.50	QP
5		762.0385	27.22	5.05	32.27	46.00	-13.73	QP
6	*	948.7610	29.92	7.63	37.55	46.00	-8.45	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Right:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	57.36	-3.65	53.71	74.00	-20.29	peak
4804	48.88	-3.65	45.23	54.00	-8.77	AVG
7206	60.19	-0.95	59.24	74.00	-14.76	peak
7206	40.78	-0.95	39.83	54.00	-14.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	56.65	-3.65	53.00	74.00	-21.00	peak
4804	50.79	-3.65	47.14	54.00	-6.86	AVG
7206	59.45	-0.95	58.50	74.00	-15.50	peak
7206	41.15	-0.95	40.20	54.00	-13.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	59.41	-3.54	55.87	74.00	-18.13	peak
4882.00	46.69	-3.54	43.15	54.00	-10.85	AVG
7323.00	57.04	-0.81	56.23	74.00	-17.77	peak
7323.00	44.11	-0.81	43.30	54.00	-10.70	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	59.05	-3.54	55.51	74.00	-18.49	peak
4882.00	48.93	-3.54	45.39	54.00	-8.61	AVG
7323.00	58.19	-0.81	57.38	74.00	-16.62	peak
7323.00	41.30	-0.81	40.49	54.00	-13.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	59.01	-3.43	55.58	74.00	-18.42	peak
4960	50.16	-3.44	46.72	54.00	-7.28	AVG
7440	59.00	-0.77	58.23	74.00	-15.77	peak
7440	40.32	-0.77	39.55	54.00	-14.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	57.10	-3.43	53.67	74.00	-20.33	peak
4960	49.77	-3.44	46.33	54.00	-7.67	AVG
7440	59.04	-0.77	58.27	74.00	-15.73	peak
7440	39.62	-0.77	38.85	54.00	-15.15	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.66	-5.81	50.85	74.00	-23.15	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.31	-5.84	50.47	74.00	-23.53	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.05	-5.81	50.24	74.00	-23.76	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.58	-5.84	50.74	74.00	-23.26	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - I limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	54.59	-5.81	48.78	74.00	-25.22	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.41	-6.06	47.35	74.00	-26.65	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.13	-5.81	51.32	74.00	-22.68	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.22	-6.06	49.16	74.00	-24.84	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - I limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	54.85	-5.81	49.04	74.00	-24.96	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.63	-5.84	48.79	74.00	-25.21	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.29	-5.81	49.48	74.00	-24.52	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.40	-5.84	48.56	74.00	-25.44	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.98	-5.81	51.17	74.00	-22.83	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.65	-6.06	50.59	74.00	-23.41	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.01	-5.81	49.20	74.00	-24.80	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.65	-6.06	47.59	74.00	-26.41	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Left:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.77	-3.65	53.12	74.00	-20.88	peak
4804	48.65	-3.65	45.00	54.00	-9.00	AVG
7206	60.04	-0.95	59.09	74.00	-14.91	peak
7206	42.43	-0.95	41.48	54.00	-12.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.73	-3.65	55.08	74.00	-18.92	peak
4804	49.18	-3.65	45.53	54.00	-8.47	AVG
7206	59.94	-0.95	58.99	74.00	-15.01	peak
7206	41.76	-0.95	40.81	54.00	-13.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	60.21	-3.54	56.67	74.00	-17.33	peak
4882.00	47.16	-3.54	43.62	54.00	-10.38	AVG
7323.00	56.22	-0.81	55.41	74.00	-18.59	peak
7323.00	42.06	-0.81	41.25	54.00	-12.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	58.76	-3.54	55.22	74.00	-18.78	peak
4882.00	48.86	-3.54	45.32	54.00	-8.68	AVG
7323.00	57.97	-0.81	57.16	74.00	-16.84	peak
7323.00	42.91	-0.81	42.10	54.00	-11.90	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.28	-3.43	54.85	74.00	-19.15	peak
4960	47.30	-3.44	43.86	54.00	-10.14	AVG
7440	59.06	-0.77	58.29	74.00	-15.71	peak
7440	41.90	-0.77	41.13	54.00	-12.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.29	-3.43	54.86	74.00	-19.14	peak
4960	48.29	-3.44	44.85	54.00	-9.15	AVG
7440	58.86	-0.77	58.09	74.00	-15.91	peak
7440	40.46	-0.77	39.69	54.00	-14.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.68	-5.81	50.87	74.00	-23.13	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.45	-5.84	50.61	74.00	-23.39	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	57.08	-5.81	51.27	74.00	-22.73	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.41	-5.84	50.57	74.00	-23.43	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - I limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.89	-5.81	50.08	74.00	-23.92	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.77	-6.06	47.71	74.00	-26.29	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.87	-5.81	50.06	74.00	-23.94	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.51	-6.06	48.45	74.00	-25.55	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - I limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.30	-5.81	50.49	74.00	-23.51	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.01	-5.84	49.17	74.00	-24.83	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.03	-5.81	50.22	74.00	-23.78	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.41	-5.84	47.57	74.00	-26.43	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.55	-5.81	51.74	74.00	-22.26	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.93	-6.06	49.87	74.00	-24.13	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.39	-5.81	50.58	74.00	-23.42	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.87	-6.06	47.81	74.00	-26.19	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

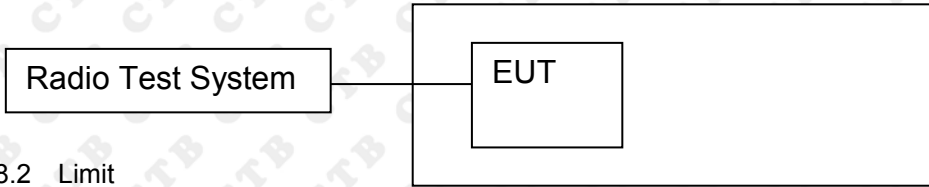


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result

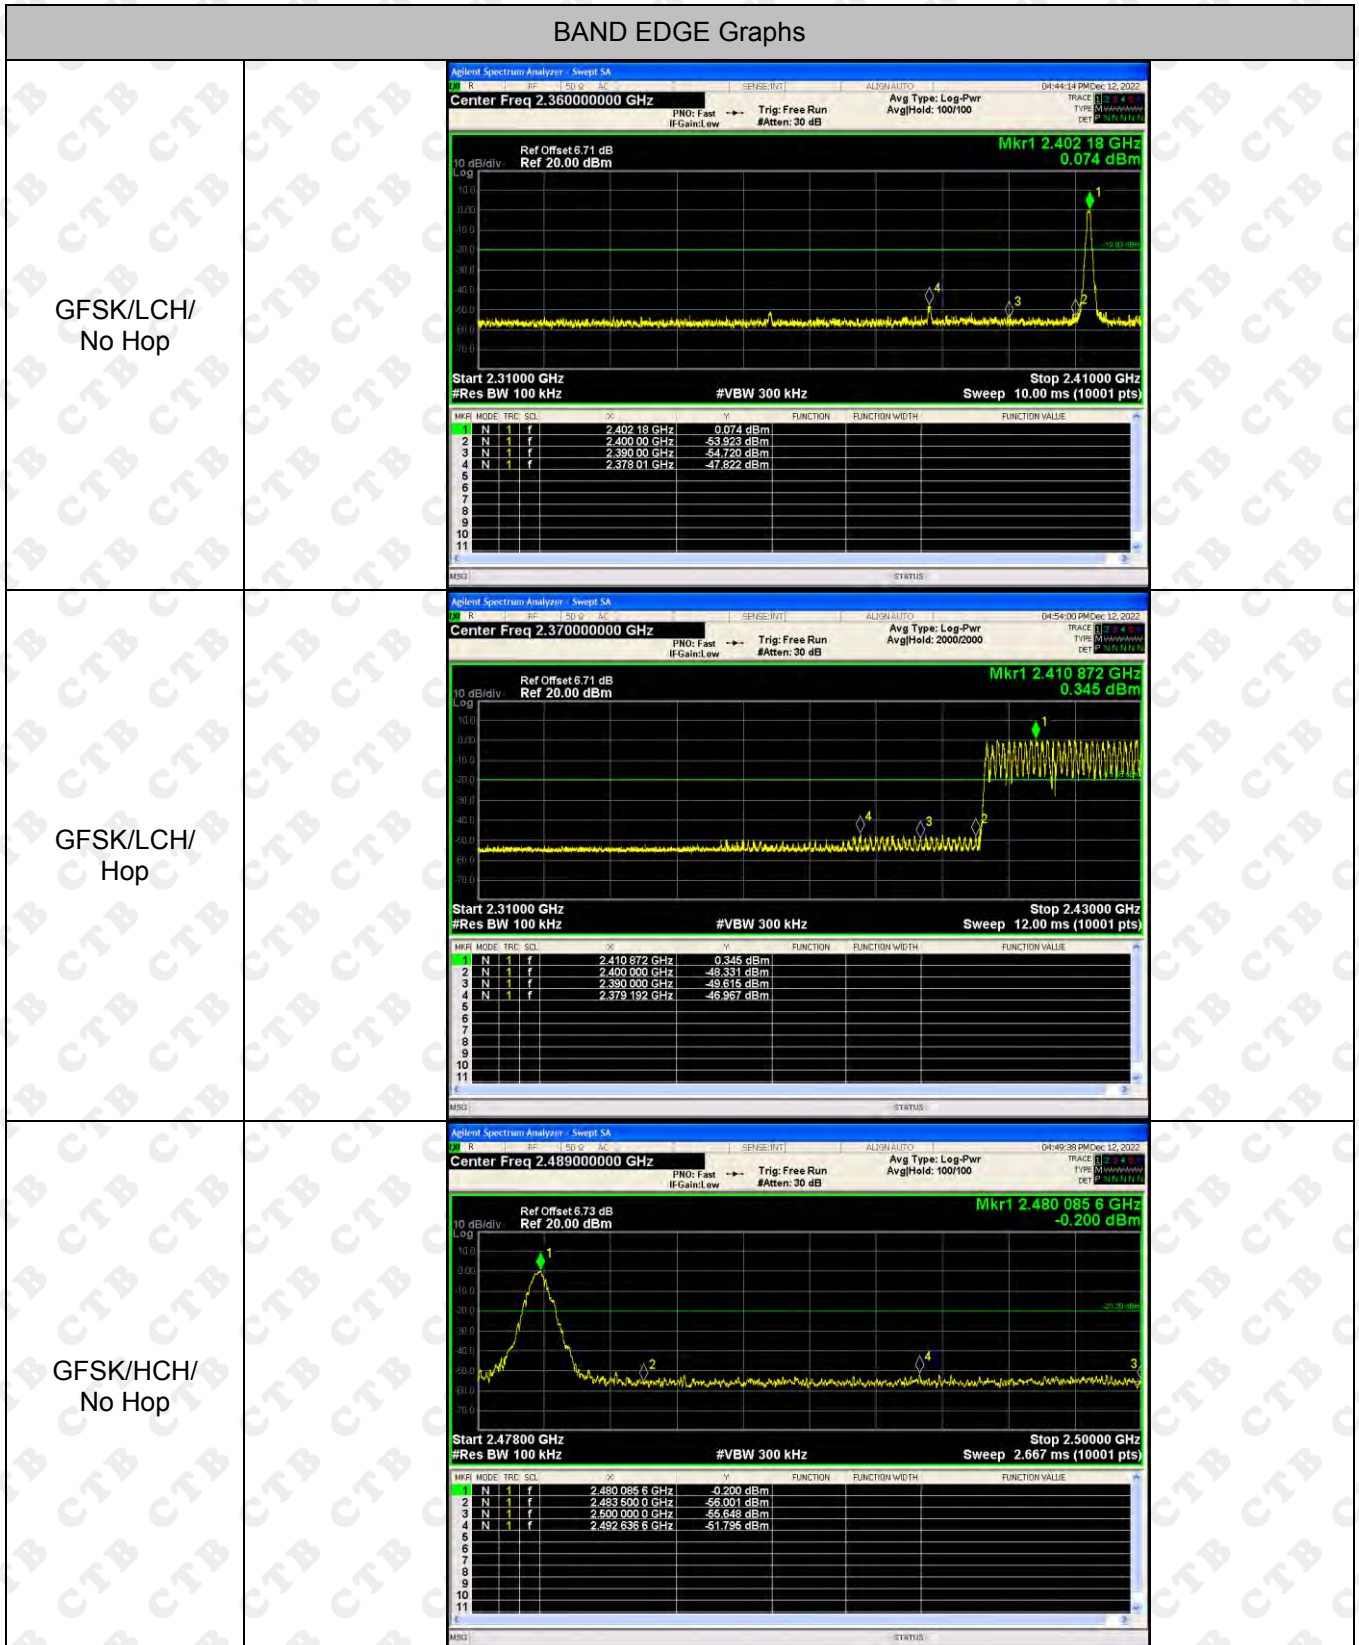


<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 6.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.47186875 GHz 0.062 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.47186875 GHz</td> <td>0.062 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.48350000 GHz</td> <td>-53.811 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.49000000 GHz</td> <td>-49.547 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.48698125 GHz</td> <td>-47.288 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.47186875 GHz	0.062 dBm				2	N	1	f	2.48350000 GHz	-53.811 dBm				3	N	1	f	2.49000000 GHz	-49.547 dBm				4	N	1	f	2.48698125 GHz	-47.288 dBm			
MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.47186875 GHz	0.062 dBm																																									
2	N	1	f	2.48350000 GHz	-53.811 dBm																																									
3	N	1	f	2.49000000 GHz	-49.547 dBm																																									
4	N	1	f	2.48698125 GHz	-47.288 dBm																																									
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.360000000 GHz</p> <p>Ref Offset 6.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.40187 GHz 0.272 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.41000 GHz #VBW 300 kHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40187 GHz</td> <td>0.272 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-55.382 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.39900 GHz</td> <td>-58.472 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.37803 GHz</td> <td>-48.199 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.40187 GHz	0.272 dBm				2	N	1	f	2.40000 GHz	-55.382 dBm				3	N	1	f	2.39900 GHz	-58.472 dBm				4	N	1	f	2.37803 GHz	-48.199 dBm			
MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.40187 GHz	0.272 dBm																																									
2	N	1	f	2.40000 GHz	-55.382 dBm																																									
3	N	1	f	2.39900 GHz	-58.472 dBm																																									
4	N	1	f	2.37803 GHz	-48.199 dBm																																									
<p>$\pi/4$DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.370000000 GHz</p> <p>Ref Offset 6.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.414868 GHz 0.231 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.43000 GHz #VBW 300 kHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.414868 GHz</td> <td>0.231 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-50.392 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.39000 GHz</td> <td>-51.994 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.392012 GHz</td> <td>-47.273 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.414868 GHz	0.231 dBm				2	N	1	f	2.40000 GHz	-50.392 dBm				3	N	1	f	2.39000 GHz	-51.994 dBm				4	N	1	f	2.392012 GHz	-47.273 dBm			
MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.414868 GHz	0.231 dBm																																									
2	N	1	f	2.40000 GHz	-50.392 dBm																																									
3	N	1	f	2.39000 GHz	-51.994 dBm																																									
4	N	1	f	2.392012 GHz	-47.273 dBm																																									

<p>$\pi/4$DQPSK/HCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.489000000 GHz</p> <p>Ref Offset: 6.73 dB Ref: 20.00 dBm</p> <p>Mkr1 2.479 867 8 GHz -0.060 dBm</p> <p>Start 2.478000 GHz #Res BW 100 kHz</p> <p>Stop 2.500000 GHz #VBW 300 kHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 867 8 GHz</td> <td>-0.060 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-53.807 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-54.833 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.499 227 8 GHz</td> <td>-51.340 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 867 8 GHz	-0.060 dBm				2	N	1	f	2.483 500 0 GHz	-53.807 dBm				3	N	1	f	2.500 000 0 GHz	-54.833 dBm				4	N	1	f	2.499 227 8 GHz	-51.340 dBm			
MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 867 8 GHz	-0.060 dBm																																									
2	N	1	f	2.483 500 0 GHz	-53.807 dBm																																									
3	N	1	f	2.500 000 0 GHz	-54.833 dBm																																									
4	N	1	f	2.499 227 8 GHz	-51.340 dBm																																									
<p>$\pi/4$DQPSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset: 6.73 dB Ref: 20.00 dBm</p> <p>Mkr1 2.478 868 75 GHz 0.157 dBm</p> <p>Start 2.437500 GHz #Res BW 100 kHz</p> <p>Stop 2.500000 GHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.478 868 75 GHz</td> <td>0.157 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-53.130 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-47.991 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.494 000 00 GHz</td> <td>-47.103 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.478 868 75 GHz	0.157 dBm				2	N	1	f	2.483 500 00 GHz	-53.130 dBm				3	N	1	f	2.500 000 00 GHz	-47.991 dBm				4	N	1	f	2.494 000 00 GHz	-47.103 dBm			
MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.478 868 75 GHz	0.157 dBm																																									
2	N	1	f	2.483 500 00 GHz	-53.130 dBm																																									
3	N	1	f	2.500 000 00 GHz	-47.991 dBm																																									
4	N	1	f	2.494 000 00 GHz	-47.103 dBm																																									
<p>8DPSK/LCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.360000000 GHz</p> <p>Ref Offset: 6.71 dB Ref: 20.00 dBm</p> <p>Mkr1 2.402 04 GHz -0.473 dBm</p> <p>Start 2.310000 GHz #Res BW 100 kHz</p> <p>Stop 2.410000 GHz #VBW 300 kHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 04 GHz</td> <td>-0.473 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-54.004 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-55.724 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.378 03 GHz</td> <td>-49.747 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 04 GHz	-0.473 dBm				2	N	1	f	2.400 00 GHz	-54.004 dBm				3	N	1	f	2.390 00 GHz	-55.724 dBm				4	N	1	f	2.378 03 GHz	-49.747 dBm			
MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 04 GHz	-0.473 dBm																																									
2	N	1	f	2.400 00 GHz	-54.004 dBm																																									
3	N	1	f	2.390 00 GHz	-55.724 dBm																																									
4	N	1	f	2.378 03 GHz	-49.747 dBm																																									


<p>8DPSK /LCH/Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.426 868 GHz</td> <td>0.087 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-51.334 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-50.074 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.386 840 GHz</td> <td>-48.524 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.426 868 GHz	0.087 dBm				2	N	1	f	2.400 000 GHz	-51.334 dBm				3	N	1	f	2.390 000 GHz	-50.074 dBm				4	N	1	f	2.386 840 GHz	-48.524 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.426 868 GHz	0.087 dBm																																									
2	N	1	f	2.400 000 GHz	-51.334 dBm																																									
3	N	1	f	2.390 000 GHz	-50.074 dBm																																									
4	N	1	f	2.386 840 GHz	-48.524 dBm																																									
<p>8DPSK /HCH/No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 867 8 GHz</td> <td>0.070 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-54.682 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-53.357 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.488 853 8 GHz</td> <td>-50.834 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 867 8 GHz	0.070 dBm				2	N	1	f	2.483 500 0 GHz	-54.682 dBm				3	N	1	f	2.500 000 0 GHz	-53.357 dBm				4	N	1	f	2.488 853 8 GHz	-50.834 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 867 8 GHz	0.070 dBm																																									
2	N	1	f	2.483 500 0 GHz	-54.682 dBm																																									
3	N	1	f	2.500 000 0 GHz	-53.357 dBm																																									
4	N	1	f	2.488 853 8 GHz	-50.834 dBm																																									
<p>8DPSK /HCH/Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.472 875 00 GHz</td> <td>0.246 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-52.807 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-52.268 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.482 893 75 GHz</td> <td>-47.888 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.472 875 00 GHz	0.246 dBm				2	N	1	f	2.483 500 00 GHz	-52.807 dBm				3	N	1	f	2.500 000 00 GHz	-52.268 dBm				4	N	1	f	2.482 893 75 GHz	-47.888 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.472 875 00 GHz	0.246 dBm																																									
2	N	1	f	2.483 500 00 GHz	-52.807 dBm																																									
3	N	1	f	2.500 000 00 GHz	-52.268 dBm																																									
4	N	1	f	2.482 893 75 GHz	-47.888 dBm																																									

RF Conducted Spurious Emissions Graphs


GFSK/LCH

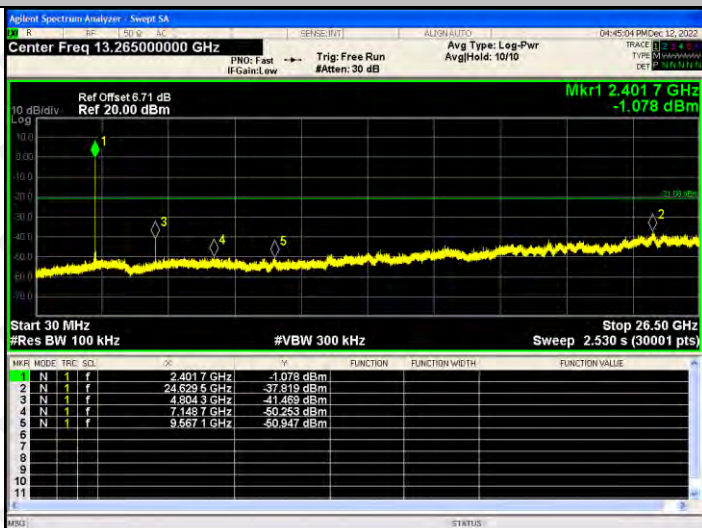





GFSK/MCH

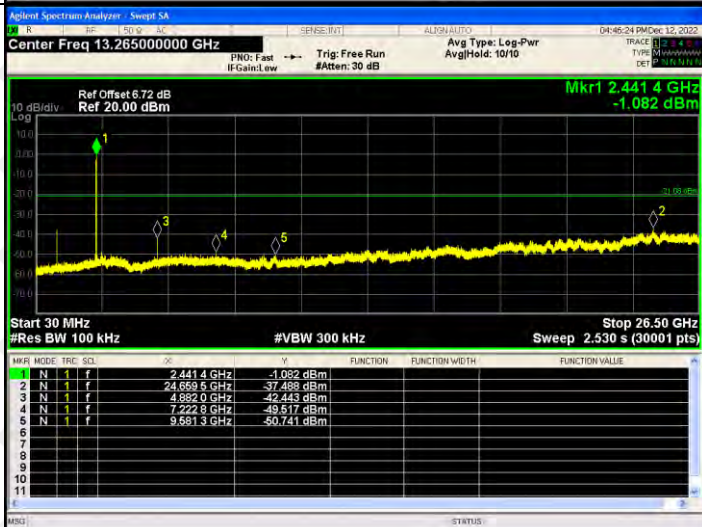

GFSK/HCH

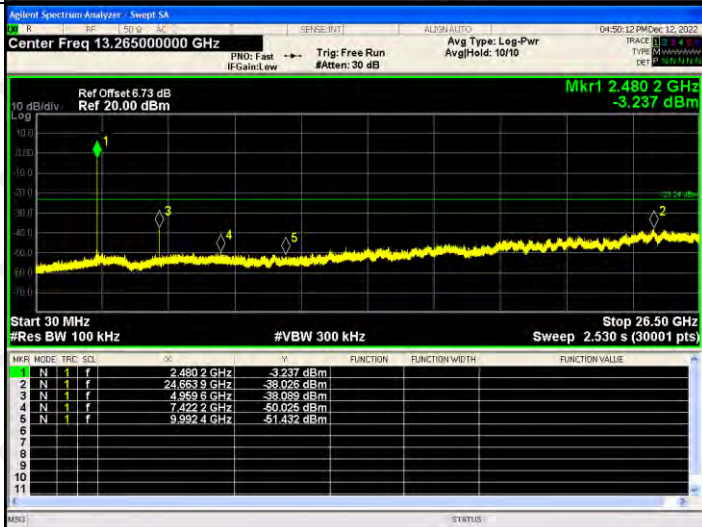

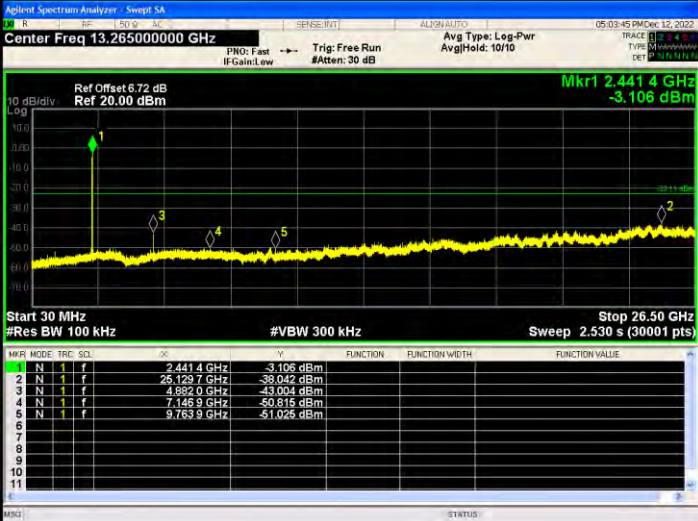
<p>$\pi/4$DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-1.566 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.1041 GHz</td> <td>-37.330 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8923 GHz</td> <td>-45.147 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1045 GHz</td> <td>-50.910 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6574 GHz</td> <td>-50.350 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-1.566 dBm				2	N	1	f	26.1041 GHz	-37.330 dBm				3	N	1	f	4.8923 GHz	-45.147 dBm				4	N	1	f	7.1045 GHz	-50.910 dBm				5	N	1	f	9.6574 GHz	-50.350 dBm				
MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4017 GHz	-1.566 dBm																																																			
2	N	1	f	26.1041 GHz	-37.330 dBm																																																			
3	N	1	f	4.8923 GHz	-45.147 dBm																																																			
4	N	1	f	7.1045 GHz	-50.910 dBm																																																			
5	N	1	f	9.6574 GHz	-50.350 dBm																																																			
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>-3.106 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.1237 GHz</td> <td>-38.042 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8920 GHz</td> <td>-43.004 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1469 GHz</td> <td>-50.815 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7639 GHz</td> <td>-51.025 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-3.106 dBm				2	N	1	f	26.1237 GHz	-38.042 dBm				3	N	1	f	4.8920 GHz	-43.004 dBm				4	N	1	f	7.1469 GHz	-50.815 dBm				5	N	1	f	9.7639 GHz	-51.025 dBm				
MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4414 GHz	-3.106 dBm																																																			
2	N	1	f	26.1237 GHz	-38.042 dBm																																																			
3	N	1	f	4.8920 GHz	-43.004 dBm																																																			
4	N	1	f	7.1469 GHz	-50.815 dBm																																																			
5	N	1	f	9.7639 GHz	-51.025 dBm																																																			
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-4.390 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.1465 GHz</td> <td>-38.278 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8695 GHz</td> <td>-42.871 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4854 GHz</td> <td>-50.729 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9086 GHz</td> <td>-51.199 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-4.390 dBm				2	N	1	f	26.1465 GHz	-38.278 dBm				3	N	1	f	4.8695 GHz	-42.871 dBm				4	N	1	f	7.4854 GHz	-50.729 dBm				5	N	1	f	9.9086 GHz	-51.199 dBm				
MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4802 GHz	-4.390 dBm																																																			
2	N	1	f	26.1465 GHz	-38.278 dBm																																																			
3	N	1	f	4.8695 GHz	-42.871 dBm																																																			
4	N	1	f	7.4854 GHz	-50.729 dBm																																																			
5	N	1	f	9.9086 GHz	-51.199 dBm																																																			
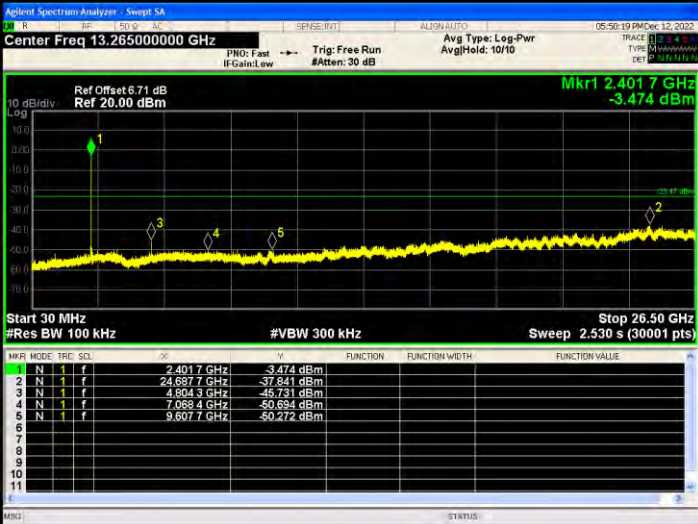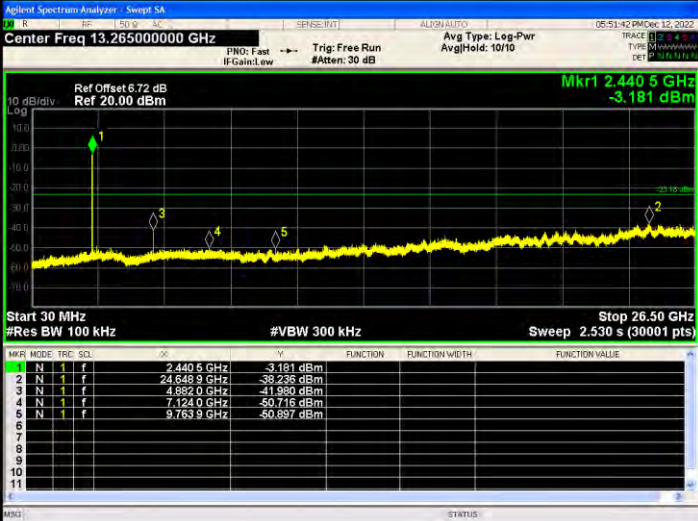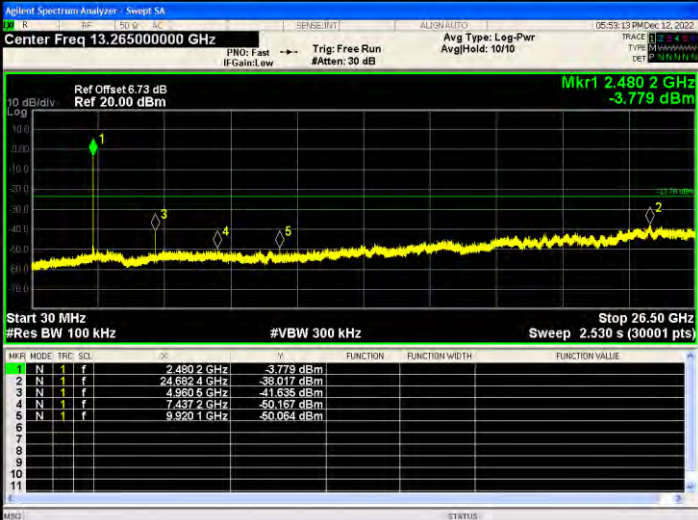
<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>Mk1</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-3.474 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6877 GHz</td> <td>-37.841 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8243 GHz</td> <td>-45.721 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.0684 GHz</td> <td>-50.634 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6077 GHz</td> <td>-50.272 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk1	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-3.474 dBm				2	N	1	f	24.6877 GHz	-37.841 dBm				3	N	1	f	4.8243 GHz	-45.721 dBm				4	N	1	f	7.0684 GHz	-50.634 dBm				5	N	1	f	9.6077 GHz	-50.272 dBm				
Mk1	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4017 GHz	-3.474 dBm																																																			
2	N	1	f	24.6877 GHz	-37.841 dBm																																																			
3	N	1	f	4.8243 GHz	-45.721 dBm																																																			
4	N	1	f	7.0684 GHz	-50.634 dBm																																																			
5	N	1	f	9.6077 GHz	-50.272 dBm																																																			
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>Mk1</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4405 GHz</td> <td>-3.181 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6489 GHz</td> <td>-38.236 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8890 GHz</td> <td>-41.930 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1240 GHz</td> <td>-50.716 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7639 GHz</td> <td>-50.887 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk1	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4405 GHz	-3.181 dBm				2	N	1	f	24.6489 GHz	-38.236 dBm				3	N	1	f	4.8890 GHz	-41.930 dBm				4	N	1	f	7.1240 GHz	-50.716 dBm				5	N	1	f	9.7639 GHz	-50.887 dBm				
Mk1	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4405 GHz	-3.181 dBm																																																			
2	N	1	f	24.6489 GHz	-38.236 dBm																																																			
3	N	1	f	4.8890 GHz	-41.930 dBm																																																			
4	N	1	f	7.1240 GHz	-50.716 dBm																																																			
5	N	1	f	9.7639 GHz	-50.887 dBm																																																			
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>Mk1</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-3.779 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6824 GHz</td> <td>-38.017 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9805 GHz</td> <td>-41.635 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4372 GHz</td> <td>-50.167 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9201 GHz</td> <td>-50.084 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk1	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-3.779 dBm				2	N	1	f	24.6824 GHz	-38.017 dBm				3	N	1	f	4.9805 GHz	-41.635 dBm				4	N	1	f	7.4372 GHz	-50.167 dBm				5	N	1	f	9.9201 GHz	-50.084 dBm				
Mk1	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4802 GHz	-3.779 dBm																																																			
2	N	1	f	24.6824 GHz	-38.017 dBm																																																			
3	N	1	f	4.9805 GHz	-41.635 dBm																																																			
4	N	1	f	7.4372 GHz	-50.167 dBm																																																			
5	N	1	f	9.9201 GHz	-50.084 dBm																																																			

9. CODUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

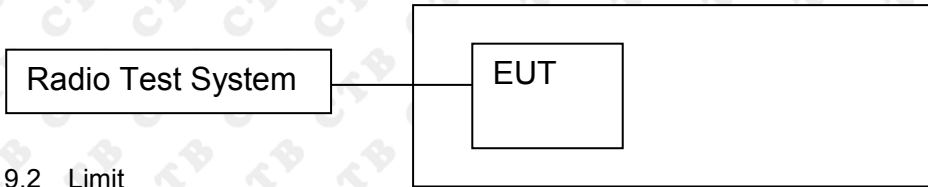

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	0.636	20.97	PASS
	MCH	0.292	20.97	PASS
	HCH	0.502	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	1.423	20.97	PASS
	MCH	1.062	20.97	PASS
	HCH	1.105	20.97	PASS
EDR mode (8DPSK)	LCH	1.478	20.97	PASS
	MCH	1.505	20.97	PASS
	HCH	1.655	20.97	PASS

Test Graph:


Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.40189 GHz 0.636 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.44079 GHz 0.292 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.47988 GHz 0.502 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
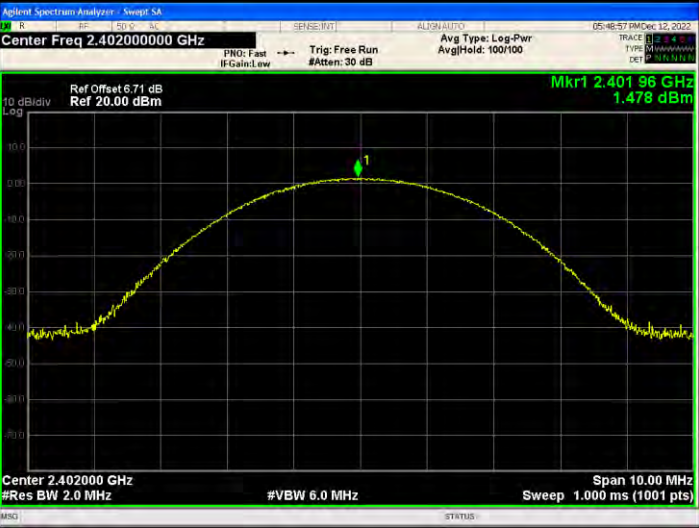
<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

<p>8DPSK/LCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.40196 GHz 1.478 dBm Center 2.402000 GHz #Res BW 6.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>8DPSK /MCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.44093 GHz 1.505 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>8DPSK /HCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.48017 GHz 1.655 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

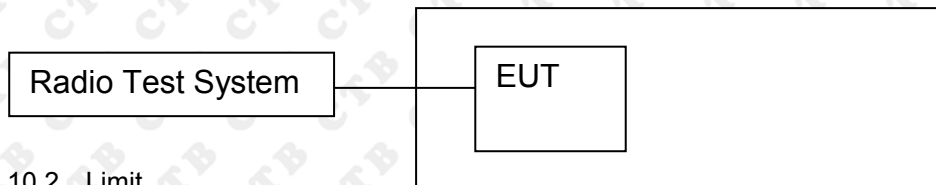

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	1.003	PASS
	Mid channel	1.03	PASS
	High channel	1.033	PASS
π/4DQPSK	Low channel	1.338	PASS
	Mid channel	1.333	PASS
	High channel	1.308	PASS
8DPSK	Low channel	1.302	PASS
	Mid channel	1.291	PASS
	High channel	1.277	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:


<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.71 dB Ref 26.71 dBm Mkr3 2.402502 GHz -21.082 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 917.18 kHz Total Power 6.67 dBm Transmit Freq Error 847 Hz OBW Power 99.00 % x dB Bandwidth 1.003 MHz x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.441524 GHz -20.035 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 953.15 kHz Total Power 6.21 dBm Transmit Freq Error 9.082 kHz OBW Power 99.00 % x dB Bandwidth 1.030 MHz x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.73 dB Ref 26.73 dBm Mkr3 2.480537 GHz -22.739 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 981.47 kHz Total Power 6.26 dBm Transmit Freq Error 20.080 kHz OBW Power 99.00 % x dB Bandwidth 1.033 MHz x dB -20.00 dB</p>

<p>$\pi/4$-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 6.71 dB Ref: 26.71 dBm</p> <p>Mkr3: 2.402694 GHz -23.015 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.63 dBm</td> </tr> <tr> <td>1.2223 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>24.900 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.338 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.63 dBm	1.2223 MHz			Transmit Freq Error	OBW Power	99.00 %	24.900 kHz	x dB	-20.00 dB	x dB Bandwidth			1.338 MHz		
Occupied Bandwidth	Total Power	6.63 dBm																	
1.2223 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
24.900 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.338 MHz																			
<p>$\pi/4$-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.441699 GHz -24.028 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.20 dBm</td> </tr> <tr> <td>1.2424 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>32.583 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.333 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.20 dBm	1.2424 MHz			Transmit Freq Error	OBW Power	99.00 %	32.583 kHz	x dB	-20.00 dB	x dB Bandwidth			1.333 MHz		
Occupied Bandwidth	Total Power	6.20 dBm																	
1.2424 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
32.583 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.333 MHz																			
<p>$\pi/4$-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 6.73 dB Ref: 26.73 dBm</p> <p>Mkr3: 2.480686 GHz -21.658 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.55 dBm</td> </tr> <tr> <td>1.2393 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>31.634 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.308 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.55 dBm	1.2393 MHz			Transmit Freq Error	OBW Power	99.00 %	31.634 kHz	x dB	-20.00 dB	x dB Bandwidth			1.308 MHz		
Occupied Bandwidth	Total Power	6.55 dBm																	
1.2393 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
31.634 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.308 MHz																			

<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.71 dB</p> <p>Ref: 26.71 dBm</p> <p>Mkr3: 2.402666 GHz</p> <p>-21.643 dBm</p> <p>Center: 2.402 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.2176 MHz</p> <p>Total Power: 6.65 dBm</p> <p>Transmit Freq Error: 15.593 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.302 MHz</p> <p>x dB: -20.00 dB</p>
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3: 2.441661 GHz</p> <p>-21.136 dBm</p> <p>Center: 2.441 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.2264 MHz</p> <p>Total Power: 6.47 dBm</p> <p>Transmit Freq Error: 15.216 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.291 MHz</p> <p>x dB: -20.00 dB</p>
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.73 dB</p> <p>Ref: 26.73 dBm</p> <p>Mkr3: 2.480656 GHz</p> <p>-22.554 dBm</p> <p>Center: 2.48 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.2238 MHz</p> <p>Total Power: 6.59 dBm</p> <p>Transmit Freq Error: 17.678 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.277 MHz</p> <p>x dB: -20.00 dB</p>

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

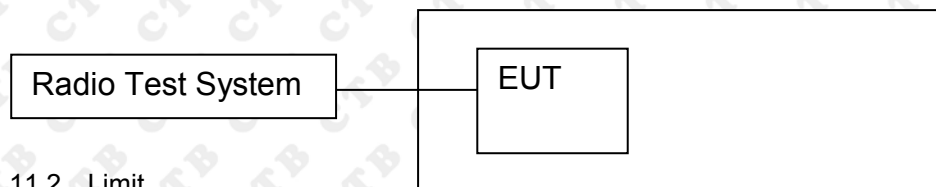

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz, Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.000	0.669	PASS
GFSK	MCH	1.000	0.687	PASS
GFSK	HCH	1.000	0.689	PASS
$\pi/4$ DQPSK	LCH	1.000	0.892	PASS
$\pi/4$ DQPSK	MCH	1.000	0.889	PASS
$\pi/4$ DQPSK	HCH	1.000	0.872	PASS
8DPSK	LCH	1.000	0.868	PASS
8DPSK	MCH	1.000	0.861	PASS
8DPSK	HCH	1.000	0.851	PASS

Test Graph

Graphs

GFSK/LCH



GFSK/MCH



GFSK/HCH




<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.00000000 MHz</p> <p>Ref Offset: 6.71 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.000 MHz -0.310 dB</p> <p>Center 2.402500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OFF</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>-0.310 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401 858 GHz</td> <td></td> <td></td> <td>-1.201 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OFF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)		-0.310 dB	2	F	1	f		2.401 858 GHz			-1.201 dBm	
MNR	MODE	TRC	SCN	OFF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)		-0.310 dB																					
2	F	1	f		2.401 858 GHz			-1.201 dBm																					
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.00000000 MHz</p> <p>Ref Offset: 6.72 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.000 MHz 0.101 dB</p> <p>Center 2.441500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OFF</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>0.101 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440 862 GHz</td> <td></td> <td></td> <td>-1.381 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OFF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)		0.101 dB	2	F	1	f		2.440 862 GHz			-1.381 dBm	
MNR	MODE	TRC	SCN	OFF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)		0.101 dB																					
2	F	1	f		2.440 862 GHz			-1.381 dBm																					
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.00000000 MHz</p> <p>Ref Offset: 6.73 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.000 MHz -1.928 dB</p> <p>Center 2.479500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OFF</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>-1.928 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 000 GHz</td> <td></td> <td></td> <td>-3.452 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OFF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)		-1.928 dB	2	F	1	f		2.479 000 GHz			-3.452 dBm	
MNR	MODE	TRC	SCN	OFF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)		-1.928 dB																					
2	F	1	f		2.479 000 GHz			-3.452 dBm																					

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset: 6.71 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.000 MHz 0.922 dB</p> <p>Center 2.402500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OK</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>0.922 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 020 GHz</td> <td></td> <td></td> <td>-3.634 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)		0.922 dB	2	F	1	f		2.402 020 GHz			-3.634 dBm	
MNR	MODE	TRC	SCN	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)		0.922 dB																					
2	F	1	f		2.402 020 GHz			-3.634 dBm																					
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset: 6.72 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.000 MHz -0.180 dB</p> <p>Center 2.441500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OK</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>-0.180 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 016 GHz</td> <td></td> <td></td> <td>-3.730 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)		-0.180 dB	2	F	1	f		2.441 016 GHz			-3.730 dBm	
MNR	MODE	TRC	SCN	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)		-0.180 dB																					
2	F	1	f		2.441 016 GHz			-3.730 dBm																					
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset: 6.73 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.000 MHz -0.787 dB</p> <p>Center 2.479500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OK</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>-0.787 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 002 GHz</td> <td></td> <td></td> <td>-3.010 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)		-0.787 dB	2	F	1	f		2.479 002 GHz			-3.010 dBm	
MNR	MODE	TRC	SCN	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ 2	1	f	(Δ)	1.000 MHz	(Δ)		-0.787 dB																					
2	F	1	f		2.479 002 GHz			-3.010 dBm																					

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

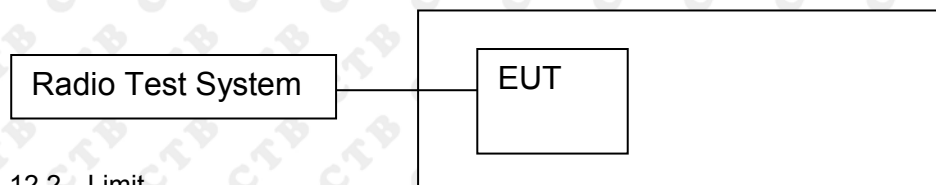

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS


Test Graph

Graphs


GFSK/Hop

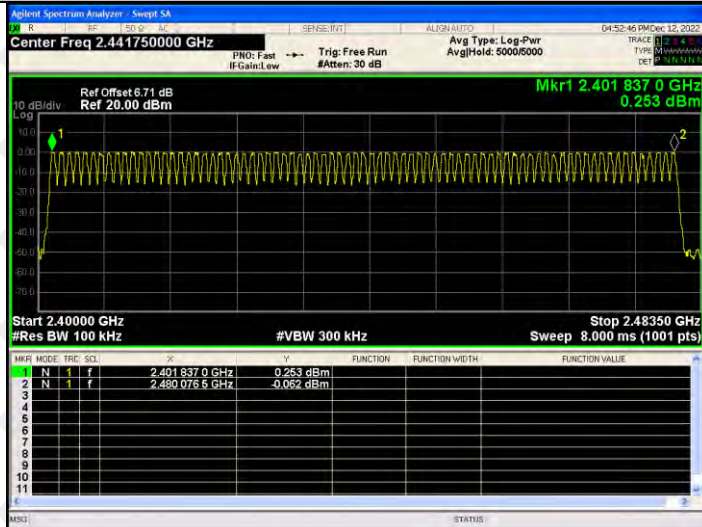

$\pi/4$ DQPSK/Hop

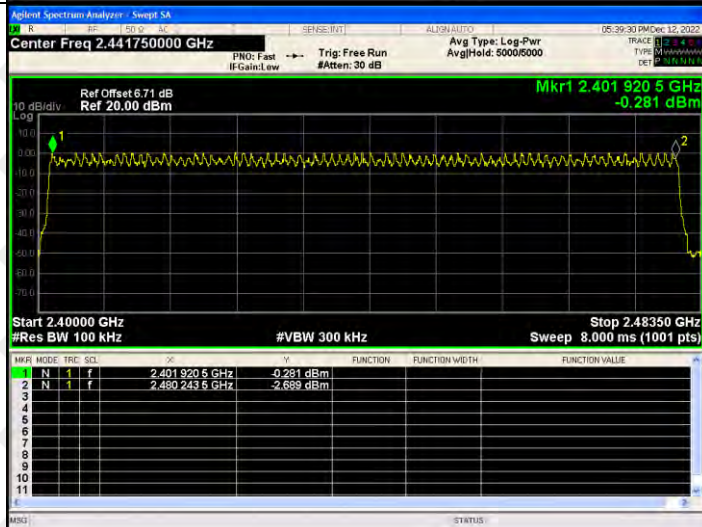


8DPSK/Hop

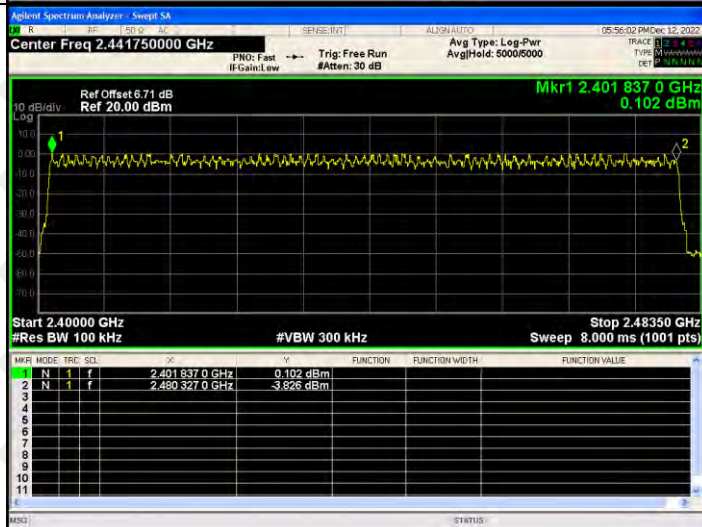

13. DWELL TIME

13.1 Block Diagram Of Test Setup

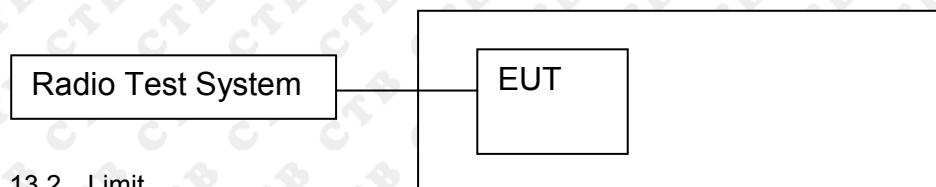

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.376	120.32	400	PASS
	DH1	MCH	0.375	120	400	PASS
	DH1	HCH	0.376	120.32	400	PASS
	DH3	LCH	1.638	262.08	400	PASS
	DH3	MCH	1.638	262.08	400	PASS
	DH3	HCH	1.638	262.08	400	PASS
	DH5	LCH	2.888	308.053	400	PASS
	DH5	MCH	2.888	308.053	400	PASS
	DH5	HCH	2.889	308.16	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.


Test Graph

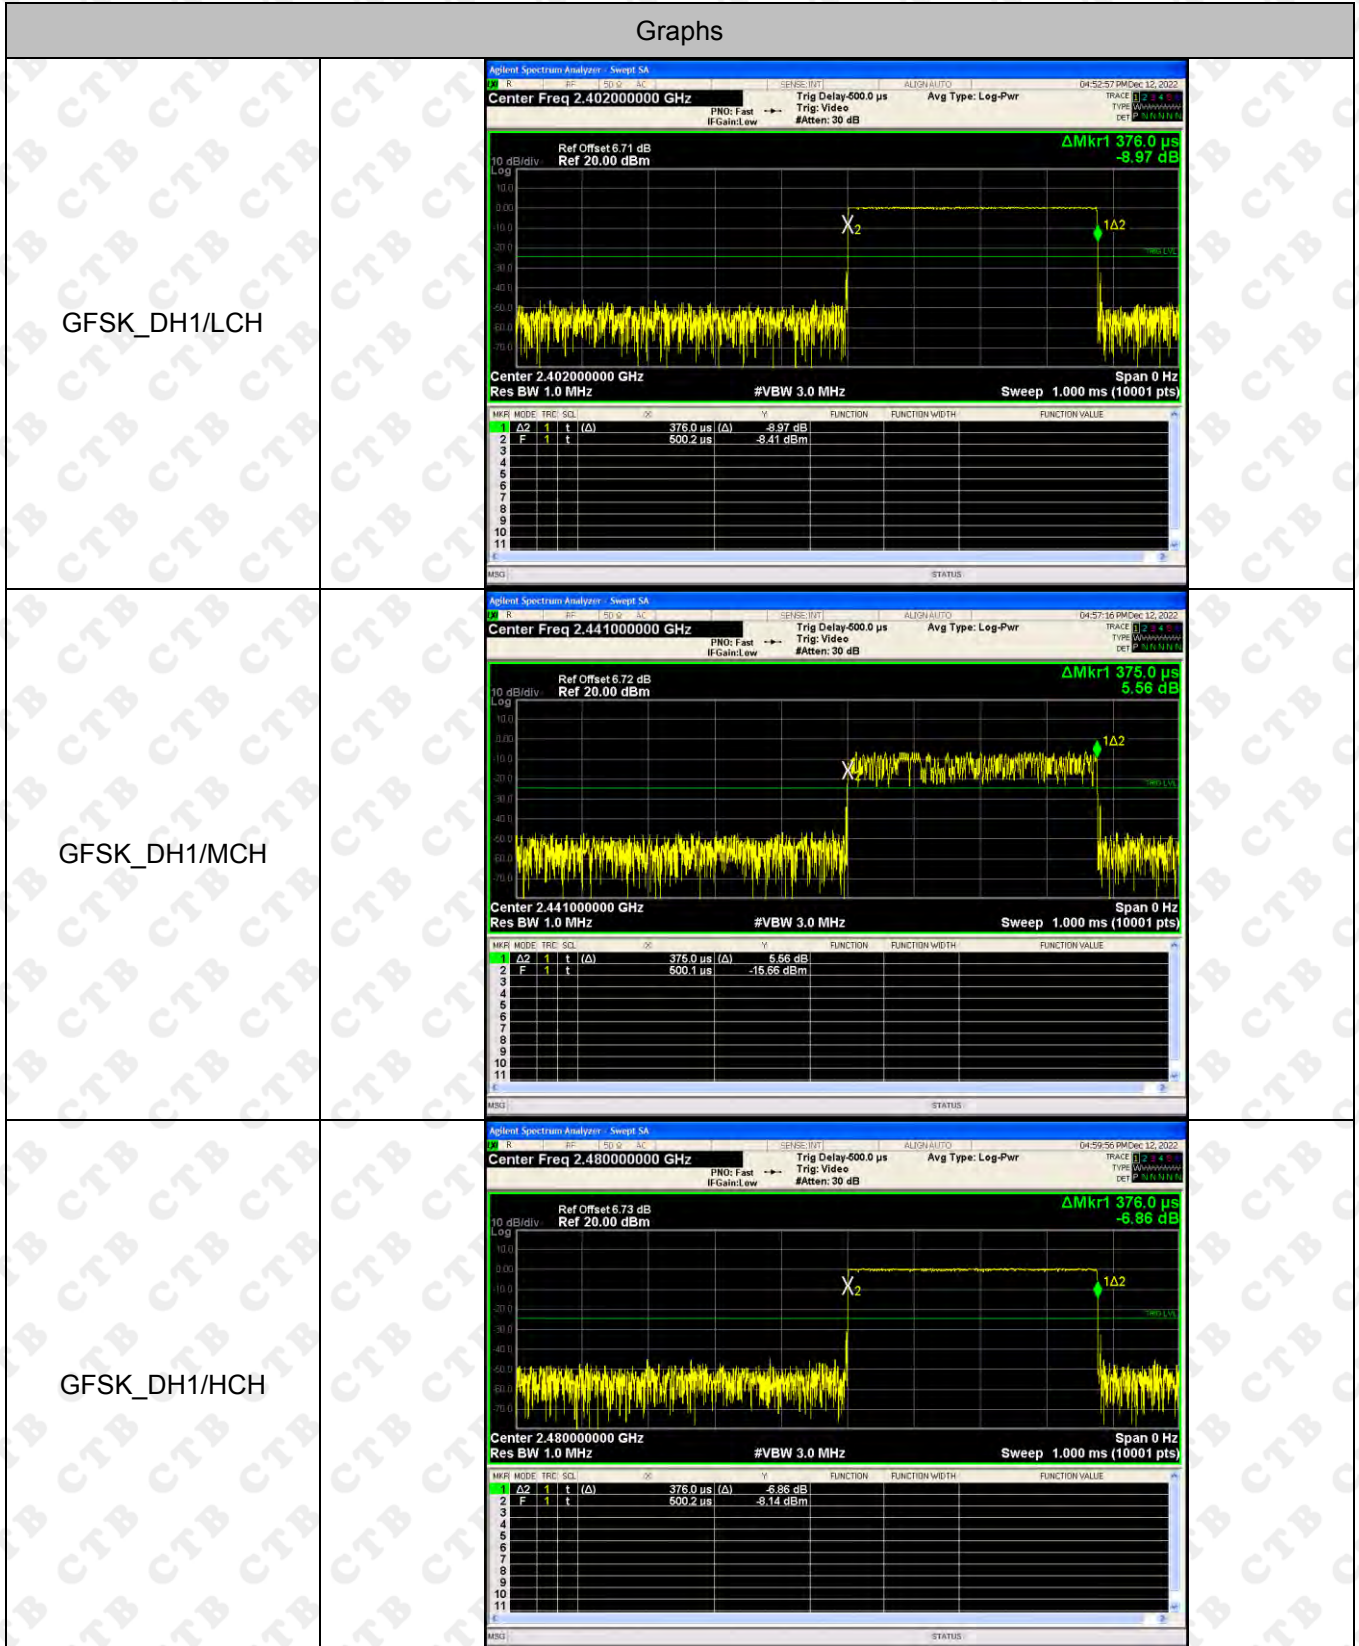


GFSK_DH3/LCH




GFSK_DH3/MCH

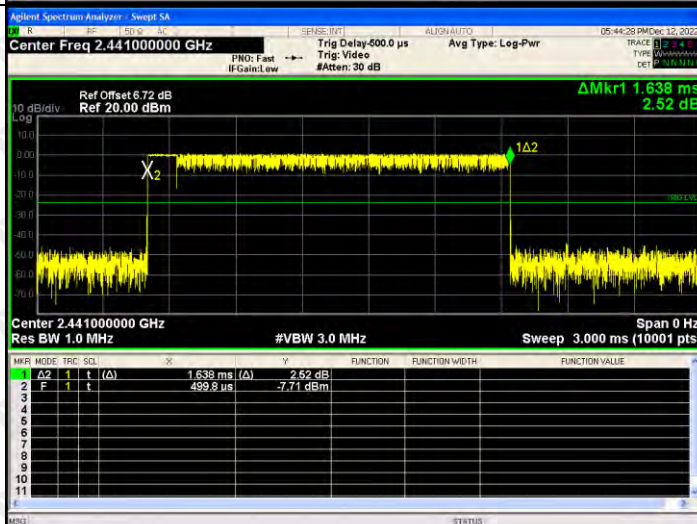


GFSK_DH3/HCH

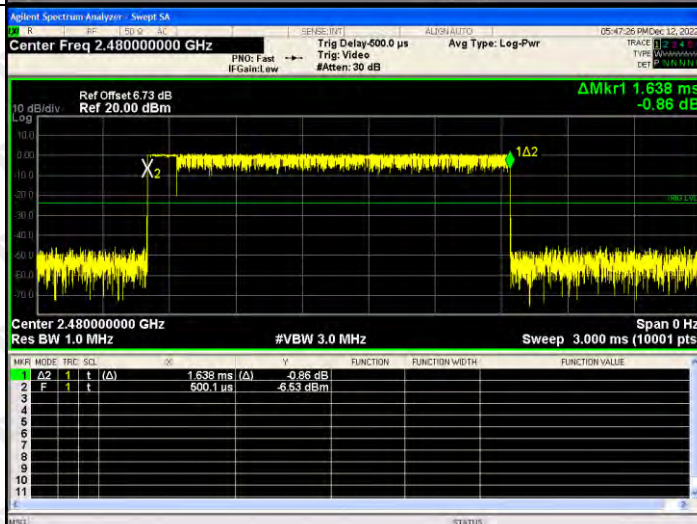


GFSK_DH5/LCH

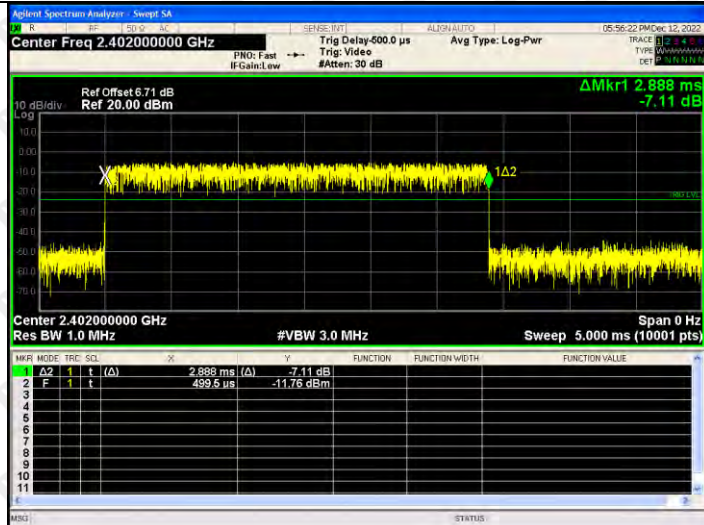

GFSK_DH5/MCH

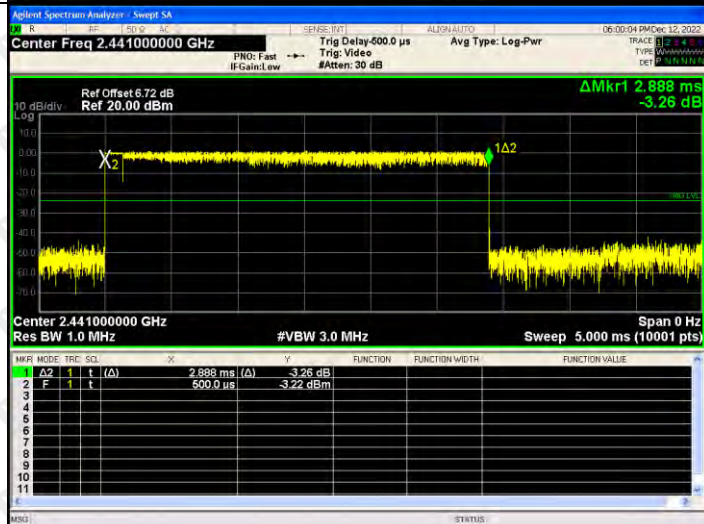

GFSK_DH5/HCH

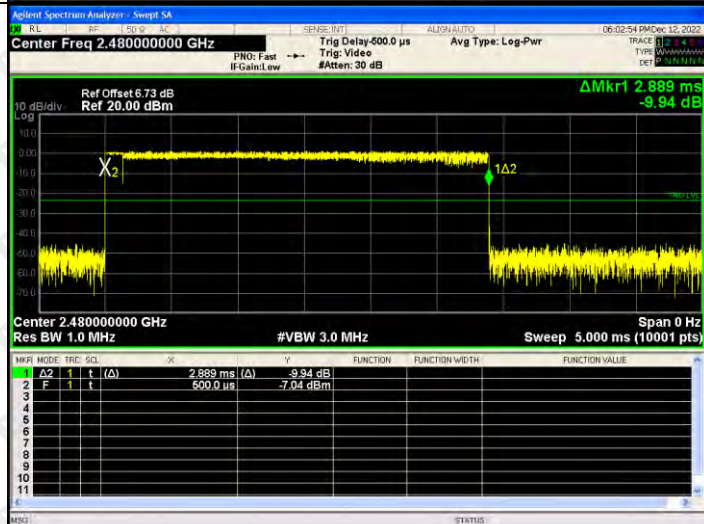

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

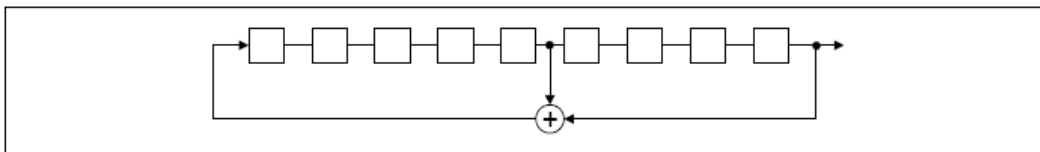

An example of Pseudorandom Frequency Hopping Sequence as follow:

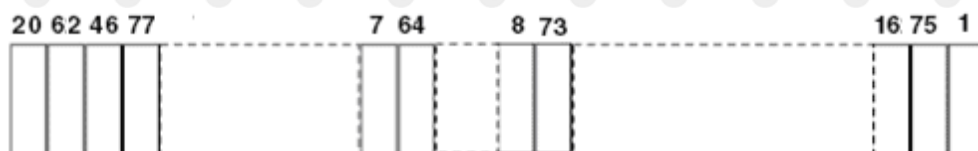

Each frequency used equally on the average by each transmitter.
The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is -0.58dBi.


16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G

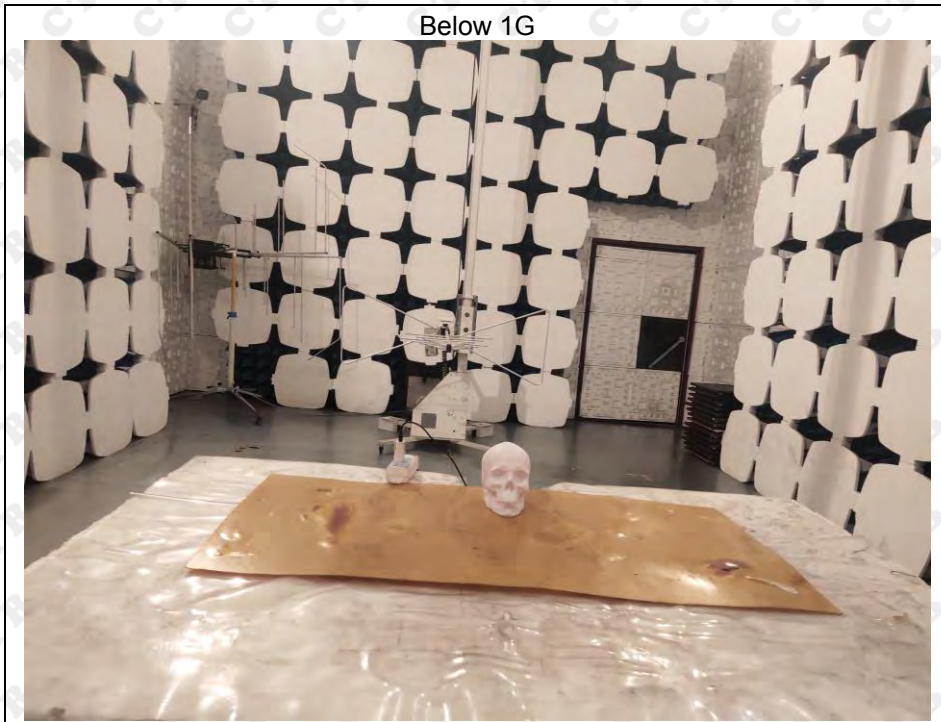

Above 1G

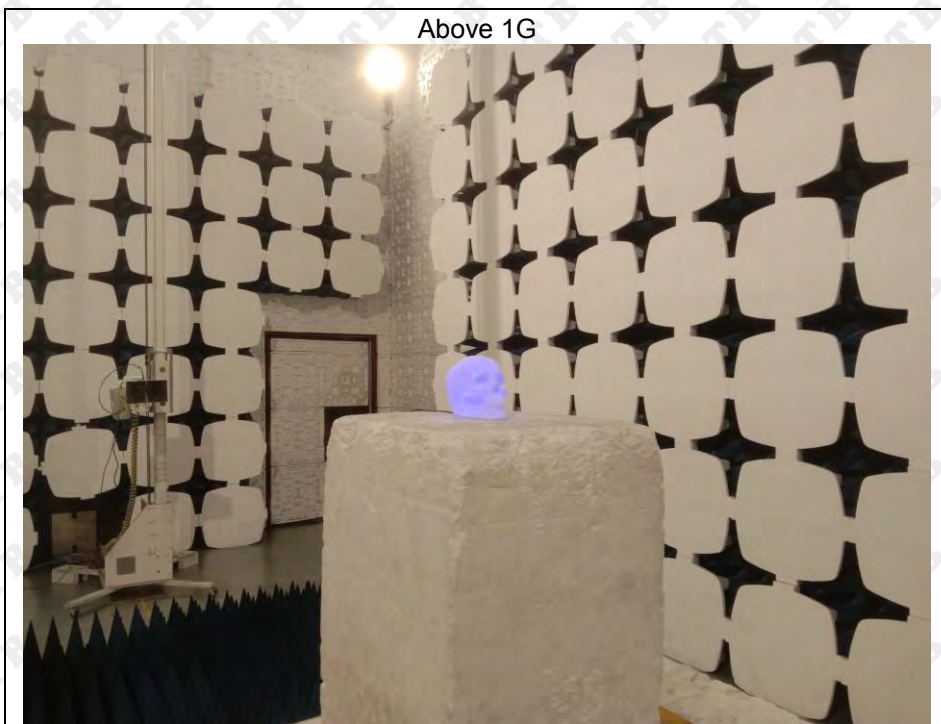

Conducted emissions

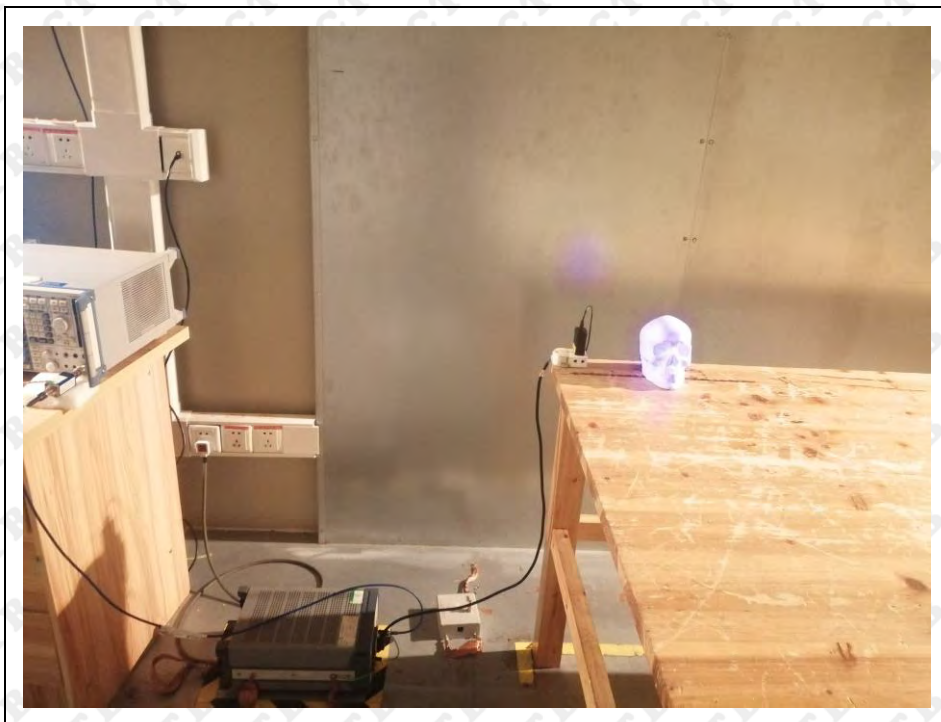

※※※※ END OF REPORT ※※※※