

## TEST REPORT

**Product** : Grid Pad 15  
**Trade mark** : Smartbox  
**Model/Type reference** : GP15A  
**Serial Number** : N/A  
**Report Number** : EED32M00138901  
**FCC ID** : 2APXM-GP15A  
**Date of Issue:** : Aug.10, 2020  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS

Prepared for:

**Smartbox Assistive Technology Limited**  
**Ysobel House, Enigma Commercial Centre,**  
**Sandys Road, Malvern, Worcestershire, UK WR14 1JJ**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Compiled by:

*Sunlight Sun*

Reviewed by:

*Jok Yang*

Approved by:

*Sam Chuang*

Date:

Aug.10, 2020

Sam Chuang

Check No.:3096327781



## 2 Version

Version No.	Date	Description
00	Aug.10, 2020	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Restricted bands around fundamental frequency (Radiated Emission)</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.


## 4 Content

<b>1 COVER PAGE</b>	<b>1</b>
<b>2 VERSION</b>	<b>2</b>
<b>3 TEST SUMMARY</b>	<b>3</b>
<b>4 CONTENT</b>	<b>4</b>
<b>5 TEST REQUIREMENT</b>	<b>5</b>
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
<b>6 GENERAL INFORMATION</b>	<b>7</b>
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	9
6.5 TEST LOCATION	9
6.6 DEVIATION FROM STANDARDS	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
6.9 MEASUREMENT UNCERTAINTY(95% CONFIDENCE LEVELS, K=2)	9
<b>7 EQUIPMENT LIST</b>	<b>10</b>
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>	<b>13</b>
Appendix A): 20dB Occupied Bandwidth& 99% Occupied Bandwidth	15
Appendix B): Carrier Frequency Separation	19
Appendix C): Dwell Time	23
Appendix D): Hopping Channel Number	27
Appendix E): Conducted Peak Output Power	29
Appendix F): Band-edge for RF Conducted Emissions	34
Appendix G): RF Conducted Spurious Emissions	40
Appendix H)Pseudorandom Frequency Hopping Sequence	50
Appendix I)Antenna Requirement	51
Appendix J)AC Power Line Conducted Emission	52
Appendix K)Restricted bands around fundamental frequency (Radiated)	55
Appendix L)Radiated Spurious Emissions	72
<b>PHOTOGRAPHS OF TEST SETUP</b>	<b>77</b>
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	<b>80</b>

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

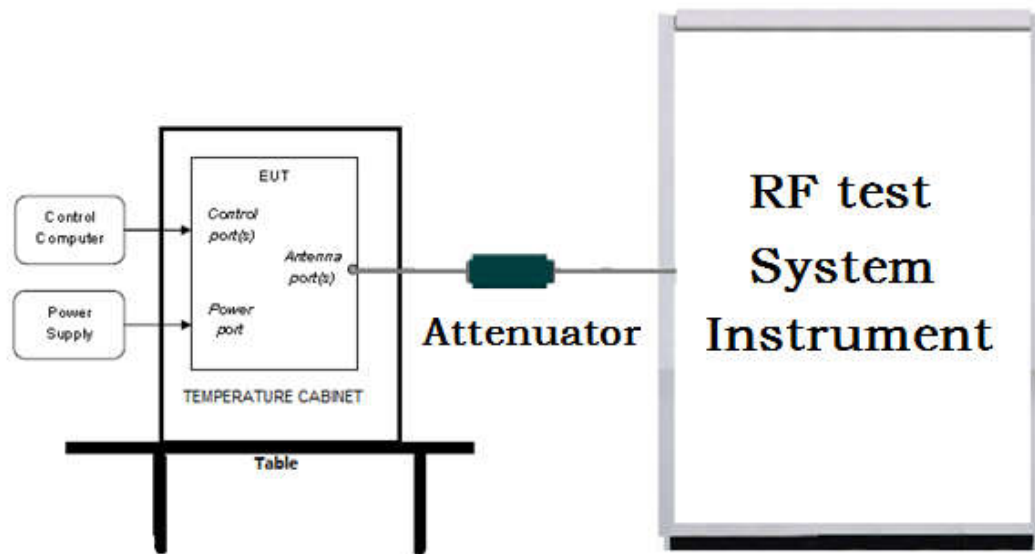

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

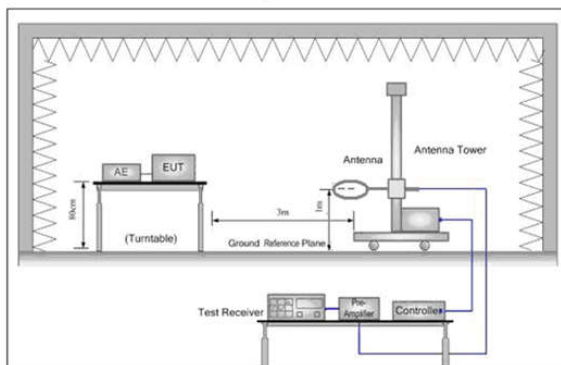


Figure 1. Below 30MHz

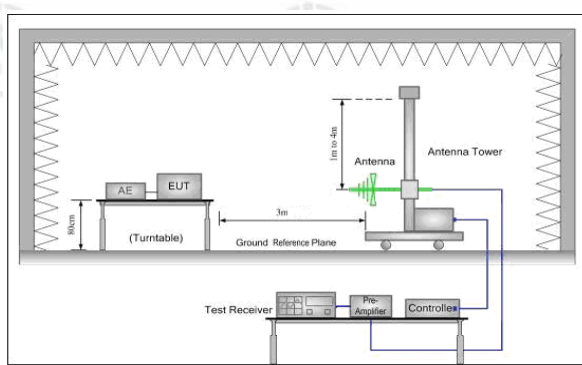


Figure 2. 30MHz to 1GHz


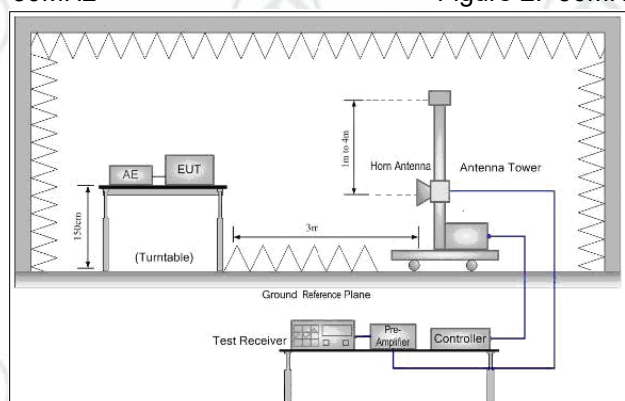


Figure 3. Above 1GHz



### 5.1.3 For Conducted Emissions test setup

#### Conducted Emissions setup

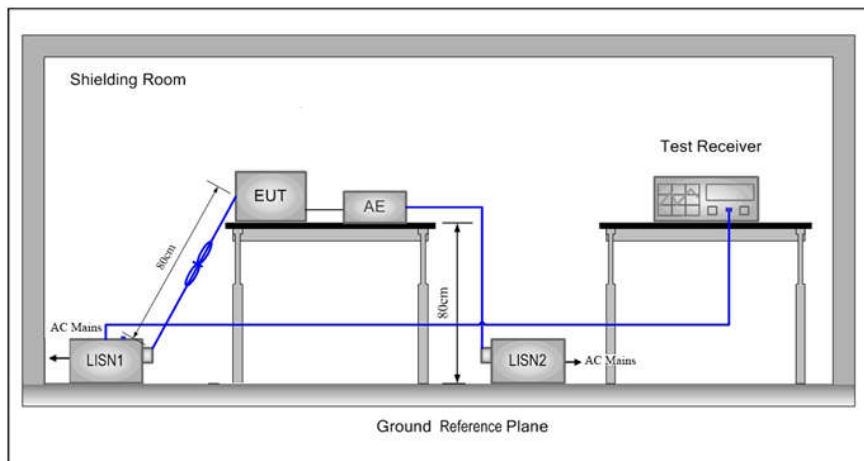

## 5.2 Test Environment

Operating Environment:	
Temperature:	23.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

## 5.3 Test Condition

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 0	Channel 39	Channel 78
		2402MHz	2441MHz	2480MHz

## 6 General Information

### 6.1 Client Information

Applicant:	Smartbox Assistive Technology Limited
Address of Applicant:	Ysobel House, Enigma Commercial Centre, Sandys Road, Malvern, Worcestershire, UK WR14 1JJ
Manufacturer:	Smartbox Assistive Technology Limited
Address of Manufacturer:	Ysobel House, Enigma Commercial Centre, Sandys Road, Malvern, Worcestershire, UK WR14 1JJ
Factory:	Estone Technology LTD
Address of Factory:	2F, Building No.1, Jia'an Industrial Park, No.2 Long Chang Road, Bao'an, Shenzhen 518101, China.

### 6.2 General Description of EUT

Product Name:	Grid Pad 15	
Model No.(EUT):	GP15A	
Tark mark:	Smartbox	
EUT Supports Radios application	4.2BT Dual mode, 2402MHz to 2480MHz	
Power Supply:	AC Adapter	MODEL:MANGO40S-12BB-ES INPUT:100-240V~,50/60Hz ,1.0A Max OUTPUT:12V---3.33A
	Battery	Model:5080115P Capacity:10000mAh/74Wh Nominal Voltage:7.4V--- Limited Charge Voltage:8.4V---
Sample Received Date:	May. 22, 2020	
Sample tested Date:	May. 22, 2020 to Jul. 17, 2020	

### 6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	4.2 (BT2.1+EDR)
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Test Power Grade:	DH5: LCH:6; MCH:6; HCH:6 2DH5: LCH:2; MCH:2; HCH:2 3DH5: LCH:3; MCH:3; HCH:3
Test Software of EUT:	DRTU
Antenna Type:	PCB antenna
Antenna Gain:	1.99 dBi
Test Voltage:	Battery 7.4V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		



## 6.4 Description of Support Units

The EUT has been tested with associated equipment below

Associated equipment name		Manufacture	model	S/N serial number	Supplied by	Certification
AE1	Notebook	DELL	DELL 3490	D245DX2	DELL	CE&FCC

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 3368 3668 Fax: +86 (0) 755 3368 3385

No tests were sub-contracted.

FCC Designation No.: CN1164

## 6.6 Deviation from Standards

None.

## 6.7 Abnormalities from Standard Conditions

None.

## 6.8 Other Information Requested by the Customer

None.

## 6.9 Measurement Uncertainty(95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	02-17-2020	02-16-2021
Signal Generator	Keysight	N5182B	MY53051549	02-17-2020	02-16-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	07-26-2019	07-25-2020
High-pass filter	Sinoscite	FL3CX03WG18N M12-0398-002	---	---	---
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	02-17-2020	02-16-2021
PC-1	Lenovo	R4960d	---	---	---
BT&WI-FI Automatic control	R&S	OSP120	101374	02-17-2020	02-16-2021
RF control unit	JS Tonscend	JS0806-2	158060006	02-17-2020	02-16-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-28-2020	04-27-2021
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-05-2020	03-04-2021
Barometer	changchun	DYM3	1188	---	---

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-21-2019	10-20-2020
Multi device Controller	matur	NCD/070/107 11112	---	---	---
Temperature/Humidity Indicator	Shanghai qixiang	HM10	1804298	07-26-2019	07-25-2020
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-05-2020	03-04-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-20-2020	05-19-2021
Preamplifier	EMCI	EMC001330	980563	04-22-2020	04-21-2021
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-09-2020	01-08-2021
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-27-2020	04-26-2021
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

## 8 Radio Technical Requirements Specification

### Reference documents for testing:


No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	N/A	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)



## EUT DUTY CYCLE

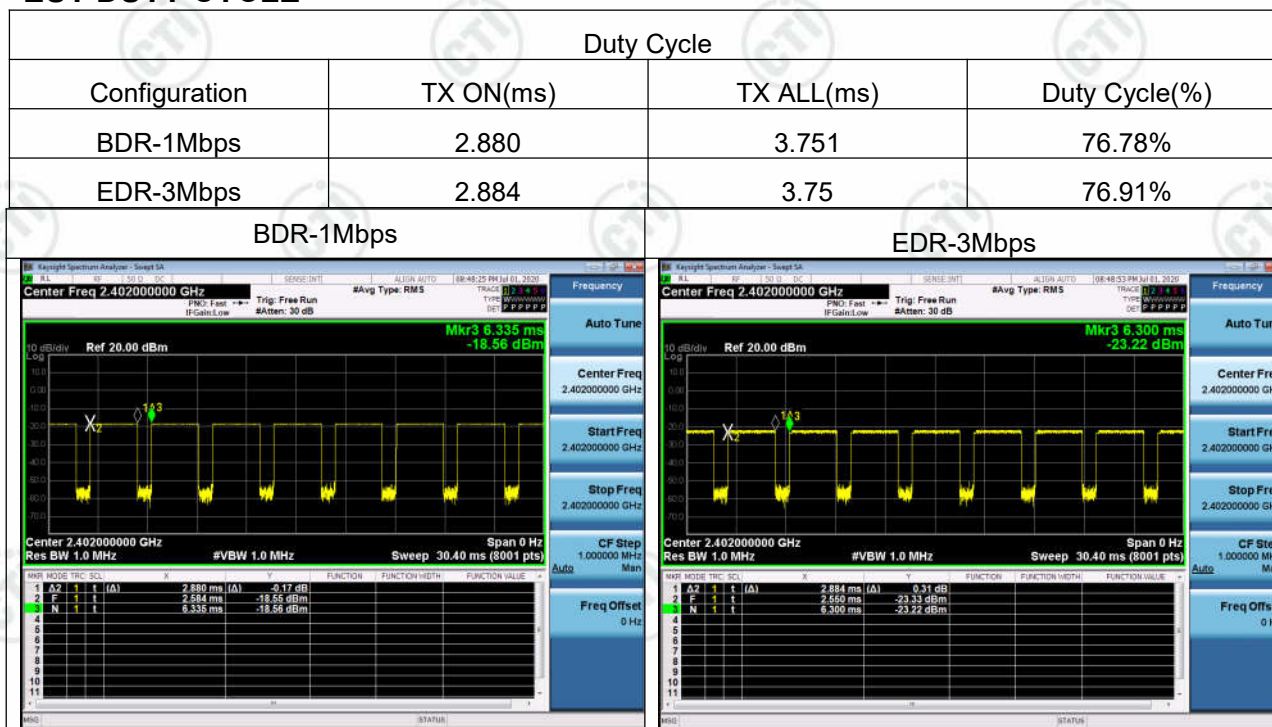

## Appendix A): 20dB Occupied Bandwidth& 99% Occupied Bandwidth Test Limit

According to §15.247(a) (1),

**20 dB Bandwidth** : For reporting purposes only.


**Occupied Bandwidth(99%)** : For reporting purposes only.

### Test Procedure

Test method Refer as Section 8.1 and ANSI C63.10: 2013 clause 7.8.7,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =30kHz, VBW = 100kHz and Detector = Peak, to measurement 20dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.
- 6.

### Test Setup

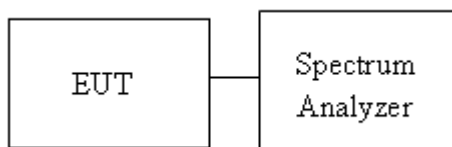

### Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.9589	0.86434	PASS
GFSK	MCH	0.9596	0.86800	PASS
GFSK	HCH	0.9569	0.85929	PASS
π/4DQPSK	LCH	1.485	1.3470	PASS
π/4DQPSK	MCH	1.443	1.3474	PASS
π/4DQPSK	HCH	1.444	1.3481	PASS
8DPSK	LCH	1.478	1.3457	PASS
8DPSK	MCH	1.479	1.3441	PASS
8DPSK	HCH	1.481	1.3482	PASS

## Test Graph



<p><math>\pi/4</math>DQPSK/LCH</p>	 <p>Keynote Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz</p> <p>Span 3 MHz Sweep 3.2 ms</p> <p>#VBW 100 kHz</p> <p>Occupied Bandwidth <b>1.3470 MHz</b></p> <p>Total Power 5.11 dBm</p> <p>Transmit Freq Error -11.269 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.485 MHz</p> <p>x dB -20.00 dB</p>
<p><math>\pi/4</math>DQPSK/MCH</p>	 <p>Keynote Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz</p> <p>Span 3 MHz Sweep 3.2 ms</p> <p>#VBW 100 kHz</p> <p>Occupied Bandwidth <b>1.3474 MHz</b></p> <p>Total Power 5.58 dBm</p> <p>Transmit Freq Error -14.293 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.443 MHz</p> <p>x dB -20.00 dB</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	 <p>Keynote Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz</p> <p>Span 3 MHz Sweep 3.2 ms</p> <p>#VBW 100 kHz</p> <p>Occupied Bandwidth <b>1.3481 MHz</b></p> <p>Total Power 4.45 dBm</p> <p>Transmit Freq Error -15.953 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.444 MHz</p> <p>x dB -20.00 dB</p>



8DPSK/LCH	 <p>Keynote Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz</p> <p>Span 3 MHz Sweep 3.2 ms</p> <p>#VBW 100 kHz</p> <p>Occupied Bandwidth 1.3457 MHz</p> <p>Total Power 6.23 dBm</p> <p>Transmit Freq Error -10.450 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.478 MHz</p> <p>x dB -20.00 dB</p>
8DPSK/MCH	 <p>Keynote Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz</p> <p>Span 3 MHz Sweep 3.2 ms</p> <p>#VBW 100 kHz</p> <p>Occupied Bandwidth 1.3441 MHz</p> <p>Total Power 6.70 dBm</p> <p>Transmit Freq Error -13.816 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.479 MHz</p> <p>x dB -20.00 dB</p>
8DPSK/HCH	 <p>Keynote Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz</p> <p>Span 3 MHz Sweep 3.2 ms</p> <p>#VBW 100 kHz</p> <p>Occupied Bandwidth 1.3482 MHz</p> <p>Total Power 5.56 dBm</p> <p>Transmit Freq Error -15.144 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.481 MHz</p> <p>x dB -20.00 dB</p>



## Appendix B): Carrier Frequency Separation

### Test Limit

According to §15.247(a)(1),


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

### Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Sweep = auto.  
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

### Test Setup



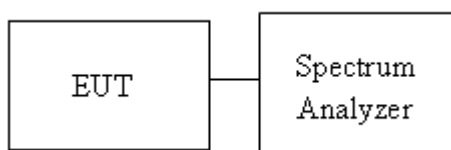


**Result Table**

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.142	PASS
GFSK	MCH	1.040	PASS
GFSK	HCH	1.032	PASS
$\pi/4$ DQPSK	LCH	0.998	PASS
$\pi/4$ DQPSK	MCH	1.038	PASS
$\pi/4$ DQPSK	HCH	1.074	PASS
8DPSK	LCH	1.046	PASS
8DPSK	MCH	1.034	PASS
8DPSK	HCH	1.010	PASS

## Test Graph

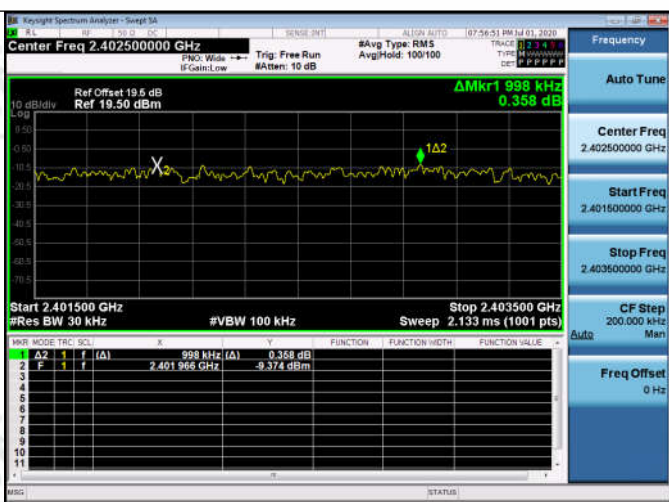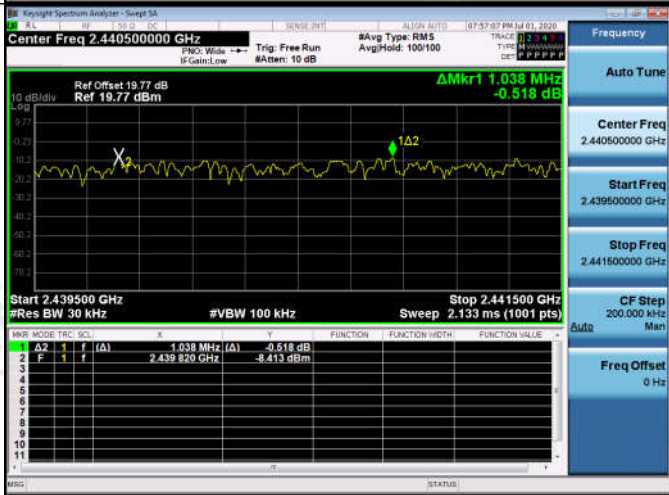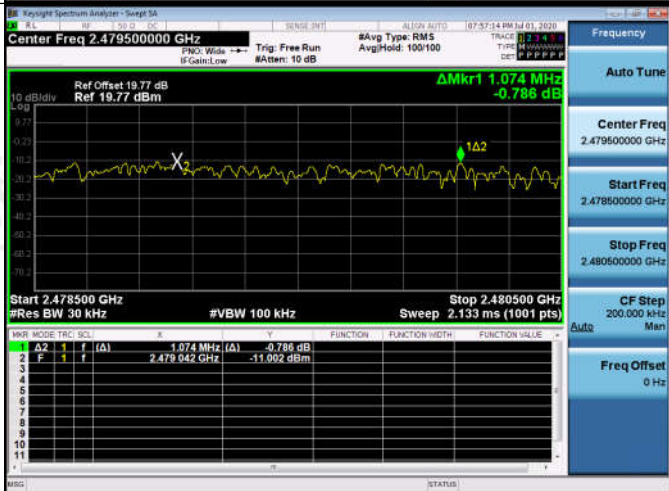

<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	

8DPSK/LCH	<p>Keyight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.402500000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>ΔMkr1 1.046 MHz 2.926 dB</p> <p>Start 2.401500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.046 MHz</td><td>(Δ)</td><td>2.926 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(Δ)</td><td>2.401 920 GHz</td><td></td><td>-9.941 dBm</td><td></td></tr></table>	MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.046 MHz	(Δ)	2.926 dB		2	F	1	f	(Δ)	2.401 920 GHz		-9.941 dBm	
MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(Δ)	1.046 MHz	(Δ)	2.926 dB																					
2	F	1	f	(Δ)	2.401 920 GHz		-9.941 dBm																					
8DPSK/MCH	<p>Keyight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.440500000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>ΔMkr1 1.034 MHz 2.049 dB</p> <p>Start 2.439500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.034 MHz</td><td>(Δ)</td><td>2.049 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(Δ)</td><td>2.440 116 GHz</td><td></td><td>-9.910 dBm</td><td></td></tr></table>	MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.034 MHz	(Δ)	2.049 dB		2	F	1	f	(Δ)	2.440 116 GHz		-9.910 dBm	
MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(Δ)	1.034 MHz	(Δ)	2.049 dB																					
2	F	1	f	(Δ)	2.440 116 GHz		-9.910 dBm																					
8DPSK/HCH	<p>Keyight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.479500000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>ΔMkr1 1.010 MHz -0.978 dB</p> <p>Start 2.478500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.010 MHz</td><td>(Δ)</td><td>-0.978 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(Δ)</td><td>2.479 994 GHz</td><td></td><td>-9.045 dBm</td><td></td></tr></table>	MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.010 MHz	(Δ)	-0.978 dB		2	F	1	f	(Δ)	2.479 994 GHz		-9.045 dBm	
MARK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(Δ)	1.010 MHz	(Δ)	-0.978 dB																					
2	F	1	f	(Δ)	2.479 994 GHz		-9.045 dBm																					



## Appendix C): Dwell Time

### Test Limit


According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Sweep = auto

### Test Setup

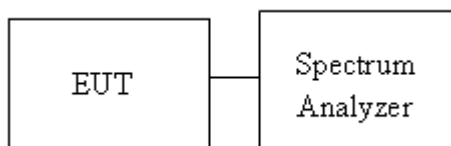





### Result Table




Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.37873	320	0.121	0.30	PASS
GFSK	DH1	MCH	0.37874	320	0.121	0.30	PASS
GFSK	DH1	HCH	0.378733	320	0.121	0.30	PASS
GFSK	DH3	LCH	1.63527	160	0.262	0.65	PASS
GFSK	DH3	MCH	1.63526	160	0.262	0.65	PASS
GFSK	DH3	HCH	1.63527	160	0.262	0.65	PASS
GFSK	DH5	LCH	2.8704	106.7	0.306	0.77	PASS
GFSK	DH5	MCH	2.8704	106.7	0.306	0.76	PASS
GFSK	DH5	HCH	2.8704	106.7	0.306	0.76	PASS



## Test Graph

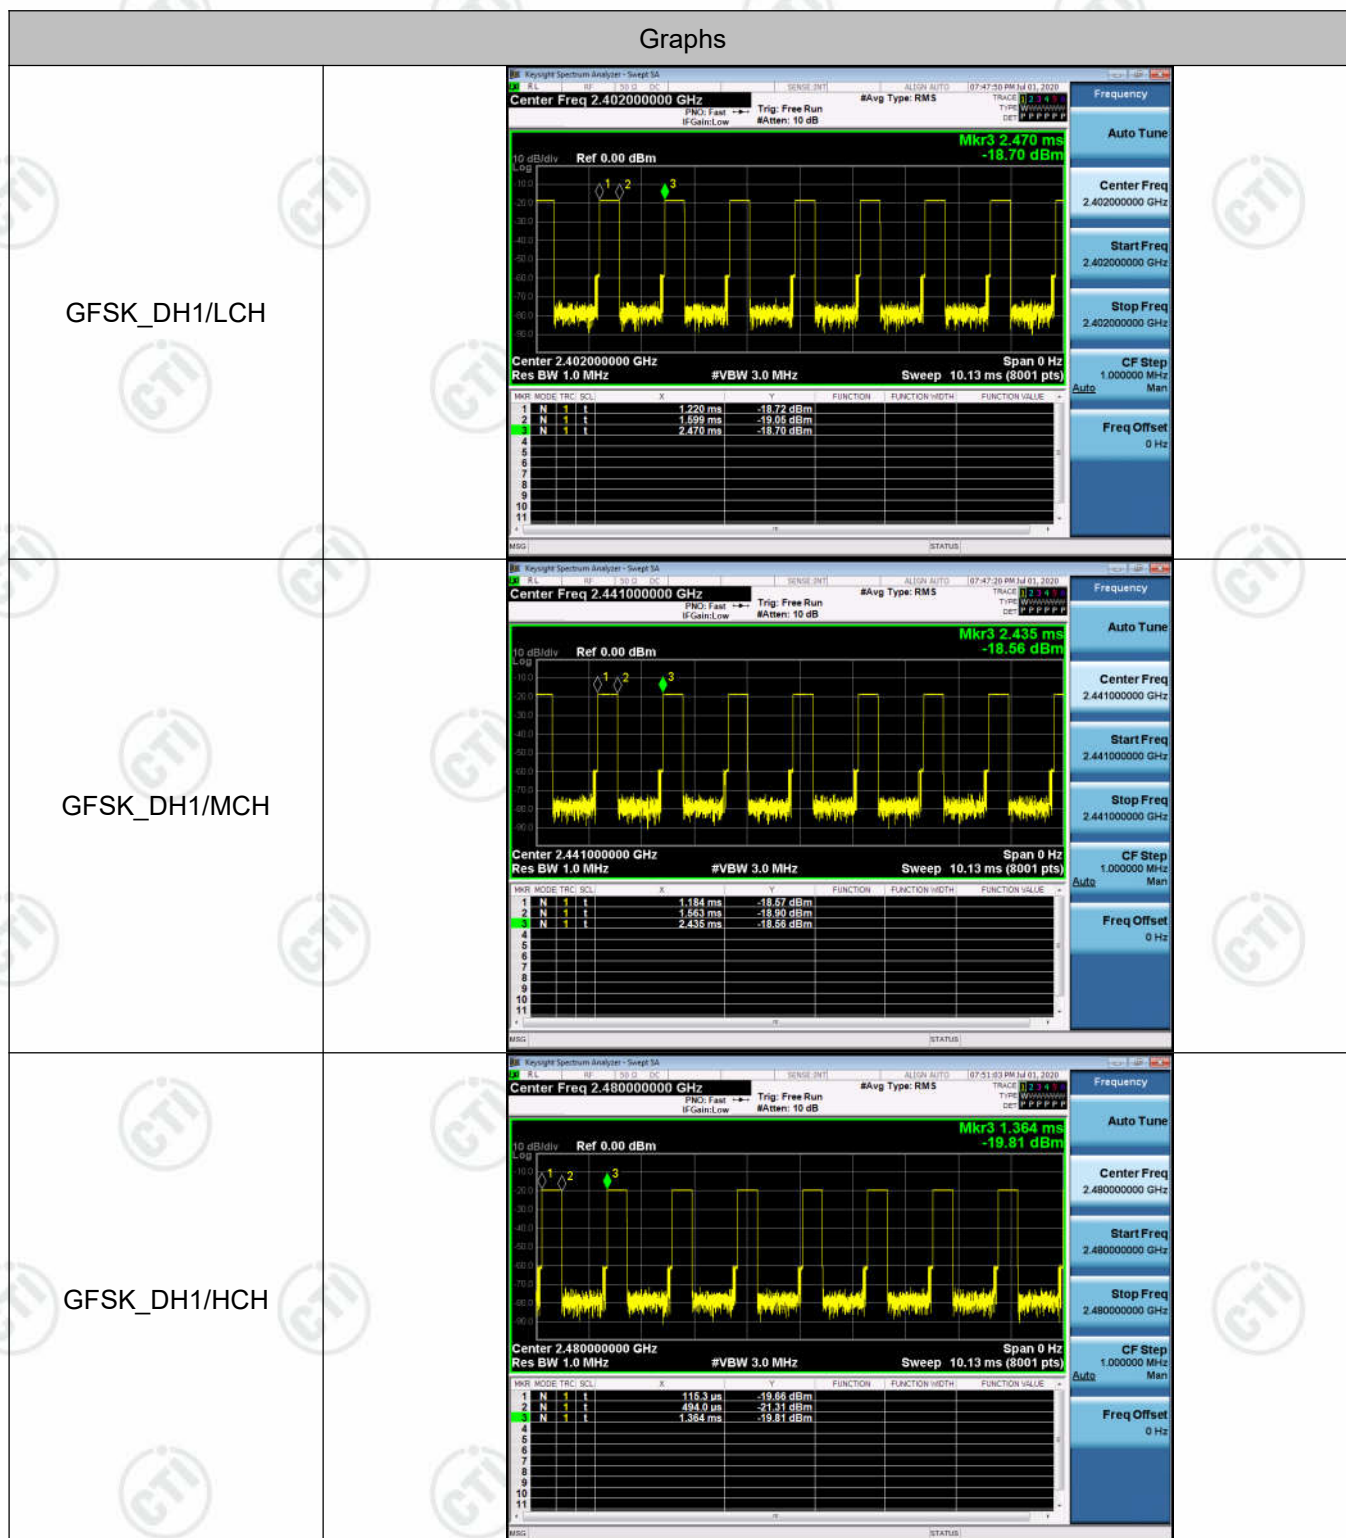

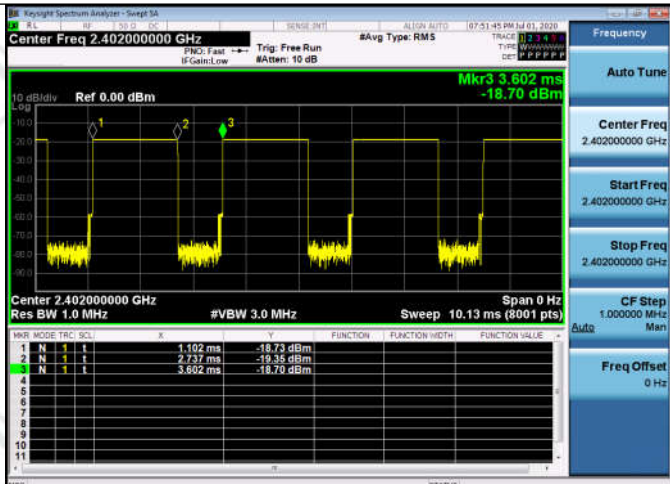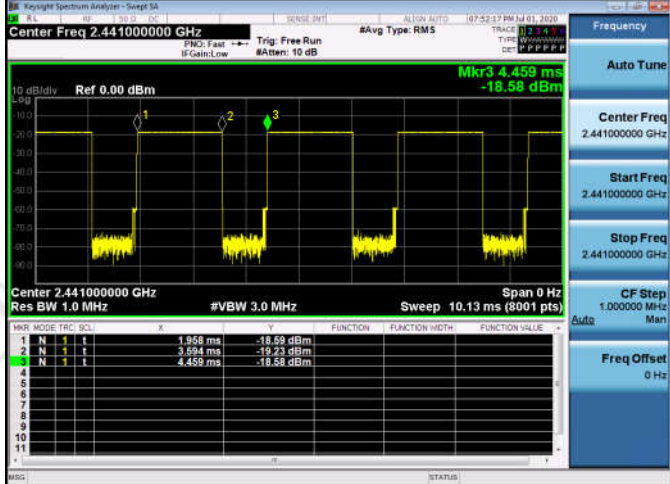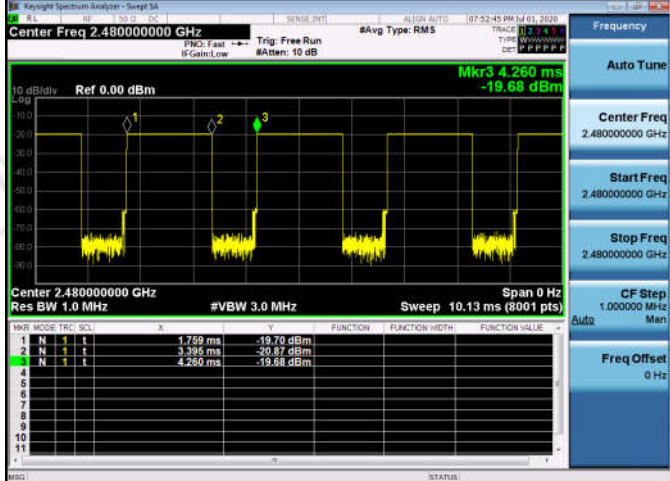GFSK_DH3/LCH	 <p>Center Freq 2.402000000 GHz</p> <p>Ref 0.00 dBm</p> <p>Mkr3 3.602 ms -18.70 dBm</p> <table><tr><th>Mkr</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>1.102 ms</td><td>-18.73 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>2.737 ms</td><td>-19.35 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>3.602 ms</td><td>-18.70 dBm</td><td></td><td></td><td></td></tr></table> <p>Center 2.402000000 GHz</p> <p>Res BW 1.0 MHz</p> <p>#VBW 3.0 MHz</p> <p>Sweep 10.13 ms (8001 pts)</p>	Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	1.102 ms	-18.73 dBm				2	N	1	1	2.737 ms	-19.35 dBm				3	N	1	1	3.602 ms	-18.70 dBm			
Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	1.102 ms	-18.73 dBm																																
2	N	1	1	2.737 ms	-19.35 dBm																																
3	N	1	1	3.602 ms	-18.70 dBm																																
GFSK_DH3/MCH	 <p>Center Freq 2.441000000 GHz</p> <p>Ref 0.00 dBm</p> <p>Mkr3 4.459 ms -18.58 dBm</p> <table><tr><th>Mkr</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>1.958 ms</td><td>-18.59 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>3.694 ms</td><td>-19.23 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>4.459 ms</td><td>-18.58 dBm</td><td></td><td></td><td></td></tr></table> <p>Center 2.441000000 GHz</p> <p>Res BW 1.0 MHz</p> <p>#VBW 3.0 MHz</p> <p>Sweep 10.13 ms (8001 pts)</p>	Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	1.958 ms	-18.59 dBm				2	N	1	1	3.694 ms	-19.23 dBm				3	N	1	1	4.459 ms	-18.58 dBm			
Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	1.958 ms	-18.59 dBm																																
2	N	1	1	3.694 ms	-19.23 dBm																																
3	N	1	1	4.459 ms	-18.58 dBm																																
GFSK_DH3/HCH	 <p>Center Freq 2.480000000 GHz</p> <p>Ref 0.00 dBm</p> <p>Mkr3 4.260 ms -19.68 dBm</p> <table><tr><th>Mkr</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>1.759 ms</td><td>-19.70 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>3.395 ms</td><td>-20.87 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>4.260 ms</td><td>-19.68 dBm</td><td></td><td></td><td></td></tr></table> <p>Center 2.480000000 GHz</p> <p>Res BW 1.0 MHz</p> <p>#VBW 3.0 MHz</p> <p>Sweep 10.13 ms (8001 pts)</p>	Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	1.759 ms	-19.70 dBm				2	N	1	1	3.395 ms	-20.87 dBm				3	N	1	1	4.260 ms	-19.68 dBm			
Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	1.759 ms	-19.70 dBm																																
2	N	1	1	3.395 ms	-20.87 dBm																																
3	N	1	1	4.260 ms	-19.68 dBm																																

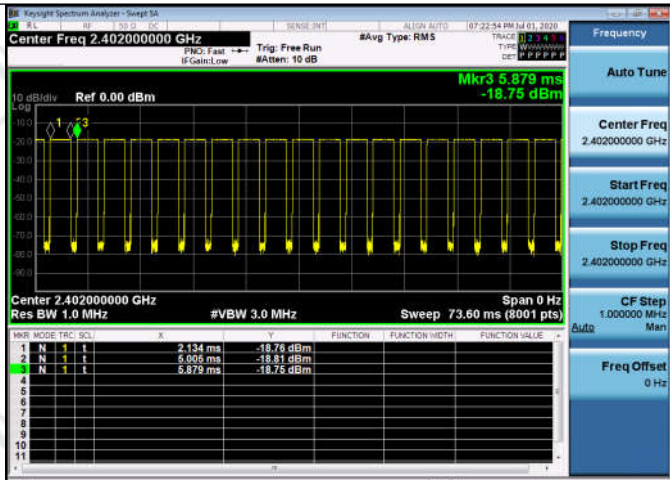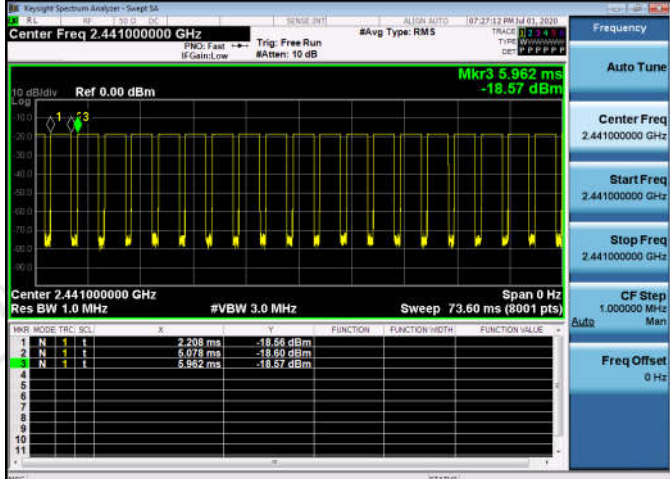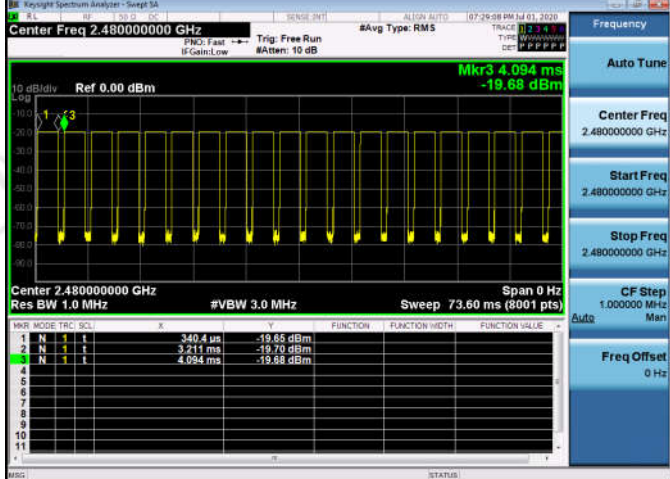GFSK_DH5/LCH	 <p>Center Freq 2.402000000 GHz</p> <p>Ref 0.00 dBm</p> <p>Mkr3 5.879 ms -18.75 dBm</p> <p>Center 2.402000000 GHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts)</p> <p>Res BW 1.0 MHz</p> <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>2.134 ms</td><td>-18.75 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>5.005 ms</td><td>-18.81 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>5.879 ms</td><td>-18.75 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	2.134 ms	-18.75 dBm				2	N	1	1	5.005 ms	-18.81 dBm				3	N	1	1	5.879 ms	-18.75 dBm			
Mkr	Mode	Trc	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	2.134 ms	-18.75 dBm																																
2	N	1	1	5.005 ms	-18.81 dBm																																
3	N	1	1	5.879 ms	-18.75 dBm																																
GFSK_DH5/MCH	 <p>Center Freq 2.441000000 GHz</p> <p>Ref 0.00 dBm</p> <p>Mkr3 5.962 ms -18.57 dBm</p> <p>Center 2.441000000 GHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts)</p> <p>Res BW 1.0 MHz</p> <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>2.208 ms</td><td>-18.56 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>5.078 ms</td><td>-18.61 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>5.962 ms</td><td>-18.57 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	2.208 ms	-18.56 dBm				2	N	1	1	5.078 ms	-18.61 dBm				3	N	1	1	5.962 ms	-18.57 dBm			
Mkr	Mode	Trc	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	2.208 ms	-18.56 dBm																																
2	N	1	1	5.078 ms	-18.61 dBm																																
3	N	1	1	5.962 ms	-18.57 dBm																																
GFSK_DH5/HCH	 <p>Center Freq 2.480000000 GHz</p> <p>Ref 0.00 dBm</p> <p>Mkr3 4.094 ms -19.68 dBm</p> <p>Center 2.480000000 GHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts)</p> <p>Res BW 1.0 MHz</p> <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>1</td><td>340.4 ms</td><td>-19.65 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>1</td><td>3.211 ms</td><td>-19.70 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>1</td><td>4.094 ms</td><td>-19.68 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	340.4 ms	-19.65 dBm				2	N	1	1	3.211 ms	-19.70 dBm				3	N	1	1	4.094 ms	-19.68 dBm			
Mkr	Mode	Trc	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	340.4 ms	-19.65 dBm																																
2	N	1	1	3.211 ms	-19.70 dBm																																
3	N	1	1	4.094 ms	-19.68 dBm																																

## Appendix D): Hopping Channel Number Test Limit

According to §15.247(a)(1)(iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.

### Test Setup

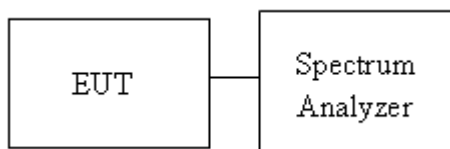




## Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

## Test Graph

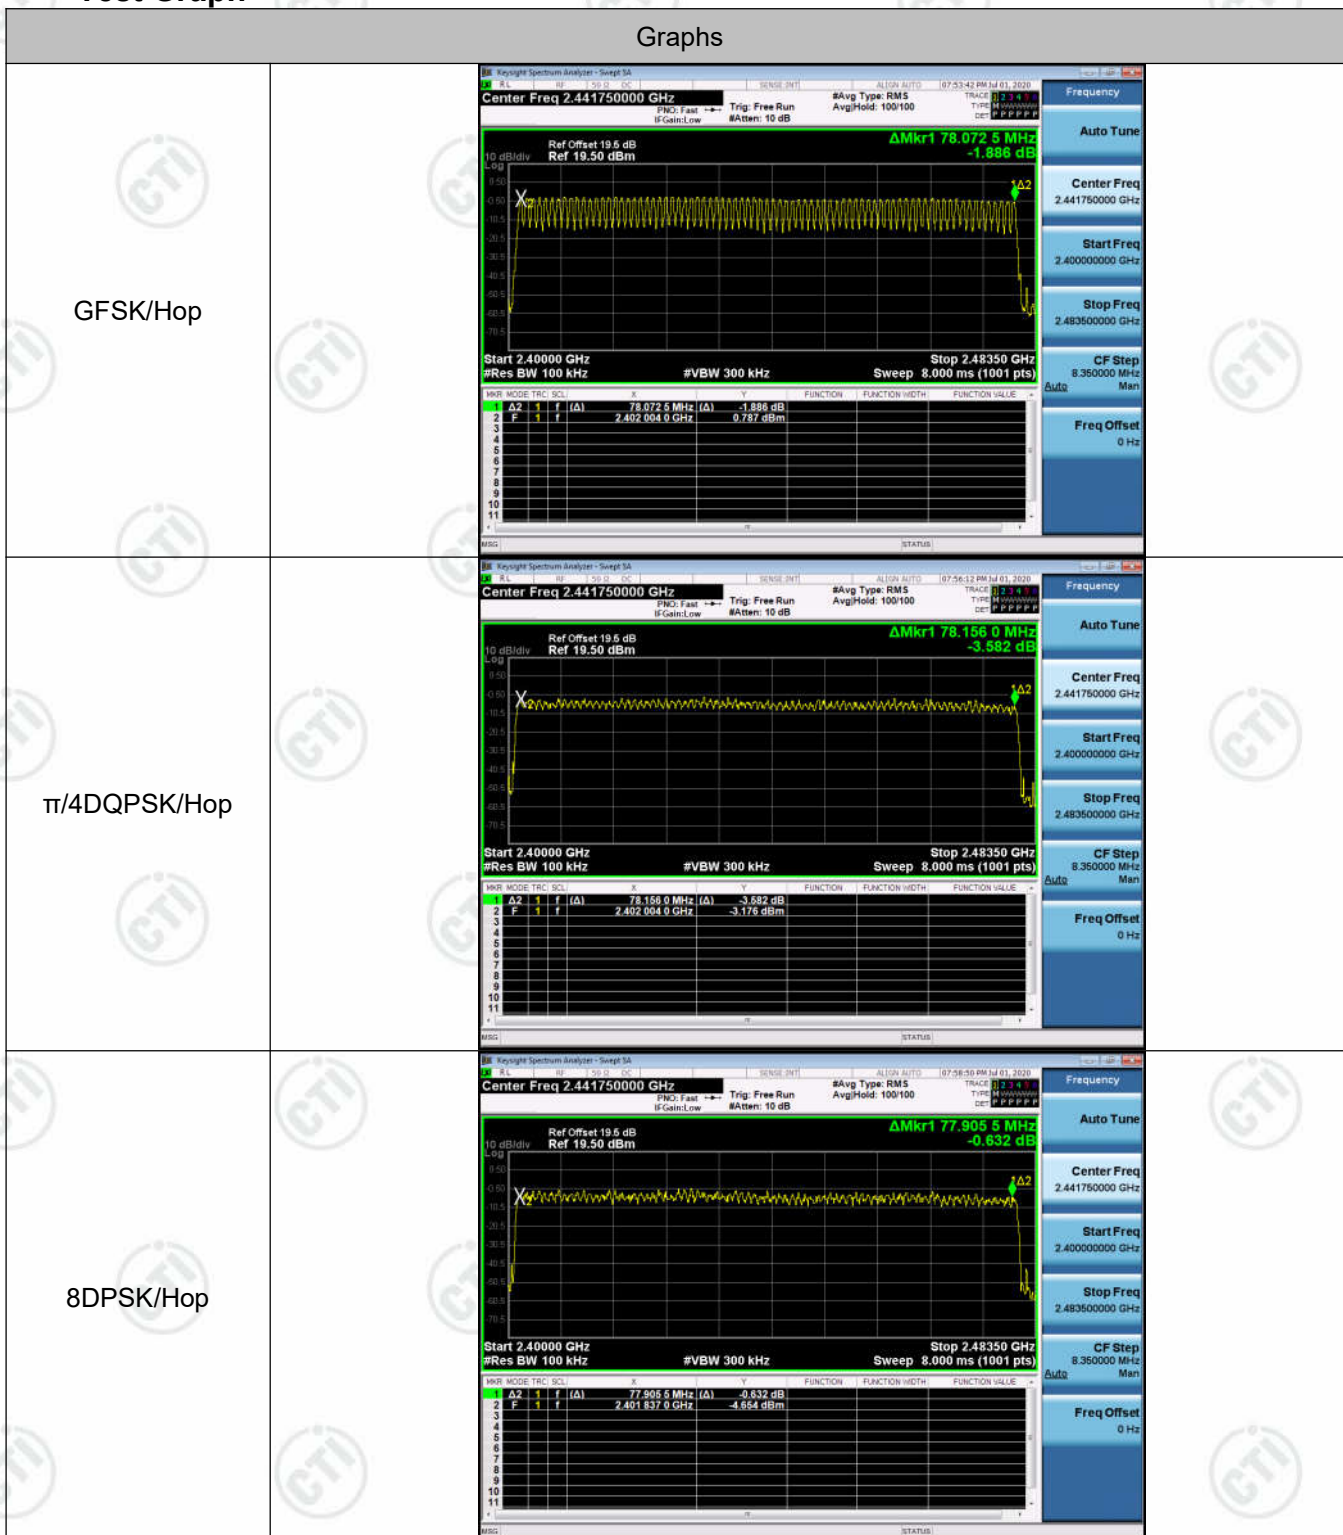



## Appendix E): Conducted Peak Output Power

### Test Limit

According to §15.247(b)(1).

#### Peak output power :

#### FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 21dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : 21dBm [ Limit = 30 – (DG – 6)]
-------	---

#### Average output power : For reporting purposes only.

### Test Procedure

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. Spectrum analyzer settings are as follows :
  - a) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
  - b) RBW > 20 dB bandwidth of the emission being measured.
  - c) VBW ≥ RBW.
  - d) Sweep: Auto.
  - e) Detector function: Peak.
  - f) Trace: Max hold.
  - g) Allow trace to stabilize.
  - h) Use the marker-to-peak function to set the marker to the peak of the emission
4. Measure and record the result in the test report.

### Test Setup

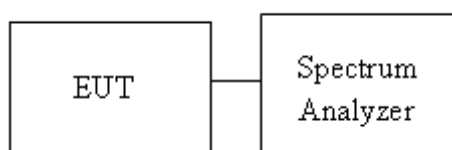




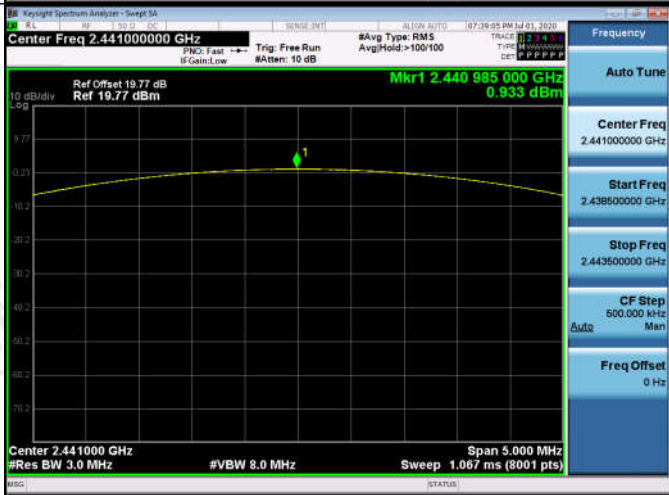
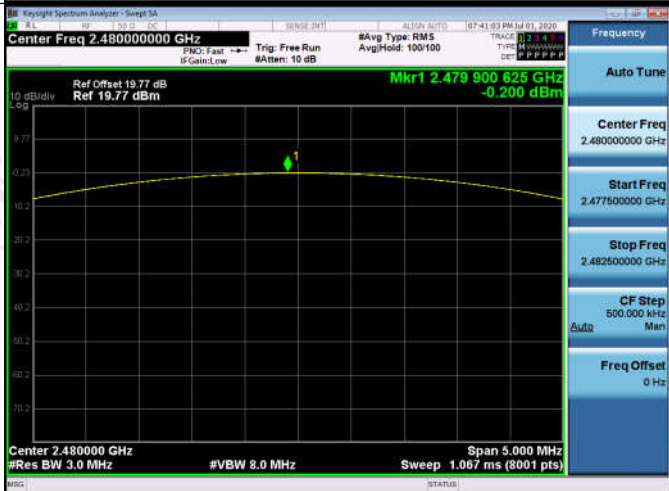
## Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	0.797	PASS
GFSK	MCH	1.281	PASS
GFSK	HCH	0.178	PASS
$\pi/4$ DQPSK	LCH	-0.670	PASS
$\pi/4$ DQPSK	MCH	-0.264	PASS
$\pi/4$ DQPSK	HCH	-1.380	PASS
8DPSK	LCH	0.517	PASS
8DPSK	MCH	0.933	PASS
8DPSK	HCH	-0.200	PASS

## Test Graph

Graphs	
GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	

8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	



## Appendix F): Band-edge for RF Conducted Emissions

### Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

### Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.

### Test Setup

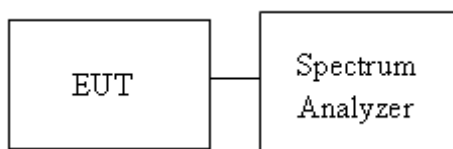


**Result Table**

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	0.860	Off	-60.334	-19.14	PASS
			1.772	On	-53.930	-18.23	PASS
GFSK	HCH	2480	0.225	Off	-51.113	-19.78	PASS
			0.511	On	-54.827	-19.49	PASS
$\pi/4$ DQPSK	LCH	2402	-3.202	Off	-60.301	-23.2	PASS
			-2.129	On	-56.936	-22.13	PASS
$\pi/4$ DQPSK	HCH	2480	-3.618	Off	-51.664	-23.62	PASS
			-4.019	On	-44.206	-24.02	PASS
8DPSK	LCH	2402	-1.911	Off	-60.329	-21.91	PASS
			-1.335	On	-56.480	-21.34	PASS
8DPSK	HCH	2480	-2.631	Off	-51.332	-22.63	PASS
			-2.046	On	-58.910	-22.05	PASS


## Test Graph

### Graphs


GFSK/LCH/No Hop



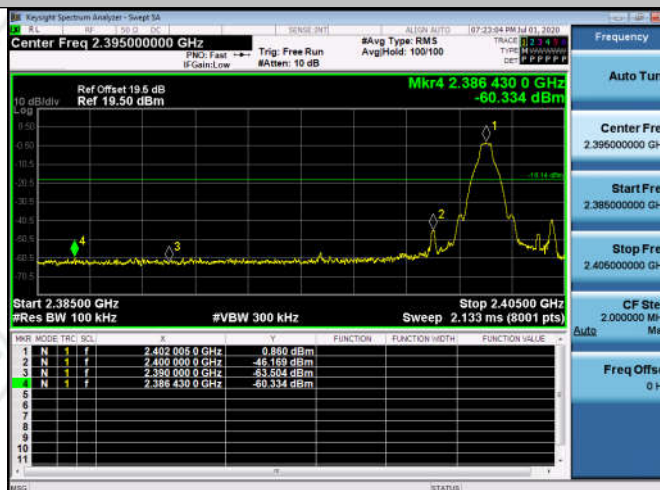


GFSK/LCH/Hop



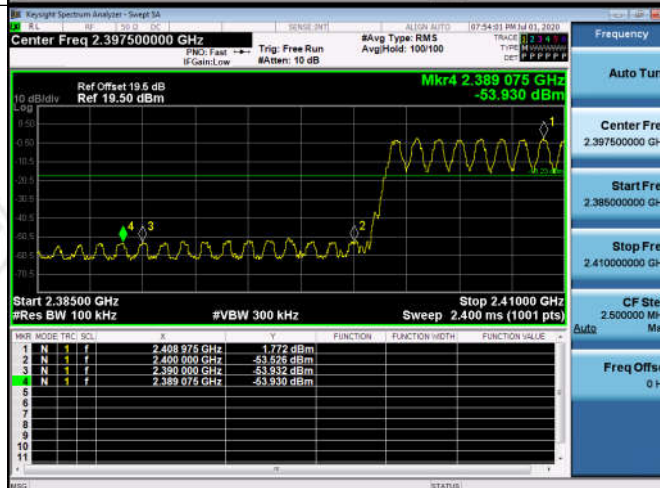


GFSK/HCH/No Hop

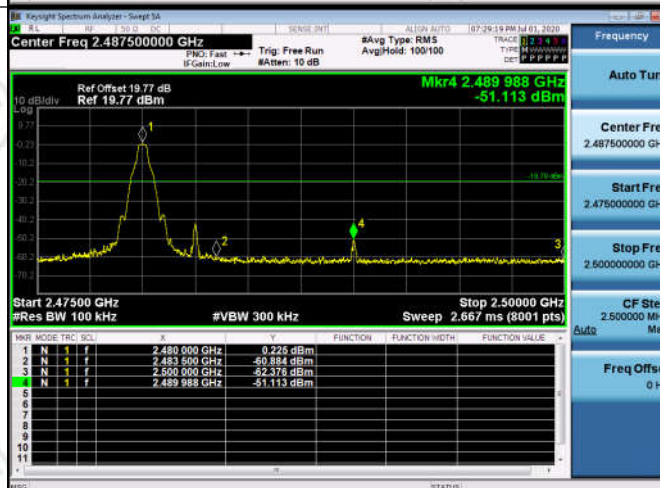
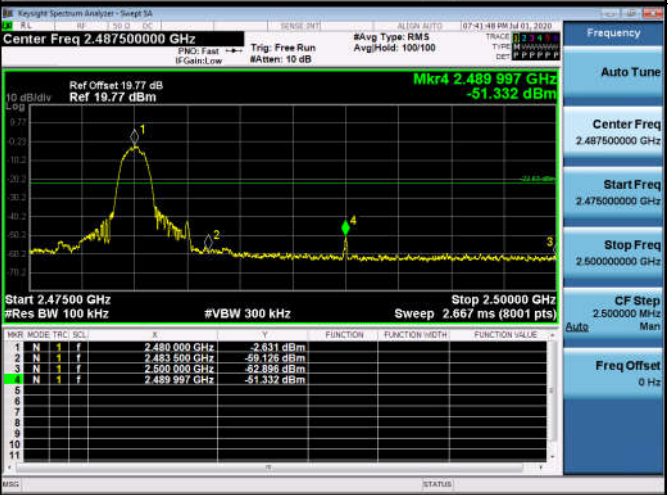
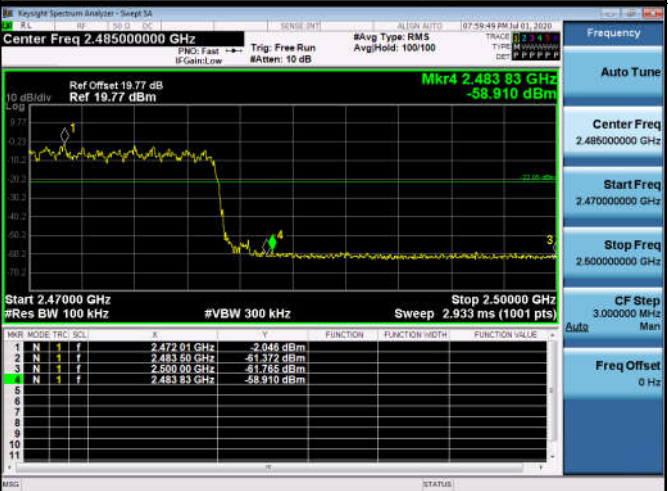


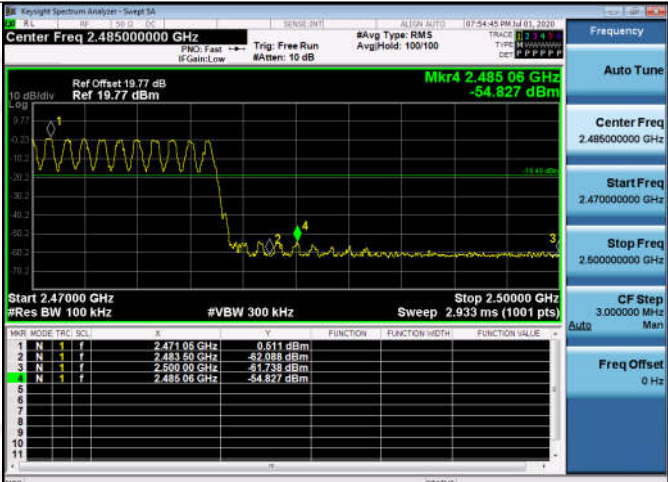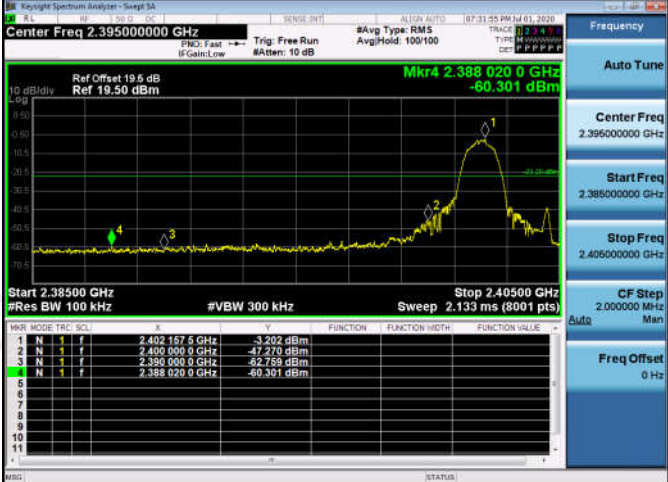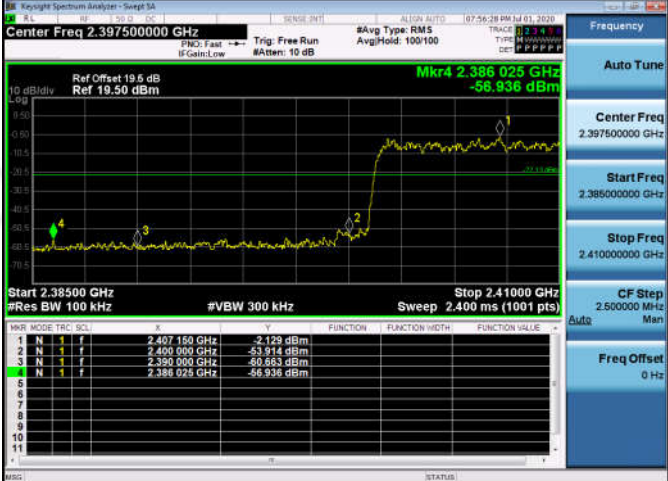GFSK/HCH/Hop	 <p>Center Freq 2.48500000 GHz</p> <p>Ref Offset: 19.77 dB Ref 19.77 dBm</p> <p>Mkr4 2.485 06 GHz -54.827 dBm</p> <p>Start 2.47000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms (1001 pts)</p> <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.471 06 GHz</td><td>0.511 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-47.889 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-61.738 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.485 06 GHz</td><td>-54.827 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.471 06 GHz	0.511 dBm				2	N	1	f	2.483 50 GHz	-47.889 dBm				3	N	1	f	2.500 00 GHz	-61.738 dBm				4	N	1	f	2.485 06 GHz	-54.827 dBm			
MKR	MODE	TRC	SCL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.471 06 GHz	0.511 dBm																																									
2	N	1	f	2.483 50 GHz	-47.889 dBm																																									
3	N	1	f	2.500 00 GHz	-61.738 dBm																																									
4	N	1	f	2.485 06 GHz	-54.827 dBm																																									
$\pi/4$ DQPSK/LCH/No Hop	 <p>Center Freq 2.39500000 GHz</p> <p>Ref Offset: 19.5 dB Ref 19.50 dBm</p> <p>Mkr4 2.388 020 0 GHz -60.301 dBm</p> <p>Start 2.38500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.133 ms (8001 pts)</p> <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 157 5 GHz</td><td>-3.262 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 0 GHz</td><td>-47.270 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.380 000 0 GHz</td><td>-62.758 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.388 020 0 GHz</td><td>-60.301 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 157 5 GHz	-3.262 dBm				2	N	1	f	2.400 000 0 GHz	-47.270 dBm				3	N	1	f	2.380 000 0 GHz	-62.758 dBm				4	N	1	f	2.388 020 0 GHz	-60.301 dBm			
MKR	MODE	TRC	SCL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 157 5 GHz	-3.262 dBm																																									
2	N	1	f	2.400 000 0 GHz	-47.270 dBm																																									
3	N	1	f	2.380 000 0 GHz	-62.758 dBm																																									
4	N	1	f	2.388 020 0 GHz	-60.301 dBm																																									
$\pi/4$ DQPSK/LCH/Hop	 <p>Center Freq 2.39750000 GHz</p> <p>Ref Offset: 19.5 dB Ref 19.50 dBm</p> <p>Mkr4 2.386 025 GHz -56.936 dBm</p> <p>Start 2.38500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.400 ms (1001 pts)</p> <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.407 150 GHz</td><td>-2.129 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-63.914 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.380 000 GHz</td><td>-60.863 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.386 025 GHz</td><td>-56.936 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.407 150 GHz	-2.129 dBm				2	N	1	f	2.400 000 GHz	-63.914 dBm				3	N	1	f	2.380 000 GHz	-60.863 dBm				4	N	1	f	2.386 025 GHz	-56.936 dBm			
MKR	MODE	TRC	SCL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.407 150 GHz	-2.129 dBm																																									
2	N	1	f	2.400 000 GHz	-63.914 dBm																																									
3	N	1	f	2.380 000 GHz	-60.863 dBm																																									
4	N	1	f	2.386 025 GHz	-56.936 dBm																																									

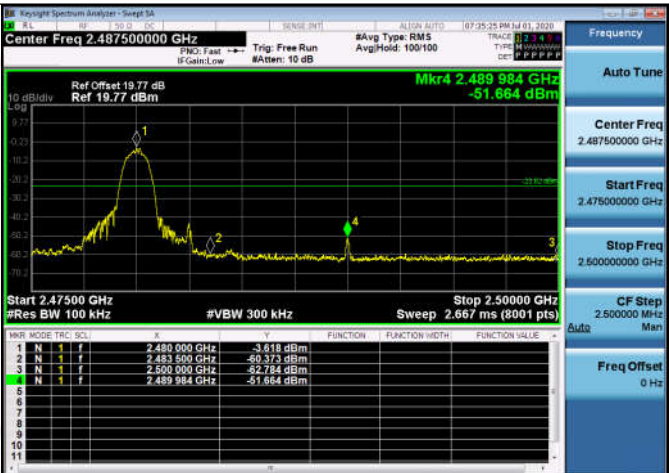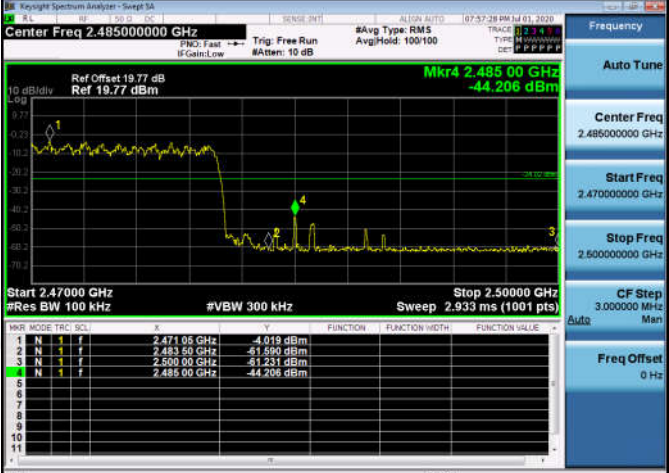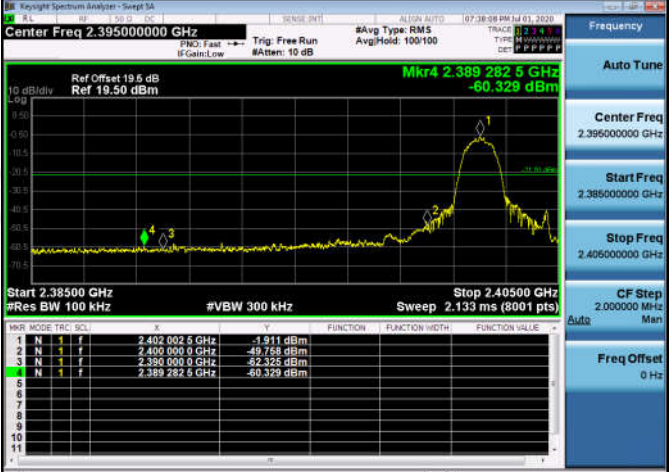

<p><math>\pi/4</math>DQPSK/HCH/No Hop</p>	
<p><math>\pi/4</math>DQPSK/HCH/Hop</p>	
<p>8DPSK/LCH/No Hop</p>	



8DPSK/LCH/Hop	
8DPSK/HCH/No Hop	
8DPSK/HCH/Hop	

## Appendix G): RF Conducted Spurious Emissions


Test Limit  
According to §15.247(d),

Limit	-20 dBc
-------	---------

### Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.


### Test Setup

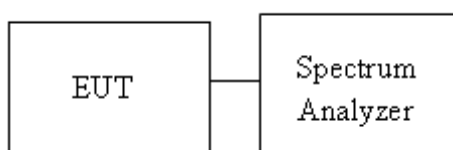

**Result Table**

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	0.728	<Limit	PASS
GFSK	MCH	1.155	<Limit	PASS
GFSK	HCH	0.071	<Limit	PASS
$\pi/4$ DQPSK	LCH	-3.152	<Limit	PASS
$\pi/4$ DQPSK	MCH	-2.789	<Limit	PASS
$\pi/4$ DQPSK	HCH	-3.833	<Limit	PASS
8DPSK	LCH	-2.147	<Limit	PASS
8DPSK	MCH	-1.638	<Limit	PASS
8DPSK	HCH	-2.742	<Limit	PASS

## Test Graph

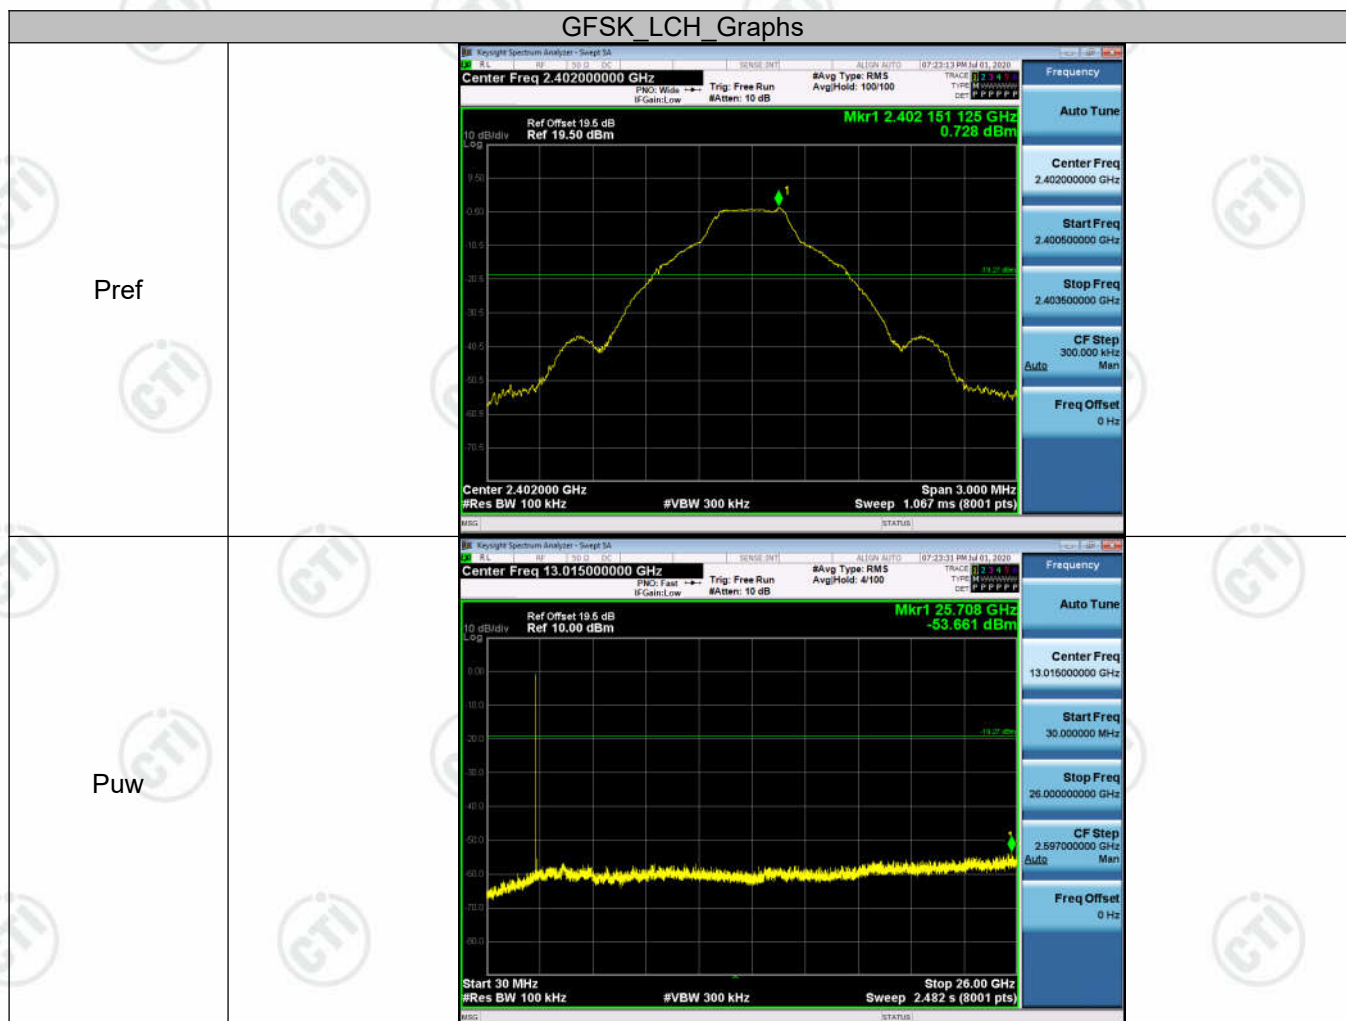















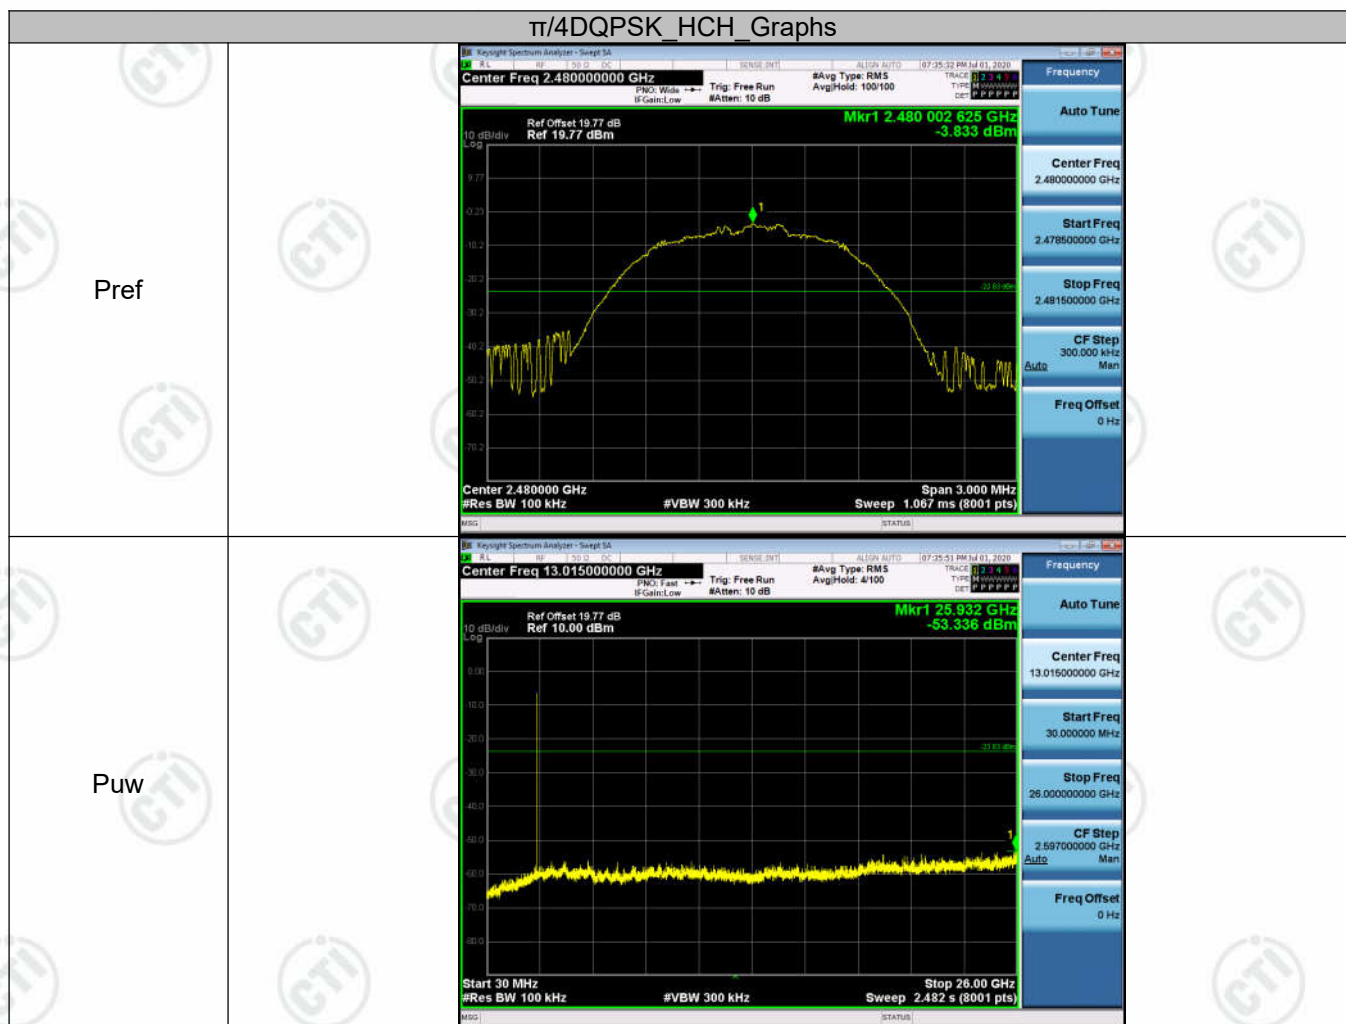

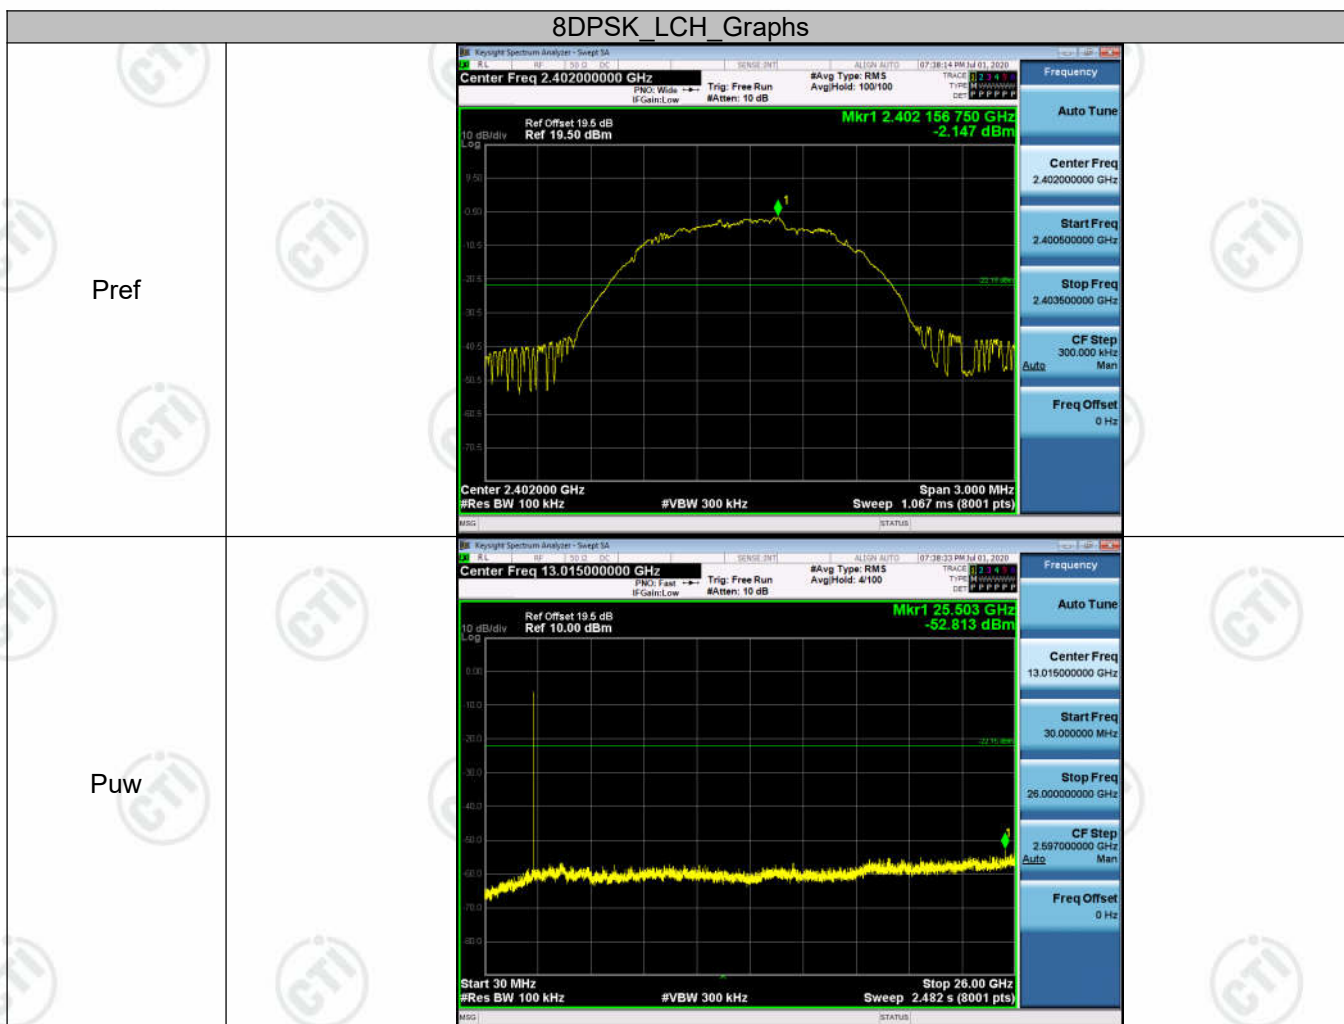







## Appendix H)Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul> <div data-bbox="317 949 1370 1097"> </div> <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="290 1196 1275 1341"> </div> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> <p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

## Appendix I)Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**EUT Antenna:**

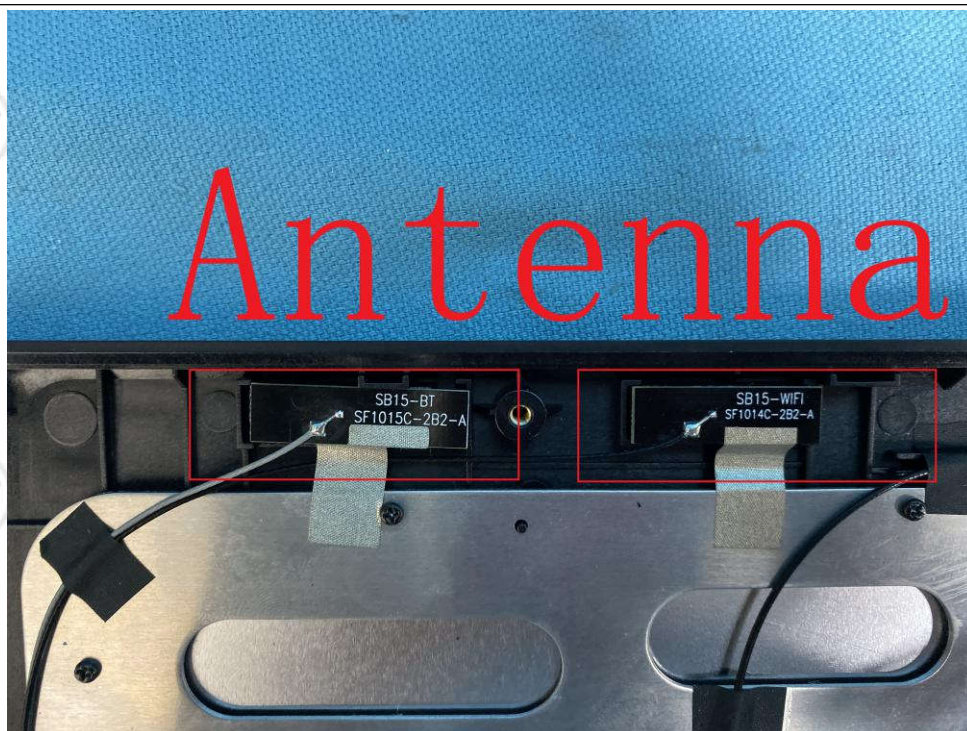

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.99 dBi.



## Appendix J)AC Power Line Conducted Emission


Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1) The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>																
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															

## Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

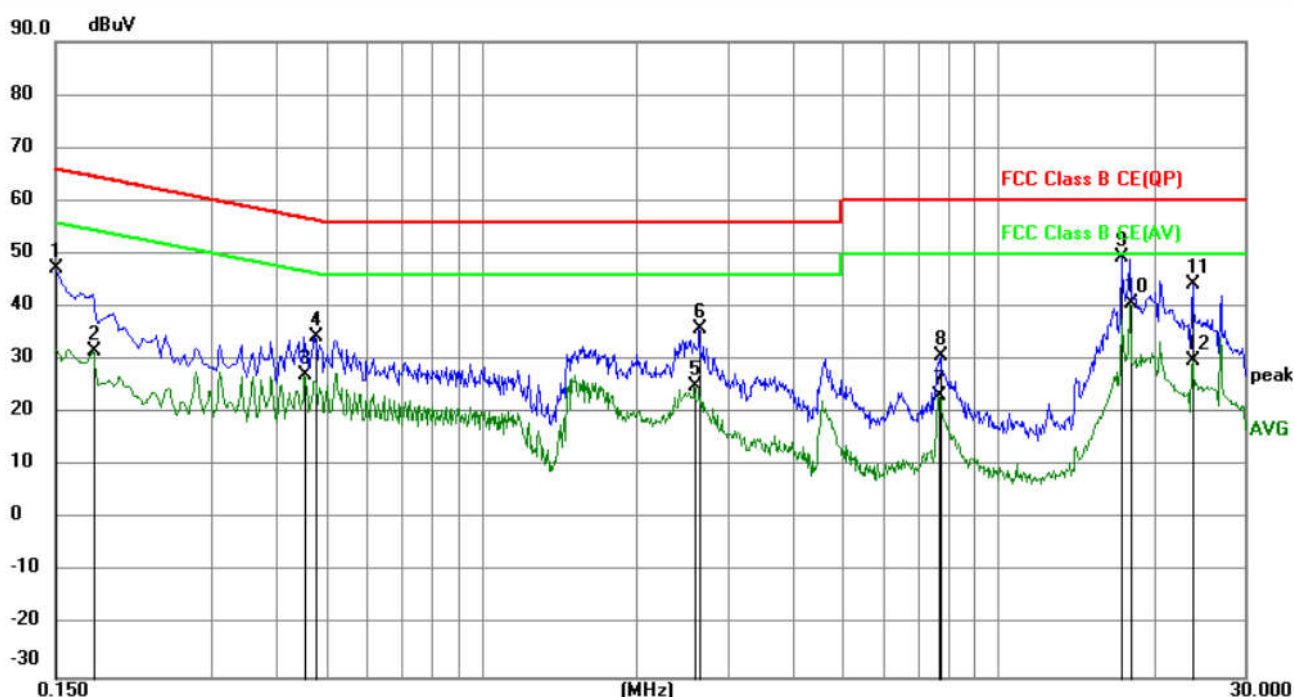

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	37.42	9.88	47.30	66.00	-18.70	QP	
2		0.1770	21.76	9.87	31.63	54.63	-23.00	AVG	
3		0.4560	17.28	9.98	27.26	46.77	-19.51	AVG	
4		0.4785	24.26	10.02	34.28	56.37	-22.09	QP	
5		2.5889	15.36	9.79	25.15	46.00	-20.85	AVG	
6		2.6430	25.94	9.79	35.73	56.00	-20.27	QP	
7		7.6650	13.56	9.79	23.35	50.00	-26.65	AVG	
8		7.7280	20.87	9.79	30.66	60.00	-29.34	QP	
9		17.3715	39.38	9.84	49.22	60.00	-10.78	QP	
10	*	18.0015	30.89	9.84	40.73	50.00	-9.27	AVG	
11		23.8020	34.24	9.93	44.17	60.00	-15.83	QP	
12		23.8020	19.99	9.93	29.92	50.00	-20.08	AVG	

Neutral line:

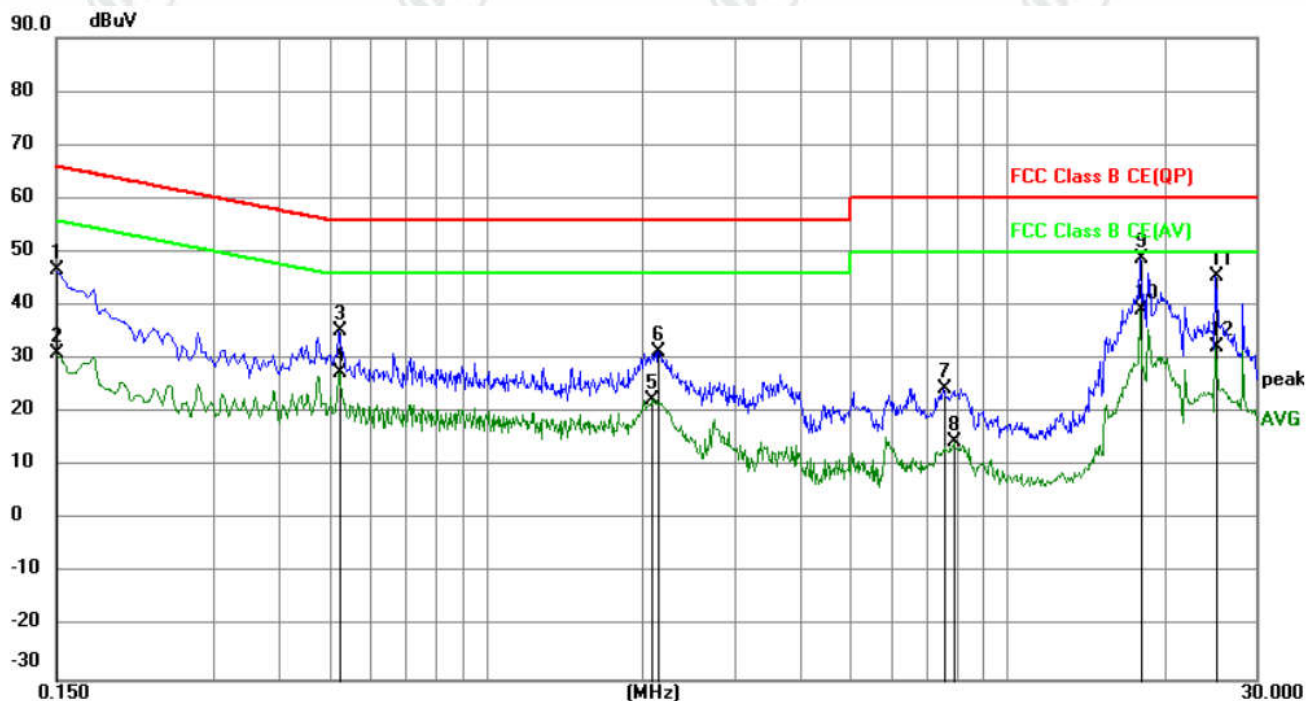

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	36.70	9.88	46.58	66.00	-19.42	QP	
2		0.1500	21.27	9.88	31.15	56.00	-24.85	AVG	
3		0.5235	25.18	10.03	35.21	56.00	-20.79	QP	
4		0.5235	17.43	10.03	27.46	46.00	-18.54	AVG	
5		2.0805	12.53	9.79	22.32	46.00	-23.68	AVG	
6		2.1345	21.55	9.79	31.34	56.00	-24.66	QP	
7		7.5615	14.70	9.79	24.49	60.00	-35.51	QP	
8		7.9215	4.64	9.80	14.44	50.00	-35.56	AVG	
9		18.0015	38.86	9.84	48.70	60.00	-11.30	QP	
10	*	18.0015	29.43	9.84	39.27	50.00	-10.73	AVG	
11		25.0980	35.55	9.95	45.50	60.00	-14.50	QP	
12		25.0980	22.40	9.95	32.35	50.00	-17.65	AVG	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

## Appendix K) Restricted bands around fundamental frequency (Radiated)


Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).</li> <li>b. Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
Limit:	Frequency	Limit (dBuV/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		



Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

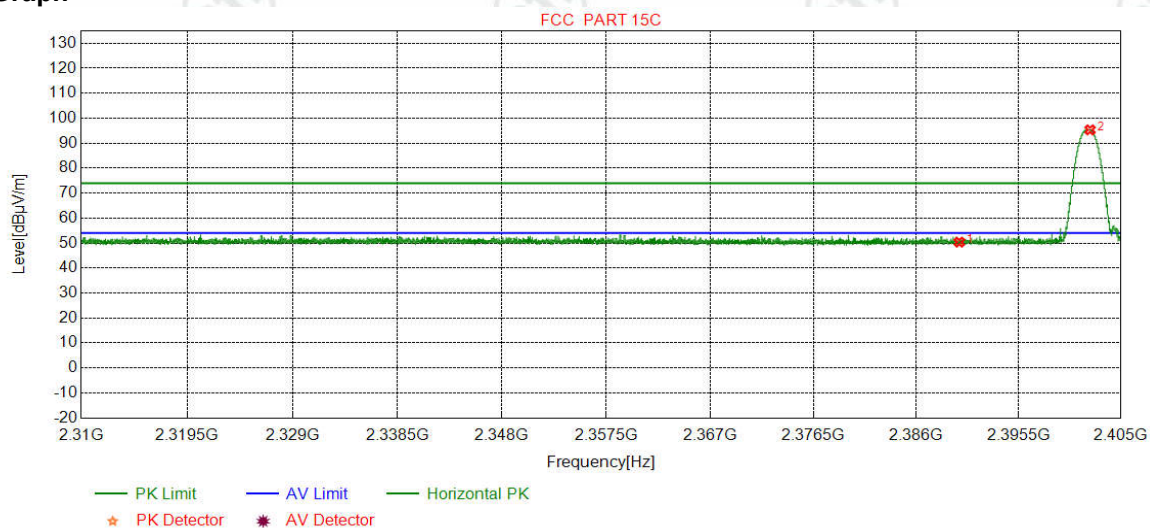

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.87	50.37	74.00	23.63	Pass	Horizontal
2	2402.1435	32.26	13.31	-43.12	92.88	95.33	74.00	-21.33	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


### Test Graph

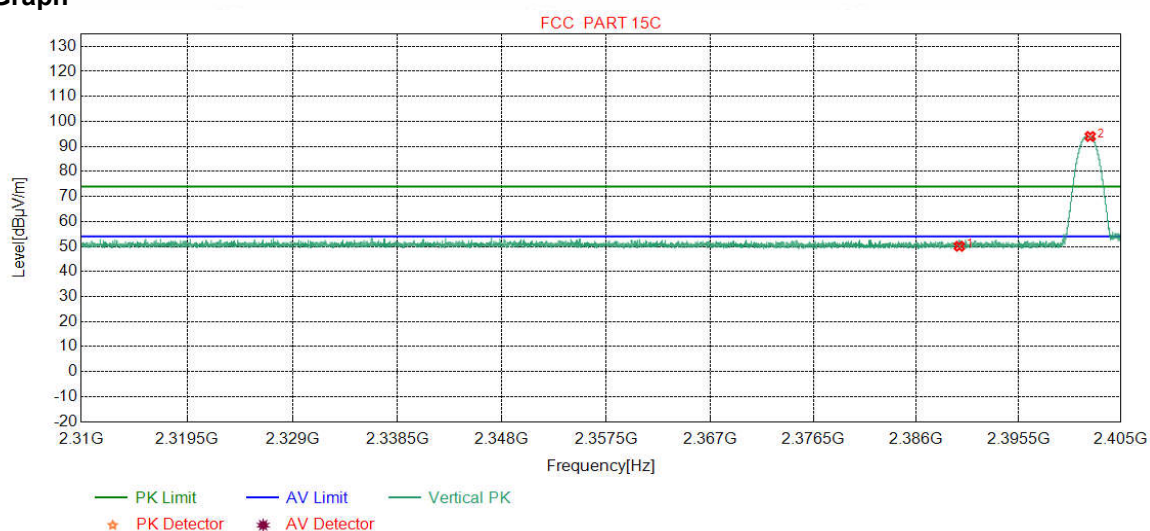

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.58	50.08	74.00	23.92	Pass	Vertical
2	2402.1561	32.26	13.31	-43.12	91.54	93.99	74.00	-19.99	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

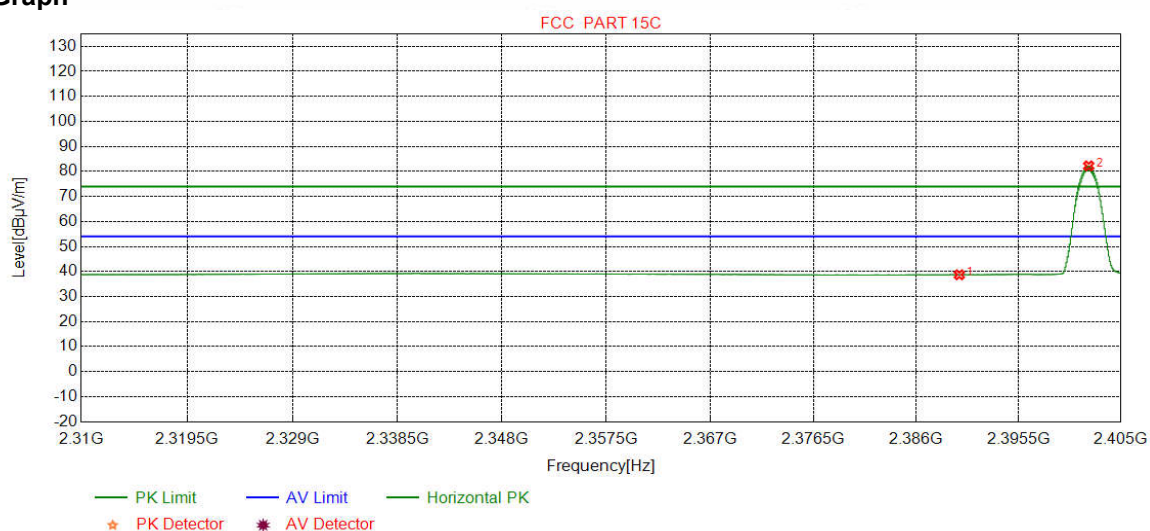

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.19	38.69	54.00	15.31	Pass	Horizontal
2	2402.0168	32.26	13.31	-43.12	79.77	82.22	54.00	-28.22	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		

### Test Graph

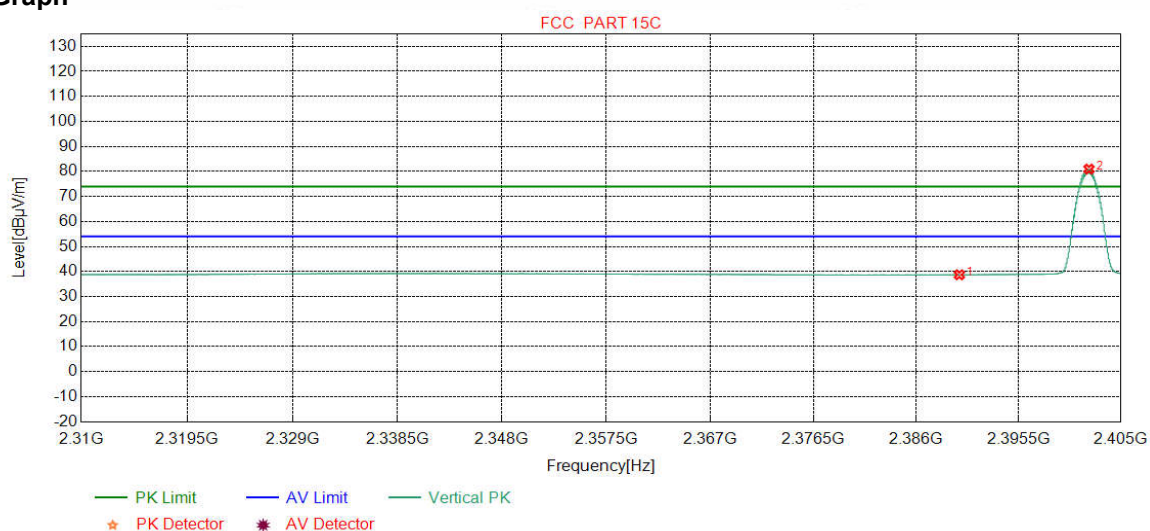


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.20	38.70	54.00	15.30	Pass	Vertical
2	2402.0421	32.26	13.31	-43.12	78.49	80.94	54.00	-26.94	Pass	Vertical



Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

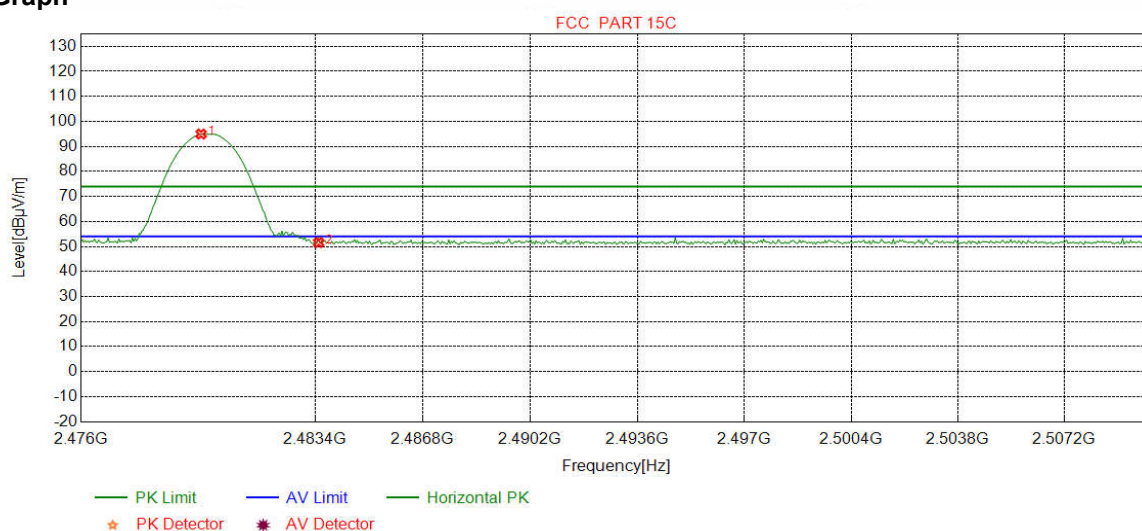

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.7872	32.37	13.39	-43.10	92.29	94.95	74.00	-20.95	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	48.91	51.56	74.00	22.44	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

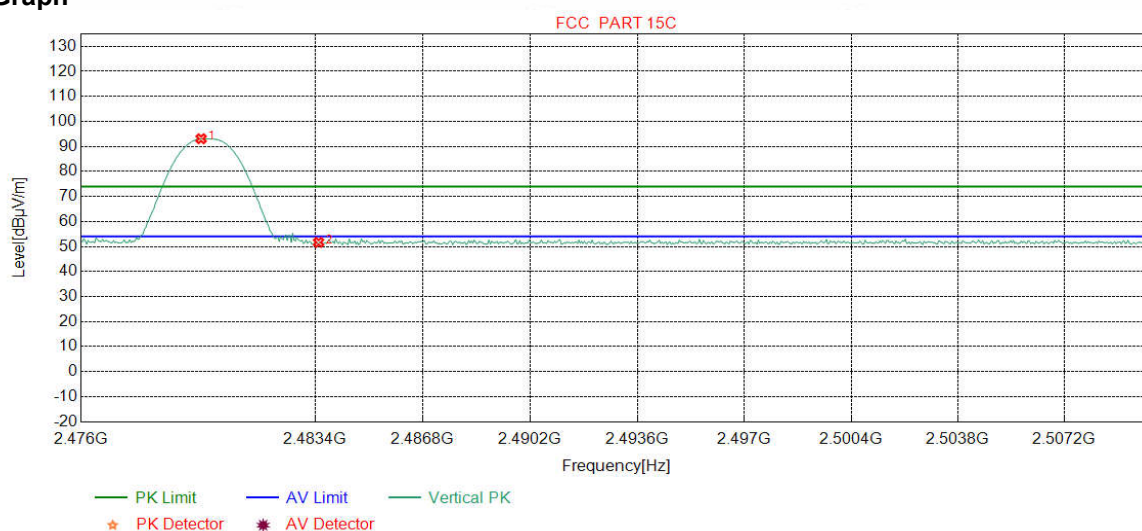

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.7872	32.37	13.39	-43.10	90.41	93.07	74.00	-19.07	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	49.00	51.65	74.00	22.35	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


### Test Graph

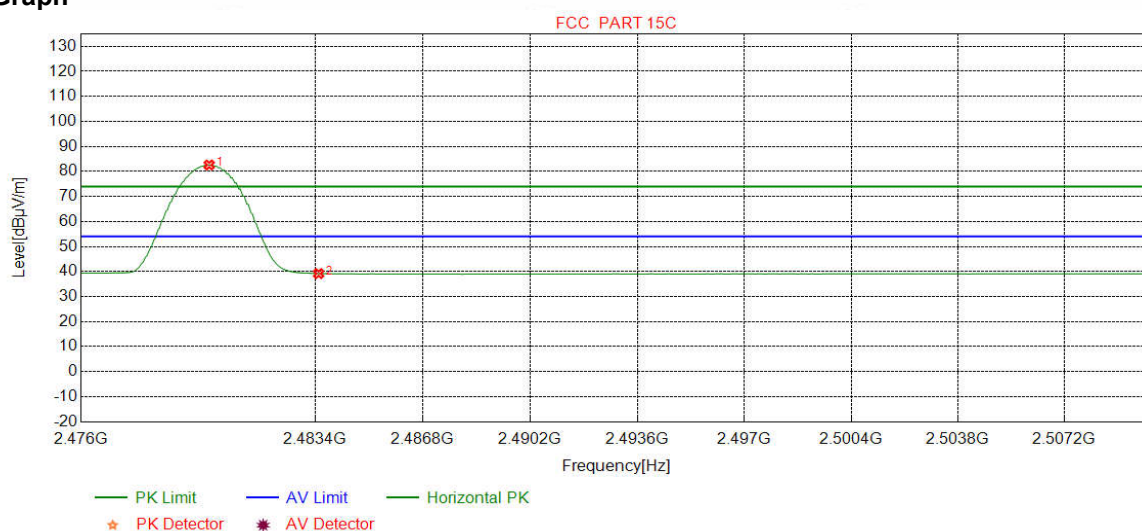

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	79.93	82.59	54.00	-28.59	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	36.52	39.17	54.00	14.83	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		

### Test Graph

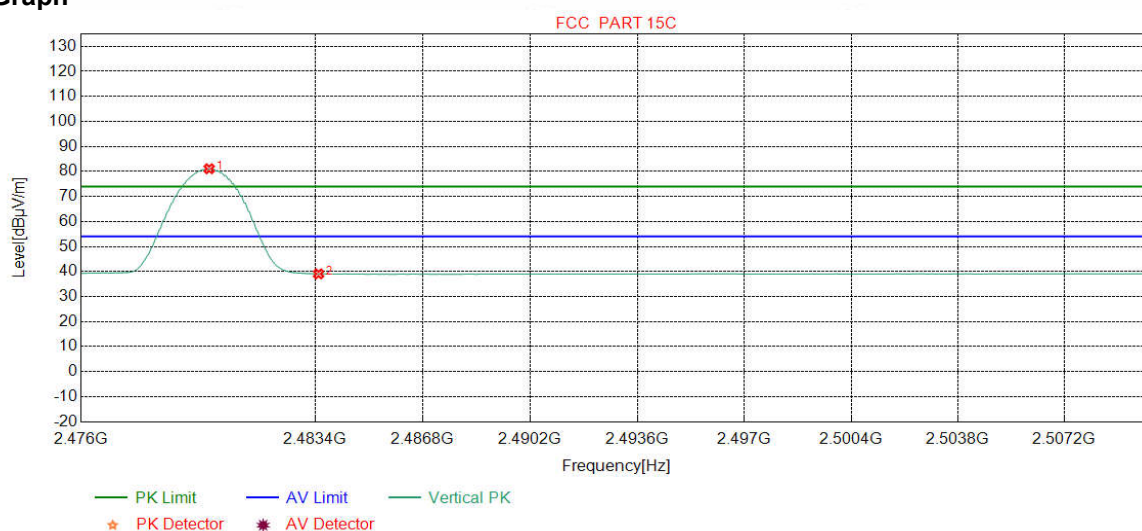


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	78.41	81.07	54.00	-27.07	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	36.41	39.06	54.00	14.94	Pass	Vertical



Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


### Test Graph

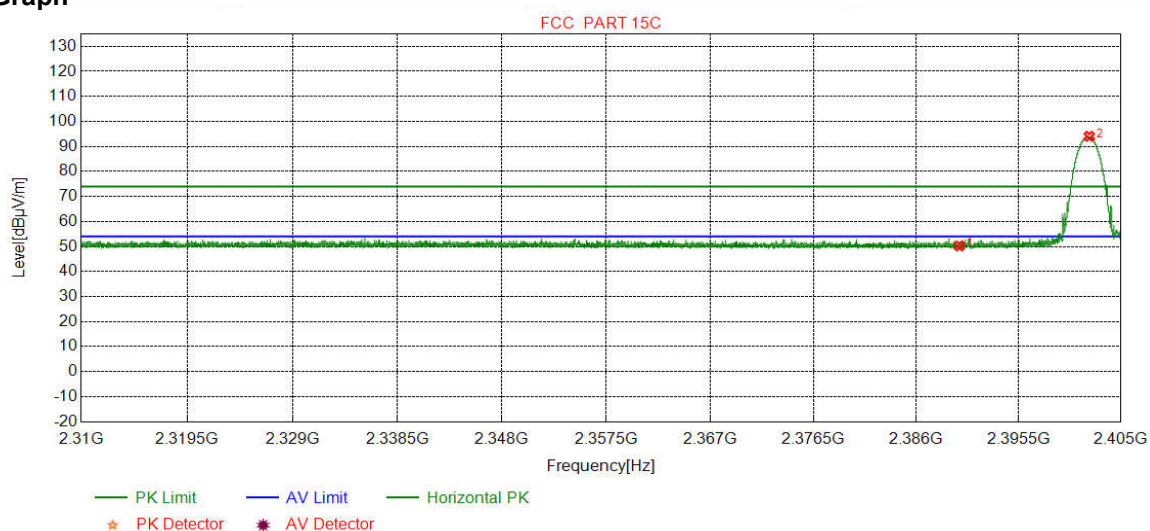

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.74	50.24	74.00	23.76	Pass	Horizontal
2	2402.0675	32.26	13.31	-43.12	91.60	94.05	74.00	-20.05	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


### Test Graph

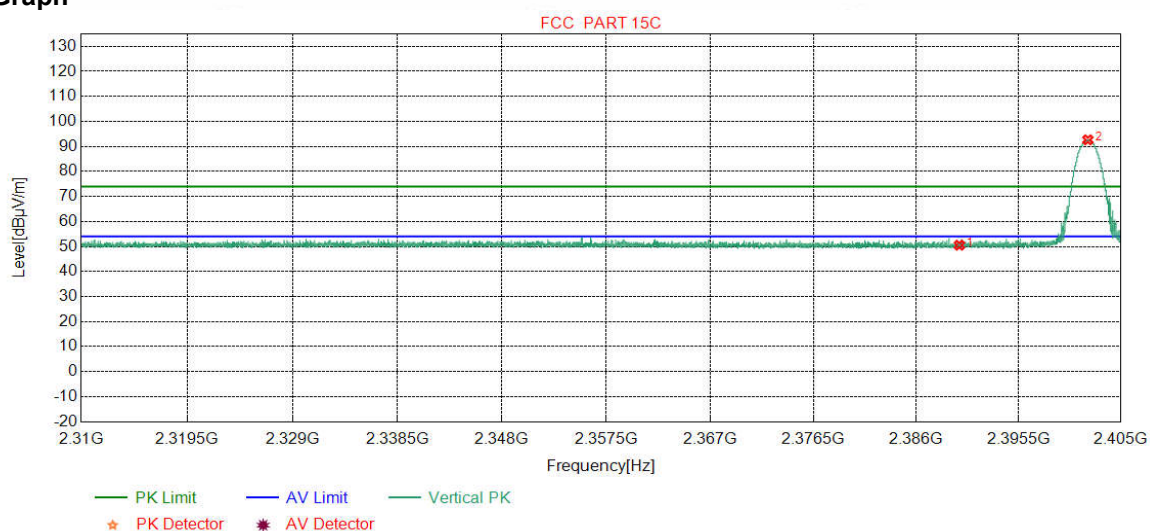

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	48.02	50.52	74.00	23.48	Pass	Vertical
2	2401.9345	32.26	13.31	-43.12	90.18	92.63	74.00	-18.63	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


### Test Graph

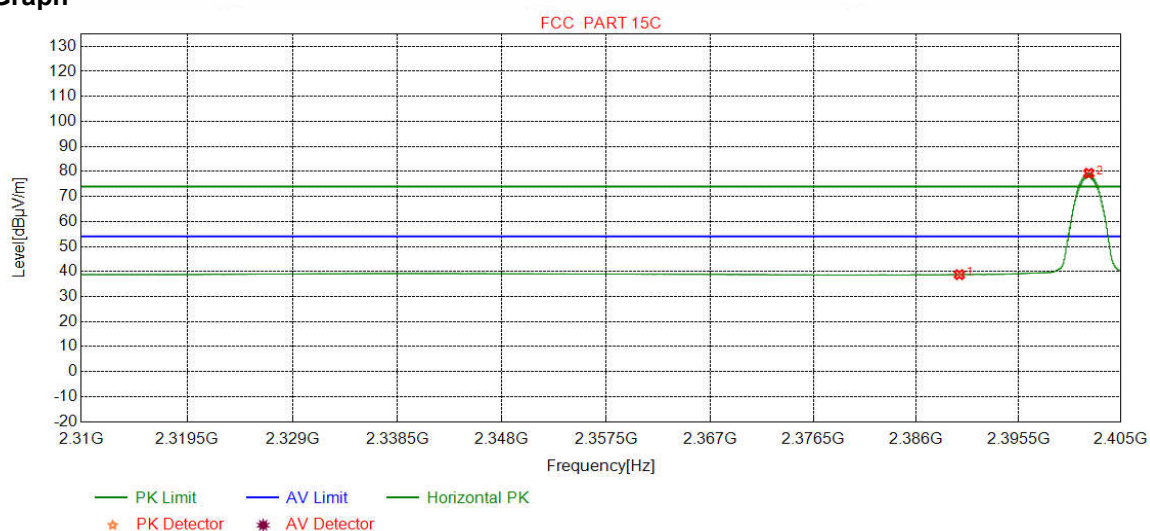

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.27	38.77	54.00	15.23	Pass	Horizontal
2	2402.0231	32.26	13.31	-43.12	76.84	79.29	54.00	-25.29	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		

### Test Graph

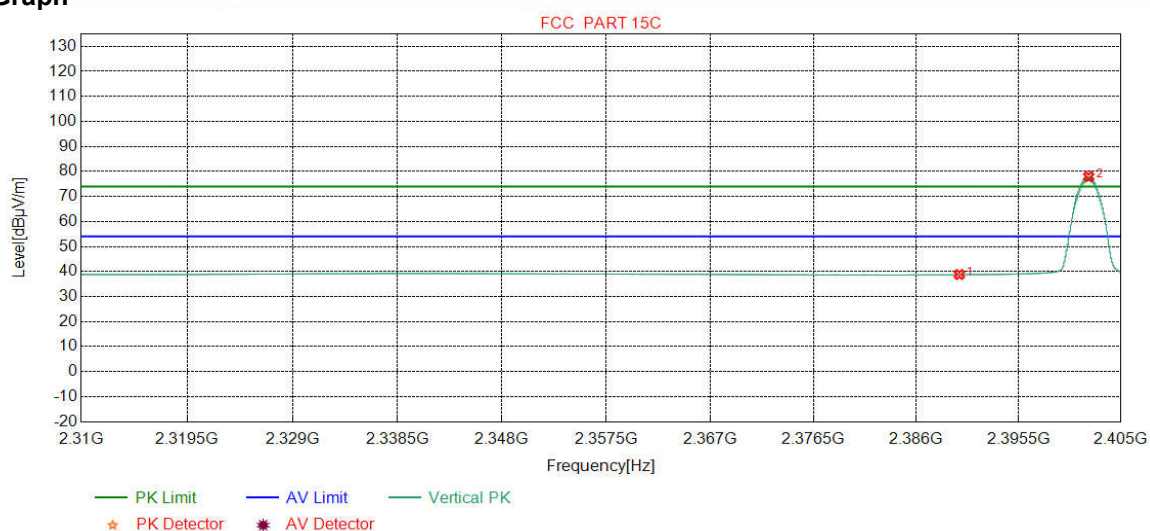


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.30	38.80	54.00	15.20	Pass	Vertical
2	2402.0105	32.26	13.31	-43.12	75.48	77.93	54.00	-23.93	Pass	Vertical



Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

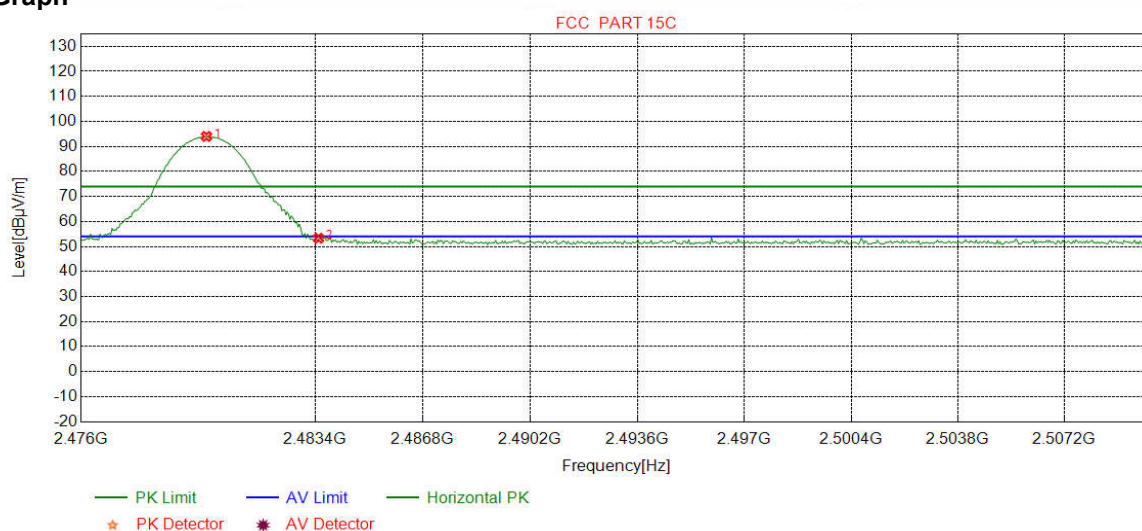

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9574	32.37	13.39	-43.10	91.34	94.00	74.00	-20.00	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	50.67	53.32	74.00	20.68	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


### Test Graph

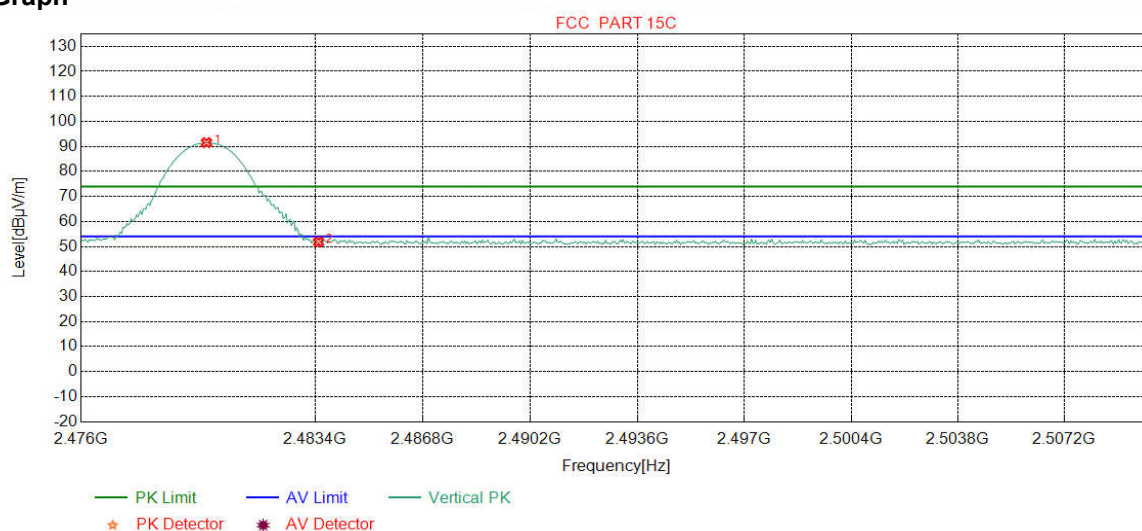

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9574	32.37	13.39	-43.10	88.87	91.53	74.00	-17.53	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	49.18	51.83	74.00	22.17	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		


### Test Graph

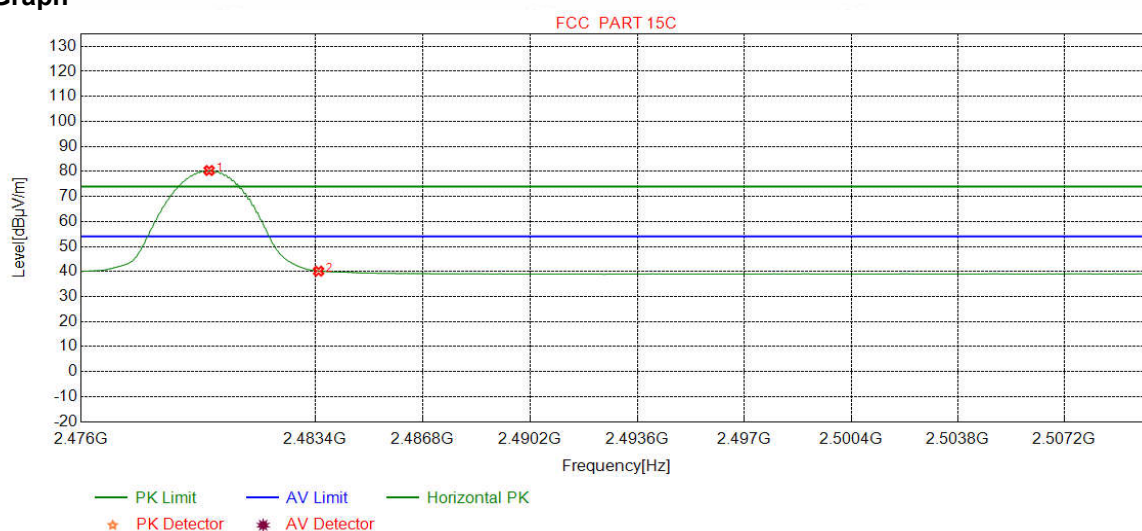

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0426	32.37	13.39	-43.10	77.71	80.37	54.00	-26.37	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	37.49	40.14	54.00	13.86	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

### Test Graph

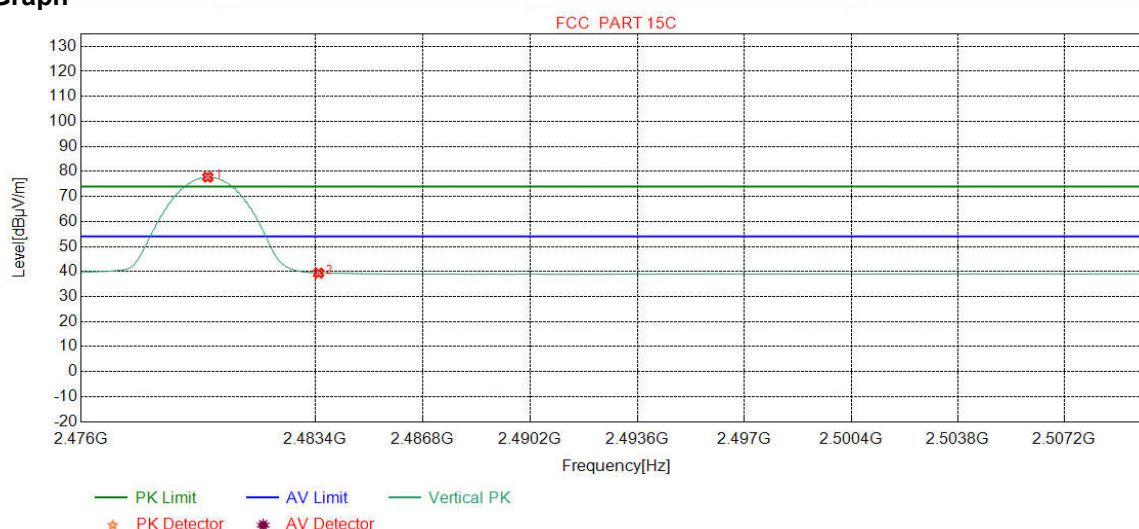

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0000	32.37	13.39	-43.10	75.07	77.73	54.00	-23.73	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	36.72	39.37	54.00	14.63	Pass	Vertical

### Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor



## Appendix L) Radiated Spurious Emissions

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Test Procedure:

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.

j. Repeat above procedures until all frequencies measured was complete.

Limit:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

## Radiated Spurious Emissions test Data:

### Radiated Emission below 1GHz

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	59.9760	11.60	0.90	-31.80	49.05	29.75	40.00	10.25	Pass	H	PK
2	120.0250	9.20	1.30	-32.07	45.66	24.09	43.50	19.41	Pass	H	PK
3	240.0260	11.94	1.84	-31.90	45.48	27.36	46.00	18.64	Pass	H	PK
4	383.9884	15.05	2.33	-31.86	44.39	29.91	46.00	16.09	Pass	H	PK
5	649.9890	19.40	3.10	-32.07	46.58	37.01	46.00	8.99	Pass	H	PK
6	904.9305	22.13	3.60	-31.44	44.74	39.03	46.00	6.97	Pass	H	PK
7	59.9760	11.60	0.90	-31.80	45.70	26.40	40.00	13.60	Pass	V	PK
8	150.0010	7.55	1.45	-32.01	47.28	24.27	43.50	19.23	Pass	V	PK
9	240.0260	11.94	1.84	-31.90	42.42	24.30	46.00	21.70	Pass	V	PK
10	493.7064	16.90	2.66	-31.90	43.64	31.30	46.00	14.70	Pass	V	PK
11	649.9890	19.40	3.10	-32.07	46.56	36.99	46.00	9.01	Pass	V	PK
12	905.9006	22.14	3.60	-31.45	41.95	36.24	46.00	9.76	Pass	V	PK

**Transmitter Emission above 1GHz**

Mode:			GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Fact or [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1417.4417	28.3	2.92	-42.76	51.96	40.44	74.00	33.56	Pass	H	PK
2	4092.0728	33.9	4.32	-42.96	50.50	45.79	74.00	28.21	Pass	H	PK
3	4804.0000	34.5	4.55	-42.80	47.15	43.40	74.00	30.60	Pass	H	PK
4	7206.0000	36.3	5.81	-42.16	46.29	46.25	74.00	27.75	Pass	H	PK
5	9608.0000	37.6	6.63	-42.10	47.18	49.35	74.00	24.65	Pass	H	PK
6	12010.0000	39.3	7.60	-41.90	46.27	51.28	74.00	22.72	Pass	H	PK
7	1319.6320	28.2	2.78	-42.77	54.14	42.37	74.00	31.63	Pass	V	PK
8	3333.0222	33.3	4.54	-43.10	50.80	45.57	74.00	28.43	Pass	V	PK
9	4804.0000	34.5	4.55	-42.80	47.14	43.39	74.00	30.61	Pass	V	PK
10	7206.0000	36.3	5.81	-42.16	47.11	47.07	74.00	26.93	Pass	V	PK
11	9608.0000	37.6	6.63	-42.10	45.89	48.06	74.00	25.94	Pass	V	PK
12	12010.0000	39.3	7.60	-41.90	48.00	53.01	74.00	20.99	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1590.6591	29.00	3.06	-42.92	51.45	40.59	74.00	33.41	Pass	H	PK
2	3800.0533	33.64	4.37	-43.04	49.88	44.85	74.00	29.15	Pass	H	PK
3	4882.0000	34.50	4.81	-42.80	47.54	44.05	74.00	29.95	Pass	H	PK
4	7323.0000	36.42	5.85	-42.13	46.74	46.88	74.00	27.12	Pass	H	PK
5	9764.0000	37.71	6.71	-42.10	47.65	49.97	74.00	24.03	Pass	H	PK
6	12205.000	39.42	7.67	-41.89	46.20	51.40	74.00	22.60	Pass	H	PK
7	1322.0322	28.22	2.78	-42.76	54.02	42.26	74.00	31.74	Pass	V	PK
8	3796.0531	33.64	4.37	-43.05	50.74	45.70	74.00	28.30	Pass	V	PK
9	4882.0000	34.50	4.81	-42.80	46.38	42.89	74.00	31.11	Pass	V	PK
10	7323.0000	36.42	5.85	-42.13	46.36	46.50	74.00	27.50	Pass	V	PK
11	9764.0000	37.71	6.71	-42.10	48.24	50.56	74.00	23.44	Pass	V	PK
12	12205.000	39.42	7.67	-41.89	45.50	50.70	74.00	23.30	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1763.8764	30.14	3.25	-42.69	51.39	42.09	74.00	31.91	Pass	H	PK
2	3000.0000	33.20	4.93	-43.10	50.74	45.77	74.00	28.23	Pass	H	PK
3	4960.0000	34.50	4.82	-42.80	48.25	44.77	74.00	29.23	Pass	H	PK
4	7440.0000	36.54	5.85	-42.11	47.36	47.64	74.00	26.36	Pass	H	PK
5	9920.0000	37.77	6.79	-42.10	46.81	49.27	74.00	24.73	Pass	H	PK
6	12400.000	39.54	7.86	-41.90	46.96	52.46	74.00	21.54	Pass	H	PK
7	1322.0322	28.22	2.78	-42.76	54.13	42.37	74.00	31.63	Pass	V	PK
8	3405.0270	33.36	4.55	-43.10	49.86	44.67	74.00	29.33	Pass	V	PK
9	4960.0000	34.50	4.82	-42.80	48.27	44.79	74.00	29.21	Pass	V	PK
10	7440.0000	36.54	5.85	-42.11	46.57	46.85	74.00	27.15	Pass	V	PK
11	9920.0000	37.77	6.79	-42.10	46.42	48.88	74.00	25.12	Pass	V	PK
12	12400.000	39.54	7.86	-41.90	46.43	51.93	74.00	22.07	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1533.2533	28.62	3.02	-43.04	51.88	40.48	74.00	33.52	Pass	H	PK
2	3071.0047	33.23	4.78	-43.10	50.56	45.47	74.00	28.53	Pass	H	PK
3	4804.0000	34.50	4.55	-42.80	48.49	44.74	74.00	29.26	Pass	H	PK
4	7206.0000	36.31	5.81	-42.16	46.24	46.20	74.00	27.80	Pass	H	PK
5	9608.0000	37.64	6.63	-42.10	46.50	48.67	74.00	25.33	Pass	H	PK
6	12010.000	39.31	7.60	-41.90	46.88	51.89	74.00	22.11	Pass	H	PK
7	1321.6322	28.22	2.78	-42.76	54.25	42.49	74.00	31.51	Pass	V	PK
8	3832.0555	33.67	4.36	-43.03	50.18	45.18	74.00	28.82	Pass	V	PK
9	4804.0000	34.50	4.55	-42.80	47.75	44.00	74.00	30.00	Pass	V	PK
10	7206.0000	36.31	5.81	-42.16	46.79	46.75	74.00	27.25	Pass	V	PK
11	9608.0000	37.64	6.63	-42.10	47.13	49.30	74.00	24.70	Pass	V	PK
12	12010.000	39.31	7.60	-41.90	46.73	51.74	74.00	22.26	Pass	V	PK



Mode:			8DPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1317.8318	28.22	2.77	-42.76	52.29	40.52	74.00	33.48	Pass	H	PK
2	3274.0183	33.31	4.51	-43.10	51.64	46.36	74.00	27.64	Pass	H	PK
3	4882.0000	34.50	4.81	-42.80	47.61	44.12	74.00	29.88	Pass	H	PK
4	7323.0000	36.42	5.85	-42.13	46.52	46.66	74.00	27.34	Pass	H	PK
5	9764.0000	37.71	6.71	-42.10	46.62	48.94	74.00	25.06	Pass	H	PK
6	12205.000	39.42	7.67	-41.89	45.88	51.08	74.00	22.92	Pass	H	PK
7	1319.8320	28.22	2.78	-42.77	54.48	42.71	74.00	31.29	Pass	V	PK
8	4198.0799	34.08	4.48	-42.92	50.75	46.39	74.00	27.61	Pass	V	PK
9	4882.0000	34.50	4.81	-42.80	48.42	44.93	74.00	29.07	Pass	V	PK
10	7323.0000	36.42	5.85	-42.13	46.01	46.15	74.00	27.85	Pass	V	PK
11	9764.0000	37.71	6.71	-42.10	46.86	49.18	74.00	24.82	Pass	V	PK
12	12205.000	39.42	7.67	-41.89	46.01	51.21	74.00	22.79	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2480	
N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1734.4734	29.95	3.22	-42.68	51.49	41.98	74.00	32.02	Pass	H	PK
2	3185.0123	33.27	4.63	-43.10	50.69	45.49	74.00	28.51	Pass	H	PK
3	4960.0000	34.50	4.82	-42.80	48.46	44.98	74.00	29.02	Pass	H	PK
4	7440.0000	36.54	5.85	-42.11	46.68	46.96	74.00	27.04	Pass	H	PK
5	9920.0000	37.77	6.79	-42.10	47.46	49.92	74.00	24.08	Pass	H	PK
6	12400.0000	39.54	7.86	-41.90	46.22	51.72	74.00	22.28	Pass	H	PK
7	1440.0440	28.34	2.94	-42.85	53.82	42.25	74.00	31.75	Pass	V	PK
8	3207.0138	33.28	4.62	-43.10	50.08	44.88	74.00	29.12	Pass	V	PK
9	4960.0000	34.50	4.82	-42.80	48.22	44.74	74.00	29.26	Pass	V	PK
10	7440.0000	36.54	5.85	-42.11	47.45	47.73	74.00	26.27	Pass	V	PK
11	9920.0000	37.77	6.79	-42.10	45.27	47.73	74.00	26.27	Pass	V	PK
12	12400.0000	39.54	7.86	-41.90	46.39	51.89	74.00	22.11	Pass	V	PK

**Note:**

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.