



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.org.cn

TEST REPORT

Report No.: **CTC20211614E04**

FCC ID.....: **2A3KLWS-WC03**

Applicant.....: **WIISERTEC CO., LTD.**

Address.....: 6F., No. 465, Sec. 4, Bade Rd., Songshan Dist., Taipei, Taiwan

Manufacturer.....: WIISERTEC CO., LTD.

Address.....: 6F., No. 465, Sec. 4, Bade Rd., Songshan Dist., Taipei, Taiwan

Product Name.....: **Wireless Charger**

Trade Mark.....: **Dr. JEFFREY'S**

Model/Type reference.....: WS-WC03

Listed Model(s): /

Standard.....: **47 CFR FCC Part 18**

Date of receipt of test sample...: Oct. 14, 2021

Date of testing.....: Oct. 15, 2021 to Nov. 02, 2021

Date of issue.....: Nov. 03, 2021

Result.....: **PASS**

Compiled by:
(Printed name+signature) Terry Su

Supervised by:
(Printed name+signature) Miller Ma

Approved by:
(Printed name+signature) Totti Zhao

Testing Laboratory Name.....: **CTC Laboratories, Inc.**

Address.....: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

Page

E1. TEST SUMMARY.....	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION.....	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	5
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION.....	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. ACCESSORY EQUIPMENT INFORMATION	8
2.4. DESCRIPTION OF TEST MODES	8
2.5. MEASUREMENT INSTRUMENTS LIST	9
3. EMC EMISSION TEST	10
3.1. RADIATED EMISSION	10
3.2. CONDUCTED EMISSION (AC MAINS).....	16



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[47 CFR FCC Part 18](#): Industrial, Scientific, and Medical Equipment Unintentional Radiators.

[ANSI C63.4: 2014](#): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz.

1.2. Report version

Revised No.	Date of issue	Description
01	Nov. 03, 2021	Original



1.3. Test Description

FCC CFR Title 47 FCC Part 18			
Test Item	Standard Section	Result	Test Engineer
Conducted Emissions Test	18.307(b)	N/A	N/A
Radiated Emission Test	18.305(b),(c)	Pass	Terry Su

Note: "N/A" is no application.
The measurement uncertainty is not included in the test result.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation. Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test	Measurement Frequency Range	U (dB)	Note
Conducted Emission	9kHz ~ 30MHz	3.08	Main Power Port
Radiated Emission	0.009MHz ~ 30MHz	5.03	3m chamber 2
Radiated Emission	30MHz ~ 1000MHz	4.51	3m chamber 2

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity	55 %
Air Pressure	101kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	WIISERTEC CO., LTD.
Address:	6F., No. 465, Sec. 4, Bade Rd., Songshan Dist., Taipei, Taiwan
Manufacturer:	WIISERTEC CO., LTD.
Address:	6F., No. 465, Sec. 4, Bade Rd., Songshan Dist., Taipei, Taiwan

2.2. General Description of EUT

Product Name:	Wireless Charger
Marketing Name:	Dr. JEFFREY'S
Model/Type reference:	WS-WC03
Listed Model(s):	/
Power Supply:	5Vdc/2A, 9Vdc/2A, 12Vdc/1.5A from adapter
Adapter Model:	BT2-653-2 Input: 12 ~ 24Vdc Max 3A Output: 5Vdc/3A, 9Vdc/2A, 12Vdc/1.5A
Hardware version:	/
Firmware version:	/
Wireless Charger	
Operation Frequency Range:	100kHz ~ 205kHz
Operation Frequency:	142kHz
Modulation Type:	FSK
Antenna Type:	Coil Antenna
Antenna Gain:	0dBi



2.3. Accessory Equipment information

Equipment Information			
Name	Model	S/N	Manufacturer
Load system	15W wireless charging test fixture	---	Weise
/	/	/	/
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Non	Without	1M

2.4. Description of Test Modes

Test mode	Wireless charging (5V/1A)	Wireless charging (9V/1.2A)	Wireless charging (12V/1.2A)
1	■		
2		■	
3			■

Note: ■ is operation mode.

Pre-scan above all test mode, found below test mode which it was worse case mode, so only show the test data for worse case mode on the test report.

Test item	Test mode
Conducted emission	N/A
Radiated emission	3

Note: "N/A" is no application.



2.5. Measurement Instruments List

Conducted emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 25, 2021
2	LISN	R&S	ENV216	101113	Dec. 25, 2021
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 25, 2021
4	ISN CAT6	Schwarzbeck	NTFM 8158	8158-0046	Dec. 25, 2021

Radiated emission(3m chamber 2)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-1013	Jan. 12, 2022
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 24, 2021
3	Loop Antenna	LAPLAC	RF300	9138	Dec. 24, 2021
4	Spectrum Analyzer	R&S	FSU26	100105	Dec. 25, 2021
5	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 15, 2022
6	Pre-Amplifier	SONOMA	310	186194	Dec. 25, 2021
7	Low Noise Pre-Amplifier	EMCI	EMC051835	980075	Dec. 25, 2021
8	Test Receiver	R&S	ESCI7	100967	Dec. 25, 2021
9	3m Chamber	Frankonia	EE025	/	Oct. 23, 2024

Note: The Cal. Interval was one year.



3. EMC EMISSION TEST

3.1. Radiated Emission

LIMIT

FCC CFR Title 47 Part 18 Section 18.305(b):

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500	25	300
		500 or more	$25 \times \text{SQRT}(\text{power}/500)$	1300
	Any non-ISM frequency	Below 500	15	300
		500 or more	$15 \times \text{SQRT}(\text{power}/500)$	1300
Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz Above 5,725 MHz	Any	10	1,600
		Any	(²)	(²)
Medical diathermy	Any ISM frequency Any non-ISM frequency	Any	25	300
		Any	15	300
Ultrasonic	Below 490 kHz	Below 500	2,400/F(kHz)	300
		500 or more	$2,400/F(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	3300
	490 to 1,600 kHz Above 1,600 kHz	Any	24,000/F(kHz)	30
		Any	15	30
Induction cooking ranges	Below 90 kHz On or above 90 kHz	Any	1,500	430
		Any	300	430

¹Field strength may not exceed 10 $\mu\text{V}/\text{m}$ at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.

²Reduced to the greatest extent possible.

³Field strength may not exceed 10 $\mu\text{V}/\text{m}$ at 1600 meters. Consumer equipment is not permitted the increase in field strength otherwise permitted here for over 500 watts.


⁴Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength limits for miscellaneous ISM equipment.

1. This product belongs to non-ISM equipment, the field strength limit is 15 $\mu\text{V}/\text{m}$ at 300 meter distance.

2. Limit: $20\log^{(15\mu\text{V}/\text{m})} + 40\log^{(300/3)} = 23.52 + 80 = 103.52\text{dBuV}/\text{m}$ at 3 meters distance

TEST CONFIGURATION

Radiated Emission Test Set-Up Frequency below 30MHz

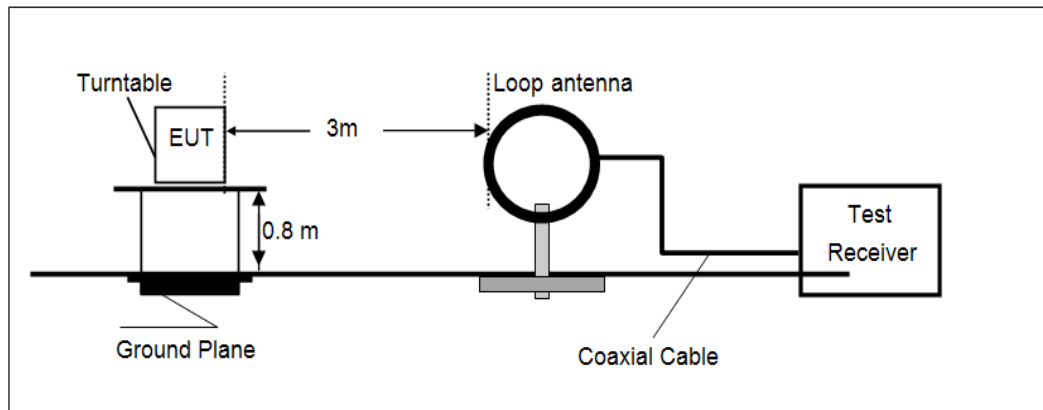

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.4:2014.
2. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
5. Use the following spectrum analyzer settings
Span shall wide enough to fully capture the emission being measured;
 - 1) 9kHz – 150kHz, RBW=200Hz, Sweep=auto, Detector function=peak, Trace=max hold;
 - 2) 150kHz – 30MHz, RBW=9kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

TEST MODE


Please refer to the clause 2.4.

TEST RESULTS



9kHz – 150kHz

Test mode	3	Polarization	Horizontal
-----------	---	--------------	------------

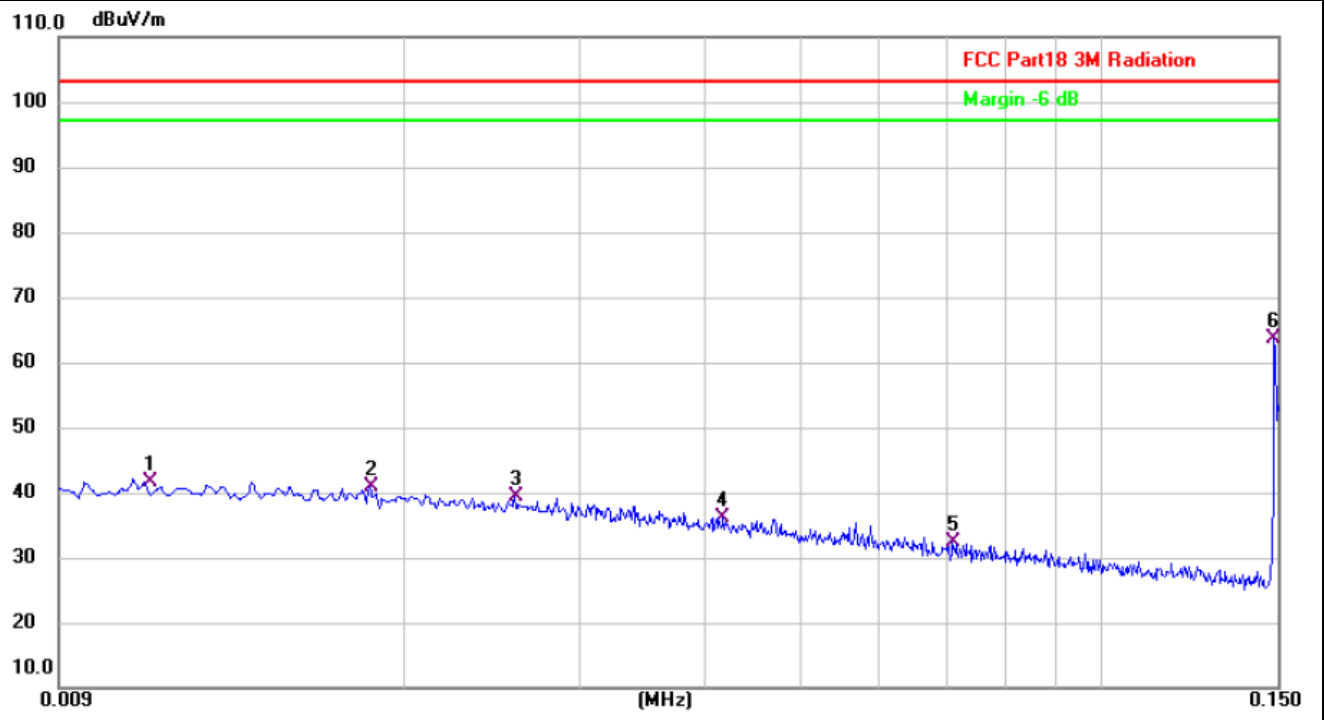


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0110	47.56	-5.90	41.66	103.25	-61.59	QP
2	0.0184	48.59	-7.77	40.82	103.25	-62.43	QP
3	0.0258	48.92	-9.64	39.28	103.25	-63.97	QP
4	0.0417	47.37	-11.12	36.25	103.25	-67.00	QP
5	0.0709	44.04	-11.66	32.38	103.25	-70.87	QP
6 *	0.1491	77.16	-13.57	63.59	103.25	-39.66	QP

Remark:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Test mode	3	Polarization	Vertical
-----------	---	--------------	----------

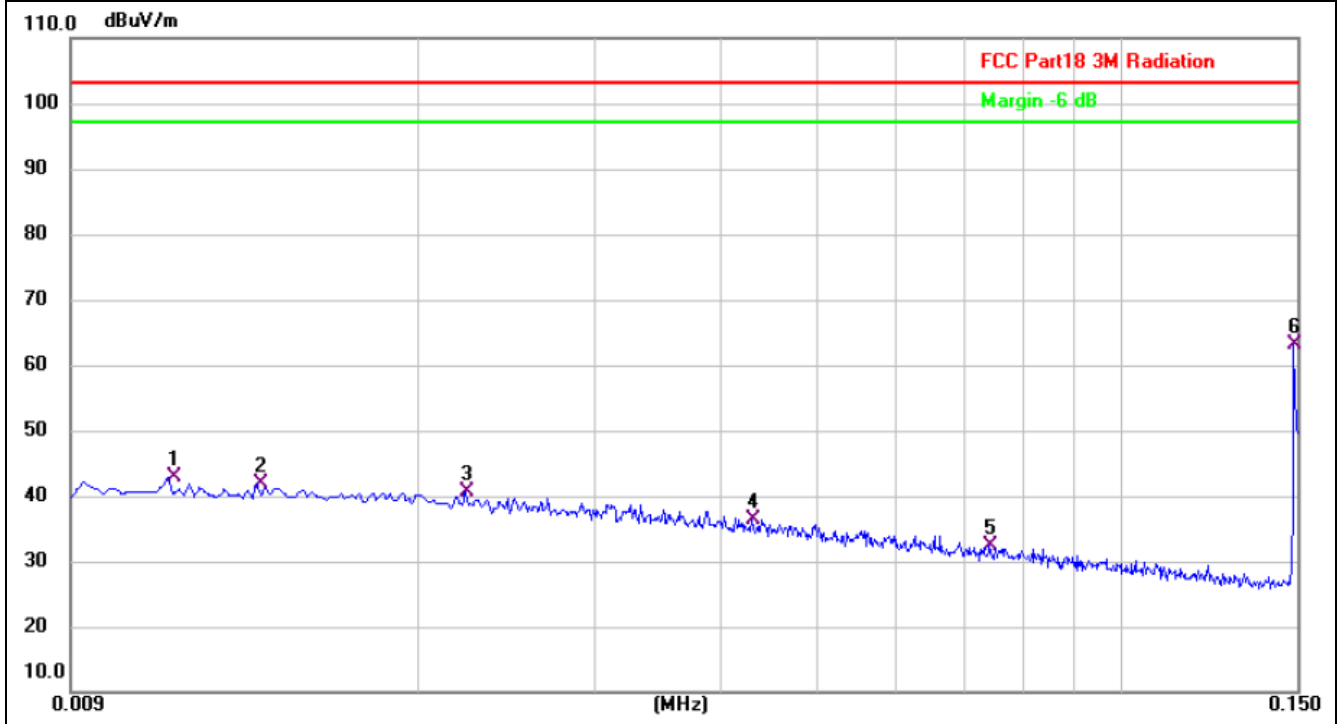


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0113	48.85	-5.98	42.87	103.25	-60.38	QP
2	0.0138	48.41	-6.61	41.80	103.25	-61.45	QP
3	0.0223	49.49	-8.76	40.73	103.25	-62.52	QP
4	0.0430	47.66	-11.18	36.48	103.25	-66.77	QP
5	0.0741	44.44	-12.02	32.42	103.25	-70.83	QP
6 *	0.1490	76.60	-13.57	63.03	103.25	-40.22	QP

Remark:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



150kHz – 30MHz

Test mode	3	Polarization	Horizontal
-----------	---	--------------	------------

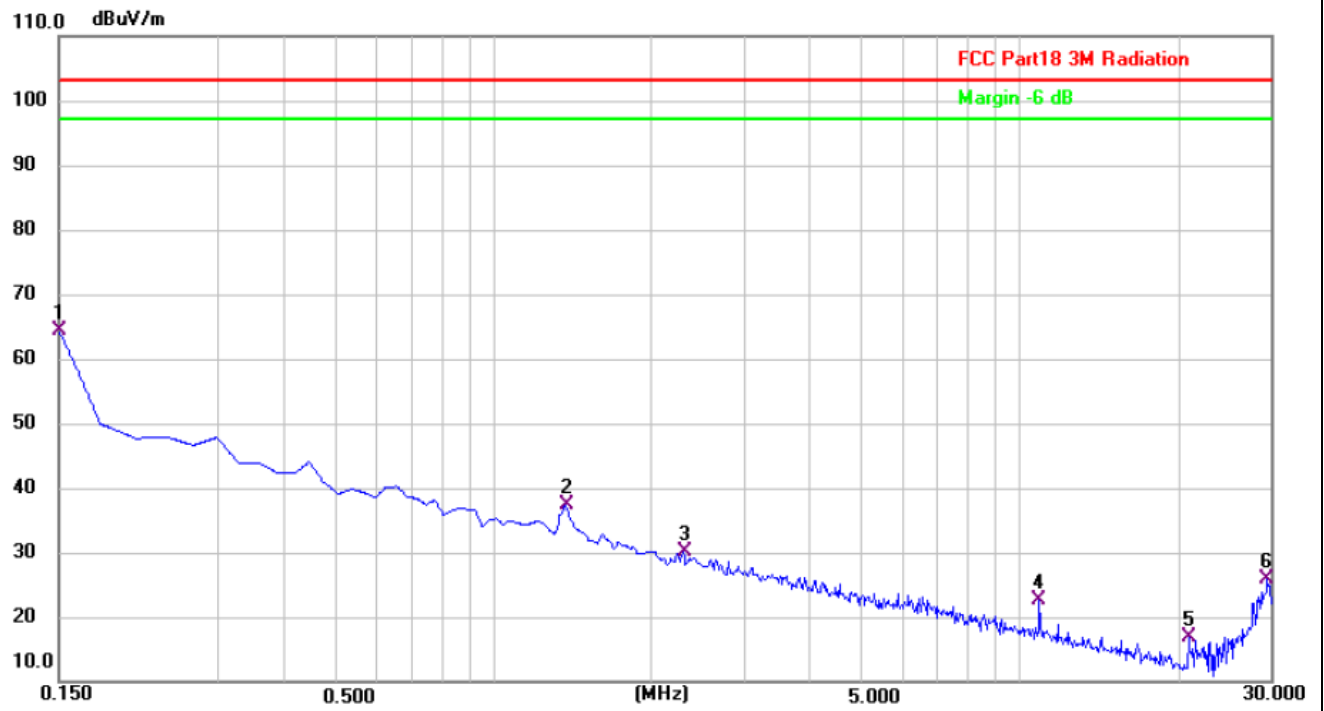


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	0.1500	78.05	-13.57	64.48	103.25	-38.77	QP
2	1.3739	51.22	-13.80	37.42	103.25	-65.83	QP
3	2.2992	44.23	-14.03	30.20	103.25	-73.05	QP
4	10.9557	37.60	-15.00	22.60	103.25	-80.65	QP
5	21.0151	32.26	-15.35	16.91	103.25	-86.34	QP
6	29.6716	40.76	-14.97	25.79	103.25	-77.46	QP

Remark:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Test mode	3	Polarization	Vertical
-----------	---	--------------	----------

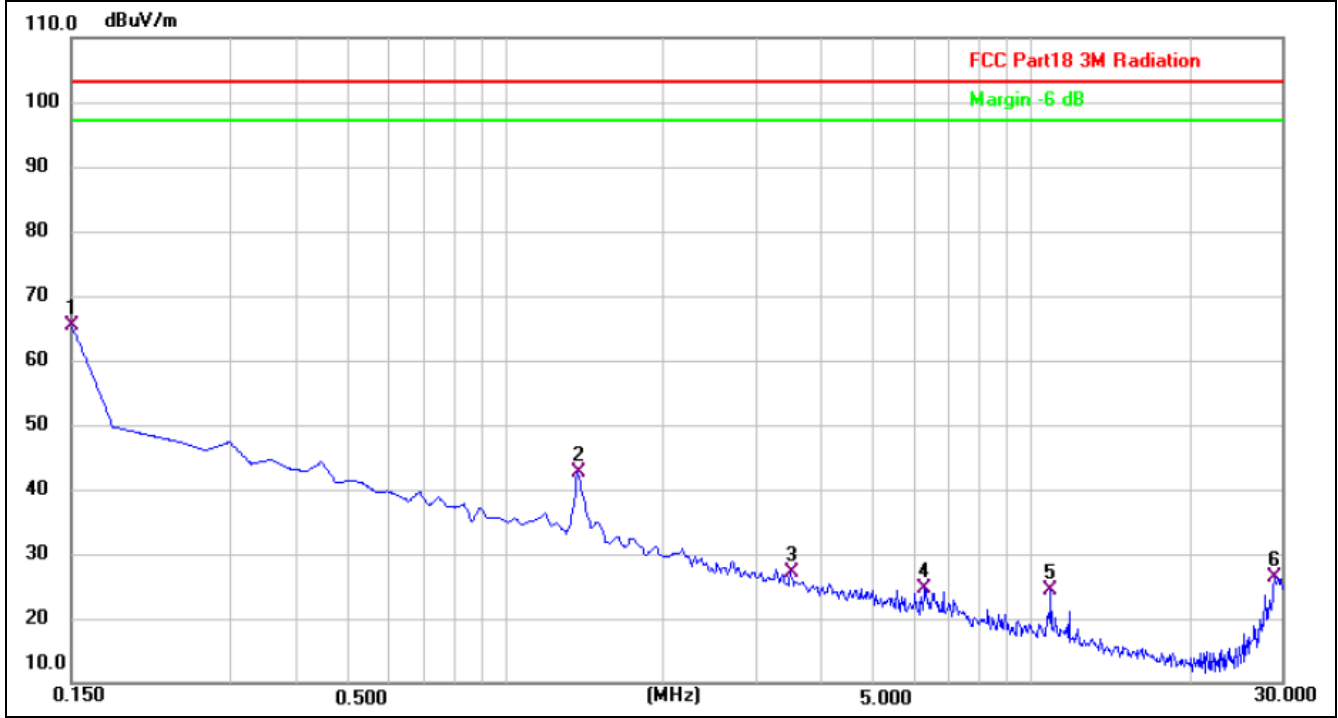

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	0.1500	79.07	-13.57	65.50	103.25	-37.75	QP
2	1.3739	56.42	-13.80	42.62	103.25	-60.63	QP
3	3.4932	34.30	-7.24	27.06	103.25	-76.19	QP
4	6.2991	26.50	-1.95	24.55	103.25	-78.70	QP
5	10.9557	39.32	-15.00	24.32	103.25	-78.93	QP
6	29.0746	41.32	-14.85	26.47	103.25	-76.78	QP

Remark:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value

3.2. Conducted Emission (AC Mains)


LIMIT

FCC CFR Title 47 Part 18 Section 18.307(b):

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

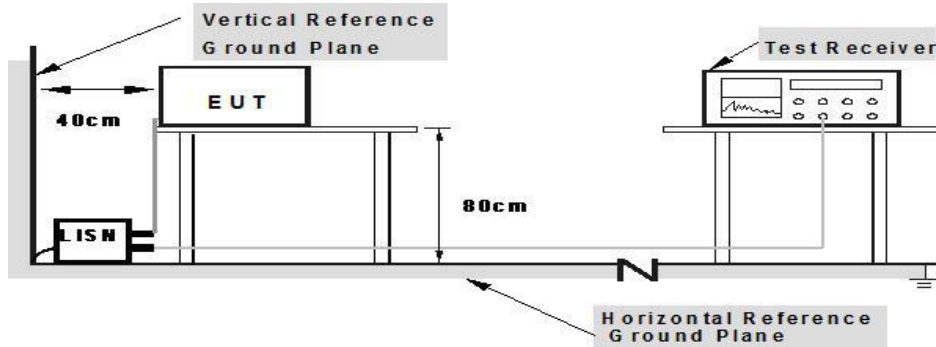

**Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.4-2014.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE

Please refer to the clause 2.4.

TEST RESULTS

Note: Not applicable.

*****THE END*****