

InterLab®

FCC Measurement/Technical Report on

RFID MultiPen LF-HF-UHF Multipen APOLLO

FCC ID: 2APYK-MULTIPEN3
IC: ---

Report Reference: MDE_TECTU_1701_FCCa_Rev1

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas
Group Company

www.7layers.com

Table of Contents

| | | |
|----------|--|-----------|
| 0 | Summary | 3 |
| 0.1 | Technical Report Summary | 3 |
| 0.2 | Applicable FCC Rules | 3 |
| 0.3 | FCC-IC Correlation Table | 4 |
| 0.4 | Measurement Summary / Signatures | 5 |
| 1 | Administrative Data | 6 |
| 1.1 | Testing Laboratory | 6 |
| 1.2 | Project Data | 6 |
| 1.3 | Applicant Data | 6 |
| 1.4 | Manufacturer Data | 6 |
| 2 | Test object Data | 7 |
| 2.1 | General EUT Description | 7 |
| 2.2 | EUT Main components | 8 |
| 2.3 | Ancillary Equipment | 8 |
| 2.4 | Auxiliary Equipment | 9 |
| 2.5 | EUT Setups | 9 |
| 2.6 | Operating Modes | 9 |
| 2.7 | Special software used for testing | 9 |
| 2.8 | Product labelling | 9 |
| 3 | Test Results | 10 |
| 3.1 | Spurious radiated emissions | 10 |
| 3.2 | Peak power output | 15 |
| 3.3 | Occupied bandwidth | 17 |
| 4 | Test equipment | 20 |
| 5 | Antenna Factors, Cable Loss and Sample Calculations | 22 |
| 5.1 | LISN R&S ESH3-Z5 (150 kHz – 30 MHz) | 22 |
| 5.2 | Antenna R&S HFH2-Z2 (9 kHz – 30 MHz) | 23 |
| 5.3 | Antenna R&S HL562 (30 MHz – 1 GHz) | 24 |
| 5.4 | Antenna R&S HF907 (1 GHz – 18 GHz) | 25 |
| 5.5 | Antenna EMCO 3160-09 (18 GHz – 26.5 GHz) | 26 |
| 5.6 | Antenna EMCO 3160-10 (26.5 GHz – 40 GHz) | 27 |
| 6 | Setup Drawings | 28 |
| 7 | Measurement uncertainty | 28 |
| 8 | Photo Report | 28 |

0 Summary

0.1 Technical Report Summary

Type of Authorization

Certification for an intentional radiator: 125 kHz transmitter and tagging system

0.2 Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-16 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J – Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 2.1049 Occupied bandwidth

§ 15.205 Restricted bands of operation

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Note:

ANSI C63.10-2013 applied.

Summary Test Results:

The EUT complied with all performed tests as listed in sub-clause 0.4 Measurement Summary / Signatures.

0.3 FCC-IC Correlation Table

General radio equipment

| Measurement | FCC reference | IC reference |
|--|---------------|---|
| Conducted emissions on AC Mains | § 15.207 | RSS-Gen Issue 5: 8.8 |
| Transmitter spurious radiated emissions | § 15.209 | RSS-Gen Issue 5: 6.13/8.9/8.10; RSS-210 Issue 9: 4.3/4.4 |
| Restricted Bands | §15.205 | RSS-Gen Issue 5: 8.10 RSS-210 Issue 9: 4.1 |
| Wanted Emission (Carrier) | § 15.209 | RSS-210 Issue 9: 4.4 RSS-Gen Issue 5: 6.12, 8.9 |
| Other requirements, e.g. Transmitter frequency stability | - | RSS-Gen Issue 5: 6.11/8.11 |
| Receiver spurious emissions | - | RSS-Gen Issue 5: 5/7 |
| Occupied bandwidth | §2.1049 | RSS-Gen Issue 5: 6.6 |

Note: This EUT is subject to RSS-210, 4.4.

0.4 Measurement Summary / Signatures

47 CFR Chapter I FCC Part 15, Subpart C §15.209

Radiated Emissions

The measurement was performed according to ANSI C63.10

| OP-Mode | Setup | Port | Final Result |
|---------|----------|-----------|--------------|
| CW | Setup_01 | Enclosure | passed |
| CW | Setup_02 | Enclosure | passed |

47 CFR Chapter I FCC Part 15, Subpart C §15.209

Peak Output Power

The measurement was performed according to ANSI C63.10

| OP-Mode | Setup | Port | Final Result |
|---------|----------|-----------|--------------|
| CM | Setup_01 | Enclosure | passed |
| CM | Setup_02 | Enclosure | passed |

47 CFR Chapter I FCC Part 15, Subpart C §15.207

Conducted Emissions AC Power line

The measurement shall be performed according to ANSI C63.10

| OP-Mode | Setup | Port | Final Result |
|---------|-------|------|--------------|
| - | - | - | N/A (1) |

47 CFR Chapter I FCC Part 2, Subpart J §2.1049

Occupied Bandwidth

The measurement was performed according to ANSI C63.10

| OP-Mode | Setup | Port | Final Result |
|---------|----------|-----------|--------------|
| CM | Setup_01 | Enclosure | performed |
| CM | Setup_02 | Enclosure | performed |

Notes:

N/A = Not applicable

(1) The EUT is battery powered and when the battery is charging the device cannot operate.

performed = no limit is applicable to the test result.

Revision History

| Report version control | | | |
|------------------------|--------------|--------------------|------------------|
| Version | Release date | Change Description | Version validity |
| initial | 2018-08-01 | -- | invalid |
| Rev1 | 2018-11-19 | FCC ID Changed | valid |



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

Responsible for
Accreditation Scope:



Responsible
for Test Report:



1 Administrative Data

1.1 Testing Laboratory

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the IC and accepted under the registration number: Site# 3699A-1.

The test facility is also accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-01
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
Responsible for accreditation scope: Dipl.-Ing. Marco Kullik

Report Template Version: 2018-01-22

1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Dobrin Dobrinov
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2018-11-19
Testing Period: 2018-06-06 to 2018-07-02

1.3 Applicant Data

Company Name: TECTUS Transponder Technology GmbH
Address: Eurotec-Ring 39
47445 Moers
Germany
Contact Person: Mr. Frank Scheuermann

1.4 Manufacturer Data

Company Name: please see at Applicant Data
Address:
Contact Person:

2 Test object Data

2.1 General EUT Description

| | |
|----------------------|--|
| Equipment under Test | RFID MultiPen LF-HF-UHF |
| Product Name | Multipen |
| Type Designation: | APOLLO |
| Kind of Device: | 125 kHz, 134 kHz Transmitters and Tagging System |
| Voltage Type: | DC - Ni-MH batteries |
| Voltage level: | 2.6 V nominal and tested voltage; 2.25 to 3.0 V |

2.1.1 General product description:

The RFID handheld device MultiPen enables reading of UIDs of passive RFID transponders in Frequency ranges UHF (902...928MHz), RF / NFC (13,56 MHz) and LF (125/134 kHz FDX-B/HDX).

The objects of this report are LF transmitters at 125kHz and 134 kHz operating frequencies.

2.1.2 Specific product description for the EUT:

For a detailed description please refer to the documentation provided by the applicant.

2.1.3 The EUT provides the following ports:

- Enclosure
- DC combined

Note: DC combined is a USB Type B connector installed on the EUT body and served as a battery charging input, and EUT factory configuration.

2.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

| Short Description | Equipment under Test | Type Designation | Serial No. | HW Status | SW Status |
|-----------------------------|----------------------|------------------|------------|-----------|-----------|
| EUT A (Code: DE1311000aa01) | Multipen | APOLLO | 201810020 | REV.B | 1v3-Test |
| EUT B (Code: DE1311000ab01) | Multipen | APOLLO | 201810021 | REV.B | 1v3-Test |

Note: The short description is used to simplify the identification of the EUT in this test report.

2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

| Short Description | Equipment under Test | Type Designation | Serial No. | HW Status | SW Status |
|-------------------|----------------------|----------------------------|------------------------------|-----------|-----------|
| ANC 1 | LF-Tag | Münze 30mm, gelb, HiTAG1 | 637B4665 | - | - |
| ANC 2 | HF-Tag | Karte "Elektor", ISO 14443 | 049B99EA972880 | - | - |
| ANC 3 | HF-Tag | Karte "ST", ISO 15693 | E002207201D98836 | | |
| ANC 4 | UHF-Tag | gelb, länglich, CI1/Gen2 | E20030351315025714 507FD1 | | |

2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

| Short Description | Device | Type Designation | Serial No. | HW Status | SW Status |
|-------------------|--------|------------------|------------|-----------|-----------|
| - | - | - | - | - | - |

2.5 EUT Setups

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

| Setup No. | Combination of EUTs | Description and Rationale |
|-----------|---------------------|---|
| Setup_01 | EUT A + ANC 1 | EUT is consequently set on 125 kHz and 135 kHz modes. EUT read ancillary, radiating continuously modulated signal. Representative setup for radiated emissions. |
| Setup_02 | EUT B | EUT is consequently set on 125 kHz and 135 kHz modes. EUT radiated continuous wave signal (not modulated carrier) Representative setup for Output Power test. |

2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

| Op. Mode | Description of Operating Modes | Remarks |
|----------|-------------------------------------|---|
| CM | continuously modulated | EUT is transmitting a continuously modulated signal |
| CW | continuous wave (sinusoidal signal) | EUT is transmitting a continuously not modulated signal |

2.7 Special software used for testing

The applicant provides the test software.

2.8 Product labelling

Please refer to the documentation of the applicant.

3 Test Results

3.1 Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

3.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. (Exploratory) Tests are performed at 2 orthogonal EUT orientations (vertical and horizontal) to determine the worst-case EUT orientation. In combination with the turntable rotation, emissions of at least 3 orthogonal axes are detected.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Antenna height: 1 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement will be performed with the following changed settings. Intention of this step is to find the maximum emission level.

- Detector: Quasi-Peak besides 9–90 kHz and 110–490 kHz: Average and Peak
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^{\circ}$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 45^{\circ}$ around the determined value
- Height variation range: ± 100 cm around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 2, the final measurement will be performed:

EMI receiver settings for step 3:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated. It contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3.1.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

| Frequency in MHz | Limit (μV/m) | Measurement distance (m) | Limits (dBμV/m) |
|------------------|------------------|--------------------------|--------------------|
| 0.009 – 0.49 | 2400/F(kHz)@300m | 3 | (48.5 – 13.8)@300m |
| 0.49 – 1.705 | 24000/F(kHz)@30m | 3 | (33.8 – 23.0)@30m |
| 1.705 – 30 | 30@30m | 3 | 29.5@30m |

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

| Frequency in MHz | Limit (μV/m) | Measurement distance (m) | Limits (dBμV/m) |
|------------------|--------------|--------------------------|-----------------|
| 30 – 88 | 100@3m | 3 | 40.0@3m |
| 88 – 216 | 150@3m | 3 | 43.5@3m |
| 216 – 960 | 200@3m | 3 | 46.0@3m |
| 960 – 26000 | 500@3m | 3 | 54.0@3m |
| 26000 – 40000 | 500@3m | 1 | 54.0@3m |

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

3.1.3 Test Protocol

Temperature: 23-24 °C
Air Pressure: 990-1006 hPa
Humidity: 37-40 %

3.1.3.1 Measurement up to 30 MHz

| Op. Mode | Setup | Port |
|----------|------------------|-----------|
| CM | Setup_01_125_kHz | Enclosure |

| Antenna orientation | EUT orientation | Frequency MHz | Corrected value dB μ V/m | | | Limit dB μ V/m | Limit dB μ V/m | Limit dB μ V/m | Margin dB | Margin dB |
|---------------------|-----------------|---------------|------------------------------|------|----|--------------------|--------------------|--------------------|-----------|-----------|
| | | | QP | Peak | AV | QP | Peak | AV | QP/Peak | AV |
| - | - | - | - | - | - | - | - | - | - | - |

| Op. Mode | Setup | Port |
|----------|-----------------|-----------|
| CM | Setup_01_134kHz | Enclosure |

| Antenna orientation | EUT orientation | Frequency MHz | Corrected value dB μ V/m | | | Limit dB μ V/m | Limit dB μ V/m | Limit dB μ V/m | Margin dB | Margin dB |
|---------------------|-----------------|---------------|------------------------------|------|----|--------------------|--------------------|--------------------|-----------|-----------|
| | | | QP | Peak | AV | QP | Peak | AV | QP/Peak | AV |
| - | - | - | - | - | - | - | - | - | - | - |

Remark: No relevant spurious emissions are found in the range 20 dB below the limit.

3.1.3.2 Measurement above 30 MHz

| Op. Mode | Setup | Port |
|----------|------------------|-----------|
| CM | Setup_01_125_kHz | Enclosure |

| Antenna orientation | EUT orientation | Frequency MHz | Corrected value dB μ V/m | | | Limit dB μ V/m | Limit dB μ V/m | Limit dB μ V/m | Margin dB | Margin dB |
|---------------------|-----------------|---------------|------------------------------|------|----|--------------------|--------------------|--------------------|-----------|-----------|
| | | | QP | Peak | AV | QP | Peak | AV | QP/Peak | AV |
| - | - | - | - | - | - | - | - | - | - | - |


| Op. Mode | Setup | Port |
|----------|-----------------|-----------|
| CM | Setup_01_134kHz | Enclosure |

| Antenna orientation | EUT orientation | Frequency MHz | Corrected value dB μ V/m | | | Limit dB μ V/m | Limit dB μ V/m | Limit dB μ V/m | Margin dB | Margin dB |
|---------------------|-----------------|---------------|------------------------------|------|----|--------------------|--------------------|--------------------|-----------|-----------|
| | | | QP | Peak | AV | QP | Peak | AV | QP/Peak | AV |
| - | - | - | - | - | - | - | - | - | - | - |


Remark: No relevant spurious emissions are found in the range 20 dB below the limit.

3.1.4 Measurement Plots (worst case)

3.1.4.1 Below 30 MHz

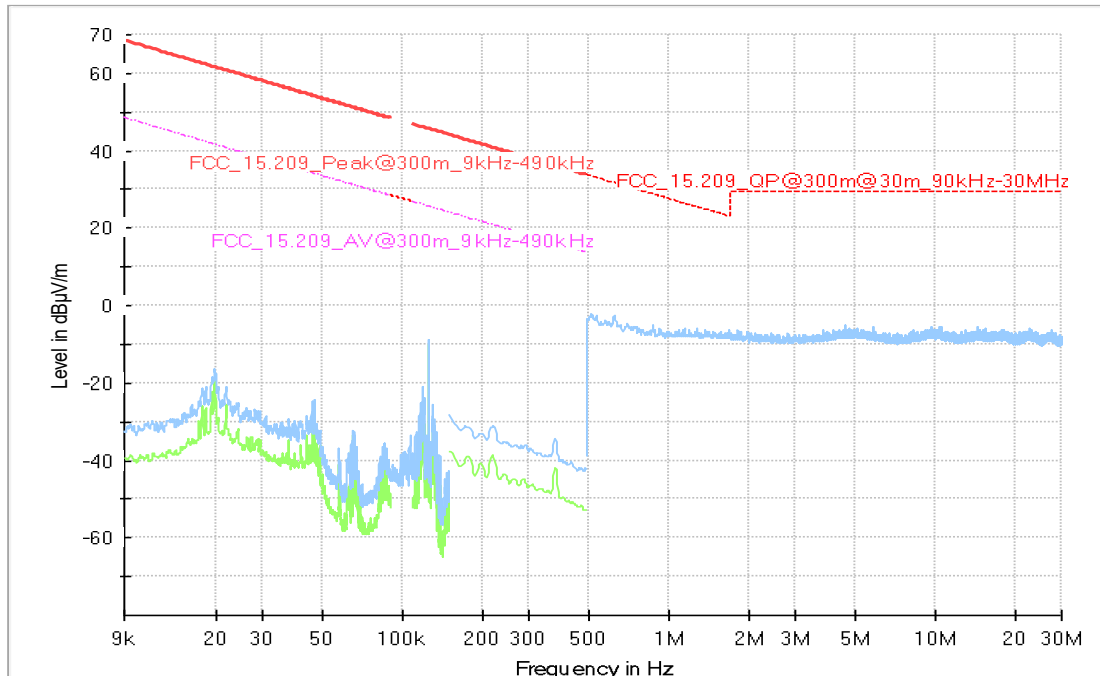

3.1.4.2 Above 30 MHz

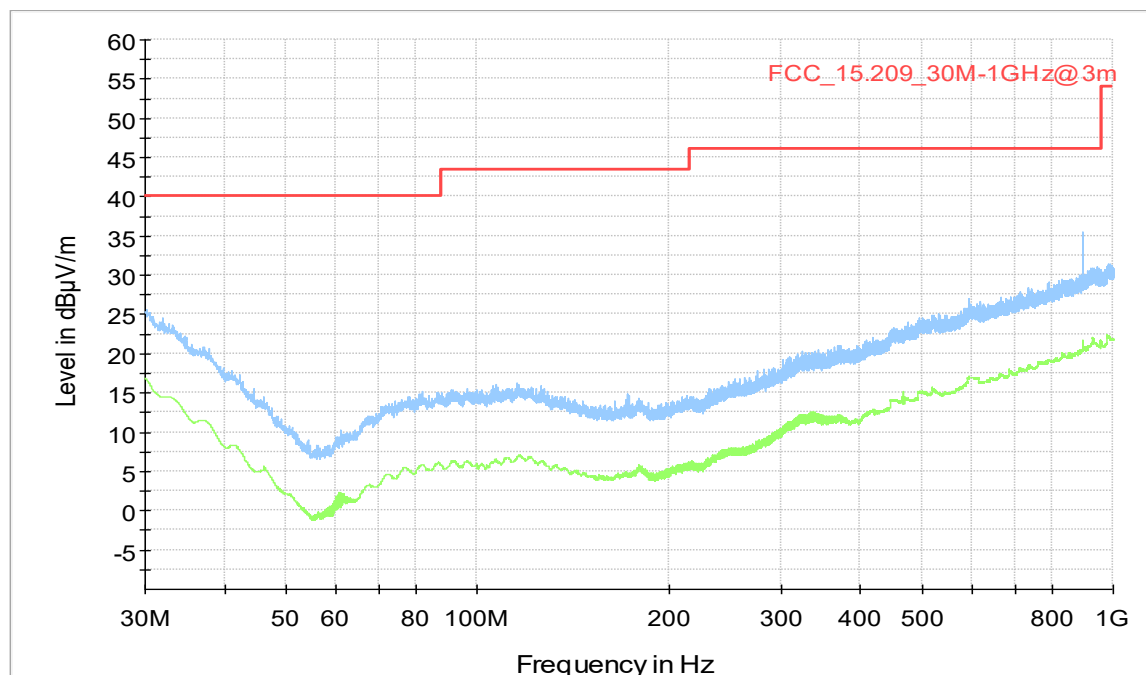

3.1.5 Test Equipment used

- Radiated Emissions

3.2 Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

3.2.1 Test Description

Please refer to sub-clause 3.1.1.

3.2.2 Test Limits

Please refer to sub-clause 3.1.2.

3.2.3 Test Protocol

Temperature: 24 °C
Air Pressure: 992 hPa
Humidity: 37 %

| Op. Mode | Setup | Port |
|----------|------------------|-----------|
| CW | Setup_01_125_kHz | Enclosure |


| Antenna orientation | EUT orientation | Frequency kHz | Maximum radiated field strength at fundamental frequency (corrected) dB μ V/m | Limit dB μ V/m | Margin dB |
|---------------------|-----------------|---------------|---|--------------------|-----------|
| | | | AV = PK | AV | AV |
| 0° | Hor. | 125.00 | -7.75 | 25.69 | 33.43 |

| Op. Mode | Setup | Port |
|----------|------------------|-----------|
| CW | Setup_01_134_kHz | Enclosure |

| Antenna orientation | EUT orientation | Frequency kHz | Maximum radiated field strength at fundamental frequency (corrected) dB μ V/m | Limit dB μ V/m | Margin dB |
|---------------------|-----------------|---------------|---|--------------------|-----------|
| | | | AV = PK | AV | AV |
| 0° | Hor. | 133.350 | -7.86 | 25.13 | 32.98 |

3.2.4 Measurement Plot (worst case)


TX on at 125kHz, EUT Horizontal, CW mode

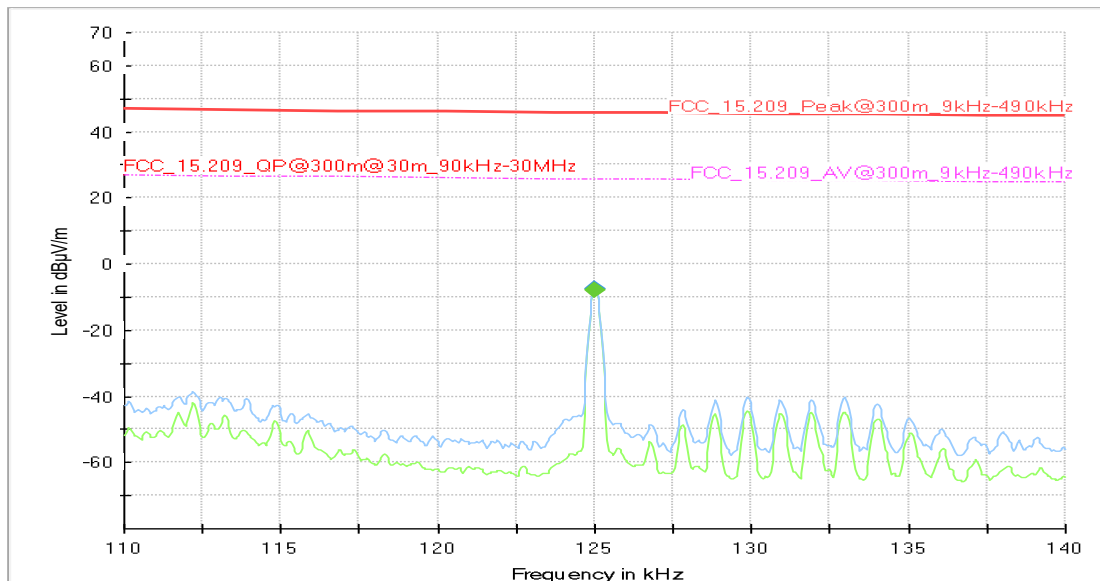

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|
| 0.125000 | --- | -7.75 | 25.69 | 33.43 | 1000.0 | 0.200 | 100.0 | V | -2.0 |
| 0.125000 | -7.67 | --- | 45.69 | 53.36 | 1000.0 | 0.200 | 100.0 | V | -2.0 |

TX on at 134 kHz, EUT Horizontal, CW mode

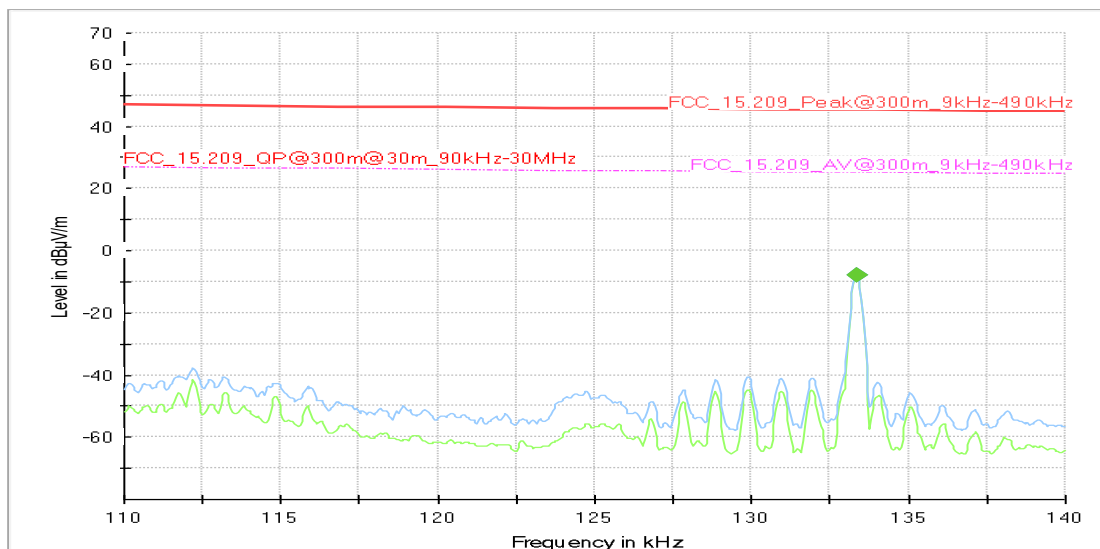

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|
| 0.133350 | --- | -7.86 | 25.13 | 32.98 | 1000.0 | 0.200 | 100.0 | V | -3.0 |
| 0.133350 | -7.82 | --- | 45.13 | 52.95 | 1000.0 | 0.200 | 100.0 | V | -3.0 |

3.2.5 Test Equipment used

- Radiated Emissions

3.3 Occupied bandwidth

Standard FCC Part 2, Subpart J, §2.1049

The test was performed according to: ANSI C63.10

3.3.1 Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth.

3.3.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.209 does not contain any requirement related to the bandwidth.

3.3.3 Test Protocol

Temperature: 25-26 °C
 Air Pressure: 1003-1004 hPa
 Humidity: 33-34 %

| Op. Mode | Setup | Port |
|----------|------------------|-----------|
| CM | Setup_01_125_kHz | Enclosure |


| 20 dBc bandwidth | 99% occupied bandwidth |
|------------------|------------------------|
| 15.673 kHz | 20.796 kHz |

| Op. Mode | Setup | Port |
|----------|------------------|-----------|
| CM | Setup_01_134_kHz | Enclosure |

| 20 dBc bandwidth | 99% occupied bandwidth |
|------------------|------------------------|
| 18.06 kHz | 22.098 kHz |

3.3.4 Measurement Plots (worst case)

Mode: CM Setup 01_134_kHz, 99 % BW

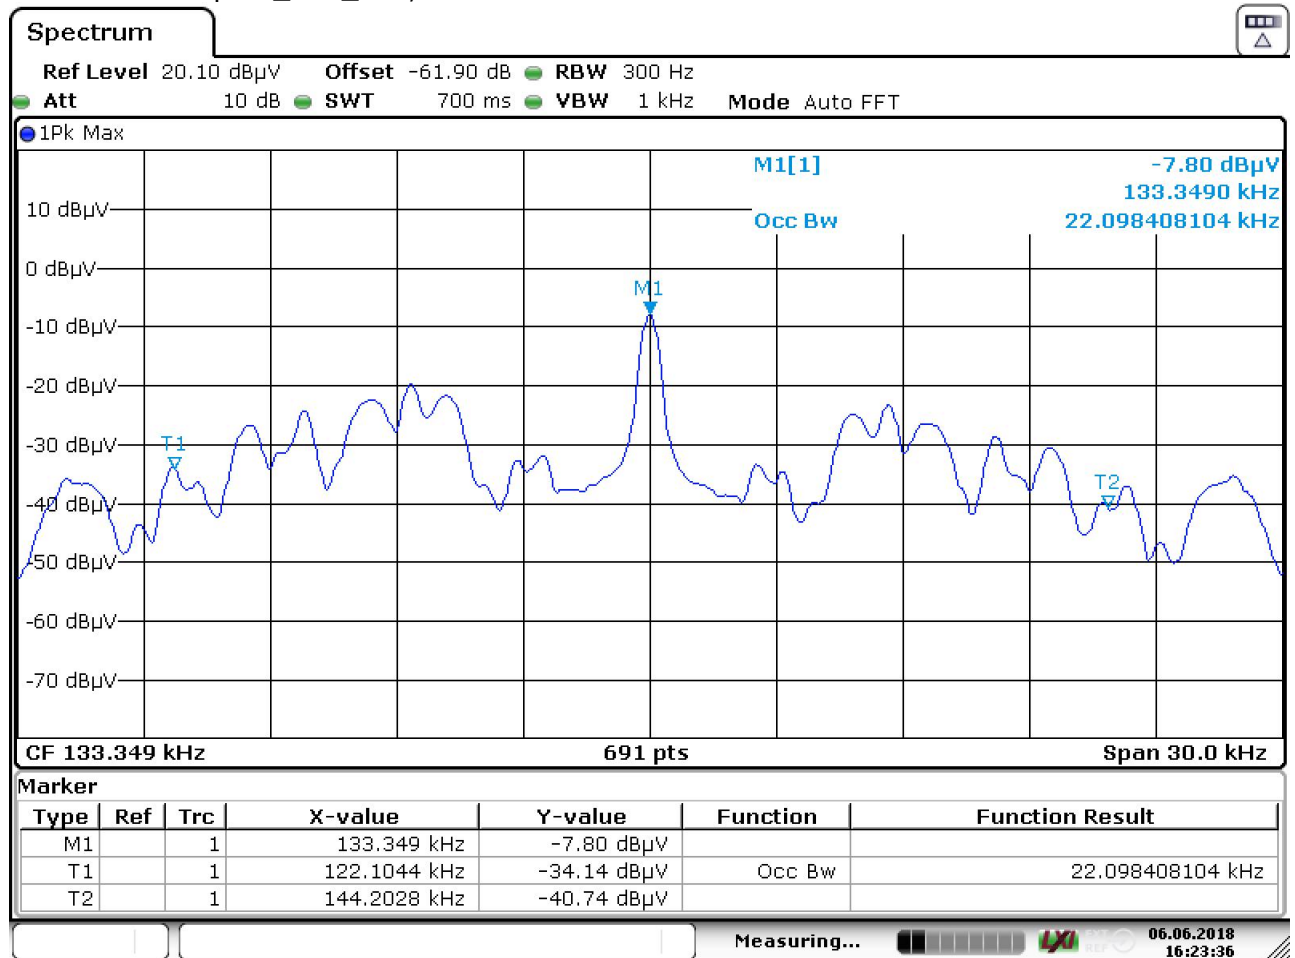


Date: 6.JUN.2018 16:23:37

Note:

According to ANSI C63.10: Span = 1.5 to 5 times OccBW. Hence, the minimal Span is 33.15 kHz. The laboratory's choice 30 kHz is very near to the Standard requirement, but it gives a better view and more accuracy in measurement of the bandwidth.

Mode: CM Setup 01_134_kHz, 20 dBc BW

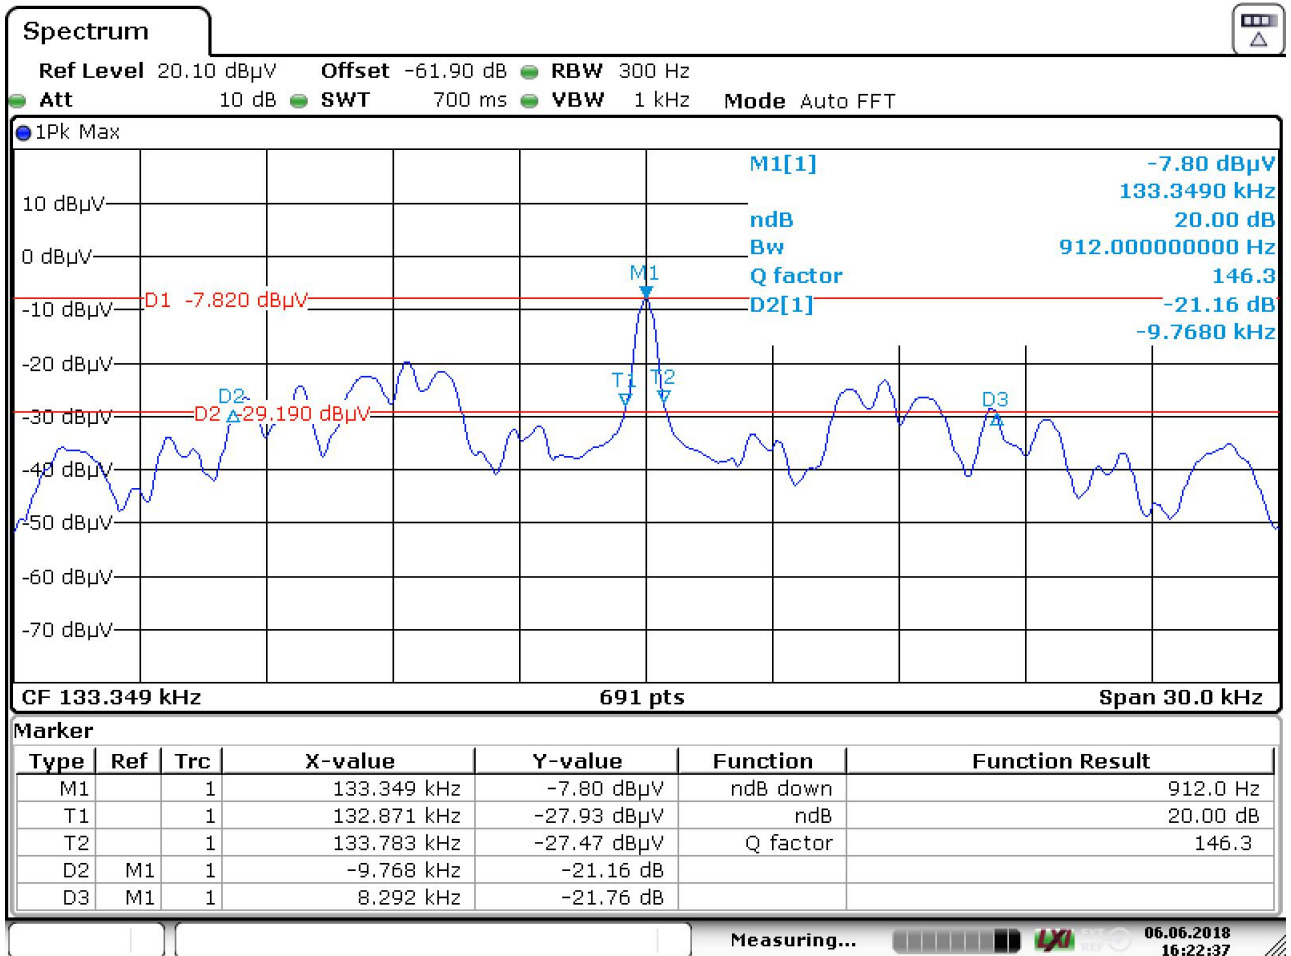

Date: 6.JUN.2018 16:22:38

3.3.5 Test Equipment used

- Radio Lab

4 Test equipment

- 1 Radiated Emissions
 - Lab to perform radiated emission tests

| Ref. No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|----------|----------------------|---|-----------------------------------|--------------------|--------------------|--------------------|
| 1.1 | NRV-Z1 | Sensor Head A | Rohde & Schwarz | 827753/005 | 2017-11 | 2018-11 |
| 1.2 | MFS | Rubidium Frequency Normal MFS | Datum GmbH | 002 | 2017-10 | 2018-10 |
| 1.3 | Opus10 THI (8252.00) | ThermoAirpressure Datalogger 13 (Environ) | Lufft Mess- und Regeltechnik GmbH | 13936 | 2017-04 | 2019-04 |
| 1.4 | Anechoic Chamber | 10.58 x 6.38 x 6.00 m ³ | Frankonia | none | 2016-05 | 2019-05 |
| 1.5 | HL 562 | Ultralog new biconicals | Rohde & Schwarz | 830547/003 | 2016-04 | 2019-04 |
| 1.6 | 5HC2700/12750-1.5-KK | High Pass Filter | Trilithic | 9942012 | | |
| 1.7 | ASP 1.2/1.8-10 kg | Antenna Mast | Maturo GmbH | - | | |
| 1.8 | Fully Anechoic Room | 8.80m x 4.60m x 4.05m (l x w x h) | Albatross Projects | P26971-647-001-PRB | 2015-06 2018-06 | 2018-06 2020-06 |
| 1.9 | JS4-18002600-32-5P | Broadband Amplifier 18 GHz - 26 GHz | Miteq | 849785 | | |
| 1.10 | FSW 43 | Spectrum Analyzer | Rohde & Schwarz | 103779 | 2016-12 | 2018-12 |
| 1.11 | 3160-09 | Standard Gain / Pyramidal Horn Antenna 26.5 GHz | EMCO Elektronik GmbH | 00083069 | | |
| 1.12 | WHKX 7.0/18G-8SS | High Pass Filter | Wainwright | 09 | | |
| 1.13 | 4HC1600/12750-1.5-KK | High Pass Filter | Trilithic | 9942011 | | |
| 1.14 | Chroma 6404 | AC Power Source | Chroma ATE INC. | 64040001304 | | |
| 1.15 | JS4-00102600-42-5A | Broadband Amplifier 30 MHz - 26 GHz | Miteq | 619368 | | |
| 1.16 | TT 1.5 WI | Turn Table | Maturo GmbH | - | | |
| 1.17 | HL 562 Ultralog | Log.-per. Antenna | Rohde & Schwarz | 100609 | 2016-04 | 2019-04 |
| 1.18 | 3160-10 | Standard Gain / Pyramidal Horn Antenna 40 GHz | EMCO Elektronik GmbH | 00086675 | | |
| 1.19 | 5HC3500/18000-1.2-KK | High Pass Filter | Trilithic | 200035008 | | |
| 1.20 | HFH2-Z2 | Loop Antenna | Rohde & Schwarz | 829324/006 | 2018-01 | 2021-01 |

| Ref. No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|----------|------------------------------|-------------------------------------|-----------------------------------|------------------------|------------------|-----------------|
| 1.21 | Opus10 THI (8152.00) | ThermoHygro Datalogger 12 (Environ) | Lufft Mess- und Regeltechnik GmbH | 12482 | 2017-03 | 2019-03 |
| 1.22 | ESR 7 | EMI Receiver / Spectrum Analyzer | Rohde & Schwarz | 101424 | 2016-11 | 2018-11 |
| 1.23 | JS4-00101800-35-5P | Broadband Amplifier 30 MHz - 18 GHz | Miteq | 896037 | | |
| 1.24 | AS 620 P | Antenna mast | HD GmbH | 620/37 | | |
| 1.25 | Tilt device Matur (Rohacell) | Antrieb TD1.5-10kg | Matur GmbH | TD1.5-10kg/024/3790709 | | |
| 1.26 | ESIB 26 | Spectrum Analyzer | Rohde & Schwarz | 830482/004 | 2018-01 | 2020-01 |
| 1.27 | PAS 2.5 - 10 kg | Antenna Mast | Matur GmbH | - | | |
| 1.28 | AM 4.0 | Antenna mast | Matur GmbH | AM4.0/180/11920513 | | |

- 2 Radio Lab
Lab to perform bandwidth test

| Ref. No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|----------|----------------------|---------------------------|-----------------------------------|---------------|------------------|-----------------|
| 2.1 | FSIQ26 | Spectrum Analyzer | Rohde & Schwarz | 840061/005 | 2017-05 | 2019-05 |
| 2.2 | Opus10 THI (8152.00) | ThermoHygro Datalogger 03 | Lufft Mess- und Regeltechnik GmbH | 7482 | 2017-03 | 2019-03 |

The calibration interval is the time interval between "Last Calibration" and "Calibration Due".

5 Antenna Factors, Cable Loss and Sample Calculations

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

5.1 LISN R&S ESH3-Z5 (150 kHz – 30 MHz)

| Frequency MHz | Corr. dB | LISN insertion loss ESH3- Z5 dB | cable loss (incl. 10 dB atten- uator) dB |
|------------------|-------------|--|--|
| 0,15 | 10,1 | 0,1 | 10,0 |
| 5 | 10,3 | 0,1 | 10,2 |
| 7 | 10,5 | 0,2 | 10,3 |
| 10 | 10,5 | 0,2 | 10,3 |
| 12 | 10,7 | 0,3 | 10,4 |
| 14 | 10,7 | 0,3 | 10,4 |
| 16 | 10,8 | 0,4 | 10,4 |
| 18 | 10,9 | 0,4 | 10,5 |
| 20 | 10,9 | 0,4 | 10,5 |
| 22 | 11,1 | 0,5 | 10,6 |
| 24 | 11,1 | 0,5 | 10,6 |
| 26 | 11,2 | 0,5 | 10,7 |
| 28 | 11,2 | 0,5 | 10,7 |
| 30 | 11,3 | 0,5 | 10,8 |

Sample calculation

$$U_{\text{LISN}} \text{ (dB } \mu\text{V)} = U \text{ (dB } \mu\text{V)} + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

5.2 Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)

| Frequency MHz | AF HFH-Z2) dB (1/m) | Corr. dB | cable loss 1 (inside chamber) dB | cable loss 2 (outside chamber) dB | cable loss 3 (switch unit) dB | cable loss 4 (to receiver) dB | distance corr. (-40 dB/ decade) dB | d _{Limit} (meas. distance (limit) m | d _{used} (meas. distance (used) m |
|------------------|---------------------------|-------------|--|---|---|---|--|--|--|
| 0,009 | 20,50 | -79,6 | 0,1 | 0,1 | 0,1 | 0,1 | -80 | 300 | 3 |
| 0,01 | 20,45 | -79,6 | 0,1 | 0,1 | 0,1 | 0,1 | -80 | 300 | 3 |
| 0,015 | 20,37 | -79,6 | 0,1 | 0,1 | 0,1 | 0,1 | -80 | 300 | 3 |
| 0,02 | 20,36 | -79,6 | 0,1 | 0,1 | 0,1 | 0,1 | -80 | 300 | 3 |
| 0,025 | 20,38 | -79,6 | 0,1 | 0,1 | 0,1 | 0,1 | -80 | 300 | 3 |
| 0,03 | 20,32 | -79,6 | 0,1 | 0,1 | 0,1 | 0,1 | -80 | 300 | 3 |
| 0,05 | 20,35 | -79,6 | 0,1 | 0,1 | 0,1 | 0,1 | -80 | 300 | 3 |
| 0,08 | 20,30 | -79,6 | 0,1 | 0,1 | 0,1 | 0,1 | -80 | 300 | 3 |
| 0,1 | 20,20 | -79,6 | 0,1 | 0,1 | 0,1 | 0,1 | -80 | 300 | 3 |
| 0,2 | 20,17 | -79,6 | 0,1 | 0,1 | 0,1 | 0,1 | -80 | 300 | 3 |
| 0,3 | 20,14 | -79,6 | 0,1 | 0,1 | 0,1 | 0,1 | -80 | 300 | 3 |
| 0,49 | 20,12 | -79,6 | 0,1 | 0,1 | 0,1 | 0,1 | -80 | 300 | 3 |
| 0,490001 | 20,12 | -39,6 | 0,1 | 0,1 | 0,1 | 0,1 | -40 | 30 | 3 |
| 0,5 | 20,11 | -39,6 | 0,1 | 0,1 | 0,1 | 0,1 | -40 | 30 | 3 |
| 0,8 | 20,10 | -39,6 | 0,1 | 0,1 | 0,1 | 0,1 | -40 | 30 | 3 |
| 1 | 20,09 | -39,6 | 0,1 | 0,1 | 0,1 | 0,1 | -40 | 30 | 3 |
| 2 | 20,08 | -39,6 | 0,1 | 0,1 | 0,1 | 0,1 | -40 | 30 | 3 |
| 3 | 20,06 | -39,6 | 0,1 | 0,1 | 0,1 | 0,1 | -40 | 30 | 3 |
| 4 | 20,05 | -39,5 | 0,2 | 0,1 | 0,1 | 0,1 | -40 | 30 | 3 |
| 5 | 20,05 | -39,5 | 0,2 | 0,1 | 0,1 | 0,1 | -40 | 30 | 3 |
| 6 | 20,02 | -39,5 | 0,2 | 0,1 | 0,1 | 0,1 | -40 | 30 | 3 |
| 8 | 19,95 | -39,5 | 0,2 | 0,1 | 0,1 | 0,1 | -40 | 30 | 3 |
| 10 | 19,83 | -39,4 | 0,2 | 0,1 | 0,2 | 0,1 | -40 | 30 | 3 |
| 12 | 19,71 | -39,4 | 0,2 | 0,1 | 0,2 | 0,1 | -40 | 30 | 3 |
| 14 | 19,54 | -39,4 | 0,2 | 0,1 | 0,2 | 0,1 | -40 | 30 | 3 |
| 16 | 19,53 | -39,3 | 0,3 | 0,1 | 0,2 | 0,1 | -40 | 30 | 3 |
| 18 | 19,50 | -39,3 | 0,3 | 0,1 | 0,2 | 0,1 | -40 | 30 | 3 |
| 20 | 19,57 | -39,3 | 0,3 | 0,1 | 0,2 | 0,1 | -40 | 30 | 3 |
| 22 | 19,61 | -39,3 | 0,3 | 0,1 | 0,2 | 0,1 | -40 | 30 | 3 |
| 24 | 19,61 | -39,3 | 0,3 | 0,1 | 0,2 | 0,1 | -40 | 30 | 3 |
| 26 | 19,54 | -39,3 | 0,3 | 0,1 | 0,2 | 0,1 | -40 | 30 | 3 |
| 28 | 19,46 | -39,2 | 0,3 | 0,1 | 0,3 | 0,1 | -40 | 30 | 3 |
| 30 | 19,73 | -39,1 | 0,4 | 0,1 | 0,3 | 0,1 | -40 | 30 | 3 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

5.3 Antenna R&S HL562 (30 MHz – 1 GHz)

($d_{\text{Limit}} = 3 \text{ m}$)

| Frequency MHz | AF R&S HL562 dB (1/m) | Corr. dB |
|------------------|--------------------------------|-------------|
| 30 | 18,6 | 0,6 |
| 50 | 6,0 | 0,9 |
| 100 | 9,7 | 1,2 |
| 150 | 7,9 | 1,6 |
| 200 | 7,6 | 1,9 |
| 250 | 9,5 | 2,1 |
| 300 | 11,0 | 2,3 |
| 350 | 12,4 | 2,6 |
| 400 | 13,6 | 2,9 |
| 450 | 14,7 | 3,1 |
| 500 | 15,6 | 3,2 |
| 550 | 16,3 | 3,5 |
| 600 | 17,2 | 3,5 |
| 650 | 18,1 | 3,6 |
| 700 | 18,5 | 3,6 |
| 750 | 19,1 | 4,1 |
| 800 | 19,6 | 4,1 |
| 850 | 20,1 | 4,4 |
| 900 | 20,8 | 4,7 |
| 950 | 21,1 | 4,8 |
| 1000 | 21,6 | 4,9 |

| cable loss 1 (inside chamber) dB | cable loss 2 (outside chamber) dB | cable loss 3 (switch unit) dB | cable loss 4 (to receiver) dB | distance corr. (-20 dB/ decade) dB | d_{Limit} (meas. distance (limit)) m | d_{used} (meas. distance (used)) m |
|--|---|---|---|--|---|---|
| 0,29 | 0,04 | 0,23 | 0,02 | 0,0 | 3 | 3 |
| 0,39 | 0,09 | 0,32 | 0,08 | 0,0 | 3 | 3 |
| 0,56 | 0,14 | 0,47 | 0,08 | 0,0 | 3 | 3 |
| 0,73 | 0,20 | 0,59 | 0,12 | 0,0 | 3 | 3 |
| 0,84 | 0,21 | 0,70 | 0,11 | 0,0 | 3 | 3 |
| 0,98 | 0,24 | 0,80 | 0,13 | 0,0 | 3 | 3 |
| 1,04 | 0,26 | 0,89 | 0,15 | 0,0 | 3 | 3 |
| 1,18 | 0,31 | 0,96 | 0,13 | 0,0 | 3 | 3 |
| 1,28 | 0,35 | 1,03 | 0,19 | 0,0 | 3 | 3 |
| 1,39 | 0,38 | 1,11 | 0,22 | 0,0 | 3 | 3 |
| 1,44 | 0,39 | 1,20 | 0,19 | 0,0 | 3 | 3 |
| 1,55 | 0,46 | 1,24 | 0,23 | 0,0 | 3 | 3 |
| 1,59 | 0,43 | 1,29 | 0,23 | 0,0 | 3 | 3 |
| 1,67 | 0,34 | 1,35 | 0,22 | 0,0 | 3 | 3 |
| 1,67 | 0,42 | 1,41 | 0,15 | 0,0 | 3 | 3 |
| 1,87 | 0,54 | 1,46 | 0,25 | 0,0 | 3 | 3 |
| 1,90 | 0,46 | 1,51 | 0,25 | 0,0 | 3 | 3 |
| 1,99 | 0,60 | 1,56 | 0,27 | 0,0 | 3 | 3 |
| 2,14 | 0,60 | 1,63 | 0,29 | 0,0 | 3 | 3 |
| 2,22 | 0,60 | 1,66 | 0,33 | 0,0 | 3 | 3 |
| 2,23 | 0,61 | 1,71 | 0,30 | 0,0 | 3 | 3 |

($d_{\text{Limit}} = 10 \text{ m}$)

| Frequency MHz | AF R&S HL562 dB (1/m) | Corr. dB |
|------------------|--------------------------------|-------------|
| 30 | 18,6 | -9,9 |
| 50 | 6,0 | -9,6 |
| 100 | 9,7 | -9,2 |
| 150 | 7,9 | -8,8 |
| 200 | 7,6 | -8,6 |
| 250 | 9,5 | -8,3 |
| 300 | 11,0 | -8,1 |
| 350 | 12,4 | -7,9 |
| 400 | 13,6 | -7,6 |
| 450 | 14,7 | -7,4 |
| 500 | 15,6 | -7,2 |
| 550 | 16,3 | -7,0 |
| 600 | 17,2 | -6,9 |
| 650 | 18,1 | -6,9 |
| 700 | 18,5 | -6,8 |
| 750 | 19,1 | -6,3 |
| 800 | 19,6 | -6,3 |
| 850 | 20,1 | -6,0 |
| 900 | 20,8 | -5,8 |
| 950 | 21,1 | -5,6 |
| 1000 | 21,6 | -5,6 |

| cable loss 1 (inside chamber) dB | cable loss 2 (outside chamber) dB | cable loss 3 (switch unit) dB | cable loss 4 (to receiver) dB | distance corr. (-20 dB/ decade) dB | d_{Limit} (meas. distance (limit)) m | d_{used} (meas. distance (used)) m |
|--|---|---|---|--|---|---|
| 0,29 | 0,04 | 0,23 | 0,02 | -10,5 | 10 | 3 |
| 0,39 | 0,09 | 0,32 | 0,08 | -10,5 | 10 | 3 |
| 0,56 | 0,14 | 0,47 | 0,08 | -10,5 | 10 | 3 |
| 0,73 | 0,20 | 0,59 | 0,12 | -10,5 | 10 | 3 |
| 0,84 | 0,21 | 0,70 | 0,11 | -10,5 | 10 | 3 |
| 0,98 | 0,24 | 0,80 | 0,13 | -10,5 | 10 | 3 |
| 1,04 | 0,26 | 0,89 | 0,15 | -10,5 | 10 | 3 |
| 1,18 | 0,31 | 0,96 | 0,13 | -10,5 | 10 | 3 |
| 1,28 | 0,35 | 1,03 | 0,19 | -10,5 | 10 | 3 |
| 1,39 | 0,38 | 1,11 | 0,22 | -10,5 | 10 | 3 |
| 1,44 | 0,39 | 1,20 | 0,19 | -10,5 | 10 | 3 |
| 1,55 | 0,46 | 1,24 | 0,23 | -10,5 | 10 | 3 |
| 1,59 | 0,43 | 1,29 | 0,23 | -10,5 | 10 | 3 |
| 1,67 | 0,34 | 1,35 | 0,22 | -10,5 | 10 | 3 |
| 1,67 | 0,42 | 1,41 | 0,15 | -10,5 | 10 | 3 |
| 1,87 | 0,54 | 1,46 | 0,25 | -10,5 | 10 | 3 |
| 1,90 | 0,46 | 1,51 | 0,25 | -10,5 | 10 | 3 |
| 1,99 | 0,60 | 1,56 | 0,27 | -10,5 | 10 | 3 |
| 2,14 | 0,60 | 1,63 | 0,29 | -10,5 | 10 | 3 |
| 2,22 | 0,60 | 1,66 | 0,33 | -10,5 | 10 | 3 |
| 2,23 | 0,61 | 1,71 | 0,30 | -10,5 | 10 | 3 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

5.4 Antenna R&S HF907 (1 GHz – 18 GHz)

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------|-------|
| MHz | dB (1/m) | dB |
| 1000 | 24,4 | -19,4 |
| 2000 | 28,5 | -17,4 |
| 3000 | 31,0 | -16,1 |
| 4000 | 33,1 | -14,7 |
| 5000 | 34,4 | -13,7 |
| 6000 | 34,7 | -12,7 |
| 7000 | 35,6 | -11,0 |

| cable loss 1 (relay + cable inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit, attenuator & pre-amp) | cable loss 4 (to receiver) |
|---|--------------------------------|--|----------------------------|
| dB | dB | dB | dB |
| 0,99 | 0,31 | -21,51 | 0,79 |
| 1,44 | 0,44 | -20,63 | 1,38 |
| 1,87 | 0,53 | -19,85 | 1,33 |
| 2,41 | 0,67 | -19,13 | 1,31 |
| 2,78 | 0,86 | -18,71 | 1,40 |
| 2,74 | 0,90 | -17,83 | 1,47 |
| 2,82 | 0,86 | -16,19 | 1,46 |

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------|-------|
| MHz | dB (1/m) | dB |
| 3000 | 31,0 | -23,4 |
| 4000 | 33,1 | -23,3 |
| 5000 | 34,4 | -21,7 |
| 6000 | 34,7 | -21,2 |
| 7000 | 35,6 | -19,8 |

| cable loss 1 (relay inside chamber) | cable loss 2 (inside chamber) | cable loss 3 (outside chamber) | cable loss 4 (switch unit, attenuator & pre-amp) | cable loss 5 (to receiver) | used for FCC 15.247 |
|-------------------------------------|-------------------------------|--------------------------------|--|----------------------------|---------------------|
| dB | dB | dB | dB | dB | |
| 0,47 | 1,87 | 0,53 | -27,58 | 1,33 | |
| 0,56 | 2,41 | 0,67 | -28,23 | 1,31 | |
| 0,61 | 2,78 | 0,86 | -27,35 | 1,40 | |
| 0,58 | 2,74 | 0,90 | -26,89 | 1,47 | |
| 0,66 | 2,82 | 0,86 | -25,58 | 1,46 | |

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------|-------|
| MHz | dB (1/m) | dB |
| 7000 | 35,6 | -57,3 |
| 8000 | 36,3 | -56,3 |
| 9000 | 37,1 | -55,3 |
| 10000 | 37,5 | -56,2 |
| 11000 | 37,5 | -55,3 |
| 12000 | 37,6 | -53,7 |
| 13000 | 38,2 | -53,5 |
| 14000 | 39,9 | -56,3 |
| 15000 | 40,9 | -54,1 |
| 16000 | 41,3 | -54,1 |
| 17000 | 42,8 | -54,4 |
| 18000 | 44,2 | -54,7 |

| cable loss 1 (relay inside chamber) | cable loss 2 (High Pass) | cable loss 3 (pre-amp) | cable loss 4 (inside chamber) | cable loss 5 (outside chamber) | cable loss 6 (to receiver) |
|-------------------------------------|--------------------------|------------------------|-------------------------------|--------------------------------|----------------------------|
| dB | dB | dB | dB | dB | dB |
| 0,56 | 1,28 | -62,72 | 2,66 | 0,94 | 1,46 |
| 0,69 | 0,71 | -61,49 | 2,84 | 1,00 | 1,53 |
| 0,68 | 0,65 | -60,80 | 3,06 | 1,09 | 1,60 |
| 0,70 | 0,54 | -61,91 | 3,28 | 1,20 | 1,67 |
| 0,80 | 0,61 | -61,40 | 3,43 | 1,27 | 1,70 |
| 0,84 | 0,42 | -59,70 | 3,53 | 1,26 | 1,73 |
| 0,83 | 0,44 | -59,81 | 3,75 | 1,32 | 1,83 |
| 0,91 | 0,53 | -63,03 | 3,91 | 1,40 | 1,77 |
| 0,98 | 0,54 | -61,05 | 4,02 | 1,44 | 1,83 |
| 1,23 | 0,49 | -61,51 | 4,17 | 1,51 | 1,85 |
| 1,36 | 0,76 | -62,36 | 4,34 | 1,53 | 2,00 |
| 1,70 | 0,53 | -62,88 | 4,41 | 1,55 | 1,91 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

5.5 Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)

| Frequency MHz | AF EMCO 3160-09 dB (1/m) | Corr. dB | cable loss 1 (inside chamber) dB | cable loss 2 (pre- amp) dB | cable loss 3 (inside chamber) dB | cable loss 4 (switch unit) dB | cable loss 5 (to receiver) dB |
|------------------|-----------------------------------|-------------|--|--|--|---|---|
| 18000 | 40,2 | -23,5 | 0,72 | -35,85 | 6,20 | 2,81 | 2,65 |
| 18500 | 40,2 | -23,2 | 0,69 | -35,71 | 6,46 | 2,76 | 2,59 |
| 19000 | 40,2 | -22,0 | 0,76 | -35,44 | 6,69 | 3,15 | 2,79 |
| 19500 | 40,3 | -21,3 | 0,74 | -35,07 | 7,04 | 3,11 | 2,91 |
| 20000 | 40,3 | -20,3 | 0,72 | -34,49 | 7,30 | 3,07 | 3,05 |
| 20500 | 40,3 | -19,9 | 0,78 | -34,46 | 7,48 | 3,12 | 3,15 |
| 21000 | 40,3 | -19,1 | 0,87 | -34,07 | 7,61 | 3,20 | 3,33 |
| 21500 | 40,3 | -19,1 | 0,90 | -33,96 | 7,47 | 3,28 | 3,19 |
| 22000 | 40,3 | -18,7 | 0,89 | -33,57 | 7,34 | 3,35 | 3,28 |
| 22500 | 40,4 | -19,0 | 0,87 | -33,66 | 7,06 | 3,75 | 2,94 |
| 23000 | 40,4 | -19,5 | 0,88 | -33,75 | 6,92 | 3,77 | 2,70 |
| 23500 | 40,4 | -19,3 | 0,90 | -33,35 | 6,99 | 3,52 | 2,66 |
| 24000 | 40,4 | -19,8 | 0,88 | -33,99 | 6,88 | 3,88 | 2,58 |
| 24500 | 40,4 | -19,5 | 0,91 | -33,89 | 7,01 | 3,93 | 2,51 |
| 25000 | 40,4 | -19,3 | 0,88 | -33,00 | 6,72 | 3,96 | 2,14 |
| 25500 | 40,5 | -20,4 | 0,89 | -34,07 | 6,90 | 3,66 | 2,22 |
| 26000 | 40,5 | -21,3 | 0,86 | -35,11 | 7,02 | 3,69 | 2,28 |
| 26500 | 40,5 | -21,1 | 0,90 | -35,20 | 7,15 | 3,91 | 2,36 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

5.6 Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)

| Frequency | AF EMCO 3160-10 | Corr. | cable loss 1 (inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit) | cable loss 4 (to receiver) | distance corr. (-20 dB/ decade) | d _{Limit} (meas. distance limit) | d _{used} (meas. distance used) |
|-----------|-----------------------|-------|--|---|-------------------------------------|-------------------------------------|--|--|--|
| GHz | dB (1/m) | dB | dB | dB | dB | dB | dB | m | m |
| 26,5 | 43,4 | -11,2 | 4,4 | | | | -15,6 | 3 | 0,5 |
| 27,0 | 43,4 | -11,2 | 4,4 | | | | -15,6 | 3 | 0,5 |
| 28,0 | 43,4 | -11,1 | 4,5 | | | | -15,6 | 3 | 0,5 |
| 29,0 | 43,5 | -11,0 | 4,6 | | | | -15,6 | 3 | 0,5 |
| 30,0 | 43,5 | -10,9 | 4,7 | | | | -15,6 | 3 | 0,5 |
| 31,0 | 43,5 | -10,8 | 4,7 | | | | -15,6 | 3 | 0,5 |
| 32,0 | 43,5 | -10,7 | 4,8 | | | | -15,6 | 3 | 0,5 |
| 33,0 | 43,6 | -10,7 | 4,9 | | | | -15,6 | 3 | 0,5 |
| 34,0 | 43,6 | -10,6 | 5,0 | | | | -15,6 | 3 | 0,5 |
| 35,0 | 43,6 | -10,5 | 5,1 | | | | -15,6 | 3 | 0,5 |
| 36,0 | 43,6 | -10,4 | 5,1 | | | | -15,6 | 3 | 0,5 |
| 37,0 | 43,7 | -10,3 | 5,2 | | | | -15,6 | 3 | 0,5 |
| 38,0 | 43,7 | -10,2 | 5,3 | | | | -15,6 | 3 | 0,5 |
| 39,0 | 43,7 | -10,2 | 5,4 | | | | -15,6 | 3 | 0,5 |
| 40,0 | 43,8 | -10,1 | 5,5 | | | | -15,6 | 3 | 0,5 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)


Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

6 Setup Drawings

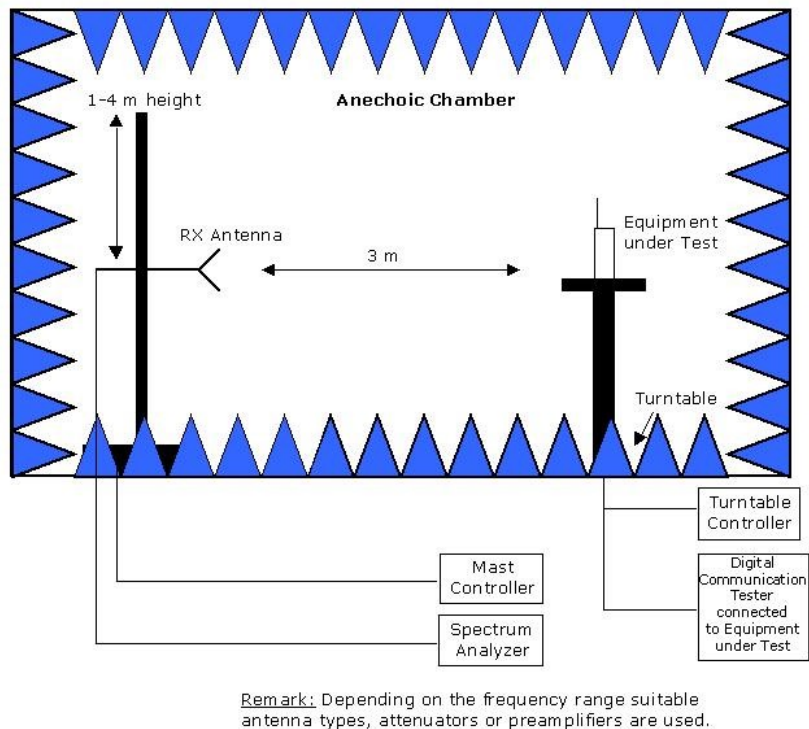

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

7 Measurement uncertainty

| Test Case | Parameter | Uncertainty |
|-----------------------------|------------------------------|-------------------------|
| Peak power output | Field strength | ± 5.5 dB |
| Occupied bandwidth | Power Frequency: | ± 2.9 dB ± 0.125 kHz |
| Spurious radiated emissions | Field strength Frequency: | ± 5.5 dB ± 11.2 kHz |
| AC Power Line | Power | ± 3.4 dB |

8 Photo Report

Photos are included in an external report.