



<b>Test Report No.:</b>	<b>IT21CBQB 001</b>	<b>Order No.:</b>	7976449	Page 1 of 119
<b>Order date:</b>	17-06-2021			
<b>Client:</b>	Move S.r.l. – Piazza Cavour 7 - 20121 Milano - Italy			
<b>Test item:</b>	Low Power Radio Module			
<b>Identification / Type No.:</b>	<b>MAMWLE-00</b> <b>MAMWLE-01</b>			
<b>FCC ID:</b>	<b>2A3LJ-MAMWLE</b>			
<b>Trademark:</b>	MOVE SOLUTIONS			
<b>Order content:</b>	Full tests according to the following standard:			
<b>Test specification:</b>	<b>FCC Cfr 47 part 15 – Subpart C - §15.247</b>			
<b>Date of receipt:</b>	24-08-2021			
<b>Test sample No.:</b>	Storage no.: A003116457-001			
<b>Testing period:</b>	03-09-2021 to 23-12-2021			
<b>Place of testing:</b>	TÜV Rheinland Italia S.r.l. Via E. Mattei, 3 20005 Pogliano Milanese (MI) - IT			
<b>Testing laboratory:</b>	TÜV Rheinland Italia S.r.l. Via E. Mattei,3 20005 Pogliano Milanese (MI) - IT			
<b>Test result:</b>	Pass			
<b>Tested by:</b>	Roberto Radice 	<b>Authorized by:</b>	Andrea Bortolotti 	
<b>Date:</b>	28-12-2021	<b>Date:</b>	28-12-2021	
<b>Position</b>	Laboratory technician	<b>Position</b>	(Reviewer)	
<b>Position</b>	Expert	<b>Position</b>	Expert	
<b>Other:</b>	---			
<b>Condition of the test item at delivery:</b>	Test item complete and undamaged			
<p>The test results reported in this test report shall refer only to the samples tested. TRI is not responsible for the sampling phase.  This report may not be partially reproduced, except with the prior written permission of the issuing Laboratory  TRI refuses any responsibility about information supplied by the customer contained in this test report</p>				



Test Report No.: <b>IT21CBQB 001</b>	Page 2 of 119
1	<p>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.</p> <p>Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</p>
2	<p>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</p>
3	<p>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</p> <p>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</p>
4	<p>The measurement uncertainty of the measurement procedures listed in this test report does not include the compliance of the respective limit values / operating conditions. For emission tests the requirements, CISPR 16-4-2 / EN55016-4-2 (chapter 4.2) apply in their current form.</p>
5	<p>Unless otherwise agreed with the customer, a conformity assessment is always carried out based on the applied standards.</p> <p>At the customer's request, the statement on the conformity of the product tested in this test report is carried out according to the criteria/requirements of the applied standards.</p> <p>Evaluation conditions deviating from these are documented separately in the respective chapters.</p>

Test Report No.: IT21CBQB 001

Page 3 of 119

6	Description	Low Power Radio Module
7	Model name	<b>MAMWLE-00</b> <b>MAMWLE-01</b>
8	Serial number	Not present
9	Manufacturer	Move S.r.l. - Piazza Cavour 7 - 20121 Milano - Italy
10	Trademark	MOVE SOLUTIONS
11	Power supply	DC power supply
12	Rated voltage	+3,3V
13	Rated frequency	N.A.
14	Rated current	----
15	Maximum power consumption	----
16	Modulation type	<input type="checkbox"/> Frequency hopping (FHSS) equipment <input checked="" type="checkbox"/> Wideband data transmission (non-FHSS equipment) <input type="checkbox"/> Direct Sequence Spread Spectrum (DSSS equipment) <input type="checkbox"/> Others:
17	Hardware version	MAMWLE_V1.1
18	Software version	LoRaWAN_AT_Slave v1.1
19	Dimensions	----
20	Weight	----
21	Test sample obtaining	<input checked="" type="checkbox"/> Sampling by customer <input type="checkbox"/> Sampling by TÜV Rheinland Group <input type="checkbox"/> others:

Test Report No.: **IT21CBQB 001**

Page 4 of 119

**22** *Applied basic standards*
**Reference document**

Title 47 Part 15 Subpart C	Radio Frequency Device – Intentional Radiators
Title 47 Part 15 Subpart C § 15.203	Radio frequency devices – Intentional Radiators Antenna requirement
Title 47 Part 15 Subpart C § 15.205	Radio frequency devices – Intentional Radiators Restricted bands of operation
Title 47 Part 15 Subpart C § 15.207	Radio frequency devices – Intentional Radiators Conducted Limits
Title 47 Part 15 Subpart C § 15.209	Radio frequency devices – Intentional Radiators Radiated Emissions Limits
Title 47 Part 15 Subpart C § 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz.
558074 D01 DTS Meas Guidance v05r02 - April 02,2019	Guidance for performing compliance measurements on digital transmission systems (DTS) operating under §15.247
ANSI C63.4	2014 Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10	2020 American National Standard for Testing Unlicensed Wireless Devices

Test Report No.: IT21CBQB 001

Page 5 of 119

**23** *Equipment used during test*
*Equipment under test*

<b>No.</b>	<b>Product type</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Comments</b>
<b>1</b>	Low Power Radio Module	Move S.r.l.	<b>MAMWLE-00 (Coax. Antenna)</b> <b>MAMWLE-01 (PAD Antenna)</b>	None

*Auxiliary Equipment / Peripherals*

<b>No.</b>	<b>Product type</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Comments</b>
<b>1</b>	Demo board	<b>Move solutions</b>	---	Provided by applicant
<b>2</b>	Personal computer	<b>Dell</b>	---	To send command on demo board

Test Report No.: IT21CBQB 001

Page 6 of 119

**24** Input/Output ports

No.	Name	Type	Cable length	Cable shielded	Comments
1	Enclosure	Open frame board	—	—	—
2	AC power port	Port not present			
3	DC power port	+3.3V via USB cable connected to a demo board	---	---	---
4	I/O port	Signal D+ and D-	---	---	To send command from Personal computer to demo board provided by applicant.
5	Telecommunication port	Port not present			

Test Report No.: **IT21CBQB 001**

Page 7 of 119

**25** *Used radio technologies and frequencies*

Radio Type	<input checked="" type="checkbox"/> Transceiver <input type="checkbox"/> Receiver only
Radio technology	<input type="checkbox"/> Short – Range Device <input type="checkbox"/> WiFi <input type="checkbox"/> Bluetooth Low Energy <input type="checkbox"/> GPS / GNSS <input type="checkbox"/> GSM/ GPRS (2G) <input type="checkbox"/> UTRA (UMTS, 3G) <input type="checkbox"/> E-UTRA (LTE, 4G) <input checked="" type="checkbox"/> Other: Lora module
Equipment type	<input checked="" type="checkbox"/> Without audio speech (data only) <input type="checkbox"/> With audio speech
Antenna type	<input checked="" type="checkbox"/> External (dedicated antenna) <input type="checkbox"/> Intergrated antenna
Short –Range Band / Frequency	---
WiFi Channel / Frequency	---
Bluetooth Channel / Frequency	---
GPS / GNSS Band / Frequency	---
GSM Bands / Frequency	---
Utra Bands / Frequency	---
E-Utra Bands / Frequency	---
Other Bands / Frequency	902 – 928MHz

Test Report No.: **IT21CBQB 001**

Page 8 of 119

<b>26</b>	<i>Radio module identification</i>	
	Module manufacturer	STMicroelectronics
	Module type	STM32WL System-On-Chip
	Frequency Band	923 – 928MHz (Downstream)
	Number of channel	8
	Channel bandwidth	500kHz
	Channel Separation	600kHz
	Modulation	LoRa®
	Antenna	Dedicated Antenna: Ant. S.r.l. mod. Chinook 868-915- GSM900-GSM1800 (P/N: B01-000)
	Antenna Gain	2.15dBi



Test Report No.: IT21CBQB 001

Page 9 of 119

**27** *Operating modes*
**No. Description**

**1** Continuous LORA Modulation RF Transmission (Downstream)  
 RF setting during tests:  
 Frequency: 923.3MHz (low channel); 925.7MHz (mid channel); 927.5MHz (high channel);  
 Modulation: LORA; Bandwidth: 500kHz; Spreading Factor DR8 to DR13 (SF12 to SF7)  
 Power Setting:  $\Rightarrow$  +15dBm (max. power declared)

**28** *Channel list*

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	923.3 MHz	2	923.9 MHz	3	924.5 MHz	4	925.1 MHz
5	925.7 MHz	6	926.3 MHz	7	926.9 MHz	8	927.5 MHz

Test Report No.: IT21CBQB 001

Page 10 of 119

**29** Summary of tests result

Port	Test	Operating condition	Result
Enclosure	Radiated emission (9KHz – 10GHz)	1	PASS
AC mains power port	Conducted emission	1	PASS
Antenna connector	Antenna requirement	1	PASS
	RF power output (conducted) for DTS systems	1	PASS
	6 dB Bandwidth	1	PASS
	Out-of-band emissions	1	PASS
	100 kHz Bandwidth of Frequency Band Edges	1	PASS
	Power Spectral Density	1	PASS
	Additional provisions to the general radiated emission limitations	1	PASS

Note: test has been executed conducted on MAMWLE-00 (worst case condition) and radiated on both MAMWLE-00 and MAMWLE-01 module.

Test Report No.: IT21CBQB 001

Page 11 of 119

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m} - 20}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement + Antenna Factor - Amplifier Gain + Cable loss = Radiated Emissions (dBμV/m)

$$25 \text{ dB}\mu\text{V/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dB}\mu\text{V/m}$$

30	EUT configuration						
	<p>The test setup was made in accordance with mentioned standards.</p> <p>Measurements and tests were executed under "worst case" conditions. Typical EUT arrangements or operating modes were chosen or assumed which let suspect maximum emission or susceptibility (a so called "unfavourable configuration").</p> <p>Details of test setup or adjustments are (particularly) shown inside the photo documentation.</p> <p>As far as not mentioned otherwise these statements are valid for all following tests.</p>						
31	Climatic conditions						
	<table> <tr> <td>Ambient Temperature</td><td>15 - 35 °C</td></tr> <tr> <td>Relative Humidity</td><td>30 - 60 %</td></tr> <tr> <td>Air pressure</td><td>860 - 1060 mbar</td></tr> </table>	Ambient Temperature	15 - 35 °C	Relative Humidity	30 - 60 %	Air pressure	860 - 1060 mbar
Ambient Temperature	15 - 35 °C						
Relative Humidity	30 - 60 %						
Air pressure	860 - 1060 mbar						

Test Report No.: IT21CBQB 001

Page 12 of 119

**32** Statement of the measurement uncertainty


The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the quality system acc. to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

The manufacturer has the sole responsibility of continued compliance of the device.

Test Method	Uncertainty (95%)	Coverage factor k
RF Conducted continuous emissions - range (150 kHz - 30MHz)	3,3 dB	2,0
RF Radiated emissions – range (30 – 1000) MHz	4,9 dB	2,0
RF Radiated emissions – range (1 – 8) GHz	5,1 dB	2,0
RF Radiated emissions – range (8 – 40) GHz	5,4 dB	2,0
Carrier Power (conducted) (1 – 8) GHz	1,5 dB	2,0
Occupied Bandwidth (OBW) (conducted)	$514.4 \times 1.00^{-9}$	2,0
Power Spectral Density (PSD) (conducted)	1,5 dB	2,0
Transmitter unwanted emissions (conducted) range (0 – 1) GHz	0.92 dB	2,0
Transmitter unwanted emissions (conducted) range (1 – 8) GHz	1,5 dB	2,0
Transmitter unwanted emissions (conducted) range (8 – 40) GHz	2,4 dB	2,0

Test Report No.: IT21CBQB 001

Page 13 of 119

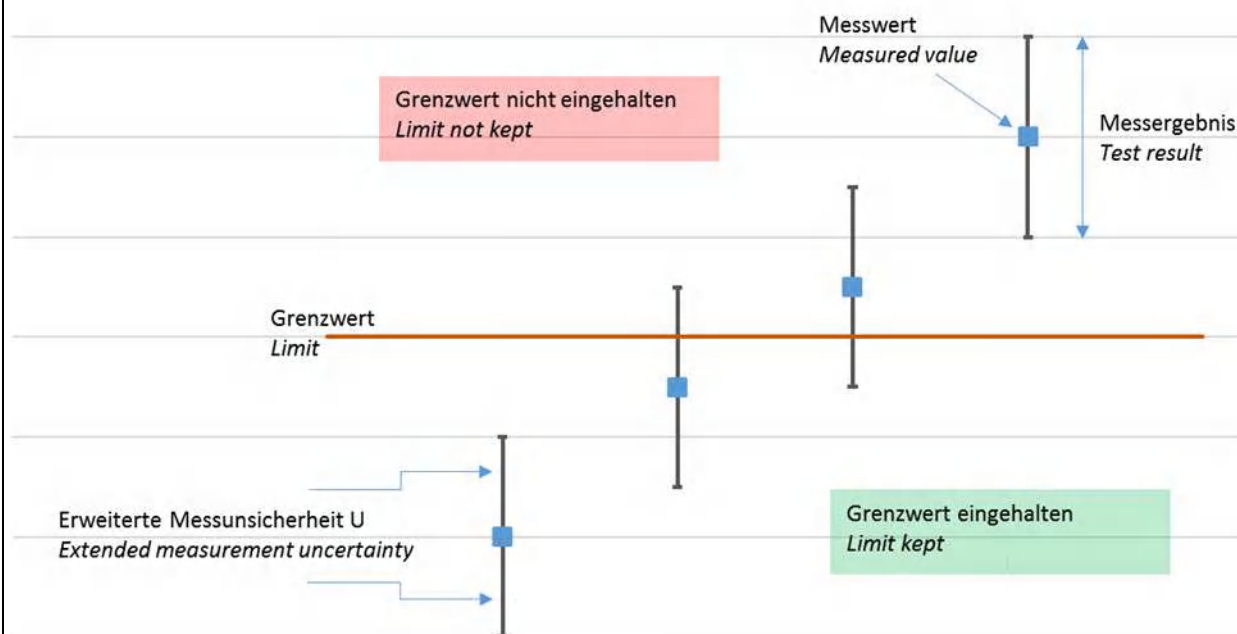**33 Example for interpretation of measuring results**


<i>Measured value</i>	<i>Limit</i>	<i>Extended measurement uncertainty (k=2)</i>	<i>Test result</i>
48.9 dB $\mu$ V @ 16.5 MHz	50 dB $\mu$ V	2.2 dB	46.7 dB $\mu$ V – 51.1 dB $\mu$ V

Decision rule :

Statements of conformity (PASS or FAIL) to specifications are made in this report without taking measurement uncertainty into account.

Where statements of conformity are made in this report, the following decision rules are applied:

**PASS** – Results within limits/specifications

**FAIL** – Results exceed limits/specifications

Test Report No.: IT21CBQB 001

Page 14 of 119

### REVISION HISTORY

#### 34 Change history

Test report number	List of revisions	Date
IT21CBQB 001	First edition	28-12-2021

## EMISSION TEST

**Conducted emission test (150KHz – 30MHz)**

Test date	23-12-2021
Applied Standard	Title 47 Part 15 Subpart C §15.207
Test method	par. 6.2 Conducted emission measurements of ANSI C63.10)
Temperature	22° C
Humidity	42%
Air pressure	1027 mbar
Tested by	Roberto Radice
Model	<b>MAMWLE-01</b>
Test sample No.	N°1
Operating mode	1
Tested terminals	AC Mains of auxiliary equipment
Result	PASS

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

*Used test equipment*

Type	Manufacturer	Model	ID	Last calibration	Next calibration
Semi-anechoic Chamber	ETS Lindgren	FACT3	2782378	05/2020	05/2022
Single-phase LISN 16A	Rohde&Schwarz	ENV216	2782895	05/2021	05/2022
EMI Receiver	Rohde&Schwarz	ESW44	2782867	06/2021	06/2022
Stabilized Power Supply	Elettrotest	TPS T 30K60S	2782385	10/2021	10/2022
Software EMC32	Rohde&Schwarz	10.60.15	---	---	---



**Test parameter of**

Pre Scan

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESW 44] 150 kHz - 30 MHz	FFT	PK ; AVG	9 kHz	100 ms	0 dB

Final Test

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESW 44] 150 kHz - 30 MHz	Single Freq.	QPK ; AVG	9 kHz	1 s	0 dB

**Graphical presentation of**


Note: worst case emission of 3 channels (low, middle and high)

Radiated emission test (9KHz – 10GHz)	
Test date	03-09-2021 to 23-12-2021
Applied Standard	Title 47 Part 15 Subpart C §15.205; §15.209; §15.247
Test method	Par. 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02 (and par. 11.12.1 Radiated emission measurements of ANSI C63.10)
Temperature	22° C
Humidity	42%
Air pressure	1027 mbar
Tested by	Roberto Radice
Model	<b>MAMWLE-00</b> <b>MAMWLE-01</b>
Test sample No.	N°2
Operating mode	1
Tested terminals	Enclosure
Result	PASS

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

Remark: In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is:

Limit 3m(dBµV/m)=Limit 300m(dBµV/m)+40Log(300m/3m) (Below 30MHz)

Limit 3m(dBµV/m)=Limit 300m(dBµV/m)+40Log(30m/3m) (Below 30MHz)

*Used test equipment*

Type	Manufacturer	Model	ID	Last calibration	Next calibration
Semi-anechoic Chamber	ETS Lindgren	FACT3	2782378	05/2020	05/2022
Active Loop Antenna	Rohde&Schwarz	HFH2-Z2E	9015215	05/2020	05/2023
BiConiLog Antenna	ETS Lindgren	3142-E	2782348	08/2020	08/2023
Antenna Horn with external Preamplifier	ETS Lindgren	3117-PA	2782349	08/2020	08/2023
Highpass Filter	Wainwright Instr.	WHKX10-1170-1300-150	2782705	12/2019	12/2021
EMI Receiver	Rohde&Schwarz	ESW44	2782867	06/2021	06/2022
Software EMC32	Rohde&Schwarz	10.60.15	---	---	---

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-00**

Operation mode: 1

Frequency: 9KHz-30MHz


Trace: Peak (blue trace)

Measurement distance: 3m.

Channel: low

Data Rate: DR13 (worst case of peak output power test)

## Full Spectrum

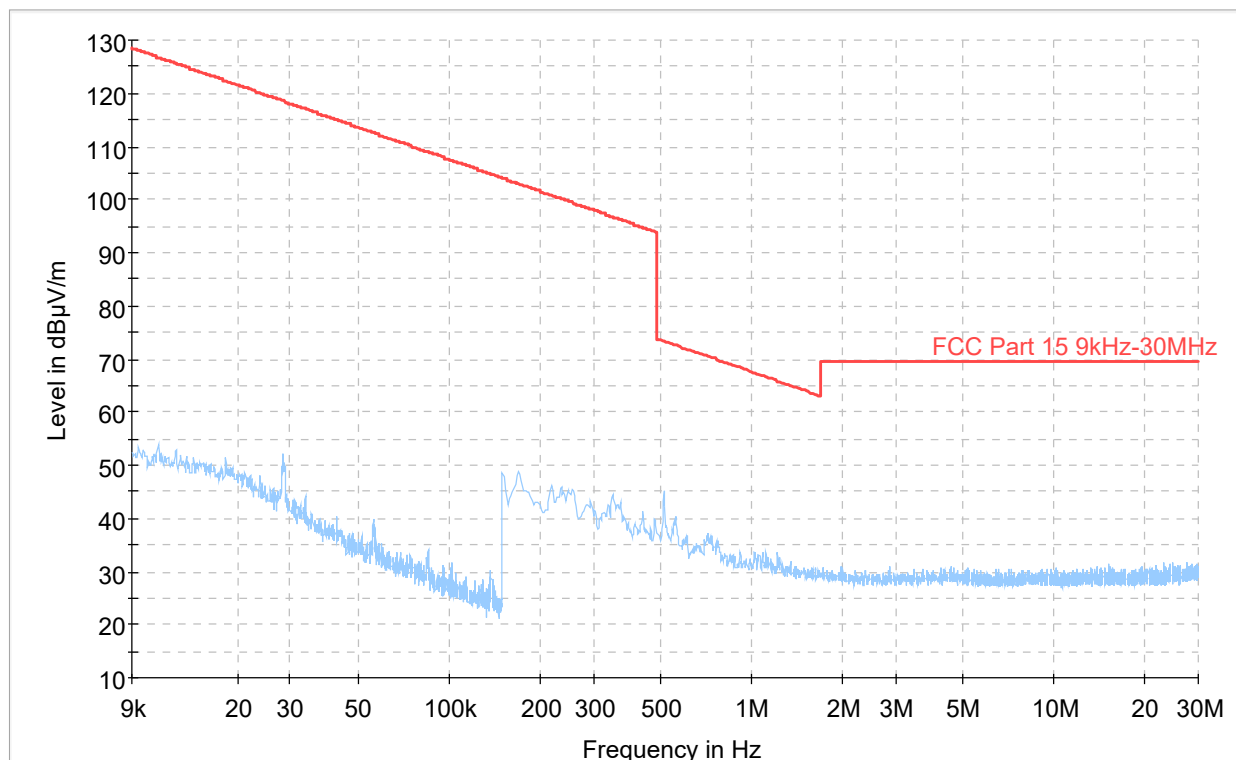

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-00**

Operation mode: 1

Frequency: 9KHz-30MHz


Trace: Peak (blue trace)

Measurement distance: 3m.

Channel: middle

Data Rate: DR13 (worst case of peak output power test)

## Full Spectrum

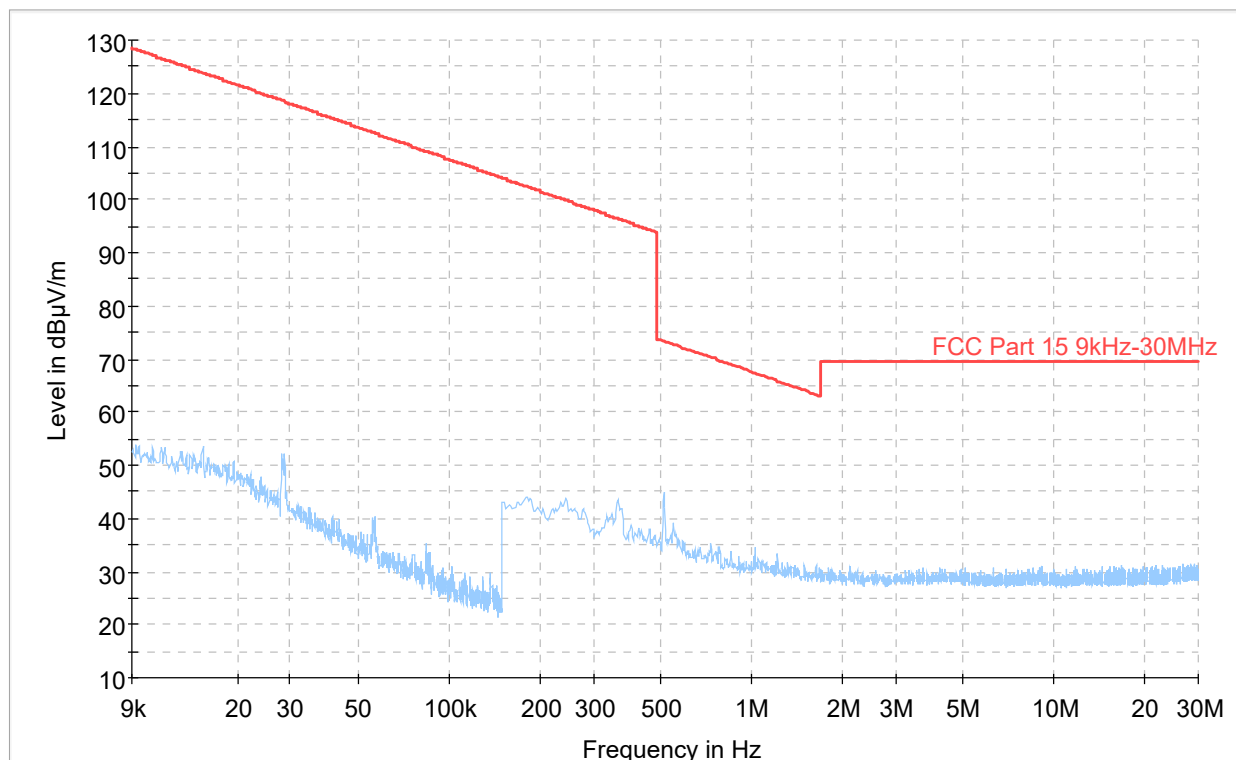

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-00**

Operation mode: 1

Frequency: 9KHz-30MHz


Trace: Peak (blue trace)

Measurement distance: 3m.

Channel: high

Data Rate: DR13 (worst case of peak output power test)

## Full Spectrum

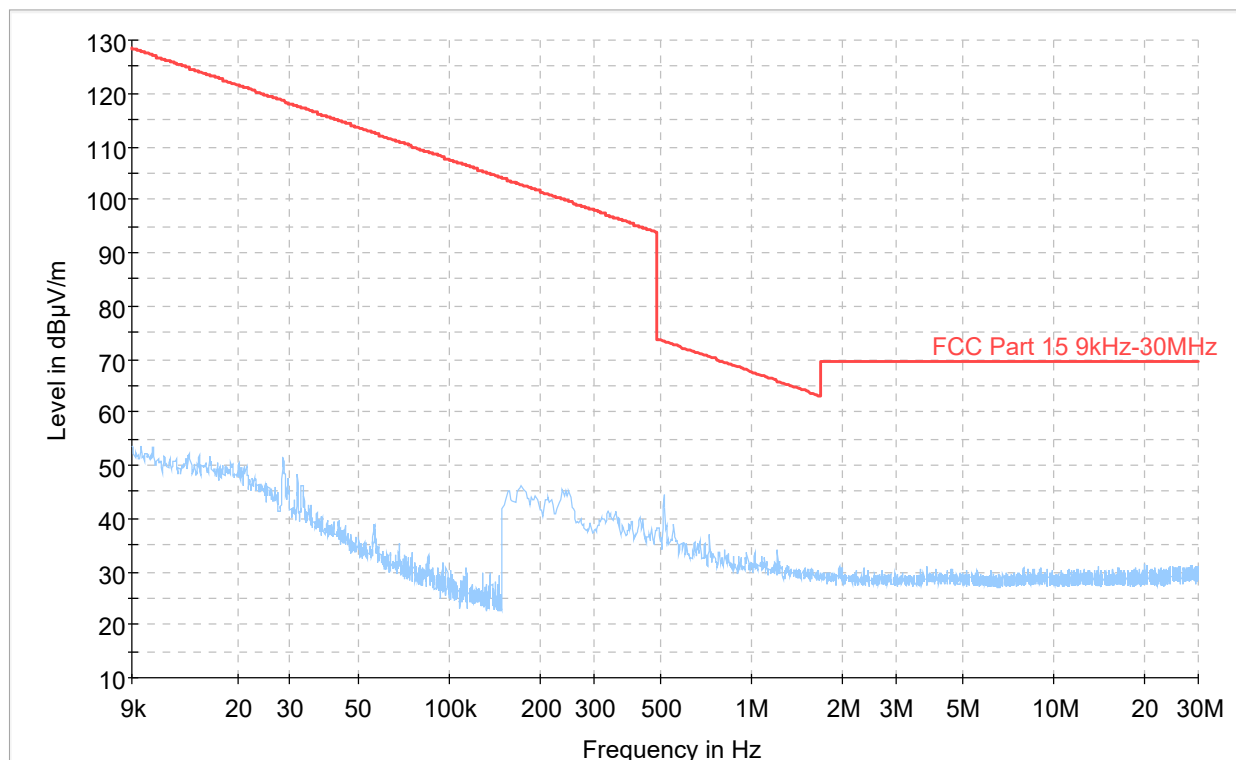

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-00**

Operation mode: 1

Frequency: 30-1000MHz


Trace: Peak (green trace)

Measurement distance: 3m.

Channel: low

Data Rate: DR13 (worst case of peak output power test)

## Emissione irradiata 30-1000MHz HL562E 3metri

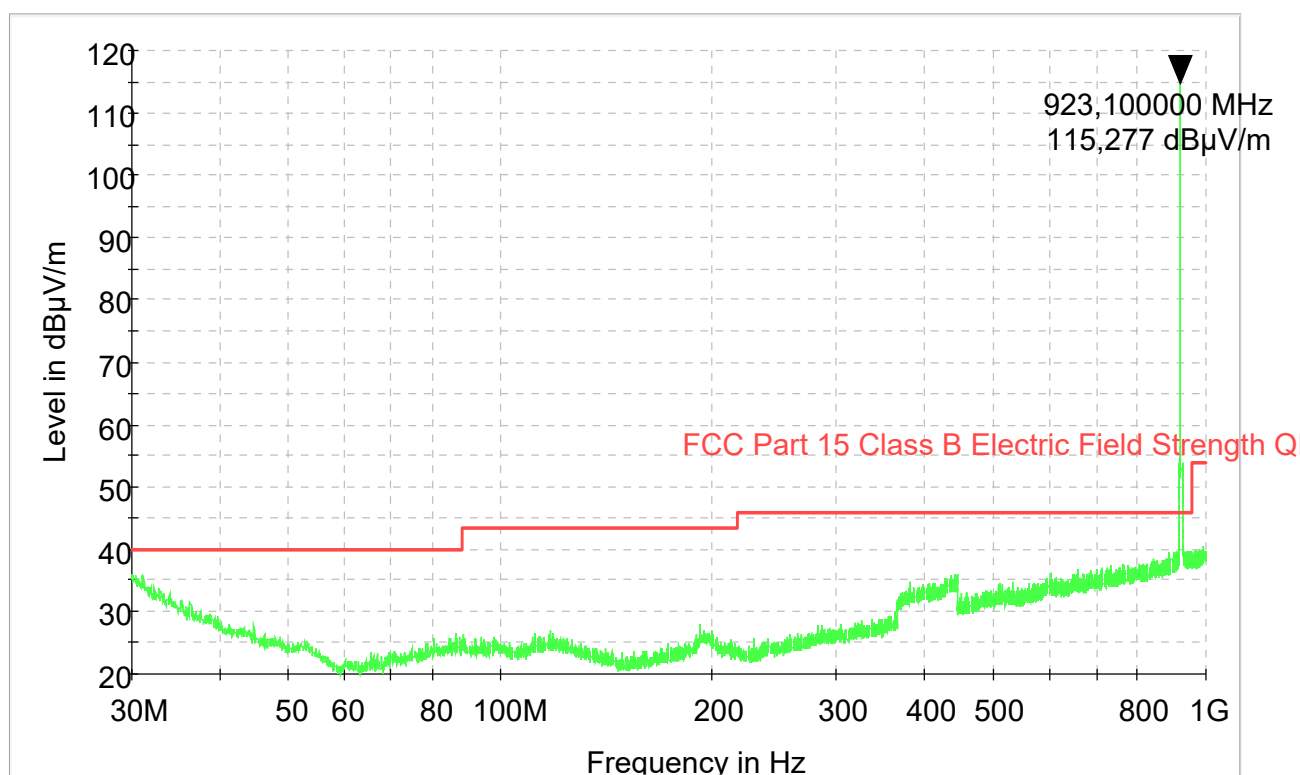

Note: marked fundamental frequency not related to limit

## FUNDAMENTAL LEVEL (PK)

Frequency	Reading value	Antenna Factor	Cable Loss	Correcting reading
(MHz)	(dB $\mu$ V)	(dB3/m)	(dB)	(dB $\mu$ V/m)
923.10	87.45	25.23	2.60	<b>115.28</b>

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-00**

Operation mode: 1

Frequency: 30-1000MHz


Trace: Peak (green trace)

Measurement distance: 3m.

Channel: middle

Data Rate: DR13 (worst case of peak output power test)

## Emissione irradiata 30-1000MHz HL562E 3metri

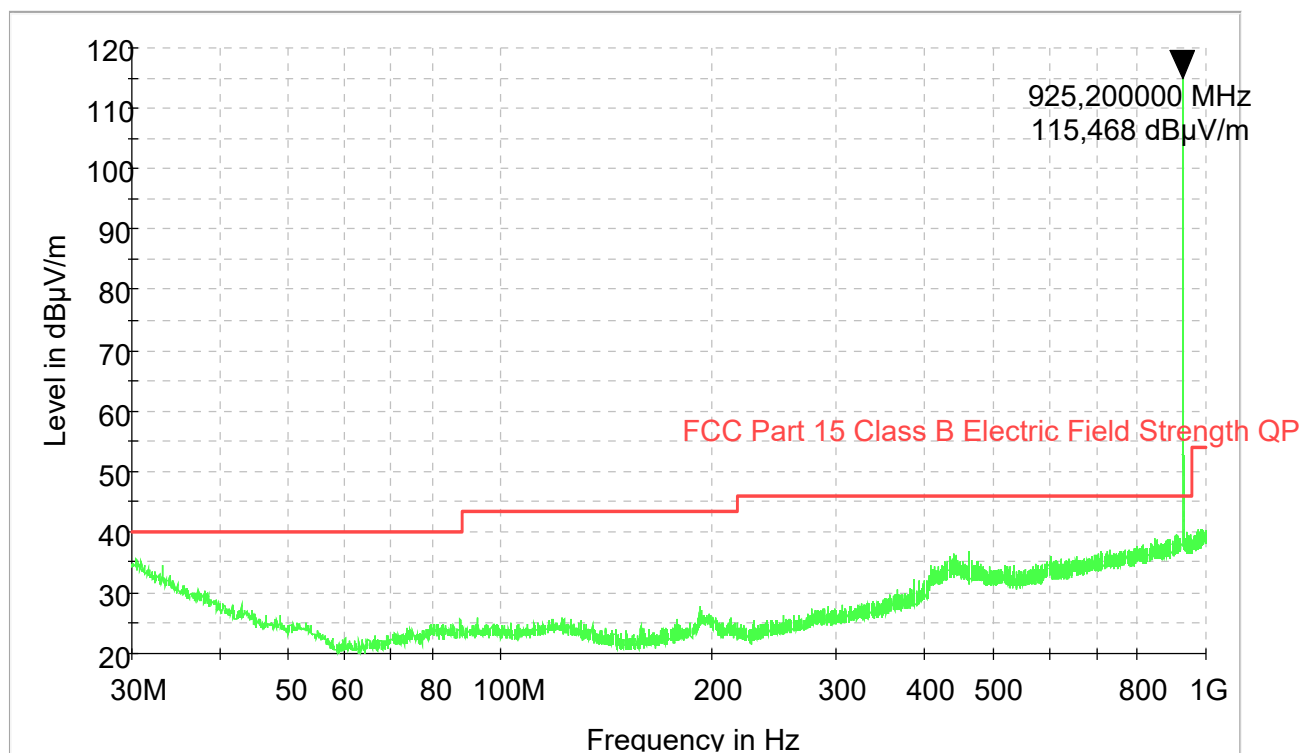

Note: marked fundamental frequency not related to limit

## FUNDAMENTAL LEVEL (PK)

Frequency	Reading value	Antenna Factor	Cable Loss	Correcting reading
(MHz)	(dBμV)	(dB3/m)	(dB)	(dBμV/m)
925.20	87.40	25.45	2.62	115.47



## Graphical presentation of radiated emission measurement

Module: **MAMWLE-00**

Operation mode: 1

Frequency: 30-1000MHz


Trace: Peak (green trace)

Measurement distance: 3m.

Channel: high

Data Rate: DR13 (worst case of peak output power test)

## Emissione irradiata 30-1000MHz HL562E 3metri

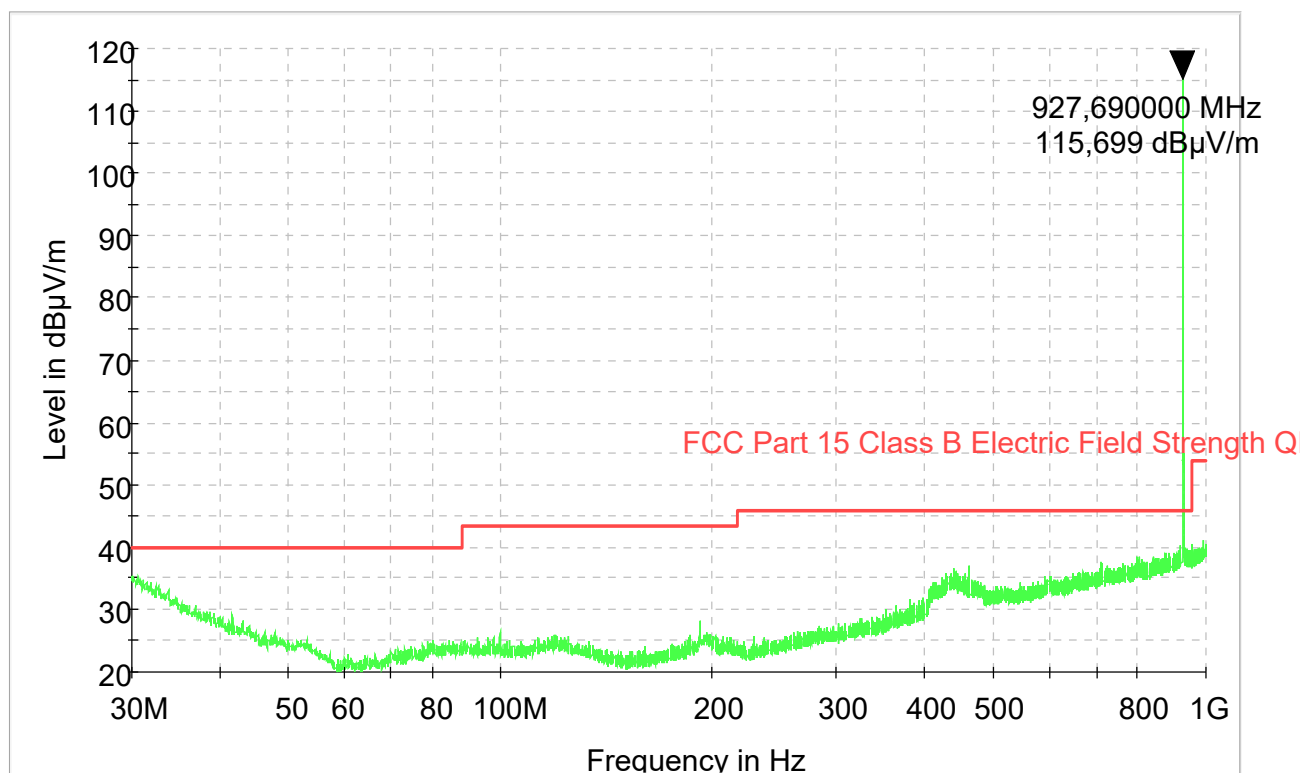

Note: marked fundamental frequency not related to limit

## FUNDAMENTAL LEVEL (PK)

Frequency	Reading value	Antenna Factor	Cable Loss	Correcting reading
(MHz)	(dB $\mu$ V)	(dB3/m)	(dB)	(dB $\mu$ V/m)
927.69	87.50	25.58	2.62	<b>115.70</b>

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-00**

Operation mode: 1

Frequency: 1000-10000MHz


Trace: Peak (blue trace); Average (green trace)

Measurement distance: 3m.

Channel: low

Data Rate: DR13 (worst case of peak output power test)

## Full Spectrum

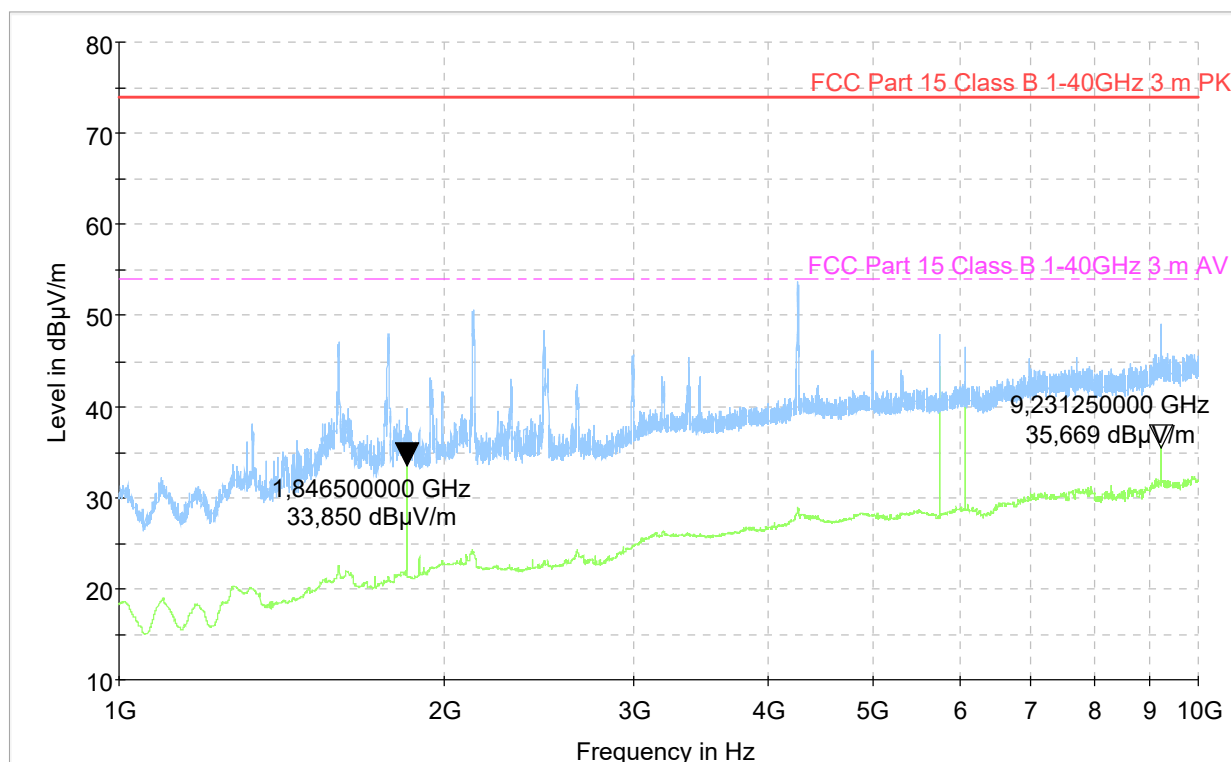

## HARMONIC LEVEL (AV)

Frequency	Reading value	Antenna Factor with pre-Amplifier	Cable Loss	Correcting reading
(MHz)	(dBµV)	(dB3/m)	(dB)	(dBµV/m)
1846.5	44.67	-13.92	3.10	<b>33.85</b>
9231.2	35.99	-7.54	7.25	<b>35.70</b>

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-00**

Operation mode: 1

Frequency: 1000-10000MHz


Trace: Peak (blue trace); Average (green trace)

Measurement distance: 3m.

Channel: middle

Data Rate: DR13 (worst case of peak output power test)

## Full Spectrum

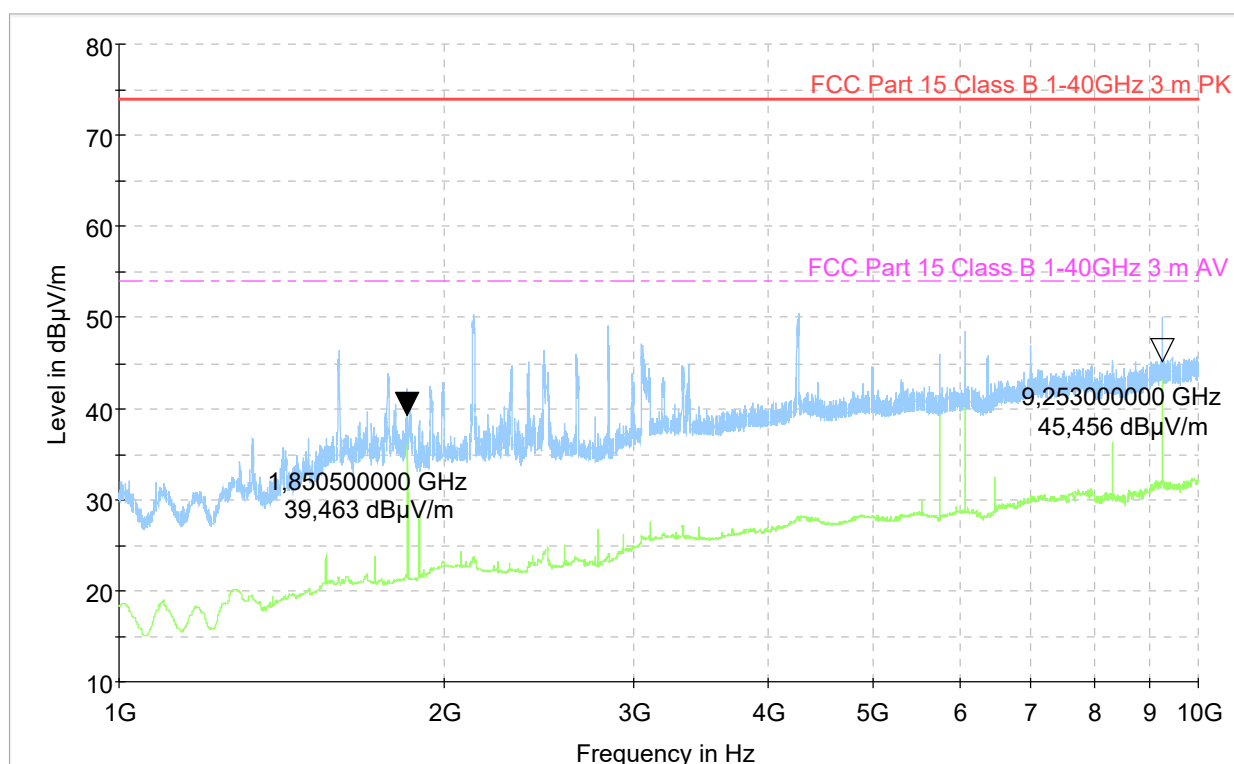

## HARMONIC LEVEL (AV)

Frequency	Reading value	Antenna Factor with pre-Amplifier	Cable Loss	Correcting reading
(MHz)	(dBµV)	(dB3/m)	(dB)	(dBµV/m)
1850.5	50.28	-13.92	3.10	<b>39.46</b>
9253.0	45.45	-7.27	7.28	<b>45.46</b>

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-00**

Operation mode: 1

Frequency: 1000-10000MHz


Trace: Peak (blue trace); Average (green trace)

Measurement distance: 3m.

Channel: high

Data Rate: DR13 (worst case of peak output power test)

## Full Spectrum

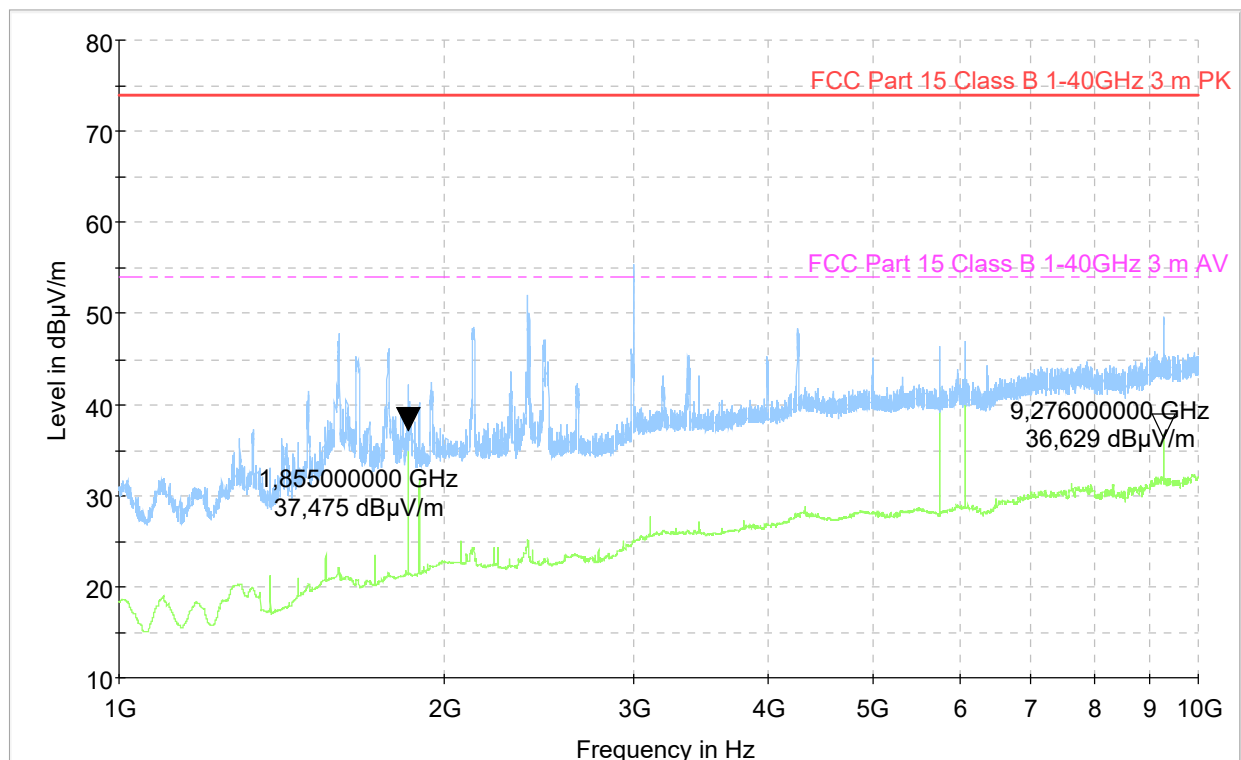

## HARMONIC LEVEL (AV)

Frequency	Reading value	Antenna Factor with pre-Amplifier	Cable Loss	Correcting reading
(MHz)	(dBµV)	(dB3/m)	(dB)	(dBµV/m)
1855.0	48.25	-13.90	3.12	<b>37.47</b>
9276.0	36.60	-7.27	7.30	<b>36.63</b>

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-01**

Operation mode: 1

Frequency: 9KHz-30MHz


Trace: Peak (green trace)

Measurement distance: 3m.

Channel: low

Data Rate: DR13 (worst case of peak output power test)

## Electric Field Strength 9kHz-30MHz active Antenna Loop

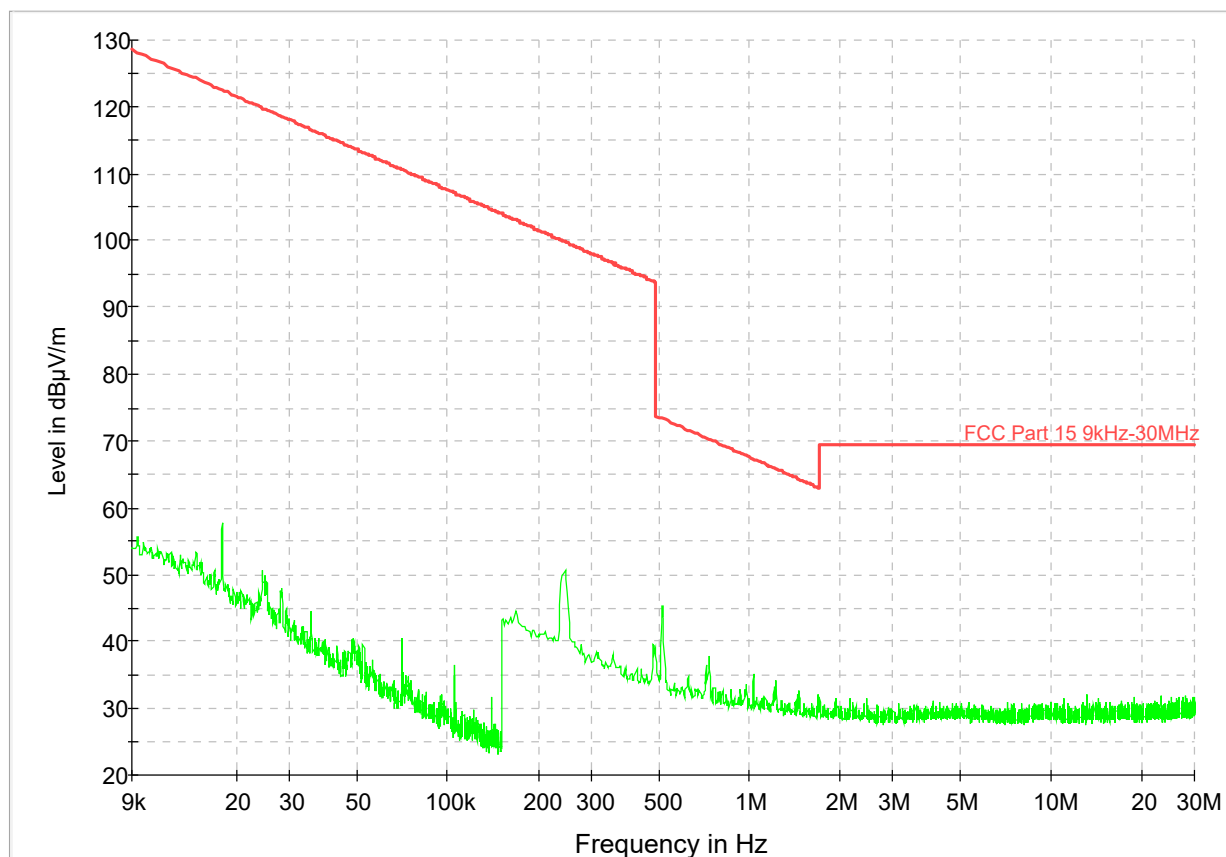

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-01**

Operation mode: 1

Frequency: 9KHz-30MHz


Trace: Peak (green trace)

Measurement distance: 3m.

Channel: middle

Data Rate: DR13 (worst case of peak output power test)

## Electric Field Strength 9kHz-30MHz active Antenna Loop

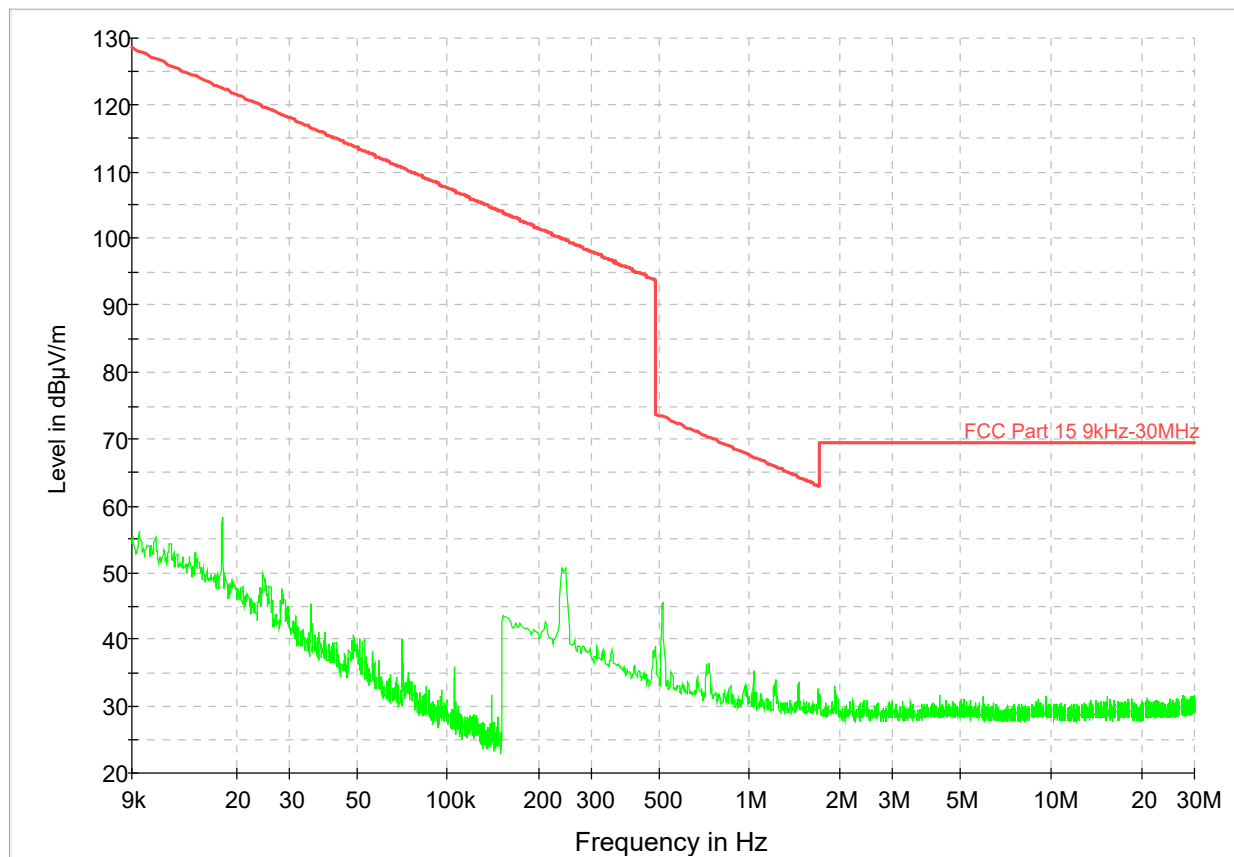

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-01**

Operation mode: 1

Frequency: 9KHz-30MHz


Trace: Peak (green trace)

Measurement distance: 3m.

Channel: high

Data Rate: DR13 (worst case of peak output power test)

## Electric Field Strength 9kHz-30MHz active Antenna Loop

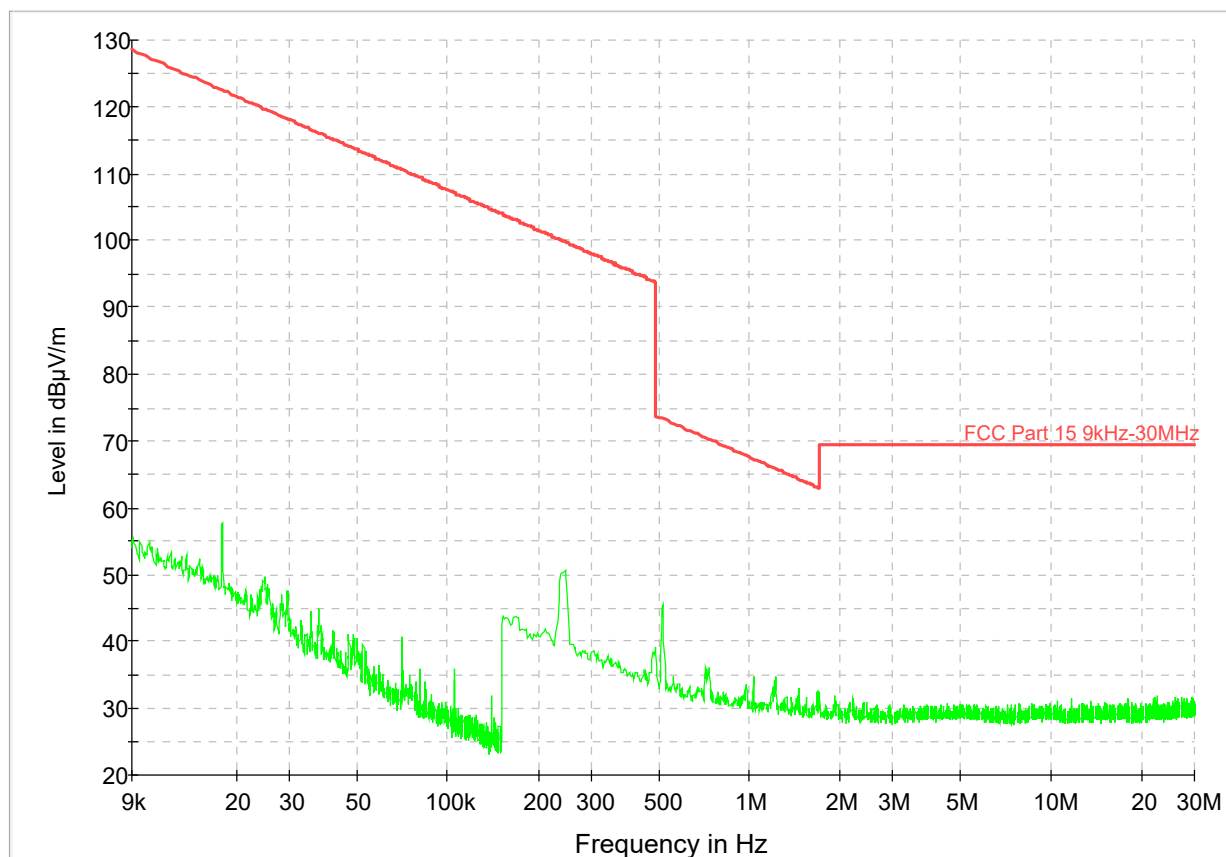

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-01**

Operation mode: 1

Frequency: 30-1000MHz


Trace: Peak (green trace)

Measurement distance: 3m.

Channel: low

Data Rate: DR13 (worst case of peak output power test)

## Electric Field Strength

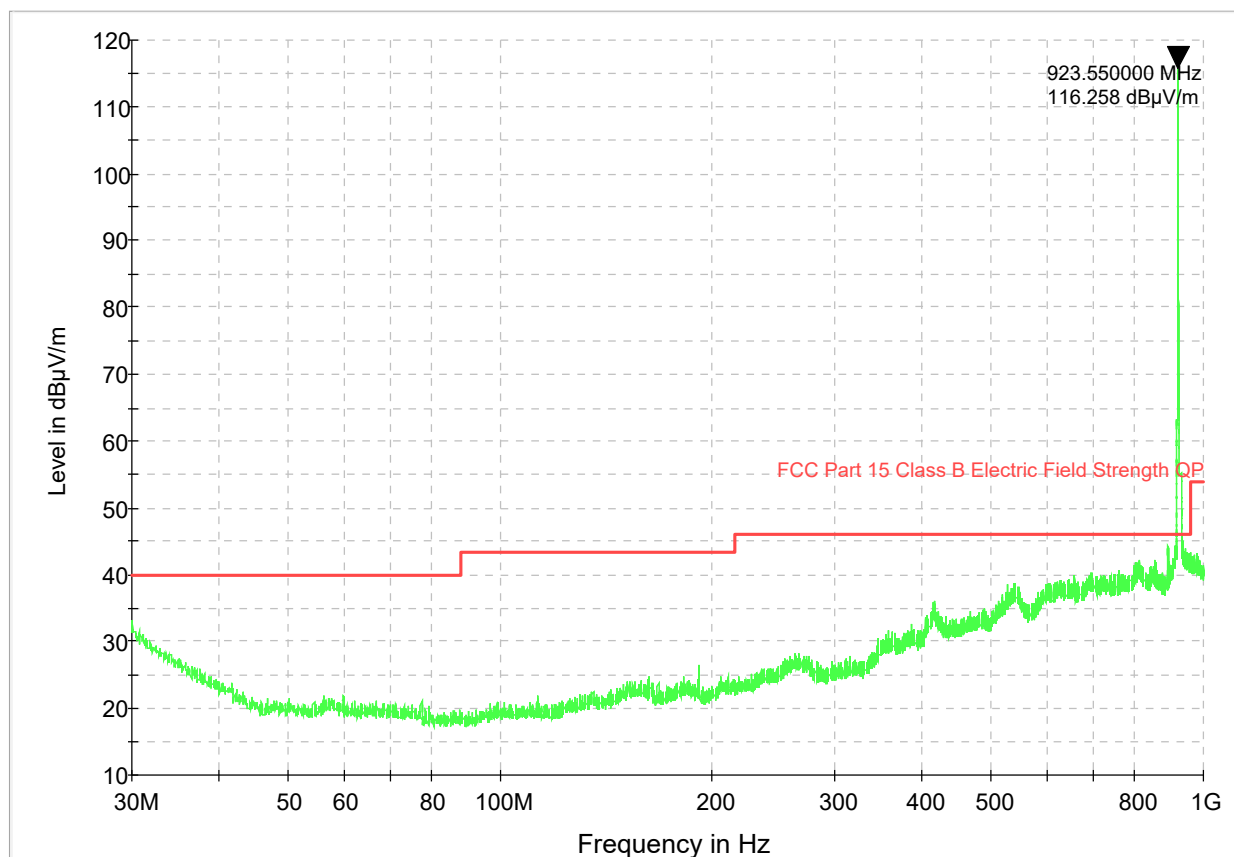

Note: marked fundamental frequency not related to limit

## FUNDAMENTAL LEVEL (PK)

Frequency	Reading value	Antenna Factor	Cable Loss	Correcting reading
(MHz)	(dBµV)	(dB3/m)	(dB)	(dBµV/m)
923.55	88.43	25.23	2.60	<b>116.26</b>



## Graphical presentation of radiated emission measurement

Module: **MAMWLE-01**

Operation mode: 1

Frequency: 30-1000MHz


Trace: Peak (green trace)

Measurement distance: 3m.

Channel: middle

Data Rate: DR13 (worst case of peak output power test)

## Electric Field Strength

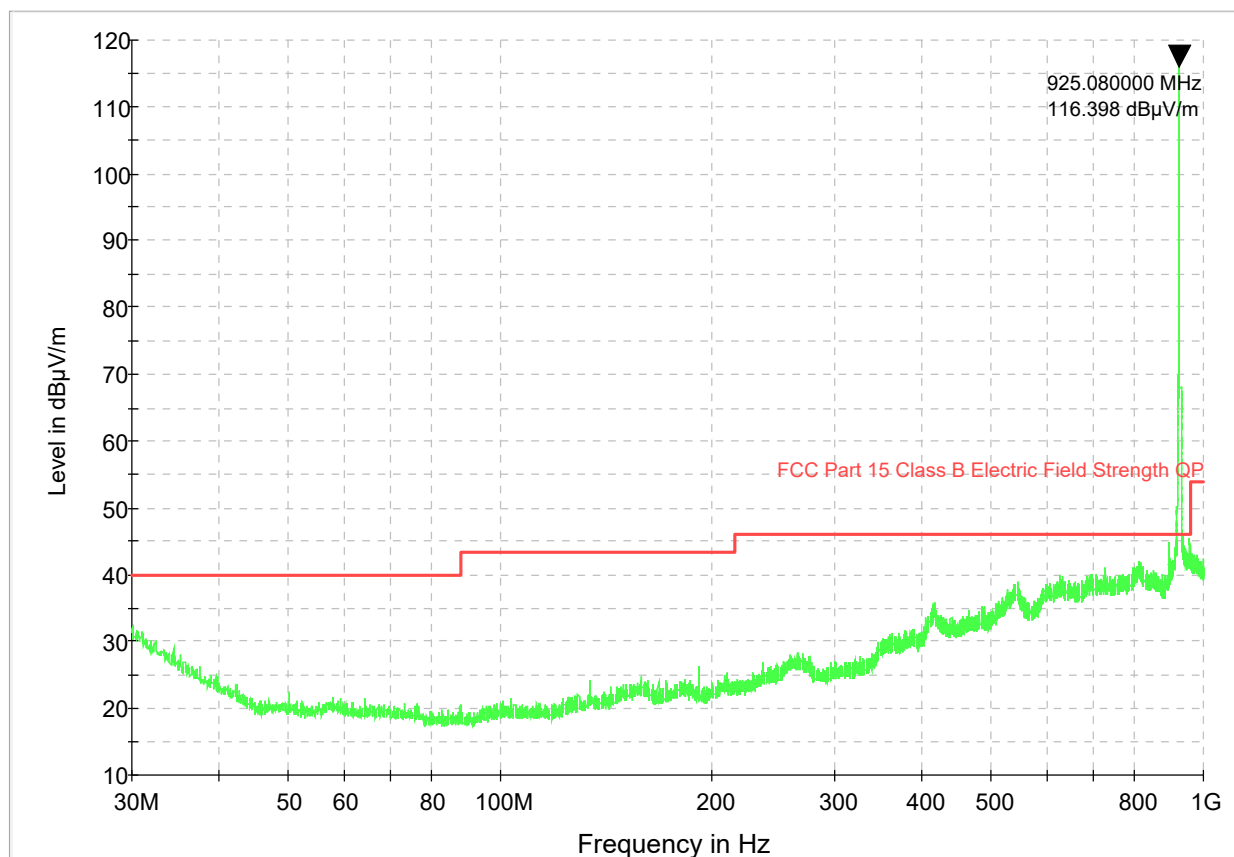

Note: marked fundamental frequency not related to limit

## FUNDAMENTAL LEVEL (PK)

Frequency	Reading value	Antenna Factor	Cable Loss	Correcting reading
(MHz)	(dBμV)	(dB3/m)	(dB)	(dBμV/m)
925.08	88.33	25.45	2.62	<b>116.40</b>

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-01**

Operation mode: 1

Frequency: 30-1000MHz


Trace: Peak (green trace)

Measurement distance: 3m.

Channel: high

Data Rate: DR13 (worst case of peak output power test)

## Electric Field Strength

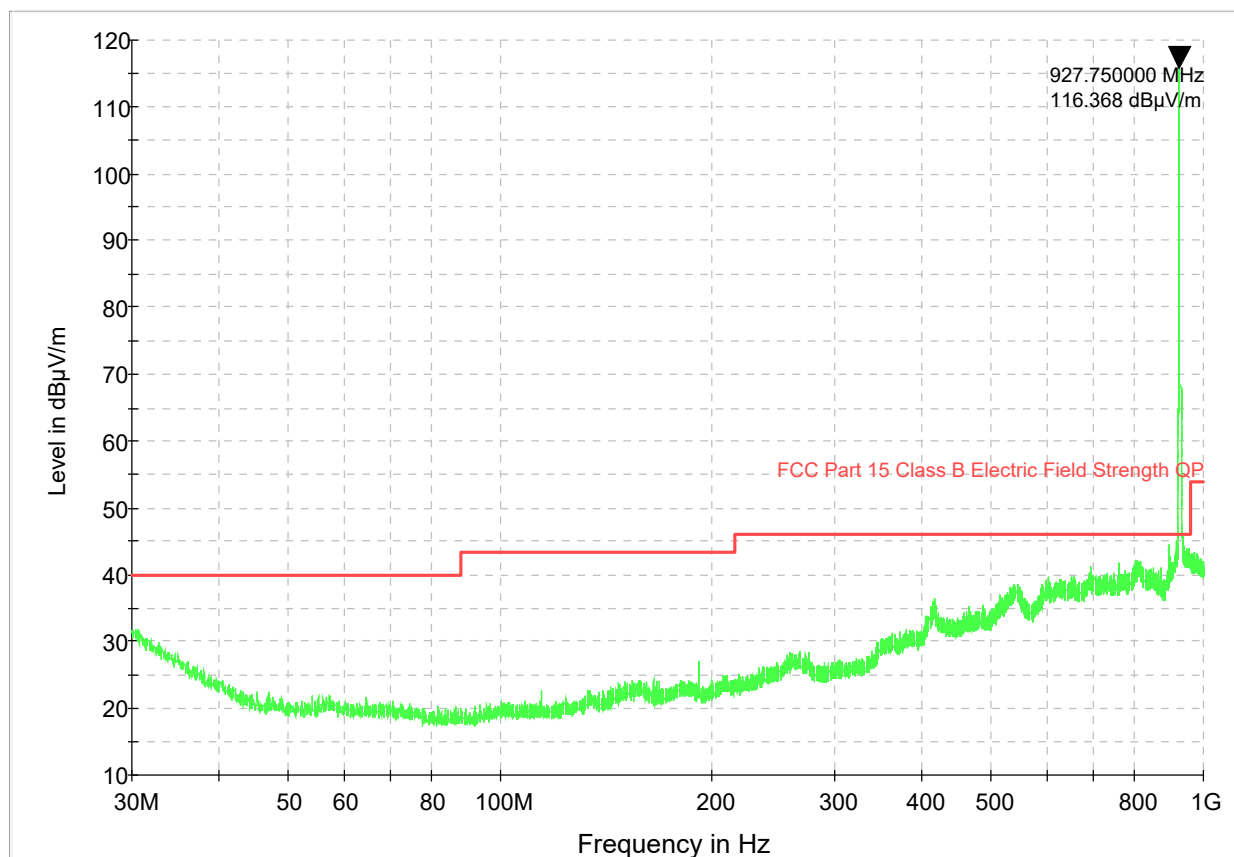

Note: marked fundamental frequency not related to limit

## FUNDAMENTAL LEVEL (PK)

Frequency	Reading value	Antenna Factor	Cable Loss	Correcting reading
(MHz)	(dBμV)	(dB3/m)	(dB)	(dBμV/m)
927.75	88.17	25.58	2.62	<b>116.37</b>

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-01**

Operation mode: 1

Frequency: 1000-10000MHz


Trace: Peak (blue trace); Average (green trace)

Measurement distance: 3m.

Channel: low

Data Rate: DR13 (worst case of peak output power test)

Full Spectrum

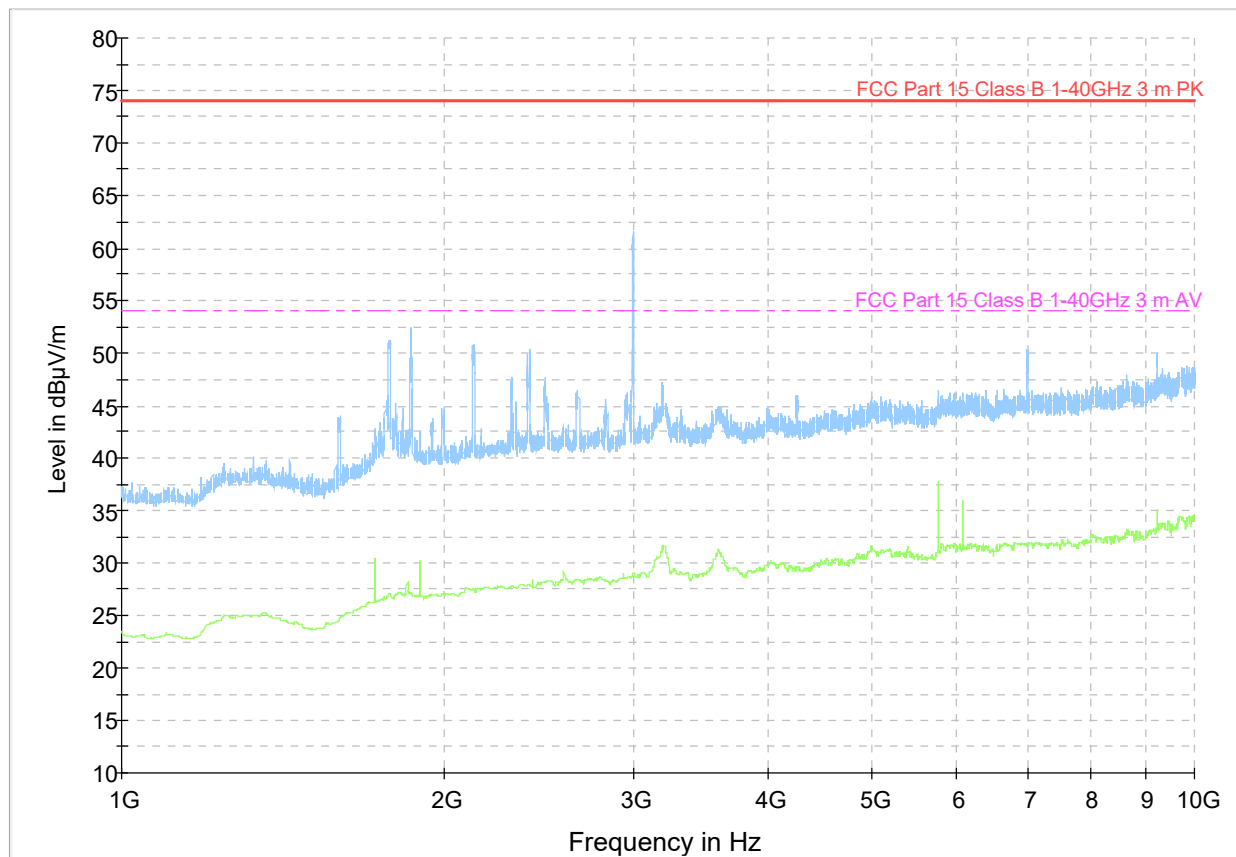

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-01**

Operation mode: 1

Frequency: 1000-10000MHz


Trace: Peak (blue trace); Average (green trace)

Measurement distance: 3m.

Channel: middle

Data Rate: DR13 (worst case of peak output power test)

Full Spectrum

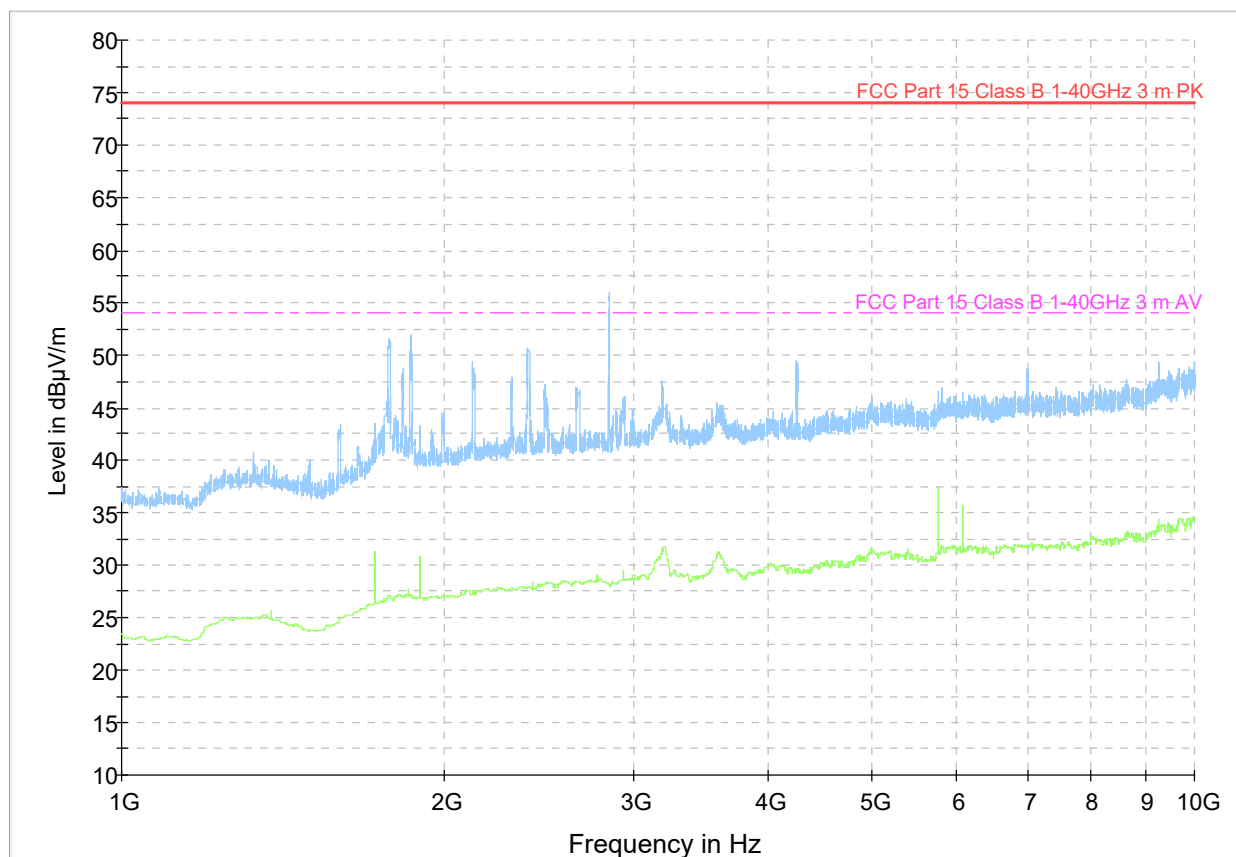

## Graphical presentation of radiated emission measurement

Module: **MAMWLE-01**

Operation mode: 1

Frequency: 1000-10000MHz


Trace: Peak (blue trace); Average (green trace)

Measurement distance: 3m.

Channel: high

Data Rate: DR13 (worst case of peak output power test)

Full Spectrum

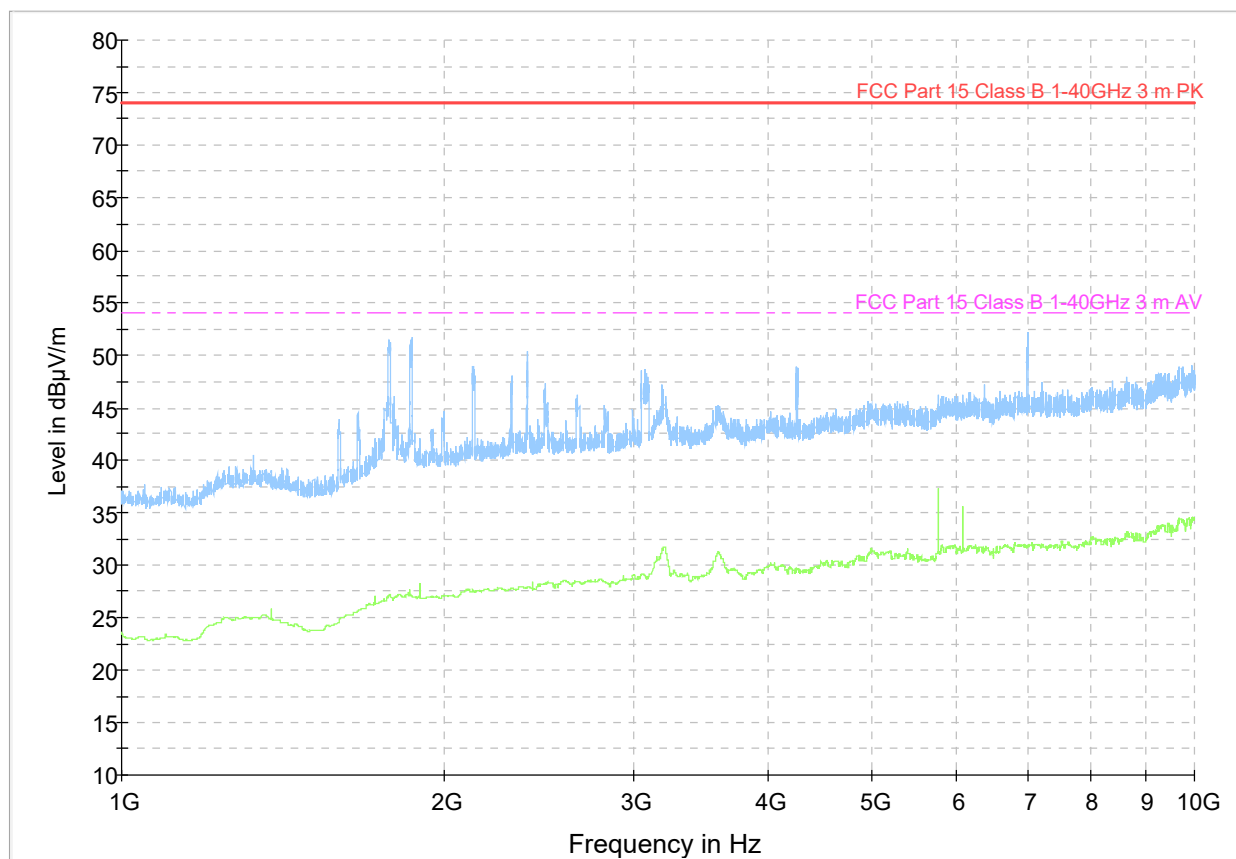

*Graphical presentation of radiated emission measurement**Module: **MAMWLE-00 & MAMWLE-01****Low Channel (923.3 MHz) & High Channel (927.5 MHz)**Frequency: Restricted band near fundamental frequency*

Note: radiated emission outside the frequency band attenuation below the general limit specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limit specified in FCC section 15.209(a)

**The adjacent to the restricted frequency band (608-614 MHz and 960-1240MHz) is far away the fundamental, it is noise only.**

Antenna requirements	
Test date	10-09-2021
Applied Standard	Title 47 Part 15 Subpart C §15.203
Test method	§ 5.8 of ANSI C63.10
Temperature	22° C
Humidity	42%
Air pressure	1027 mbar
Tested by	Roberto Radice
Model	<b>MAMWLE-00</b> <b>MAMWLE-01</b>
Test sample No.:	N°2
Operating mode	1
Tested terminals	Antenna
Result	PASS
<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.</p>	
Antenna specifications	
N° of authorized antenna types	1
Antenna type	Dedicated Antenna Ant. S.r.l. mod. Chinook 868-915- GSM900-GSM1800 (P/N: B01-000) On model <b>MAMWLE-00</b> the connector is ufl type On model <b>MAMWLE-01</b> the connector is SMA type
Maximum total gain	2.15 dBi
External power amplifiers	Not present

RF power output, radiated (EIRP)	
Test date	03-09-2021
Applied Standard	Title 47 Part 15 Subpart C §15.247
Test method	According to Par. 8.3.2.2 of KDB 558074 D01 15.247 Meas. Guidance v05r02 (and par. 11.9.1.1 of ANSI C63.10)
Temperature	22° C
Humidity	42%
Air pressure	1027 mbar
Tested by	Roberto Radice
Model	<b>MAMWLE-01</b>
Test sample No.:	N°1
Operating mode	1
Tested terminals	SMA antenna connector
Result	PASS



(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: since it was not possible to put in an antenna connector, test was carried out in a radiated manner According to Par. 2.3 of KDB 412172 D01 Determining ERP and EIRP v01r01

*Used test equipment*


Type	Manufacturer	Model	ID	Last calibration	Next calibration
EMI Receiver	Rohde&Schwarz	ESU40	2782345	10/2020	10/2021

*Measurement data of RF power output, conducted measurement*


Test conditions			Frequency (MHz)	Ch.	Conducted Output Power		Antenn a Gain	Limits (W)		Result
Temperature	Voltage	Modulation			dBm	mW		Conducted	Radiated	
Tnom +22°C	3.3 V dc	Lora	923.3	1	14.62	28.97	2.15	1	4	PASS
Tnom +22°C	3.3 V dc	Lora	925.7	5	14.58	28.70	2.15	1	4	PASS
Tnom +22°C	3.3 V dc	Lora	927.5	8	14.58	28.70	2.15	1	4	PASS

## Graphical Results of RF power output, conducted measurement


## Channel low (923.3MHz)

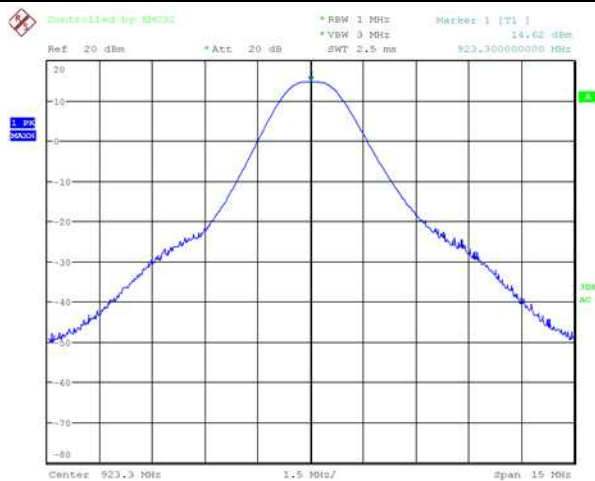


Data rate: DR13

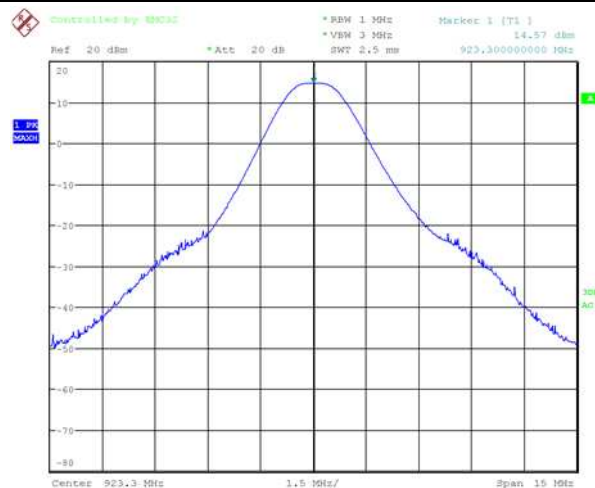

Data rate: DR12

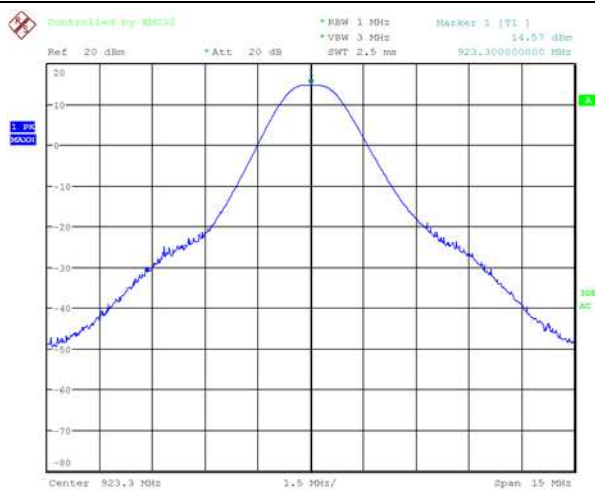

Data rate: DR11

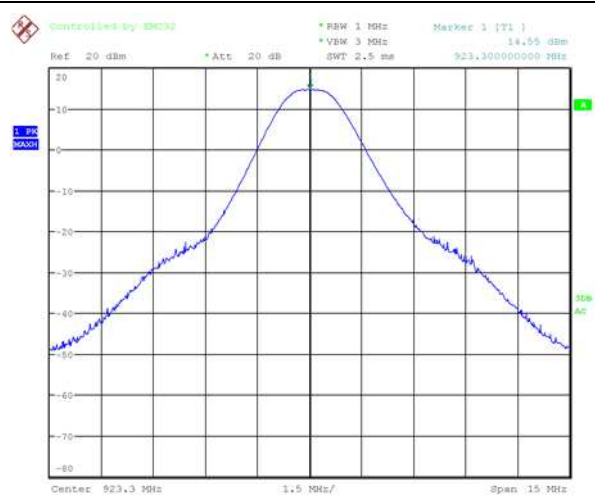


Data rate: DR10

## Graphical Results of RF power output, conducted measurement

## Channel low (923.3MHz)




Data rate: DR9

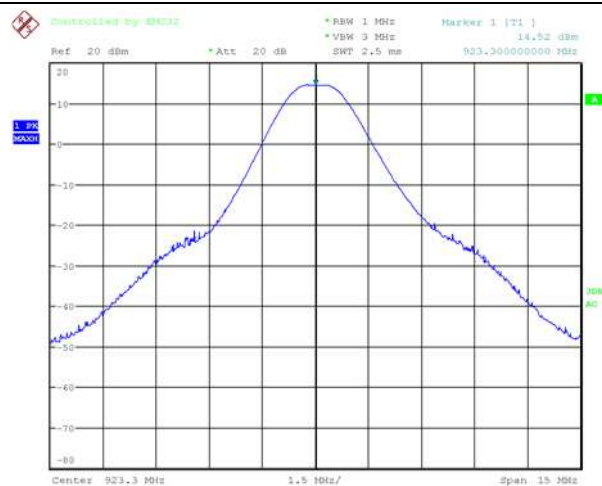


Data rate: DR8

## Graphical Results of RF power output, conducted measurement


Channel middle (925.7 MHz)

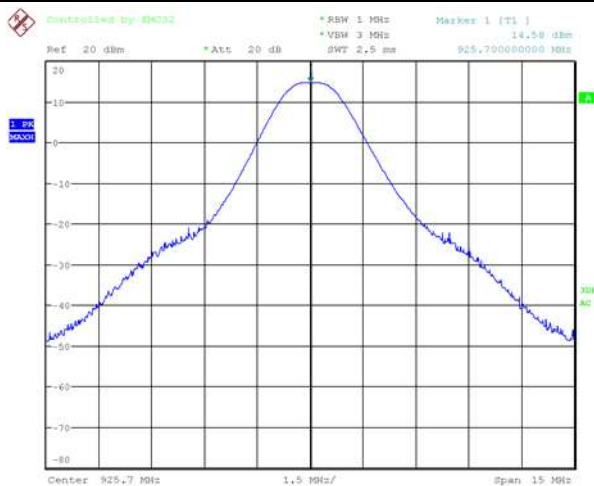


Data rate: DR13

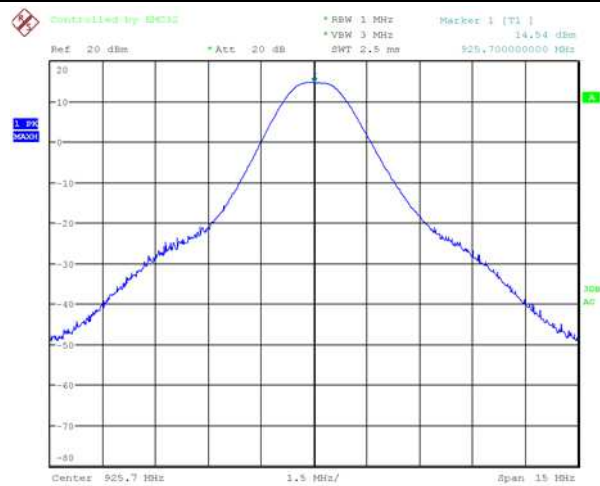

Data rate: DR12

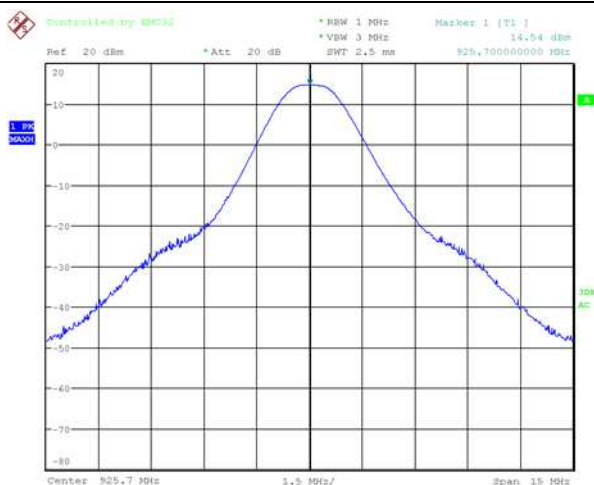


Data rate: DR11

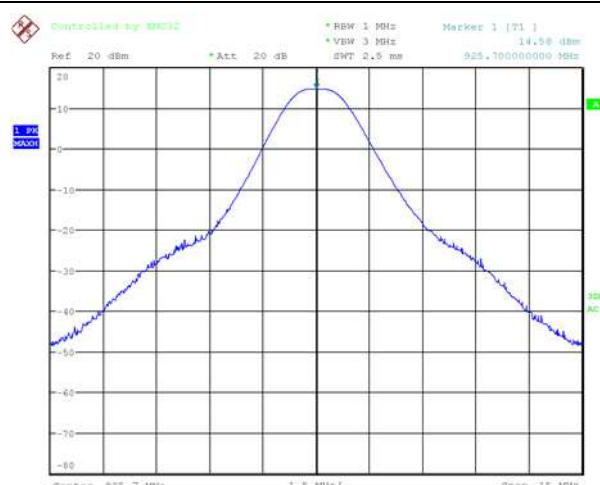


Data rate: DR10

## Graphical Results of RF power output, conducted measurement

Channel middle (925.7 MHz)

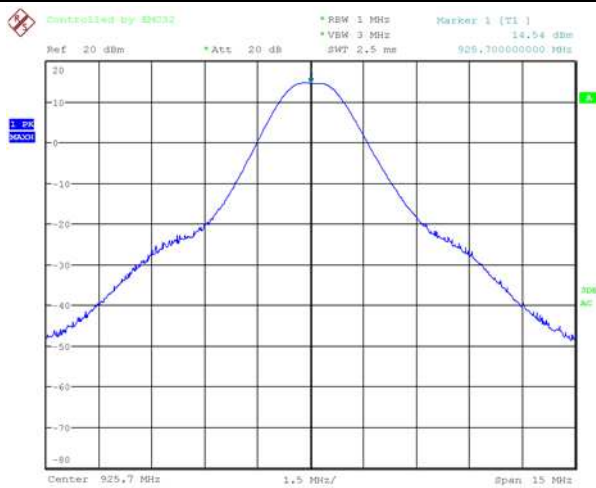

Data rate: DR9

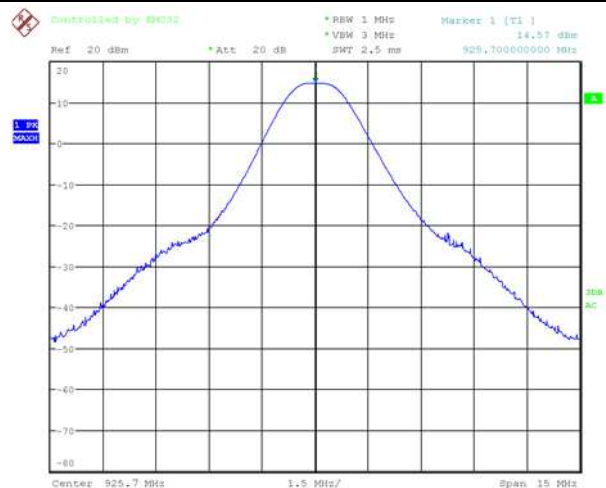


Data rate: DR8

## Graphical Results of RF power output, conducted measurement


## Channel high (927.5 MHz)




Data rate: DR13

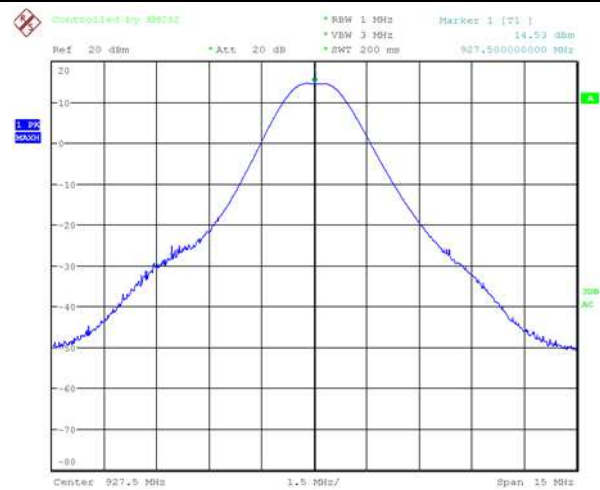

Data rate: DR12

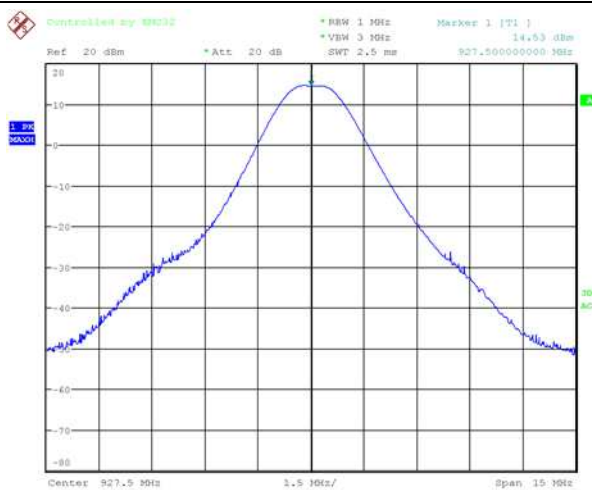


Data rate: DR11

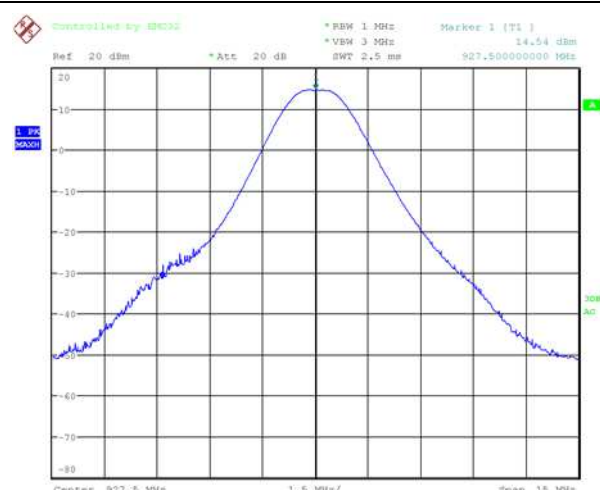


Data rate: DR10

## Graphical Results of RF power output, conducted measurement

## Channel high (927.5 MHz)

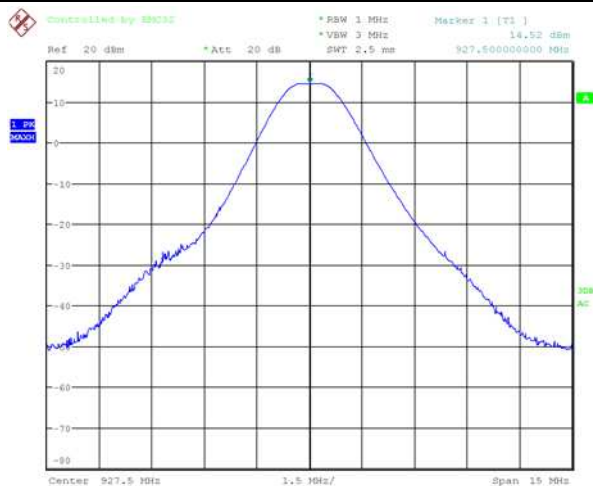

Data rate: DR9

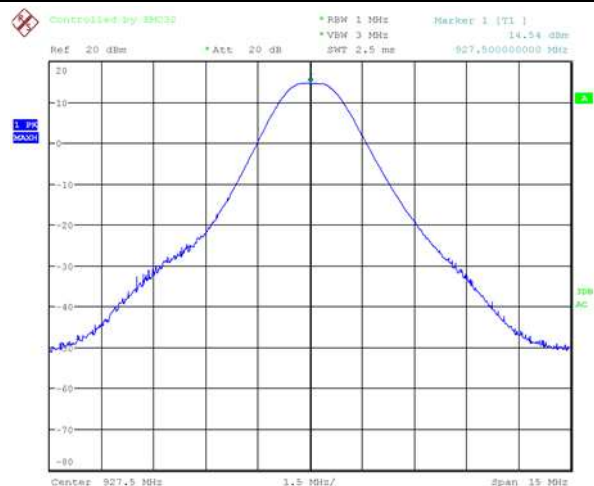

Data rate: DR8




6 dB Bandwidth	
Test date	08-09-2021
Applied Standard	Title 47 Part 15 Subpart C §15.247
Test method	According to Par. 8.2 of KDB 558074 D01 15.247 Meas. Guidance v05r02 (and par. 11.8.1 Option 2 of ANSI C63.10)
Temperature	22° C
Humidity	42%
Air pressure	1027 mbar
Tested by	Roberto Radice
Model	<b>MAMWLE-01</b>
Test sample No.:	N°1
Operating mode	1
Tested terminals	SMA antenna connector
Result	PASS
Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.	


Used test equipment					
Type	Manufacturer	Model	ID	Last calibration	Next calibration
EMI Receiver	Rohde&Schwarz	ESU40	2782345	10/2020	10/2021

## Graphical presentation of 6dB Bandwidth conducted measurement


## Channel low (923.3 MHz)

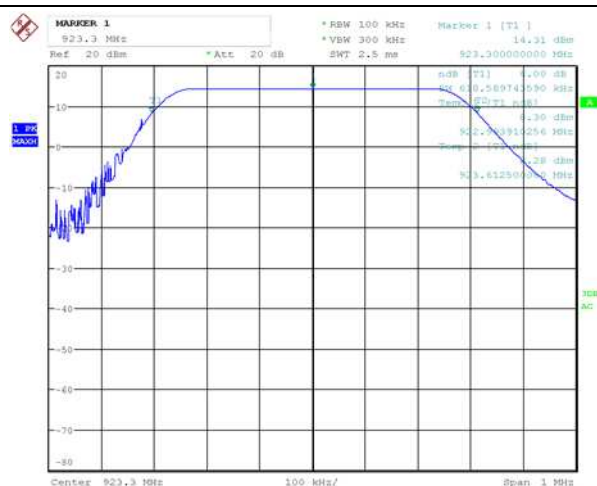


Data rate: DR13

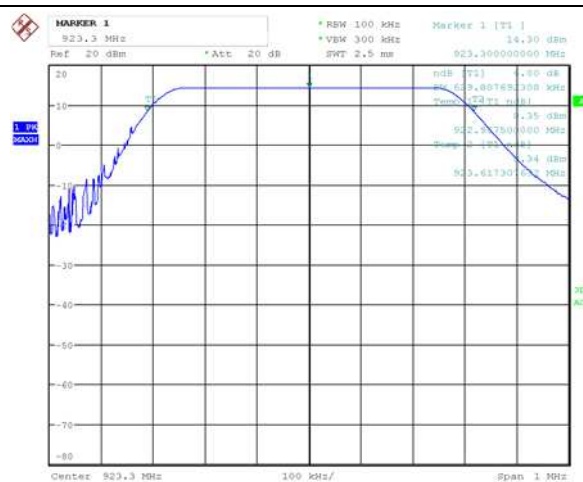

Data rate: DR12

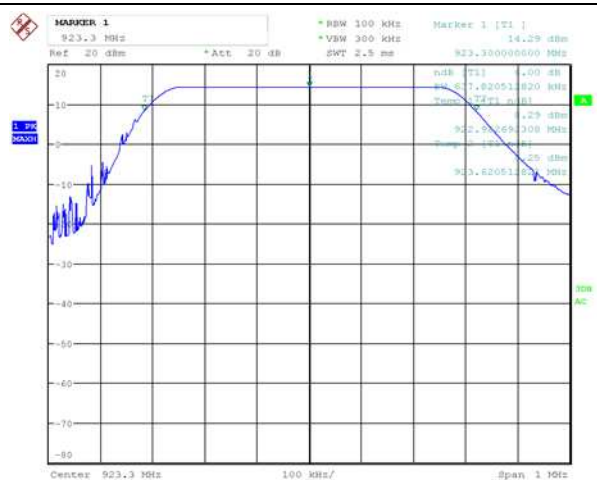


Data rate: DR11

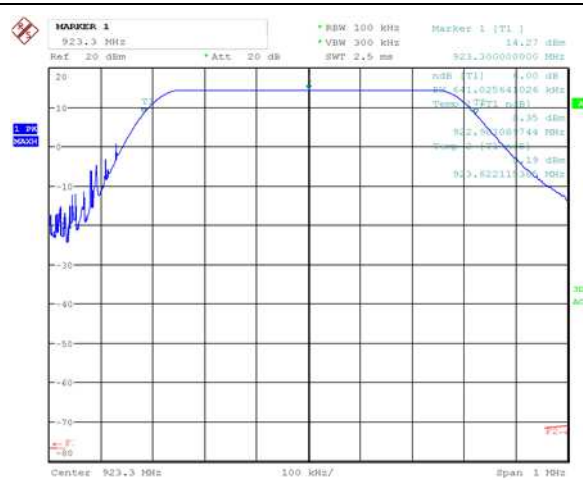


Data rate: DR10

## Graphical presentation of 6dB Bandwidth conducted measurement

Channel low (923.3 MHz)

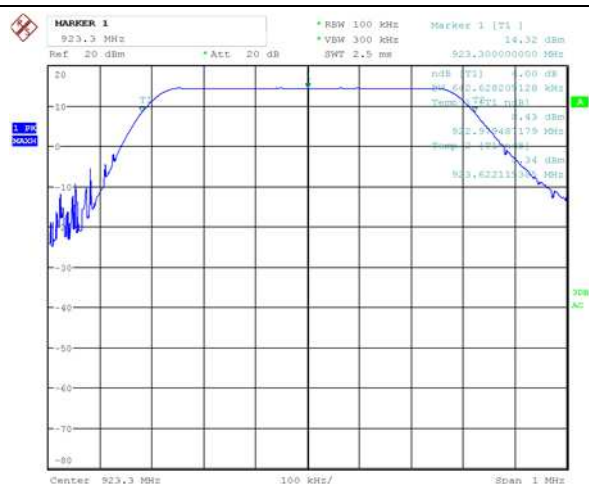

Data rate: DR9

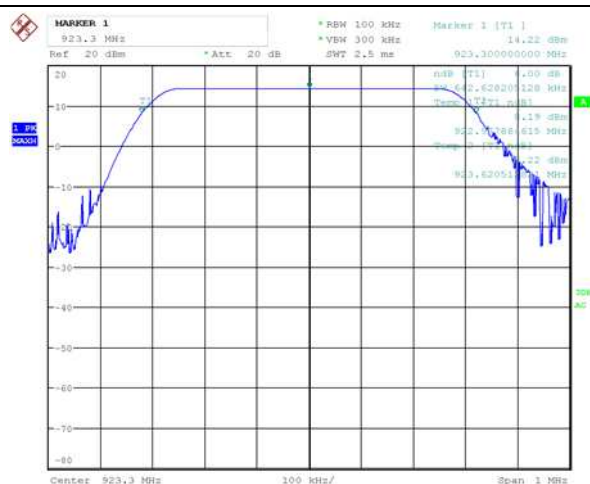

Data rate: DR8

## Measurement data of 6dB bandwidth

## Channel Low (923.3 MHz)


Channel (No.)	Frequency (MHz)	Data rate	Channel Bandwidth at -6dB (kHz)	Limit (kHz)
Low	923.3	DR13	618.589743	>500
		DR12	629.807692	
		DR11	637.820512	
		DR10	641.025641	
		DR9	642.628205	
		DR8	642.628205	

## Bandwidth at -6dB (Fmin and Fmax)

DR13	Fmin	922.993910 MHz	Fmax	923.612500 MHz
DR12		922.987500 MHz		923.617307 MHz
DR11		922.982692 MHz		923.620512 MHz
DR10		922.981089 MHz		923.622115 MHz
DR9		922.979487 MHz		923.622115 MHz
DR8		902.977884 MHz		923.620512 MHz

## Graphical presentation of 6dB Bandwidth conducted measurement

Channel middle (925.7 MHz)

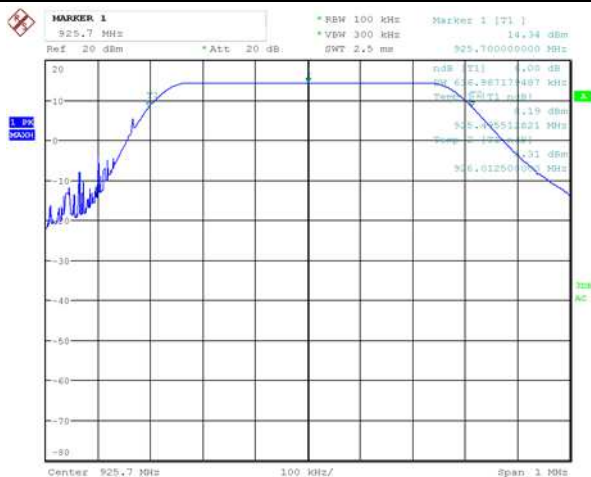


Data rate: DR13



Data rate: DR12




Data rate: DR11

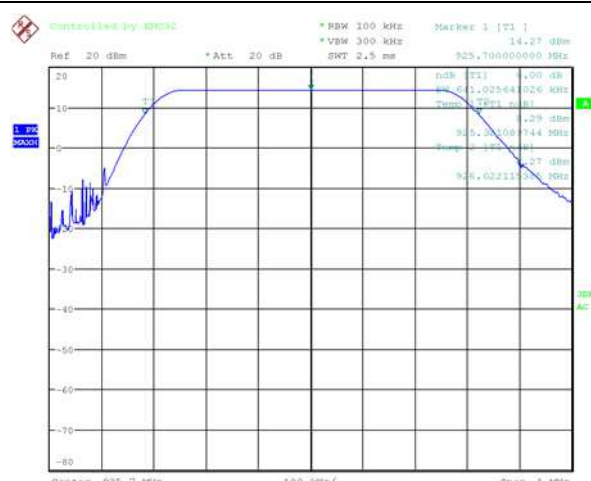


Data rate: DR10

## Graphical presentation of 6dB Bandwidth conducted measurement

Channel middle (925.7 MHz)

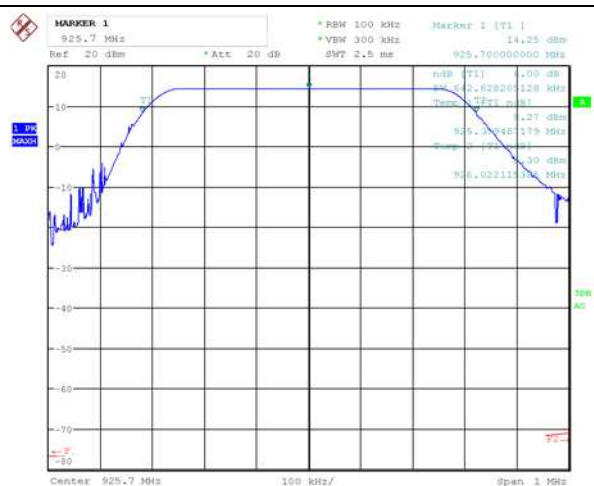

Data rate: DR9

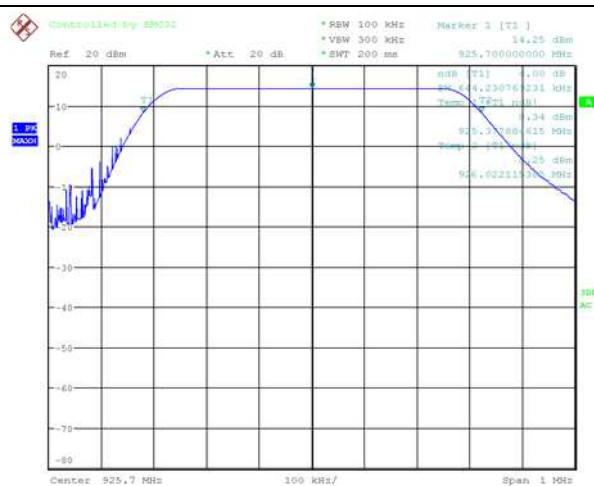

Data rate: DR8

## Measurement data of 6dB bandwidth

## Channel Middle (925.7 MHz)

Channel (No.)	Frequency (MHz)	Data rate	Channel Bandwidth at -6dB (kHz)	Limit (kHz)
Middle	925.7	DR13	616.987179	>500
		DR12	629.807692	
		DR11	634.615384	
		DR10	641.025641	
		DR9	642.628205	
		DR8	644.230769	

## Bandwidth at -6dB (Fmin and Fmax)

DR13	Fmin	925.495512 MHz	Fmax	926.012500 MHz
DR12		925.387500 MHz		926.017307 MHz
DR11		925.384294 MHz		926.018910 MHz
DR10		925.381089 MHz		926.022115 MHz
DR9		925.379487 MHz		926.022115 MHz
DR8		925.377884 MHz		926.022115 MHz

## Graphical presentation of 6dB Bandwidth conducted measurement


## Channel high (927.5 MHz)




Data rate: DR13



Data rate: DR12

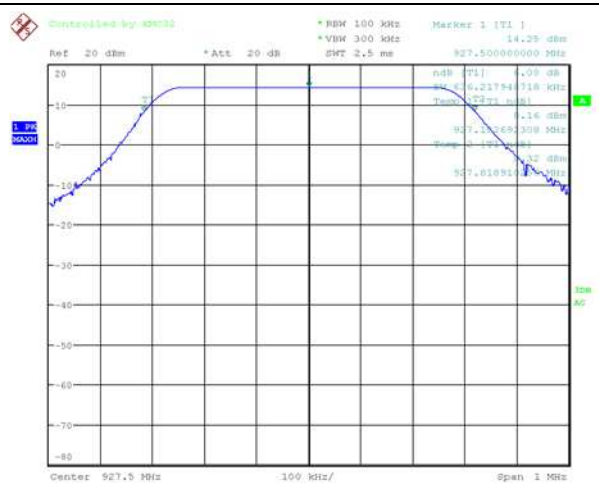

Data rate: DR11

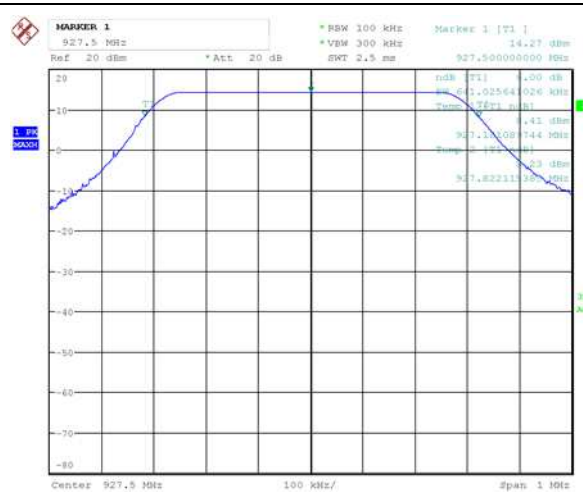


Data rate: DR10



## Graphical presentation of 6dB Bandwidth conducted measurement

Channel high (927.5 MHz)

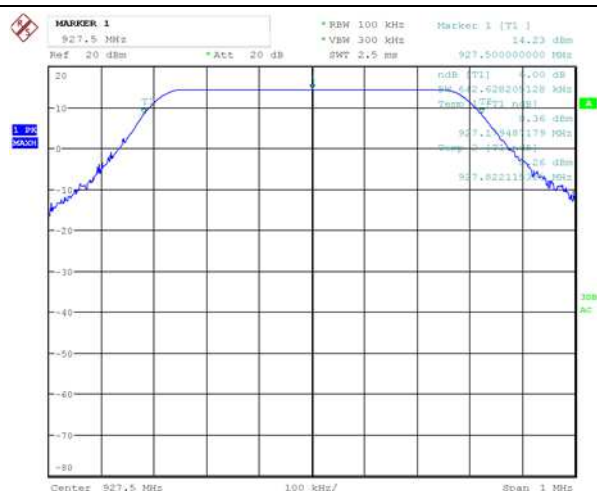

Data rate: DR9



Data rate: DR8

## Measurement data of 6dB bandwidth

## Channel High (927.5 MHz)

Channel (No.)	Frequency (MHz)	Data rate	Channel Bandwidth at -6dB (kHz)	Limit (kHz)
High	927.5	DR13	621.794871	>500
		DR12	629.807692	
		DR11	636.217948	
		DR10	641.025641	
		DR9	642.628205	
		DR8	644.230769	

## Bandwidth at -6dB (Fmin and Fmax)

DR13	Fmin	927.192307 MHz	Fmax	927.814102 MHz
DR12		927.187500 MHz		928.817307 MHz
DR11		927.182692 MHz		927.818910 MHz
DR10		927.181089 MHz		927.822115 MHz
DR9		927.179487 MHz		927.822115 MHz
DR8		927.177884 MHz		927.822115 MHz

Out-of-band emissions	
Test date	08-09-2021
Applied Standard	Title 47 Part 15 Subpart C §15.247
Test method	According to Par. 8.5 of KDB 558074 D01 15.247 Meas. Guidance v05r02 (and par. 11.11 of ANSI C63.10)
Temperature	22° C
Humidity	42%
Air pressure	1027 mbar
Tested by	Roberto Radice
Model	<b>MAMWLE-01</b>
Test sample No.:	N°1
Operating mode	1
Tested terminals	SMA antenna connector
Result	PASS
<p>(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>	

Used test equipment					
Type	Manufacturer	Model	ID	Last calibration	Next calibration
EMI Receiver	Rohde&Schwarz	ESU40	2782345	10/2020	10/2021


## Graphical presentation of spurious emission

Operation mode: 1


Channel low (923.3MHz)

Data Rate: DR13


Fundamental

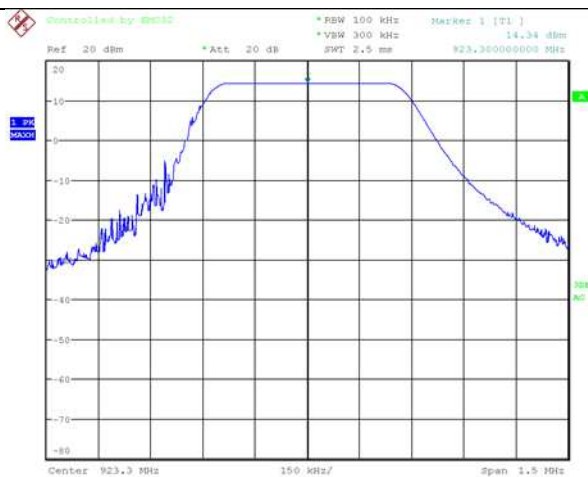


30MHz-1GHz

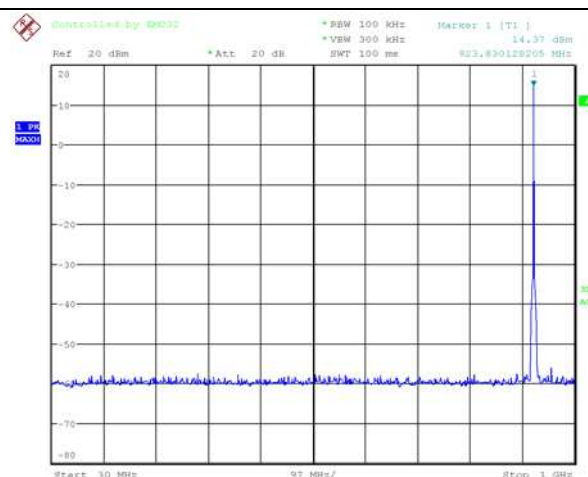


1-2.5GHz

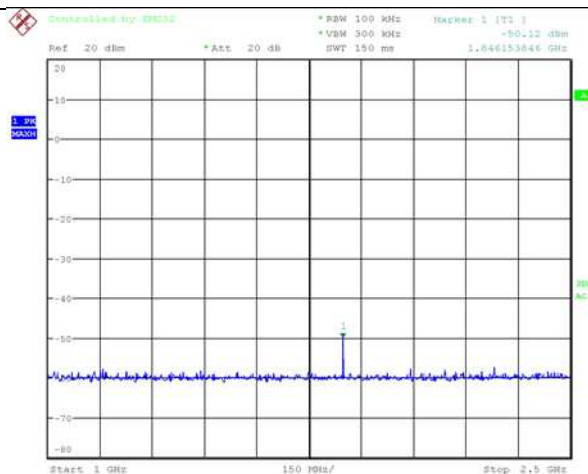

2.5-5GHz

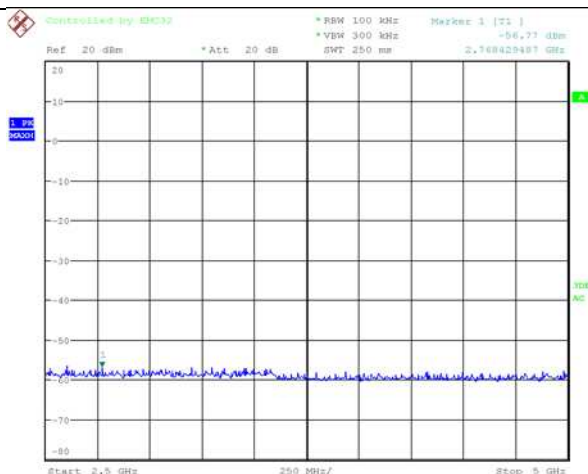

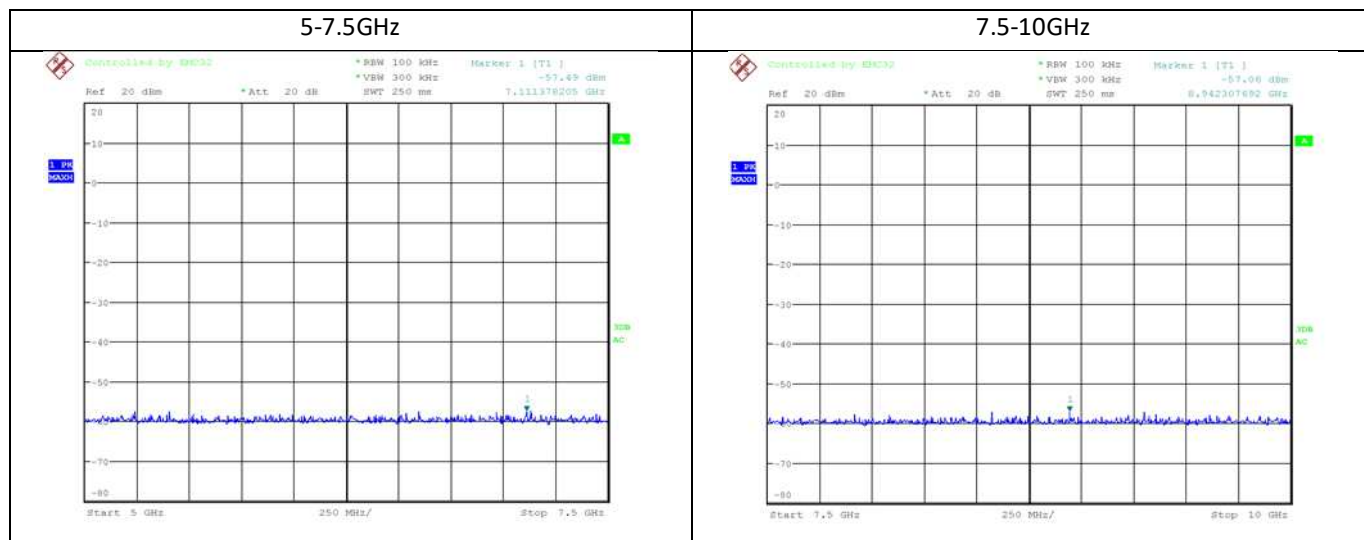

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1846.153</b>	<b>-50.12</b>	<b>14.34</b>	<b>64.46</b>	<b>-5.66</b>	<b>44.46</b>
<b>2768.429</b>	<b>-56.77</b>		<b>71.11</b>		<b>51.11</b>


## Graphical presentation of spurious emission

Operation mode: 1


Channel low (923.3MHz)

Data Rate: DR12


Fundamental

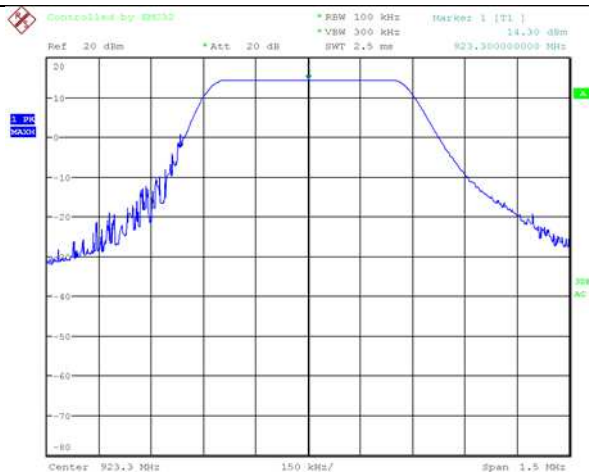


30MHz-1GHz

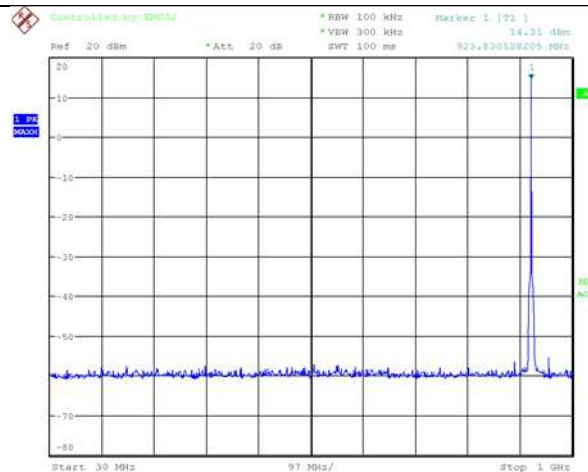


1-2.5GHz

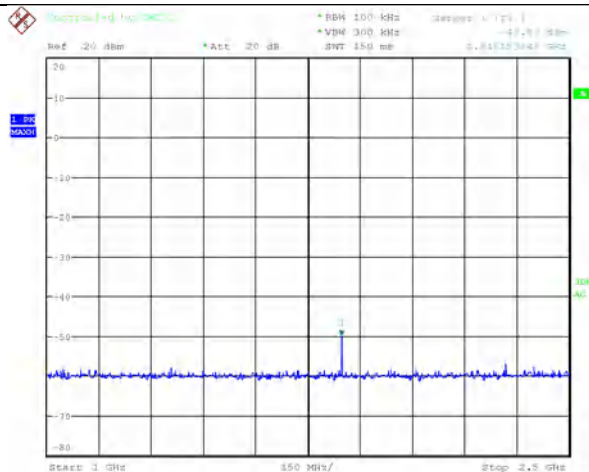

2.5-5GHz

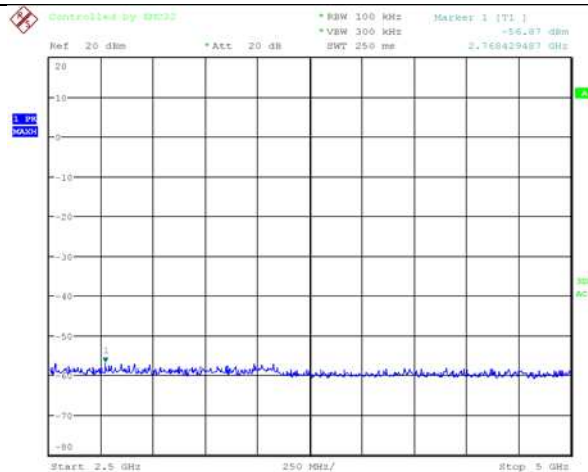

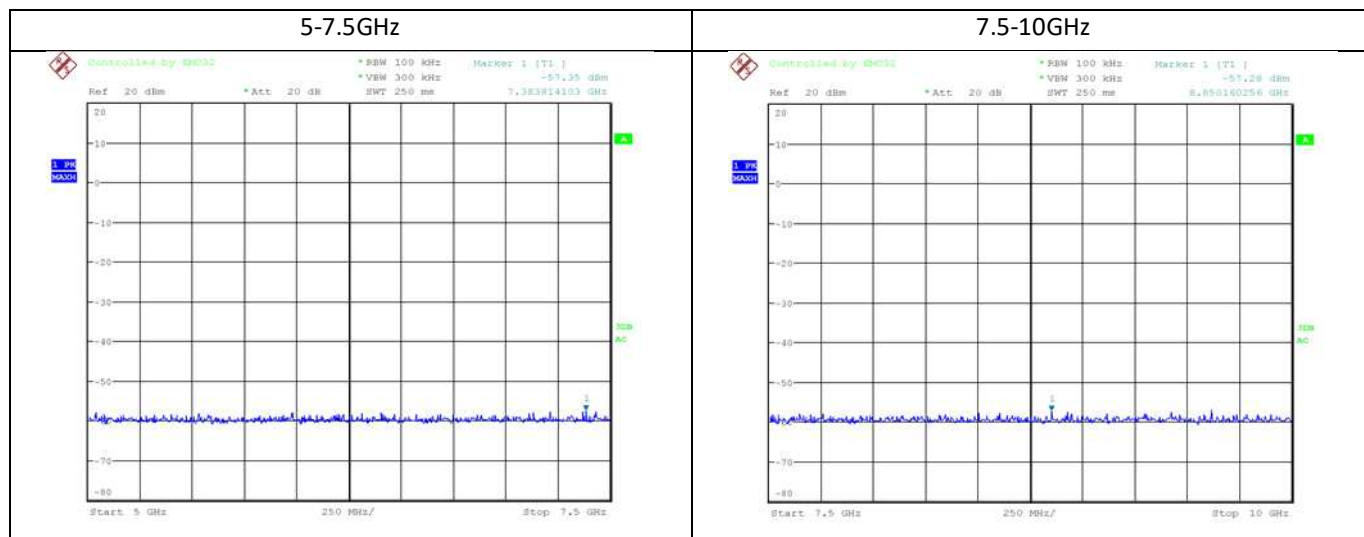

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1846.153</b>	<b>-49.83</b>	<b>14.30</b>	<b>64.13</b>	<b>-5.70</b>	<b>44.13</b>
<b>2768.429</b>	<b>-56.87</b>		<b>71.17</b>		<b>51.17</b>


## Graphical presentation of spurious emission

Operation mode: 1


Channel low (923.3MHz)

Data Rate: DR11


Fundamental

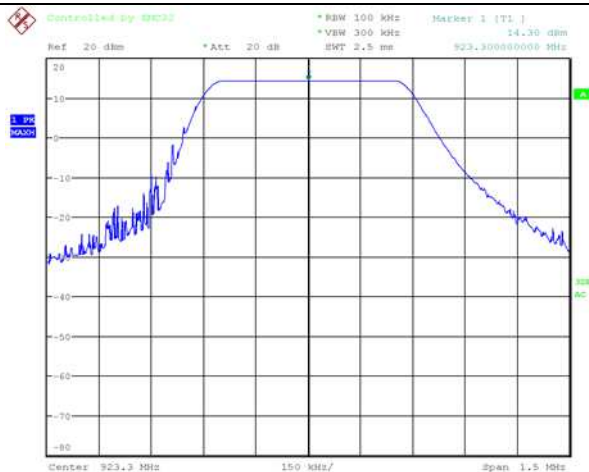


30MHz-1GHz

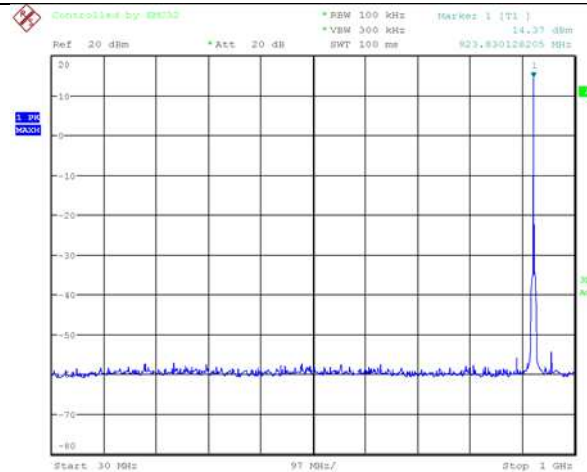


1-2.5GHz

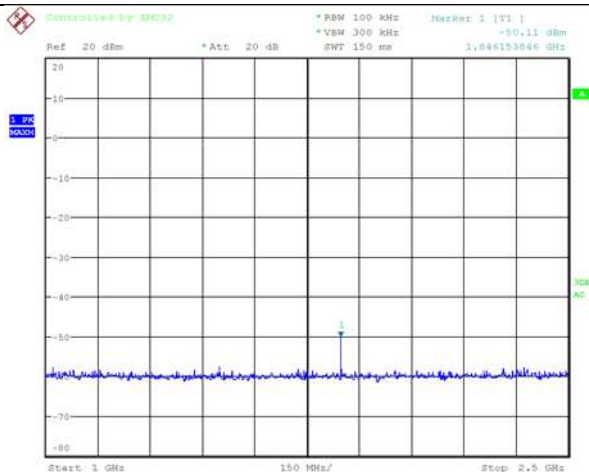

2.5-5GHz

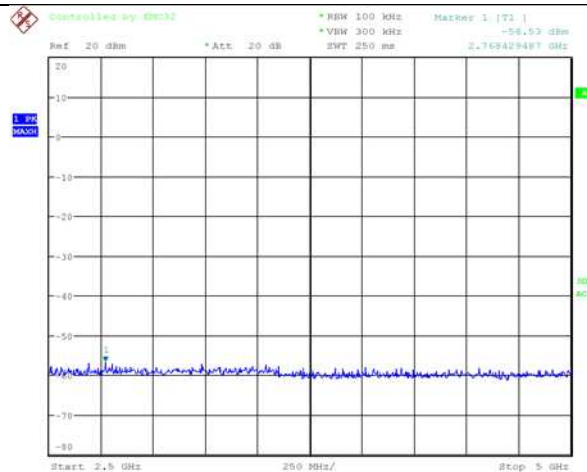



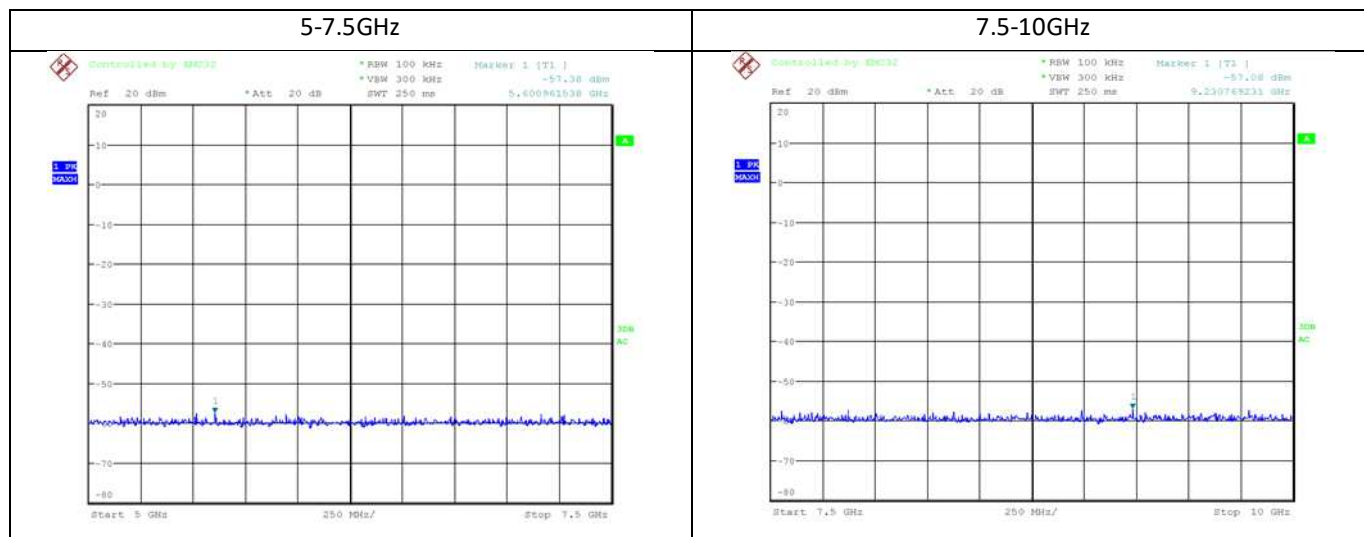

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1846.153</b>	<b>-50.11</b>	<b>14.30</b>	<b>64.41</b>	<b>-5.70</b>	<b>44.41</b>
<b>2768.429</b>	<b>-56.53</b>		<b>70.83</b>		<b>50.83</b>


## Graphical presentation of spurious emission

Operation mode: 1


Channel low (923.3MHz)

Data Rate: DR10


Fundamental

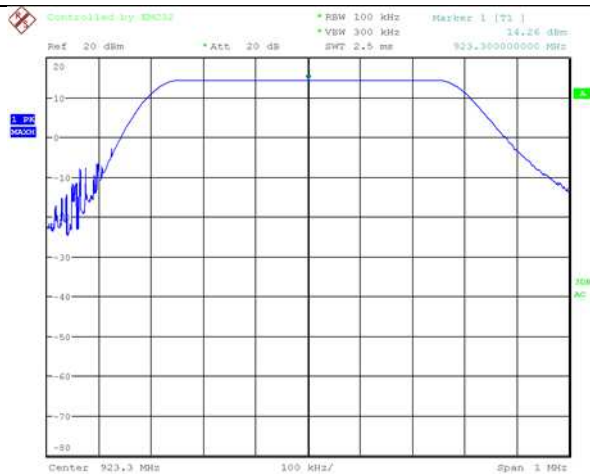


30MHz-1GHz

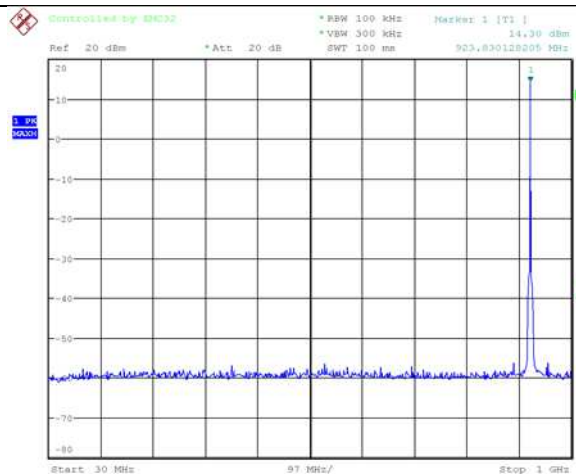


1-2.5GHz

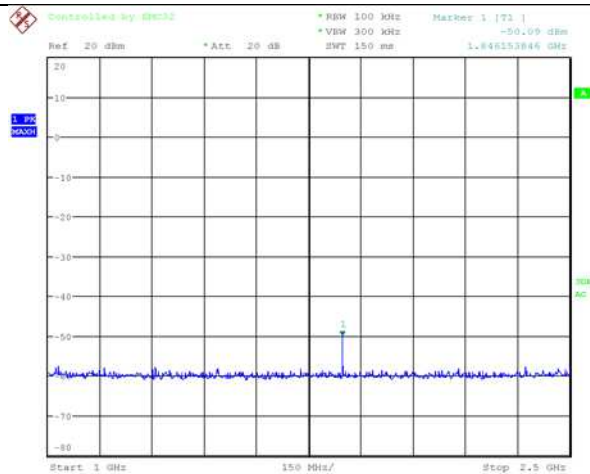

2.5-5GHz

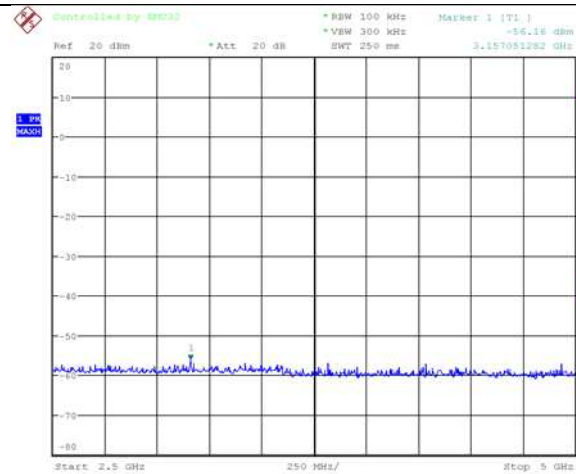

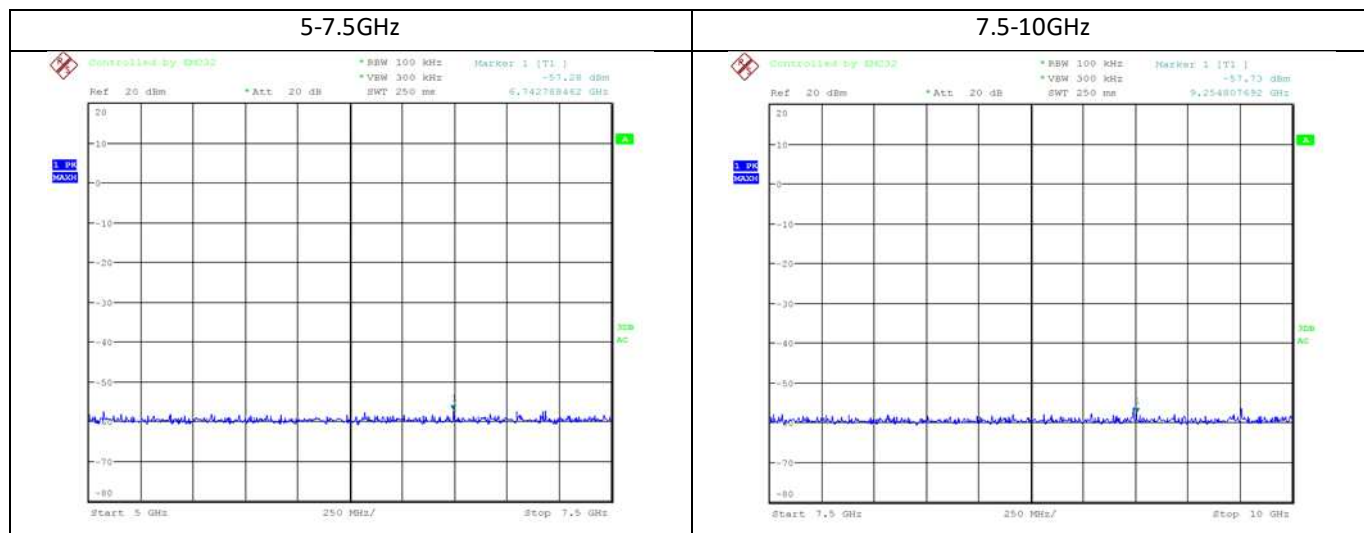


Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1846.153</b>	<b>-50.09</b>	<b>14.26</b>	<b>64.35</b>	<b>-5.74</b>	<b>44.35</b>
<b>3157.051</b>	<b>-56.16</b>		<b>70.42</b>		<b>50.42</b>


## Graphical presentation of spurious emission

Operation mode: 1

Channel low (923.3MHz)

Data Rate: DR9

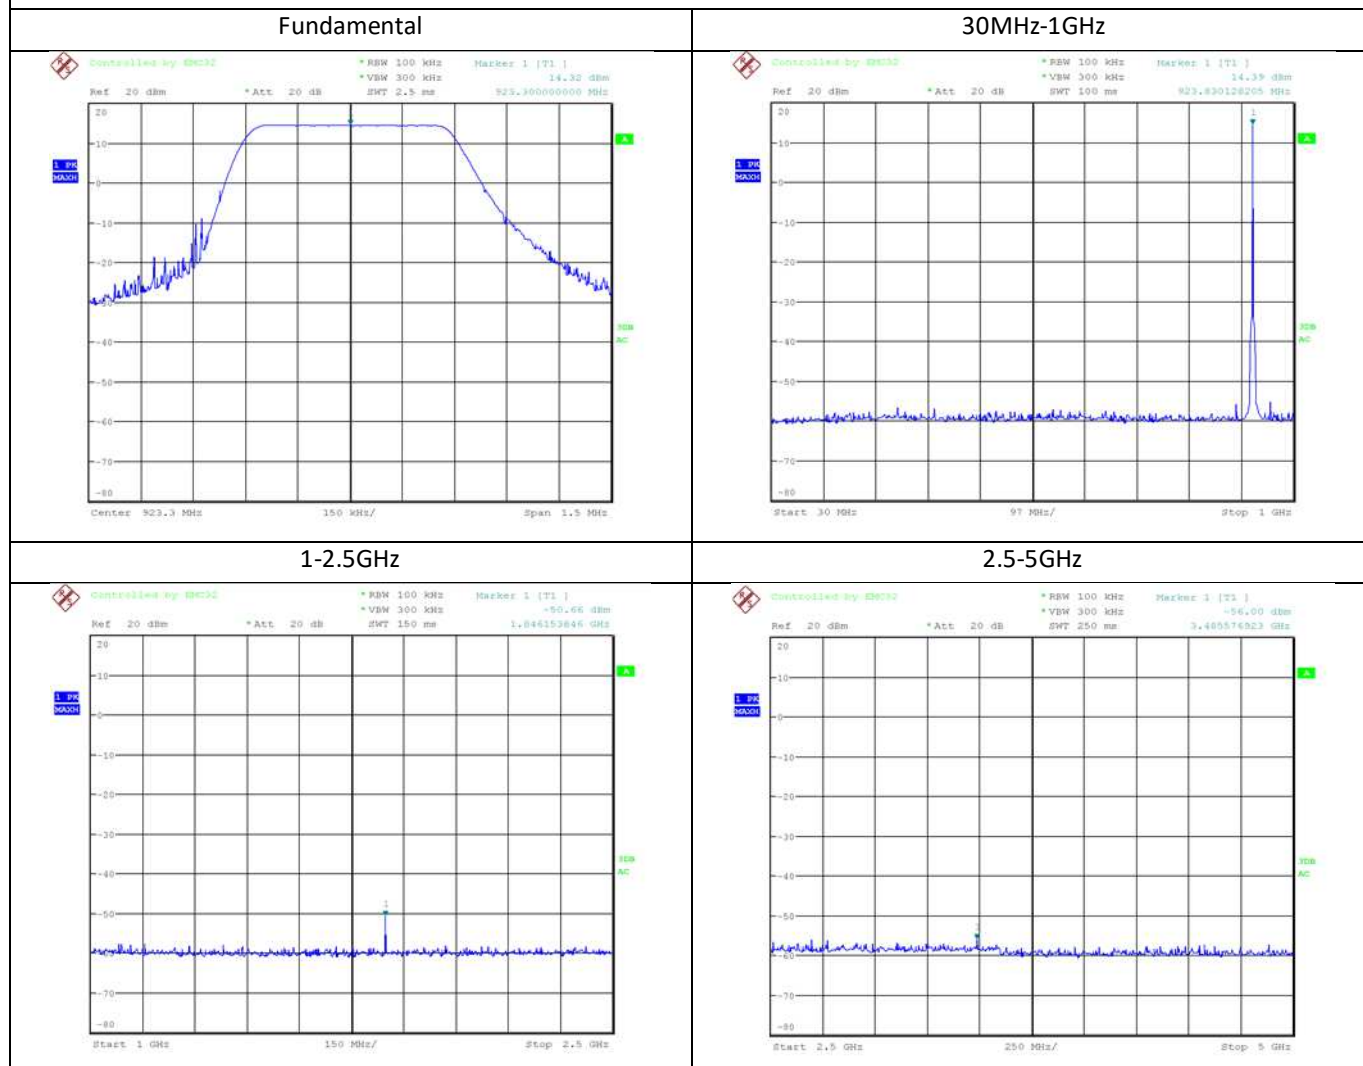

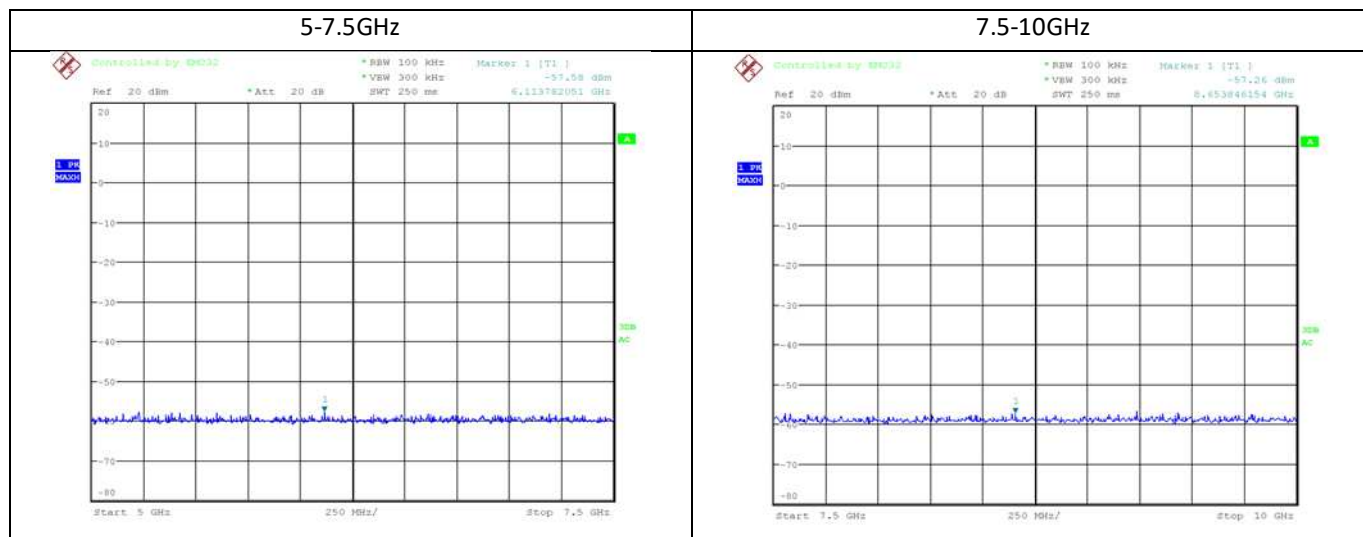

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1846.153</b>	<b>-50.66</b>	<b>14.32</b>	<b>64.98</b>	<b>-5.68</b>	<b>44.98</b>
<b>3485.576</b>	<b>-56.00</b>		<b>70.32</b>		<b>50.32</b>

## Graphical presentation of spurious emission

Operation mode: 1


Channel low (923.3MHz)

Data Rate: DR8


Fundamental




30MHz-1GHz

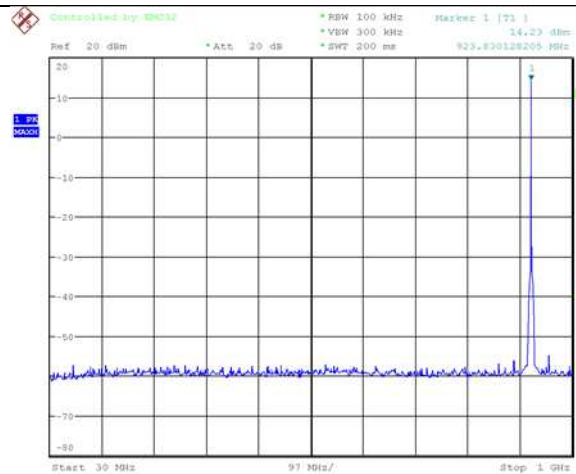


1-2.5GHz

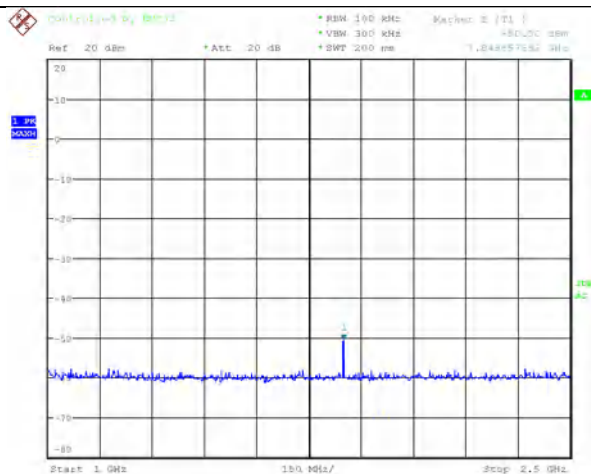

2.5-5GHz

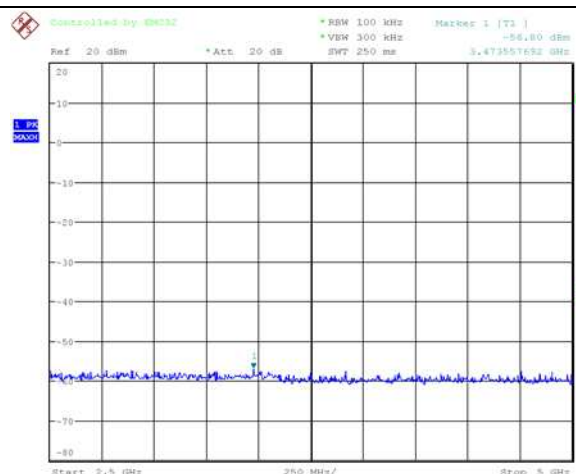

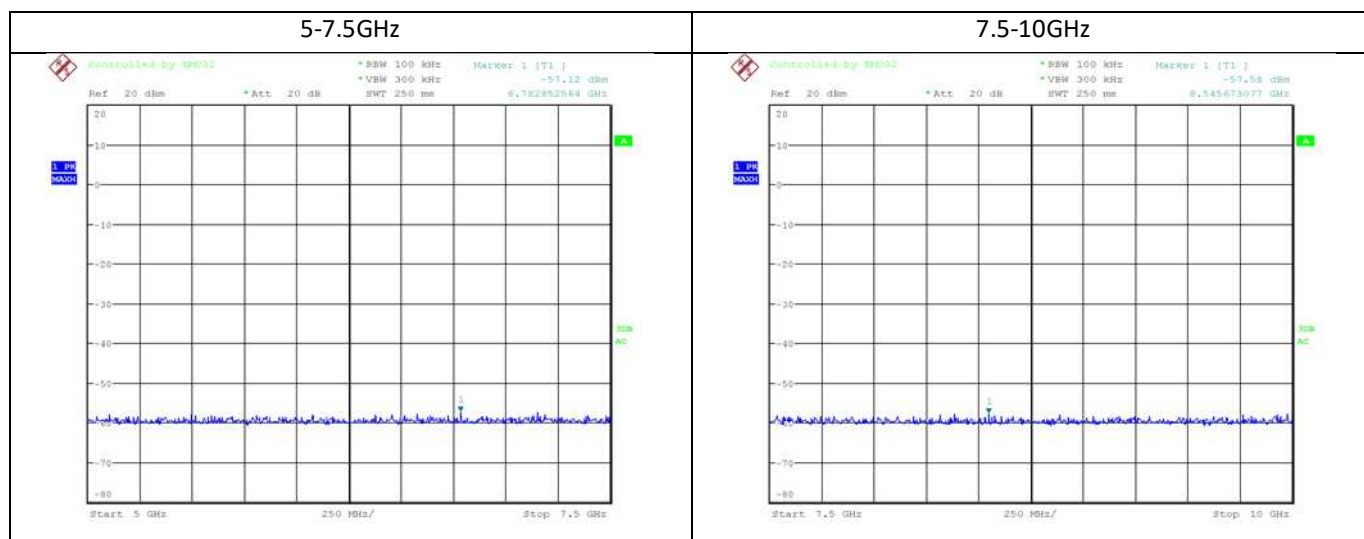

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1848.557</b>	<b>-50.50</b>	<b>14.22</b>	<b>64.72</b>	<b>-5.78</b>	<b>44.72</b>
<b>3473.557</b>	<b>-56.80</b>		<b>71.02</b>		<b>51.02</b>




## Graphical presentation of spurious emission

Operation mode: 1


Channel middle (925.7MHz)

Data Rate: DR13


Fundamental

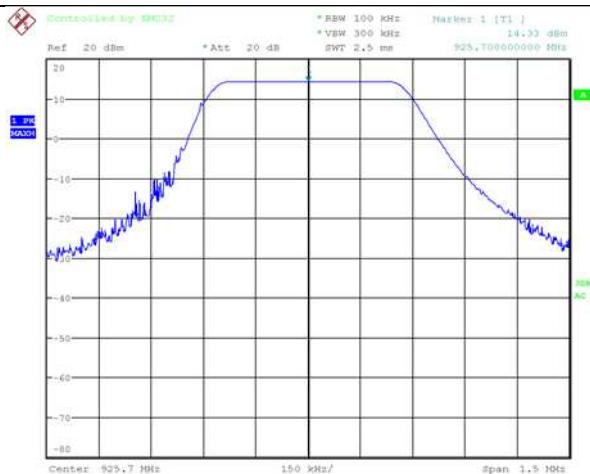


30MHz-1GHz

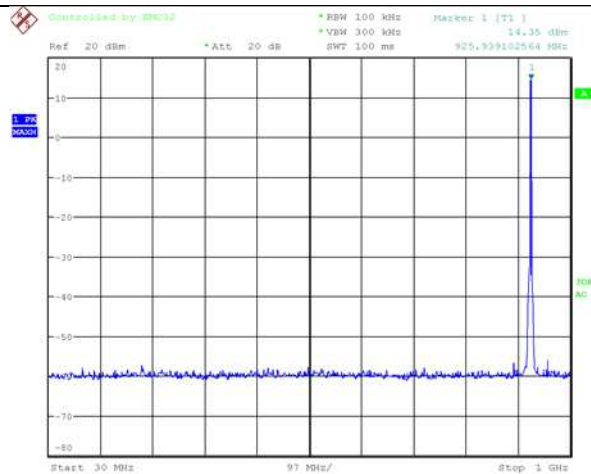


1-2.5GHz

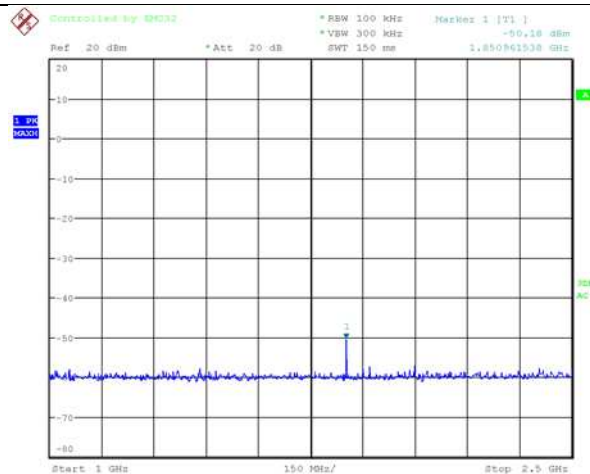


2.5-5GHz

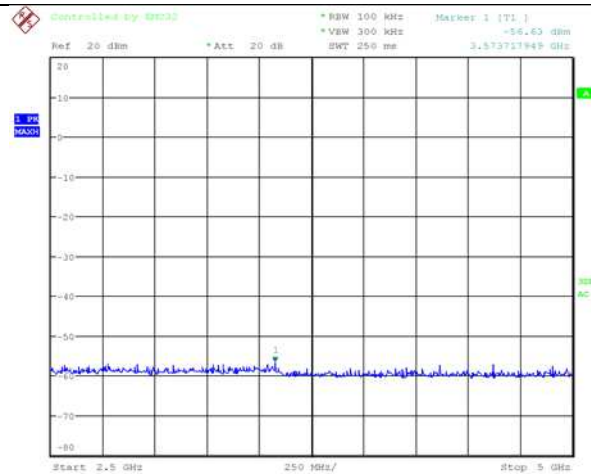




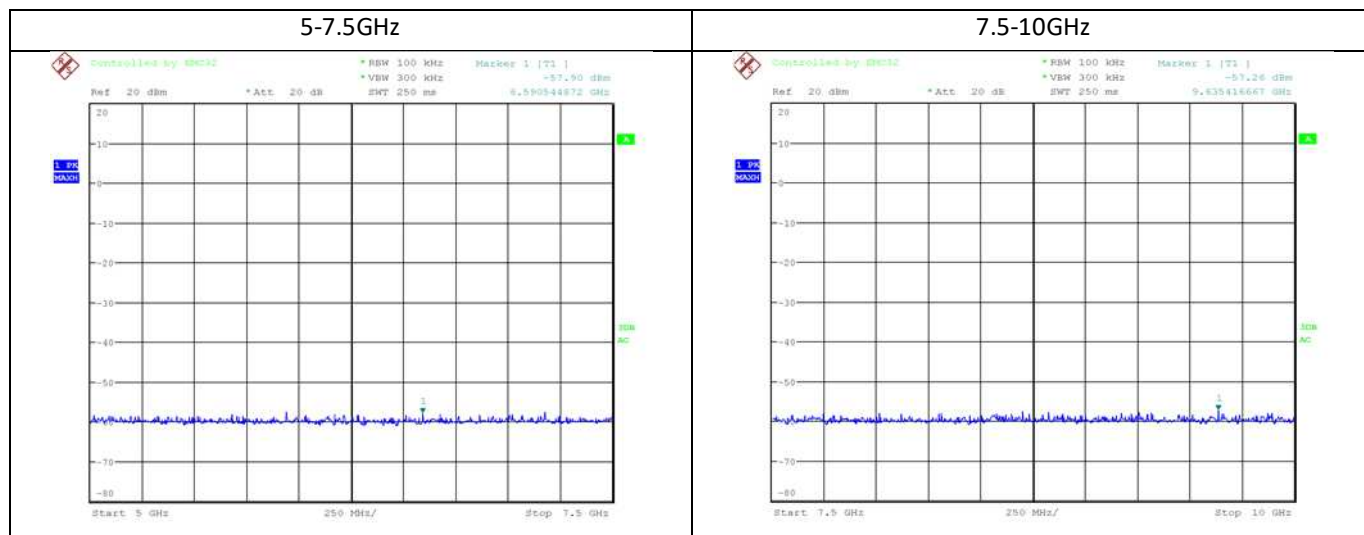

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1850.961</b>	<b>-50.18</b>	<b>14.33</b>	<b>64.51</b>	<b>-5.67</b>	<b>44.51</b>
<b>3573.718</b>	<b>-56.63</b>		<b>70.96</b>		<b>50.96</b>

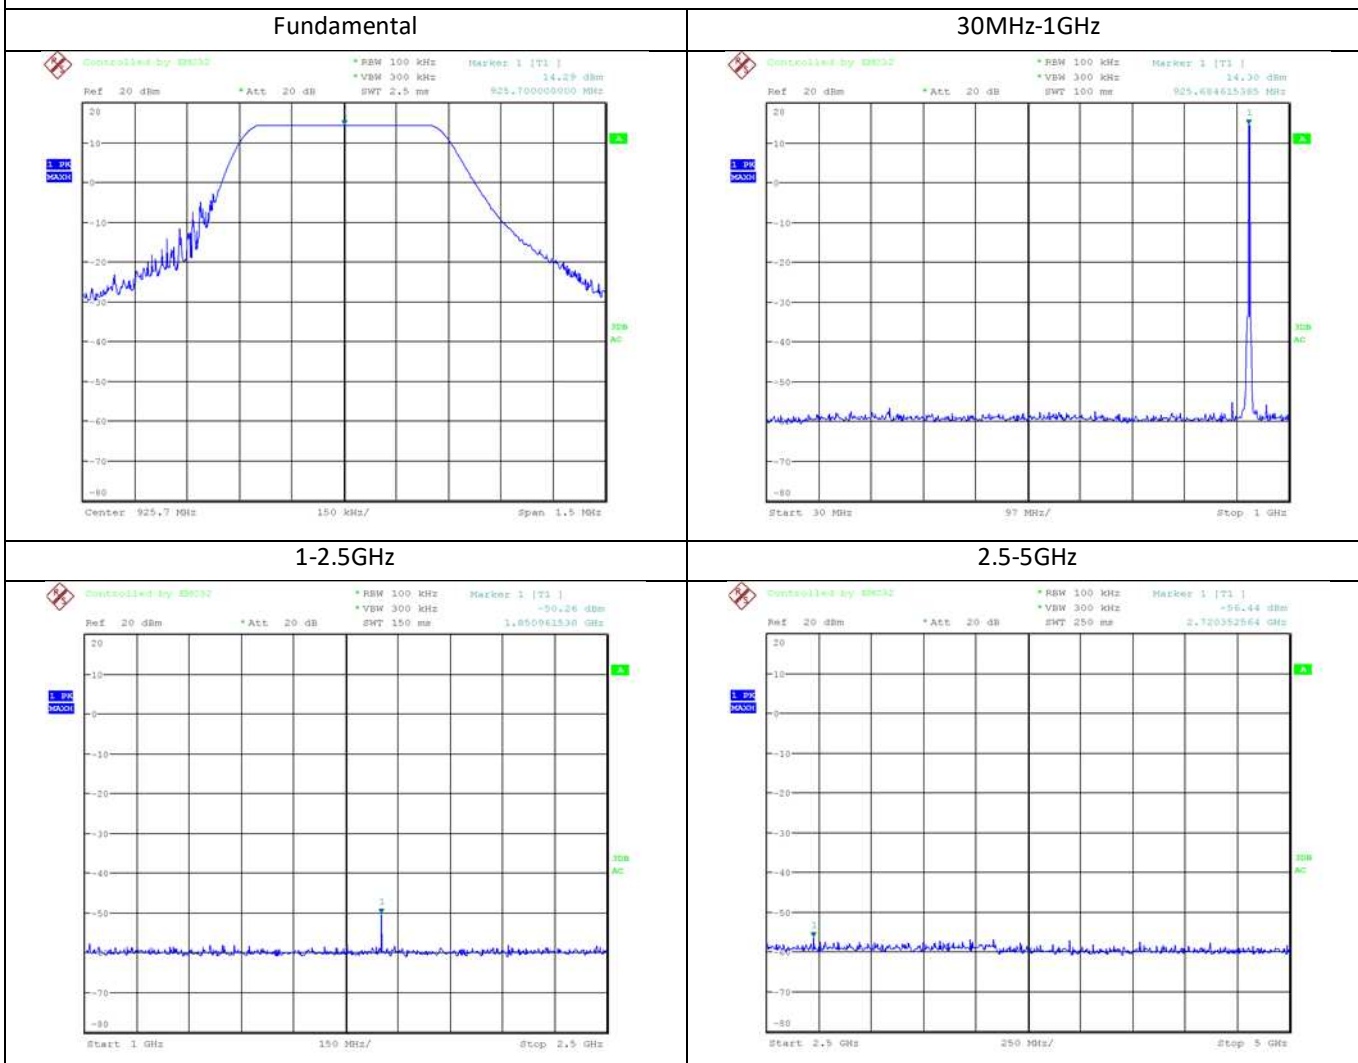

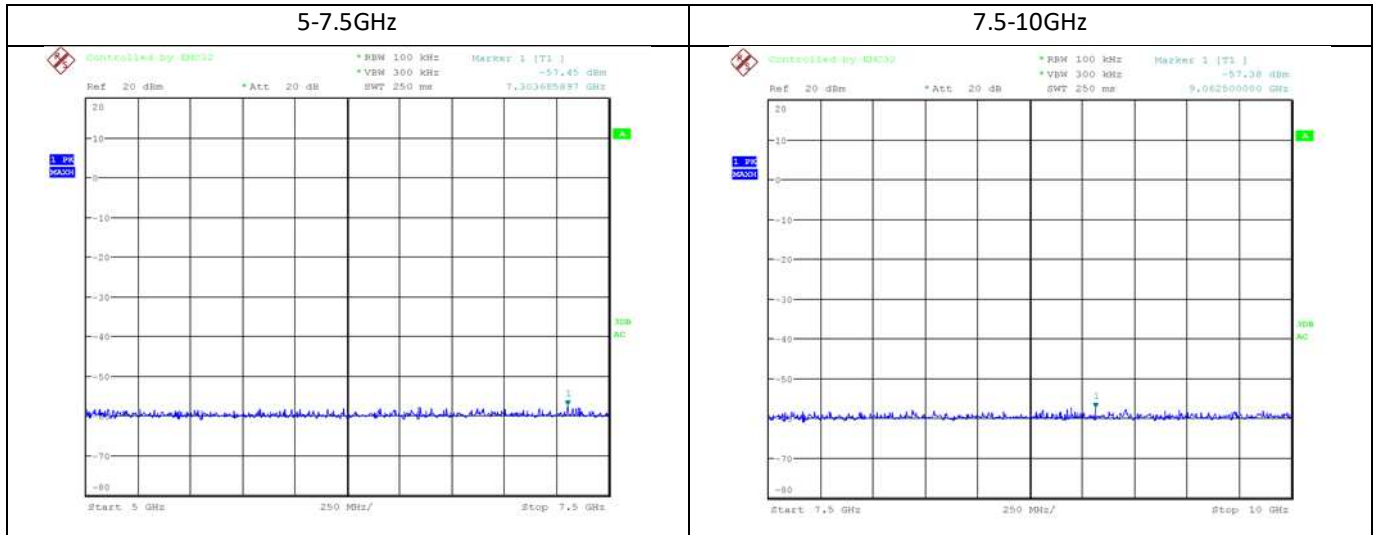

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1850.961</b>	<b>-50.26</b>	<b>14.29</b>	<b>64.55</b>	<b>-5.71</b>	<b>44.55</b>
<b>2720.352</b>	<b>-56.44</b>		<b>70.73</b>		<b>50.73</b>


## Graphical presentation of spurious emission

Operation mode: 1


Channel middle (925.7MHz)

Data Rate: DR11


Fundamental

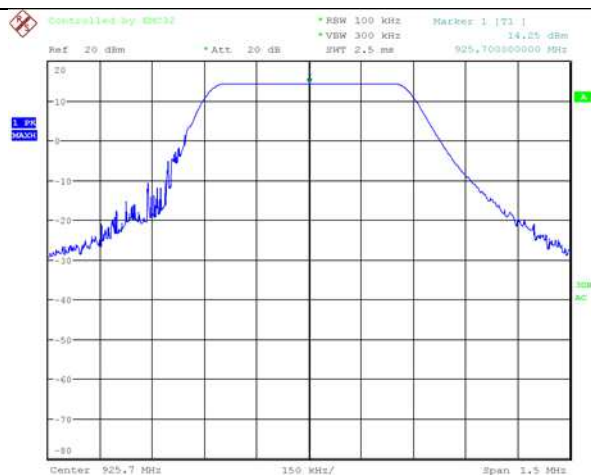


30MHz-1GHz

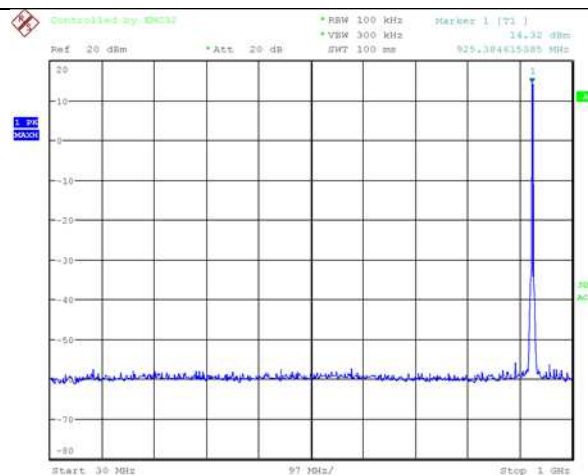


1-2.5GHz

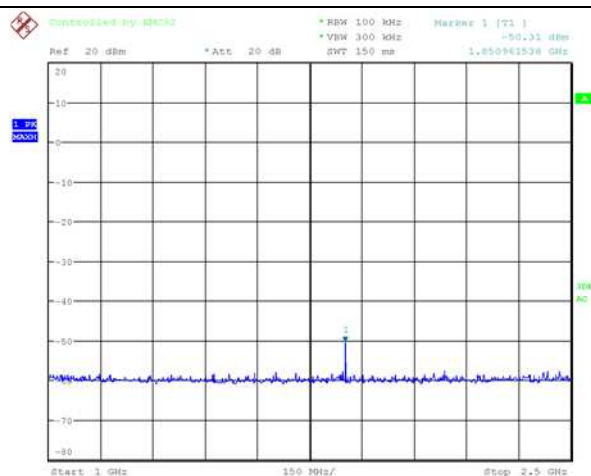

2.5-5GHz

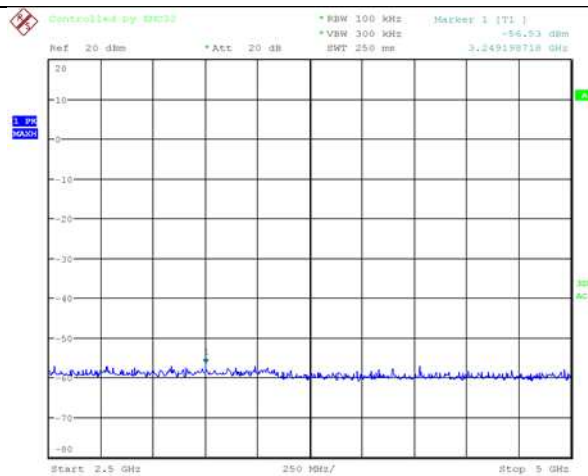

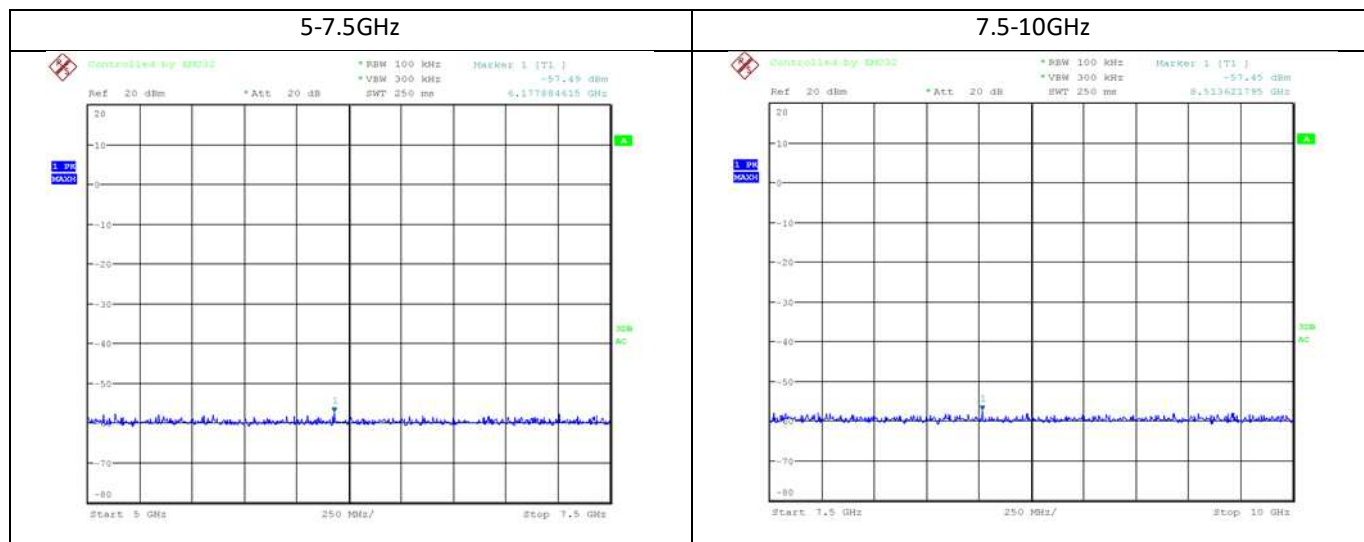

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
1850.961	-50.31	14.25	64.56	-5.75	44.56
3249.198	-56.56		70.81		50.81


## Graphical presentation of spurious emission

Operation mode: 1


Channel middle (925.7MHz)

Data Rate: DR10


Fundamental

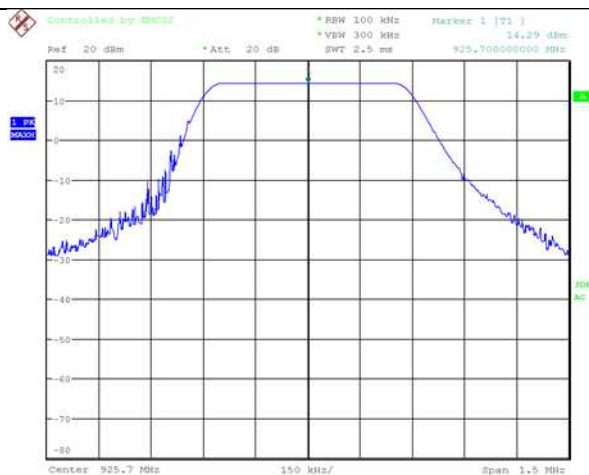


30MHz-1GHz

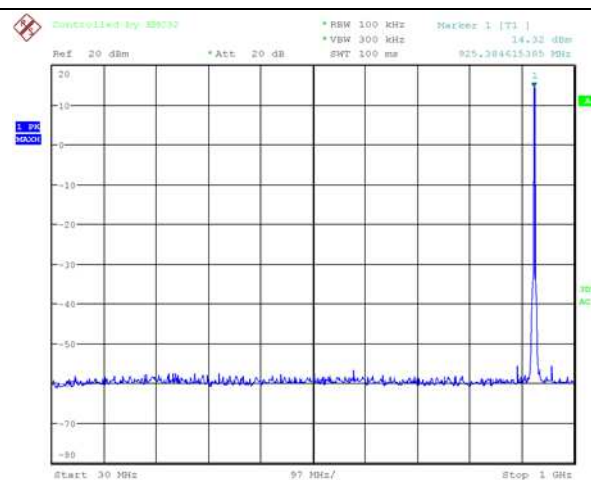


1-2.5GHz

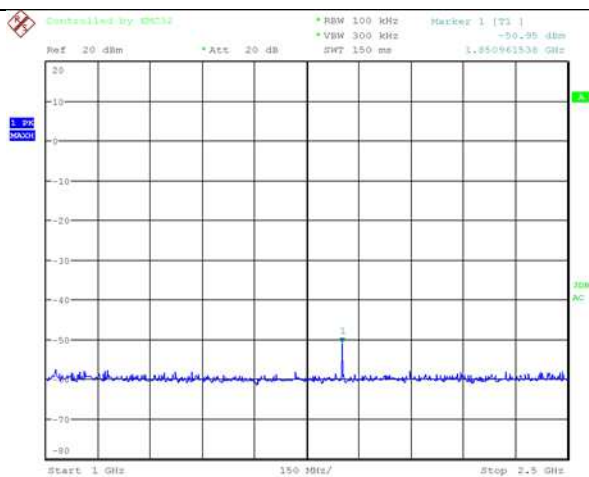

2.5-5GHz

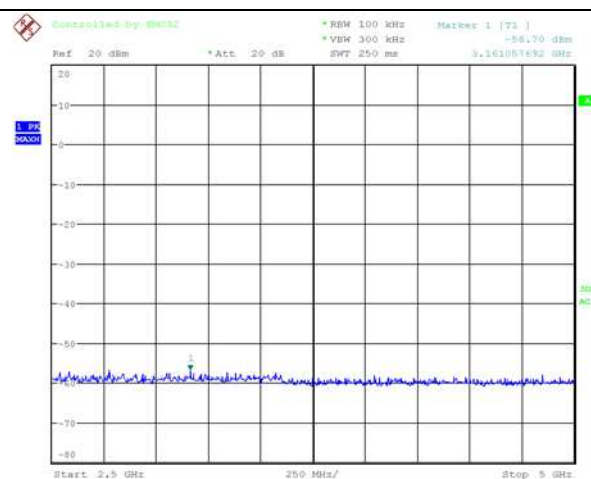

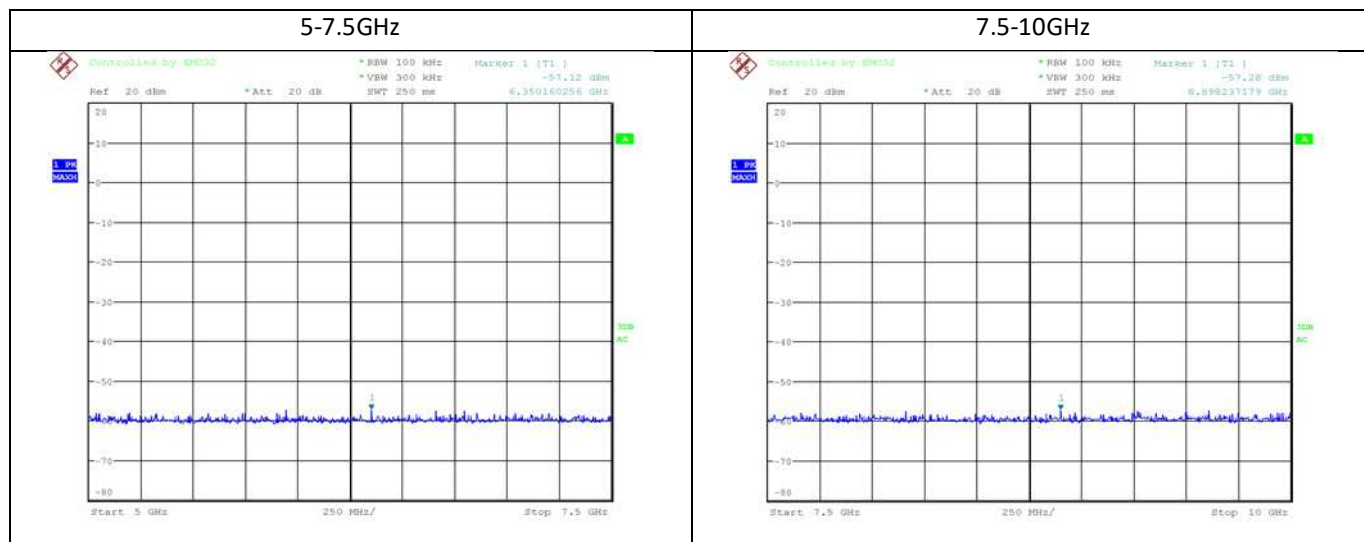

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
1850.961	-50.95	14.29	65.24	-5.71	45.24
3161.057	-56.70		70.99		50.99




## Graphical presentation of spurious emission

Operation mode: 1


Channel middle (925.7MHz)

Data Rate: DR9


Fundamental

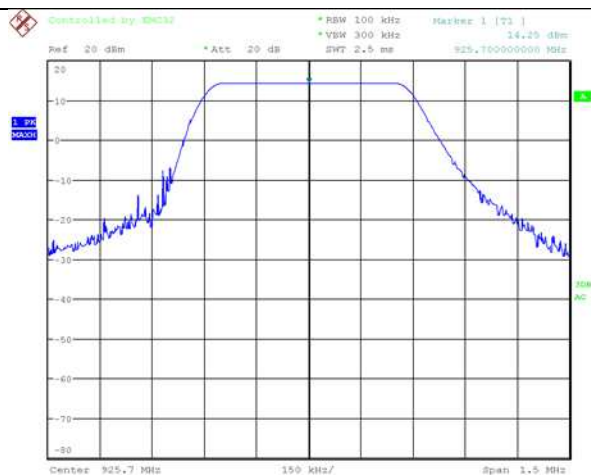


30MHz-1GHz

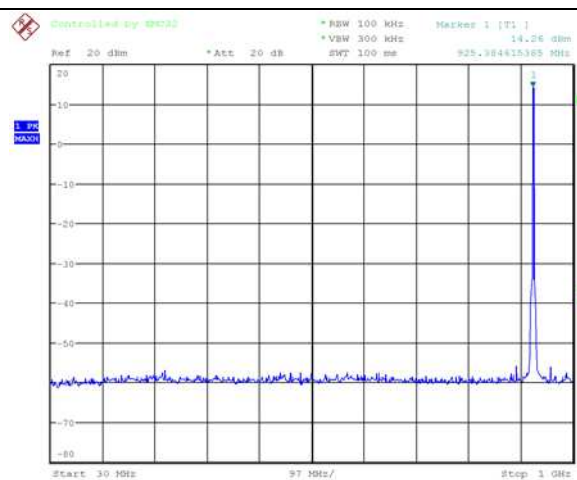


1-2.5GHz

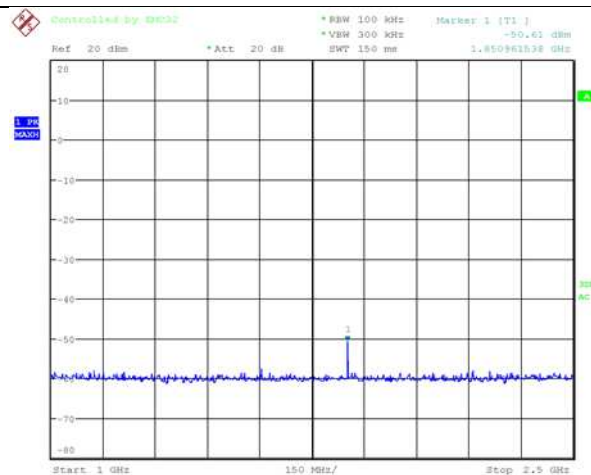

2.5-5GHz

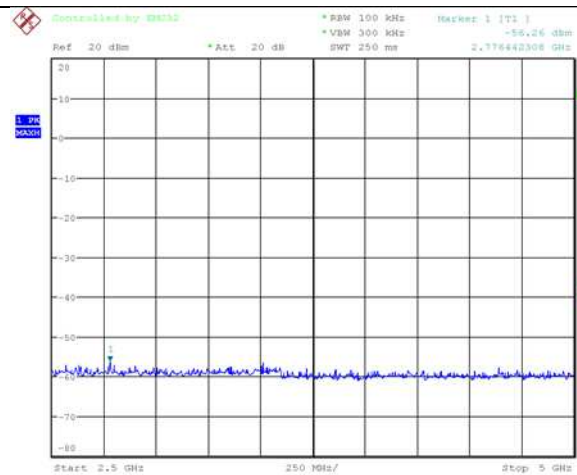



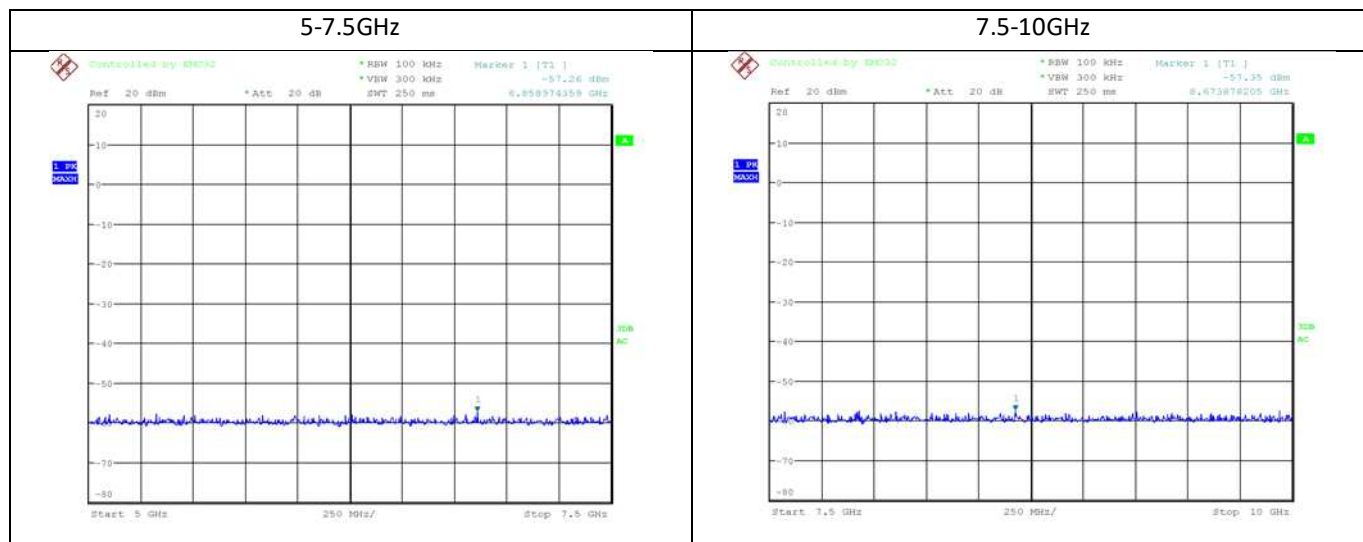

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1850.961</b>	<b>-50.61</b>	<b>14.25</b>	<b>65.86</b>	<b>-5.75</b>	<b>45.86</b>
<b>2776.442</b>	<b>-56.26</b>		<b>70.51</b>		<b>50.51</b>


## Graphical presentation of spurious emission

Operation mode: 1


Channel middle (925.7MHz)

Data Rate: DR8


Fundamental

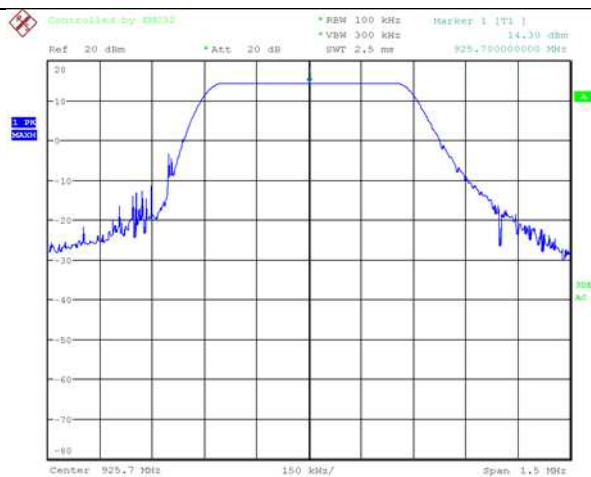


30MHz-1GHz

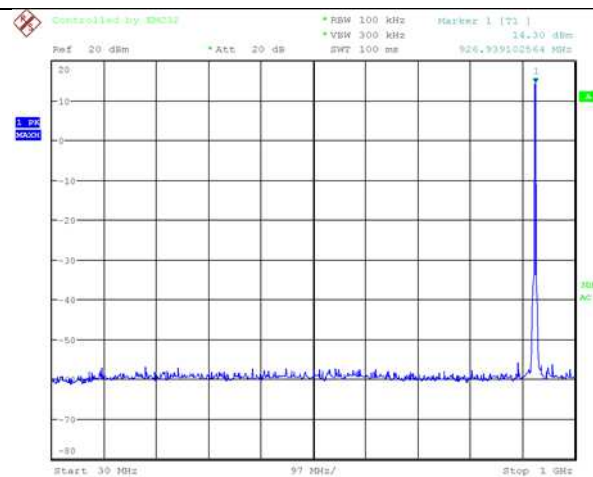


1-2.5GHz

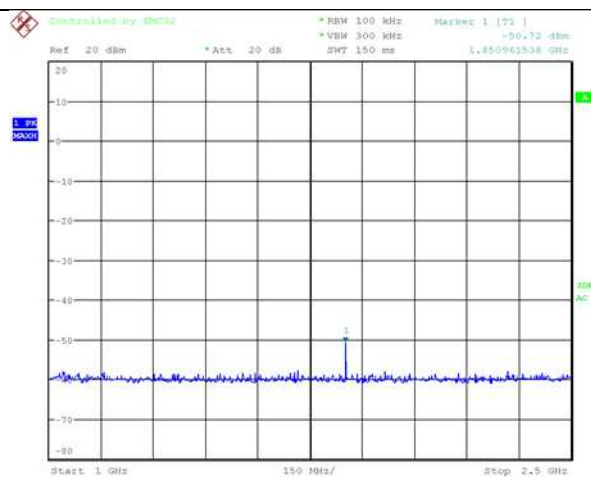

2.5-5GHz

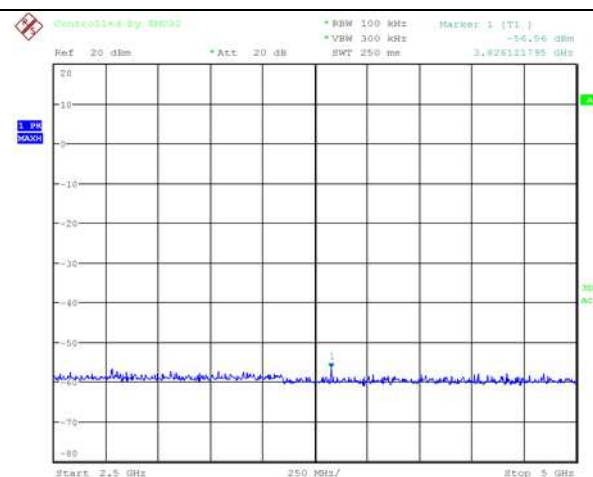

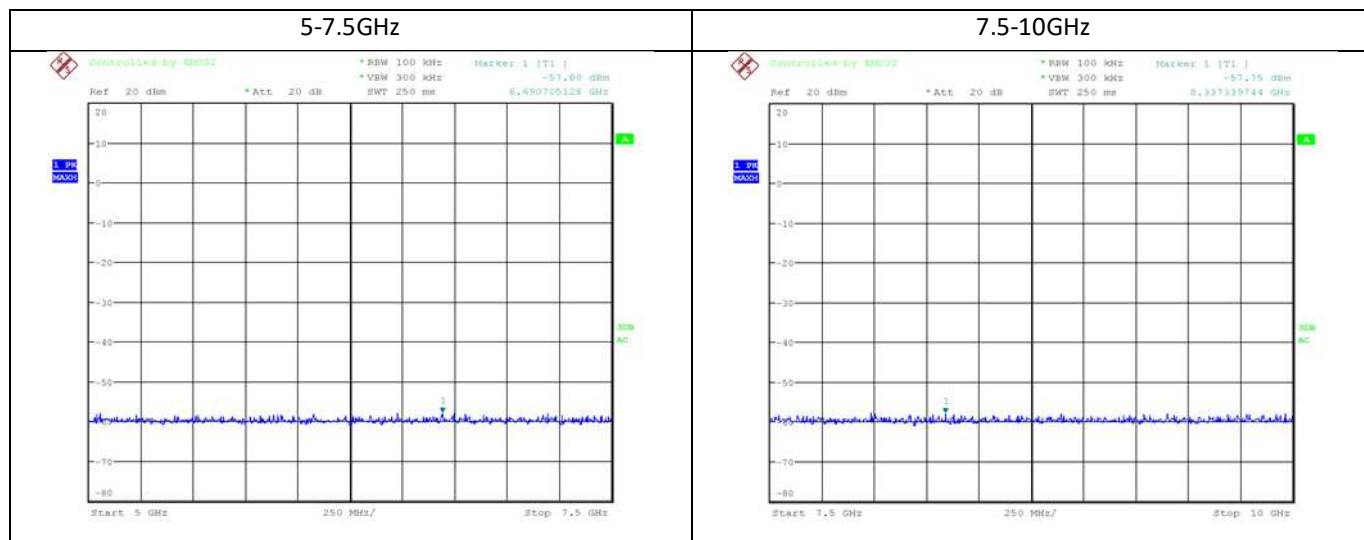

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1850.961</b>	<b>-50.72</b>	<b>14.30</b>	<b>65.02</b>	<b>-5.70</b>	<b>45.02</b>
<b>3826.121</b>	<b>-56.56</b>		<b>70.86</b>		<b>50.86</b>

## Graphical presentation of spurious emission

Operation mode: 1


Channel high (927.5MHz)

Data Rate: DR13


Fundamental




30MHz-1GHz

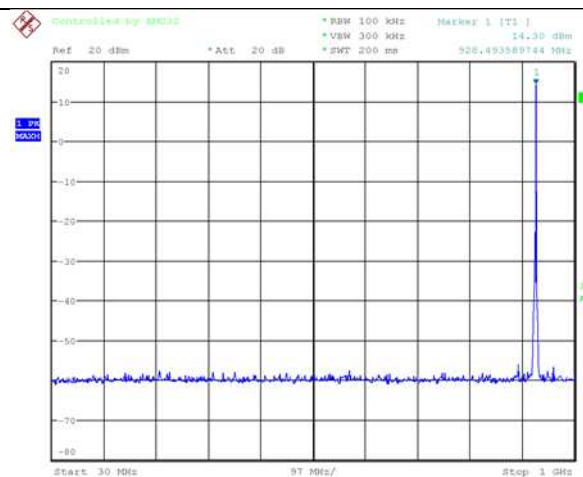


1-2.5GHz

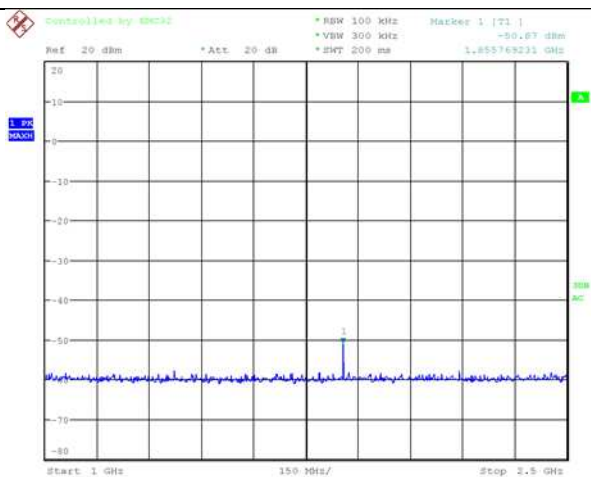

2.5-5GHz

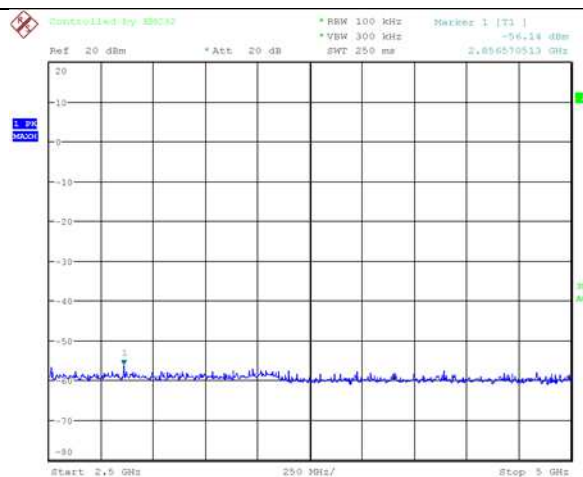

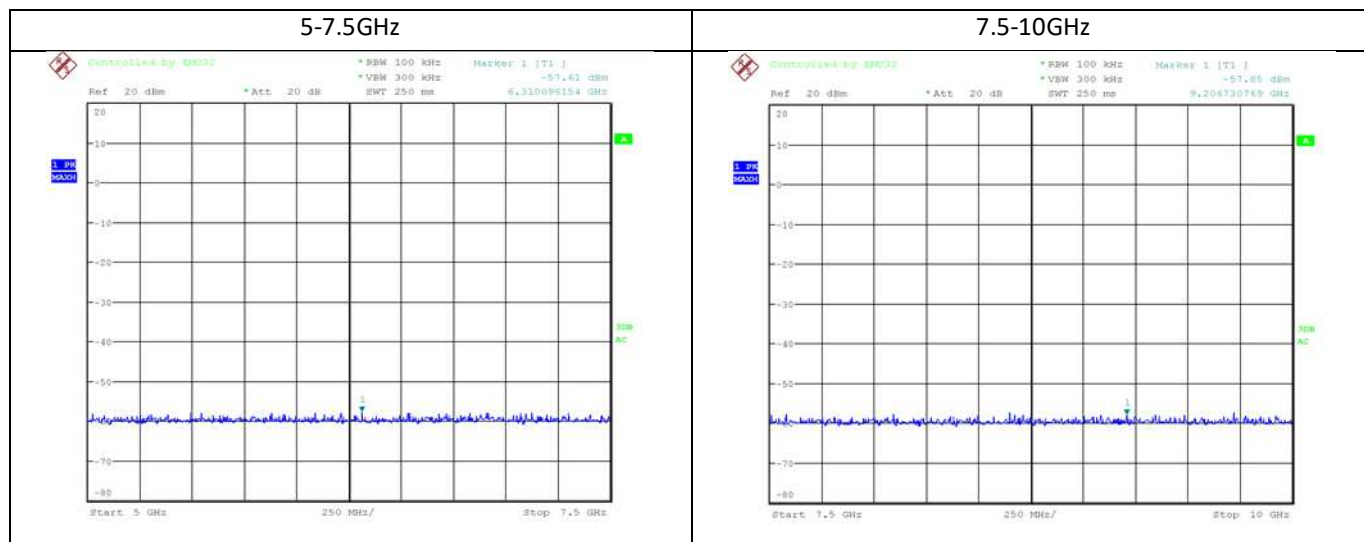

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
1855.769	-50.87	14.34	65.21	-5.66	45.21
2856.570	-56.14		70.48		50.48


## Graphical presentation of spurious emission

Operation mode: 1


Channel high (927.5MHz)

Data Rate: DR12


Fundamental

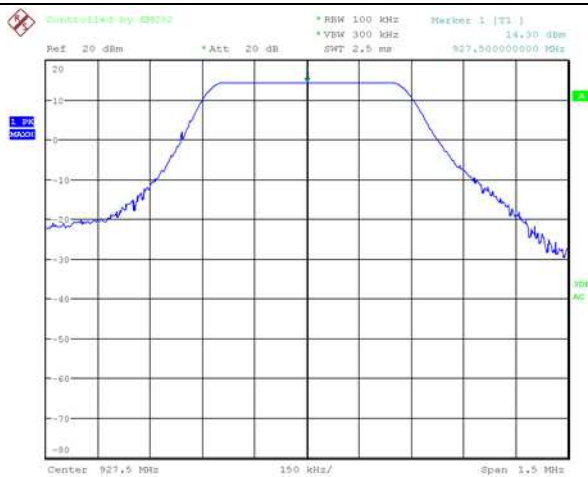


30MHz-1GHz

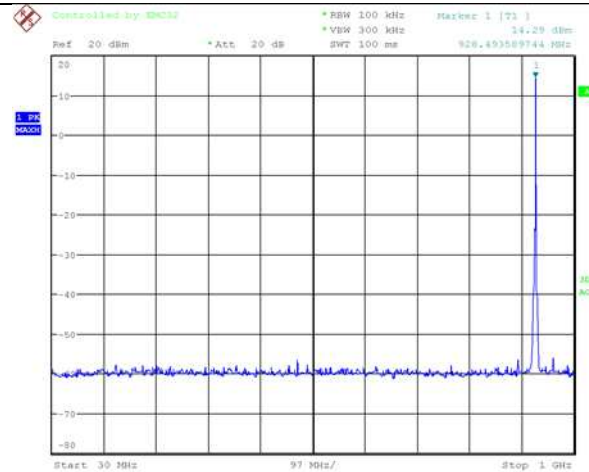


1-2.5GHz

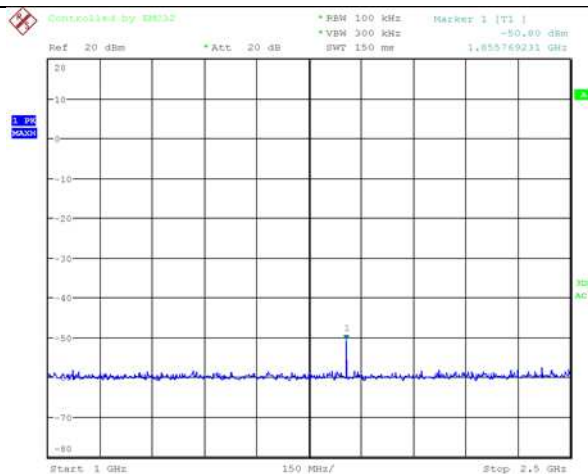

2.5-5GHz

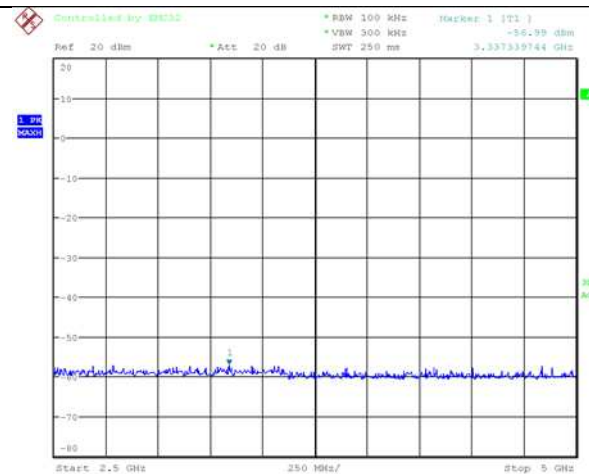

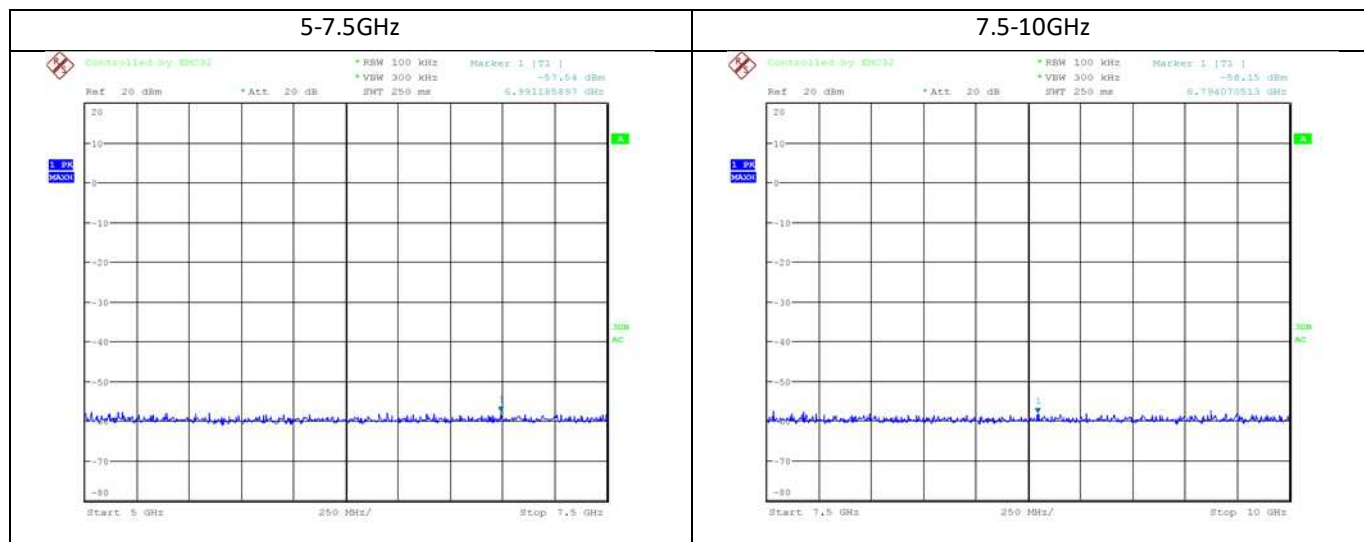

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
1855.769	-50.80	14.30	65.10	-5.70	45.10
3337.339	-56.99		71.29		51.29




## Graphical presentation of spurious emission

Operation mode: 1


Channel high (927.5MHz)

Data Rate: DR11


Fundamental

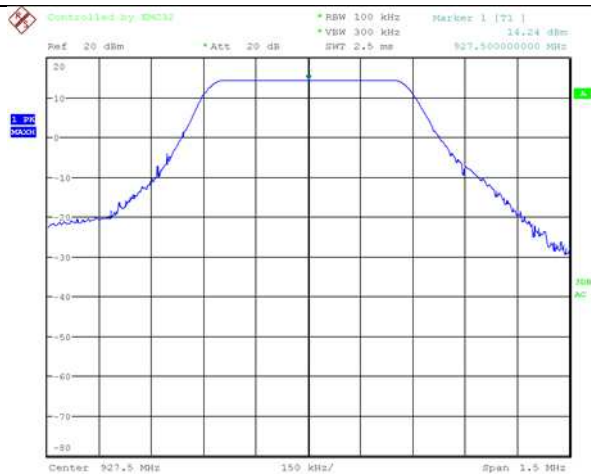


30MHz-1GHz

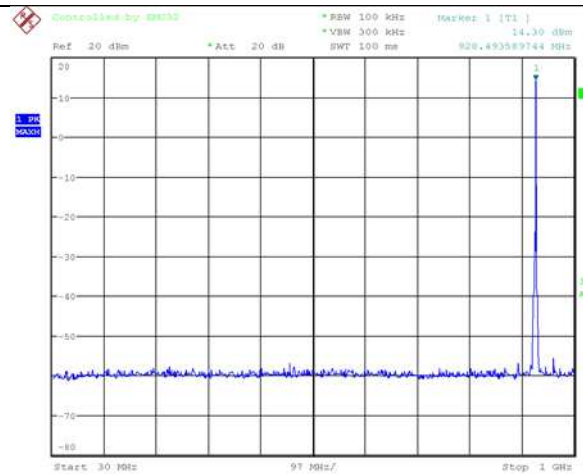


1-2.5GHz

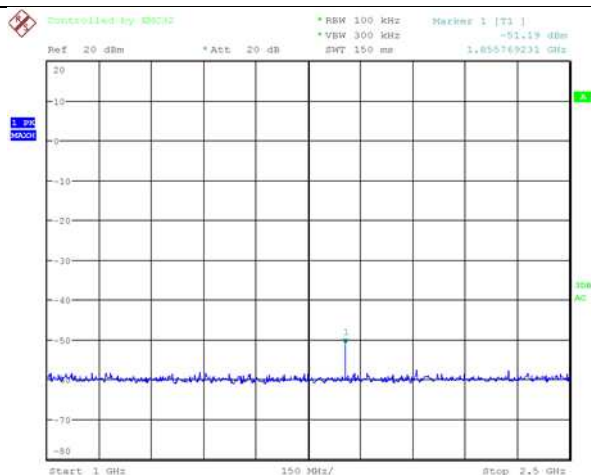

2.5-5GHz

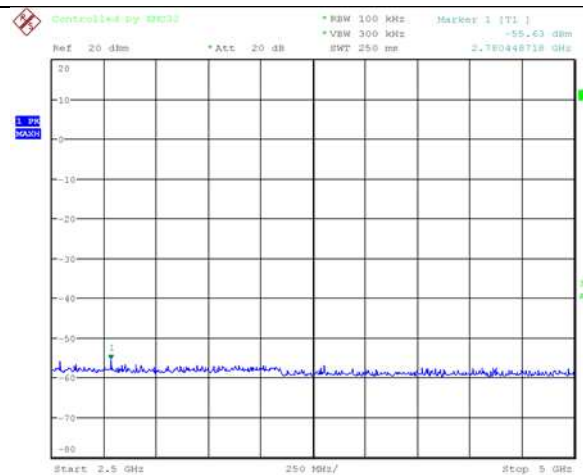



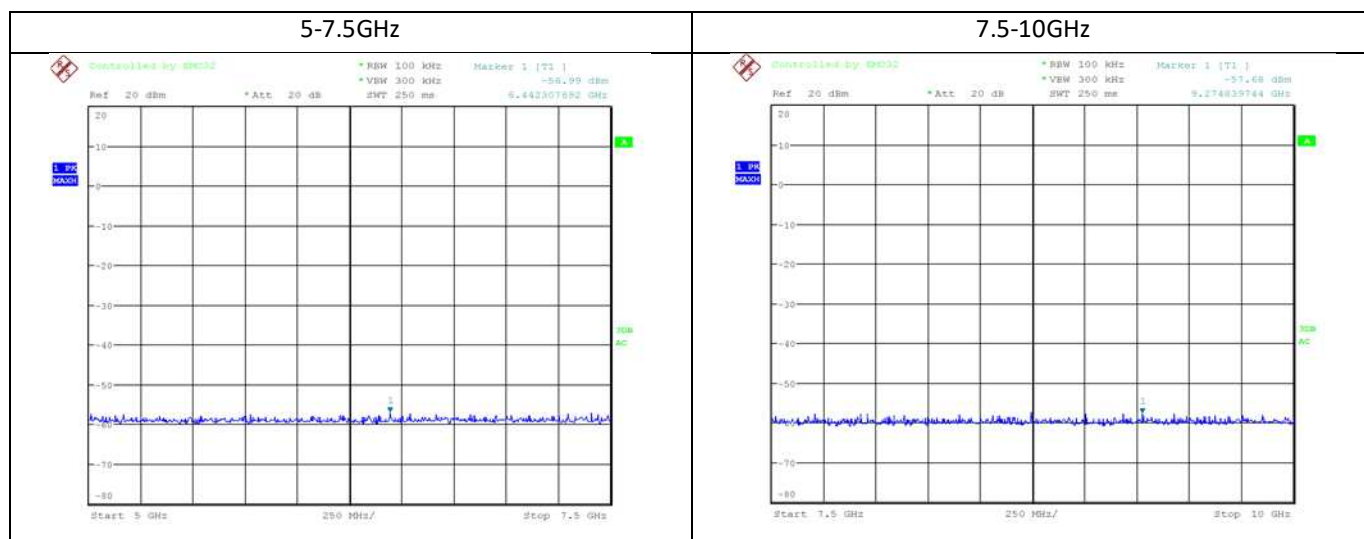

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1855.769</b>	<b>-51.19</b>	<b>14.24</b>	<b>65.43</b>	<b>-5.76</b>	<b>45.43</b>
<b>2780.448</b>	<b>-55.63</b>		<b>69.87</b>		<b>49.87</b>


## Graphical presentation of spurious emission

Operation mode: 1


Channel high (927.5MHz)

Data Rate: DR10


Fundamental

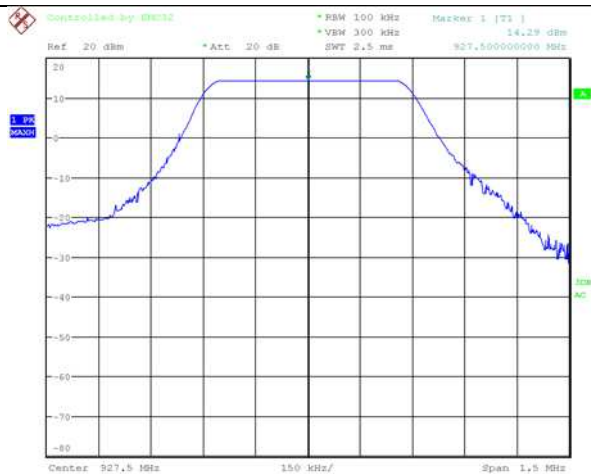


30MHz-1GHz

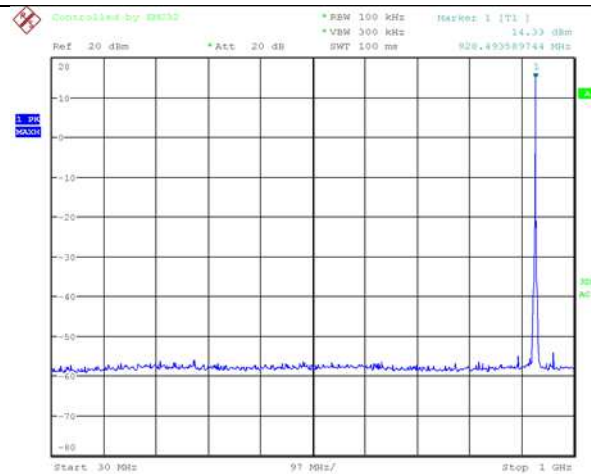


1-2.5GHz

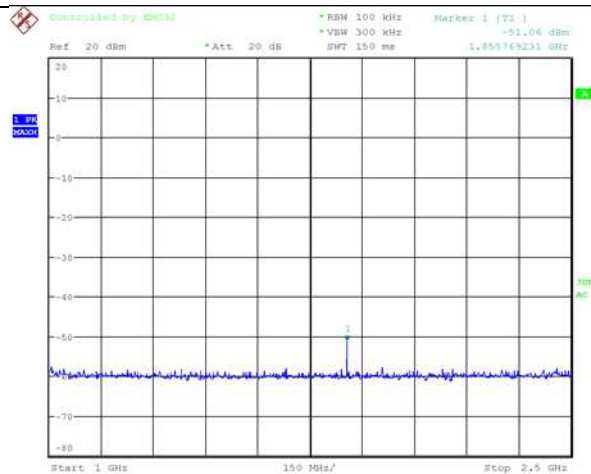

2.5-5GHz

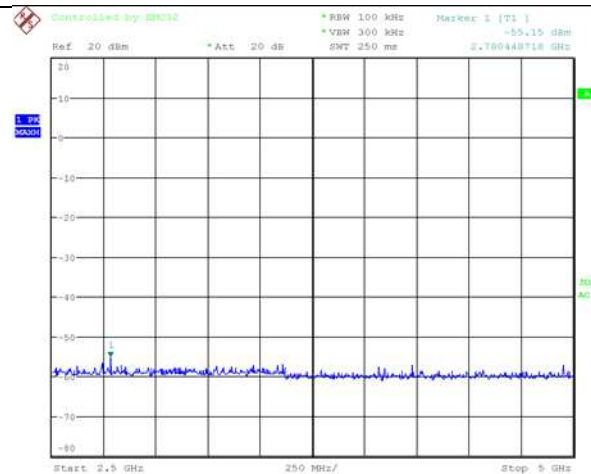

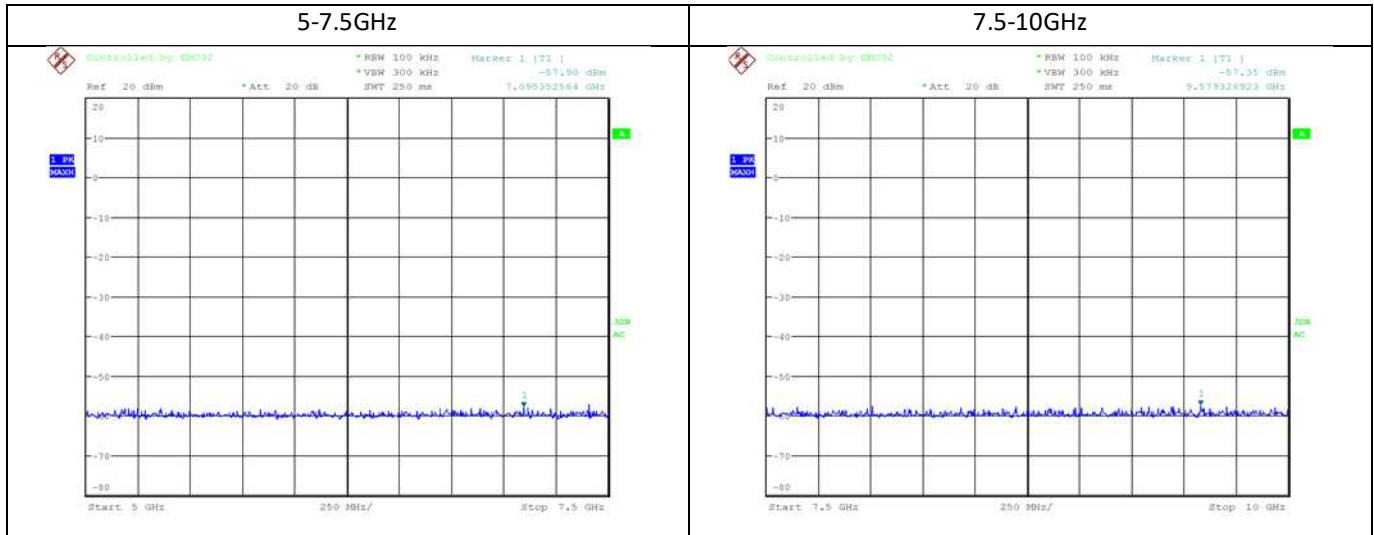

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1855.769</b>	<b>-51.06</b>	<b>14.29</b>	<b>65.35</b>	<b>-5.71</b>	<b>45.35</b>
<b>2780.448</b>	<b>-55.15</b>		<b>69.44</b>		<b>49.44</b>

## Graphical presentation of spurious emission

Operation mode: 1

Channel high (927.5MHz)

Data Rate: DR9


Fundamental




30MHz-1GHz




1-2.5GHz

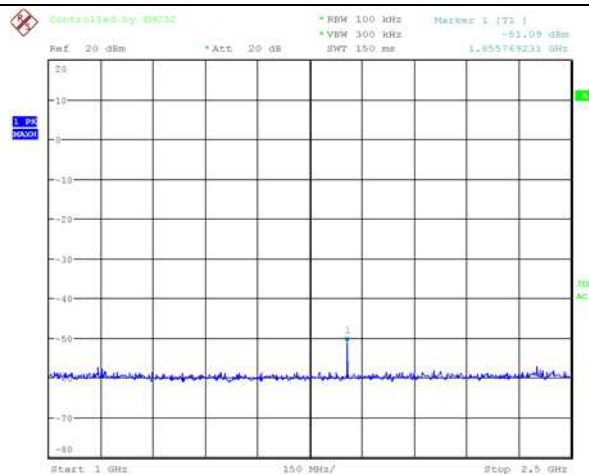

2.5-5GHz

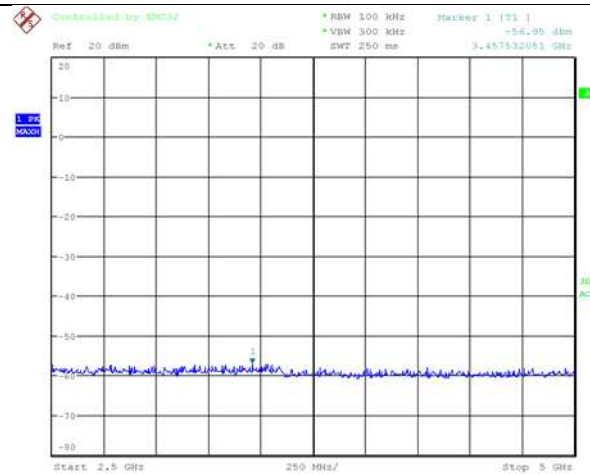

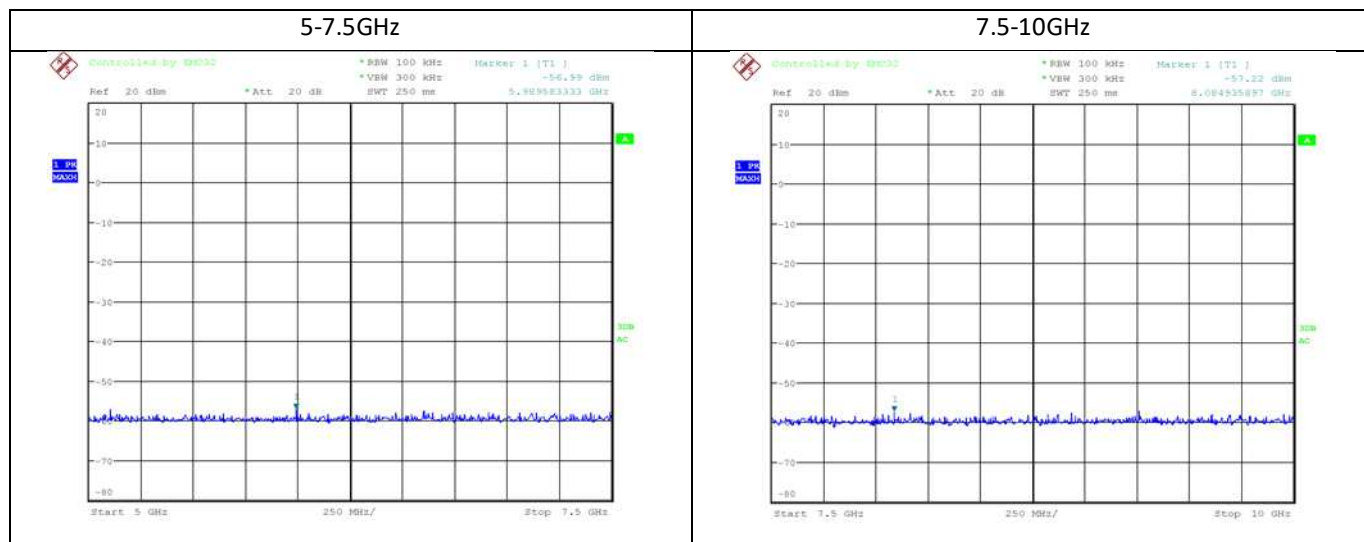

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
1855.769	-51.09	14.24	65.33	-5.76	45.33
3457.532	-56.95		71.19		51.19


## Graphical presentation of spurious emission

Operation mode: 1


Channel high (927.5MHz)

Data Rate: DR8


Fundamental

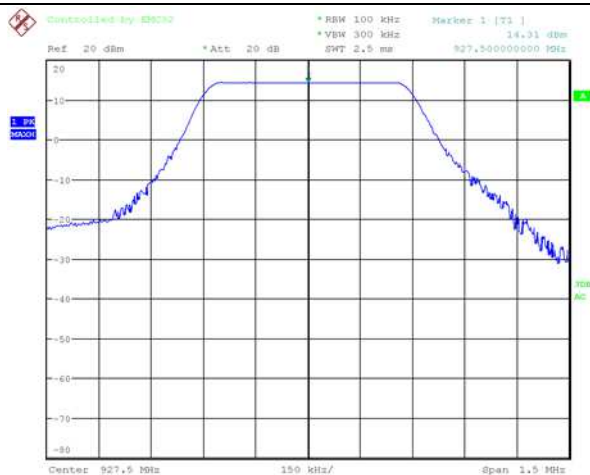


30MHz-1GHz

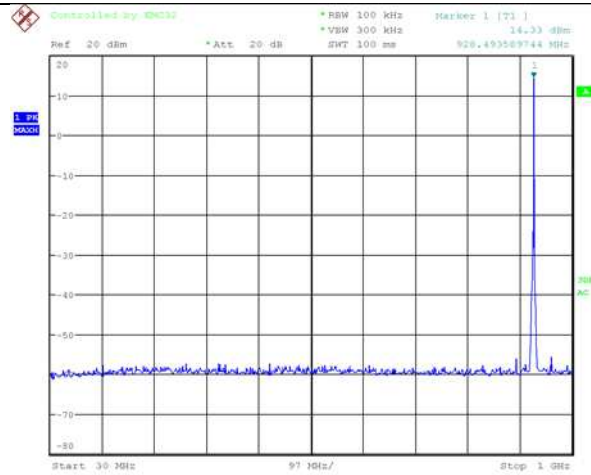


1-2.5GHz

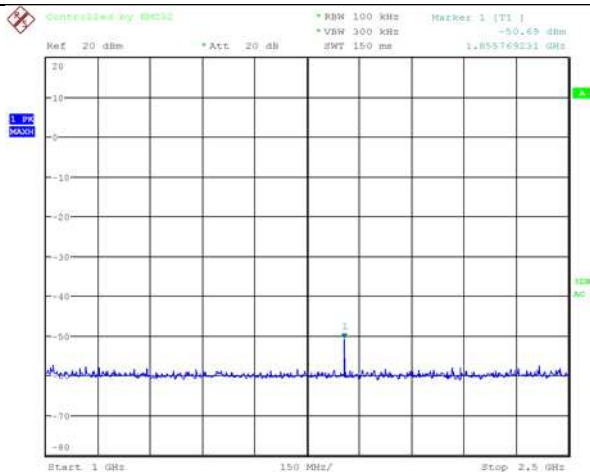

2.5-5GHz

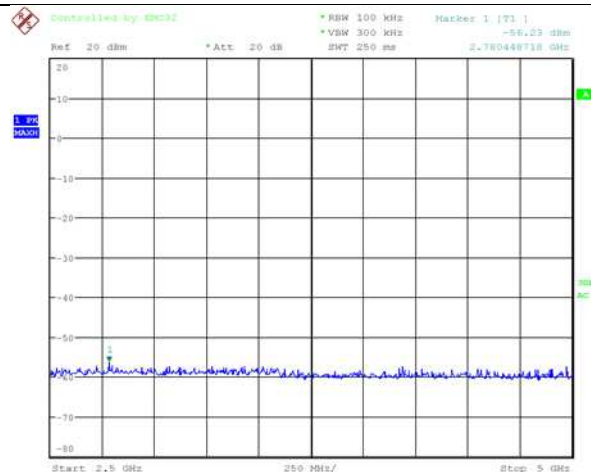

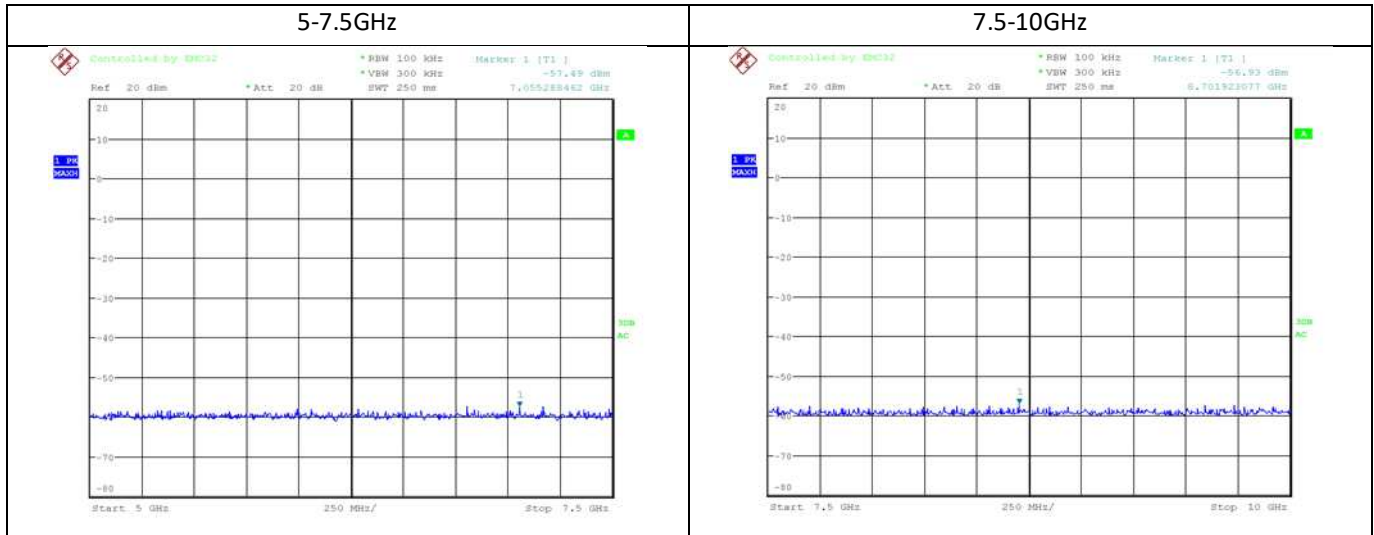

Frequency (MHz)	Measured power (dBm)	Fundamental Level (dBm)	Difference Peak / Spurious (dB)	Peak Limit at PK power -20dB (dBm)	Margin (dB)
<b>1855.769</b>	<b>-50.69</b>	<b>14.31</b>	<b>65.00</b>	<b>-5.69</b>	<b>45.00</b>
<b>2780.448</b>	<b>-56.23</b>		<b>70.54</b>		<b>50.54</b>

100kHz Bandwidth of Frequency Band Edges	
Test date	10-09-2021
Applied Standard	Title 47 Part 15 Subpart C §15.247
Test method	According to Par. 8.7.2 (Marker-Delta method) of KDB 558074 D01 15.247 Meas Guidance v05r02 (and par. 6.10.4 of ANSI C63.10)
Temperature	22° C
Humidity	42%
Air pressure	1027 mbar
Tested by	Roberto Radice
Model	<b>MAMWLE-01</b>
Test sample No.:	N°1
Operating mode	1
Tested terminals	SMA antenna connector
Result	Within the limit
<p>(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>	

Used test equipment					
Type	Manufacturer	Model	ID	Last calibration	Next calibration
EMI Receiver	Rohde&Schwarz	ESU40	2782345	10/2020	10/2021




## Graphical presentation of Band-Edge measurement

Operation mode: 1

Channel low (923.3MHz)

Data Rate: DR13

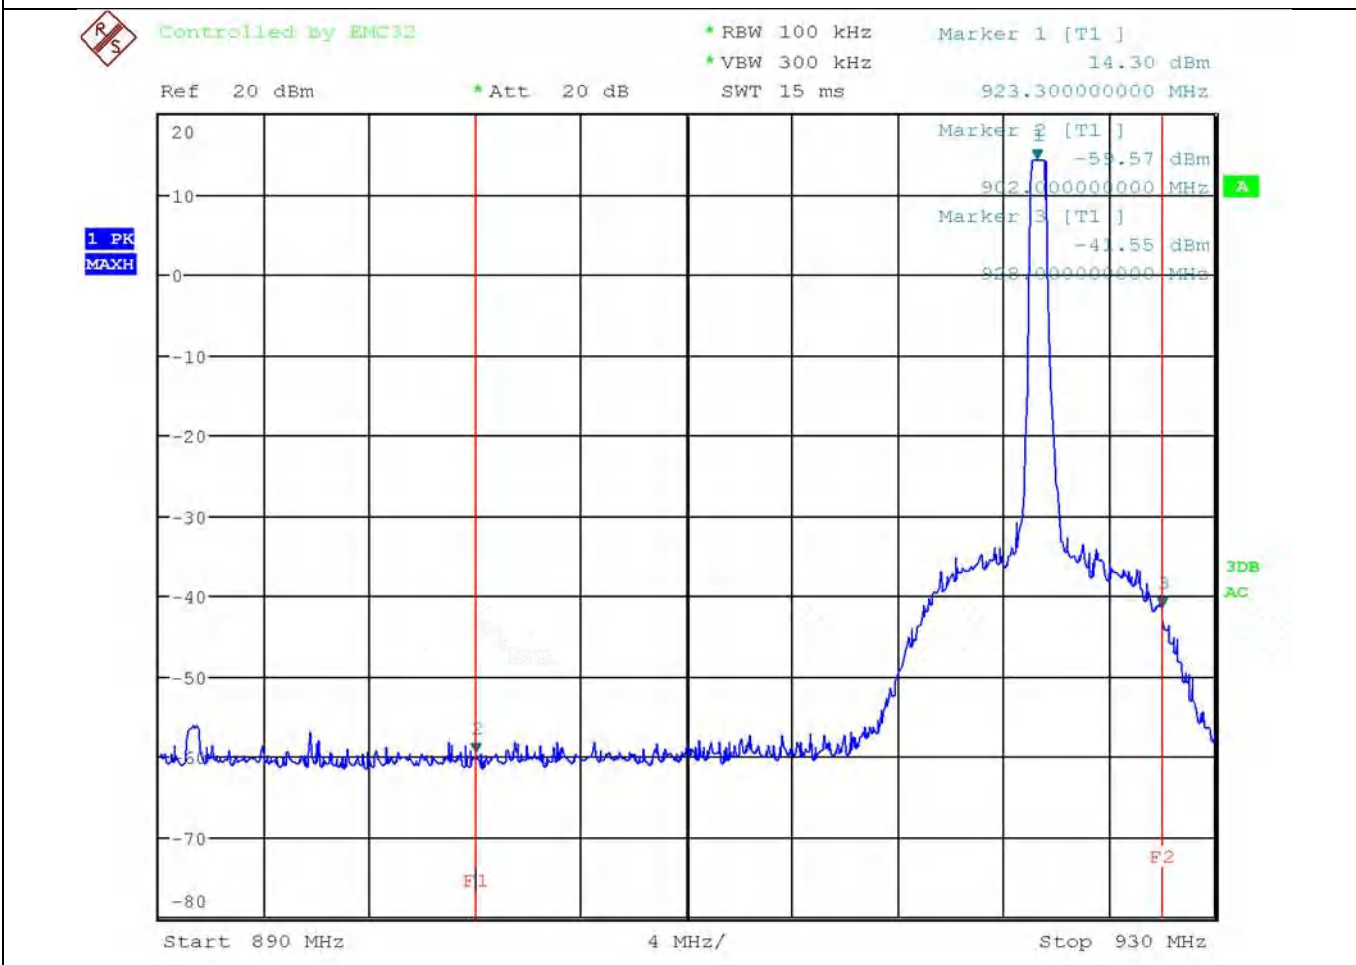
**Note:** the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.


Frequency (MHz)	Measured power at the band edge (dBm)	Measured power at fundamental frequency (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
902	-59.57	14.30	73.87	-5.70	53.87
928	-41.55	14.30	55.85	-5.70	35.85

## Graphical presentation of Band-Edge measurement

Operation mode: 1

Channel low (923.3MHz)

Data Rate: DR12

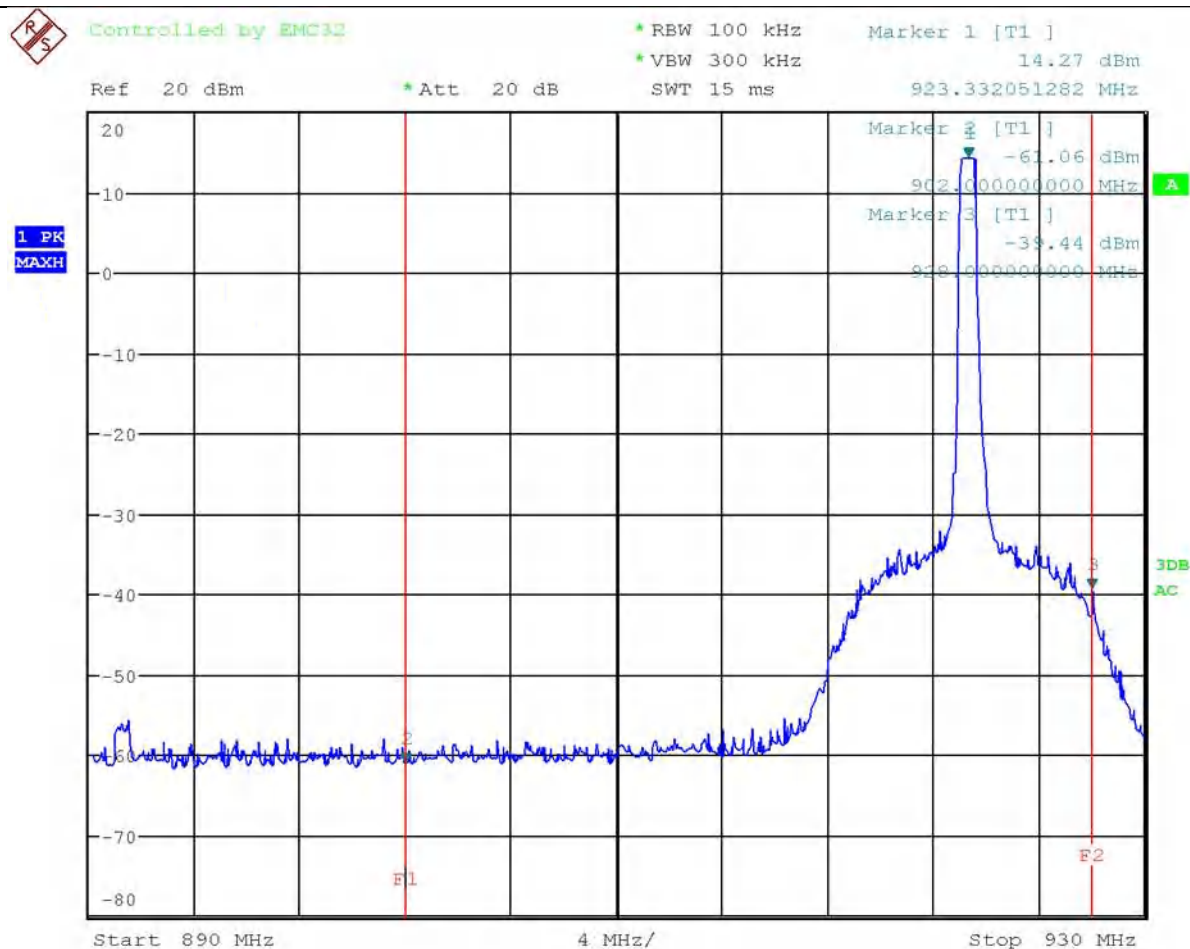
**Note:** the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.


Frequency (MHz)	Measured power at the band edge (dBm)	Measured power at fundamental frequency (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
902	-61.06	14.27	75.33	-5.73	55.33
928	-39.44	14.27	53.71	-5.73	33.71

## Graphical presentation of Band-Edge measurement

Operation mode: 1

Channel low (923.3MHz)

Data Rate: DR11

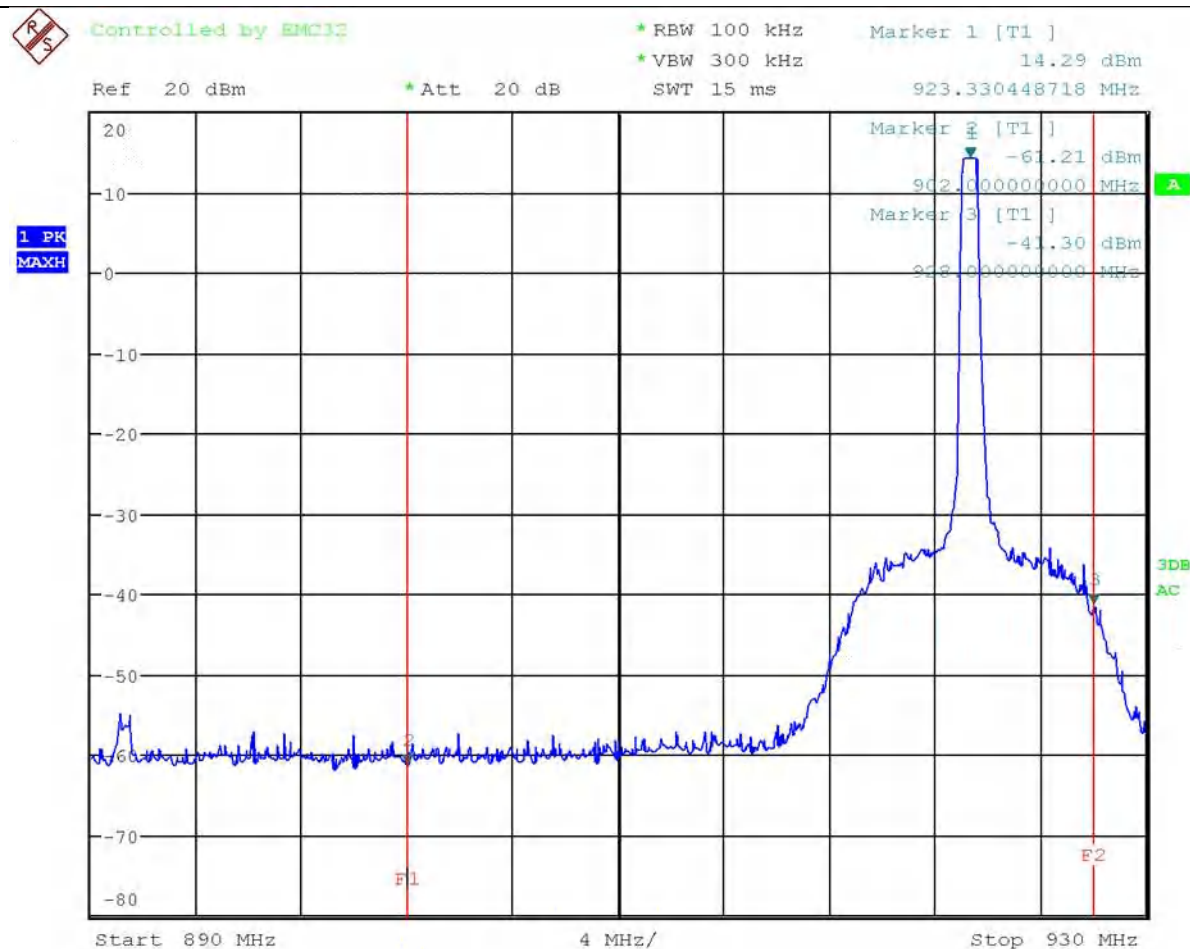
**Note:** the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.


Frequency (MHz)	Measured power at the band edge (dBm)	Measured power at fundamental frequency (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
902	-61.21	14.29	75.50	-5.71	55.50
928	-41.30	14.29	53.59	-5.71	33.59

## Graphical presentation of Band-Edge measurement

Operation mode: 1

Channel low (923.3MHz)

Data Rate: DR10

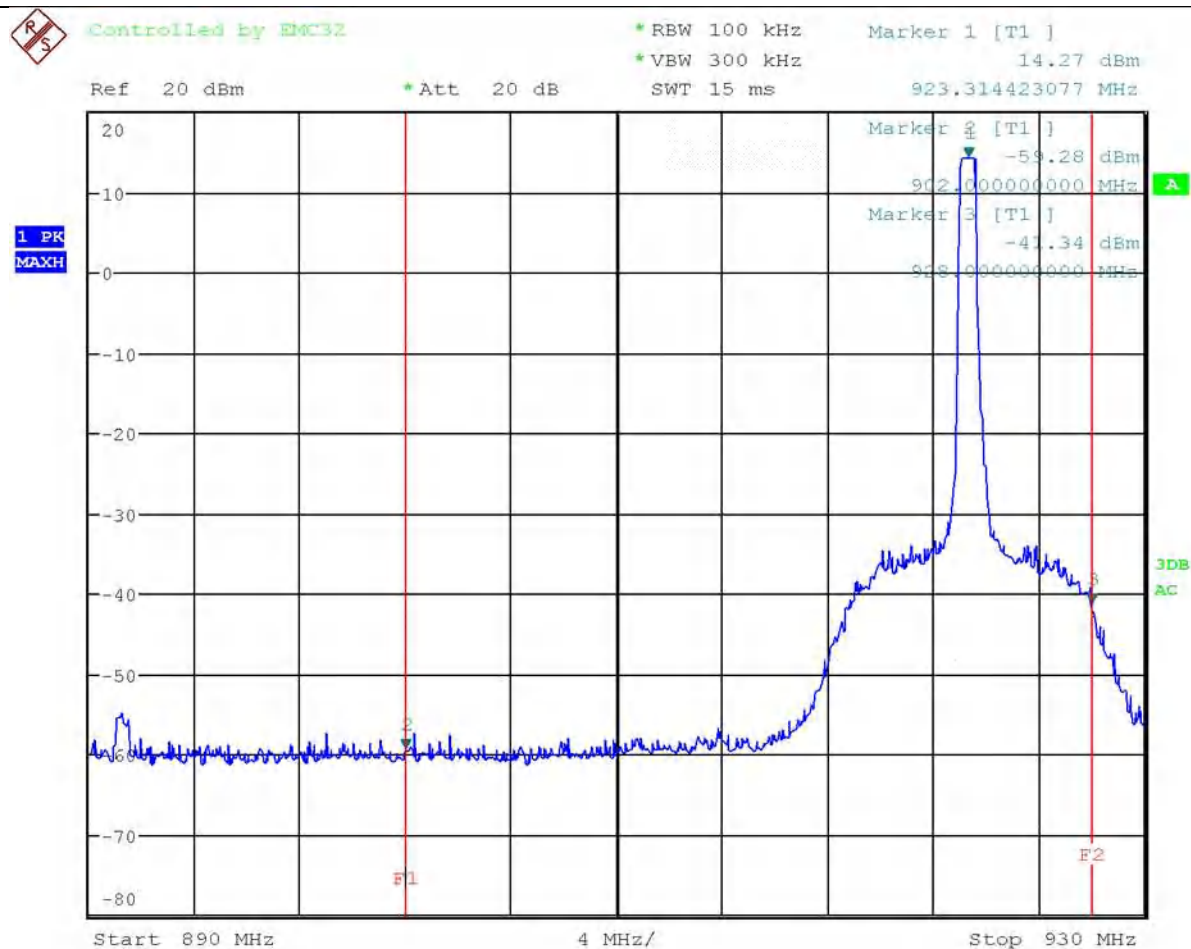
**Note:** the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.


Frequency (MHz)	Measured power at the band edge (dBm)	Measured power at fundamental frequency (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
902	-59.28	14.27	73.55	-5.73	53.55
928	-41.34	14.27	55.61	-5.73	35.61

## Graphical presentation of Band-Edge measurement

Operation mode: 1

Channel low (923.3MHz)

Data Rate: DR9

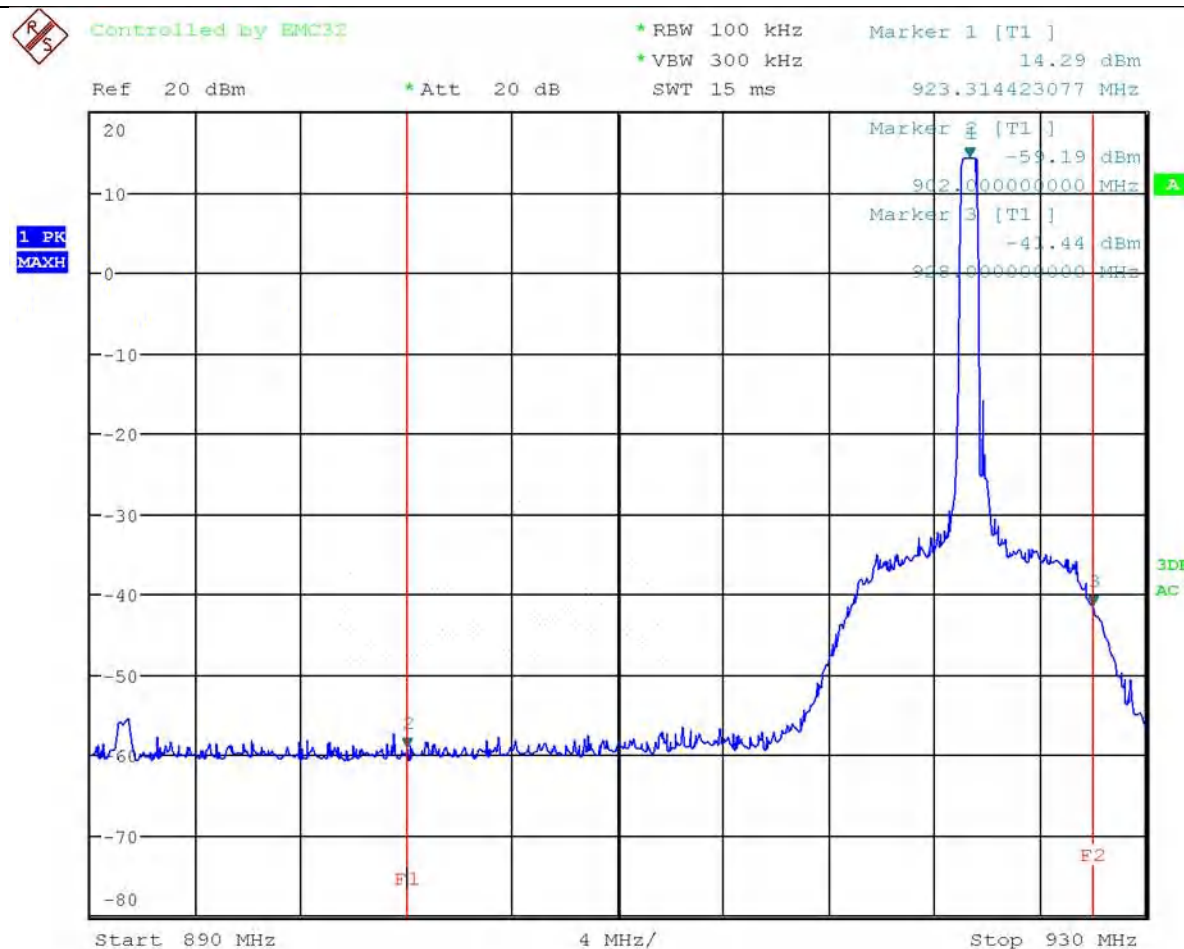
**Note:** the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.


Frequency (MHz)	Measured power at the band edge (dBm)	Measured power at fundamental frequency (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
902	-59.19	14.29	73.48	-5.71	53.48
928	-41.44	14.29	55.73	-5.71	35.73

## Graphical presentation of Band-Edge measurement

Operation mode: 1

Channel low (923.3MHz)

Data Rate: DR8

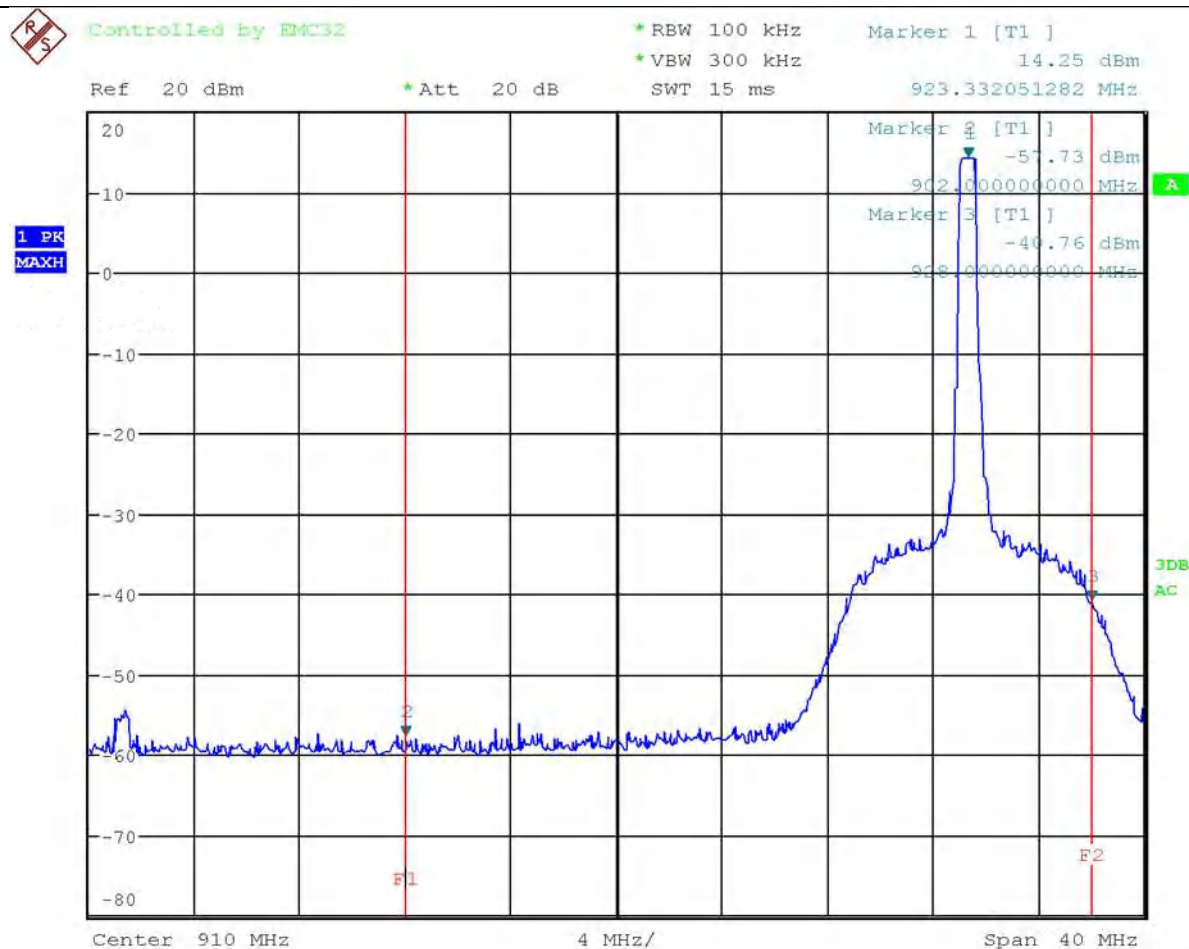

**Note:** the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.

Frequency (MHz)	Measured power at the band edge (dBm)	Measured power at fundamental frequency (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
902	-57.73	14.25	71.98	-5.75	51.98
928	-40.76	14.25	55.01	-5.75	35.01






Graphical presentation of Band-Edge measurement

Operation mode: 1

Channel high (927.5MHz)

Data Rate: DR13

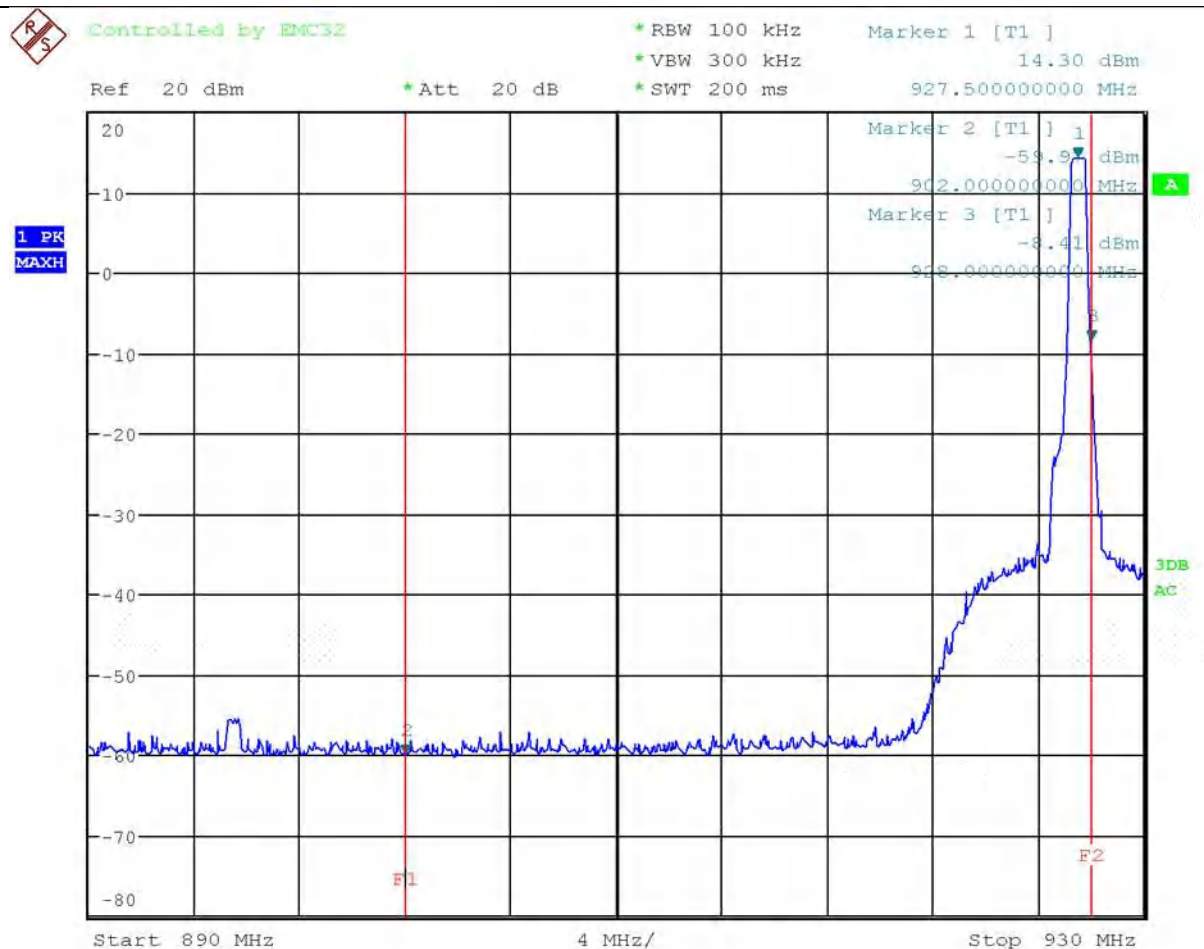

**Note:** the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.


Frequency (MHz)	Measured power at the band edge (dBm)	Measured power at fundamental frequency (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
902	-59.97	14.30	74.27	-5.70	54.27
928	-8.41	14.30	22.71	-5.70	2.71

## Graphical presentation of Band-Edge measurement

Operation mode: 1

Channel high (927.5MHz)

Data Rate: DR12

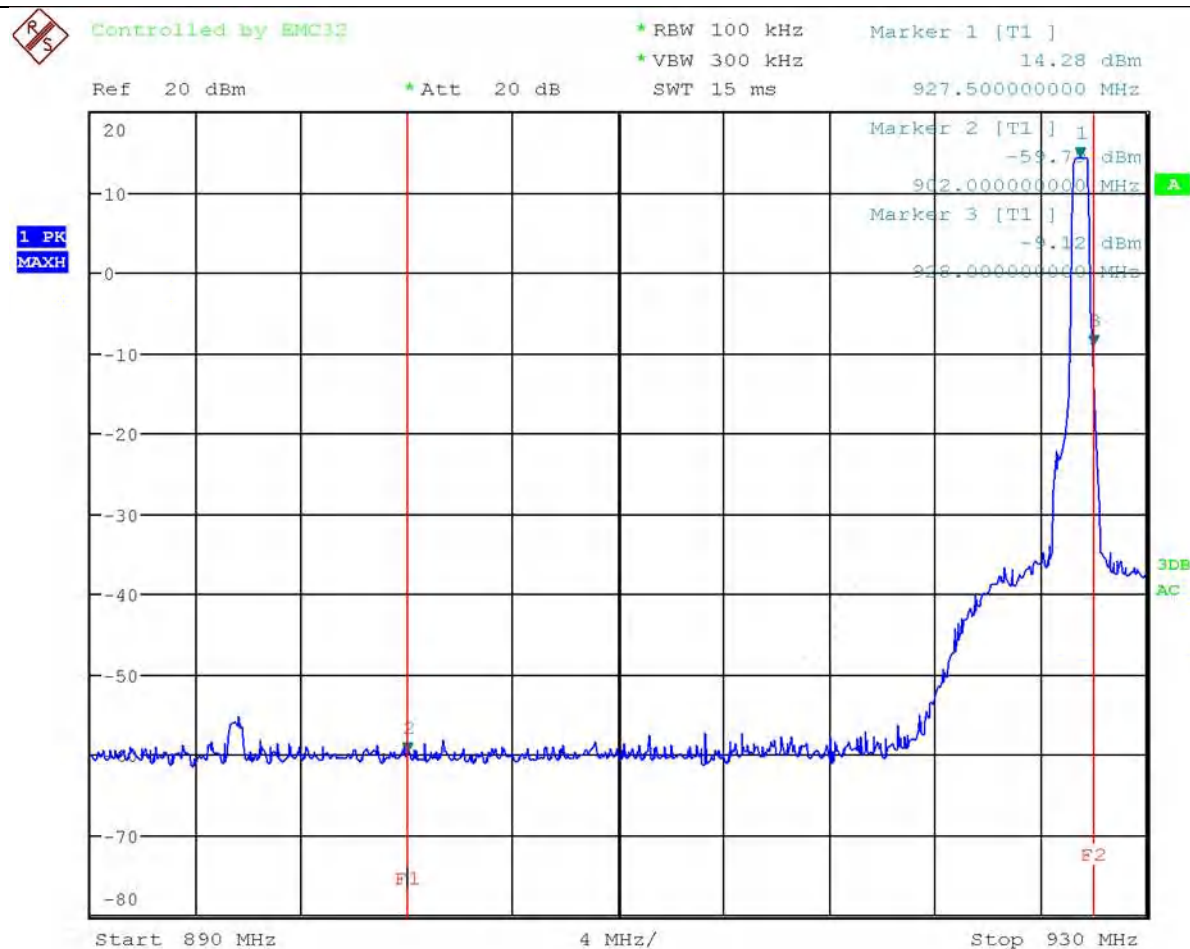
**Note:** the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.

Frequency (MHz)	Measured power at the band edge (dBm)	Measured power at fundamental frequency (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
902	-59.79	14.28	74.07	-5.72	54.07
928	-9.12	14.28	23.40	-5.72	3.40




## Graphical presentation of Band-Edge measurement

Operation mode: 1

Channel high (927.5MHz)

Data Rate: DR11

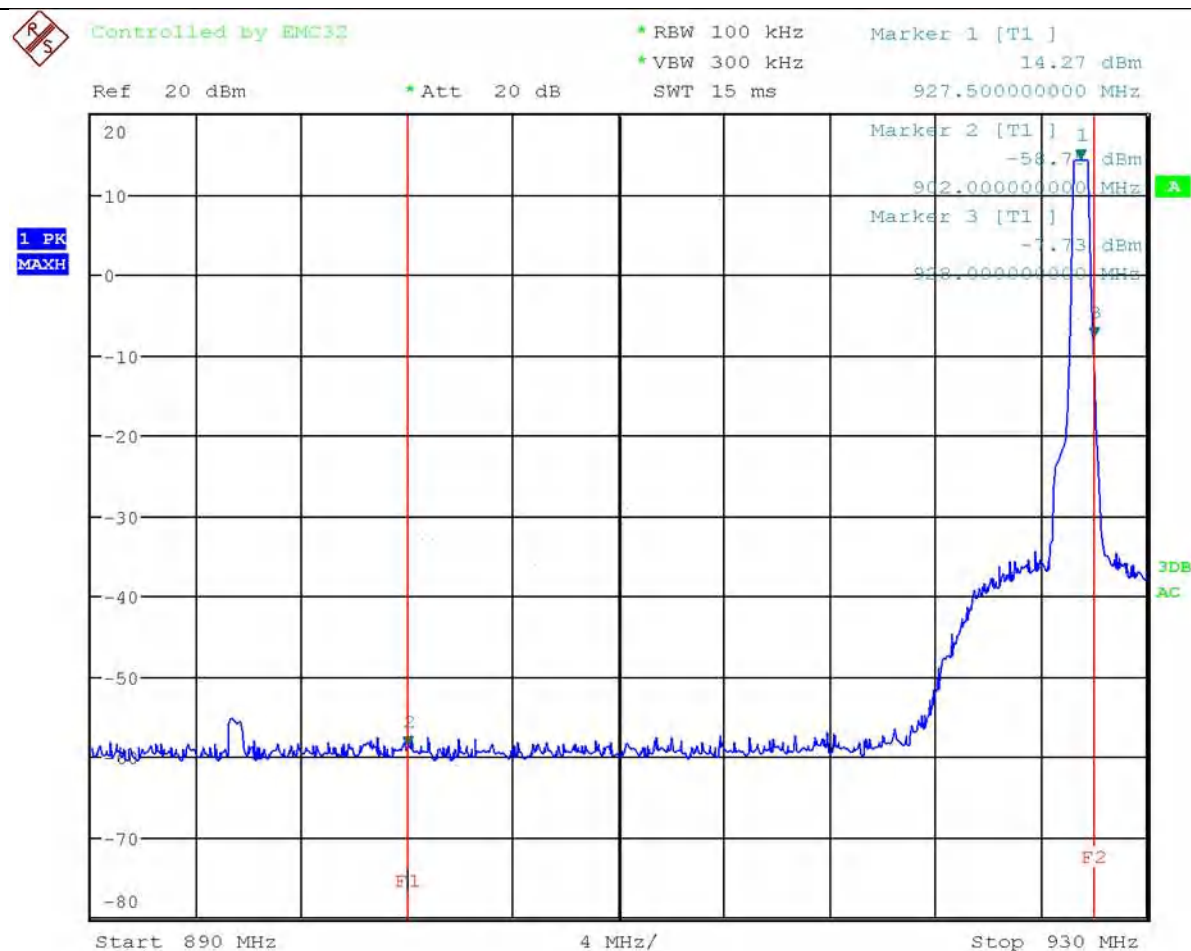
**Note:** the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.


Frequency (MHz)	Measured power at the band edge (dBm)	Measured power at fundamental frequency (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
902	-58.75	14.27	73.02	-5.73	53.02
928	-7.73	14.27	22.00	-5.73	2.00

## Graphical presentation of Band-Edge measurement

Operation mode: 1

Channel high (927.5MHz)

Data Rate: DR10

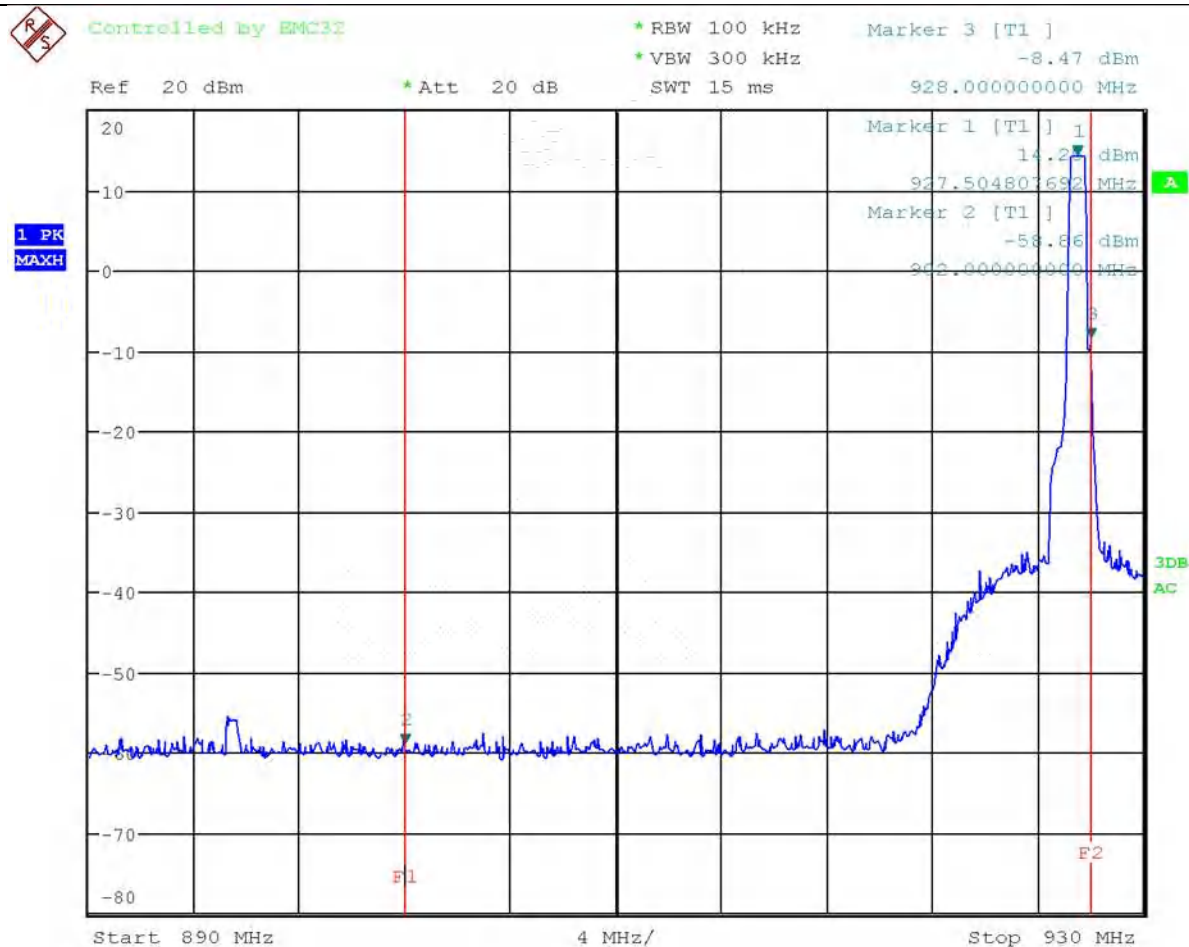

**Note:** the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.


Frequency (MHz)	Measured power at the band edge (dBm)	Measured power at fundamental frequency (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
902	-58.86	14.25	73.11	-5.75	53.11
928	-8.47	14.25	22.72	-5.75	2.72

## Graphical presentation of Band-Edge measurement

Operation mode: 1

Channel high (927.5MHz)

Data Rate: DR9

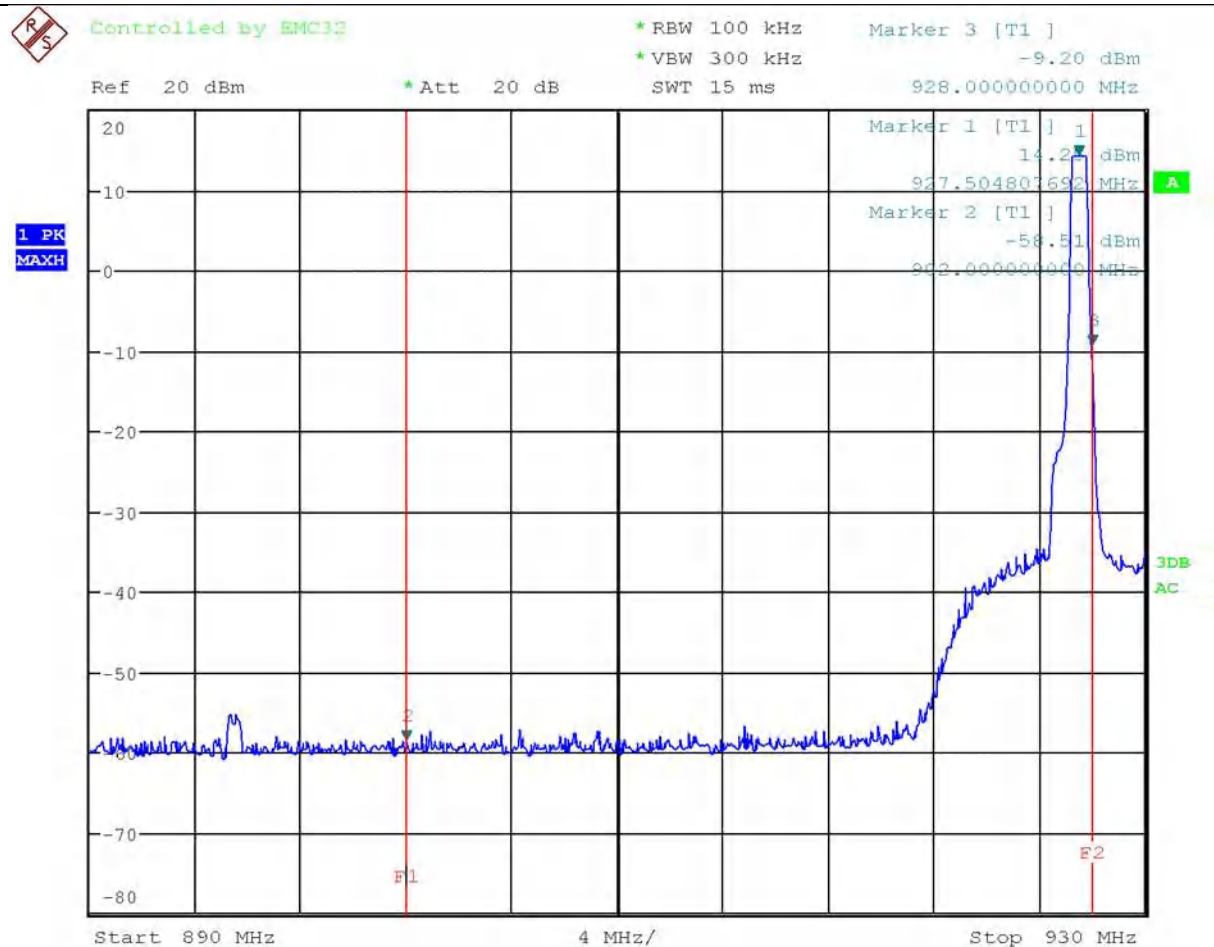

**Note:** the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.


Frequency (MHz)	Measured power at the band edge (dBm)	Measured power at fundamental frequency (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
902	-58.51	14.25	72.76	-5.75	52.76
928	-9.20	14.25	23.45	-5.75	3.45

## Graphical presentation of Band-Edge measurement

Operation mode: 1

Channel high (927.5MHz)

Data Rate: DR8

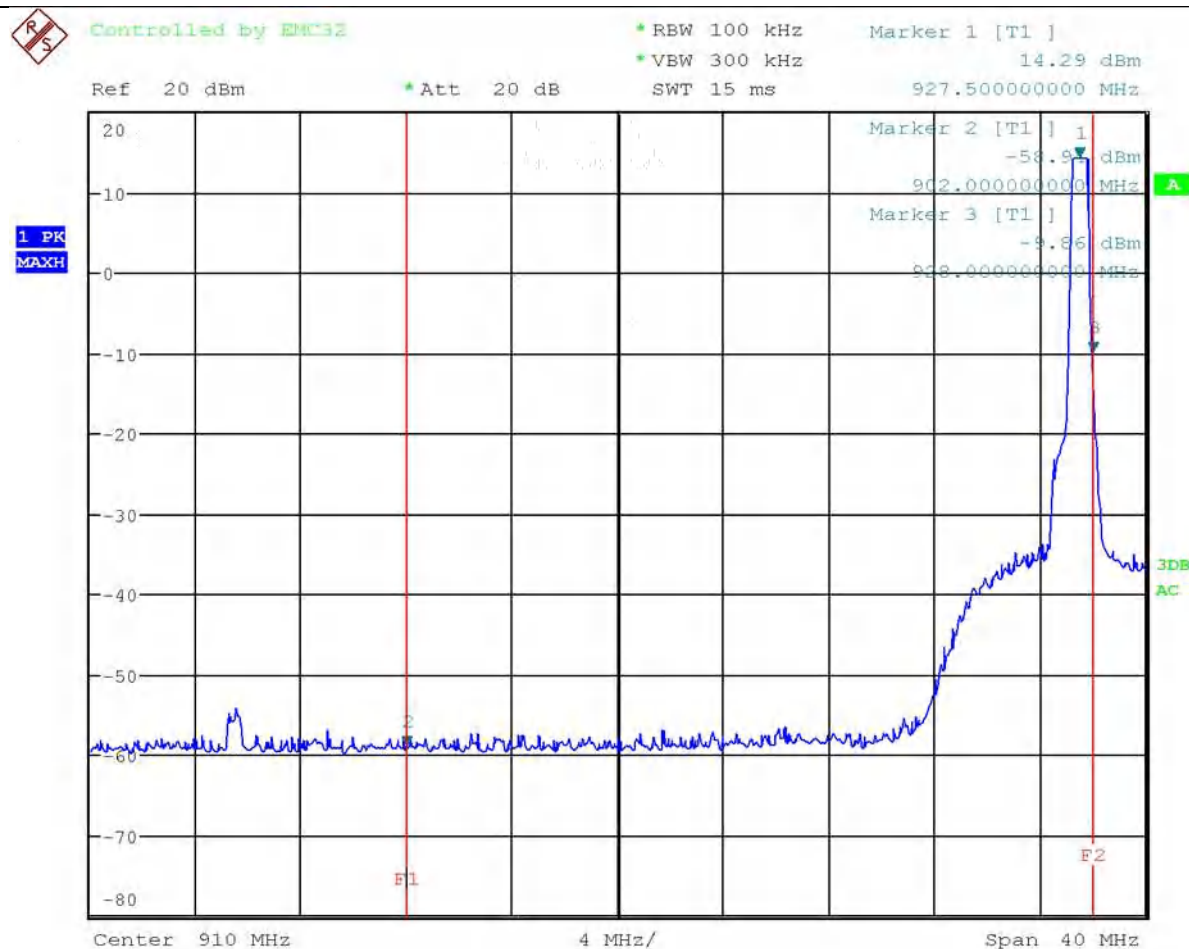

**Note:** the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.

Frequency (MHz)	Measured power at the band edge (dBm)	Measured power at fundamental frequency (dBm)	Difference Peak / band edge (dB)	Peak Limit at PK power -20 dB (dBm)	Margin (dB)
902	-58.94	14.29	73.23	-5.71	53.23
928	-9.86	14.29	24.15	-5.71	4.15

Power Spectral Density	
Test date	10-09-2021
Applied Standard	Title 47 Part 15 Subpart C §15.247
Test method	According to Par. 8.4 of KDB 558074 D01 15.247 Meas Guidance v05r02 (and par. 11.10 of ANSI C63.10)
Temperature	22° C
Humidity	42%
Air pressure	1027 mbar
Tested by	Roberto Radice
Model	<b>MAMWLE-01</b>
Test sample No.:	N°1
Operating mode	1
Tested terminals	SMA antenna connector
Result	PASS
<p>(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.</p>	


Used test equipment					
Type	Manufacturer	Model	ID	Last calibration	Next calibration
EMI Receiver	Rohde&Schwarz	ESU40	2782345	10/2020	10/2021

## Measurement data of Power Spectral Density, conducted measurement


Test conditions			Frequency (MHz)	Ch.	Conducted Spectral Density	Limits (dBm)	Result
Temperature	Voltage	Data rate (worst case)			dBm	Conducted	
Tnom +22°C	3.3 V dc	DR8	923.3	1	7.86	8	PASS
Tnom +22°C	3.3 V dc	DR8	925.7	5	7.86	8	PASS
Tnom +22°C	3.3 V dc	DR8	927.5	8	7.95	8	PASS

## Graphical Results of Power Spectral Density, conducted measurement


## Channel low (923.3MHz)

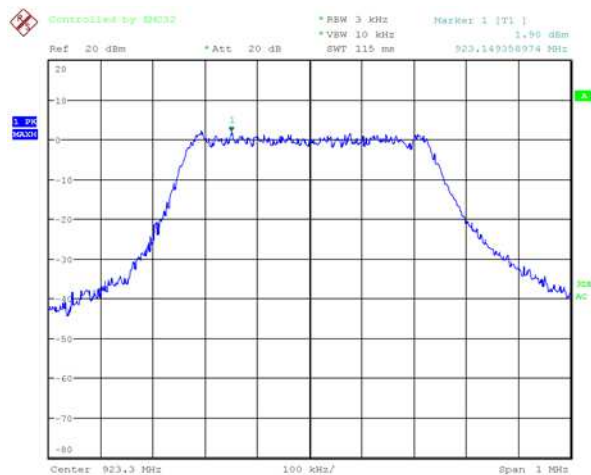


Data rate: DR13

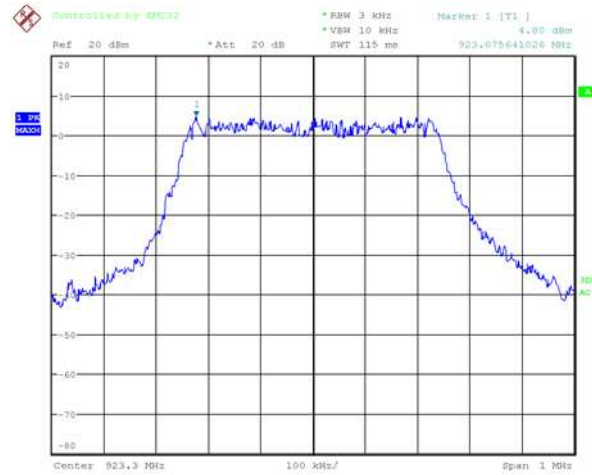

Data rate: DR12

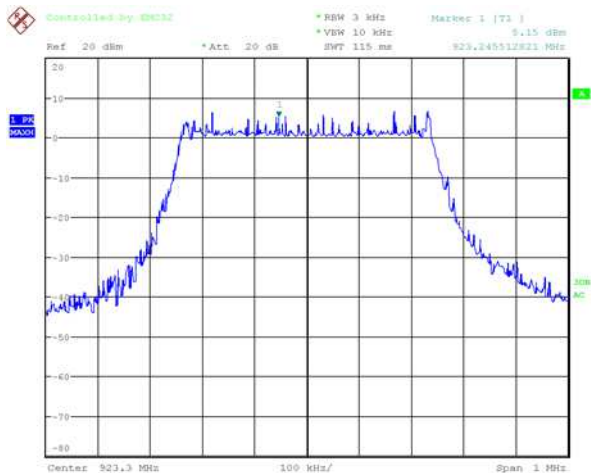

Data rate: DR11

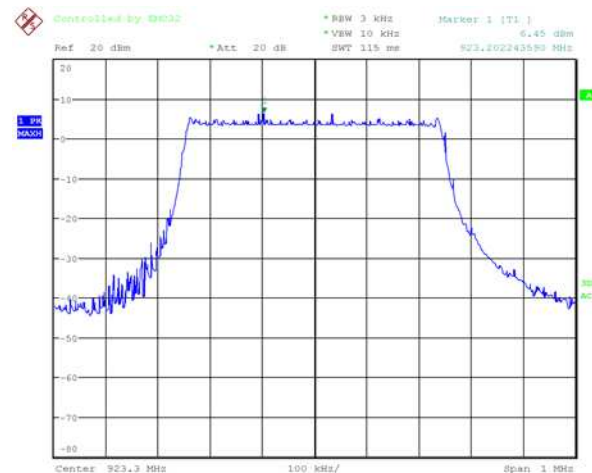


Data rate: DR10




## Graphical Results of Power Spectral Density, conducted measurement

## Channel low (923.3MHz)

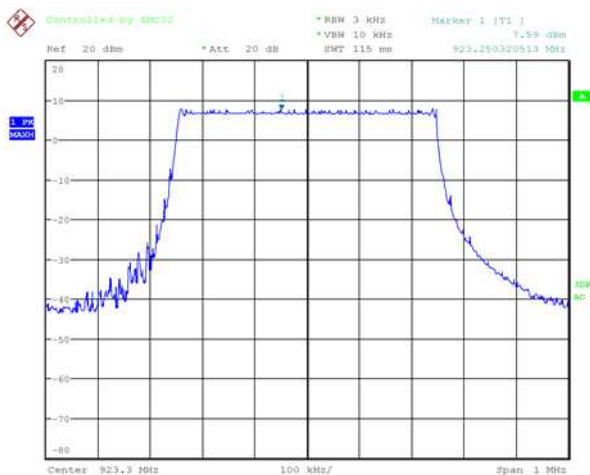

Data rate: DR9

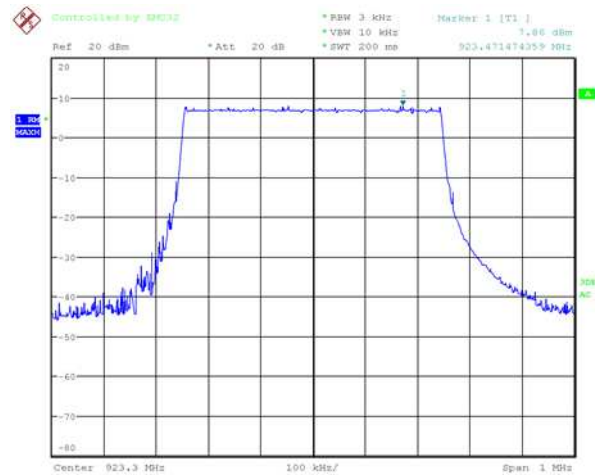


Data rate: DR8




## Graphical Results of Power Spectral Density, conducted measurement


Channel middle (925.7MHz)

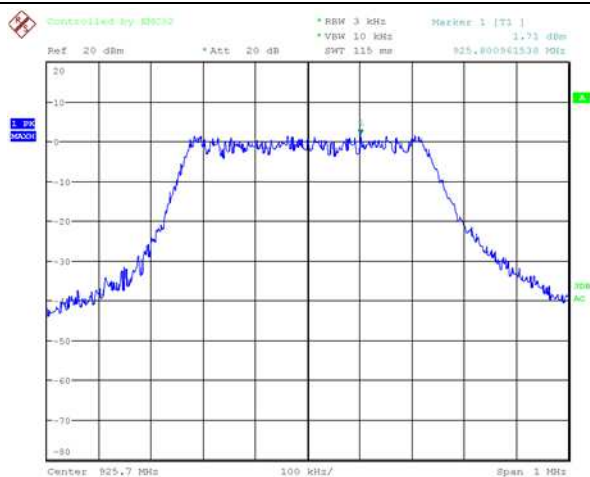


Data rate: DR13

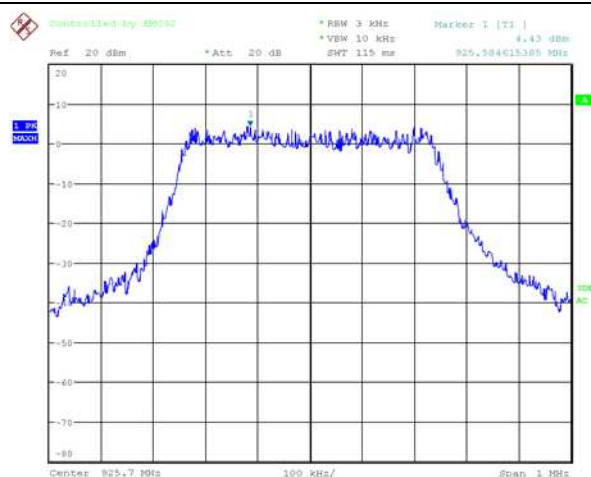

Data rate: DR12

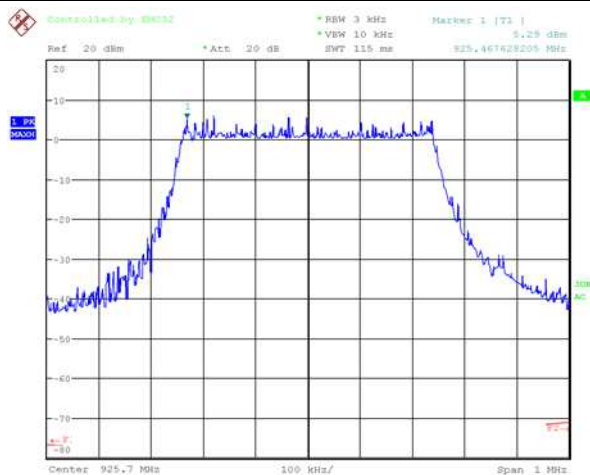


Data rate: DR11

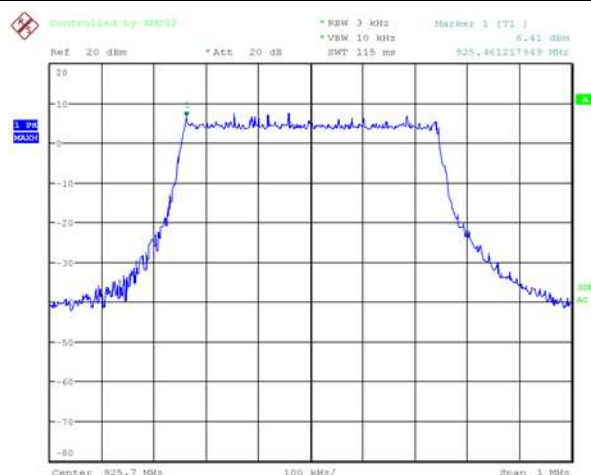


Data rate: DR10

### Graphical Results of Power Spectral Density, conducted measurement

## Channel middle (925.7MHz)

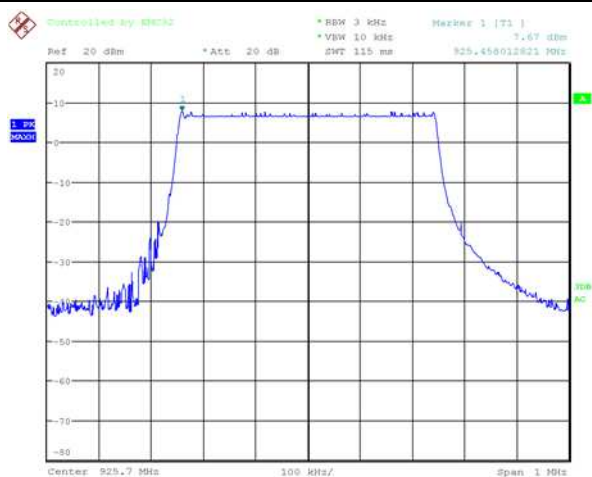


Data rate: DR9

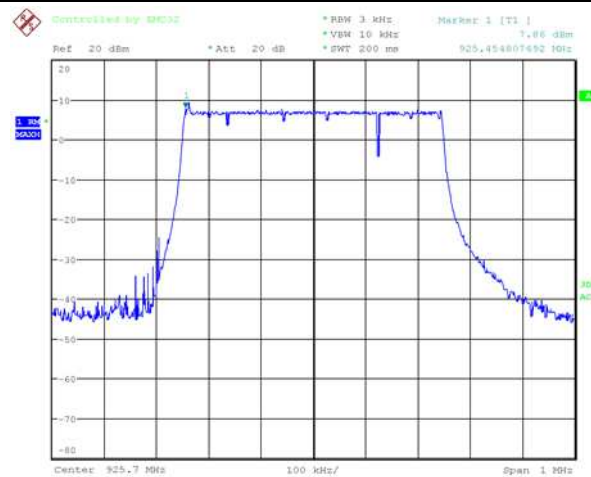


Data rate: DR8

## Graphical Results of Power Spectral Density, conducted measurement


Channel high (927.5MHz)

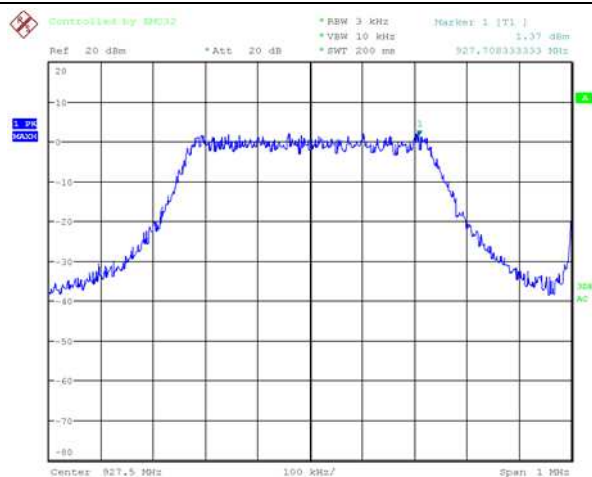


Data rate: DR13

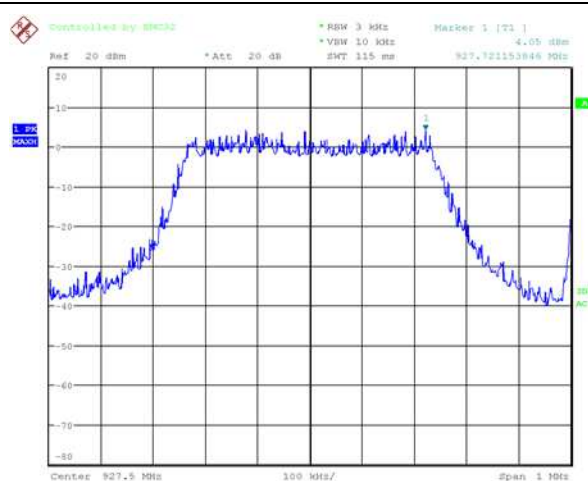

Data rate: DR12

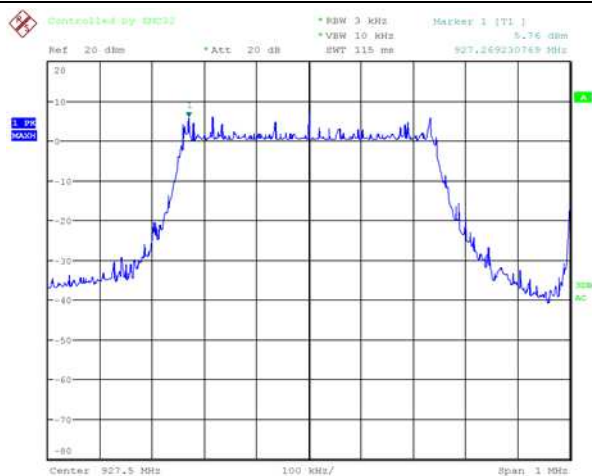


Data rate: DR11

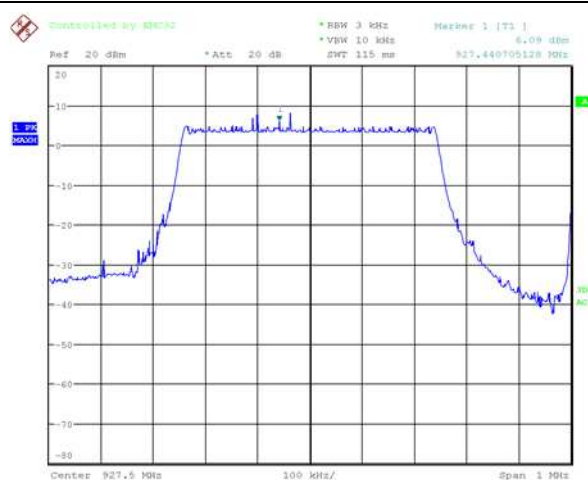


Data rate: DR10

## Graphical Results of Power Spectral Density, conducted measurement

Channel low (923.3MHz)

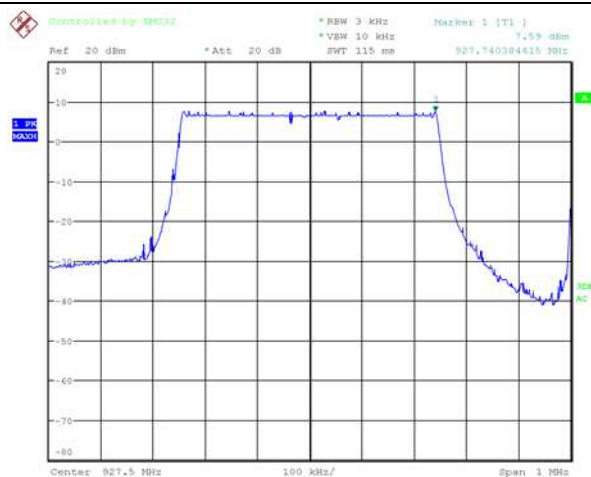

Data rate: DR9

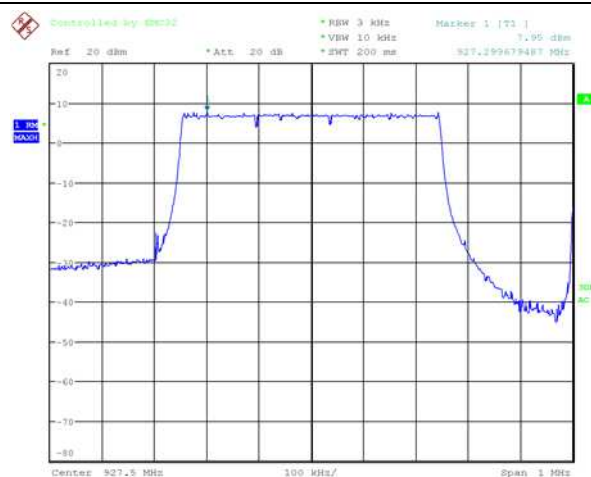

Data rate: DR8

Additional provisions to the general radiated emission limitations.	
Test date	08-09-2021
Applied Standard	Title 47 Part 15 Subpart C §15.215
Test method	---
Temperature	22° C
Humidity	42%
Air pressure	1027 mbar
Tested by	Roberto Radice
Model	<b>MAMWLE-01</b>
Test sample No.:	N°1
Operating mode	1
Tested terminals	SMA antenna connector
Result	Within the limit

(A) The regulations in §§ 15.217-15.257 provide alternatives to the general radiated emission limits for intentional radiators operating in specified frequency bands. Unless otherwise stated, there are no restrictions as to the types of operation permitted under these sections.	
(B) In most cases, unwanted emissions outside of the frequency bands shown in these alternative provisions must be attenuated to the emission limits shown in Section 15.209. In no case shall the level of the unwanted emissions from an intentional radiator operating under these additional provisions exceed the field strength of the fundamental emission.	VERDICT
	PASS
(C) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.	VERDICT
	PASS

**PHOTOGRAPHIC DOCUMENTATION**

See the Annex below:

IT21K3EN 001 Annex 1	External photos
IT21K3EN 001 Annex 2	Internal photos (without shield)
IT21K3EN 001 Annex 3	Test Set-up photos

**SAR EVALUATION**

See the Annex below:

IT21K3EN 001 Annex 4	SAR Evaluation
----------------------	----------------

**DERIVED MODELS ASSESSMENT**

See the Annex below:

IT21K3EN 001 Annex 5	Derived models assessment
----------------------	---------------------------

---END OF TEST REPORT---