

## Appendix B

### RF Test Data for BT V4.1(BDR/EDR) (Conducted Measurement)

Product Name: Beacon TWS Earbuds

Trade Mark: LSTN


Test Model: LSTN BEACON

#### Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	50%
ATM Pressure:	100.0 kPa
Test Engineer:	Ryan Hu
Supervised by:	Jayden.Zhuo


#### B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

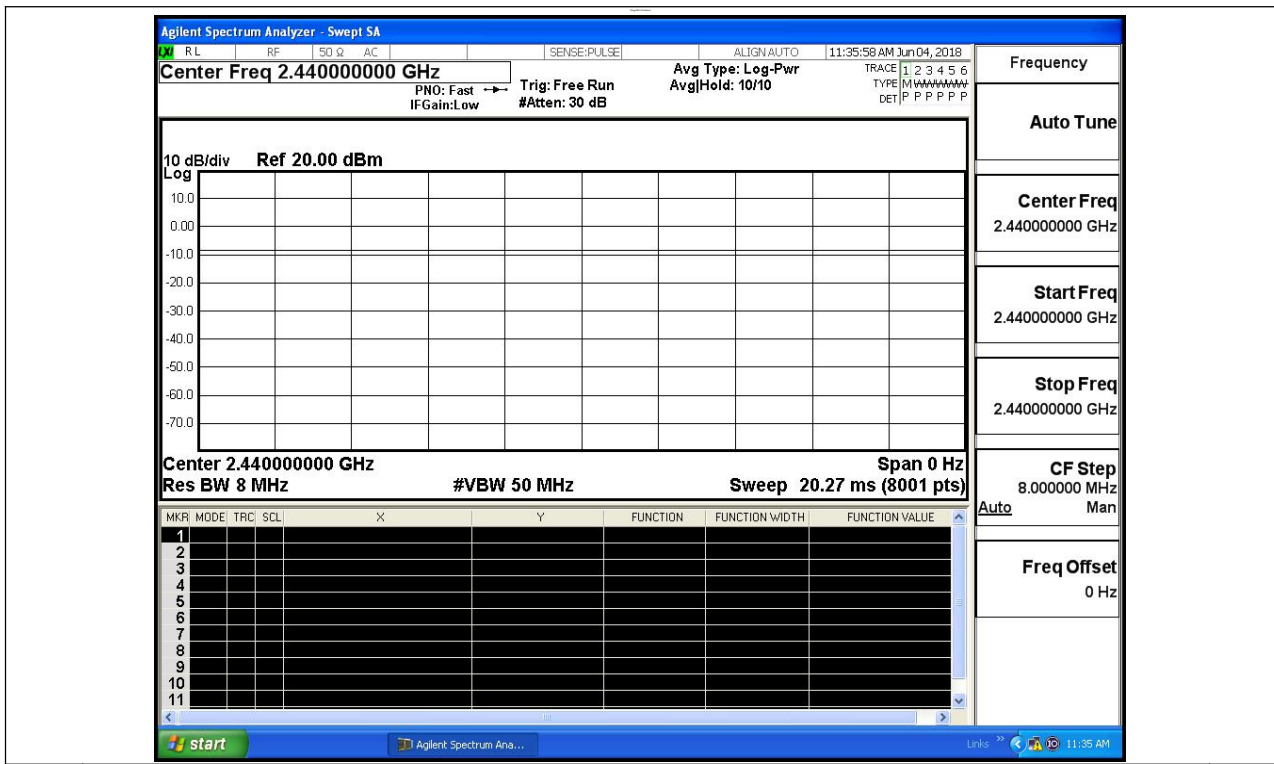


### B.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	-0.731	30	PASS
BT LE	MCH	-1.529	30	PASS
BT LE	HCH	-1.528	30	PASS

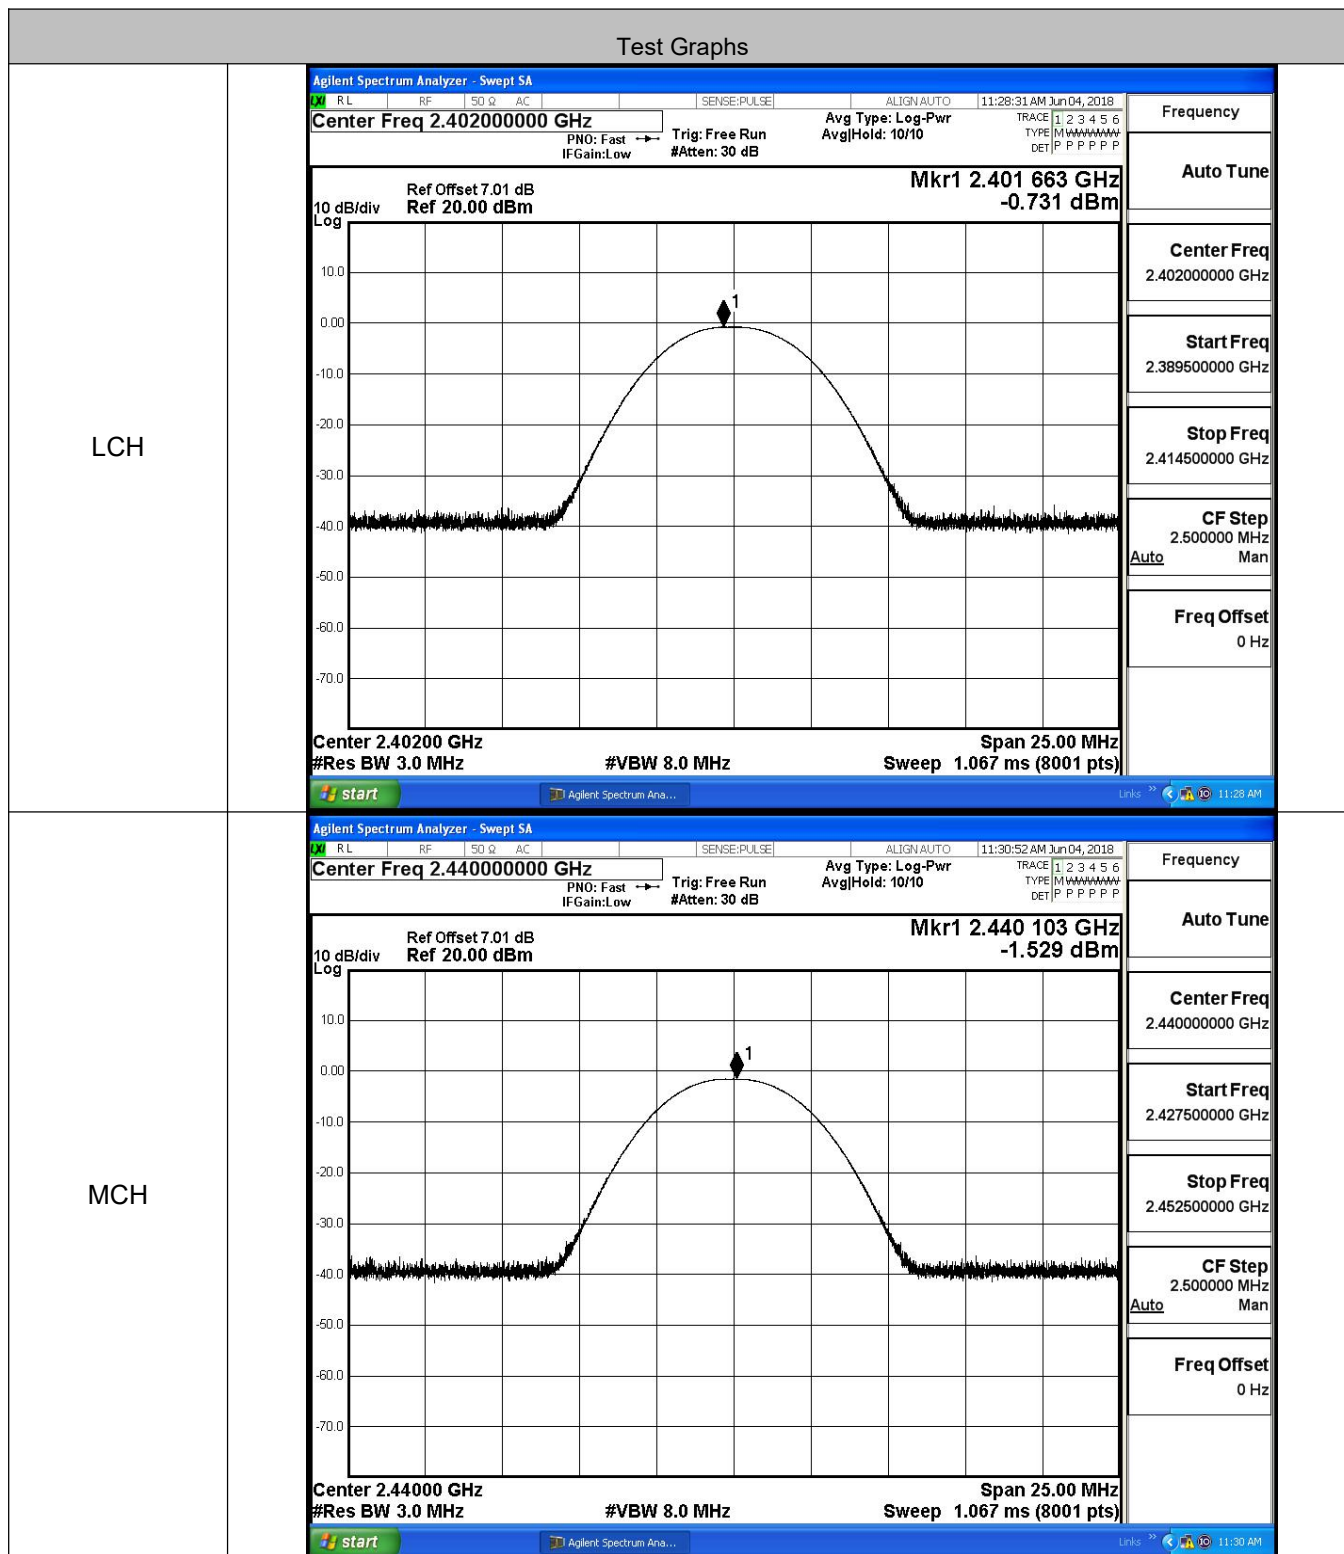


HCH

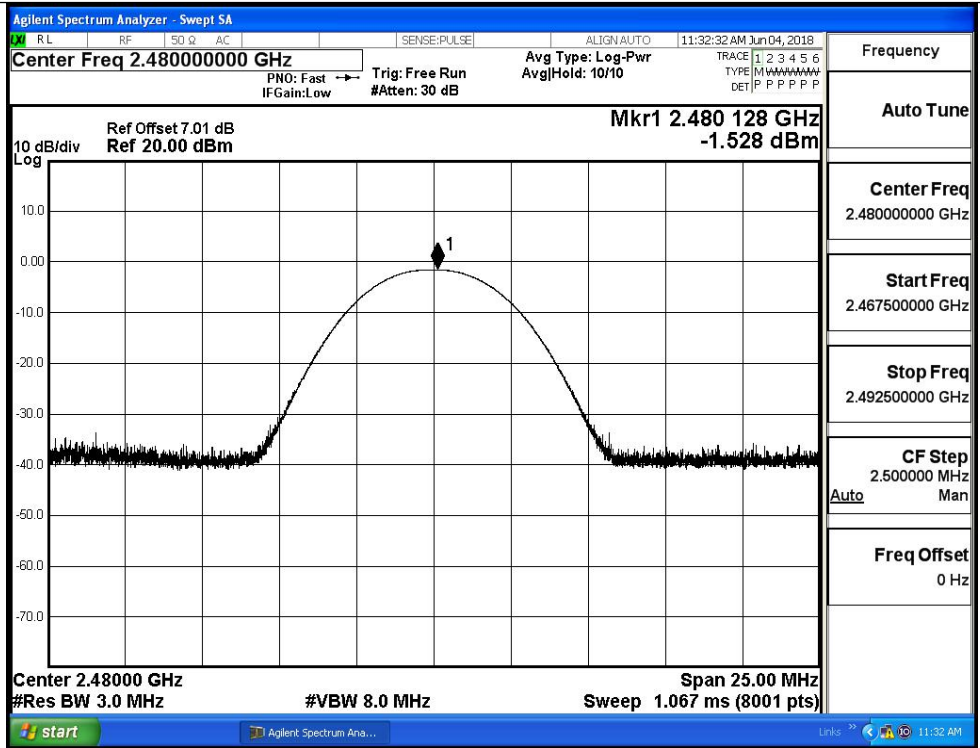


### B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-15.939	8	PASS
BT LE	MCH	-16.552	8	PASS
BT LE	HCH	-16.536	8	PASS

#### Test Graphs

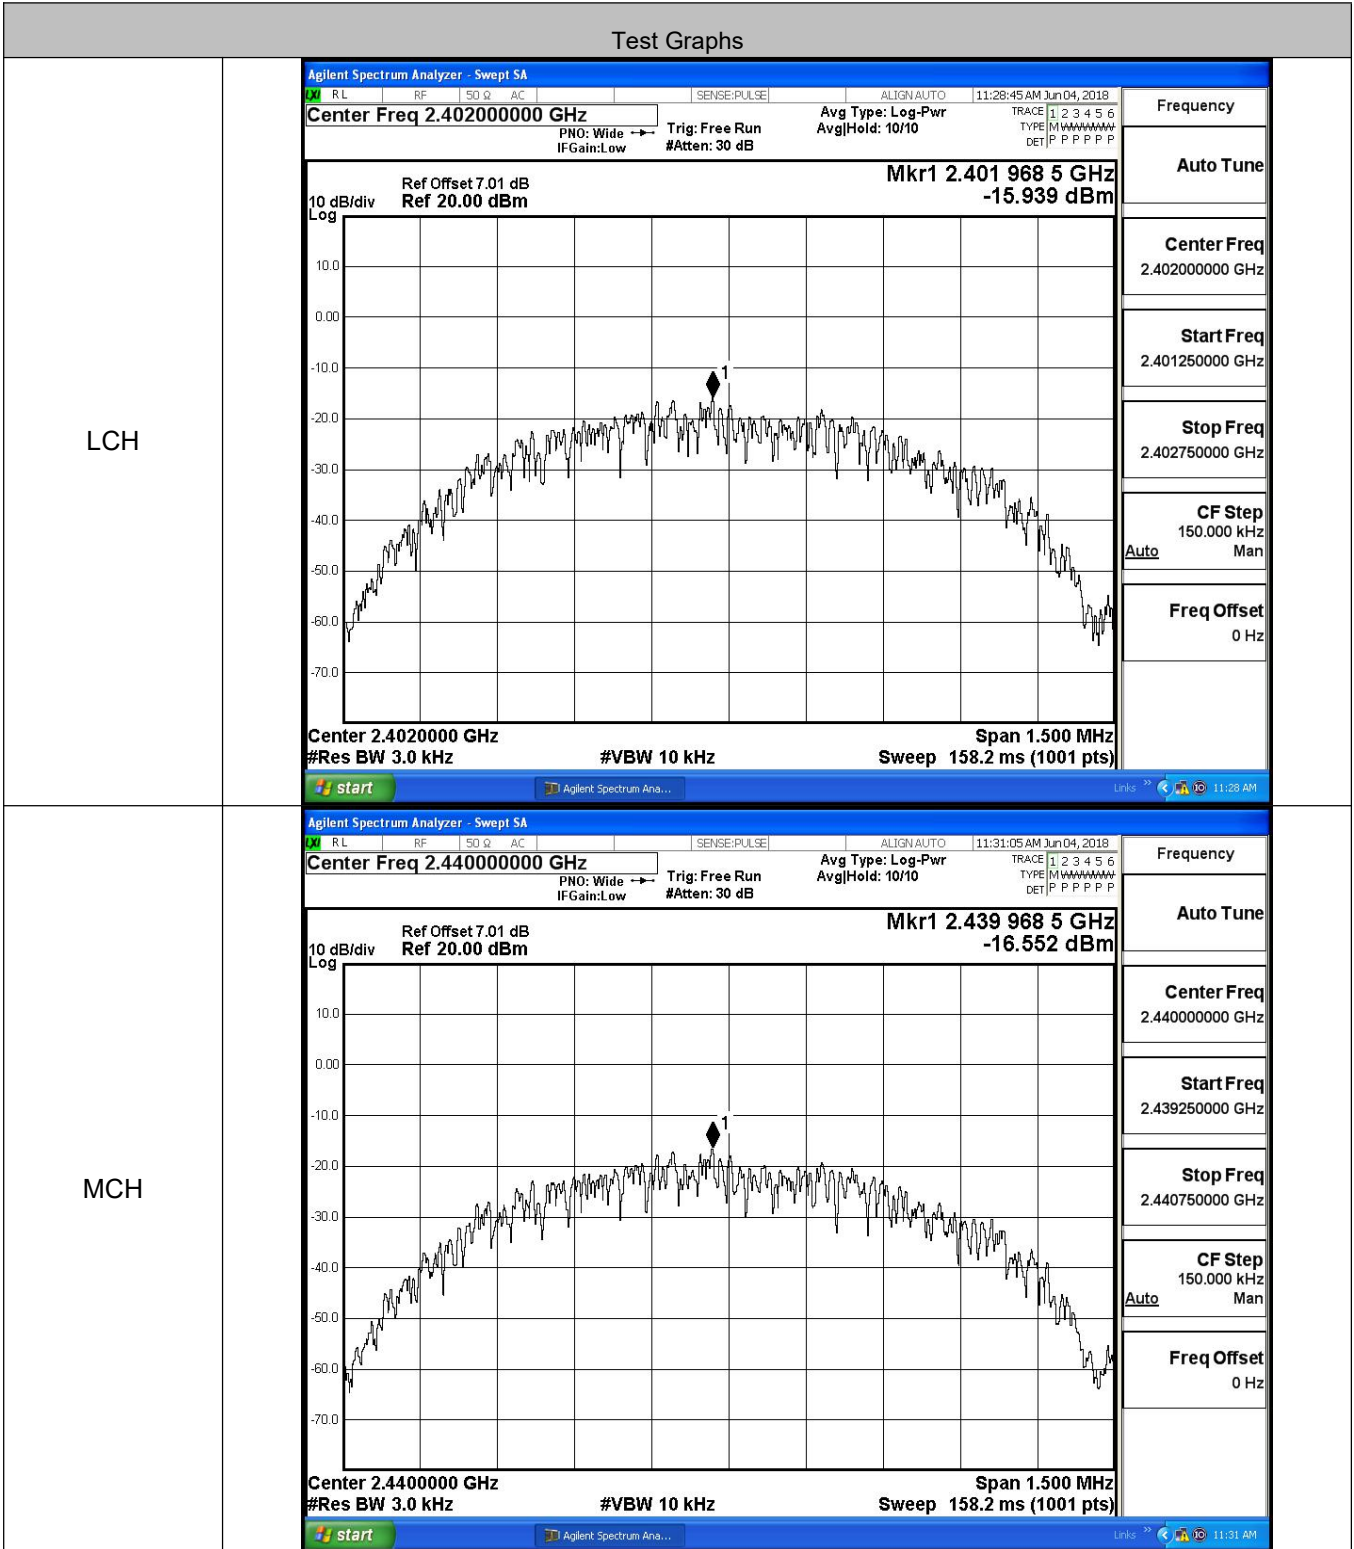

HCH

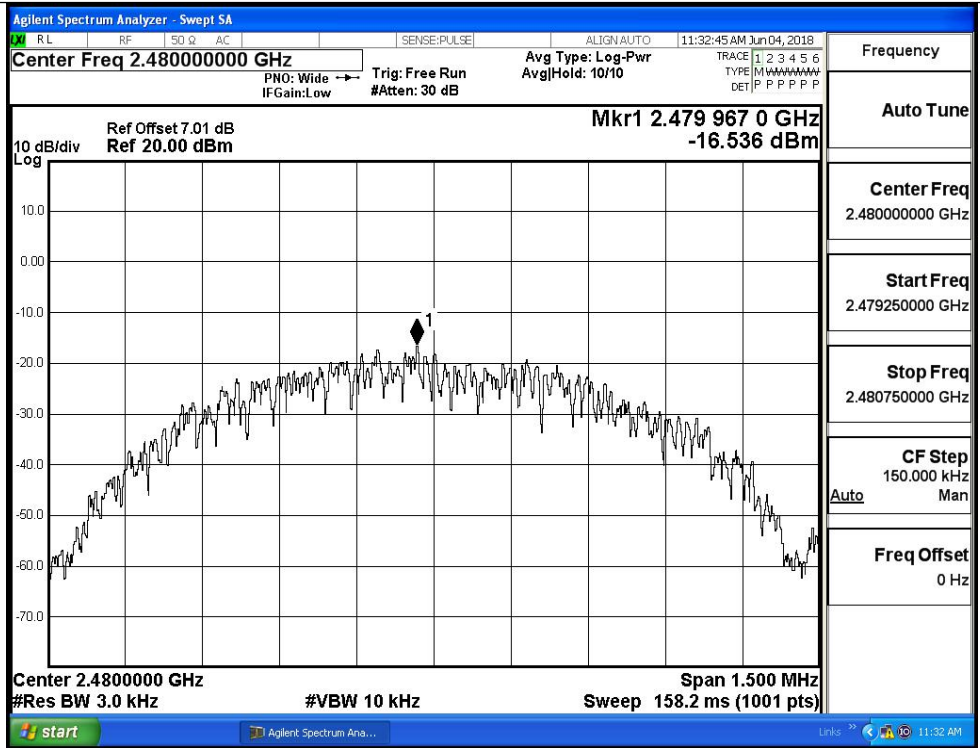


**B.4 6dB Bandwidth**

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.7118	≥0.5	PASS
BT LE	MCH	0.7146	≥0.5	PASS
BT LE	HCH	0.7040	≥0.5	PASS

Test Graphs

LCH	<p><b>Agilent Spectrum Analyzer - Occupied BW</b></p> <p>Center Freq 2.40200000 GHz    Center Freq: 2.402000000 GHz    Radio Std: None          Trig: Free Run    AvgHold: &gt;1/1    Radio Device: BTS          #IFGain: Low    #Atten: 30 dB</p> <p>Ref Offset 7.01 dB    Mkr1 2.4019831 GHz          Ref 20.00 dBm    -1.6411 dBm</p> <p>10 dB/div    Log    Center 2.402 GHz    Span 3 MHz          #Res BW 100 kHz    #VBW 300 kHz    Sweep 1.067 ms</p> <p><b>Occupied Bandwidth</b>    Total Power    5.45 dBm  <b>1.0475 MHz</b></p> <p>Transmit Freq Error    -5.729 kHz    OBW Power    99.00 %          x dB Bandwidth    711.8 kHz    x dB    -6.00 dB</p> <p>start    Agilent Spectrum Ana...    Links    11:28 AM</p>
MCH	<p><b>Agilent Spectrum Analyzer - Occupied BW</b></p> <p>Center Freq 2.44000000 GHz    Center Freq: 2.440000000 GHz    Radio Std: None          Trig: Free Run    AvgHold: 1/1    Radio Device: BTS          #IFGain: Low    #Atten: 30 dB</p> <p>Ref Offset 7.01 dB    Mkr1 2.4399831 GHz          Ref 20.00 dBm    -2.3842 dBm</p> <p>10 dB/div    Log    Center 2.44 GHz    Span 3 MHz          #Res BW 100 kHz    #VBW 300 kHz    Sweep 1.067 ms</p> <p><b>Occupied Bandwidth</b>    Total Power    4.69 dBm  <b>1.0525 MHz</b></p> <p>Transmit Freq Error    -5.597 kHz    OBW Power    99.00 %          x dB Bandwidth    714.6 kHz    x dB    -6.00 dB</p> <p>start    Agilent Spectrum Ana...    Links    11:30 AM</p>



HCH

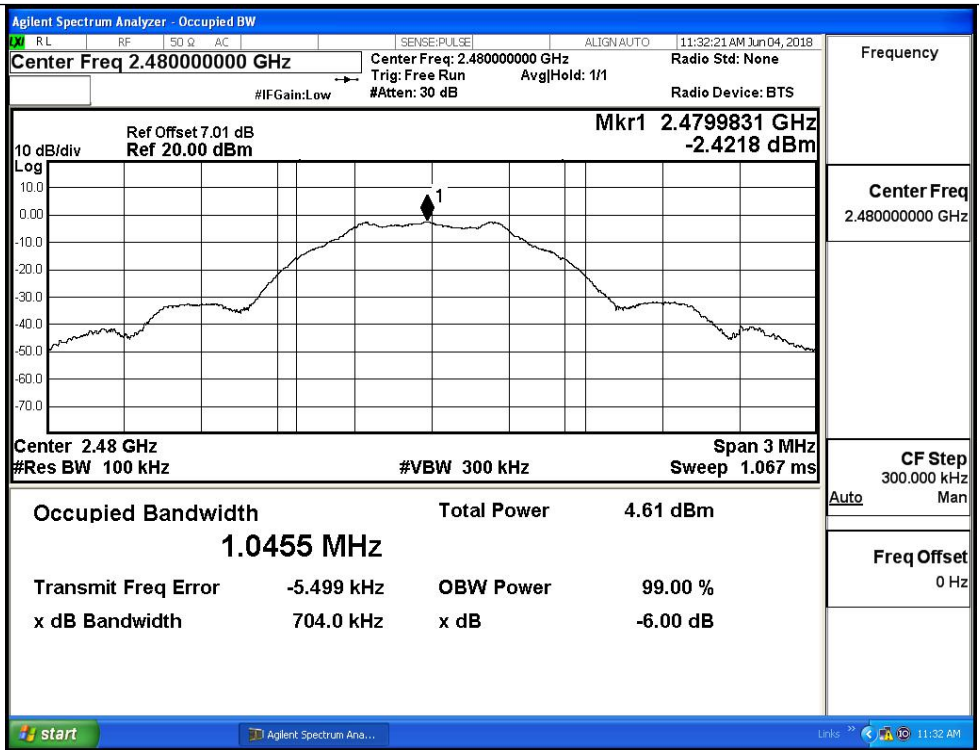

### B.5 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-1.626	-48.074	-21.626	PASS
BT LE	MCH	-2.431	-48.800	-22.431	PASS
BT LE	HCH	-2.453	-49.472	-22.453	PASS

BT LE\_LCH\_Graphs

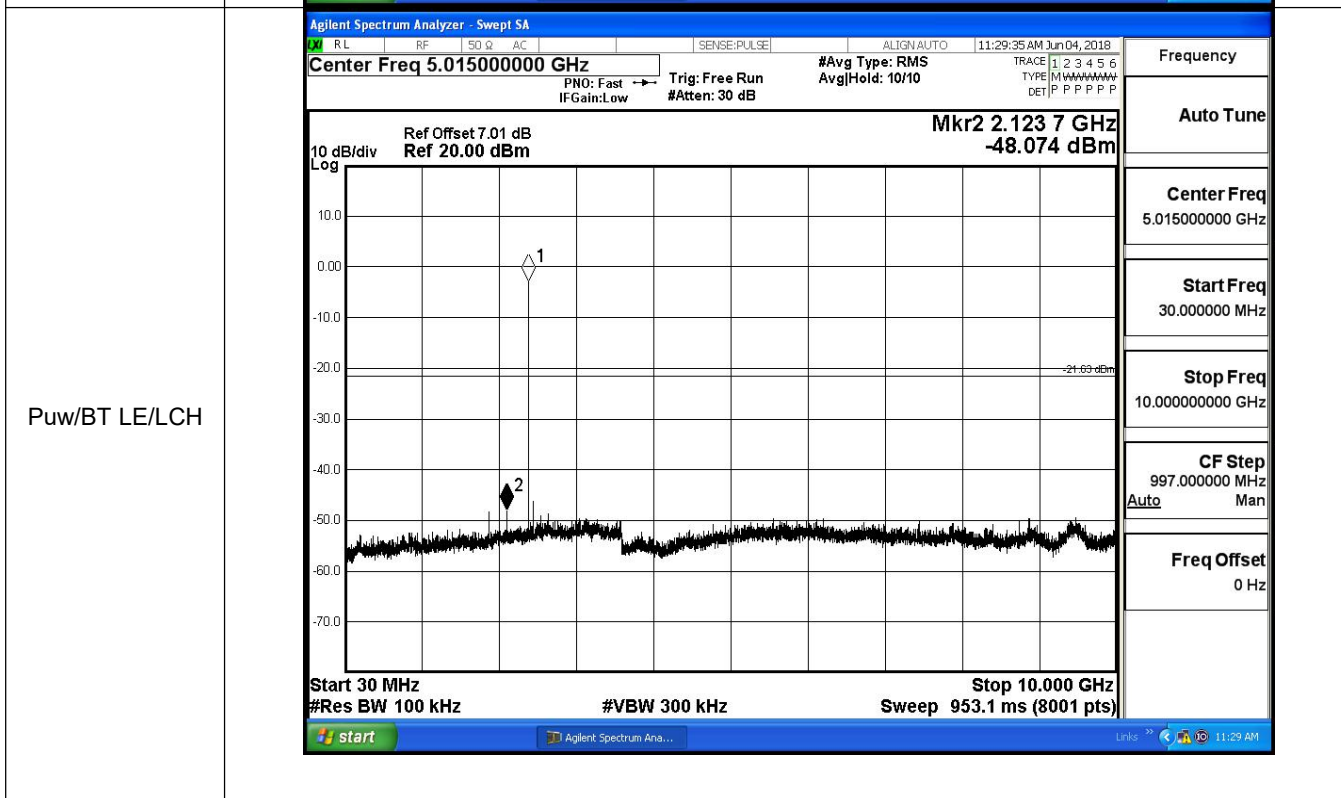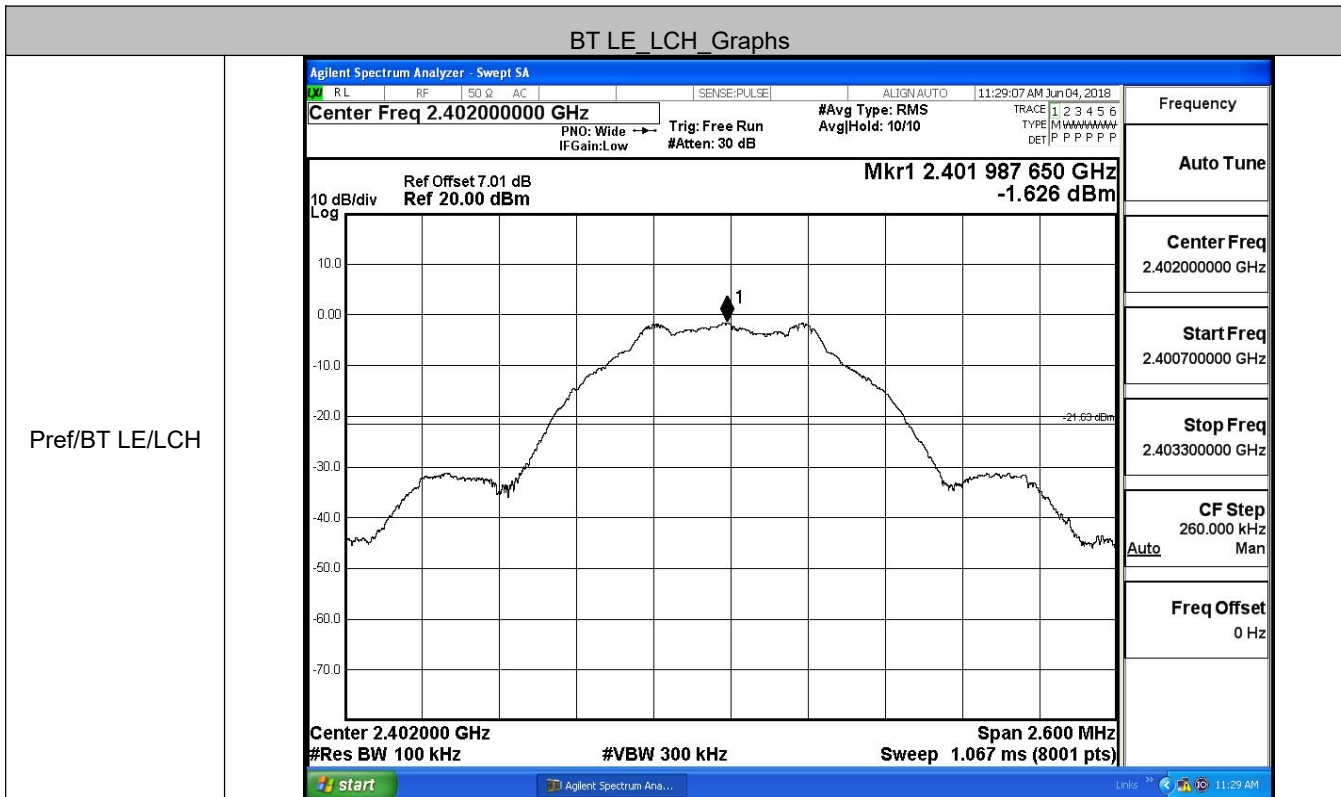




BT LE MCH Graphs

<p>Pref/BT LE/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 11:31:16 AM Jun 04, 2018  <b>Center Freq 2.44000000 GHz</b> PNO: Wide Trig: Free Run #Avg Type: RMS          IFGain:Low #Atten: 30 dB AvgHold: 10/10          Mkr1 2.439 977 900 GHz          Ref Offset 7.01 dB Ref 20.00 dBm -2.431 dBm          10 dB/div Log          Center 2.440000 GHz Span 2.600 MHz          #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.44000000 GHz</p> <p>Start Freq 2.438700000 GHz</p> <p>Stop Freq 2.441300000 GHz</p> <p>CF Step 260.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>Puw/BT LE/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 11:31:44 AM Jun 04, 2018  <b>Center Freq 5.01500000 GHz</b> PNO: Fast Trig: Free Run #Avg Type: RMS          IFGain:Low #Atten: 30 dB AvgHold: 10/10          Mkr2 3.331 3 GHz          Ref Offset 7.01 dB Ref 20.00 dBm -48.800 dBm          10 dB/div Log          Start 30 MHz Stop 10.000 GHz          #Res BW 100 kHz #VBW 300 kHz Sweep 953.1 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 5.01500000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 10.000000000 GHz</p> <p>CF Step 997.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>

BT LE HCH Graphs

Pref/BT LE/HCH

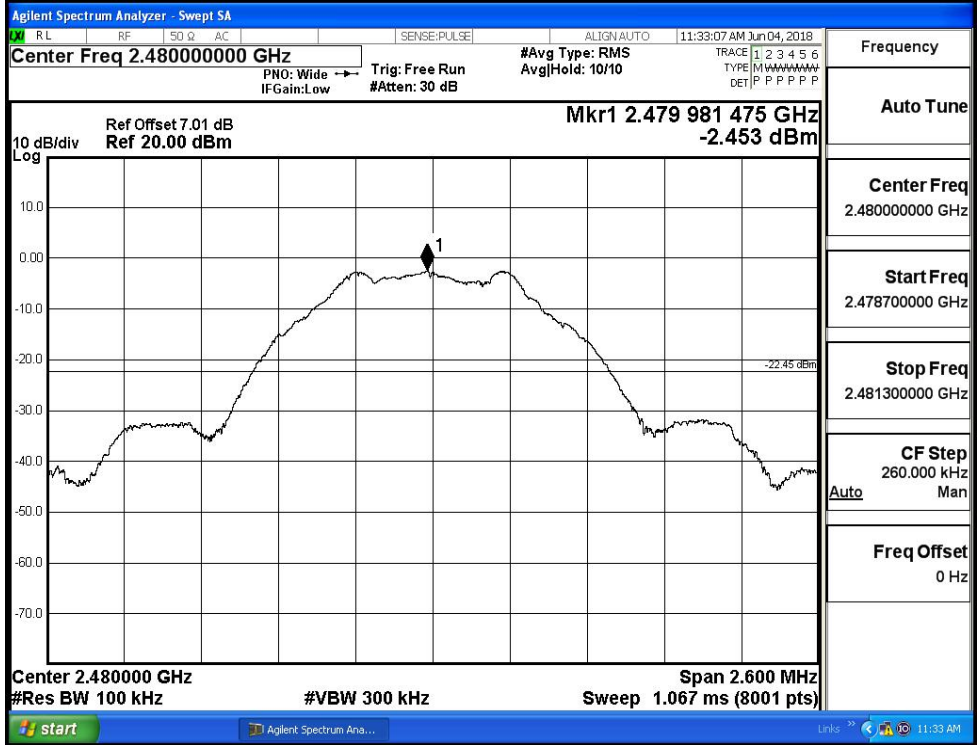

Puw/BT LE/HCH



### B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-1.454	-50.988	-21.45	PASS
BT LE	HCH	-2.235	-50.965	-22.24	PASS


#### Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.357000000 GHz                  Ref Offset 7.01 dB                  Ref 20.00 dBm                  Mkr4 2.361 124 GHz                  -50.988 dBm                  Start 2.31000 GHz                  Stop 2.40400 GHz                  #Res BW 100 kHz                  #VBW 300 kHz                  Sweep 9.067 ms (8001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.401 979 GHz</td><td>-1.454 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.400 000 GHz</td><td>-52.789 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.390 000 GHz</td><td>-54.575 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.361 124 GHz</td><td>-50.988 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.401 979 GHz	-1.454 dBm				2	N	f		2.400 000 GHz	-52.789 dBm				3	N	f		2.390 000 GHz	-54.575 dBm				4	N	f		2.361 124 GHz	-50.988 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.357000000 GHz</p> <p>Start Freq 2.310000000 GHz</p> <p>Stop Freq 2.404000000 GHz</p> <p>CF Step 9.400000 MHz</p> <p>Freq Offset 0 Hz</p>
	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	f		2.401 979 GHz	-1.454 dBm																																										
2	N	f		2.400 000 GHz	-52.789 dBm																																										
3	N	f		2.390 000 GHz	-54.575 dBm																																										
4	N	f		2.361 124 GHz	-50.988 dBm																																										
HCH	<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.489000000 GHz                  Ref Offset 7.01 dB                  Ref 20.00 dBm                  Mkr4 2.494 423 00 GHz                  -50.965 dBm                  Start 2.47800 GHz                  Stop 2.50000 GHz                  #Res BW 100 kHz                  #VBW 300 kHz                  Sweep 2.133 ms (8001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.479 985 50 GHz</td><td>-2.235 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.483 500 00 GHz</td><td>-53.967 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td>-54.399 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.494 423 00 GHz</td><td>-50.965 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.479 985 50 GHz	-2.235 dBm				2	N	f		2.483 500 00 GHz	-53.967 dBm				3	N	f		2.500 000 00 GHz	-54.399 dBm				4	N	f		2.494 423 00 GHz	-50.965 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.489000000 GHz</p> <p>Start Freq 2.478000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>
	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	f		2.479 985 50 GHz	-2.235 dBm																																										
2	N	f		2.483 500 00 GHz	-53.967 dBm																																										
3	N	f		2.500 000 00 GHz	-54.399 dBm																																										
4	N	f		2.494 423 00 GHz	-50.965 dBm																																										


### B.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-45.16	2.0	0	52.10	PEAK	74	PASS
		Ant1	2310.0	-54.96	2.0	0	42.30	AV	54	PASS
		Ant1	2390.0	-45.00	2.0	0	52.26	PEAK	74	PASS
		Ant1	2390.0	-54.70	2.0	0	42.56	AV	54	PASS
	2480	Ant1	2483.5	-44.47	2.0	0	52.79	PEAK	74	PASS
		Ant1	2483.5	-54.41	2.0	0	42.85	AV	54	PASS
		Ant1	2500.0	-43.55	2.0	0	53.71	PEAK	74	PASS
		Ant1	2500.0	-54.30	2.0	0	42.96	AV	54	PASS


Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_PEAK

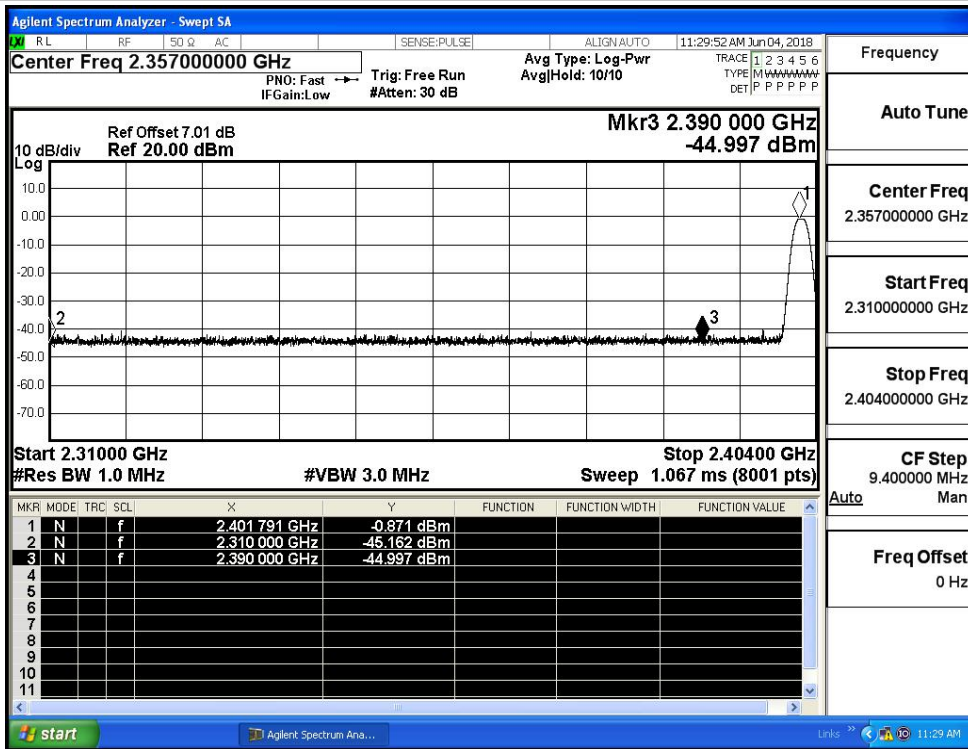

Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_AV

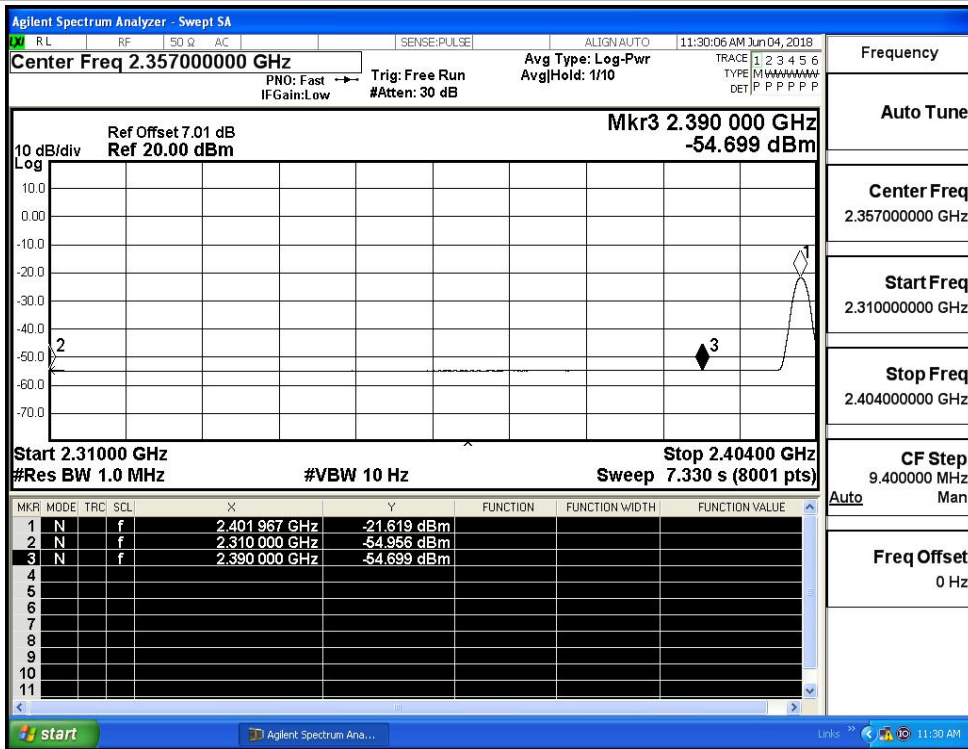

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_PEAK

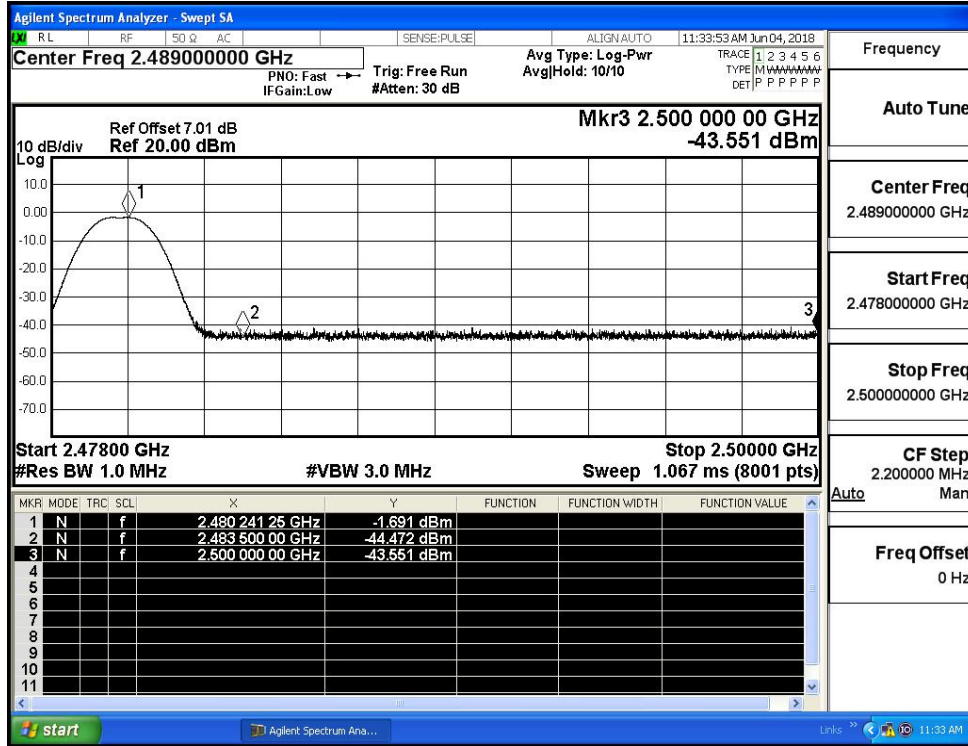

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_AV

