



RF TEST REPORT

Product Name: Smart Spot Camera

Model Name: M1

FCC ID: 2A3MAM1

IC: 27538-M1

Issued For : Lepro Innovation INC

3651 Lindell Road Suite D1048, Las Vegas, NV 89103, USA

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT24J185RF02

Sample Received Date: Nov. 04, 2024

Date of Test: Nov. 04, 2024 ~ Feb. 12, 2025

Date of Issue: Feb. 12, 2025

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Lepro Innovation INC
Address: 3651 Lindell Road Suite D1048, Las Vegas, NV 89103, USA
Manufacturer: Lepro Innovation INC
Address: 3651 Lindell Road Suite D1048, Las Vegas, NV 89103, USA
Product Name: Smart Spot Camera
Trademark: Lepro
Model Name: M1
Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.247, Subpart C RSS-247 Issue 3, August 2023 RSS-Gen Issue 5, February 2021 ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3. EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION MEASUREMENT	17
4. CONDUCTED SPURIOUS & BAND EDGE EMISSION	28
4.1 LIMIT	28
4.2 TEST PROCEDURE	28
4.3 DEVIATION FROM STANDARD	28
4.4 TEST SETUP	28
4.5 EUT OPERATION CONDITIONS	28
4.6 TEST RESULTS	28
5. POWER SPECTRAL DENSITY TEST	29
5.1 LIMIT	29
5.2 TEST PROCEDURE	29
5.3 DEVIATION FROM STANDARD	29
5.4 TEST SETUP	29
5.5 EUT OPERATION CONDITIONS	29
5.6 TEST RESULTS	29
6. BANDWIDTH TEST	30
6.1 LIMIT	30
6.2 TEST PROCEDURE	30
6.3 DEVIATION FROM STANDARD	30
6.4 TEST SETUP	30
6.5 EUT OPERATION CONDITIONS	30
6.6 TEST RESULTS	30



7. PEAK OUTPUT POWER TEST	31
7.1 LIMIT	31
7.2 TEST PROCEDURE	31
7.3 DEVIATION FROM STANDARD	31
7.4 TEST SETUP	31
7.5 EUT OPERATION CONDITIONS	31
7.6 TEST RESULTS	31
8. ANTENNA REQUIREMENT	32
8.1 STANDARD REQUIREMENT	32
8.2 EUT ANTENNA	32
9. FREQUENCY STABILITY	33
9.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	33
9.2 TEST PROCEDURE	33
9.3 TEST RESULT	33
APPENDIX I - TEST RESULTS	34
DUTY CYCLE	34
MAXIMUM PEAK CONDUCTED OUTPUT POWER	41
-6DB BANDWIDTH	42
OCCUPIED CHANNEL BANDWIDTH	49
MAXIMUM POWER SPECTRAL DENSITY LEVEL	56
BAND EDGE	63
CONDUCTED RF SPURIOUS EMISSION	72
FREQUENCY STABILITY	85
APPENDIX II - MEASUREMENT PHOTOS	86



Revision History

Rev.	Issue Date	Contents
00	Feb. 12, 2025	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C RSS-247 Issue 3			
Standard Section	Test Item	Judgment	Remark
15.207 RSS-Gen 8.8	Conducted Emission	PASS	--
15.247 (a)(2) RSS-Gen 6.7 RSS-247 5.2 a)	6dB&99% Bandwidth	PASS	--
15.247 (b)(3) RSS-247 5.4 d)	Output Power	PASS	--
15.209 RSS-Gen 8.9/8.10	Radiated Spurious Emission	PASS	--
15.247 (d) RSS-247 5.5 RSS-Gen 8.9/8.10	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e) RSS-247 5.2 b)	Power Spectral Density	PASS	--
15.205 RSS-Gen 8.9/8.10	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ Part 15.209(a) RSS-247 5.5 RSS-Gen 8.9/8.10	Band Edge Emission	PASS	--
15.203 RSS-Gen 6.8	Antenna Requirement	PASS	--
RSS-Gen 6.11/8.11	Frequency Stability	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF Output Power, Conducted	$\pm 0.71\text{dB}$
2	Power Spectral Density, Conducted	$\pm 1.57\text{ dB}$
3	Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
4	Conducted emission	$\pm 2.80\text{dB}$
5	All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
6	All Emissions, Radiated (30MHz-1GHz)	$\pm 4.40\text{dB}$
7	All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	Smart Spot Camera	
Trademark:	Lepro	
Model Name:	M1	
Series Model:	N/A	
Model Difference:	N/A	
Product Description:	Operation Frequency:	802.11b/g/n/ax(20MHz): 2412~2462 MHz 802.11n/ax(40MHz):2422~2452MHz
	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ax(OFDM,OFDMA): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024QAM
	Number of Channel:	802.11b/g/n/ax: 11CH 802.11n/ax: 7CH
	Antenna Designation:	FPC
	Antenna Gain(dBi):	3.14
Channel List:	Please refer to the Note 3.	
Adapter:	Input: 100-240V ~ 50/60Hz 0.3A Output: 5V, 1A	
Hardware Version:	1.0	
Software Version:	1.0	
Connecting I/O Port(s):	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.



3.

Operation Frequency of channel			
802.11b/g/n/ax(20MHz)		Channel List for 802.11n/ax(40MHz)	
Channel	Frequency	Channel	Frequency
01	2412	03	2422
02	2417	04	2427
03	2422	05	2432
04	2427	06	2437
05	2432	07	2442
06	2437	08	2447
07	2442	09	2452
08	2447		
09	2452		
10	2457		
11	2462		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n/ax(HT20)		For 802.11n/ax(HT40)	
Channel	Freq.(MHz)	Channel	Freq.(MHz)
01	2412	03	2422
06	2437	06	2437
11	2462	09	2452



2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n/ax HT20 CH1	MCS 0
Mode 8	TX IEEE 802.11n/ax HT20 CH6	MCS 0
Mode 9	TX IEEE 802.11n/ax HT20 CH11	MCS 0
Mode 10	TX IEEE 802.11n/ax HT40 CH3	MCS 0
Mode 11	TX IEEE 802.11n/ax HT40 CH6	MCS 0
Mode 12	TX IEEE 802.11n/ax HT40 CH9	MCS 0

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode13: Keeping TX + WLAN Link



2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: 2.4G WIFI	
SecureCRT_6.5.0.380	Mode Or Modulation type	Power setting
	b	-8
	g	-14
	n20	16
	n40	16
	ax20	16
	ax40	16

2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
Adapter	SHENZHEN TIANYIN ELECTRONICS Co., Ltd	TPA-418G0510 0VU01	N/A	Input: 100-240V ~ 50/60Hz 0.3A Output: 5V, 1A

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Mobile phone	Apple	iPhone 8 plus	N/A	N/A
Micro SD Card	OURUIXI	ORX-031	N/A	N/A
Laptop	Lenovo	HKF-16	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2024.03.09	2025.03.08
LISN	COM-POWER	LI-115	02032	2024.03.09	2025.03.08
LISN	SCHWARZBECK	NNLK 8122	00160	2024.03.09	2025.03.08
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2024.03.09	2025.03.08
Temperature & Humidity	KTJ	TA218B	N.A	2024.03.09	2025.03.08
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2024.03.09	2025.03.08
Active loop Antenna	ETS	6502	00049544	2023.10.13	2025.10.12
Spectrum Analyzer	Keysight	N9010B	MY60242508	2024.08.05	2025.08.04
Bilog Antenna(30M-1G)	SCHWARZBECK	VULB 9168	2705	2022.12.12	2025.12.11
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2022.06.02	2025.06.01
Horn Antenna(18-40G)	A-INFO	LB-180400-KF	J211060273	2022.06.08	2025.06.07
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2024.03.09	2025.03.08
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2024.03.09	2025.03.08
Pre-amplifier(18-40G)	com-mw	LNPA_18-40-01	18050003	2024.03.09	2025.03.08
Wireless Communications Test Set	R&S	CMW 500	137737	2024.03.09	2025.03.08
Antenna Tower	SAEMC	BK-4AT-BS-D	SK2021093008	N.A	N.A
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2024.03.11	2025.03.10
Testing Software	EMC-I_V1.4.0.3_SKET				

RF Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2024.08.05	2025.08.04
Signal Analyzer	Keysight	N9020A	MY50530994	2024.03.09	2025.03.08
RF Automatic Test system	MW	MW100-RFCB	MW220322LG-033	2024.03.09	2025.03.08
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2024.03.09	2025.03.08
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.03.09	2025.03.08
Attenuator	eastsheep	90db	N.A	2024.03.09	2025.03.08
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2024.03.11	2025.03.10
Digital multimeter	MASTECH	MS8261	MBGBC83053	2024.03.09	2025.03.08
Testing Software	MTS8310_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

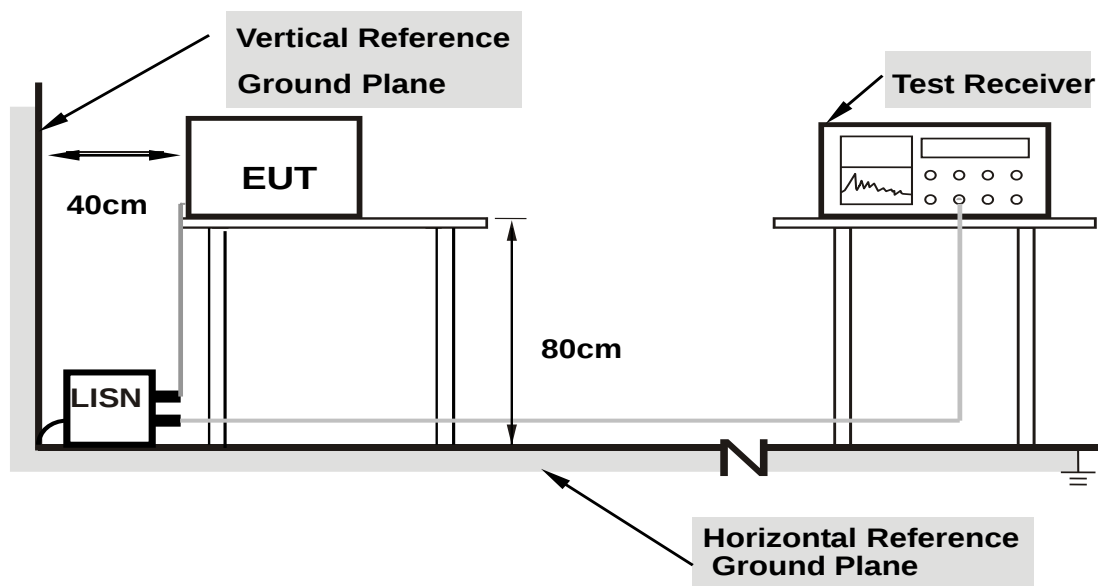

- Note: 1. Support units were connected to second LISN.**
- 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.**


3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULT


Project: LGT24J185	Test Engineer: LiuH
EUT: Smart Spot Camera	Temperature: 23.9°C
M/N: M1	Humidity: 46%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-01-20
Test Mode: TX 802.11b 2412	
Note:	

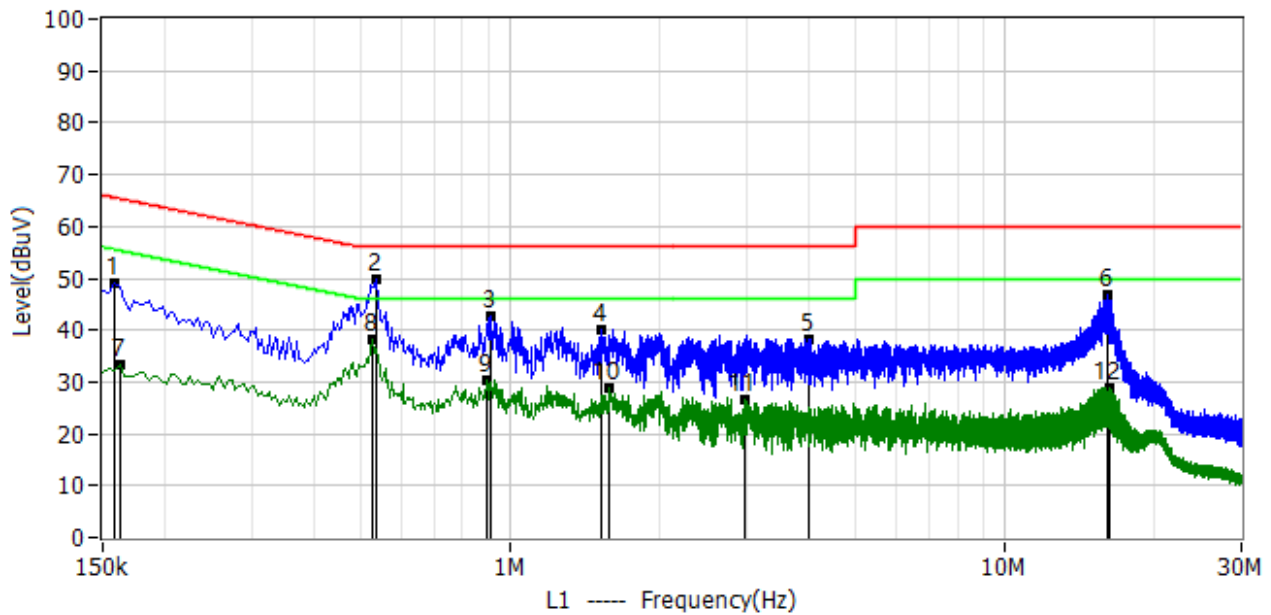

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.158	38.49	10.58	49.07	65.57	-16.50	QP	L1
2*	0.534	39.32	10.57	49.89	56.00	-6.11	QP	L1
3*	0.910	32.22	10.65	42.87	56.00	-13.13	QP	L1
4*	1.530	29.20	10.85	40.05	56.00	-15.95	QP	L1
5*	4.018	27.14	11.14	38.28	56.00	-17.72	QP	L1
6*	16.154	35.25	11.45	46.70	60.00	-13.30	QP	L1
7*	0.162	22.80	10.59	33.39	55.36	-21.97	AV	L1
8*	0.526	27.57	10.57	38.14	46.00	-7.86	AV	L1
9*	0.894	19.69	10.65	30.34	46.00	-15.66	AV	L1
10*	1.582	17.90	10.86	28.76	46.00	-17.24	AV	L1
11*	2.970	15.41	11.19	26.60	46.00	-19.40	AV	L1
12*	16.186	17.50	11.45	28.95	50.00	-21.05	AV	L1



Project: LGT24J185	Test Engineer: LiuH
EUT: Smart Spot Camera	Temperature: 23.9°C
M/N: M1	Humidity: 46%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-01-20
Test Mode: TX 802.11b 2412	
Note:	

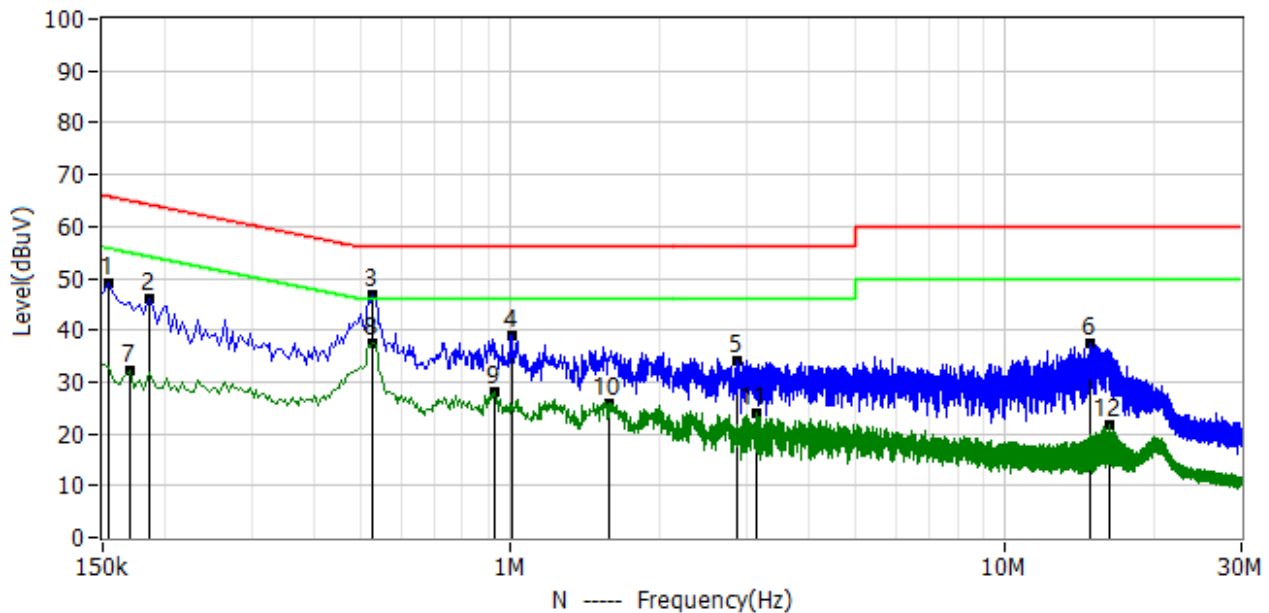

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.154	38.58	10.57	49.15	65.78	-16.63	QP	N
2*	0.186	35.60	10.56	46.16	64.21	-18.06	QP	N
3*	0.526	36.39	10.54	46.93	56.00	-9.07	QP	N
4*	1.010	28.54	10.54	39.08	56.00	-16.92	QP	N
5*	2.870	23.42	10.78	34.20	56.00	-21.80	QP	N
6*	14.778	26.01	11.36	37.37	60.00	-22.63	QP	N
7*	0.170	21.76	10.56	32.32	54.96	-22.64	AV	N
8*	0.526	27.07	10.54	37.61	46.00	-8.39	AV	N
9*	0.926	17.38	10.55	27.93	46.00	-18.07	AV	N
10*	1.578	15.31	10.67	25.98	46.00	-20.02	AV	N
11*	3.154	13.13	10.79	23.92	46.00	-22.08	AV	N
12*	16.246	10.38	11.44	21.82	50.00	-28.18	AV	N



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a), RSS-Gen and RSS-247 (5.5) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2310 to 2430 MHz Upper Band Edge: 2445 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

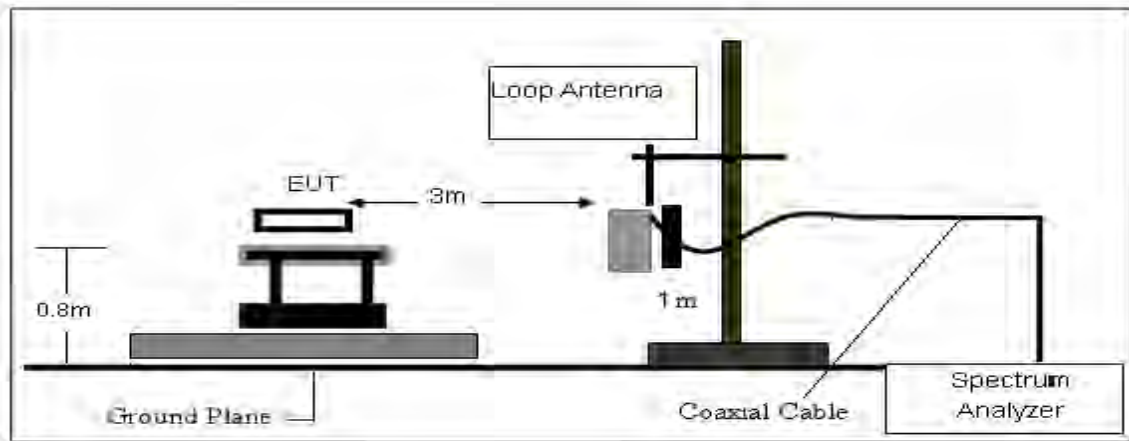

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

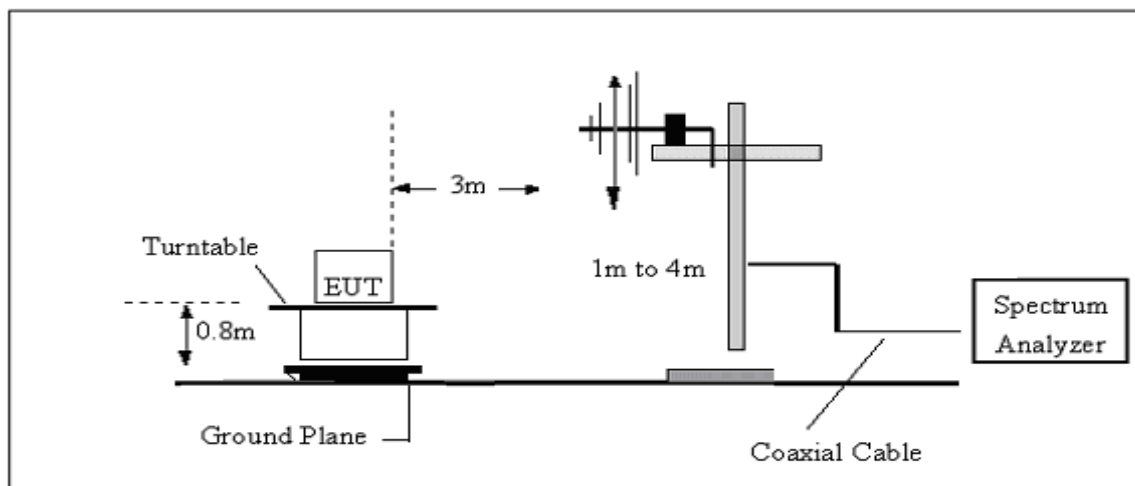

(C) Radiated Emission Test-Up Frequency Above 1GHz

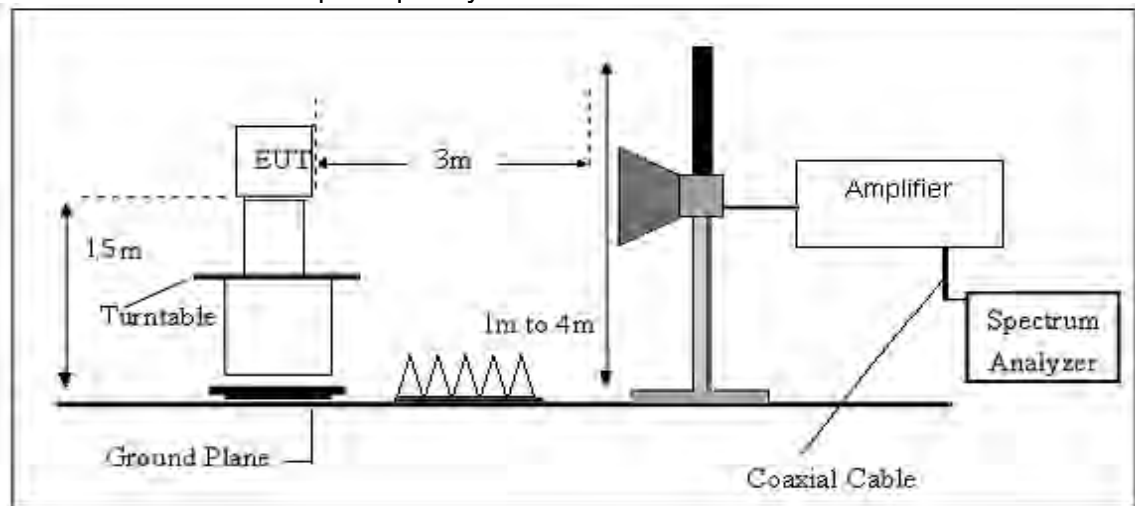

3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



3.2.6 TEST RESULT

Results of Radiated Emissions (9 KHz~30MHz)

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Remark
1*	-	-	-	-	-	-	-	See Note

Note:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.




Results of Radiated Emissions (30MHz~1000MHz)

Note: 1. All mode has been tested, only shown the worst case data,
2. The peak value is less than the AV limit, so no AV data is displayed.

Project: LGT24J185	Test Engineer: LiuH
EUT: Smart Spot Camera	Temperature: 24°C
M/N: M1	Humidity: 47%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-02-08
Test Mode: TX 802.11b 2412	
Note:	

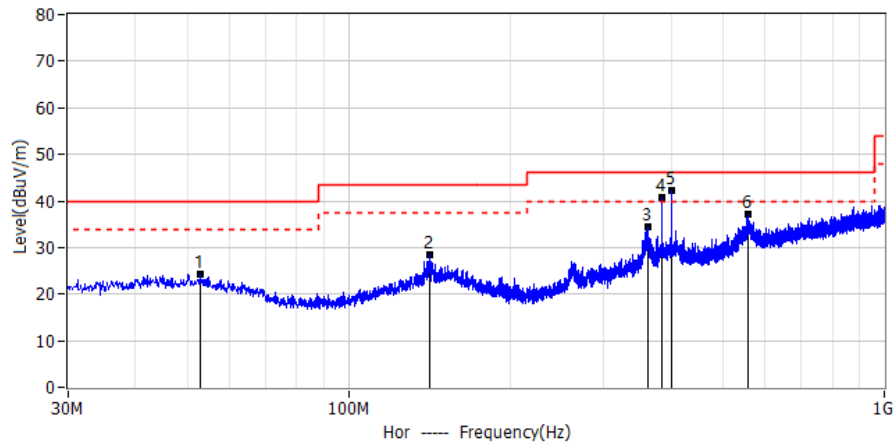

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	53.038	3.60	20.67	24.27	40.00	-15.73	QP	Hor
2*	142.035	7.48	20.97	28.45	43.50	-15.05	QP	Hor
3*	361.498	11.32	23.05	34.37	46.00	-11.63	QP	Hor
4*	384.050	17.15	23.52	40.67	46.00	-5.33	QP	Hor
5*	400.055	17.96	24.35	42.31	46.00	-3.69	QP	Hor
6*	555.740	9.34	27.70	37.04	46.00	-8.96	QP	Hor

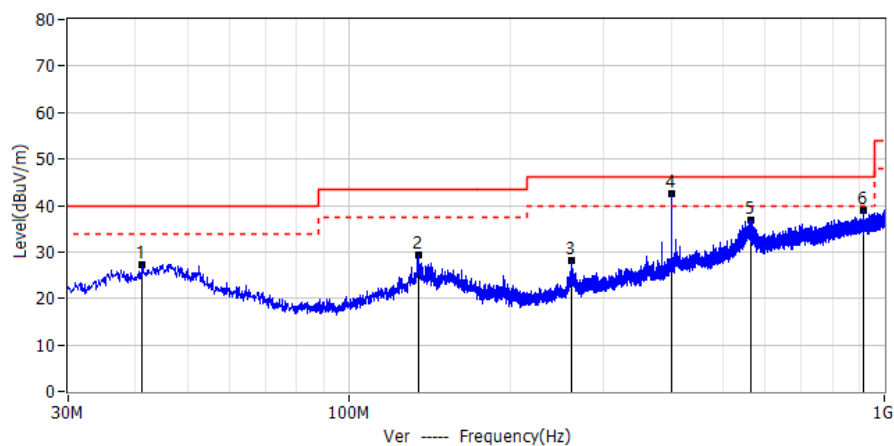

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	41.276	6.95	20.42	27.37	40.00	-12.63	QP	Ver
2*	135.003	8.78	20.72	29.50	43.50	-14.00	QP	Ver
3*	260.739	7.99	20.13	28.12	46.00	-17.88	QP	Ver
4*	400.055	18.34	24.35	42.69	46.00	-3.31	QP	Ver
5*	563.864	9.32	27.49	36.81	46.00	-9.19	QP	Ver
6*	913.549	6.06	32.95	39.01	46.00	-6.99	QP	Ver



Results of Radiated Emissions (Above 1000MHz)

Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
Low Channel (2412 MHz)							
3264.63	56.44	-8.45	47.99	74.00	-26.01	PK	Vertical
3264.63	46.02	-8.45	37.57	54.00	-16.43	AV	Vertical
3264.68	56.01	-8.45	47.56	74.00	-26.44	PK	Horizontal
3264.68	46.35	-8.45	37.90	54.00	-16.10	AV	Horizontal
4824.53	54.02	-6.09	47.93	74.00	-26.07	PK	Vertical
4824.53	45.15	-6.09	39.06	54.00	-14.94	AV	Vertical
4824.60	54.75	-6.09	48.66	74.00	-25.34	PK	Horizontal
4824.60	45.32	-6.09	39.23	54.00	-14.77	AV	Horizontal
5359.82	57.69	-6.68	51.01	74.00	-22.99	PK	Vertical
5359.82	48.31	-6.68	41.63	54.00	-12.37	AV	Vertical
5359.74	57.51	-6.68	50.83	74.00	-23.17	PK	Horizontal
5359.74	47.68	-6.68	41.00	54.00	-13.00	AV	Horizontal
7235.82	60.89	-8.13	52.76	74.00	-21.24	PK	Vertical
7235.82	50.90	-8.13	42.77	54.00	-11.23	AV	Vertical
7235.67	60.53	-8.13	52.40	74.00	-21.60	PK	Horizontal
7235.69	50.07	-8.13	41.94	54.00	-12.06	AV	Vertical
Middle Channel (2437 MHz)							
3264.81	55.64	-8.45	47.19	74.00	-26.81	PK	Vertical
3264.81	45.43	-8.45	36.98	54.00	-17.02	AV	Vertical
3264.83	56.34	-8.45	47.89	74.00	-26.11	PK	Horizontal
3264.83	45.40	-8.45	36.95	54.00	-17.05	AV	Horizontal
4874.57	54.69	-6.09	48.60	74.00	-25.40	PK	Vertical
4874.57	44.31	-6.09	38.22	54.00	-15.78	AV	Vertical
4874.34	55.44	-6.09	49.35	74.00	-24.65	PK	Horizontal
4874.34	44.26	-6.09	38.17	54.00	-15.83	AV	Horizontal
5359.80	56.73	-6.68	50.05	74.00	-23.95	PK	Vertical
5359.80	47.16	-6.68	40.48	54.00	-13.52	AV	Vertical
5359.57	57.41	-6.68	50.73	74.00	-23.27	PK	Horizontal
5359.57	47.70	-6.68	41.02	54.00	-12.98	AV	Horizontal
7310.96	59.56	-8.13	51.43	74.00	-22.57	PK	Vertical
7310.96	50.92	-8.13	42.79	54.00	-11.21	AV	Vertical
7310.88	60.06	-8.13	51.93	74.00	-22.07	PK	Horizontal
7310.88	50.10	-8.13	41.97	54.00	-12.03	AV	Horizontal
High Channel (2462 MHz)							
3264.82	56.26	-8.45	47.81	74.00	-26.19	PK	Vertical



3264.82	46.74	-8.45	38.29	54.00	-15.71	AV	Vertical
3264.73	55.50	-8.45	47.05	74.00	-26.95	PK	Horizontal
3264.73	45.25	-8.45	36.80	54.00	-17.20	AV	Horizontal
4924.38	54.81	-6.09	48.72	74.00	-25.28	PK	Vertical
4924.38	45.43	-6.09	39.34	54.00	-14.66	AV	Vertical
4924.44	54.97	-6.09	48.88	74.00	-25.12	PK	Horizontal
4924.44	45.55	-6.09	39.46	54.00	-14.54	AV	Horizontal
5359.65	57.73	-6.68	51.05	74.00	-22.95	PK	Vertical
5359.65	47.92	-6.68	41.24	54.00	-12.76	AV	Vertical
5359.77	56.88	-6.68	50.20	74.00	-23.80	PK	Horizontal
5359.77	46.97	-6.68	40.29	54.00	-13.71	AV	Horizontal
7385.83	60.72	-8.13	52.59	74.00	-21.41	PK	Vertical
7385.83	50.85	-8.13	42.72	54.00	-11.28	AV	Vertical
7385.81	59.79	-8.13	51.66	74.00	-22.34	PK	Horizontal
7385.81	49.58	-8.13	41.45	54.00	-12.55	AV	Horizontal

Remark:

In frequency ranges 18~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.



3.2.7 TEST RESULTS(Band edge Requirements)

Note:1. All mode has been tested, only shown the worst case data,
2. The peak value is less than the AV limit, so no AV data is displayed.

Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
802.11b							
2390.00	12.35	34.10	46.45	74.00	-27.55	PK	Vertical
2390.00	1.54	34.10	35.64	54.00	-18.36	AV	Vertical
2390.00	13.04	34.10	47.14	74.00	-26.86	PK	Horizontal
2390.00	1.49	34.10	35.59	54.00	-18.41	AV	Horizontal
2483.50	14.13	34.44	48.57	74.00	-25.43	PK	Vertical
2483.50	2.57	34.44	37.01	54.00	-16.99	AV	Vertical
2483.50	15.23	34.44	49.67	74.00	-24.33	PK	Horizontal
2483.50	3.04	34.44	37.48	54.00	-16.52	AV	Horizontal
802.11g							
2390.00	12.81	34.10	46.91	74.00	-27.09	PK	Vertical
2390.00	1.16	34.10	35.26	54.00	-18.74	AV	Vertical
2390.00	13.15	34.10	47.25	74.00	-26.75	PK	Horizontal
2390.00	2.11	34.10	36.21	54.00	-17.79	AV	Horizontal
2483.50	15.34	34.44	49.78	74.00	-24.22	PK	Vertical
2483.50	2.94	34.44	37.38	54.00	-16.62	AV	Vertical
2483.50	15.60	34.44	50.04	74.00	-23.96	PK	Horizontal
2483.50	2.86	34.44	37.30	54.00	-16.70	AV	Horizontal
802.11n20							
2390.00	12.26	34.10	46.36	74.00	-27.64	PK	Vertical
2390.00	1.22	34.10	35.32	54.00	-18.68	AV	Vertical
2390.00	13.37	34.10	47.47	74.00	-26.53	PK	Horizontal
2390.00	1.24	34.10	35.34	54.00	-18.66	AV	Horizontal
2483.50	13.83	34.44	48.27	74.00	-25.73	PK	Vertical
2483.50	2.94	34.44	37.38	54.00	-16.62	AV	Vertical
2483.50	14.16	34.44	48.60	74.00	-25.40	PK	Horizontal
2483.50	1.76	34.44	36.20	54.00	-17.80	AV	Horizontal
802.11n40							
2390.00	13.40	34.10	47.50	74.00	-26.50	PK	Vertical
2390.00	1.98	34.10	36.08	54.00	-17.92	AV	Vertical
2390.00	12.51	34.10	46.61	74.00	-27.39	PK	Horizontal
2390.00	0.70	34.10	34.80	54.00	-19.20	AV	Horizontal



2483.50	15.12	34.44	49.56	74.00	-24.44	PK	Vertical
2483.50	2.49	34.44	36.93	54.00	-17.07	AV	Vertical
2483.50	14.44	34.44	48.88	74.00	-25.12	PK	Horizontal
2483.50	3.03	34.44	37.47	54.00	-16.53	AV	Horizontal
Low measurement frequencies is range from 2310 to 2422 MHz, high measurement frequencies is range from 2452 to 2500 MHz.							



4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d)& RSS-247 (5.5), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2432 MHz Upper Band Edge: 2442 to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

4.6 TEST RESULTS

For the measurement records, refer to the appendix I.



5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e) RSS-247	Power Spectral Density	≤ 8 dBm (RBW ≥ 3 KHz)	2400-2483.5	PASS

5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

5.6 TEST RESULTS

For the measurement records, refer to the appendix I.



6. BANDWIDTH TEST

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2) RSS-247 5.2 (a)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS
RSS-Gen Clause 6.7	99% Bandwidth	For reporting purposes only.	2400-2483.5	PASS

6.2 TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:


Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth: 100KHz For 99% Bandwidth: 1% to 5% of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times \text{RBW}$ For 99% Bandwidth: approximately $3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

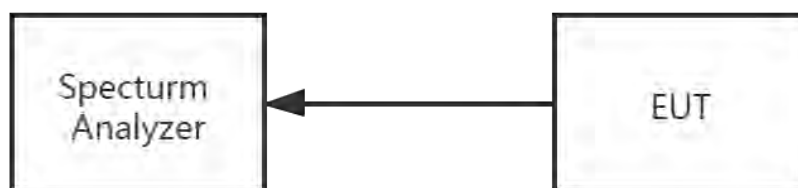

6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.6 TEST RESULTS

For the measurement records, refer to the appendix I.



7. PEAK OUTPUT POWER TEST

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3) RSS 247	Output Power	1 watt or 30dBm	2400-2483.5	PASS
RSS-247	EIRP	4W	2400-2483.5	PASS

7.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq$ [3 $\times$ RBW].
- Set span $\geq$ [3 $\times$ RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the

DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW $\geq$ [3 $\times$ RBW].
- Set the span $\geq$ [1.5 $\times$ DTS bandwidth].
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.


PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

7.6 TEST RESULTS

For the measurement records, refer to the appendix I.



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203&RSS Gen requirement: For intentional device, according to 15.203&RSS Gen: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is FPC Antenna. It comply with the standard requirement.



9. FREQUENCY STABILITY

9.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.02\%$ of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees.

9.2 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

9.3 TEST RESULT

For the measurement records, refer to the appendix I.



APPENDIX I - TEST RESULTS

Duty Cycle

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	99.85	0	0.12
NVNT	b	2437	99.85	0	0.12
NVNT	b	2462	99.85	0	0.12
NVNT	g	2412	98.84	0	0.74
NVNT	g	2437	98.84	0	0.74
NVNT	g	2462	98.84	0	0.74
NVNT	n20	2412	98.76	0	0.79
NVNT	n20	2437	98.6	0	0.79
NVNT	n20	2462	98.76	0	0.79
NVNT	n40	2422	97.53	0.11	1.58
NVNT	n40	2437	97.53	0.11	1.58
NVNT	n40	2452	97.53	0.11	1.58
NVNT	ax20	2412	98.4	0	1.02
NVNT	ax20	2437	98.4	0	1.02
NVNT	ax20	2462	98.4	0	1.02
NVNT	ax40	2422	97.01	0.13	1.93
NVNT	ax40	2437	97.01	0.13	1.92
NVNT	ax40	2452	97.01	0.13	1.92



Test Graphs

Duty Cycle NVNT b 2412MHz





Duty Cycle NVNT b 2437MHz




Duty Cycle NVNT b 2462MHz



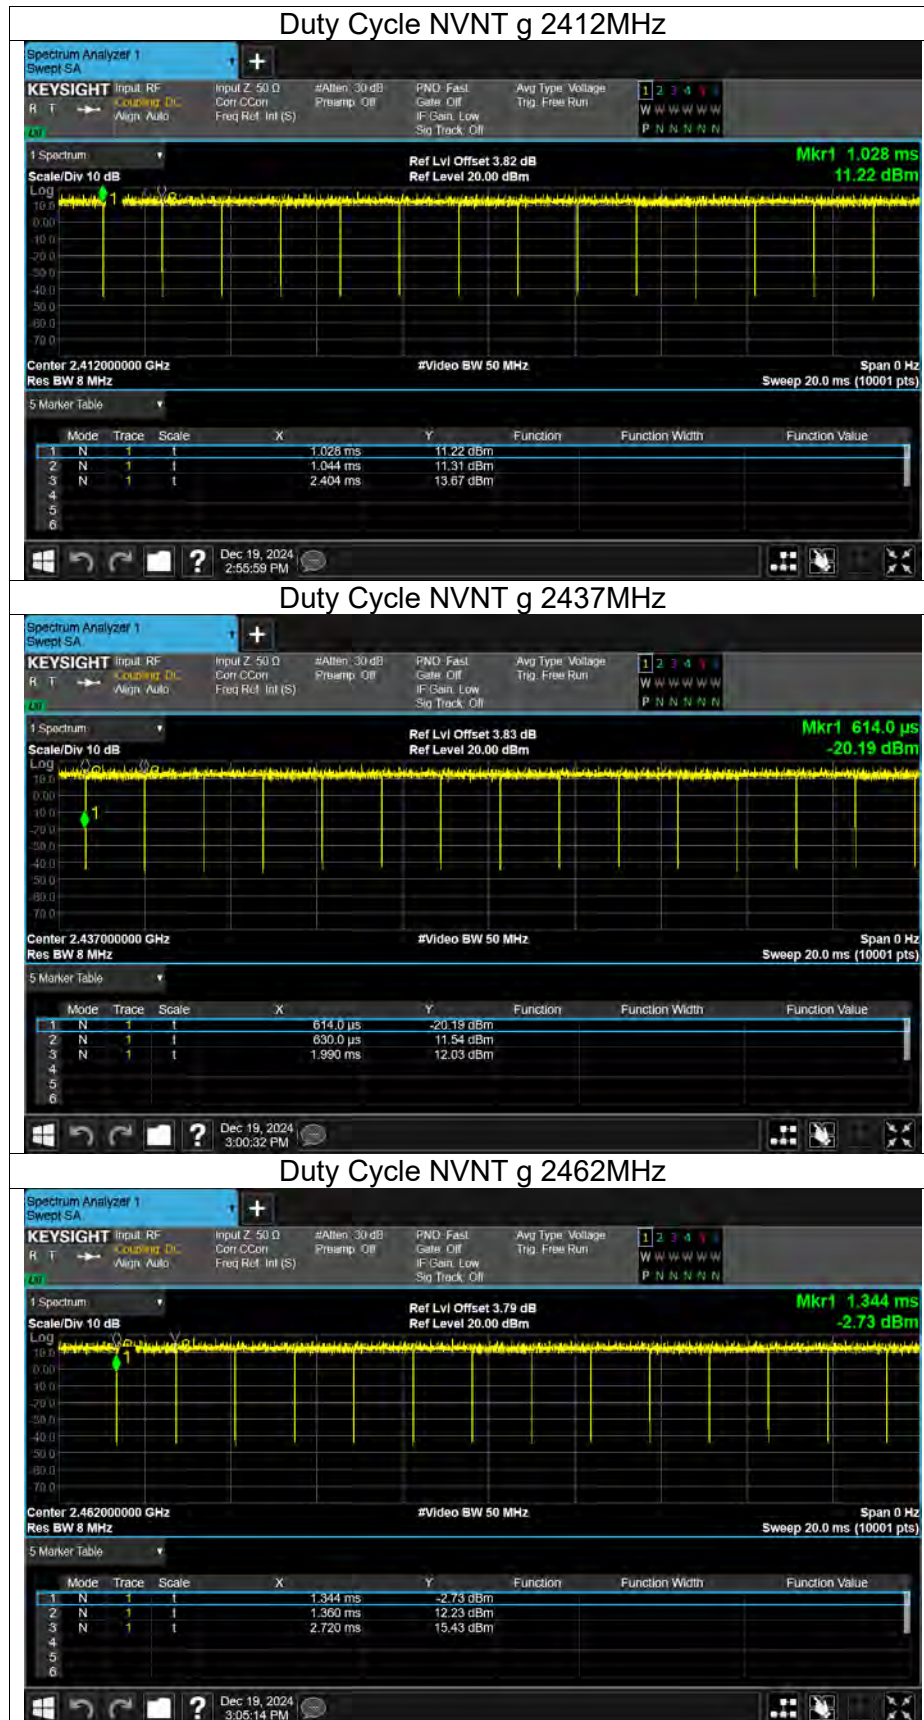

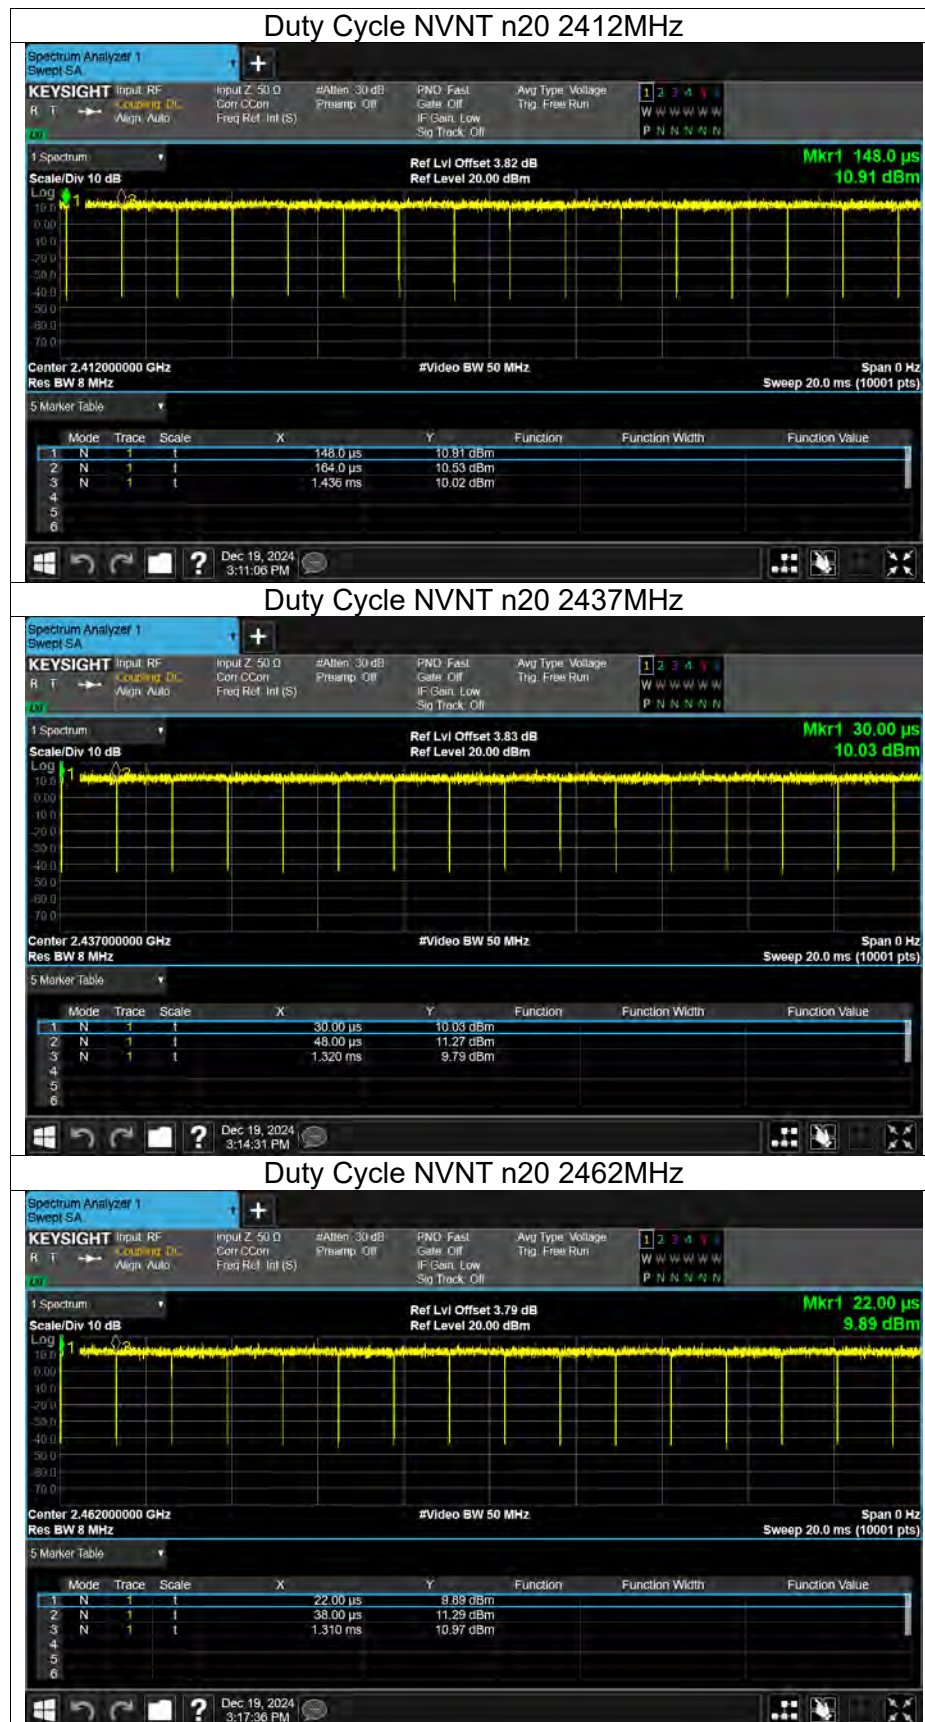



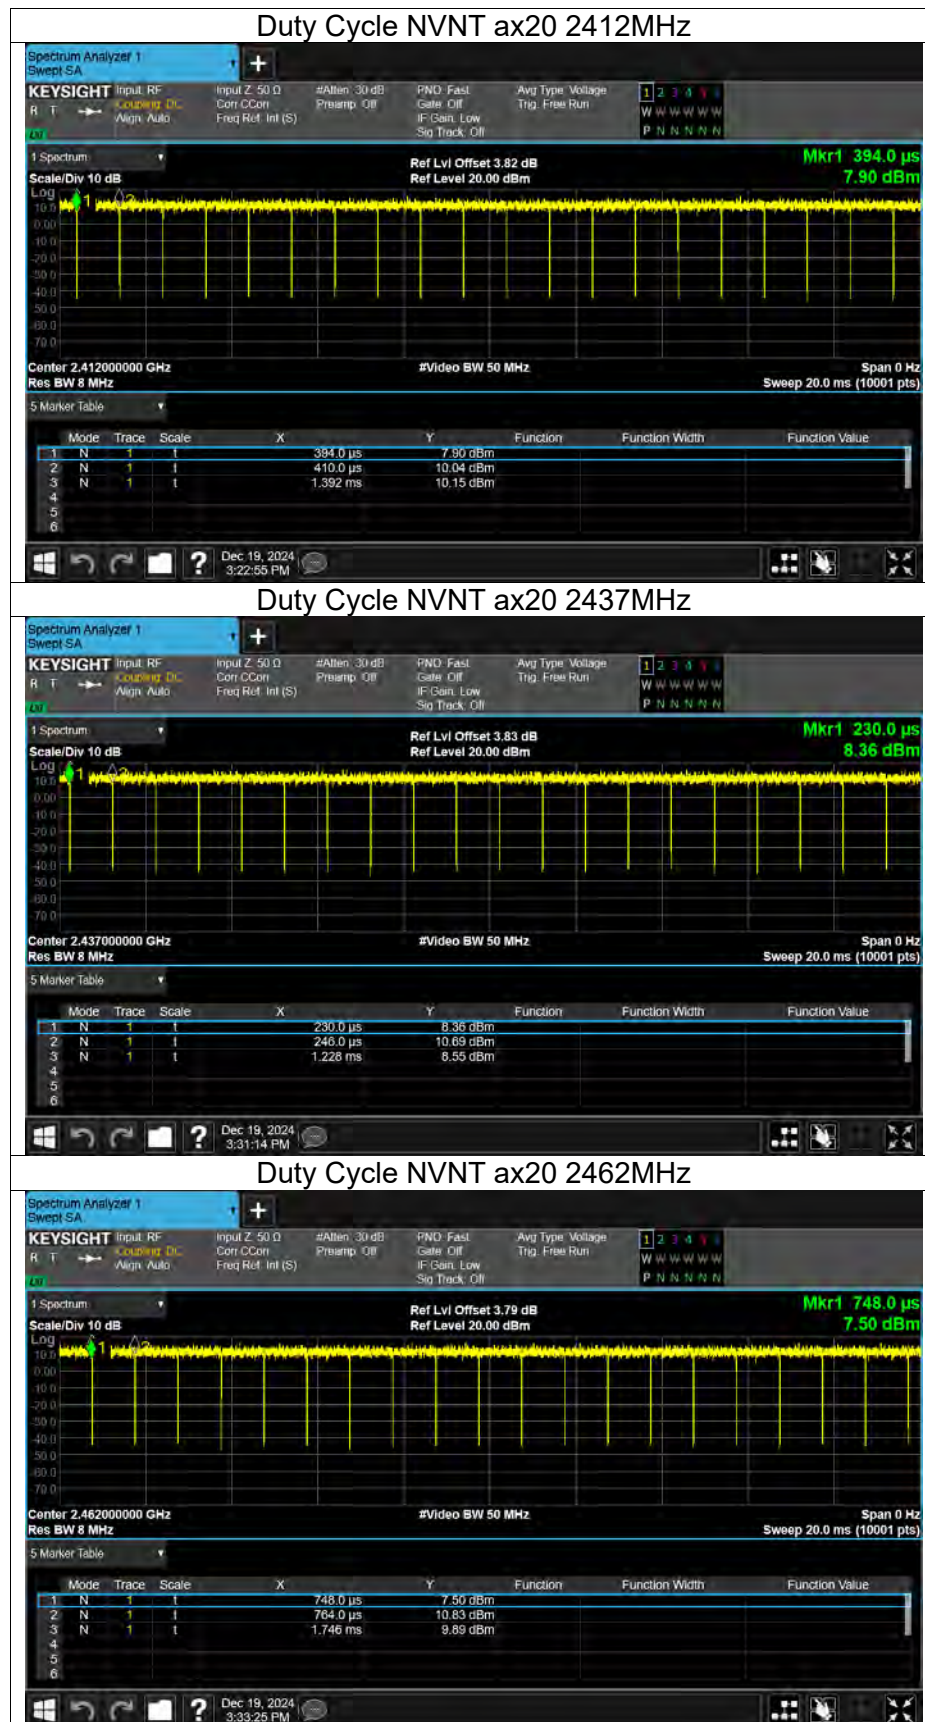



Duty Cycle NVNT ax40 2422MHz



Duty Cycle NVNT ax40 2437MHz



Duty Cycle NVNT ax40 2452MHz





Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	15.63	30	Pass
NVNT	b	2437	15.81	30	Pass
NVNT	b	2462	15.86	30	Pass
NVNT	g	2412	14.66	30	Pass
NVNT	g	2437	14.75	30	Pass
NVNT	g	2462	14.78	30	Pass
NVNT	n20	2412	14.76	30	Pass
NVNT	n20	2437	14.96	30	Pass
NVNT	n20	2462	14.93	30	Pass
NVNT	n40	2422	13.48	30	Pass
NVNT	n40	2437	13.59	30	Pass
NVNT	n40	2452	14.55	30	Pass
NVNT	ax20	2412	15.53	30	Pass
NVNT	ax20	2437	15.5	30	Pass
NVNT	ax20	2462	15.56	30	Pass
NVNT	ax40	2422	13.84	30	Pass
NVNT	ax40	2437	14.15	30	Pass
NVNT	ax40	2452	14.09	30	Pass

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	ANT GAIN (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	15.63	3.14	18.77	36	Pass
NVNT	b	2437	15.81	3.14	18.95	36	Pass
NVNT	b	2462	15.86	3.14	19	36	Pass
NVNT	g	2412	14.66	3.14	17.8	36	Pass
NVNT	g	2437	14.75	3.14	17.89	36	Pass
NVNT	g	2462	14.78	3.14	17.92	36	Pass
NVNT	n20	2412	14.76	3.14	17.9	36	Pass
NVNT	n20	2437	14.96	3.14	18.1	36	Pass
NVNT	n20	2462	14.93	3.14	18.07	36	Pass
NVNT	n40	2422	13.48	3.14	16.62	36	Pass
NVNT	n40	2437	13.59	3.14	16.73	36	Pass
NVNT	n40	2452	14.55	3.14	17.69	36	Pass
NVNT	ax20	2412	15.53	3.14	18.67	36	Pass
NVNT	ax20	2437	15.5	3.14	18.64	36	Pass
NVNT	ax20	2462	15.56	3.14	18.7	36	Pass
NVNT	ax40	2422	13.84	3.14	16.98	36	Pass
NVNT	ax40	2437	14.15	3.14	17.29	36	Pass
NVNT	ax40	2452	14.09	3.14	17.23	36	Pass



-6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	9.925	0.5	Pass
NVNT	b	2437	9.981	0.5	Pass
NVNT	b	2462	9.904	0.5	Pass
NVNT	g	2412	16.349	0.5	Pass
NVNT	g	2437	16.357	0.5	Pass
NVNT	g	2462	16.336	0.5	Pass
NVNT	n20	2412	17.62	0.5	Pass
NVNT	n20	2437	17.588	0.5	Pass
NVNT	n20	2462	17.584	0.5	Pass
NVNT	n40	2422	29.491	0.5	Pass
NVNT	n40	2437	28.405	0.5	Pass
NVNT	n40	2452	30.731	0.5	Pass
NVNT	ax20	2412	18.926	0.5	Pass
NVNT	ax20	2437	18.98	0.5	Pass
NVNT	ax20	2462	19.015	0.5	Pass
NVNT	ax40	2422	30.635	0.5	Pass
NVNT	ax40	2437	30.327	0.5	Pass
NVNT	ax40	2452	31.507	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT b 2412MHz





-6dB Bandwidth NVNT b 2437MHz




-6dB Bandwidth NVNT b 2462MHz




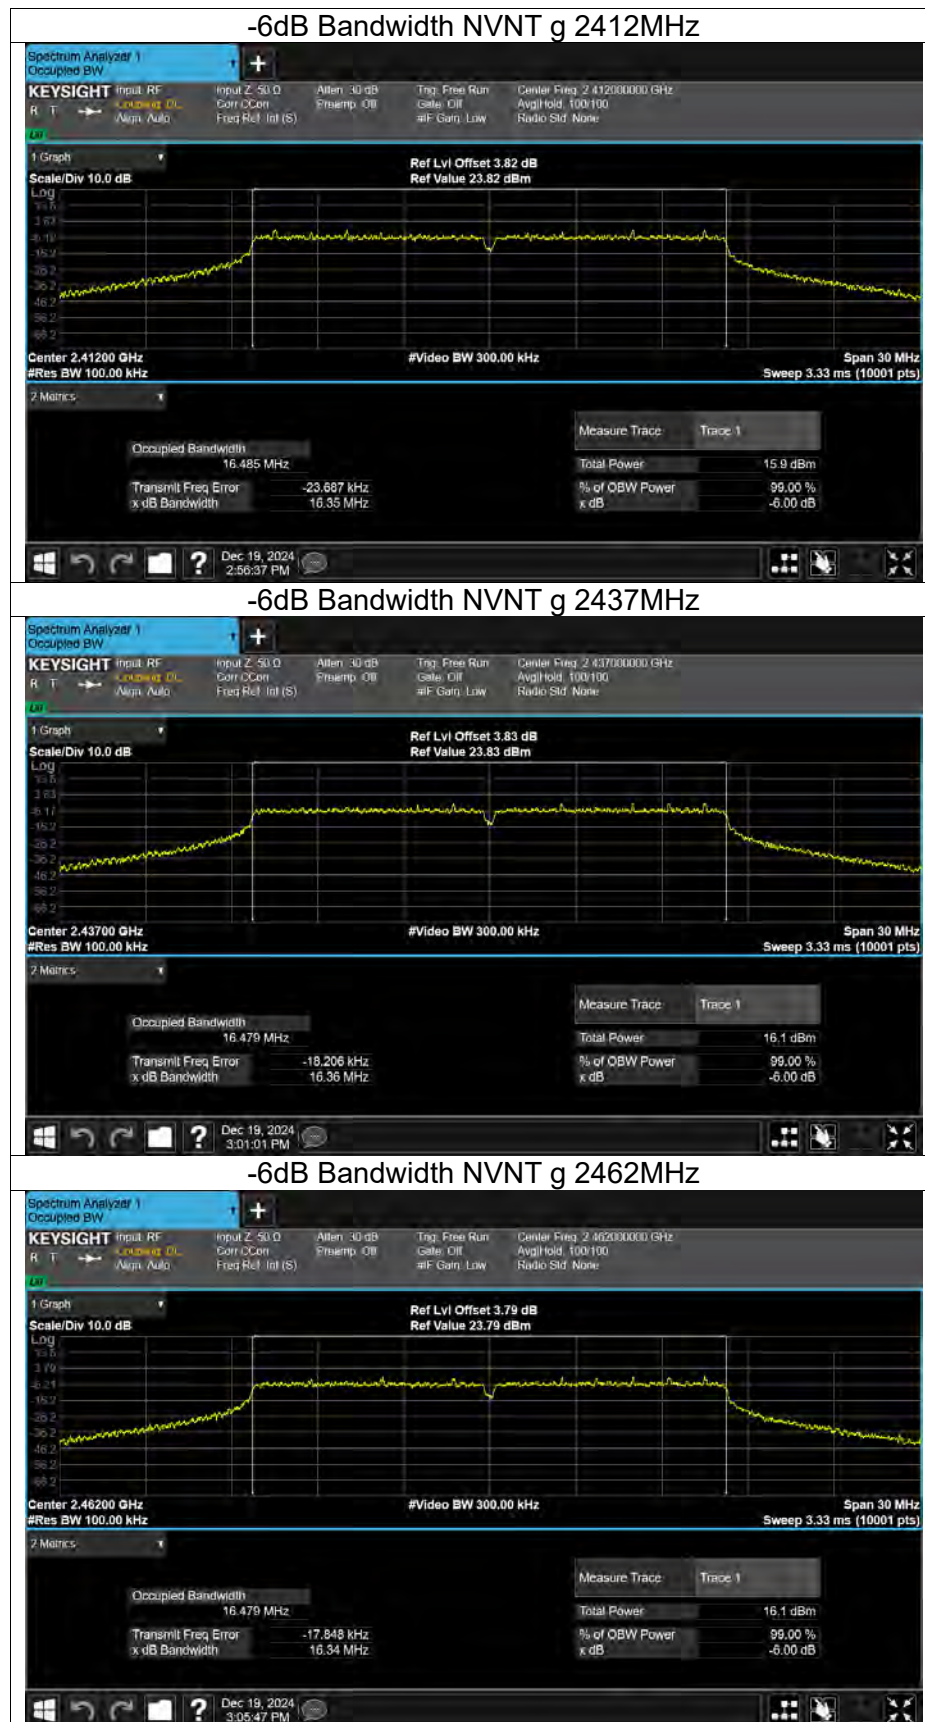

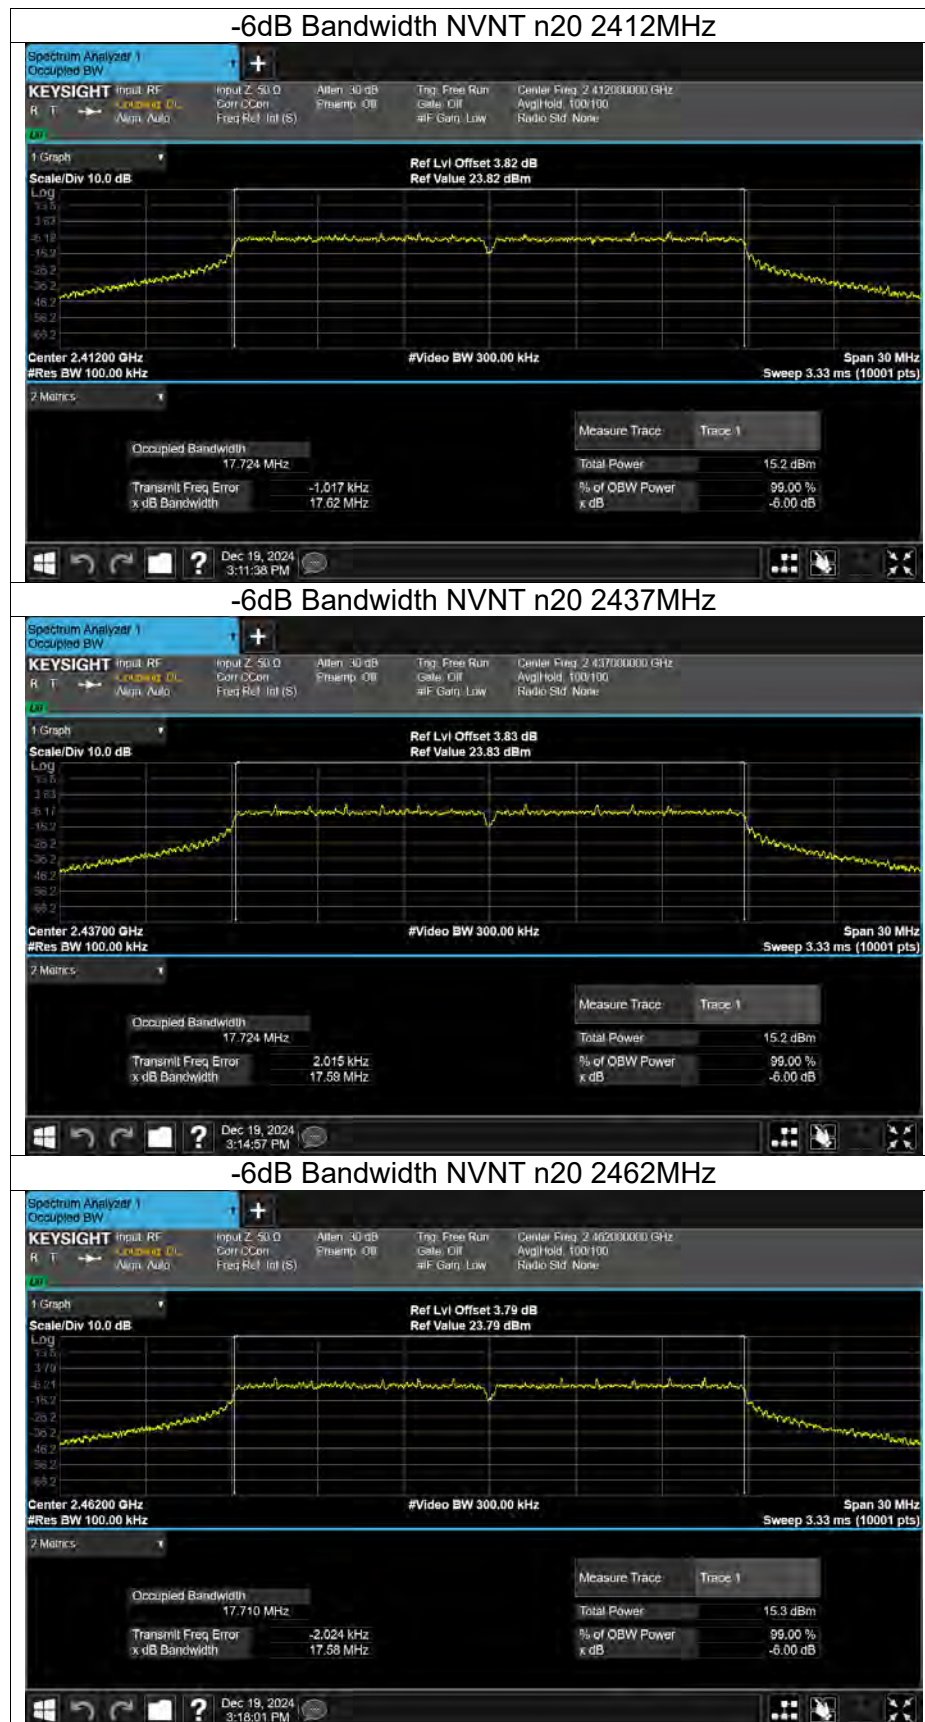

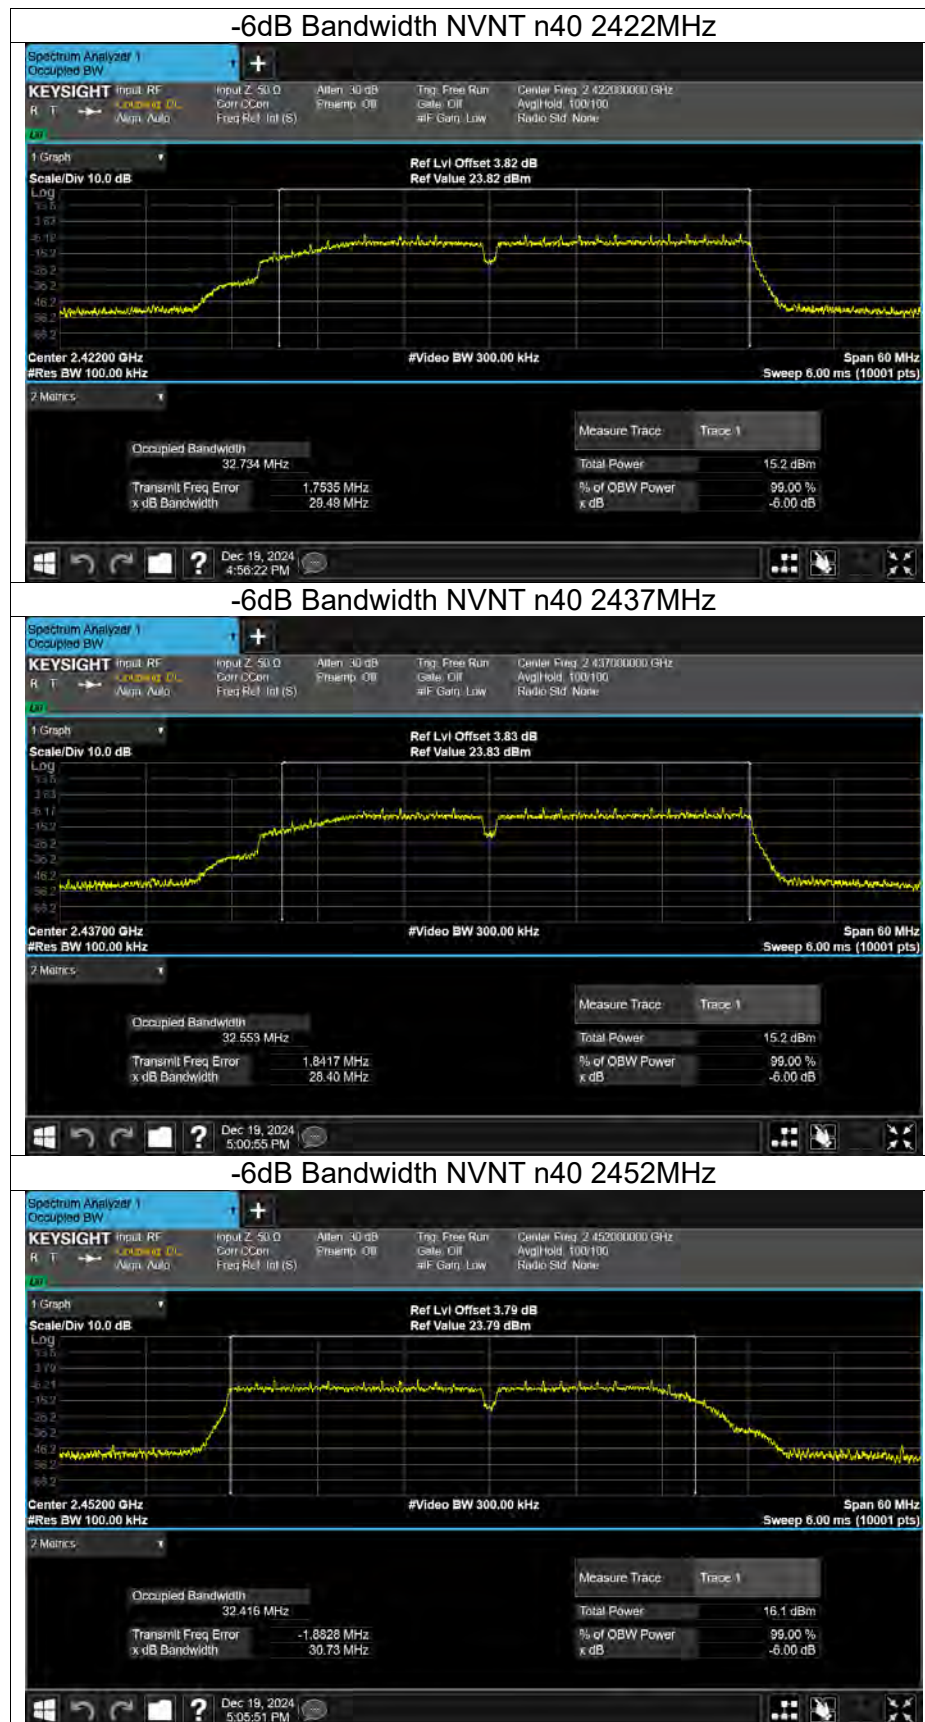



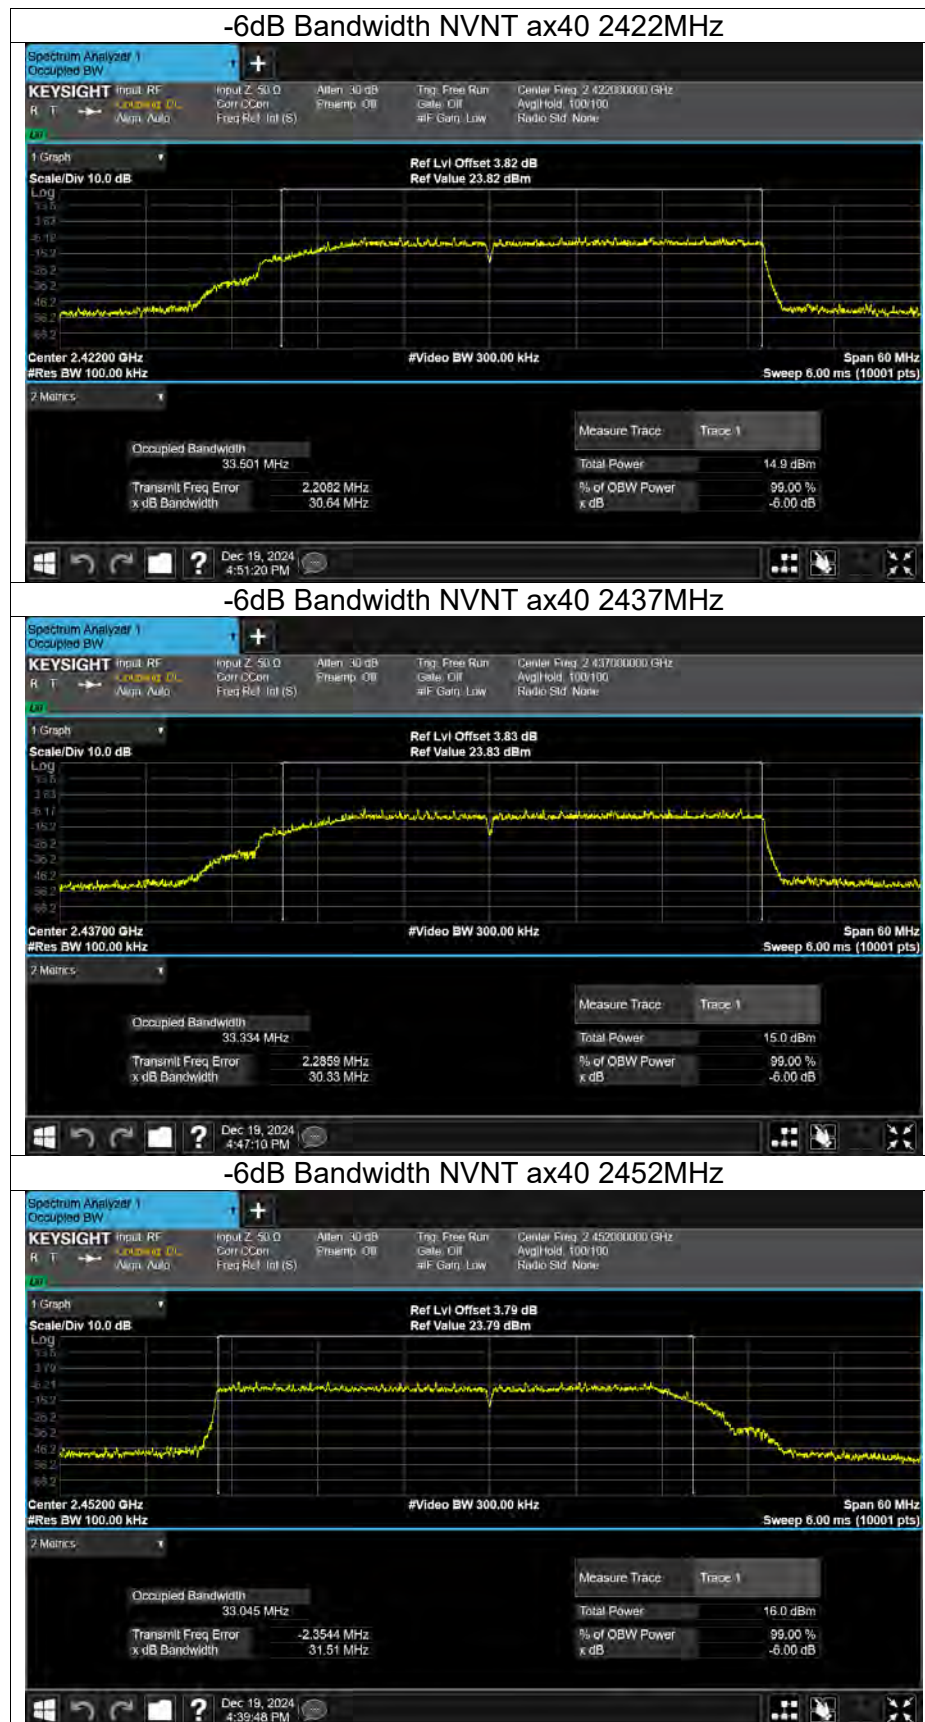




Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	b	2412	14.898
NVNT	b	2437	14.887
NVNT	b	2462	14.888
NVNT	g	2412	16.634
NVNT	g	2437	16.63
NVNT	g	2462	16.614
NVNT	n20	2412	17.854
NVNT	n20	2437	17.861
NVNT	n20	2462	17.846
NVNT	n40	2422	32.826
NVNT	n40	2437	32.671
NVNT	n40	2452	32.726
NVNT	ax20	2412	19.043
NVNT	ax20	2437	19.037
NVNT	ax20	2462	19.02
NVNT	ax40	2422	33.623
NVNT	ax40	2437	33.508
NVNT	ax40	2452	33.173



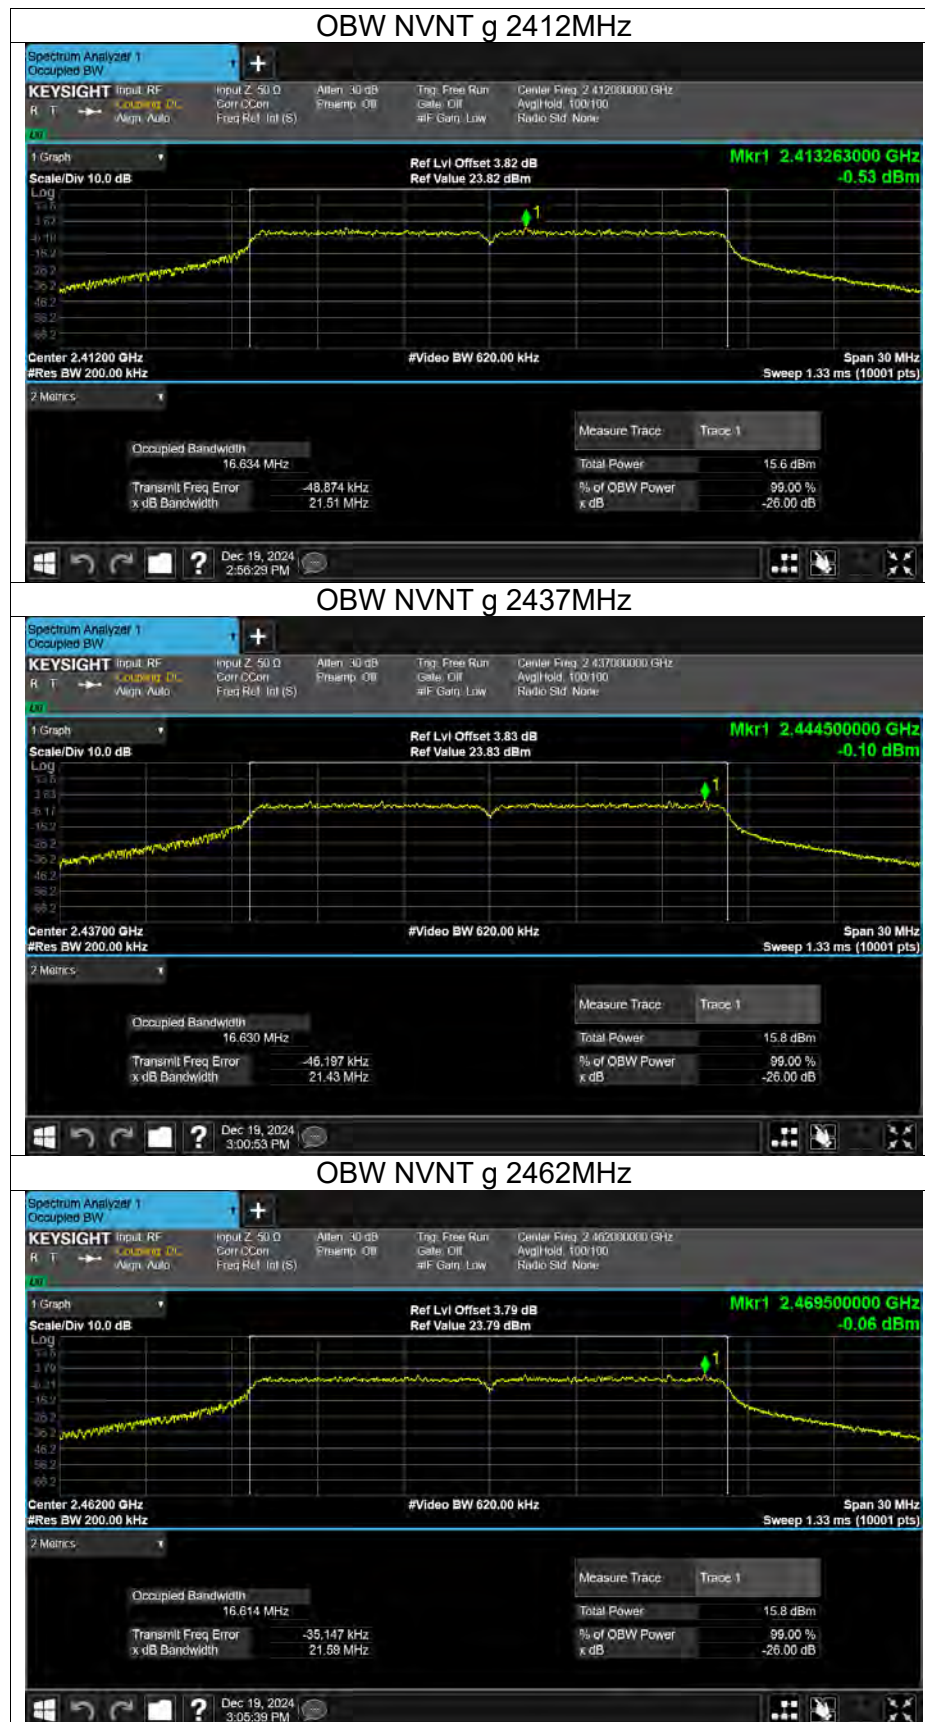





OBW NVNT n40 2422MHz



OBW NVNT n40 2437MHz



OBW NVNT n40 2452MHz







OBW NVNT ax20 2412MHz



OBW NVNT ax20 2437MHz

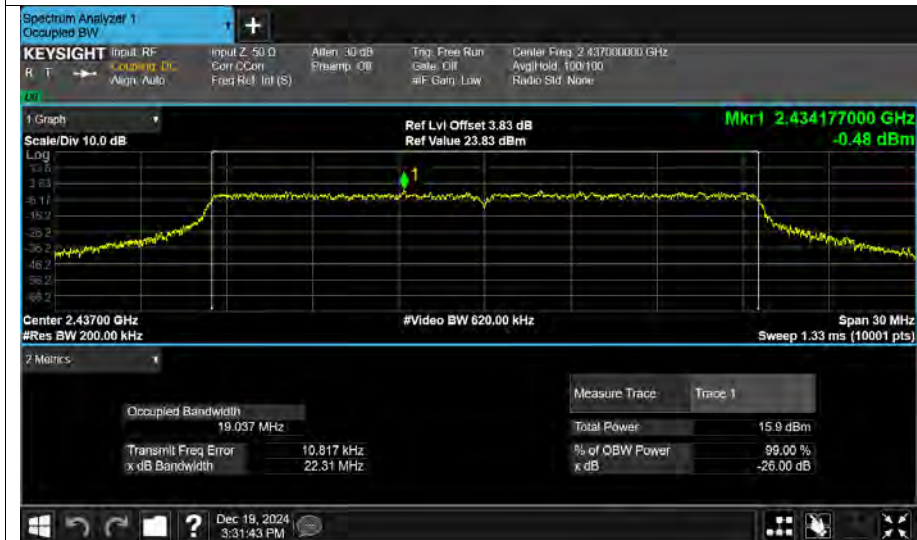

OBW NVNT ax20 2462MHz

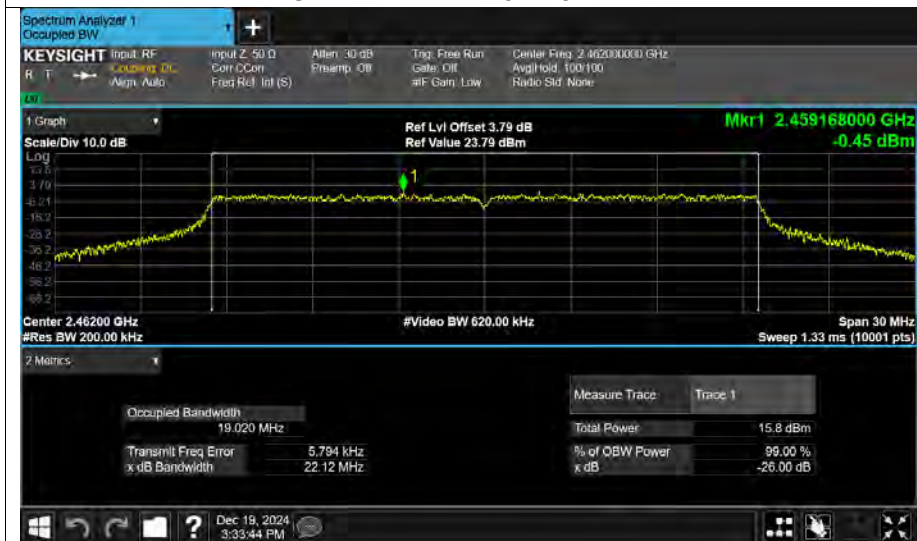

OBW NVNT ax40 2422MHz



OBW NVNT ax40 2437MHz



OBW NVNT ax40 2452MHz







Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	-16.99	8	Pass
NVNT	b	2437	-16.49	8	Pass
NVNT	b	2462	-16.61	8	Pass
NVNT	g	2412	-23.7	8	Pass
NVNT	g	2437	-23.43	8	Pass
NVNT	g	2462	-23.49	8	Pass
NVNT	n20	2412	-24.14	8	Pass
NVNT	n20	2437	-23.57	8	Pass
NVNT	n20	2462	-23.44	8	Pass
NVNT	n40	2422	-26.22	8	Pass
NVNT	n40	2437	-26.9	8	Pass
NVNT	n40	2452	-26.27	8	Pass
NVNT	ax20	2412	-24.37	8	Pass
NVNT	ax20	2437	-24.54	8	Pass
NVNT	ax20	2462	-24.24	8	Pass
NVNT	ax40	2422	-28.3	8	Pass
NVNT	ax40	2437	-28.14	8	Pass
NVNT	ax40	2452	-28.49	8	Pass




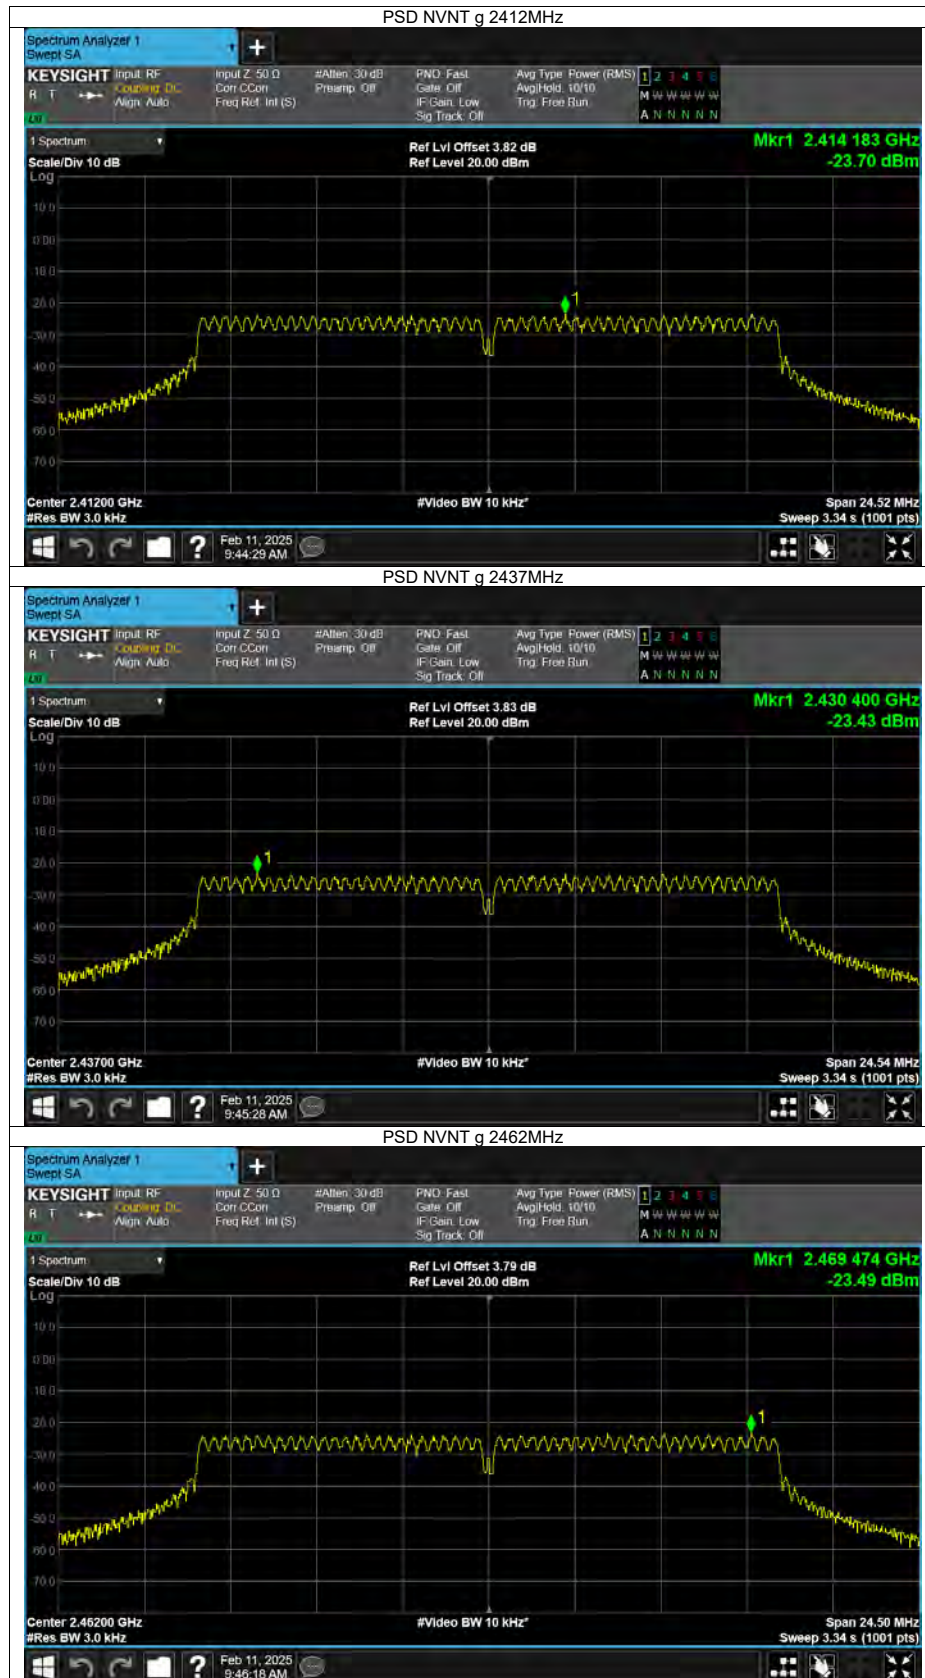

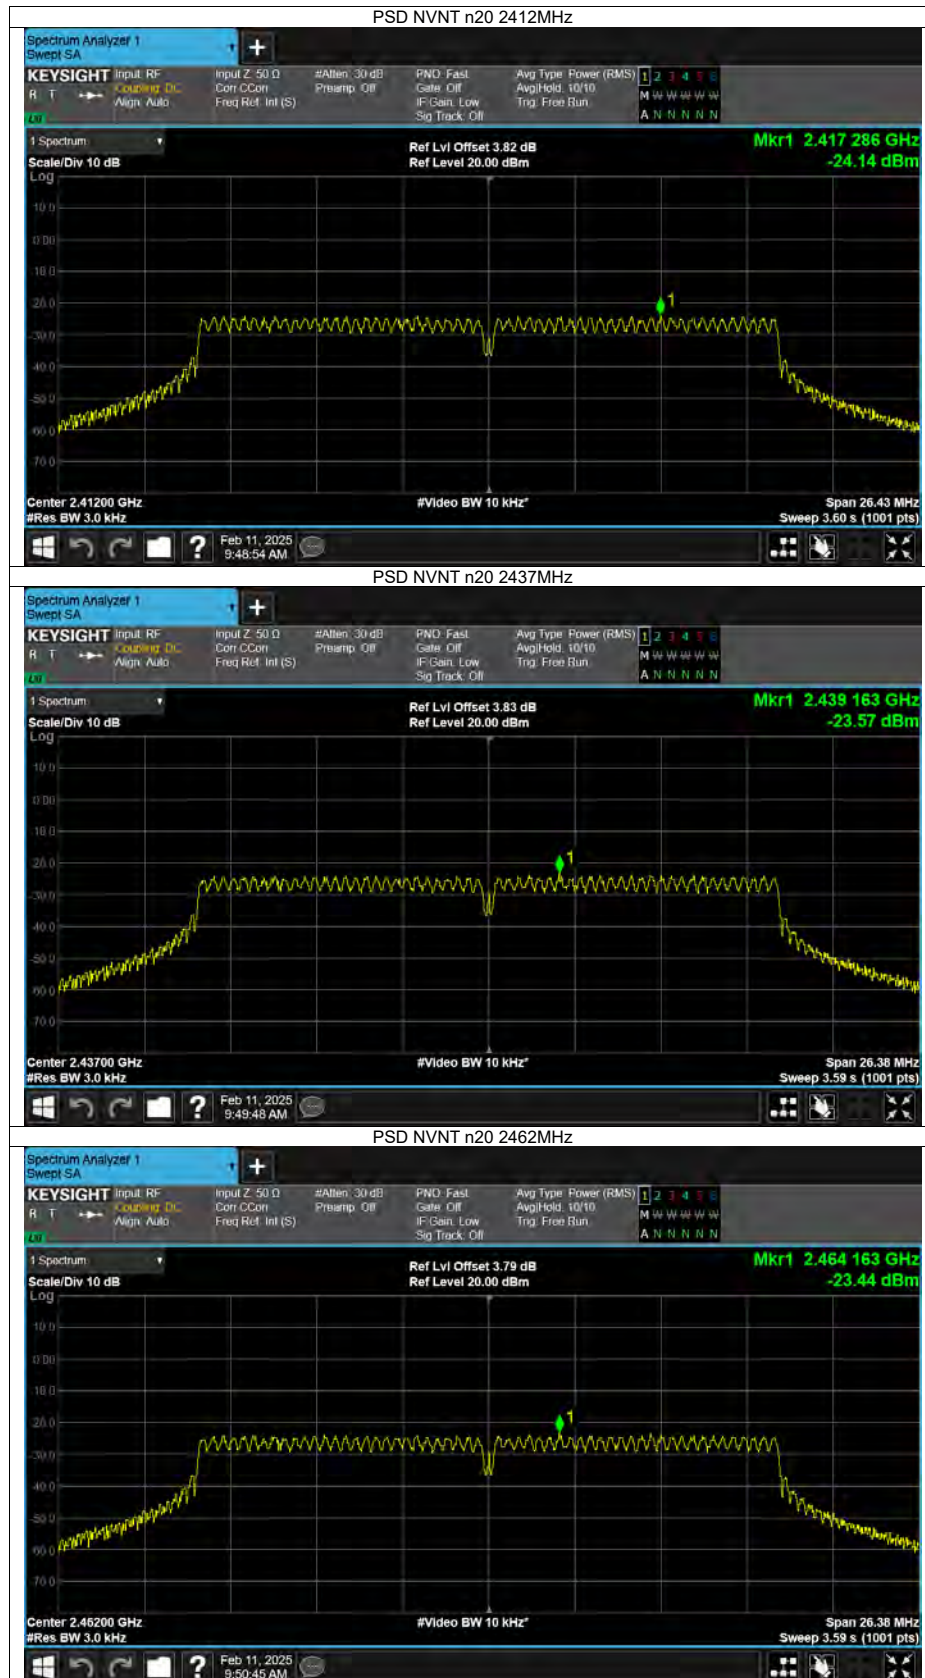



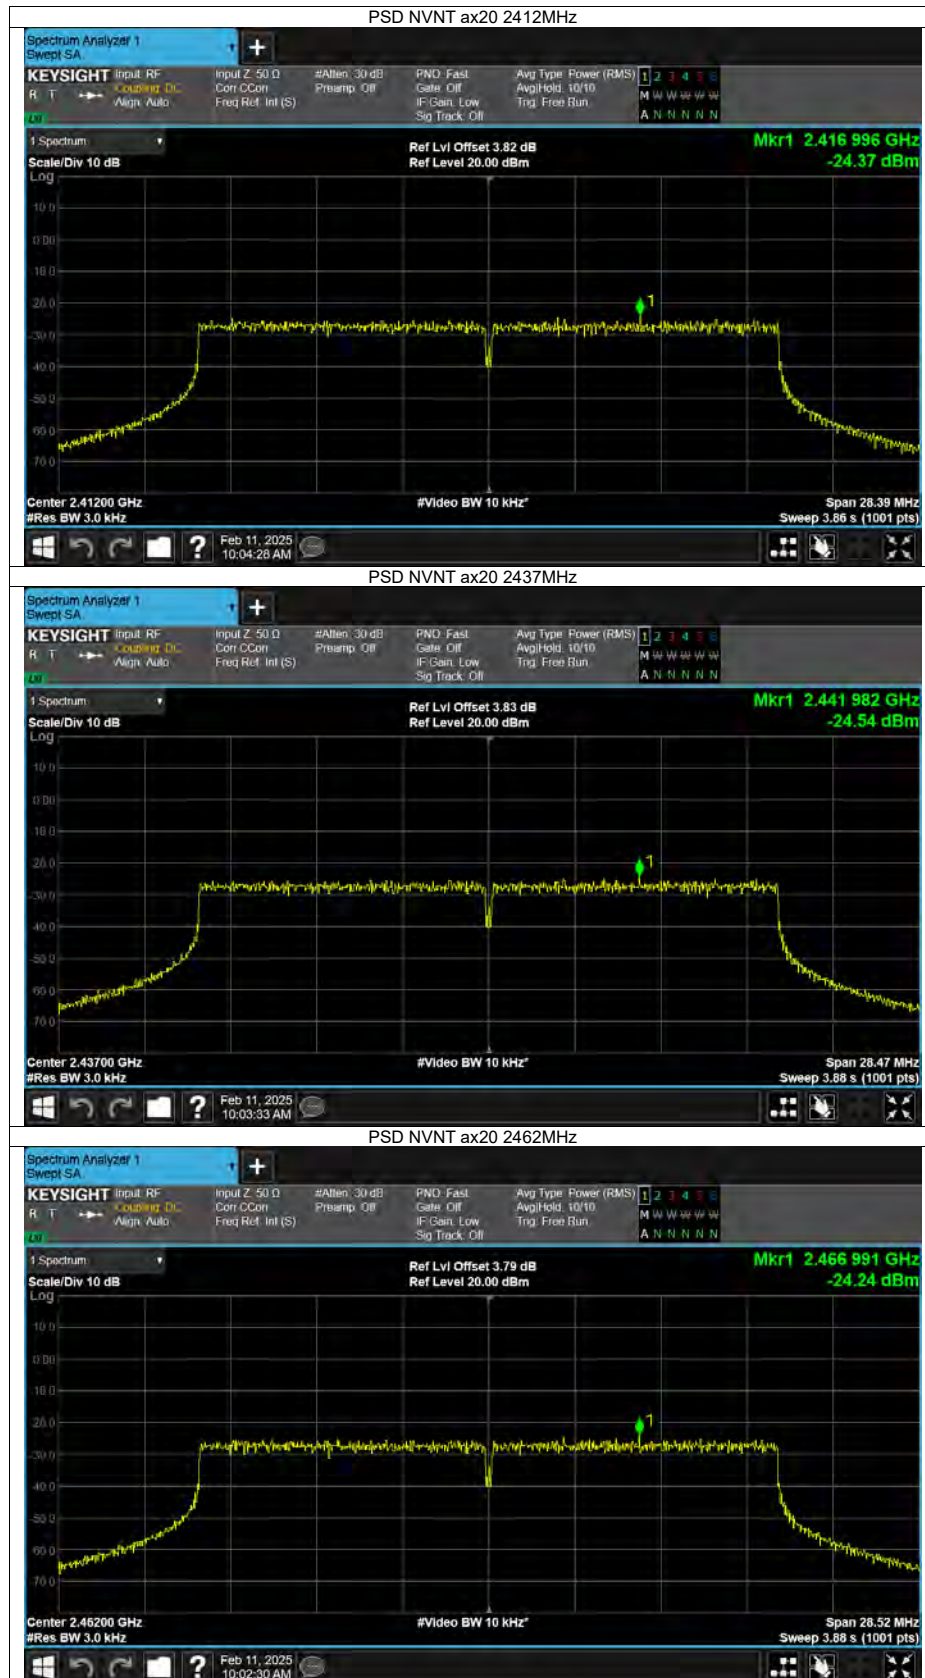


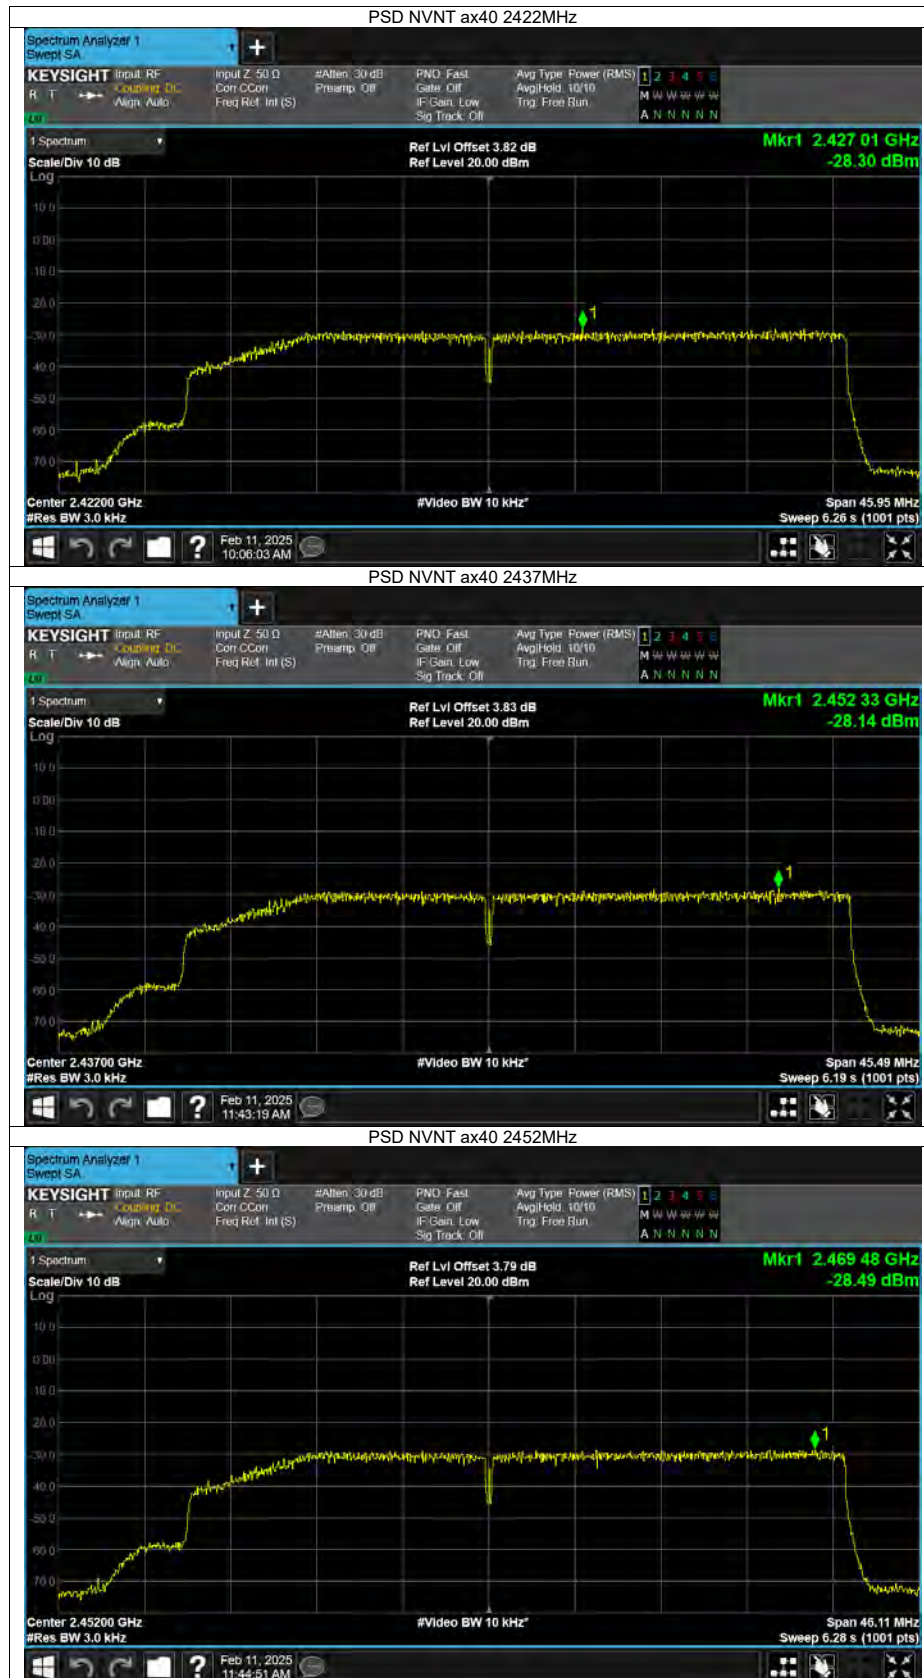



Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-46	-20	Pass
NVNT	b	2462	-52.12	-20	Pass
NVNT	g	2412	-31.51	-20	Pass
NVNT	g	2462	-51.17	-20	Pass
NVNT	n20	2412	-30.74	-20	Pass
NVNT	n20	2462	-49.45	-20	Pass
NVNT	n40	2422	-43.36	-20	Pass
NVNT	n40	2452	-46.31	-20	Pass
NVNT	ax20	2412	-31.77	-20	Pass
NVNT	ax20	2462	-47.65	-20	Pass
NVNT	ax40	2422	-41.16	-20	Pass
NVNT	ax40	2452	-45.37	-20	Pass

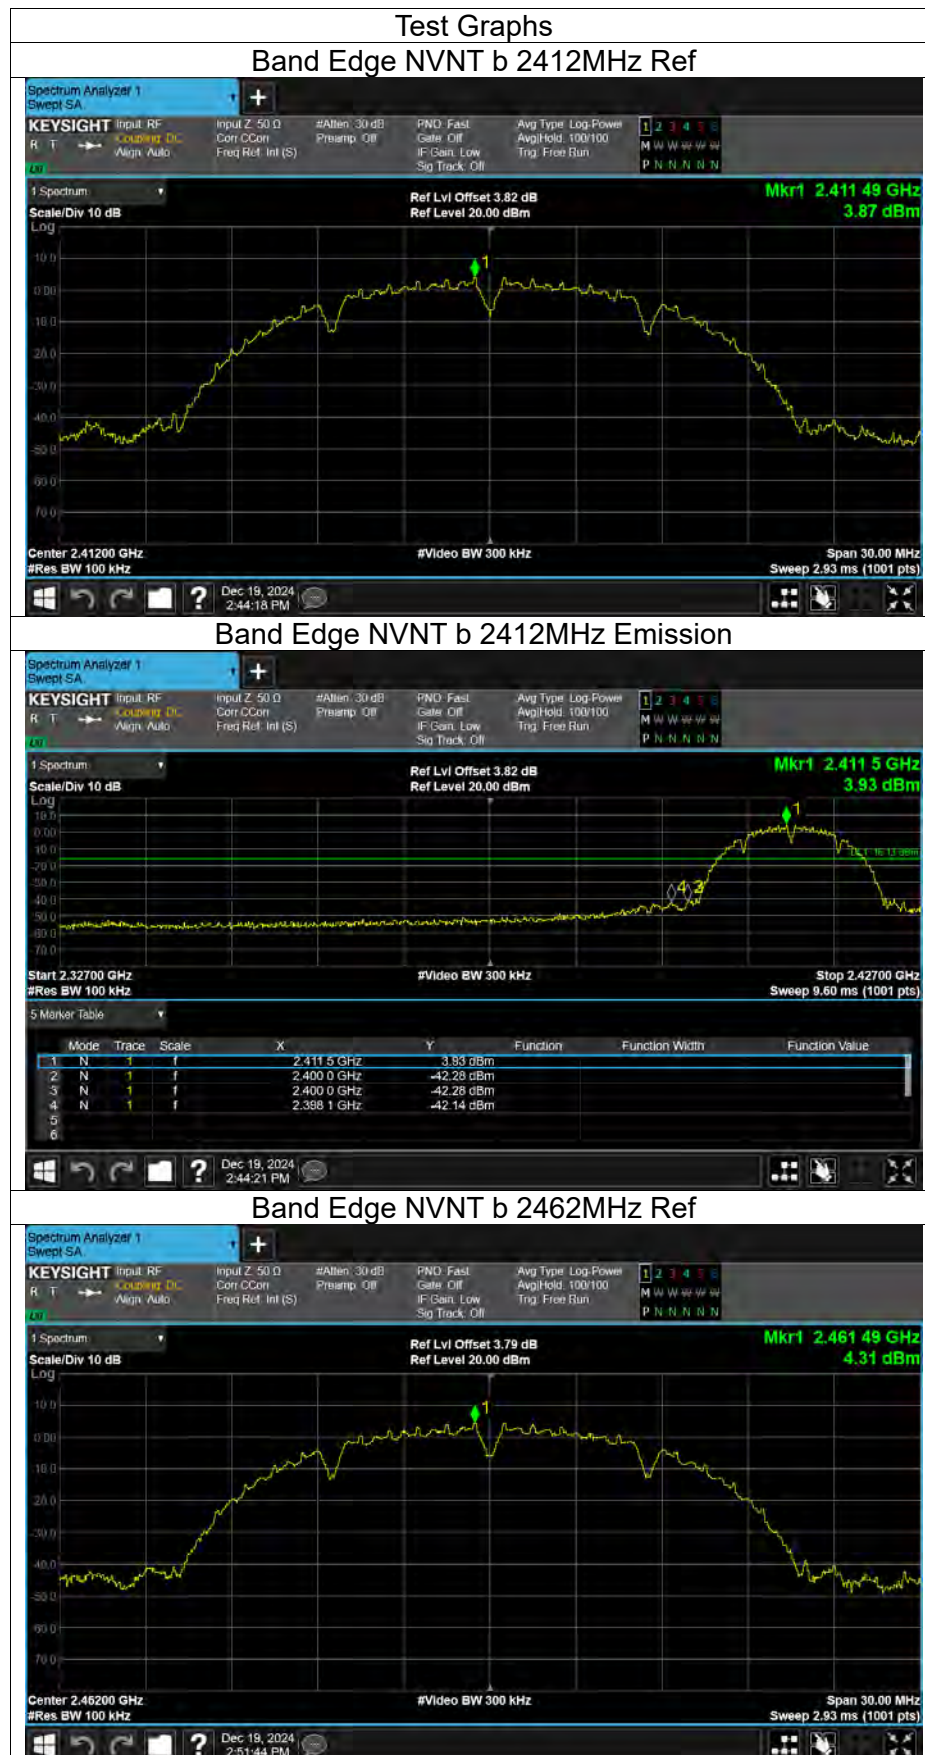



Band Edge NVNT b 2462MHz Emission





Band Edge NVNT g 2412MHz Ref




Band Edge NVNT g 2412MHz Emission




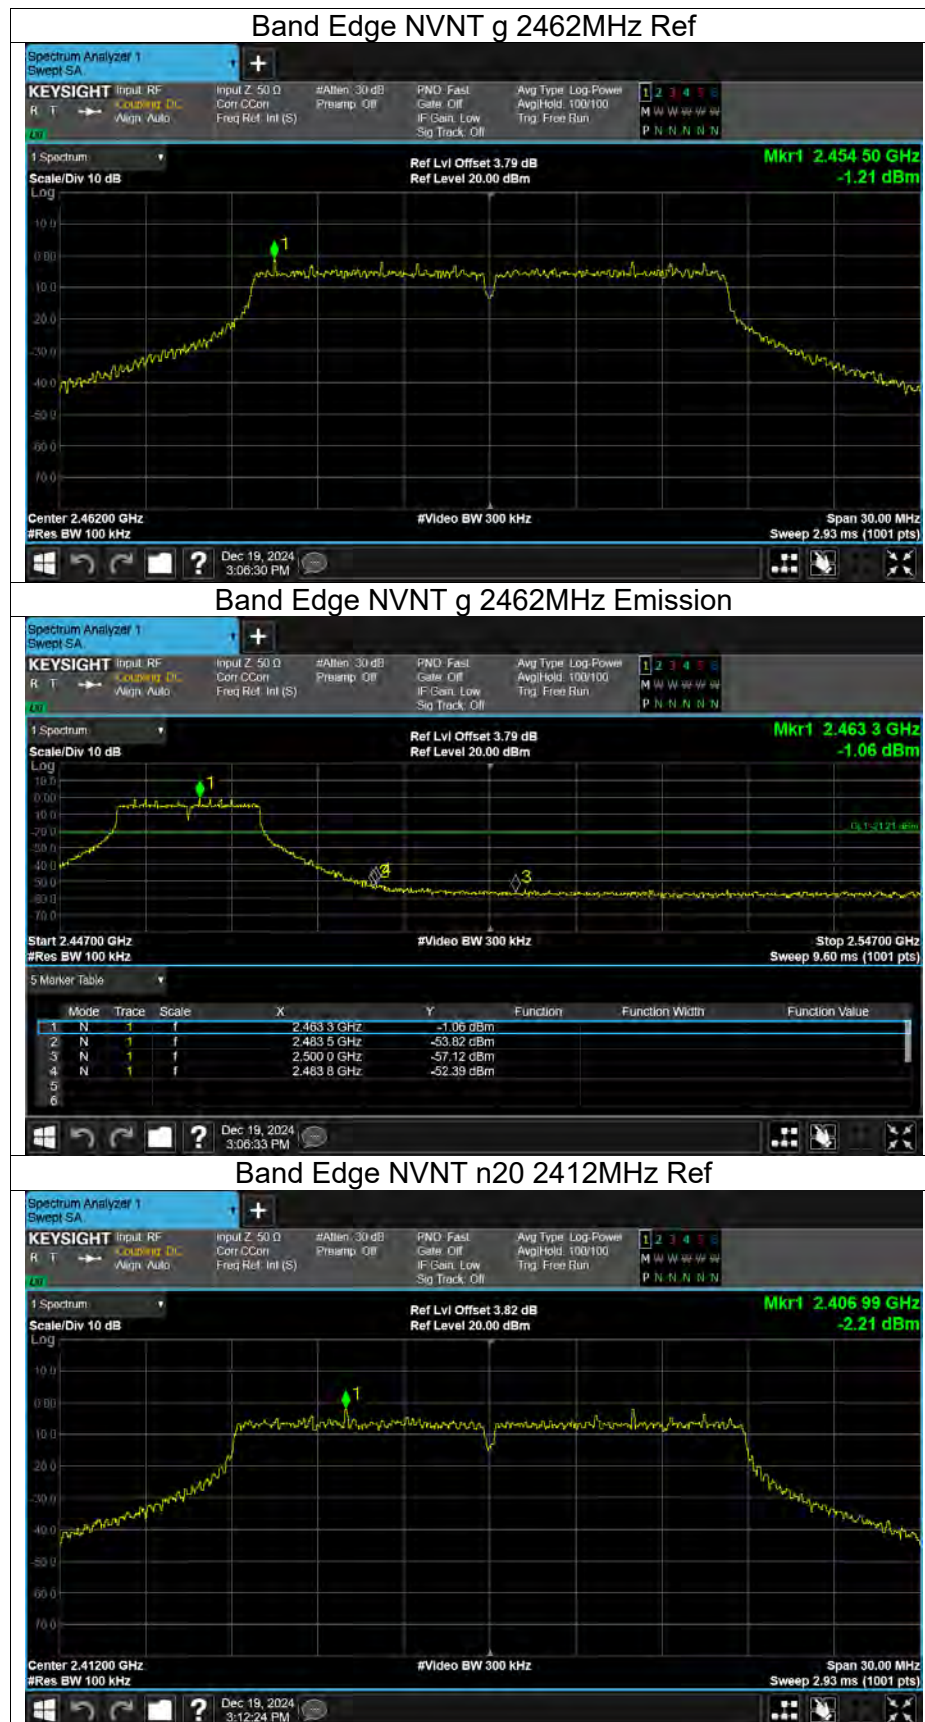

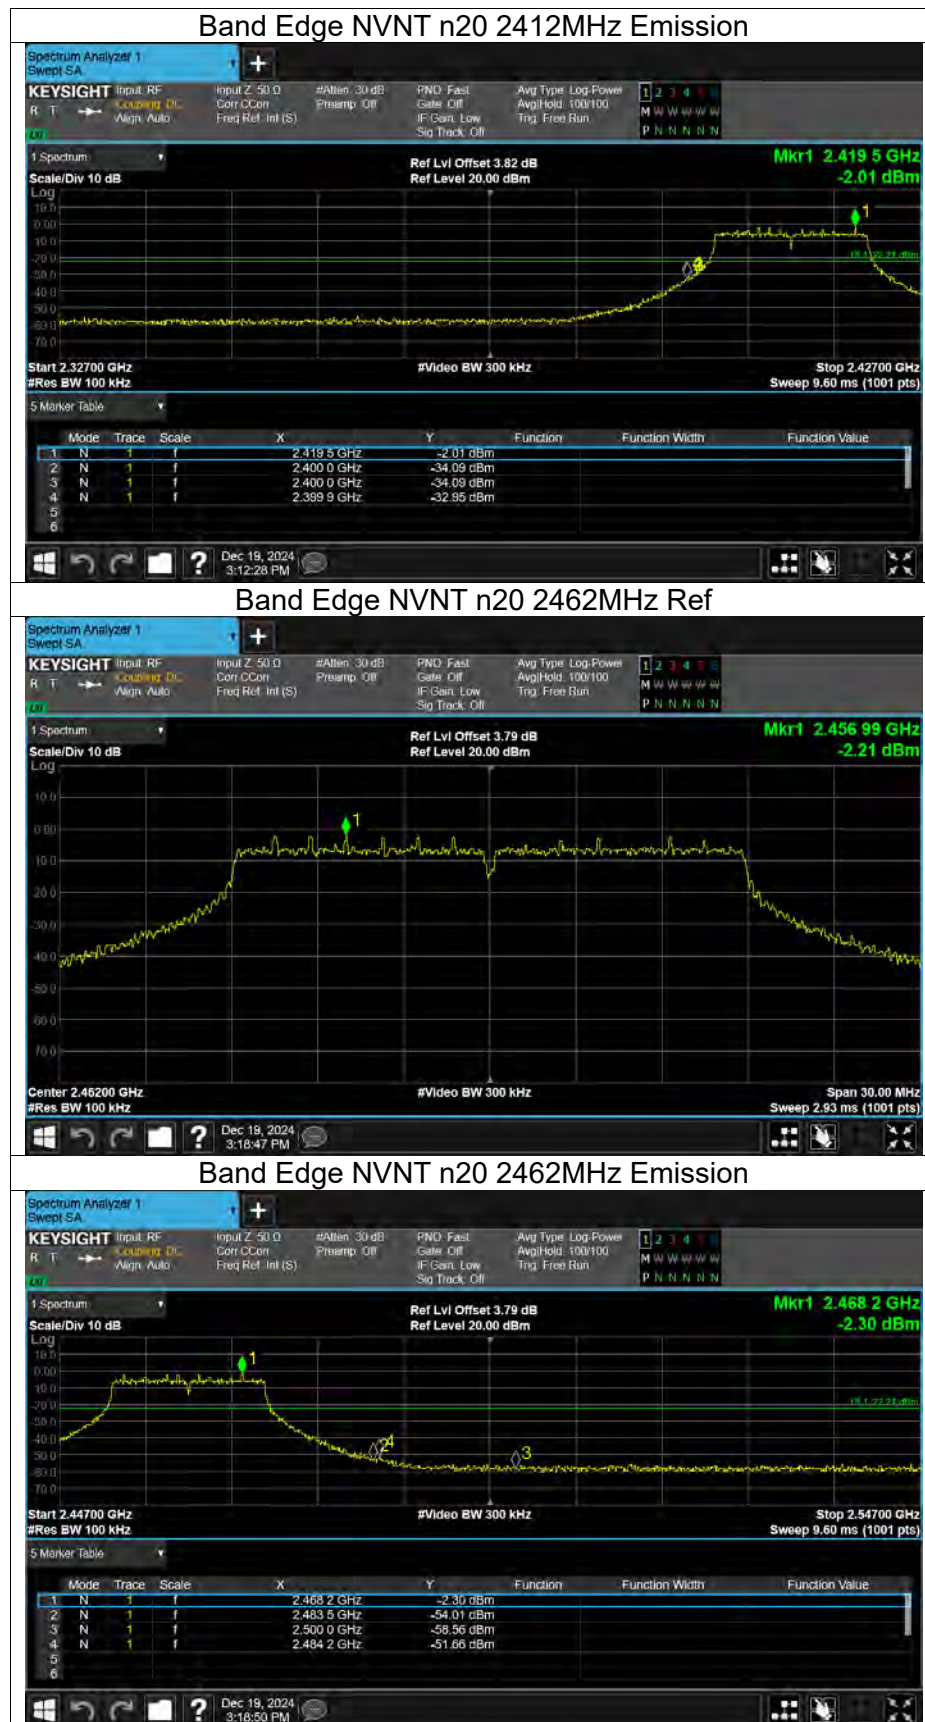




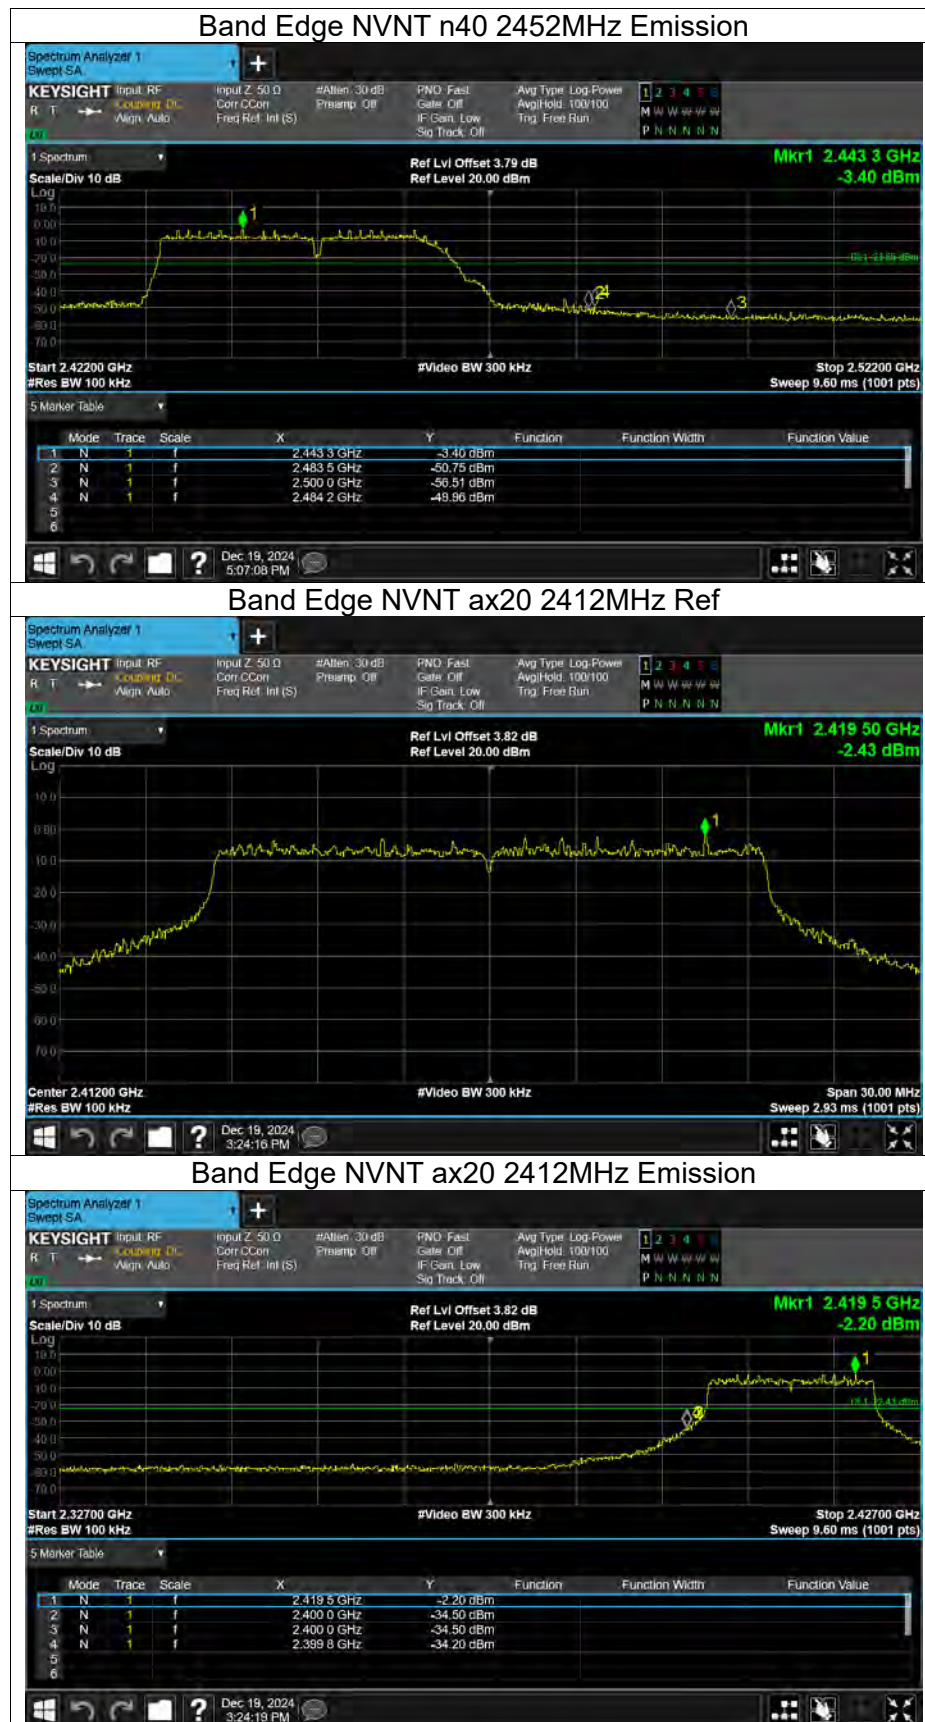

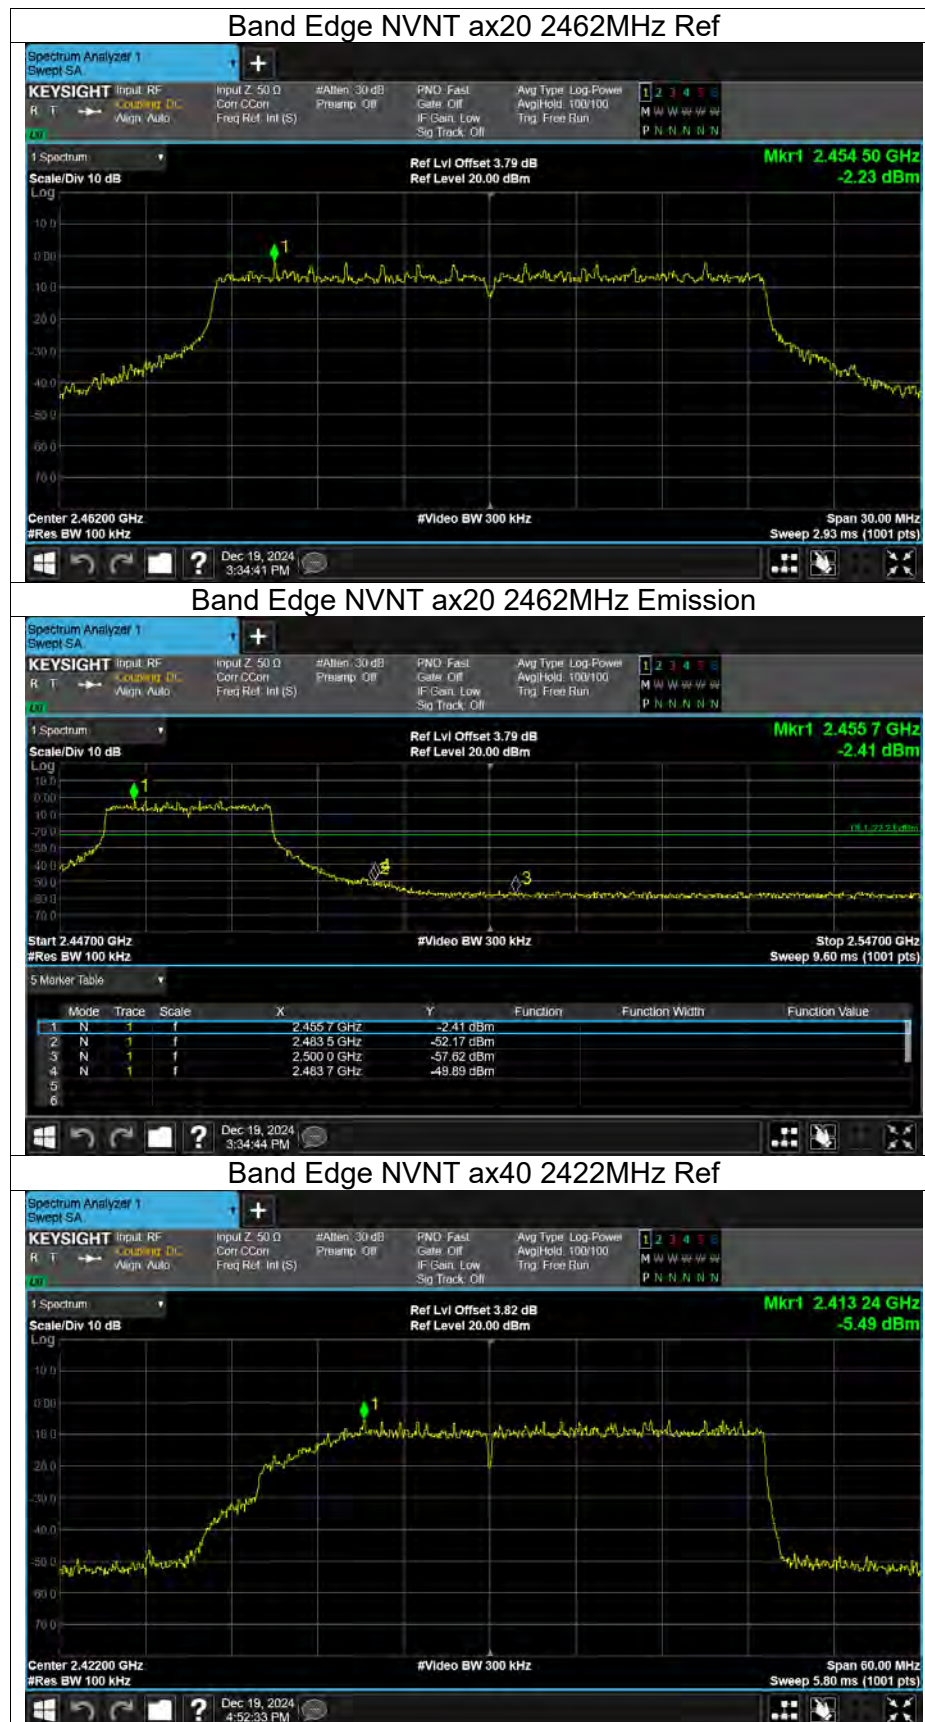



Band Edge NVNT ax40 2422MHz Emission

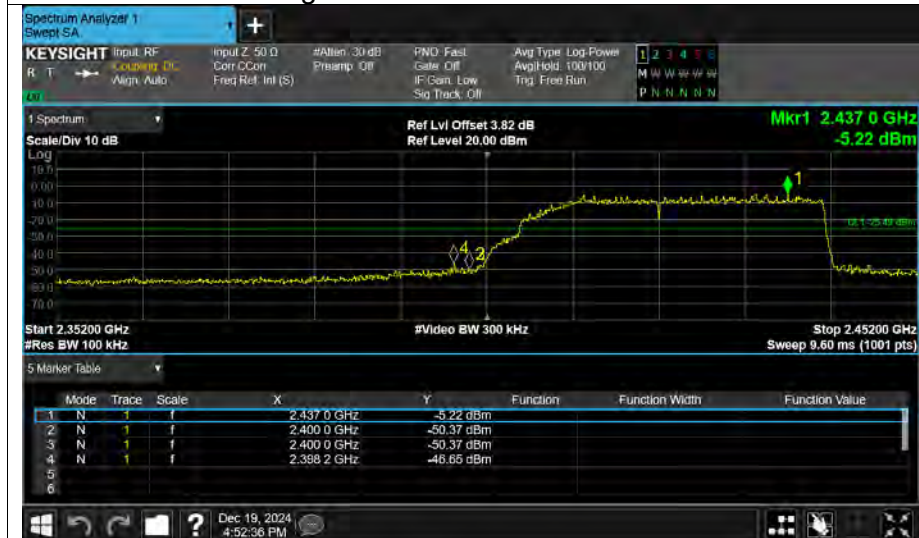

Band Edge NVNT ax40 2452MHz Ref



Band Edge NVNT ax40 2452MHz Emission





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-46.24	-20	Pass
NVNT	b	2437	-46.71	-20	Pass
NVNT	b	2462	-46.79	-20	Pass
NVNT	g	2412	-40.18	-20	Pass
NVNT	g	2437	-40.67	-20	Pass
NVNT	g	2462	-40.46	-20	Pass
NVNT	n20	2412	-40.43	-20	Pass
NVNT	n20	2437	-40.06	-20	Pass
NVNT	n20	2462	-40.14	-20	Pass
NVNT	n40	2422	-42.97	-20	Pass
NVNT	n40	2437	-43.16	-20	Pass
NVNT	n40	2452	-43.09	-20	Pass
NVNT	ax20	2412	-39.49	-20	Pass
NVNT	ax20	2437	-39.16	-20	Pass
NVNT	ax20	2462	-39.18	-20	Pass
NVNT	ax40	2422	-42.31	-20	Pass
NVNT	ax40	2437	-42.03	-20	Pass
NVNT	ax40	2452	-42.09	-20	Pass



Test Graphs

Tx. Spurious NVNT b 2412MHz Ref



Tx. Spurious NVNT b 2412MHz Emission



Tx. Spurious NVNT b 2437MHz Ref



Tx. Spurious NVNT b 2437MHz Emission




Tx. Spurious NVNT b 2462MHz Ref



Tx. Spurious NVNT b 2462MHz Emission



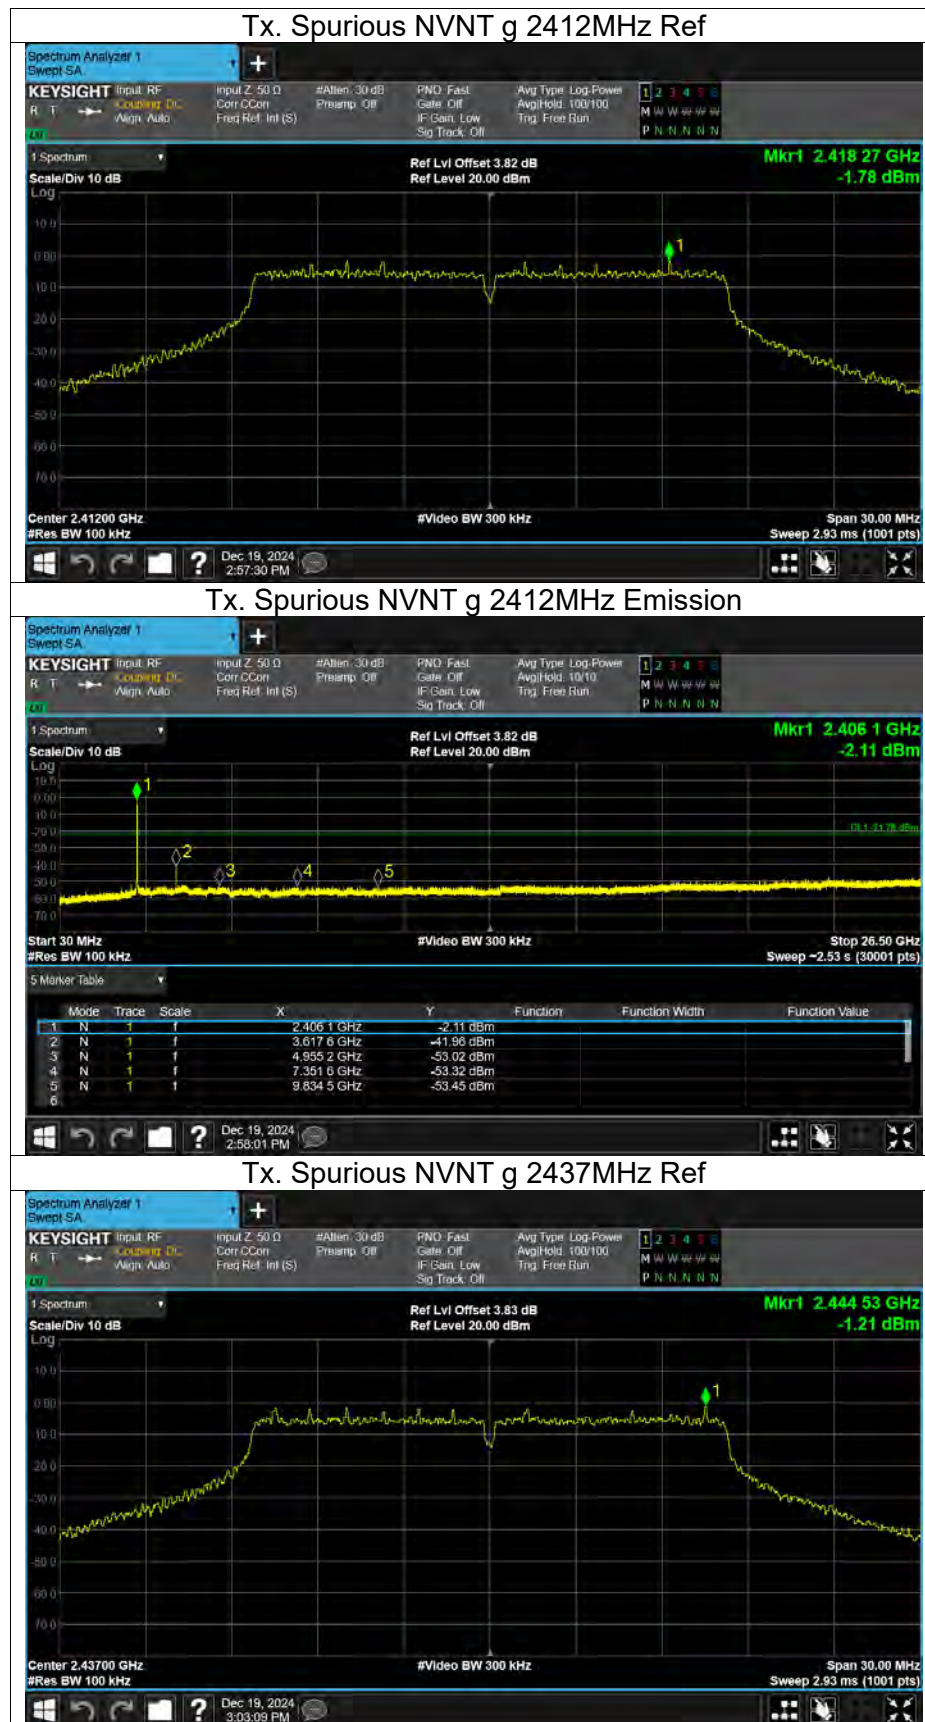



Tx. Spurious NVNT g 2437MHz Emission



Tx. Spurious NVNT g 2462MHz Ref



Tx. Spurious NVNT g 2462MHz Emission





Tx. Spurious NVNT n20 2412MHz Ref



Tx. Spurious NVNT n20 2412MHz Emission



Tx. Spurious NVNT n20 2437MHz Ref





Tx. Spurious NVNT n20 2437MHz Emission




Tx. Spurious NVNT n20 2462MHz Ref



Tx. Spurious NVNT n20 2462MHz Emission



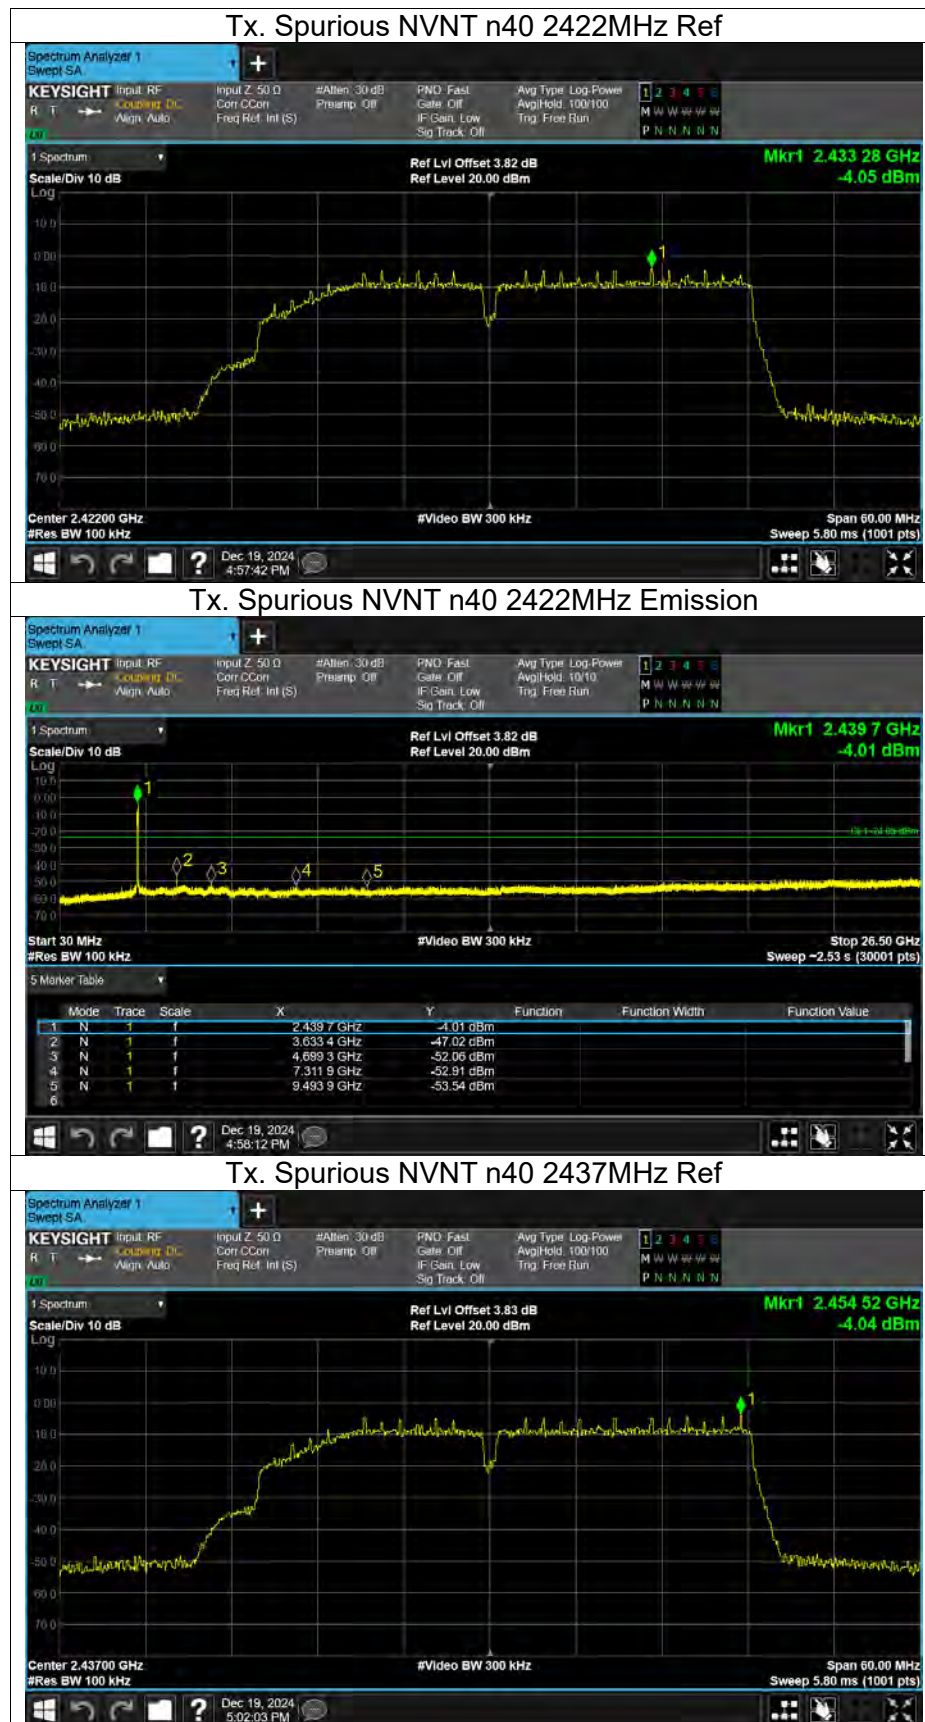



Tx. Spurious NVNT n40 2437MHz Emission



Tx. Spurious NVNT n40 2452MHz Ref



Tx. Spurious NVNT n40 2452MHz Emission






Tx. Spurious NVNT ax20 2412MHz Ref



Tx. Spurious NVNT ax20 2412MHz Emission

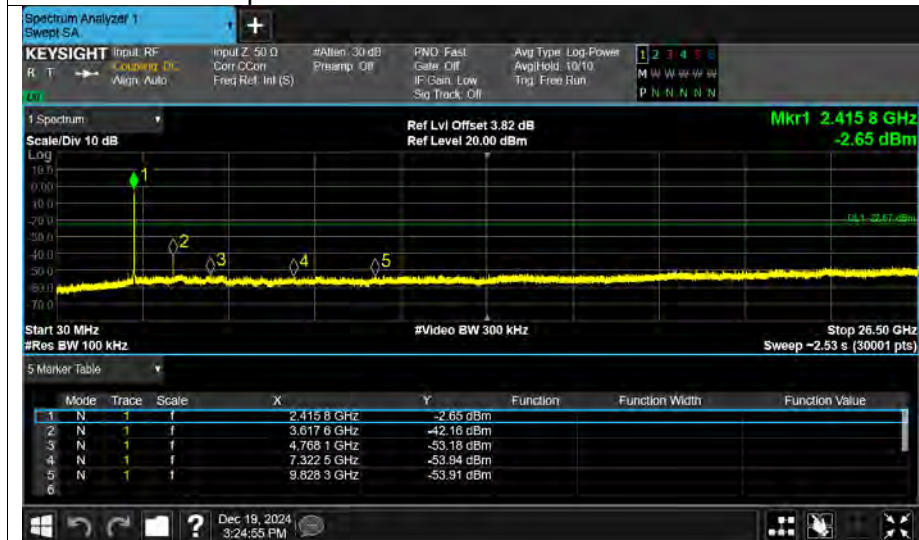

Tx. Spurious NVNT ax20 2437MHz Ref






Tx. Spurious NVNT ax20 2437MHz Emission



Tx. Spurious NVNT ax20 2462MHz Ref

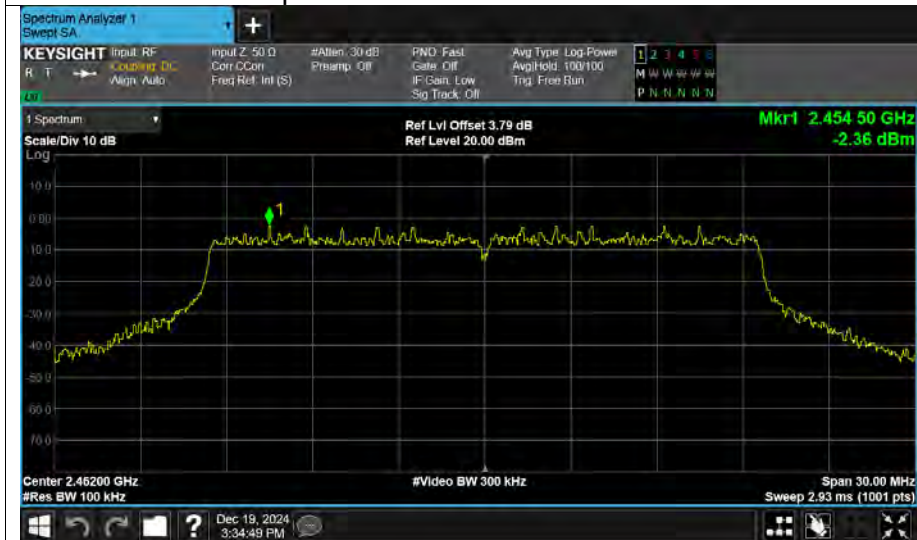


Tx. Spurious NVNT ax20 2462MHz Emission






Tx. Spurious NVNT ax40 2422MHz Ref

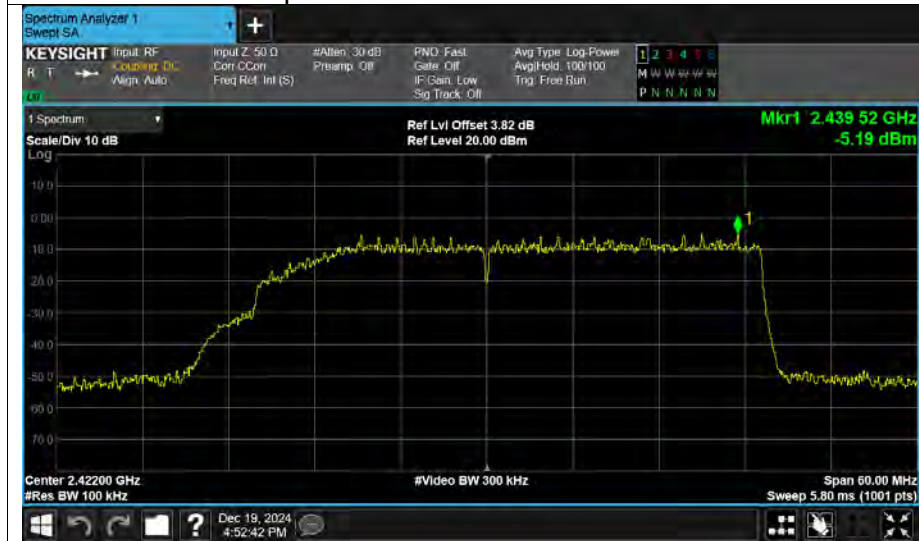

Tx. Spurious NVNT ax40 2422MHz Emission



Tx. Spurious NVNT ax40 2437MHz Ref

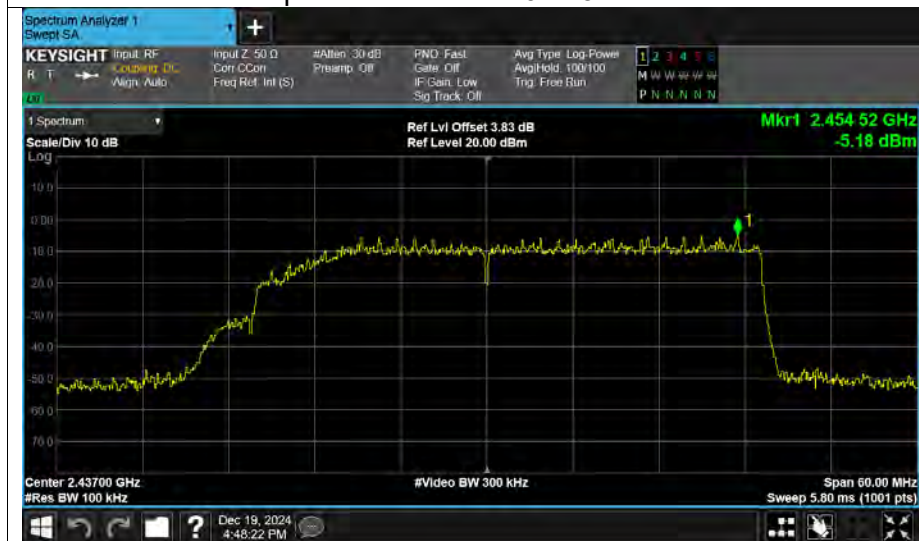



Tx. Spurious NVNT ax40 2437MHz Emission



Tx. Spurious NVNT ax40 2452MHz Ref



Tx. Spurious NVNT ax40 2452MHz Emission





FREQUENCY STABILITY

Channel 6	2437.0000
Voltage(V)	Measurement Frequency(MHz)
115	2436.9910
100	2436.9907
85	2436.9908
Max.Deviation(MHz)	0.0031
Max.Deviation(ppm)	1.27

Temperature(°C)	Measurement Frequency(MHz)
-30	2436.9920
-20	2436.9918
-10	2436.9912
0	2436.9914
10	2436.9911
20	2436.9911
30	2436.9917
40	2436.9910
50	2436.9919
Max.Deviation(MHz)	-0.0080
Max.Deviation(ppm)	-3.28



APPENDIX II - MEASUREMENT PHOTOS

Note: Please see the attached RF_Test Setup photos for FCC ID&IC.

※※※※※END OF THE REPORT※※※※※