

## Appendix C

### RF Test Data for 2.4G WIFI (Conducted Measurement)

**Product Name: Tablet PC**

**Trade Mark: Bright Life**

**Test Model: TL11**


#### Environmental Conditions

Temperature:	23.1° C
Relative Humidity:	52.5%
ATM Pressure:	100.0 kPa
Test Engineer:	Diamond Lu
Supervised by:	Tom.Liu


#### C.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
11B	2437	Ant1	100	PASS
11G	2437	Ant1	100	PASS
11N20SISO	2437	Ant1	100	PASS
11N40SISO	2437	Ant1	100	PASS


Duty Cycle\_11B\_2437\_Ant1

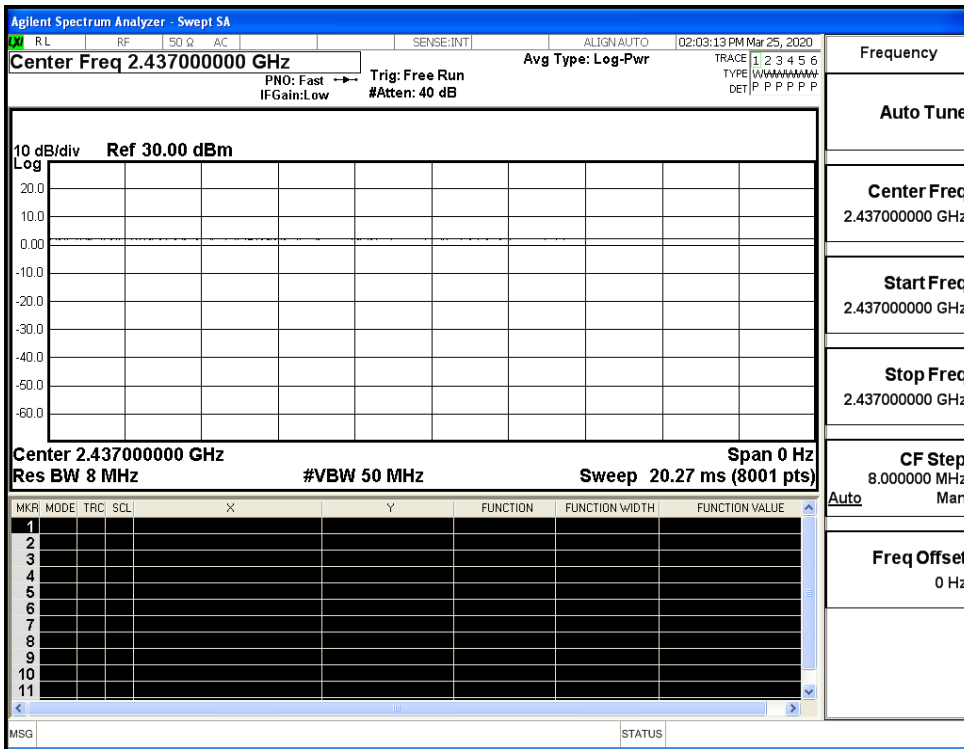


Duty Cycle\_11G\_2437\_Ant1

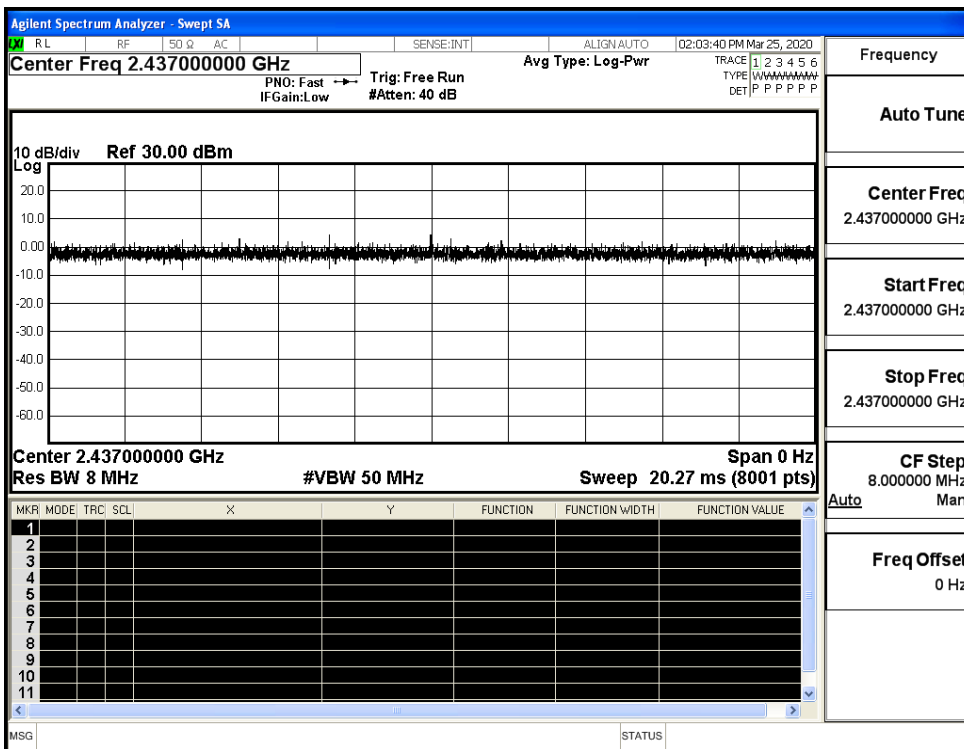

Duty Cycle\_11N20SISO\_2437\_Ant1

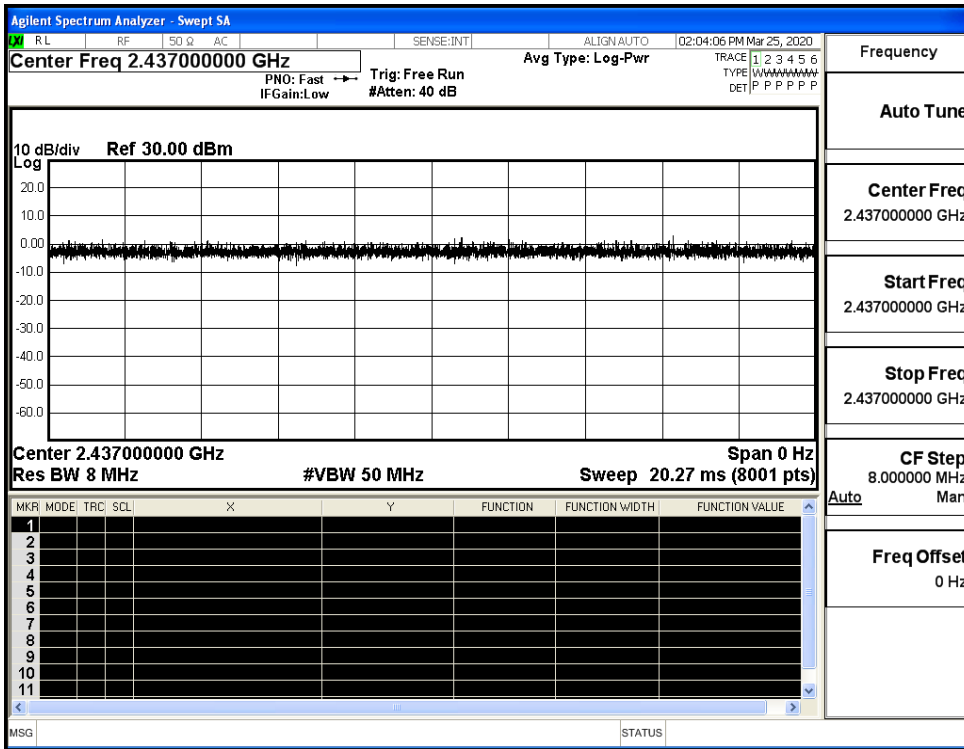

Duty Cycle\_11N40SISO\_2437\_Ant1

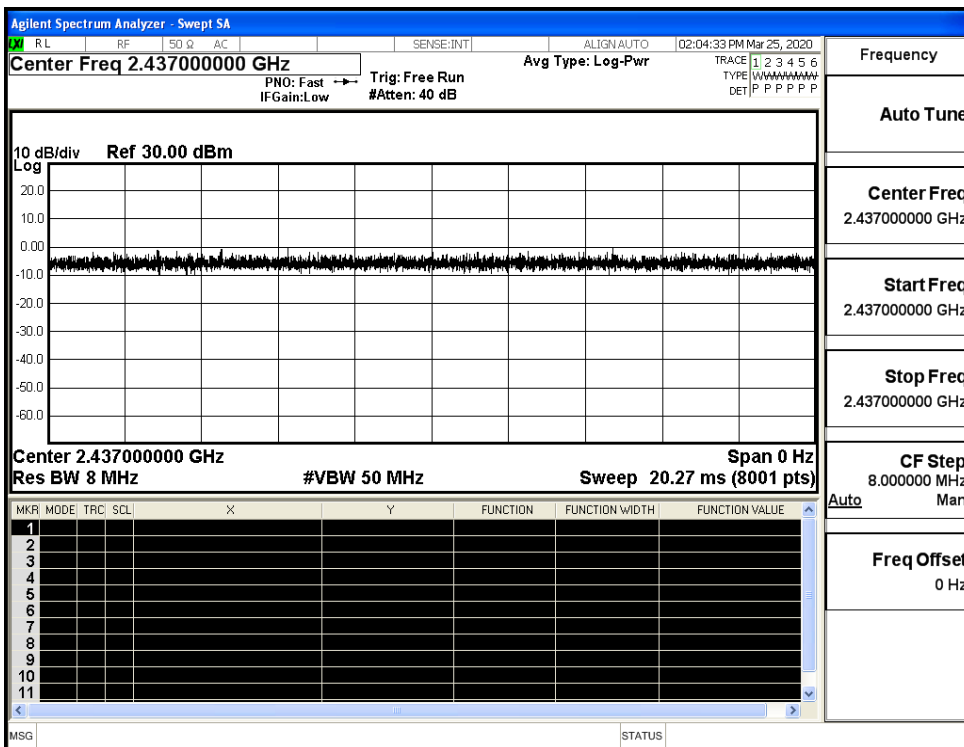


### C.2 Maximum Conducted Output Power

Mode	Channel	Meas.Level [dBm]	Limit [dBm]	Verdict
11B	LCH	9.49	30	PASS
	MCH	9.03	30	PASS
	HCH	8.83	30	PASS
11G	LCH	10.4	30	PASS
	MCH	10.42	30	PASS
	HCH	9.17	30	PASS
11N20SISO	LCH	10.15	30	PASS
	MCH	10.2	30	PASS
	HCH	9.02	30	PASS
11N40SISO	LCH	9.95	30	PASS
	MCH	9.8	30	PASS
	HCH	9.43	30	PASS


### C.3 Maximum Power Spectral Density

Mode	Channel	Meas.Level [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
11B	LCH	-16.083	8	PASS
	MCH	-16.672	8	PASS
	HCH	-18.401	8	PASS
11G	LCH	-23.120	8	PASS
	MCH	-22.833	8	PASS
	HCH	-23.848	8	PASS
11N20SISO	LCH	-23.662	8	PASS
	MCH	-23.782	8	PASS
	HCH	-25.304	8	PASS
11N40SISO	LCH	-27.804	8	PASS
	MCH	-26.509	8	PASS
	HCH	-26.911	8	PASS

#### Test Graphs

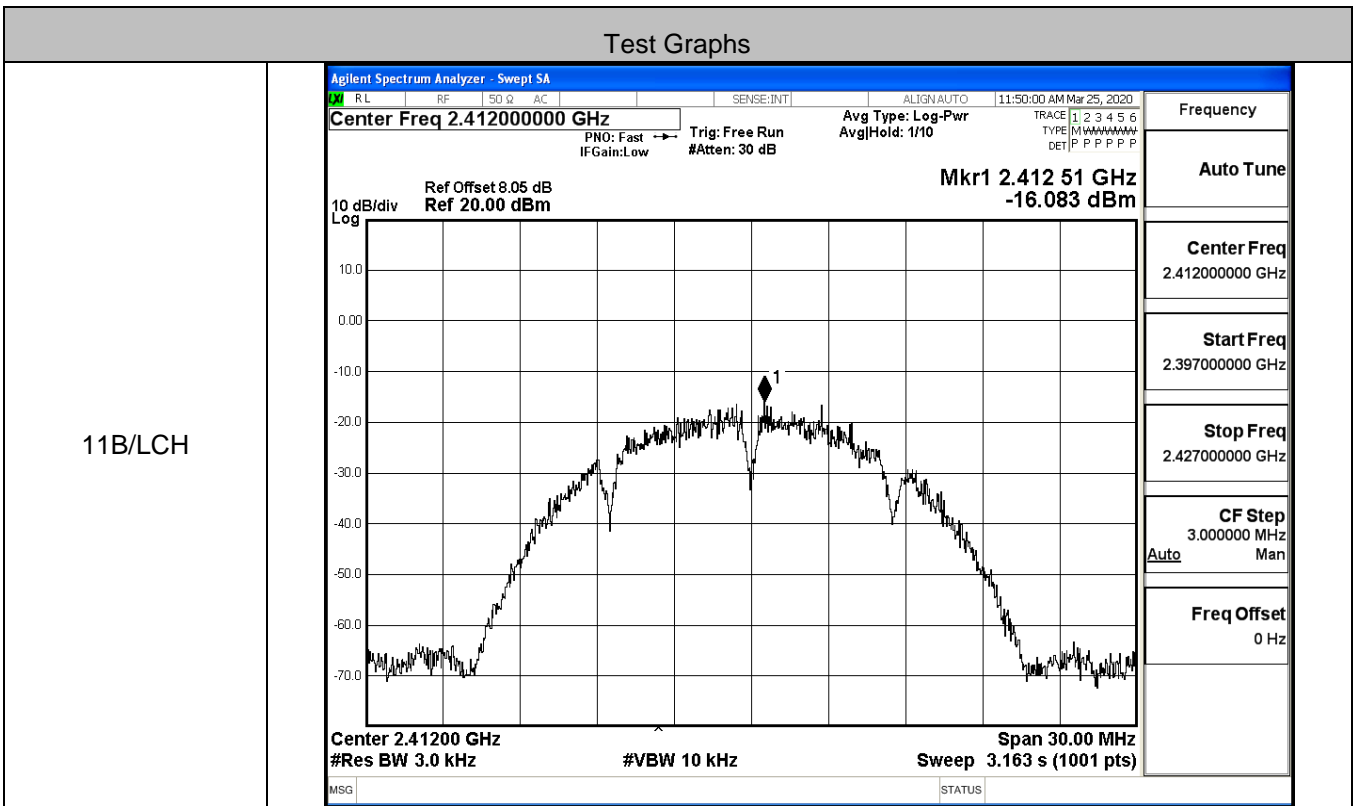


11B/MCH

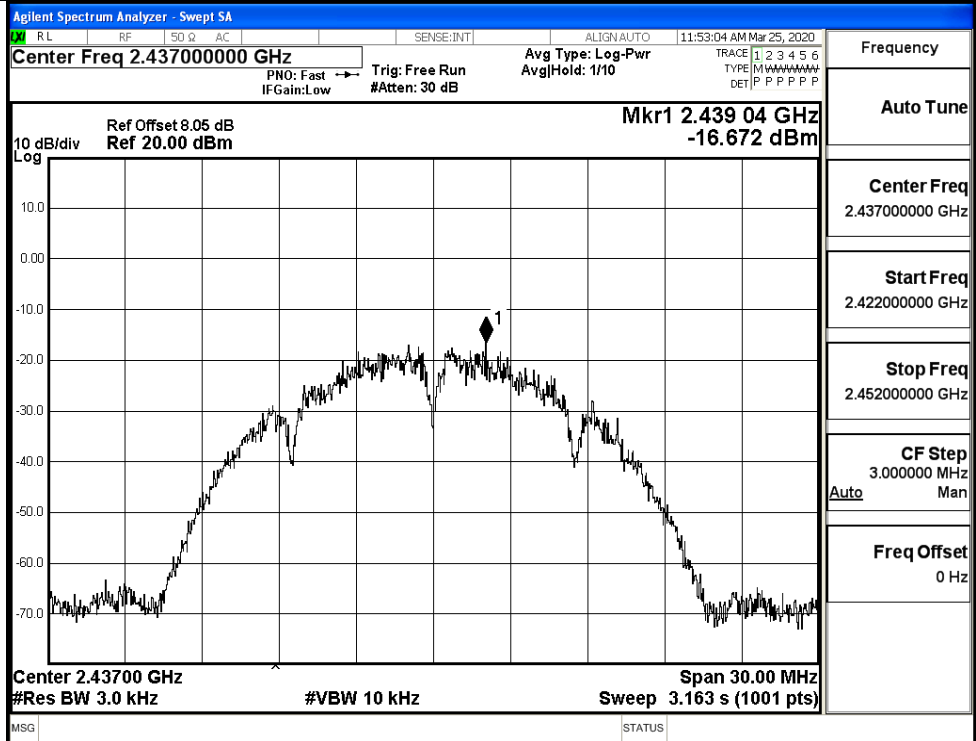


Frequency
Auto Tune
Center Freq 2.43700000 GHz
Start Freq 2.42200000 GHz
Stop Freq 2.45200000 GHz
CF Step 3.000000 MHz Auto Man
Freq Offset 0 Hz

11B/HCH

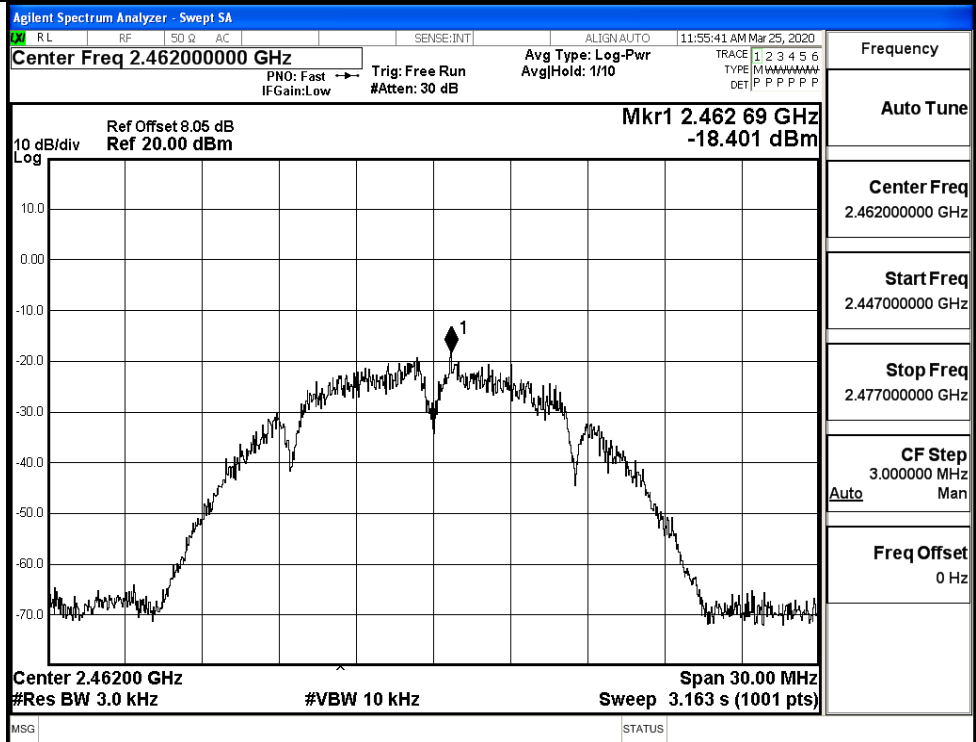


Frequency
Auto Tune
Center Freq 2.46200000 GHz
Start Freq 2.44700000 GHz
Stop Freq 2.47700000 GHz
CF Step 3.000000 MHz Auto Man
Freq Offset 0 Hz


11G/LCH

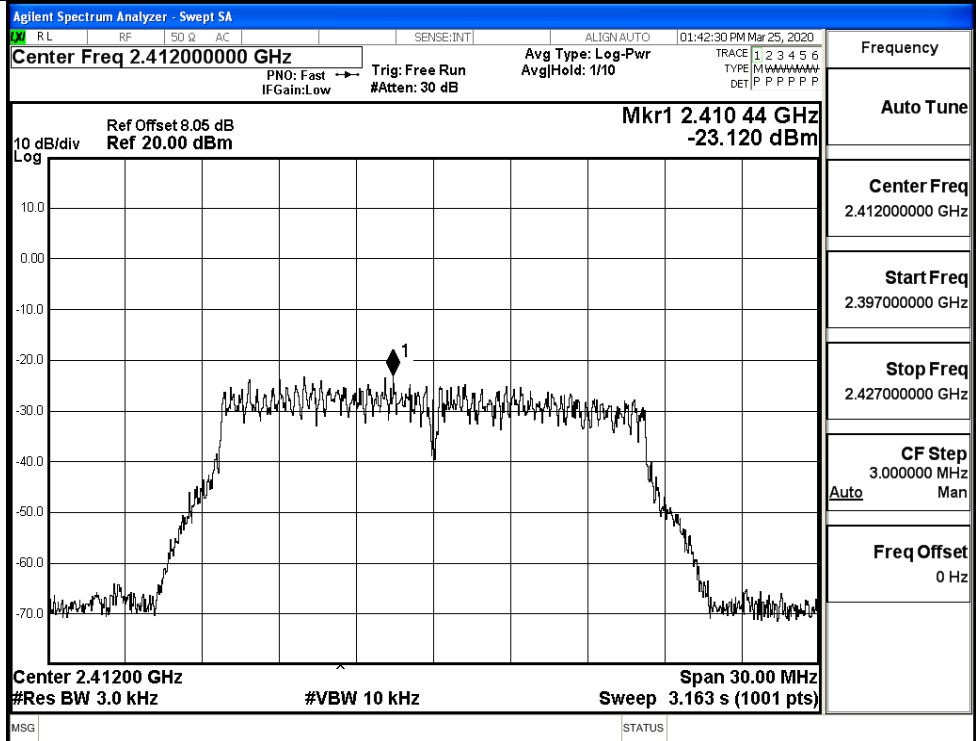


11G/MCH

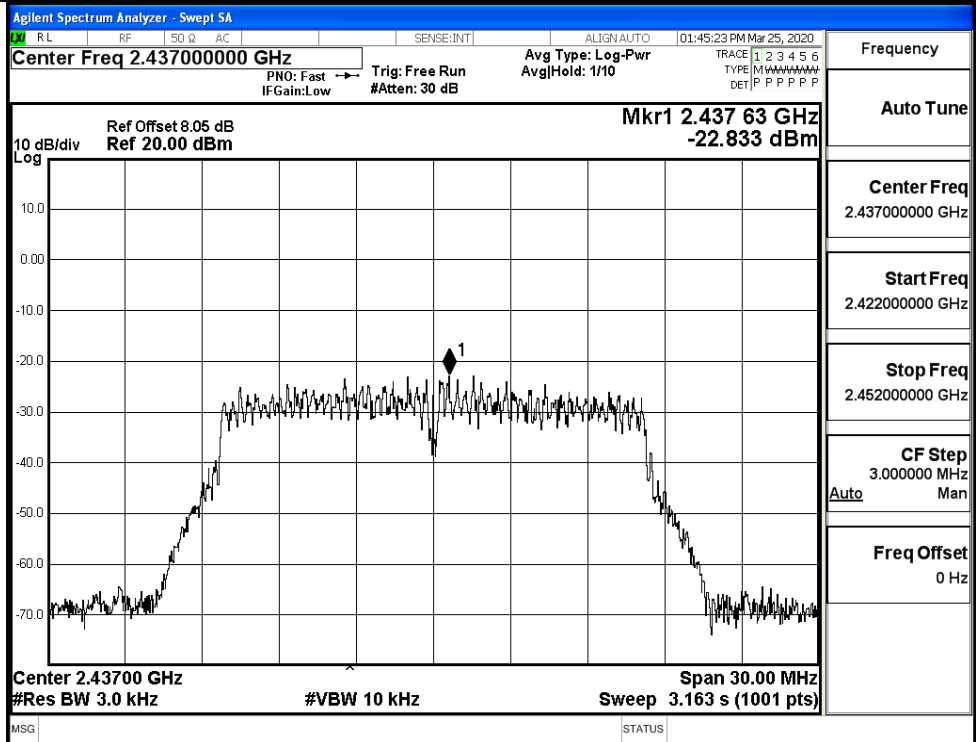

11G/HCH


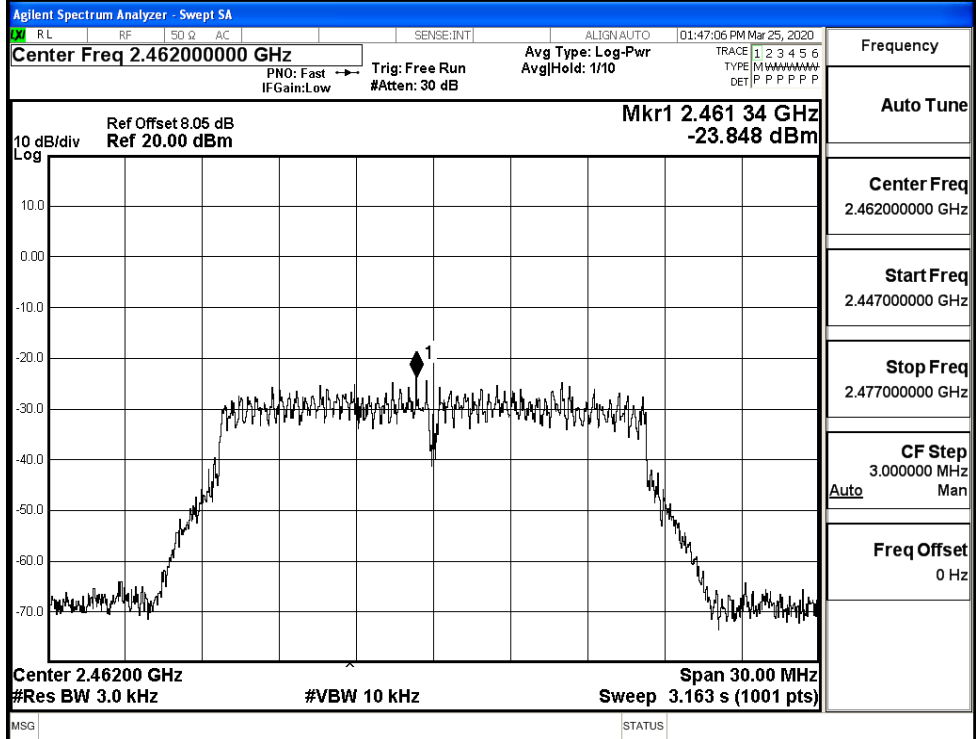


11N20SISO/LCH

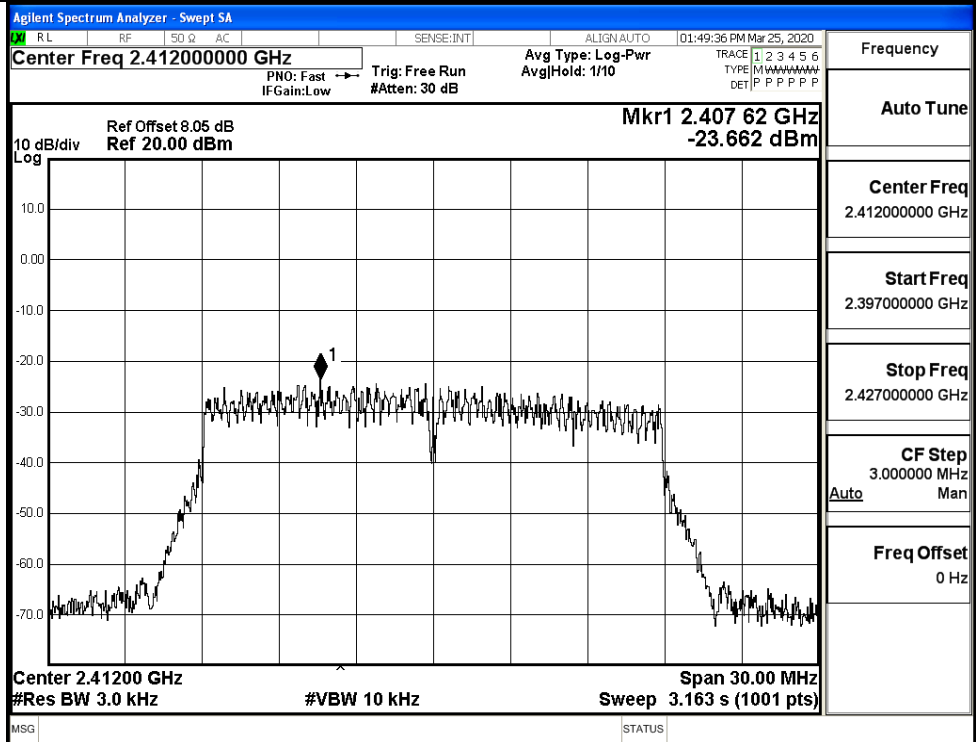




<p>11N20SISO/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 8.05 dB Ref 20.00 dBm</p> <p>Mkr1 2.438 62 GHz -23.782 dBm</p> <p>10 dB/div Log</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>11N20SISO/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 8.05 dB Ref 20.00 dBm</p> <p>Mkr1 2.462 30 GHz -25.304 dBm</p> <p>10 dB/div Log</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
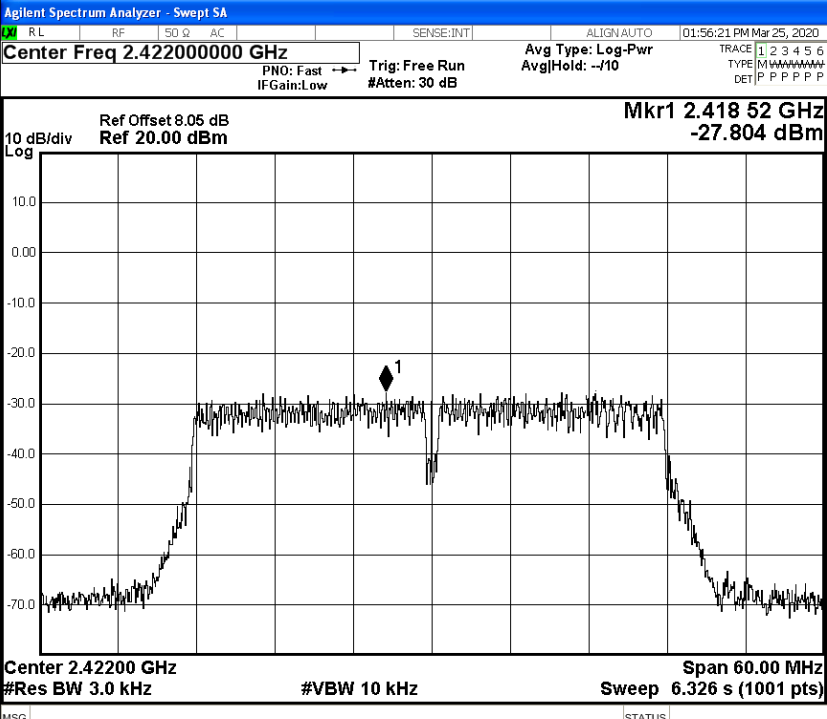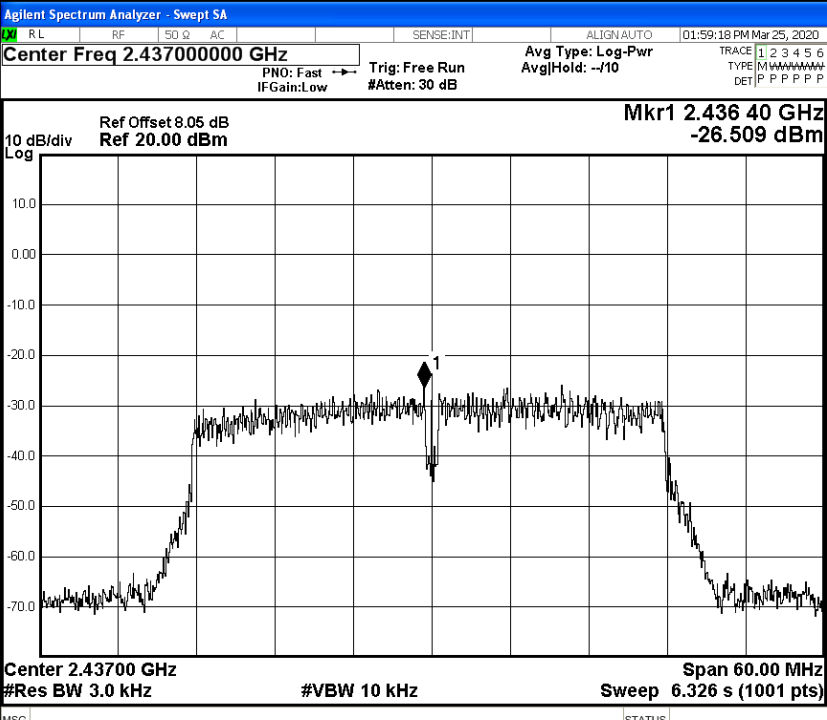
<p>11N40SISO/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.42200000 GHz</p> <p>Mkr1 2.418 52 GHz -27.804 dBm</p> <p>Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 6.326 s (1001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.422000000 GHz</p> <p>Start Freq 2.392000000 GHz</p> <p>Stop Freq 2.452000000 GHz</p> <p>CF Step 6.000000 MHz Auto</p> <p>Freq Offset 0 Hz</p>
<p>11N40SISO/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Mkr1 2.436 40 GHz -26.509 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 6.326 s (1001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.437000000 GHz</p> <p>Start Freq 2.407000000 GHz</p> <p>Stop Freq 2.467000000 GHz</p> <p>CF Step 6.000000 MHz Auto</p> <p>Freq Offset 0 Hz</p>




**C.4 6dB Bandwidth**

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
11B	LCH	8.600	≥0.5	PASS
	MCH	8.091	≥0.5	PASS
	HCH	8.602	≥0.5	PASS
11G	LCH	16.45	≥0.5	PASS
	MCH	16.44	≥0.5	PASS
	HCH	16.45	≥0.5	PASS
11N20SISO	LCH	17.70	≥0.5	PASS
	MCH	17.64	≥0.5	PASS
	HCH	17.66	≥0.5	PASS
11N40SISO	LCH	36.48	≥0.5	PASS
	MCH	36.35	≥0.5	PASS
	HCH	36.43	≥0.5	PASS

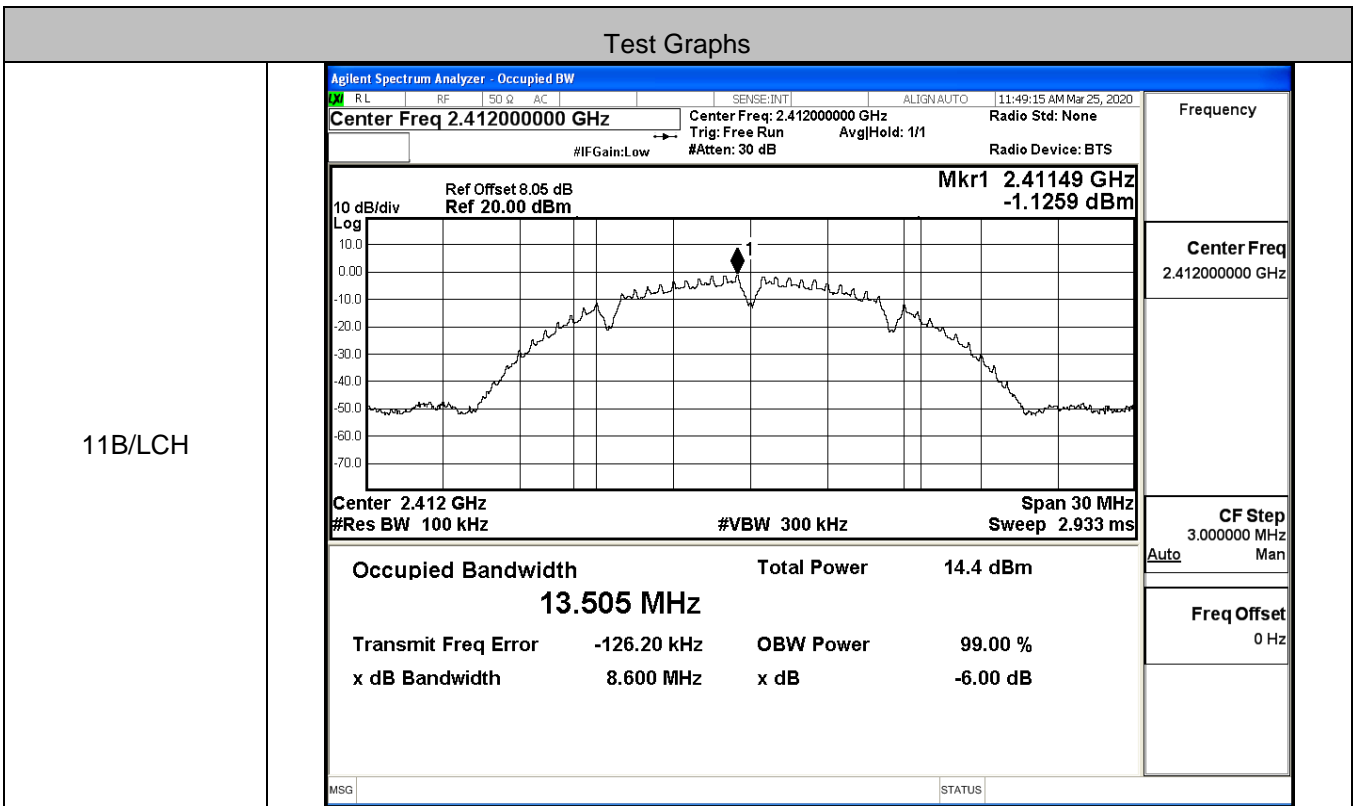

11B/MCH

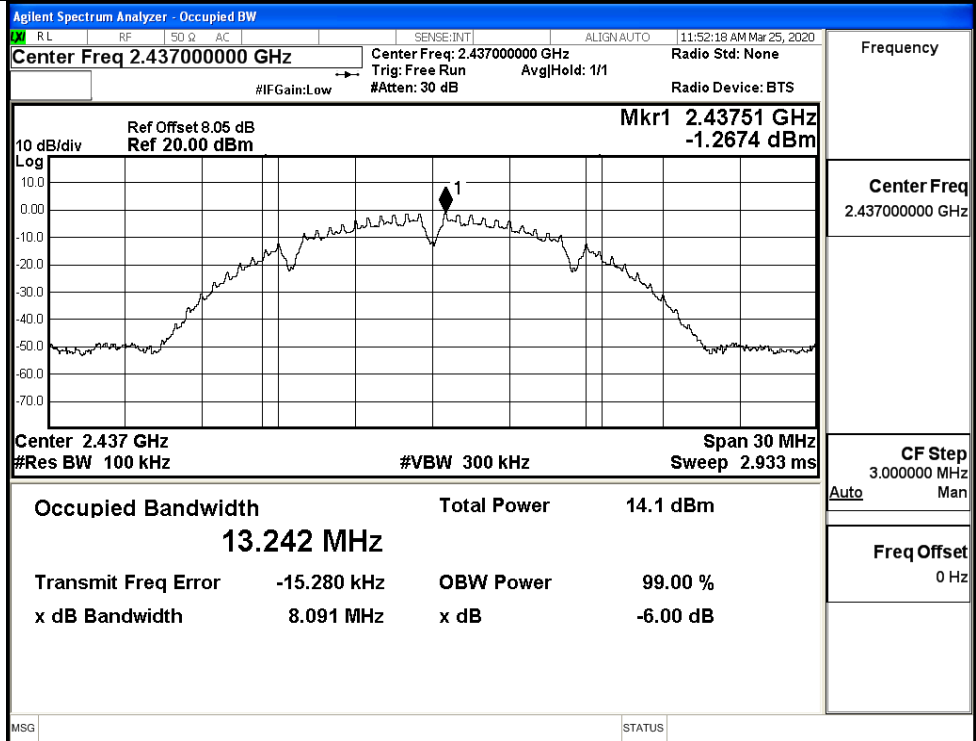


Frequency

Center Freq  
2.43700000 GHz

CF Step  
3.000000 MHz  
Auto Man

Freq Offset  
0 Hz

11B/HCH

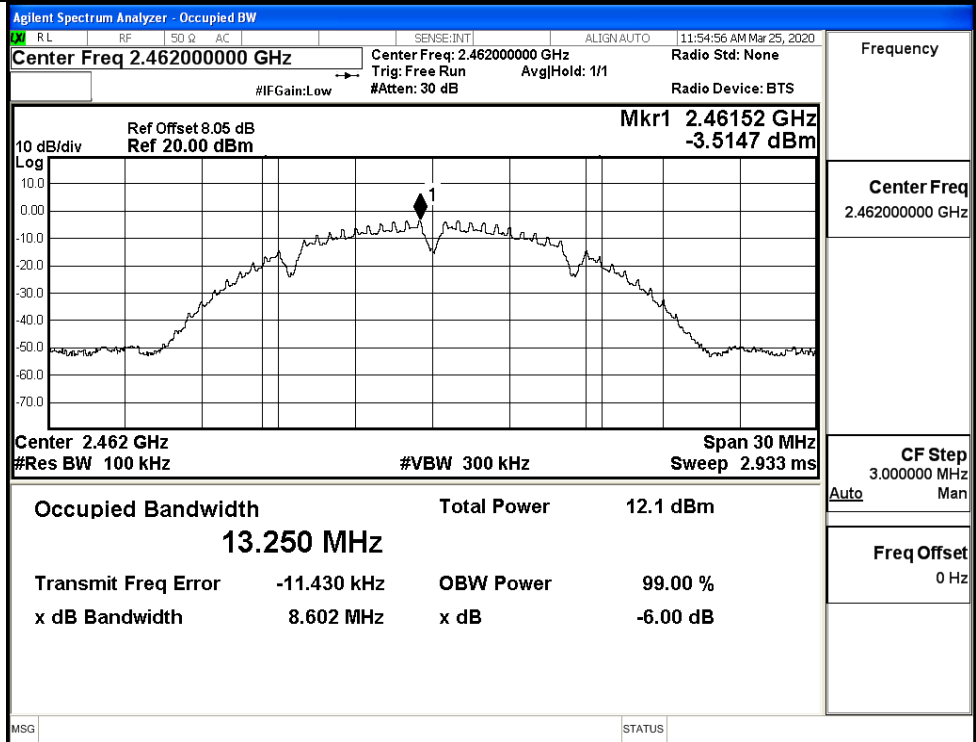


Frequency

Center Freq  
2.46200000 GHz


CF Step  
3.000000 MHz  
Auto Man

Freq Offset  
0 Hz


11G/LCH

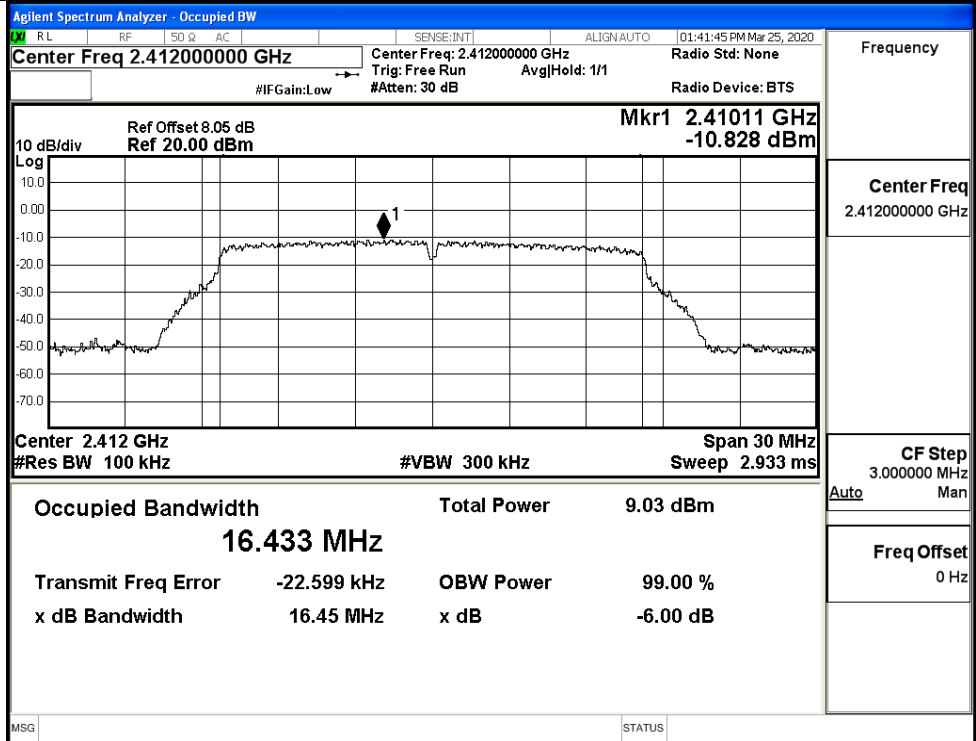


11G/MCH

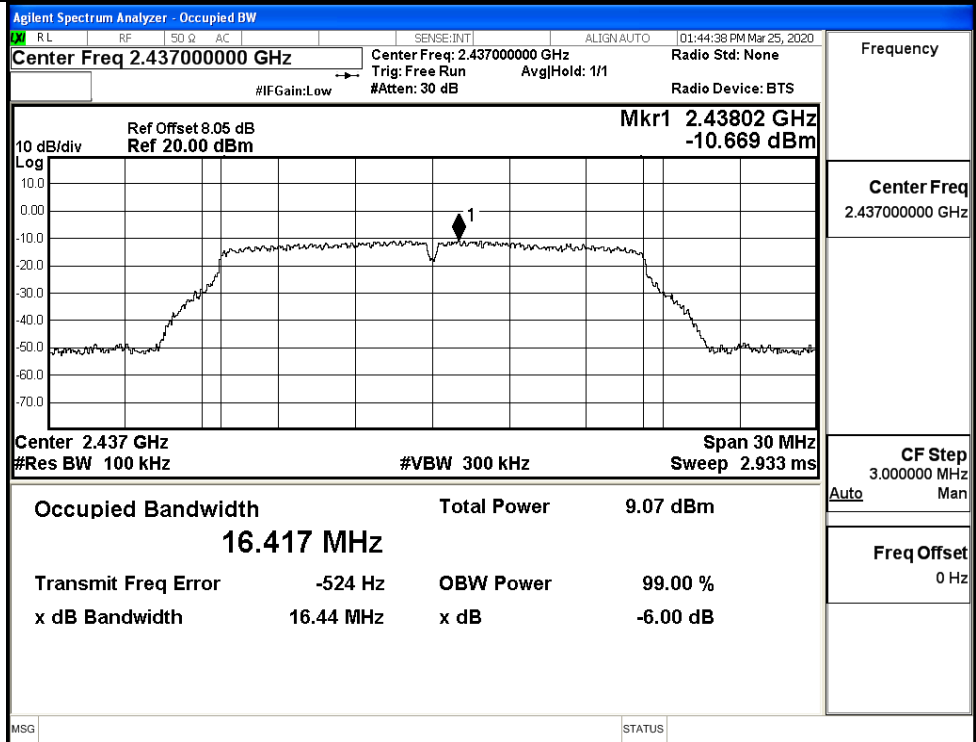

11G/HCH

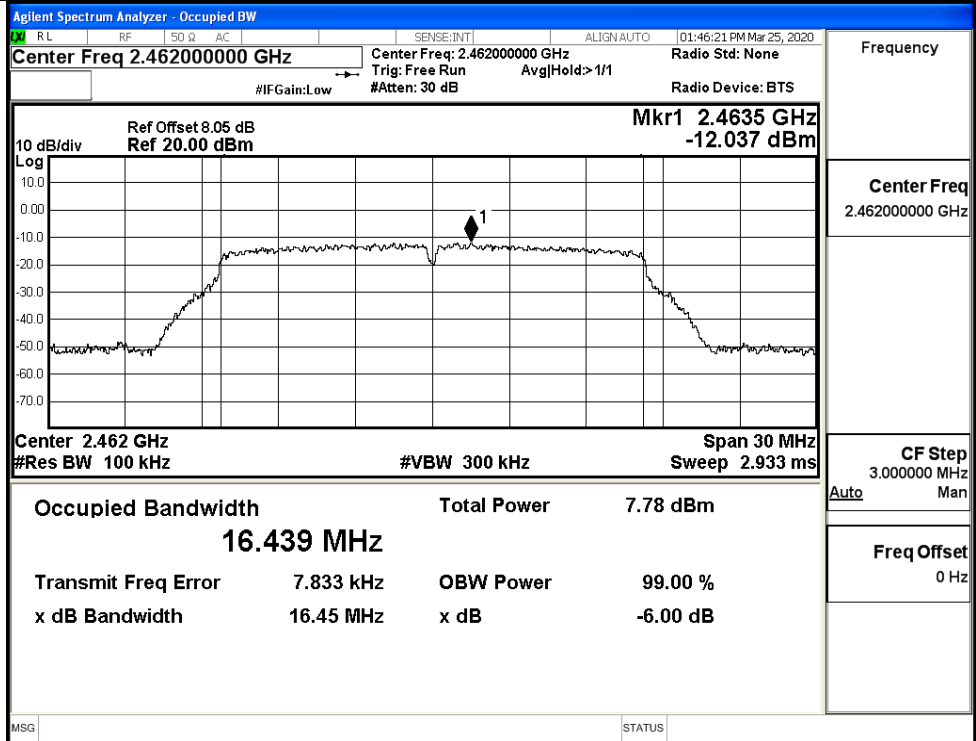


11N20SISO/LCH

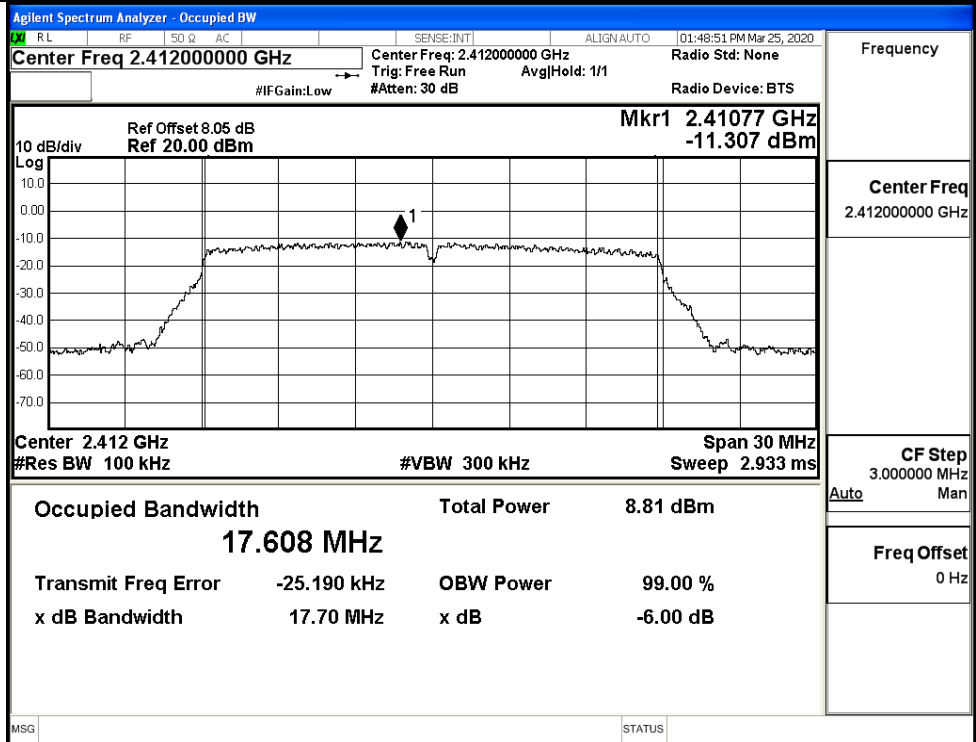

<p>11N20SISO/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>RL RF SO Q AC SENSE:INT ALIGN AUTO 01:51:19 PM Mar 25, 2020</p> <p>Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Radio Std: None          Trig: Free Run AvgHold: 1/1          #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <p>10 dB/div Ref Offset 8.05 dB Mkr1 2.43637 GHz          Ref 20.00 dBm -11.073 dBm</p> <p>Center 2.437 GHz Span 30 MHz          #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.595 MHz Total Power 8.82 dBm</p> <p>Transmit Freq Error -1.848 kHz OBW Power 99.00 %          x dB Bandwidth 17.64 MHz x dB -6.00 dB</p> <p>MSG STATUS</p>	<p>Frequency</p> <p>Center Freq 2.43700000 GHz</p> <p>CF Step 3.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>11N20SISO/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>RL RF SO Q AC SENSE:INT ALIGN AUTO 01:53:01 PM Mar 25, 2020</p> <p>Center Freq 2.46200000 GHz Center Freq: 2.46200000 GHz Radio Std: None          Trig: Free Run AvgHold: 1/1          #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <p>10 dB/div Ref Offset 8.05 dB Mkr1 2.46101 GHz          Ref 20.00 dBm -12.328 dBm</p> <p>Center 2.462 GHz Span 30 MHz          #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.592 MHz Total Power 7.62 dBm</p> <p>Transmit Freq Error 5.063 kHz OBW Power 99.00 %          x dB Bandwidth 17.66 MHz x dB -6.00 dB</p> <p>MSG STATUS</p>	<p>Frequency</p> <p>Center Freq 2.46200000 GHz</p> <p>CF Step 3.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>



<p>11N40SISO/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>RL RF 50 Ω AC SENSE:INT ALIGN AUTO 01:55:36 PM Mar 25, 2020</p> <p>Center Freq 2.42200000 GHz Center Freq: 2.42200000 GHz Radio Std: None          Trig: Free Run AvgHold: 1/1          #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <p>10 dB/div Ref Offset 8.05 dB Mkr1 2.41726 GHz          Ref 20.00 dBm -14.958 dBm</p> <p>Center 2.422 GHz Span 60 MHz          #Res BW 100 kHz #VBW 300 kHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.063 MHz Total Power 8.58 dBm</p> <p>Transmit Freq Error -19.405 kHz OBW Power 99.00 %          x dB Bandwidth 36.48 MHz x dB -6.00 dB</p> <p>MSG STATUS</p>	<p>Frequency</p> <p>Center Freq 2.42200000 GHz</p> <p>CF Step 6.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>11N40SISO/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>RL RF 50 Ω AC SENSE:INT ALIGN AUTO 01:58:33 PM Mar 25, 2020</p> <p>Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Radio Std: None          Trig: Free Run AvgHold: 1/1          #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <p>10 dB/div Ref Offset 8.05 dB Mkr1 2.43604 GHz          Ref 20.00 dBm -14.214 dBm</p> <p>Center 2.437 GHz Span 60 MHz          #Res BW 100 kHz #VBW 300 kHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 35.924 MHz Total Power 8.44 dBm</p> <p>Transmit Freq Error -16.251 kHz OBW Power 99.00 %          x dB Bandwidth 36.35 MHz x dB -6.00 dB</p> <p>MSG STATUS</p>	<p>Frequency</p> <p>Center Freq 2.43700000 GHz</p> <p>CF Step 6.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>

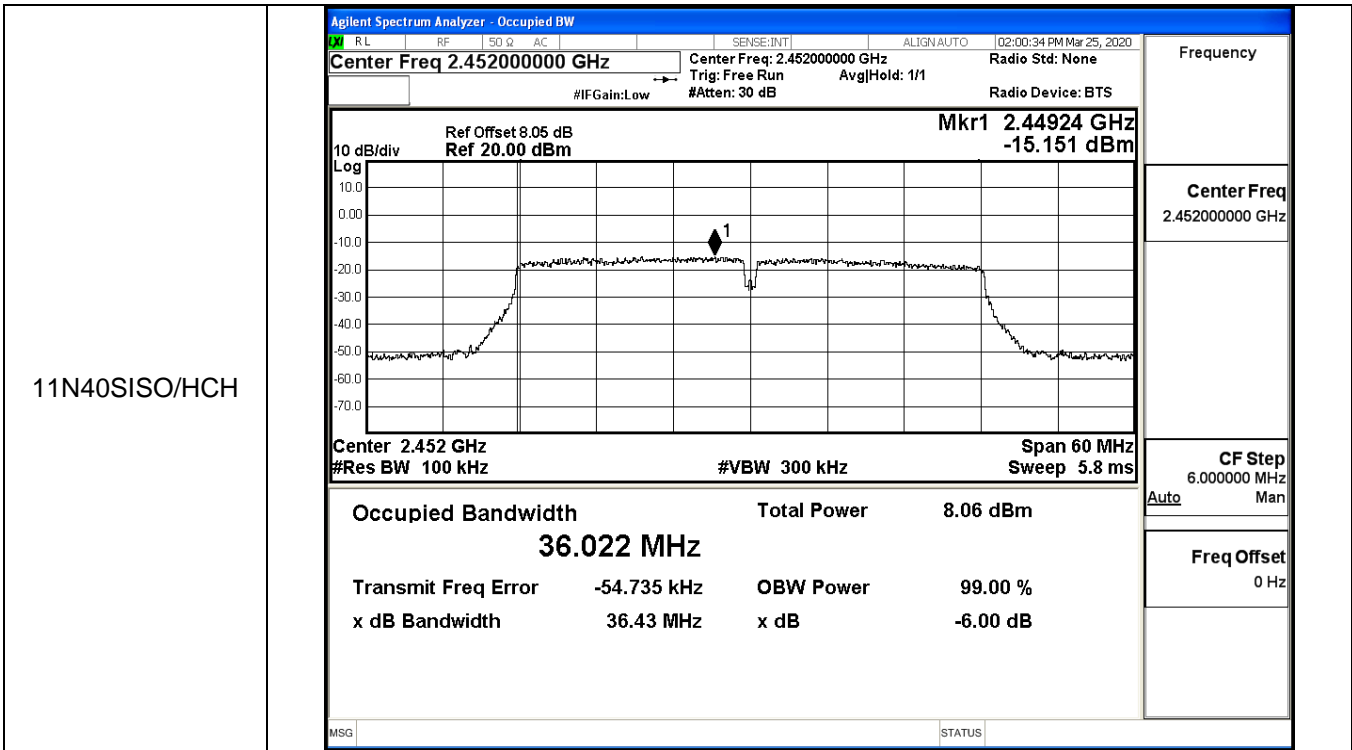


### C.5 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdic
------	---------	------------	------------------	-------------	--------


					t
11B	LCH	-1.551	-36.900	-21.551	PASS
	MCH	-1.845	-37.903	-21.845	PASS
	HCH	-2.005	-37.914	-22.005	PASS
11G	LCH	-11.111	-37.507	-31.111	PASS
	MCH	-10.862	-38.285	-30.862	PASS
	HCH	-12.524	-37.314	-32.524	PASS
11N20 SISO	LCH	-11.437	-37.602	-31.437	PASS
	MCH	-11.465	-37.860	-31.465	PASS
	HCH	-12.934	-37.623	-32.934	PASS
11N40 SISO	LCH	-15.253	-37.720	-35.253	PASS
	MCH	-14.353	-38.196	-34.353	PASS
	HCH	-15.189	-37.898	-35.189	PASS

11B\_LCH\_Graphs

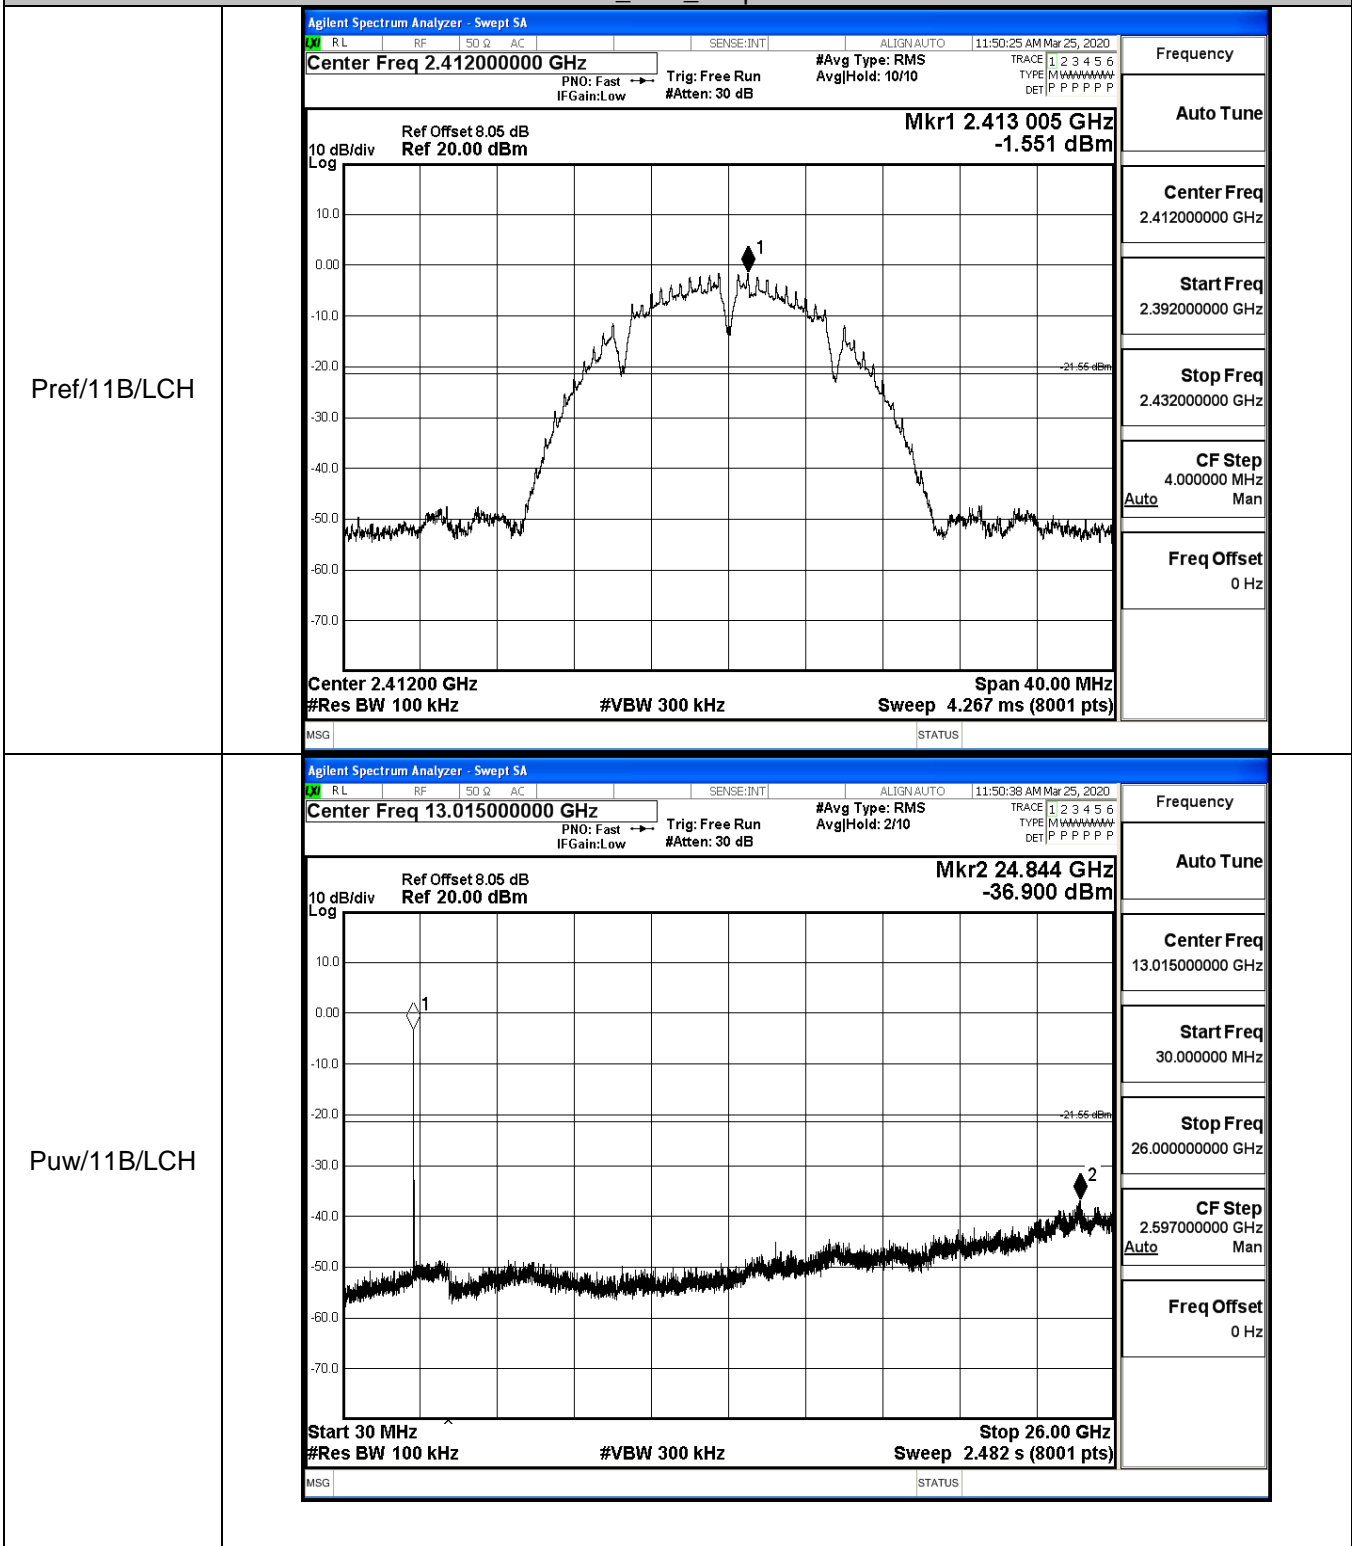


11B\_MCH\_Graphs


Pref/11B/MCH

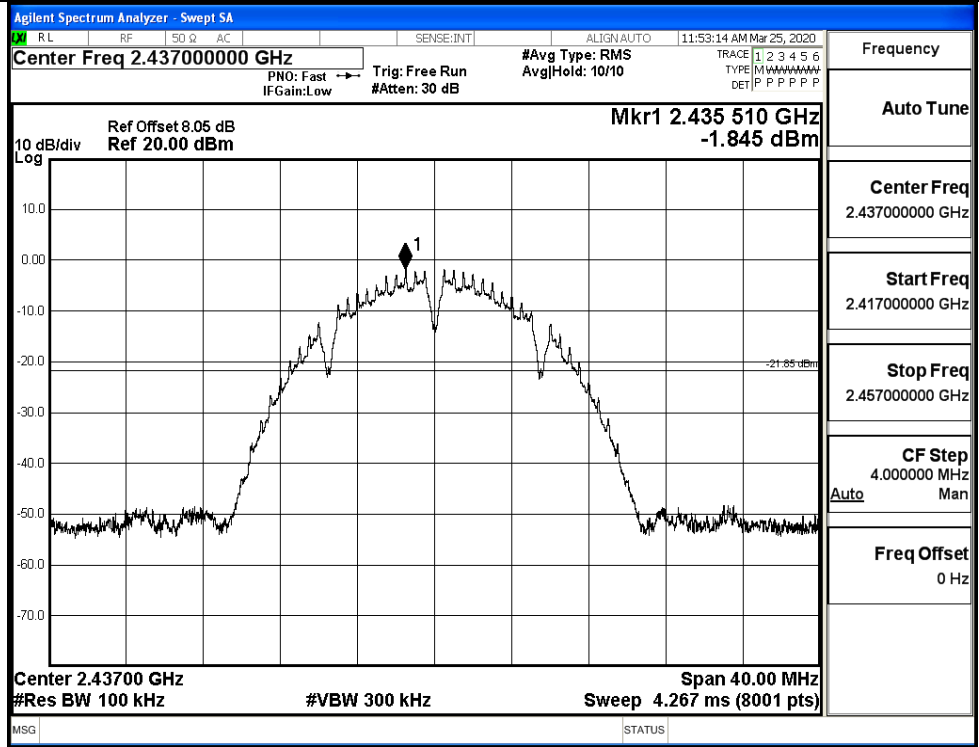



Puw/11B/MCH

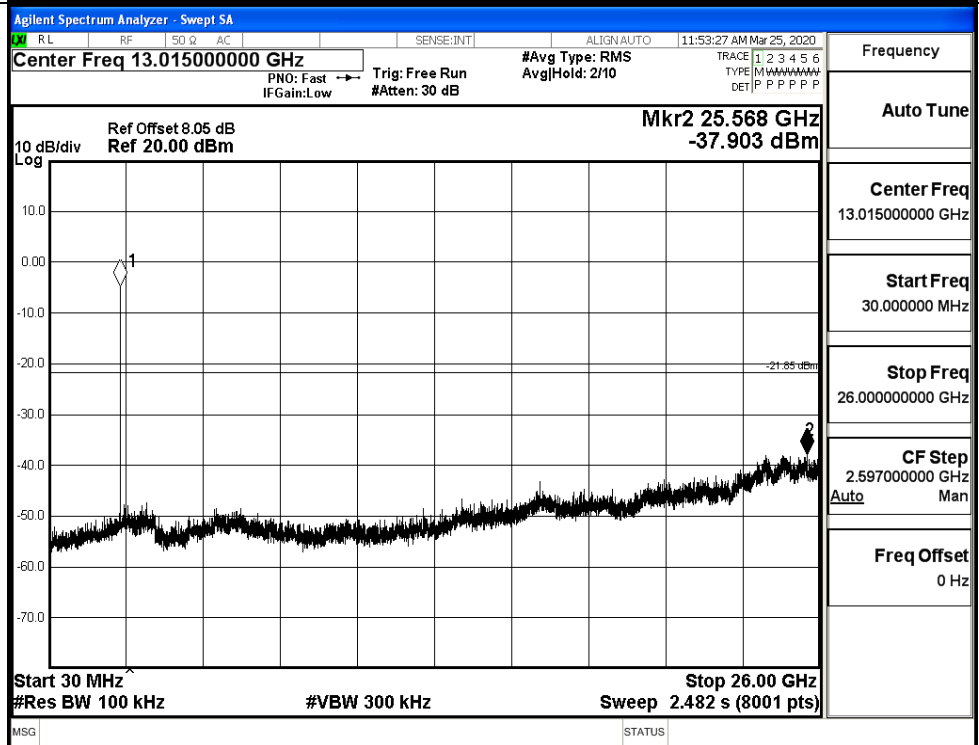

11B\_HCH\_Graphs

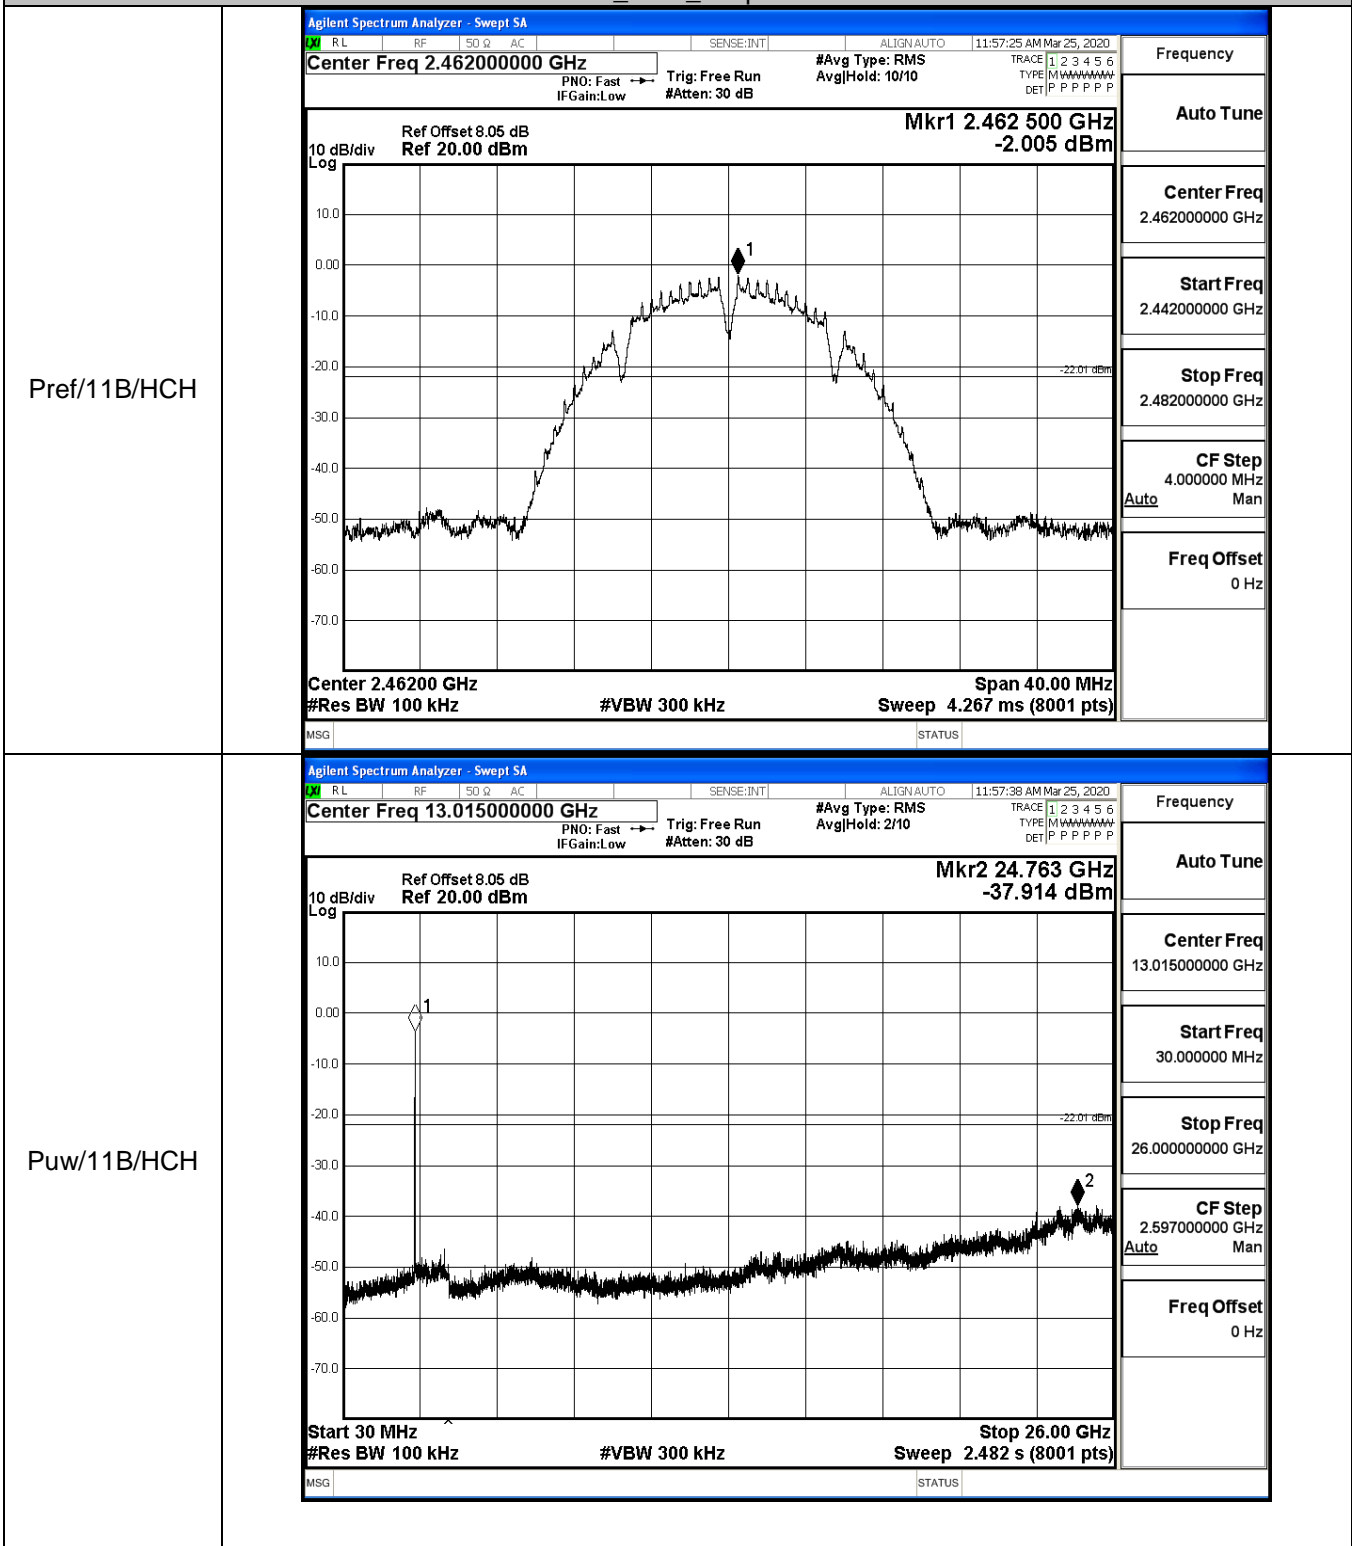

11G\_LCH\_Graphs

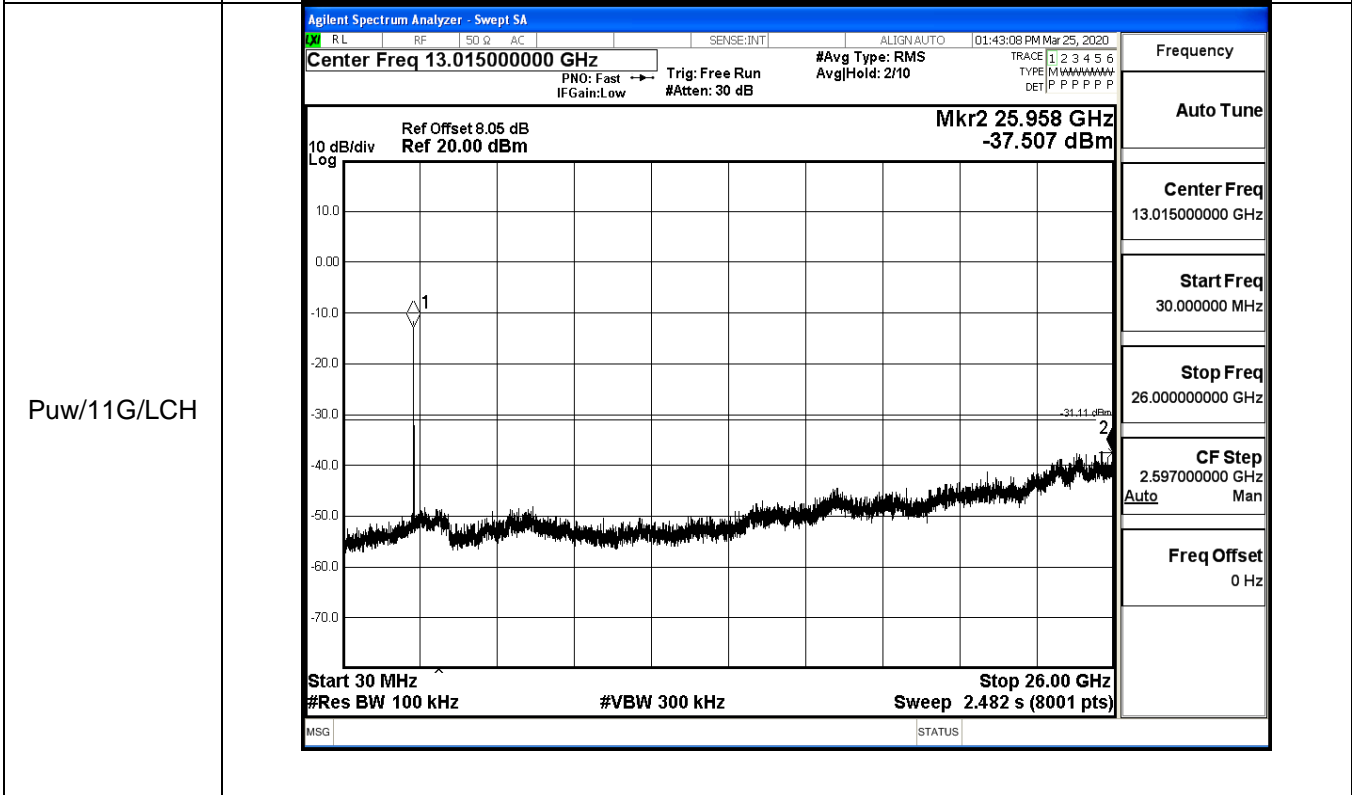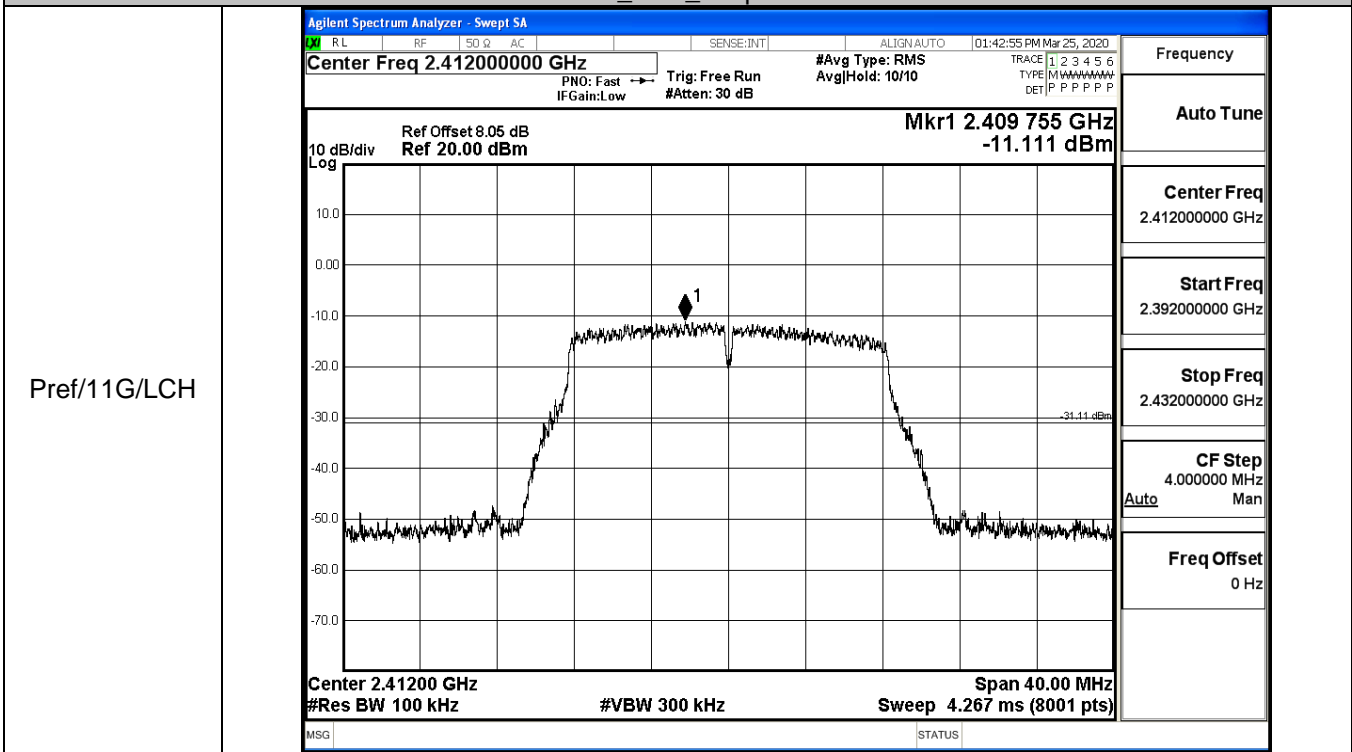

11G\_MCH\_Graphs


<p>Pref/11G/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Mkr1 2.437 635 GHz -10.862 dBm</p> <p>Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.267 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.437000000 GHz</p> <p>Start Freq 2.417000000 GHz</p> <p>Stop Freq 2.457000000 GHz</p> <p>CF Step 4.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>Puw/11G/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 13.01500000 GHz</p> <p>Mkr2 24.955 GHz -38.285 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.482 s (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.015000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.000000000 GHz</p> <p>CF Step 2.597000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>




11G\_HCH\_Graphs

<p>Pref/11G/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 8.05 dB Ref 20.00 dBm</p> <p>Mkr1 2.461 385 GHz -12.524 dBm</p> <p>10 dB/div Log</p> <p>Center 2.46200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.267 ms (8001 pts)</p> <p>Span 40.00 MHz</p> <p>MSG STATUS</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.462000000 GHz</p> <p>Start Freq 2.442000000 GHz</p> <p>Stop Freq 2.482000000 GHz</p> <p>CF Step 4.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
	<p>Puw/11G/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 13.01500000 GHz</p> <p>Ref Offset 8.05 dB Ref 20.00 dBm</p> <p>Mkr2 25.951 GHz -37.314 dBm</p> <p>10 dB/div Log</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.482 s (8001 pts)</p> <p>Stop 26.00 GHz</p> <p>MSG STATUS</p>

11N20SISO\_LCH\_Graphs

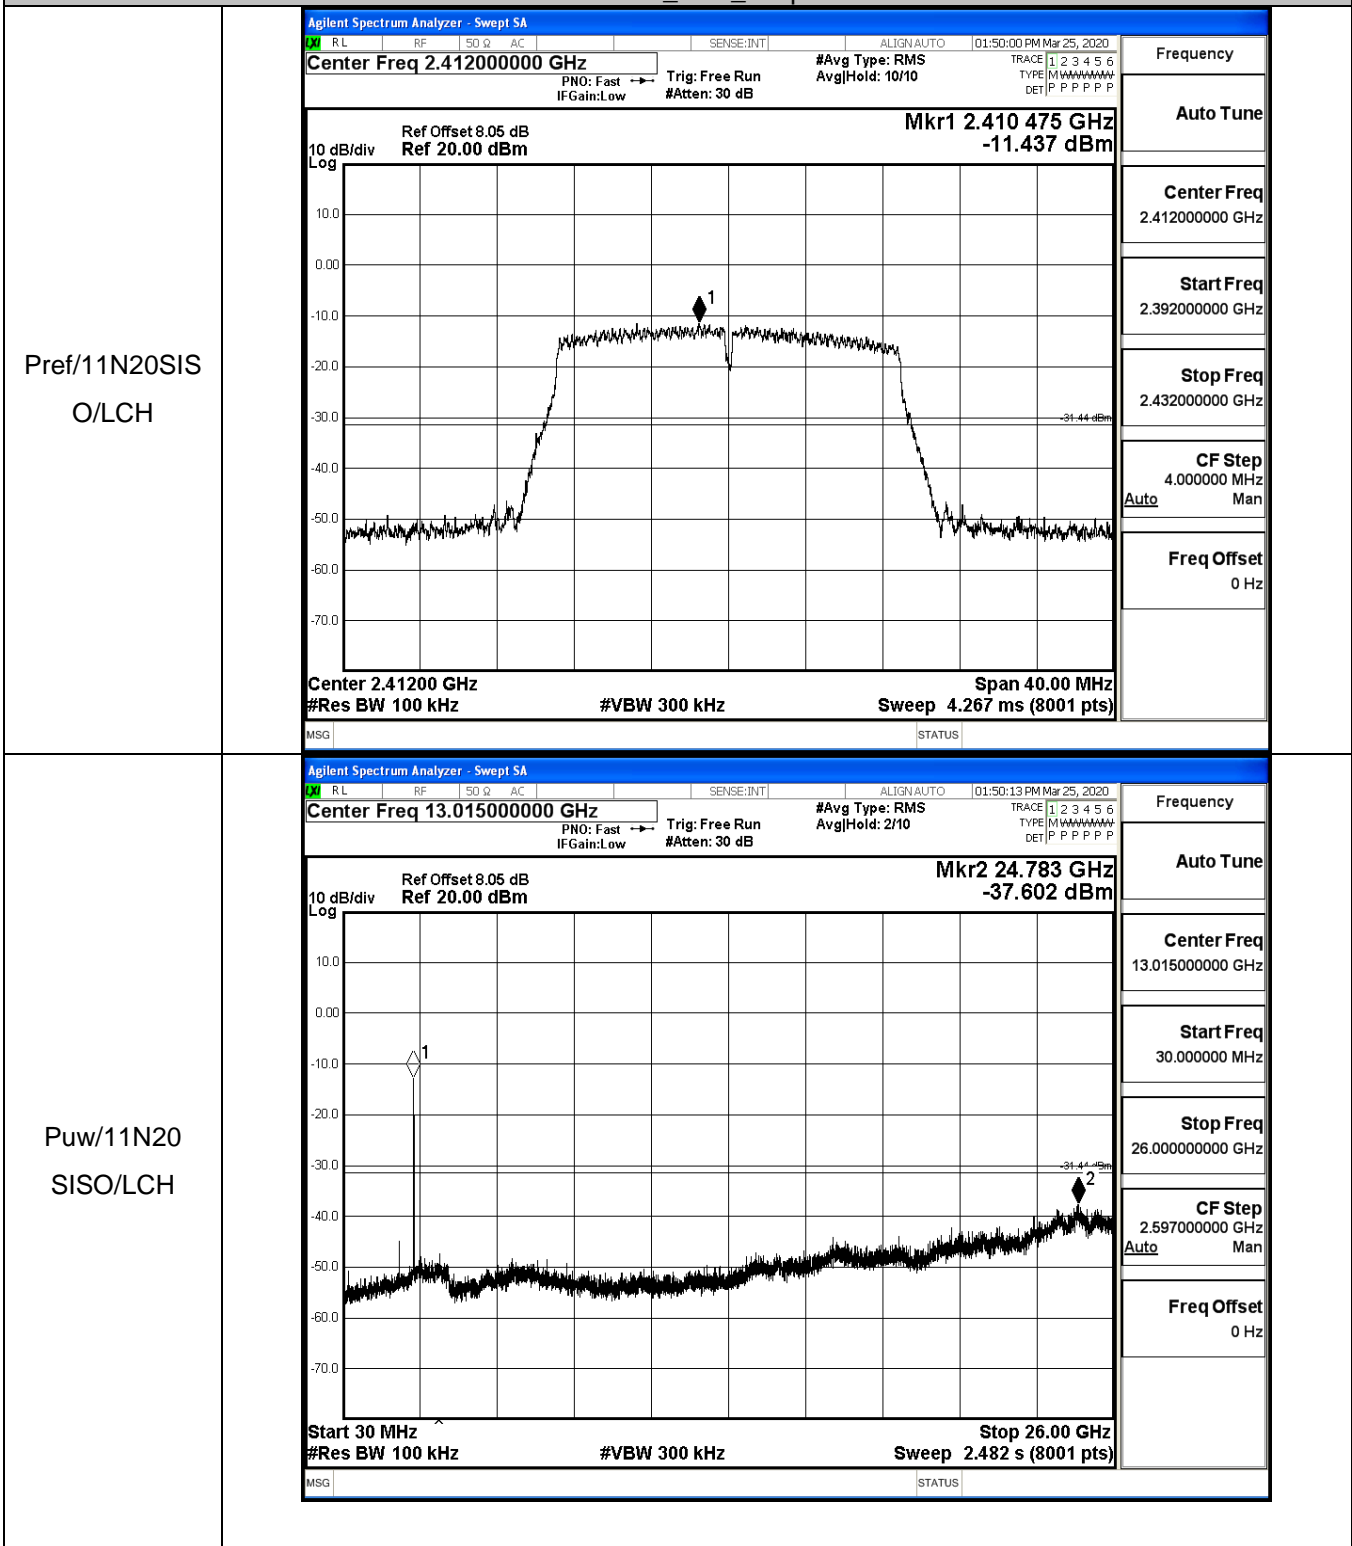


11N20SISO\_MCH\_Graphs

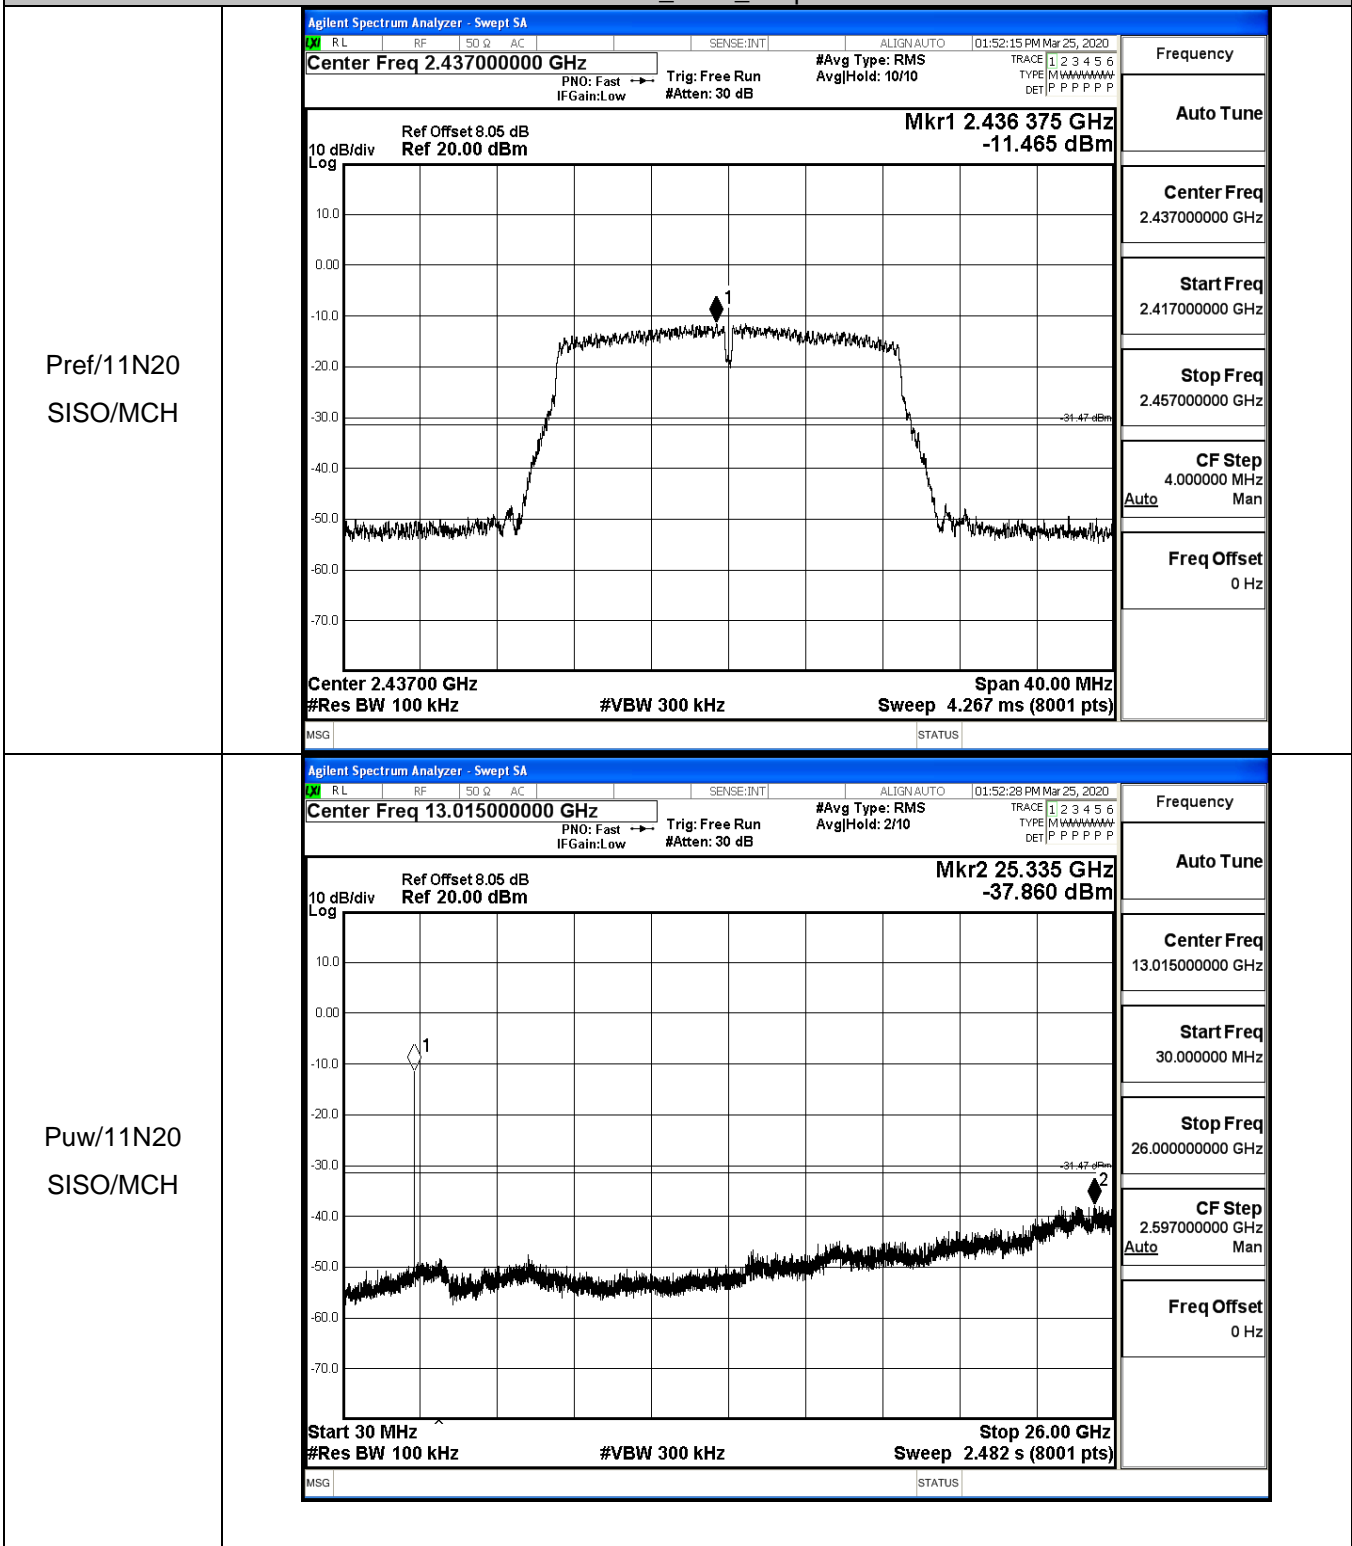


11N20SISO\_HCH\_Graphs



Pref/11N20  
SISO/HCH

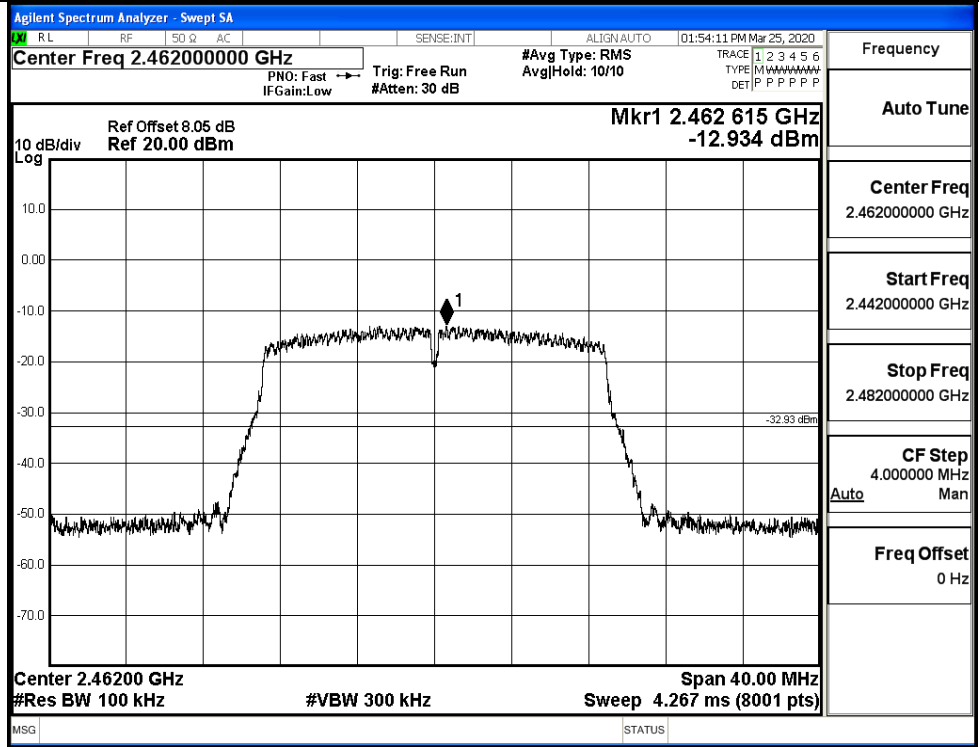



Puw/11N20  
SISO/HCH

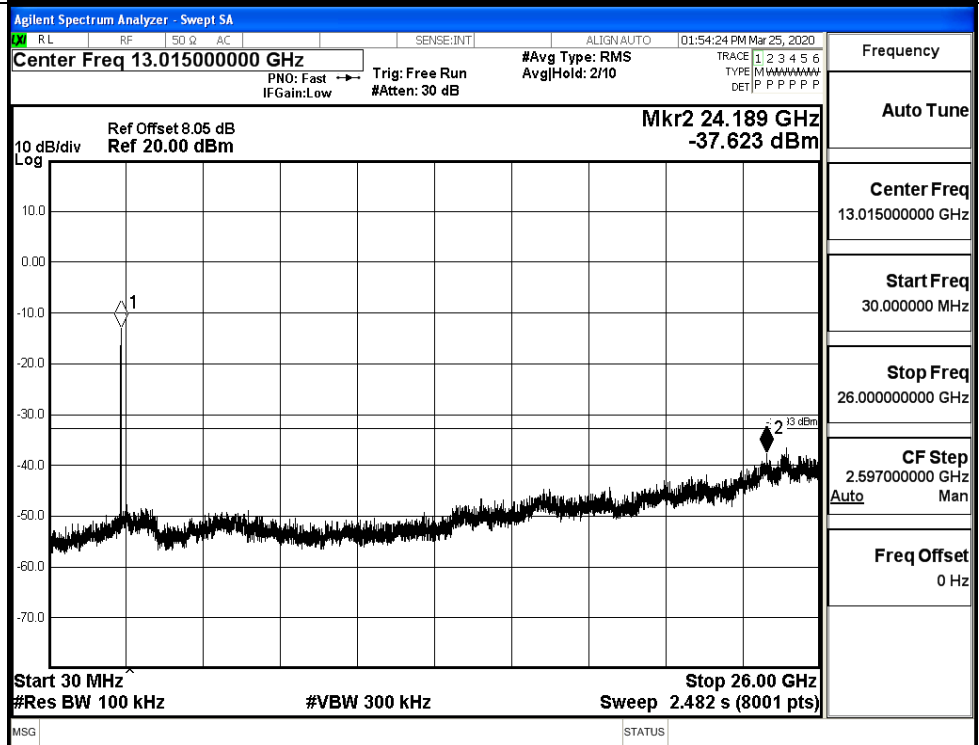



11N40SISO\_LCH\_Graphs
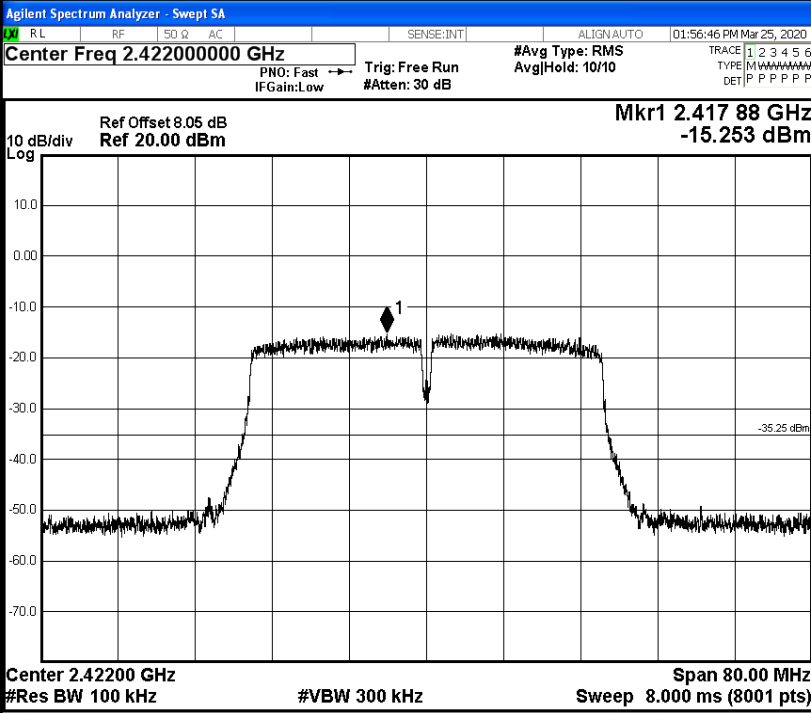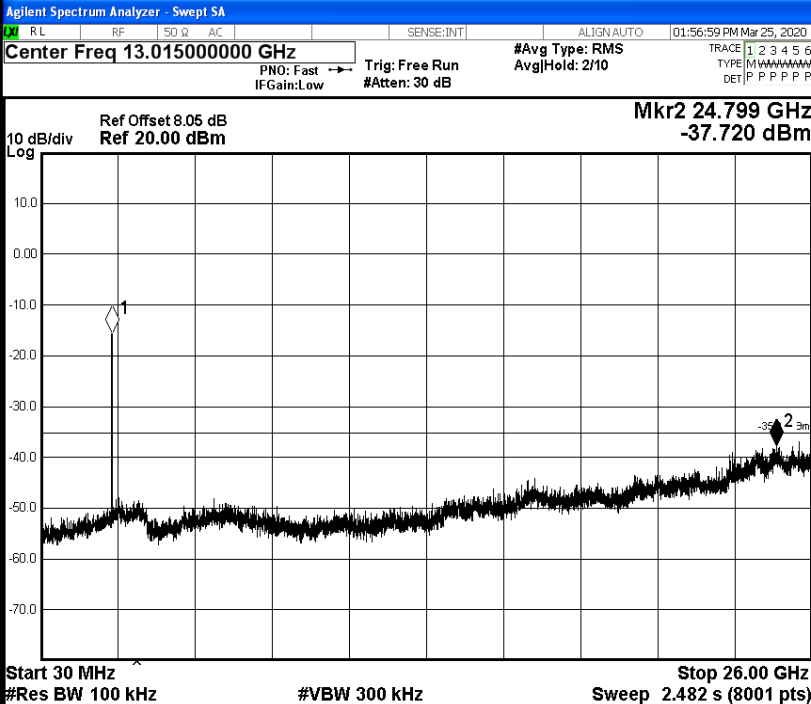
<p>Pref/11N40 SISO/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.42200000 GHz</p> <p>Mkr1 2.417 88 GHz -15.253 dBm</p> <p>Center 2.42200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 8.000 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.422000000 GHz</p> <p>Start Freq 2.382000000 GHz</p> <p>Stop Freq 2.462000000 GHz</p> <p>CF Step 8.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
	<p>Puw/11N40 SISO/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 13.01500000 GHz</p> <p>Mkr2 24.799 GHz -37.720 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.482 s (8001 pts)</p>

11N40SISO\_MCH\_Graphs

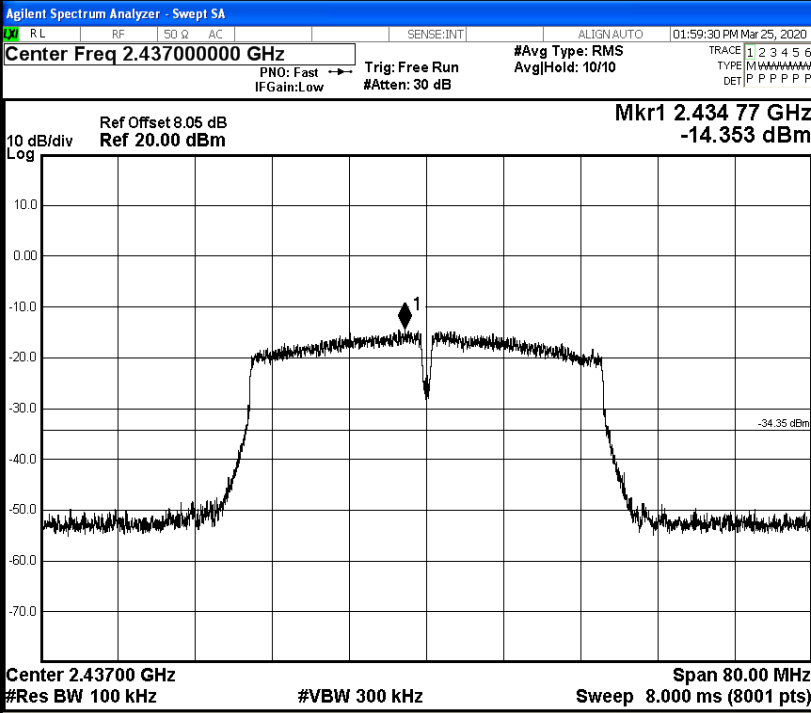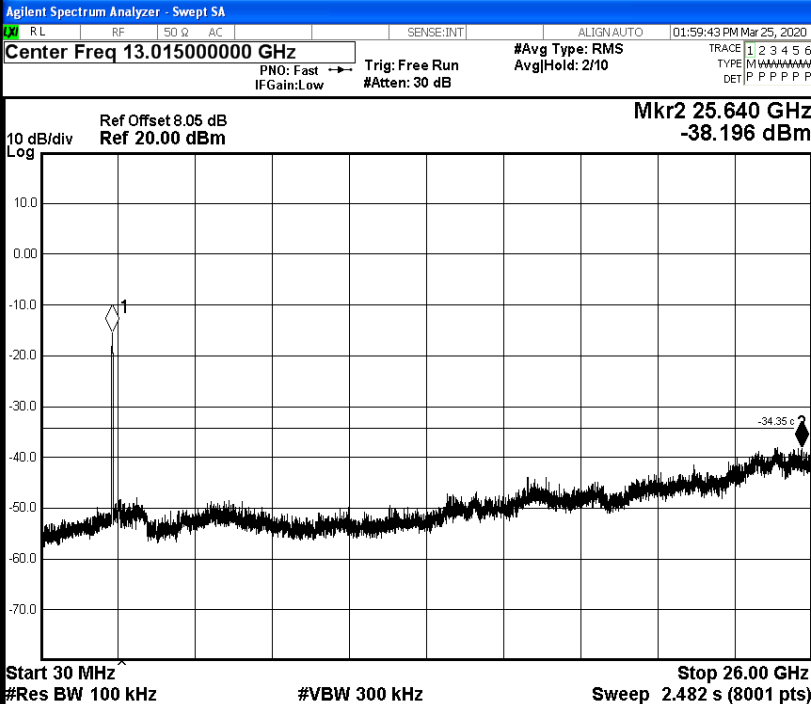
<p>Pref/11N40 SISO/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Mkr1 2.434 77 GHz -14.353 dBm</p> <p>Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 8.000 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.437000000 GHz</p> <p>Start Freq 2.397000000 GHz</p> <p>Stop Freq 2.477000000 GHz</p> <p>CF Step 8.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
	<p>Puw/11N40 SISO/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 13.01500000 GHz</p> <p>Mkr2 25.640 GHz -38.196 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.482 s (8001 pts)</p>

11N40SISO\_HCH\_Graphs
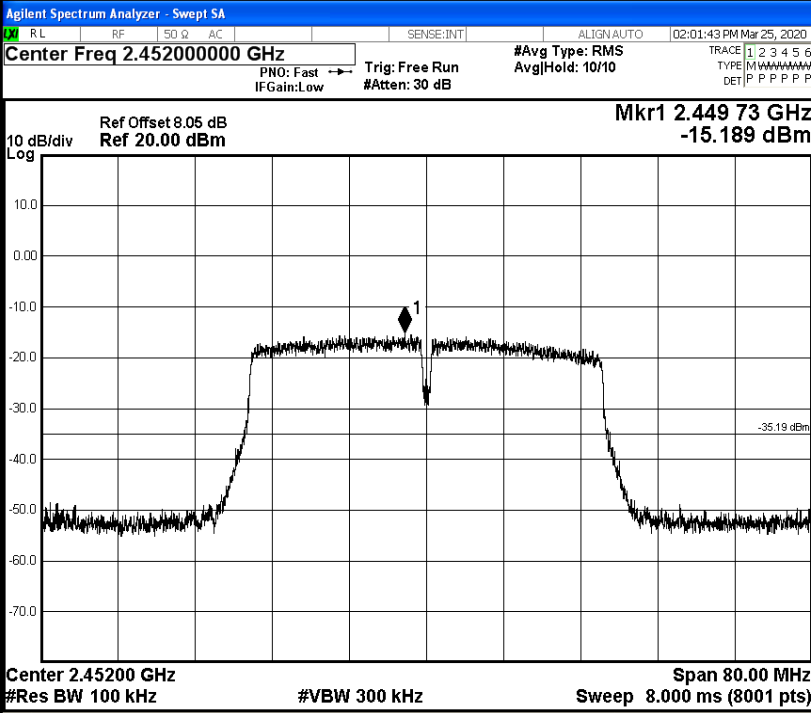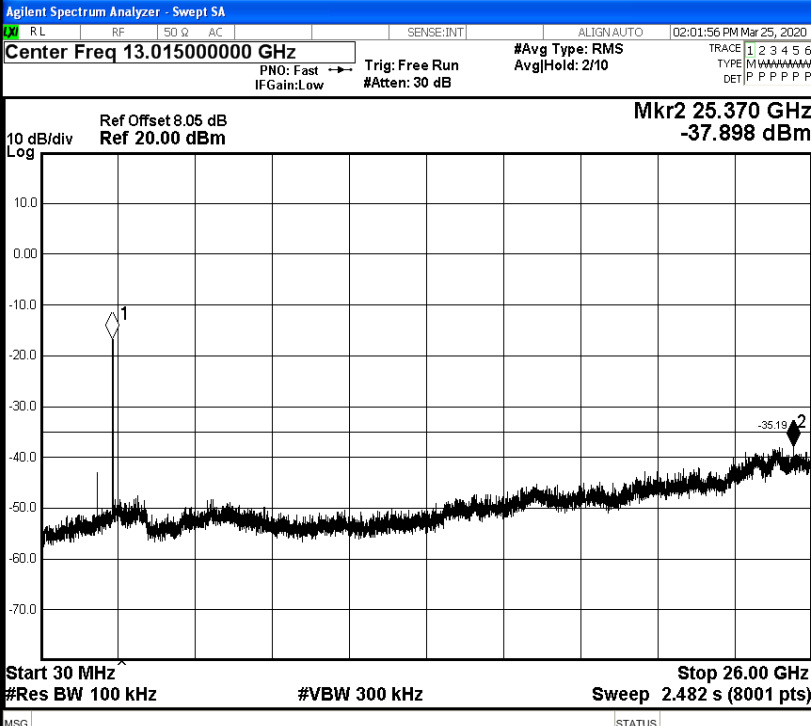
<p>Pref/11N40 SISO/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.45200000 GHz</p> <p>Mkr1 2.449 73 GHz -15.189 dBm</p> <p>10 dB/div Log</p> <p>Ref Offset 8.05 dB Ref 20.00 dBm</p> <p>Center 2.4520 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 8.000 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.452000000 GHz</p> <p>Start Freq 2.412000000 GHz</p> <p>Stop Freq 2.492000000 GHz</p> <p>CF Step 8.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
	<p>Puw/11N40 SISO/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 13.01500000 GHz</p> <p>Mkr2 25.370 GHz -37.898 dBm</p> <p>10 dB/div Log</p> <p>Ref Offset 8.05 dB Ref 20.00 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.482 s (8001 pts)</p>


### C.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	-1.680	-49.601	-21.68	PASS
	HCH	-1.866	-49.209	-21.87	PASS
11G	LCH	-10.906	-49.643	-30.91	PASS
	HCH	-12.239	-49.375	-32.24	PASS
11N20SISO	LCH	-11.519	-48.777	-31.52	PASS
	HCH	-12.980	-49.367	-32.98	PASS
11N40SISO	LCH	-15.379	-49.476	-35.38	PASS
	HCH	-15.430	-48.856	-35.43	PASS

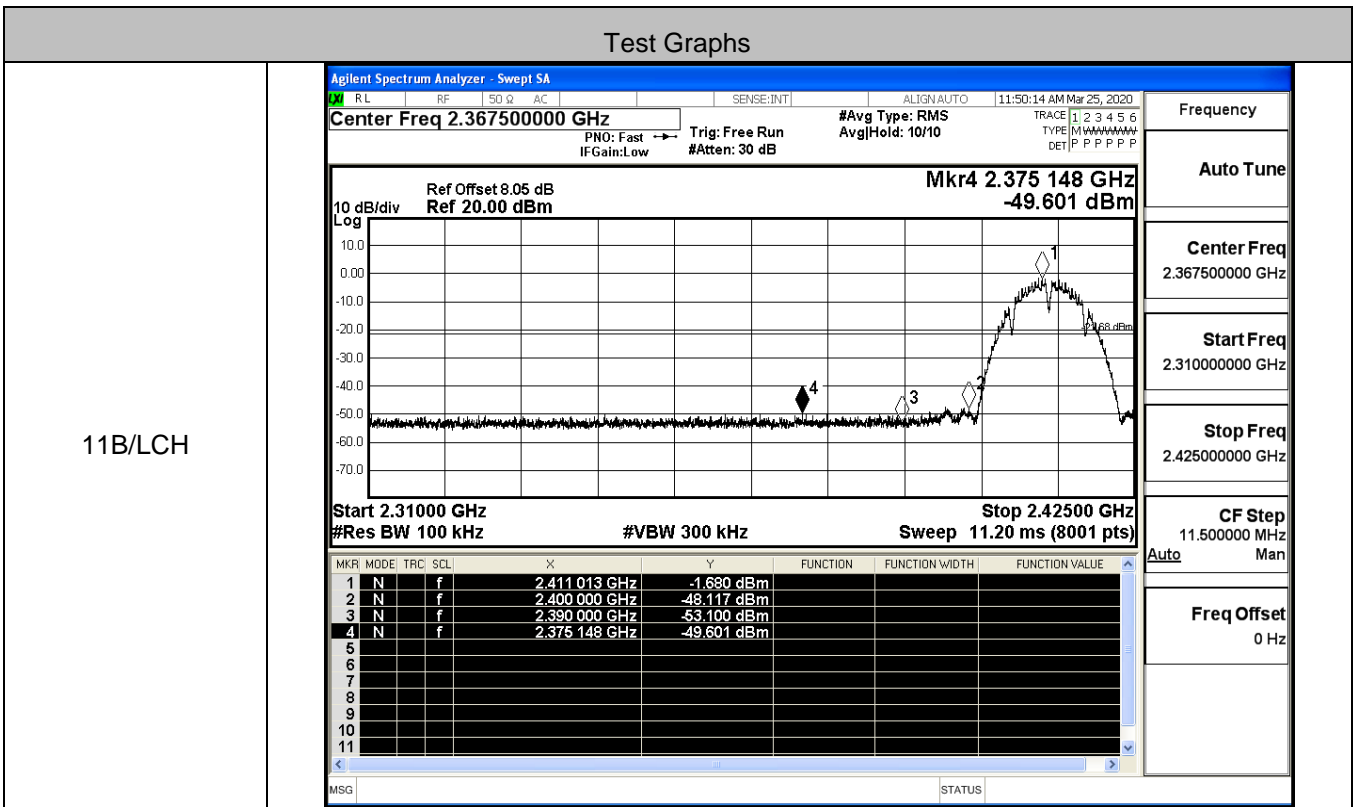




11B/HCH

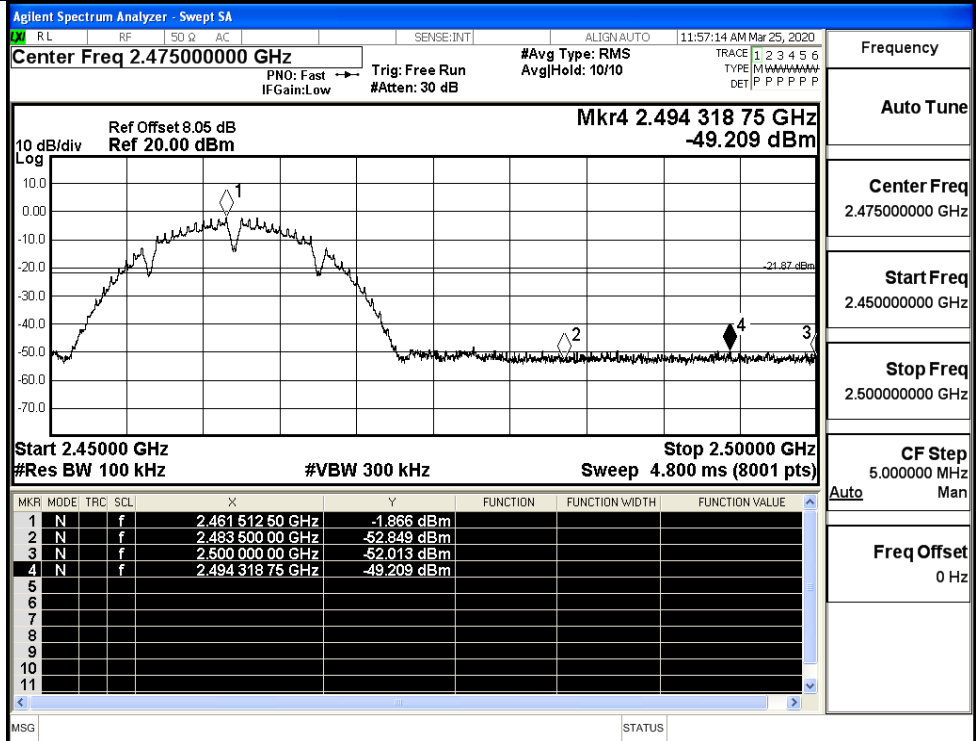


Frequency  
Auto Tune  
Center Freq  
2.47500000 GHz  
Start Freq  
2.45000000 GHz  
Stop Freq  
2.50000000 GHz  
CF Step  
5.000000 MHz  
Auto Man  
Freq Offset  
0 Hz

11G/LCH

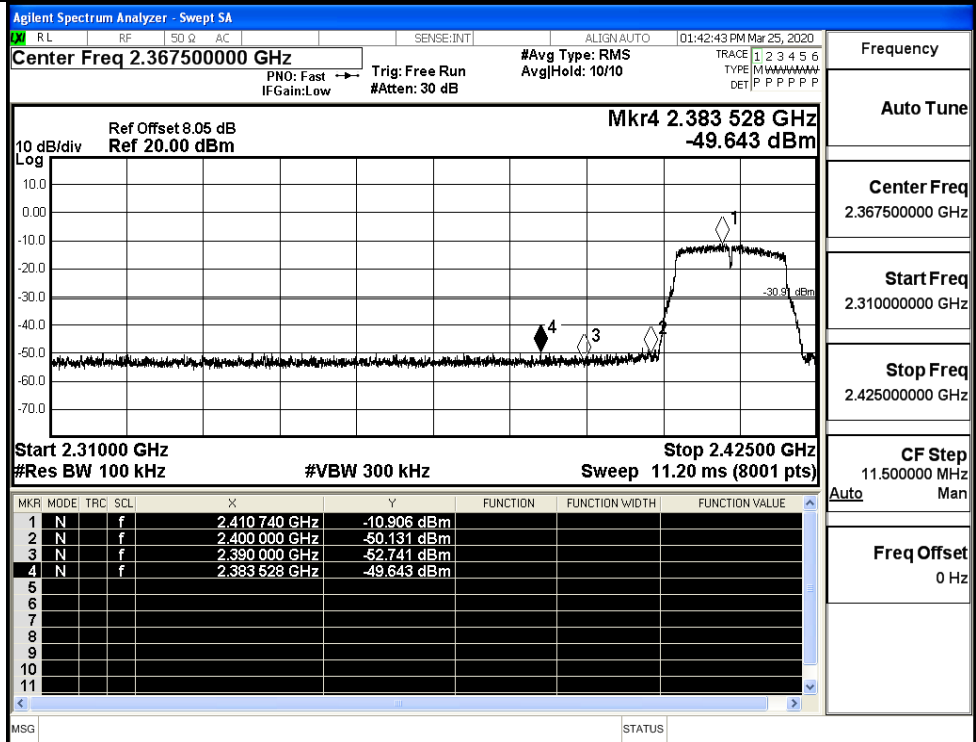


Frequency  
Auto Tune  
Center Freq  
2.36750000 GHz  
Start Freq  
2.31000000 GHz  
Stop Freq  
2.42500000 GHz  
CF Step  
11.500000 MHz  
Auto Man  
Freq Offset  
0 Hz

11G/HCH

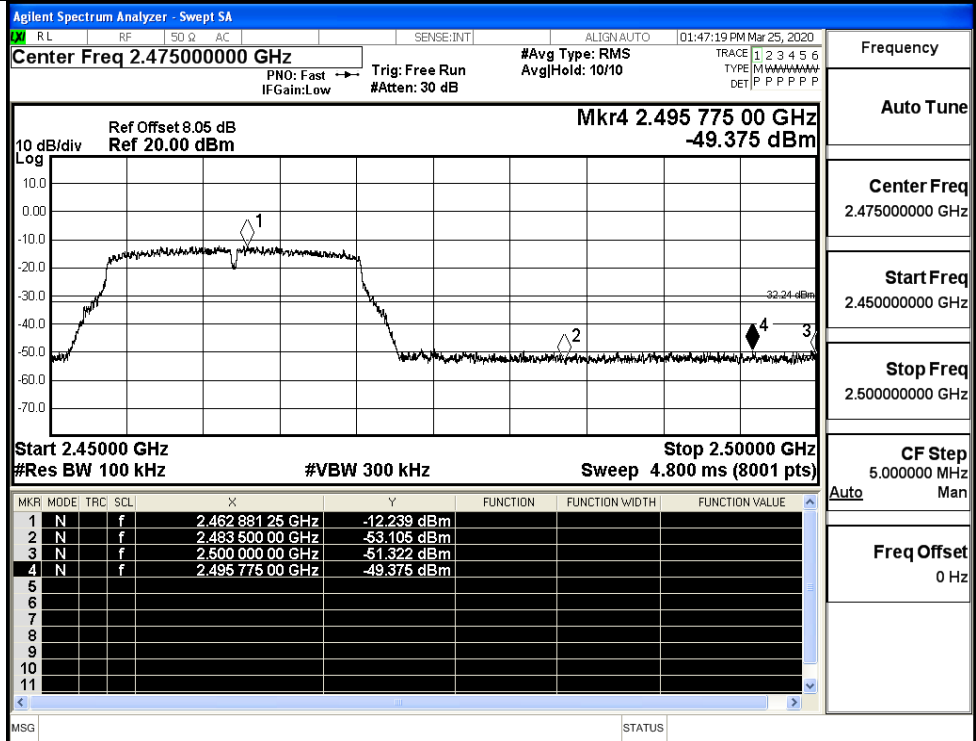


Frequency	2.47500000 GHz
Auto Tune	
Center Freq	2.47500000 GHz
Start Freq	2.45000000 GHz
Stop Freq	2.50000000 GHz
CF Step	5.000000 MHz
Freq Offset	0 Hz

11N20SISO/LCH

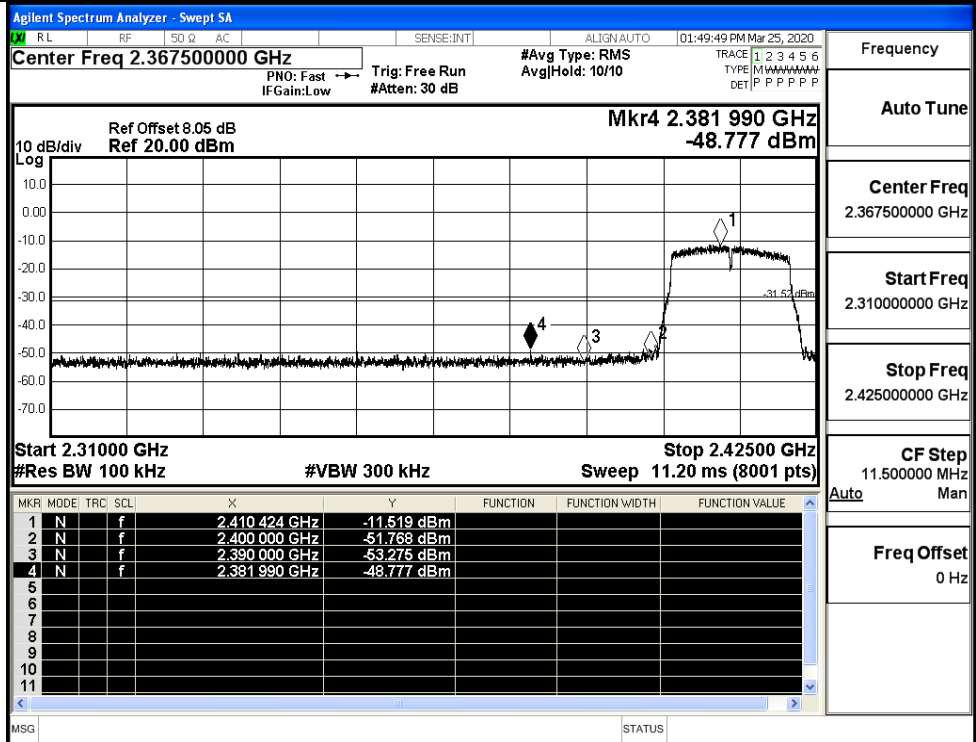


Frequency	2.36750000 GHz
Auto Tune	
Center Freq	2.36750000 GHz
Start Freq	2.31000000 GHz
Stop Freq	2.42500000 GHz
CF Step	11.500000 MHz
Freq Offset	0 Hz

11N20SISO/HCH

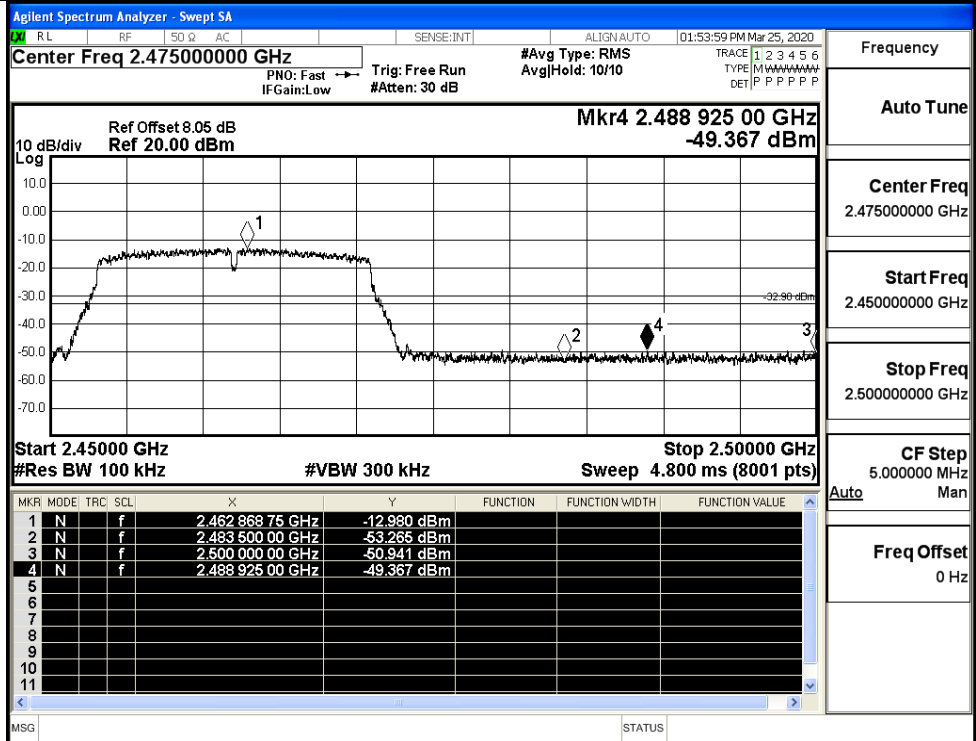


Frequency	2.475000000 GHz
Auto Tune	
Center Freq	2.475000000 GHz
Start Freq	2.450000000 GHz
Stop Freq	2.500000000 GHz
CF Step	5.000000 MHz
Freq Offset	0 Hz

11N40SISO/LCH

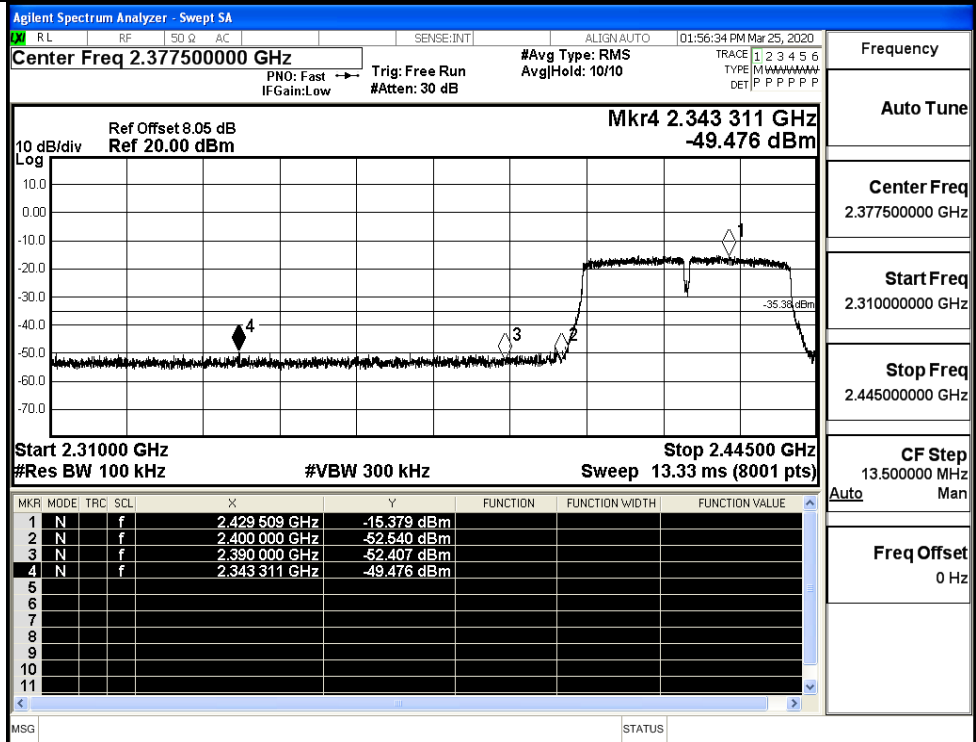

Frequency	2.377500000 GHz
Auto Tune	
Center Freq	2.377500000 GHz
Start Freq	2.310000000 GHz
Stop Freq	2.445000000 GHz
CF Step	13.500000 MHz
Freq Offset	0 Hz

11N40SISO/HCH

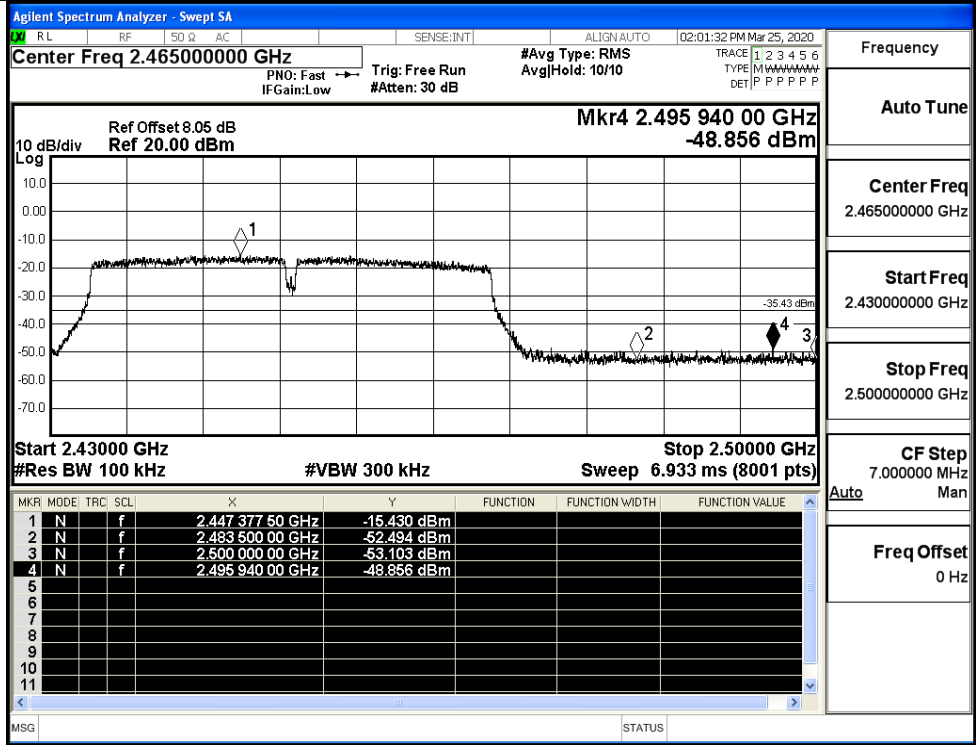


### C.7 Restrict-band band-edge measurements


Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBu V/m]	Verdict
11B	2412	Ant1	2310.0	-41.33	2.0	0	53.93	PEAK	74	PASS
	2412	Ant1	2310.0	-53.50	2.0	0	41.75	AV	54	PASS
	2412	Ant1	2390.0	-42.97	2.0	0	52.29	PEAK	74	PASS
	2412	Ant1	2390.0	-53.12	2.0	0	42.14	AV	54	PASS
	2462	Ant1	2483.5	-41.67	2.0	0	53.59	PEAK	74	PASS
	2462	Ant1	2483.5	-52.79	2.0	0	42.47	AV	54	PASS
	2462	Ant1	2500.0	-41.96	2.0	0	53.30	PEAK	74	PASS
	2462	Ant1	2500.0	-52.56	2.0	0	42.70	AV	54	PASS
11G	2412	Ant1	2310.0	-42.92	2.0	0	52.34	PEAK	74	PASS
	2412	Ant1	2310.0	-53.49	2.0	0	41.77	AV	54	PASS
	2412	Ant1	2390.0	-41.45	2.0	0	53.80	PEAK	74	PASS
	2412	Ant1	2390.0	-53.06	2.0	0	42.20	AV	54	PASS
	2462	Ant1	2483.5	-42.02	2.0	0	53.24	PEAK	74	PASS
	2462	Ant1	2483.5	-52.68	2.0	0	42.58	AV	54	PASS
	2462	Ant1	2500.0	-41.76	2.0	0	53.50	PEAK	74	PASS
	2462	Ant1	2500.0	-52.52	2.0	0	42.74	AV	54	PASS
11N20 SISO	2412	Ant1	2310.0	-42.03	2.0	0	53.22	PEAK	74	PASS
	2412	Ant1	2310.0	-53.49	2.0	0	41.76	AV	54	PASS
	2412	Ant1	2390.0	-44.25	2.0	0	51.00	PEAK	74	PASS
	2412	Ant1	2390.0	-53.04	2.0	0	42.22	AV	54	PASS
	2462	Ant1	2483.5	-42.82	2.0	0	52.44	PEAK	74	PASS
	2462	Ant1	2483.5	-52.68	2.0	0	42.58	AV	54	PASS
	2462	Ant1	2500.0	-40.80	2.0	0	54.46	PEAK	74	PASS
	2462	Ant1	2500.0	-52.52	2.0	0	42.74	AV	54	PASS
11N40 SISO	2422	Ant1	2310.0	-41.95	2.0	0	53.31	PEAK	74	PASS
	2422	Ant1	2310.0	-53.53	2.0	0	41.73	AV	54	PASS

	2422	Ant1	2390.0	-42.03	2.0	0	53.23	PEAK	74	PASS
	2422	Ant1	2390.0	-52.97	2.0	0	42.28	AV	54	PASS
	2452	Ant1	2483.5	-41.97	2.0	0	53.29	PEAK	74	PASS
	2452	Ant1	2483.5	-52.64	2.0	0	42.62	AV	54	PASS
	2452	Ant1	2500.0	-40.55	2.0	0	54.71	PEAK	74	PASS
	2452	Ant1	2500.0	-52.53	2.0	0	42.72	AV	54	PASS


Restrict-band band-edge measurements\_11B\_2412\_Ant1\_PEAK

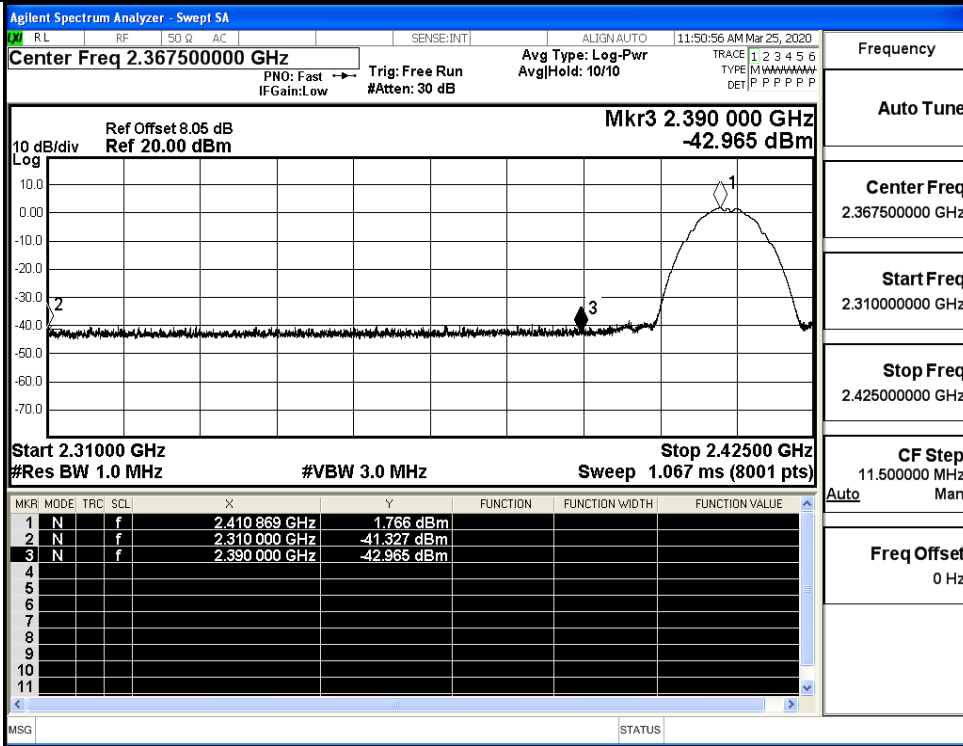


Restrict-band band-edge measurements\_11B\_2412\_Ant1\_AV

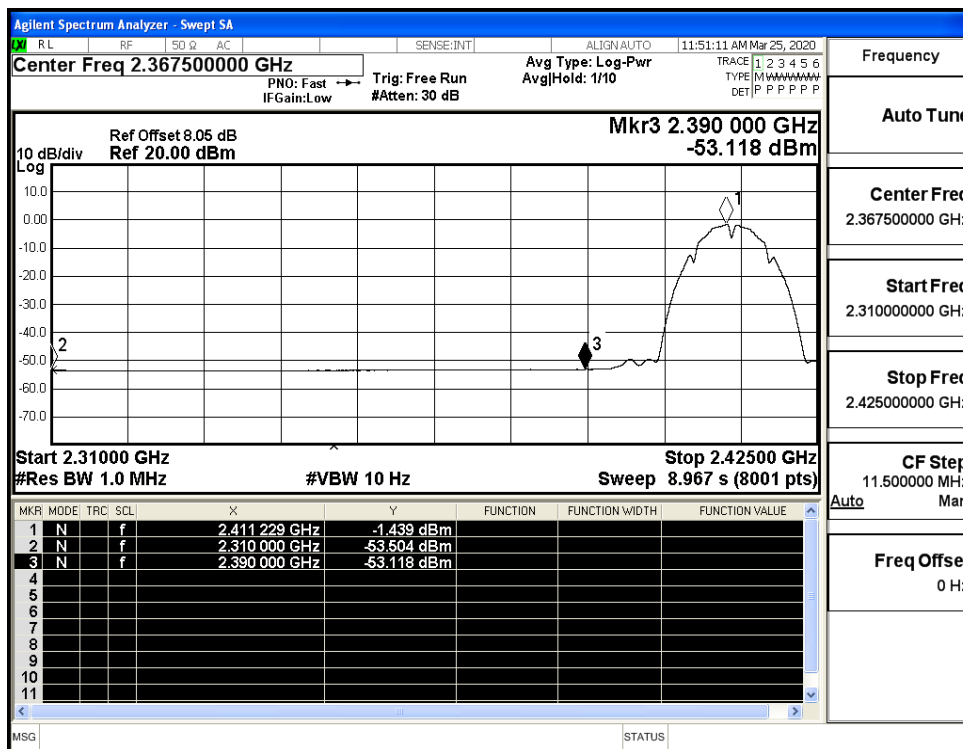

Restrict-band band-edge measurements\_11B\_2462\_Ant1\_PEAK

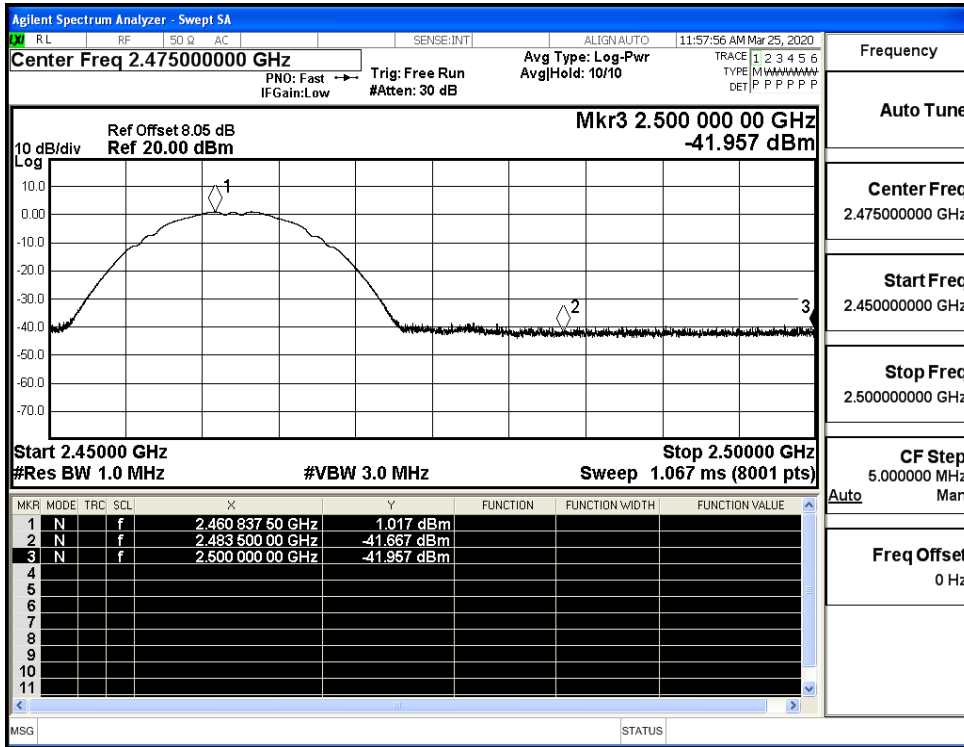


Restrict-band band-edge measurements\_11B\_2462\_Ant1\_AV

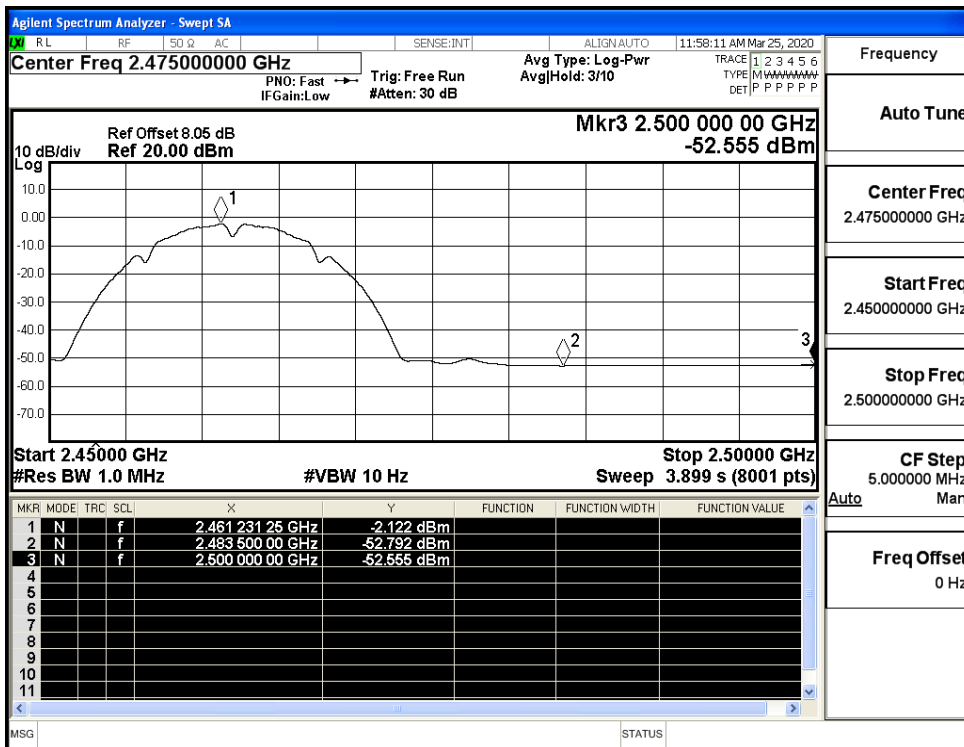





Restrict-band band-edge measurements\_11G\_2412\_Ant1\_PEAK

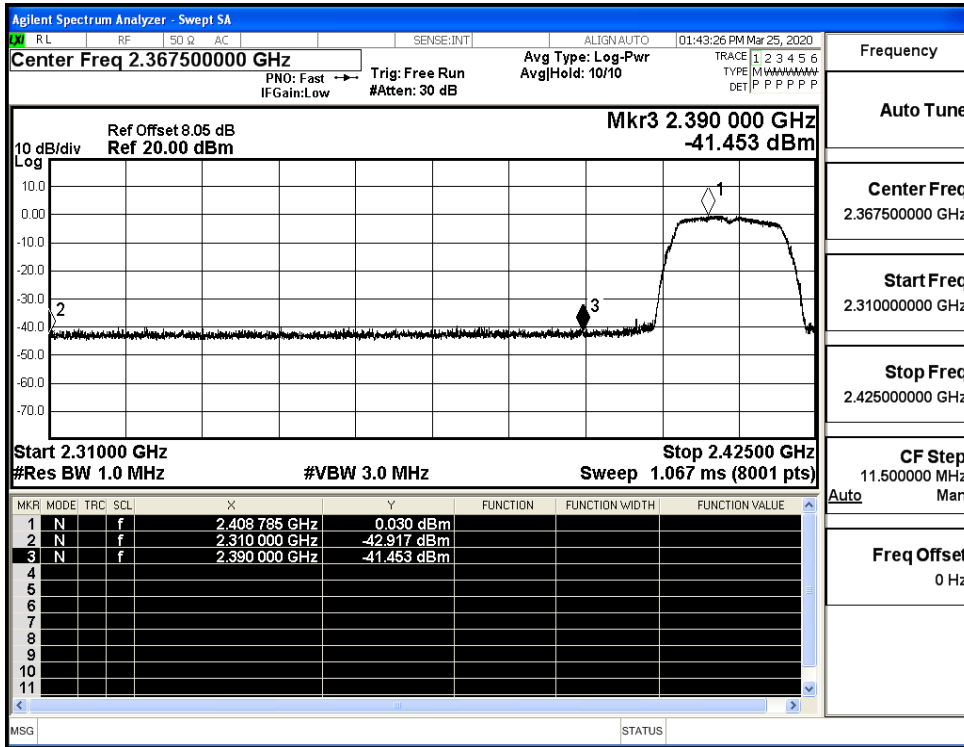


Restrict-band band-edge measurements\_11G\_2412\_Ant1\_AV

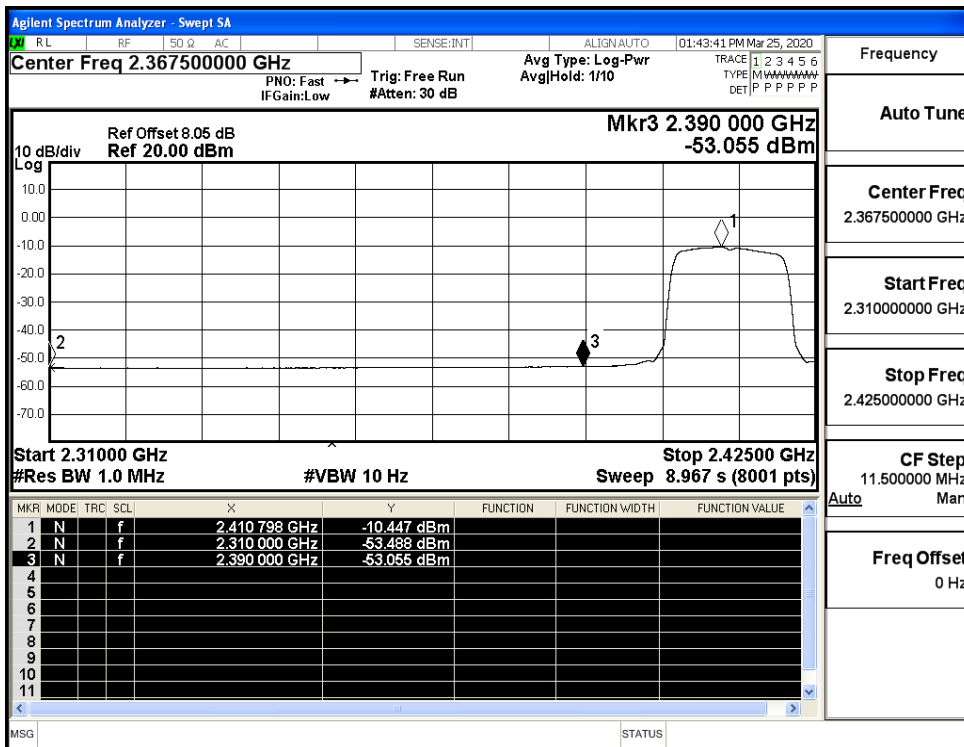


Restrict-band band-edge measurements\_11G\_2462\_Ant1\_PEAK

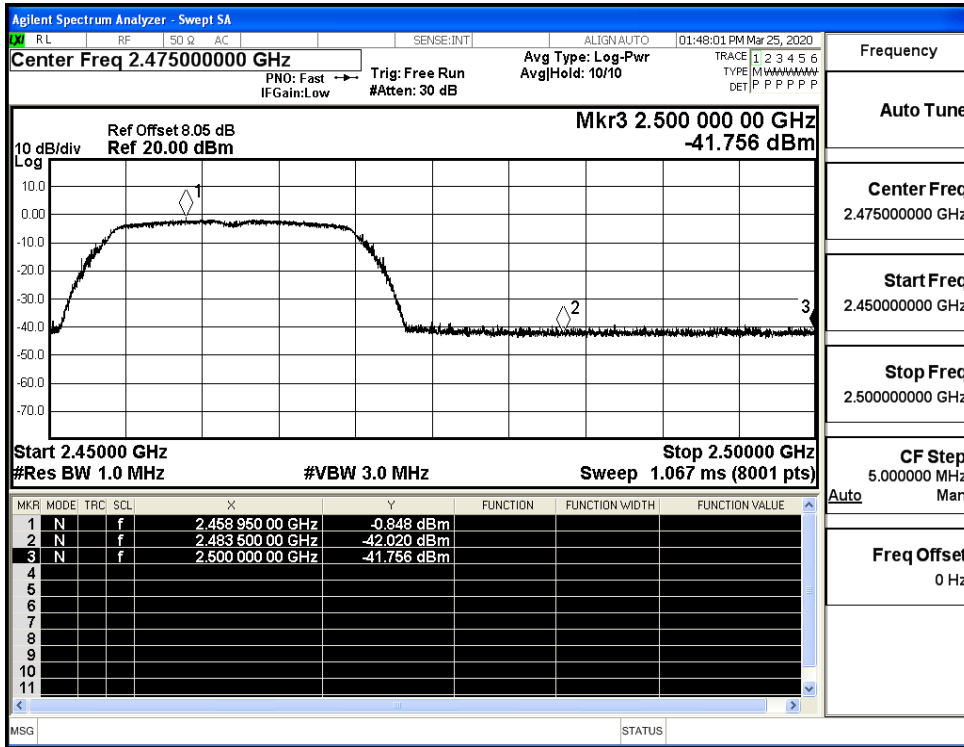


Restrict-band band-edge measurements\_11G\_2462\_Ant1\_AV

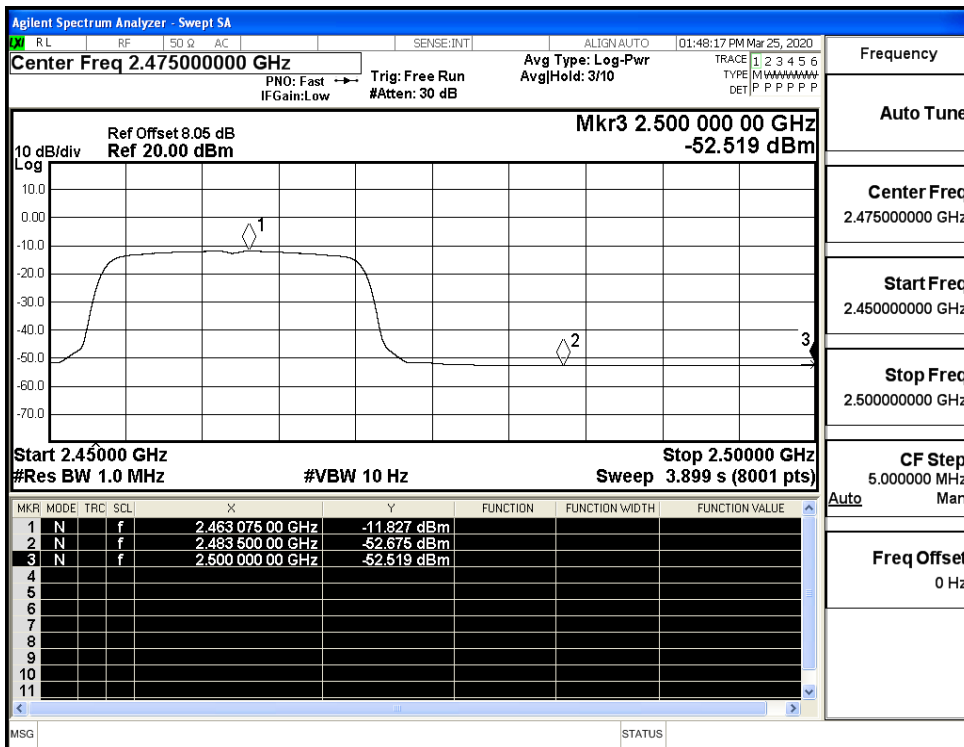


Restrict-band band-edge measurements\_11N20SISO\_2412\_Ant1\_PEAK

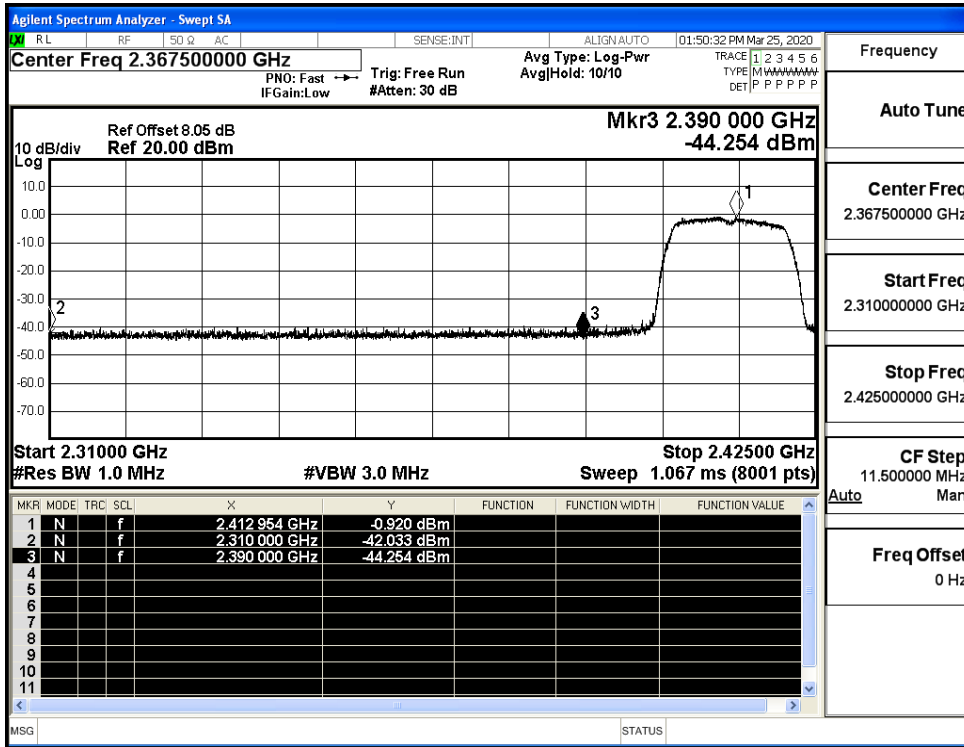


Restrict-band band-edge measurements\_11N20SISO\_2412\_Ant1\_AV

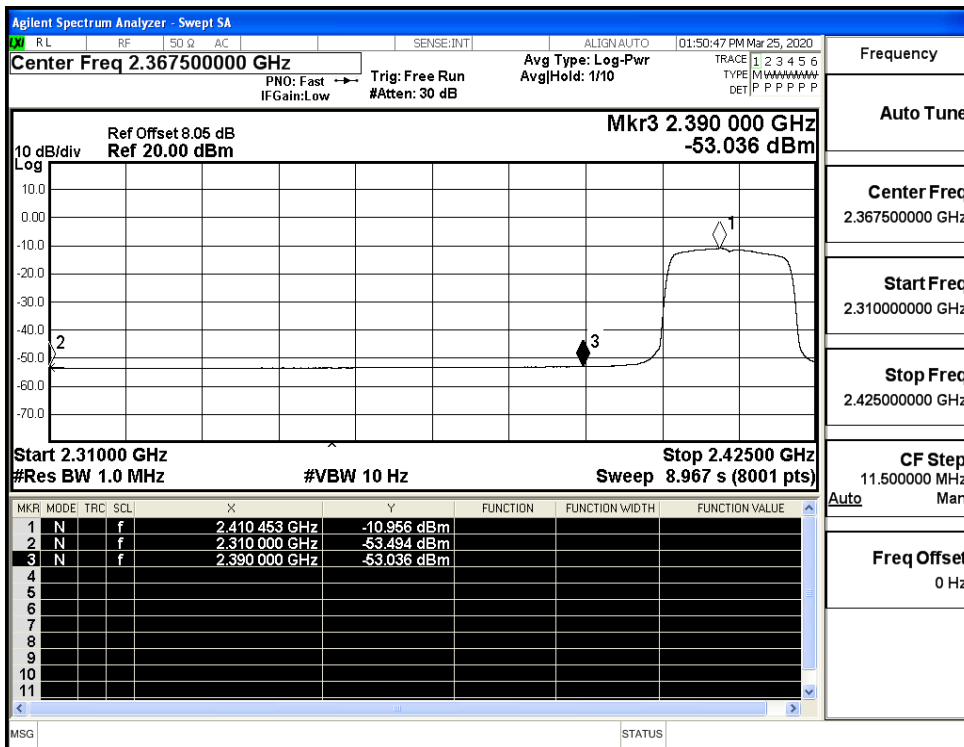


Restrict-band band-edge measurements\_11N20SISO\_2462\_Ant1\_PEAK

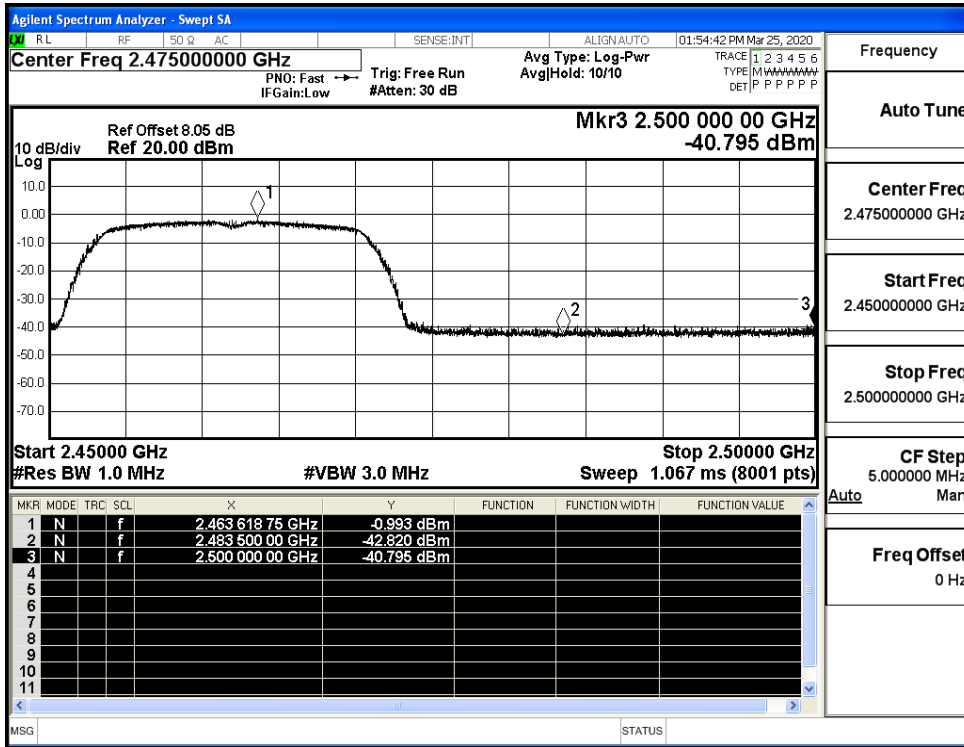


Restrict-band band-edge measurements\_11N20SISO\_2462\_Ant1\_AV

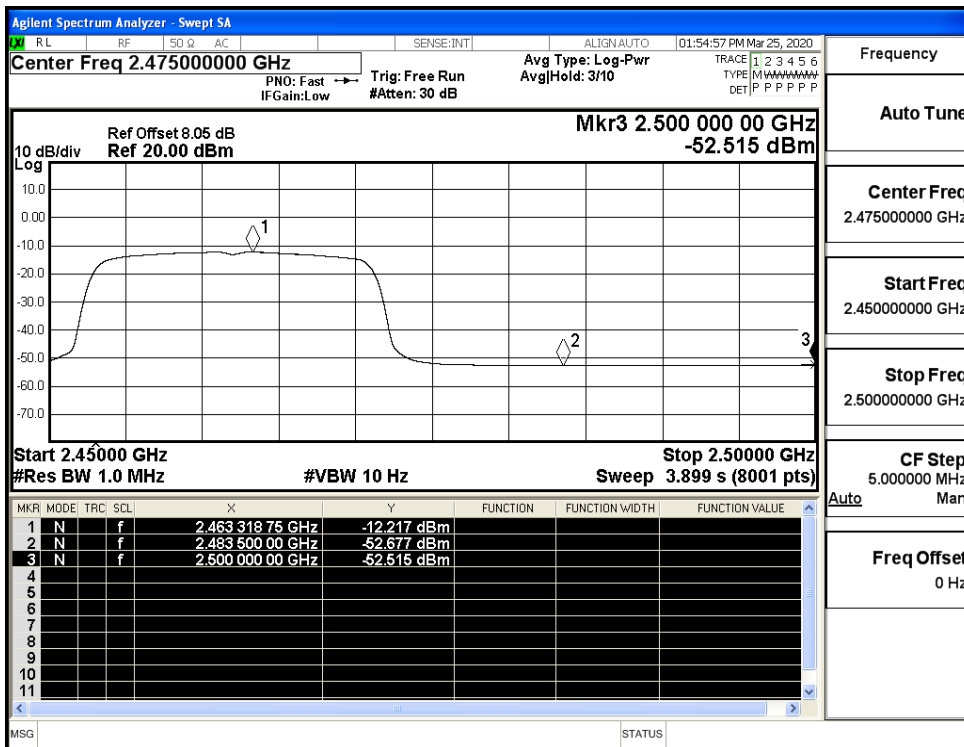


Restrict-band band-edge measurements\_11N40SISO\_2422\_Ant1\_PEAK

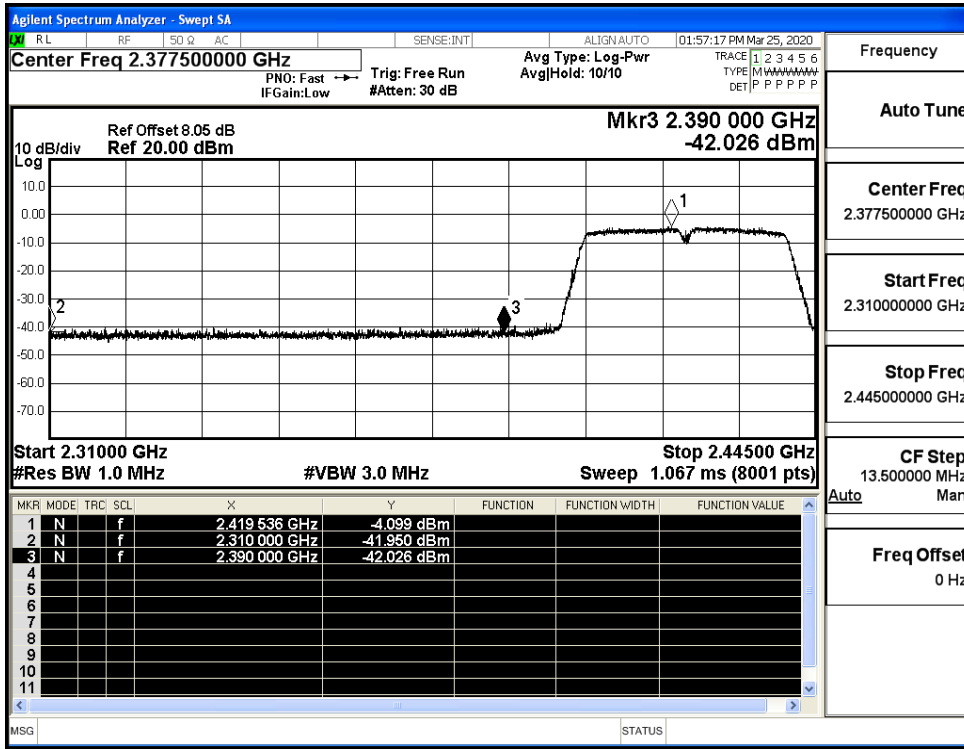

Restrict-band band-edge measurements\_11N40SISO\_2422\_Ant1\_AV

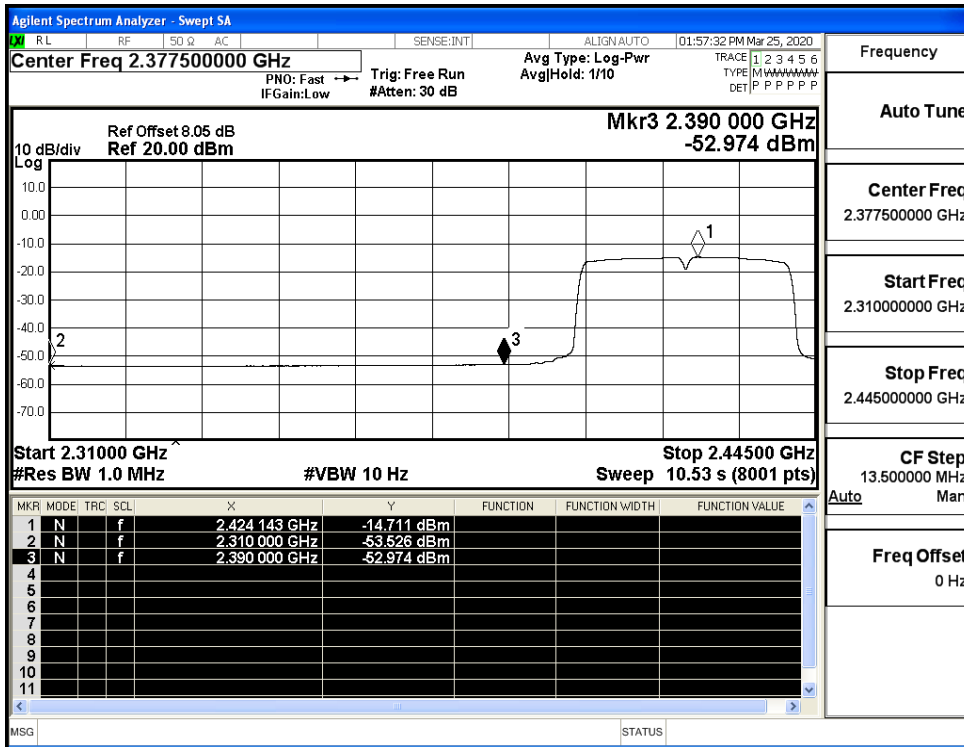

Restrict-band band-edge measurements\_11N40SISO\_2452\_Ant1\_PEAK

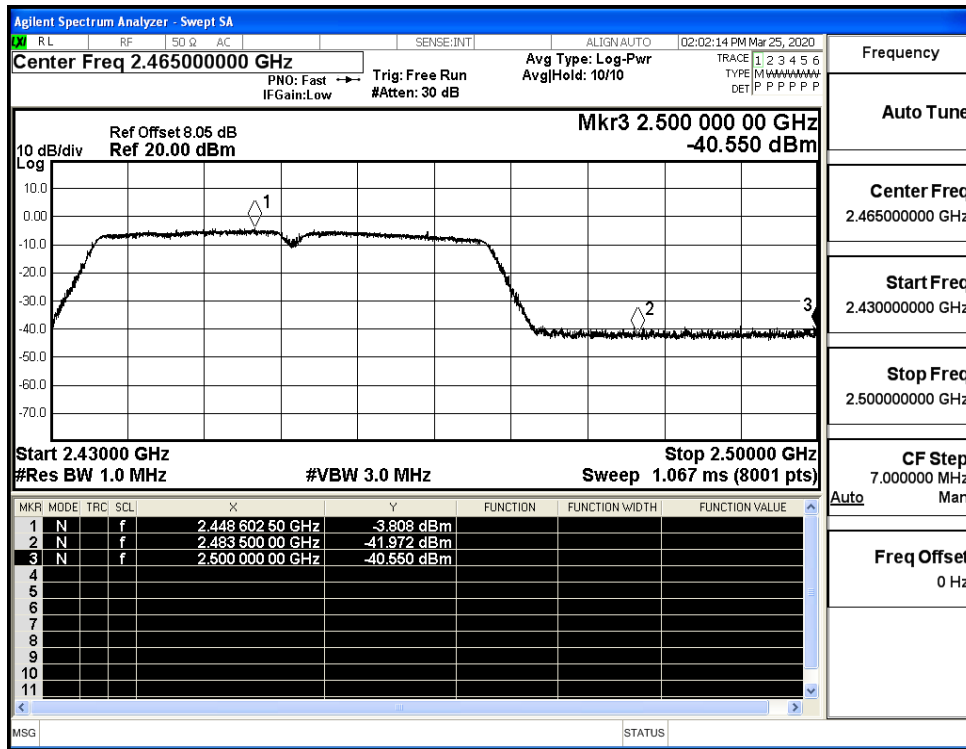

Restrict-band band-edge measurements\_11N40SISO\_2452\_Ant1\_AV

