

Appendix B

RF Test Data for BT V4.2 (BLE) (Conducted Measurement)

Product Name: Bluetooth earphone

Trade Mark: billboard


Test Model: MG508

Environmental Conditions

Temperature:	23.4 ° C
Relative Humidity:	52.6%
ATM Pressure:	100.0 kPa
Test Engineer:	Wilson.Hong
Supervised by:	Jayden.Zhuo

B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

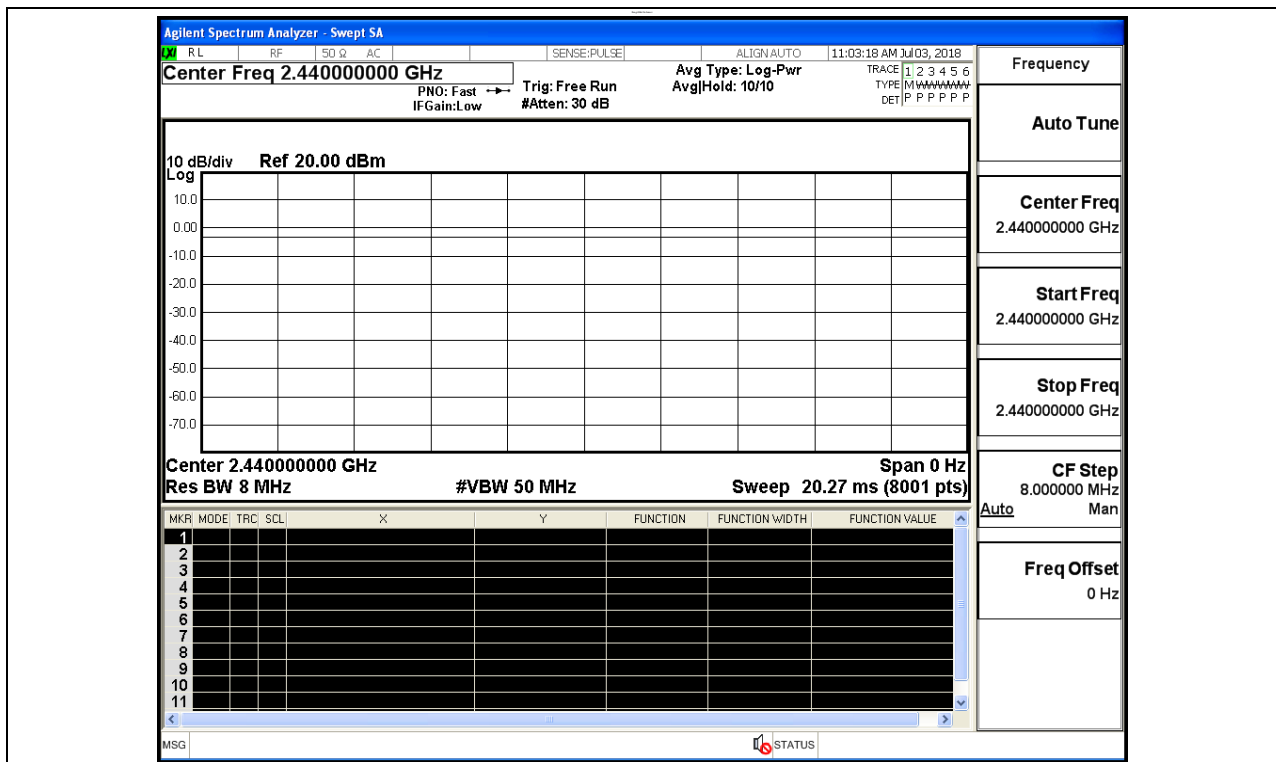

B.2 Maximum Conducted Peak Output Power



Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	0.011	30	PASS
BT LE	MCH	0.825	30	PASS
BT LE	HCH	1.133	30	PASS

Test Graphs	
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="font-size: small; margin: 0;">Agilent Spectrum Analyzer - Swept SA</p> <p style="font-size: x-small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 11:05:10 AM Jul 03, 2018</p> <p style="font-size: small; margin: 0;">Center Freq 2.40200000 GHz Avg Type: Log-Pwr TRACE 1 2 3 4 5 6</p> <p style="font-size: x-small; margin: 0;">PNO: Fast Trig: Free Run AvgHold: 10/10 TYPE M W M M M M M M</p> <p style="font-size: x-small; margin: 0;">IFGain: Low #Atten: 30 dB DET P P P P P P</p> <div style="display: flex; justify-content: space-between; font-size: small;"> Ref Offset 7.01 dB Mkr1 2.402 261 000 GHz </div> <p style="font-size: small; margin: 0;">10 dB/div Ref 20.00 dB 0.011 dBm</p> <div style="display: flex; justify-content: space-between; font-size: small; margin-top: 5px;"> Center 2.402000 GHz Span 3.000 MHz </div> <div style="display: flex; justify-content: space-between; font-size: x-small; margin-top: 0;"> #Res BW 1.0 MHz #VBW 3.0 MHz Sweep 1.067 ms (8001 pts) </div> <p style="font-size: x-small; margin-top: 0;">MSG STATUS</p> </div>
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="font-size: small; margin: 0;">Agilent Spectrum Analyzer - Swept SA</p> <p style="font-size: x-small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 11:05:55 AM Jul 03, 2018</p> <p style="font-size: small; margin: 0;">Center Freq 2.44000000 GHz Avg Type: Log-Pwr TRACE 1 2 3 4 5 6</p> <p style="font-size: x-small; margin: 0;">PNO: Fast Trig: Free Run AvgHold: 10/10 TYPE M W M M M M M M</p> <p style="font-size: x-small; margin: 0;">IFGain: Low #Atten: 30 dB DET P P P P P P</p> <div style="display: flex; justify-content: space-between; font-size: small;"> Ref Offset 7.01 dB Mkr1 2.439 709 000 GHz </div> <p style="font-size: small; margin: 0;">10 dB/div Ref 20.00 dB 0.825 dBm</p> <div style="display: flex; justify-content: space-between; font-size: small; margin-top: 5px;"> Center 2.440000 GHz Span 3.000 MHz </div> <div style="display: flex; justify-content: space-between; font-size: x-small; margin-top: 0;"> #Res BW 1.0 MHz #VBW 3.0 MHz Sweep 1.067 ms (8001 pts) </div> <p style="font-size: x-small; margin-top: 0;">MSG STATUS</p> </div>

B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-12.740	8	PASS
BT LE	MCH	-11.700	8	PASS
BT LE	HCH	-11.500	8	PASS


Test Graphs

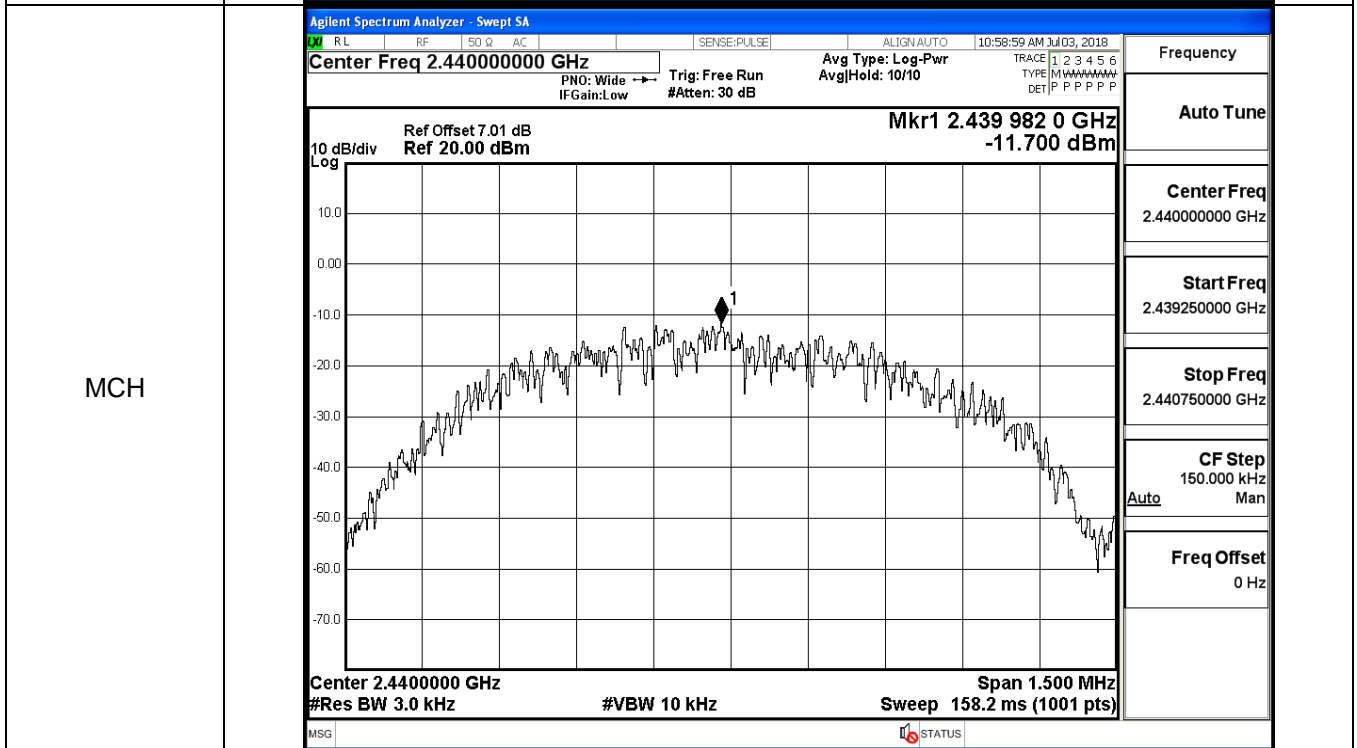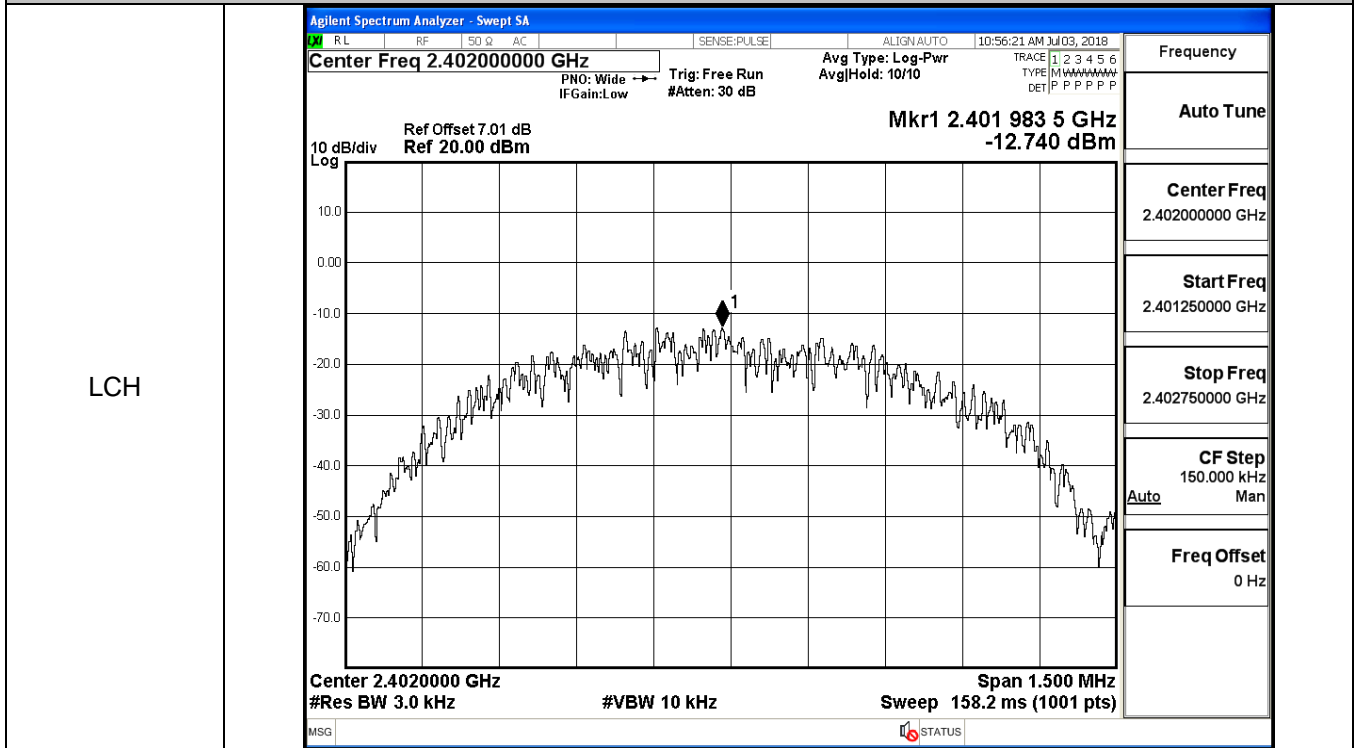

B.4 6dB Bandwidth

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.7006	≥0.5	PASS
BT LE	MCH	0.7004	≥0.5	PASS
BT LE	HCH	0.7004	≥0.5	PASS

Test Graphs	
LCH	<div style="border: 1px solid black; padding: 5px;"> <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgHold: 1/1 Radio Device: BTS</p> <p>#IFGain:Low #Atten: 30 dB</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.0427 MHz</p> <p>Total Power 9.20 dBm</p> <p>Transmit Freq Error -3.127 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 700.6 kHz x dB -6.00 dB</p> </div>
MCH	<div style="border: 1px solid black; padding: 5px;"> <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44000000 GHz Center Freq: 2.440000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgHold: >1/1 Radio Device: BTS</p> <p>#IFGain:Low #Atten: 30 dB</p> <p>Center 2.44 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.0454 MHz</p> <p>Total Power 10.1 dBm</p> <p>Transmit Freq Error -12.267 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 700.4 kHz x dB -6.00 dB</p> </div>

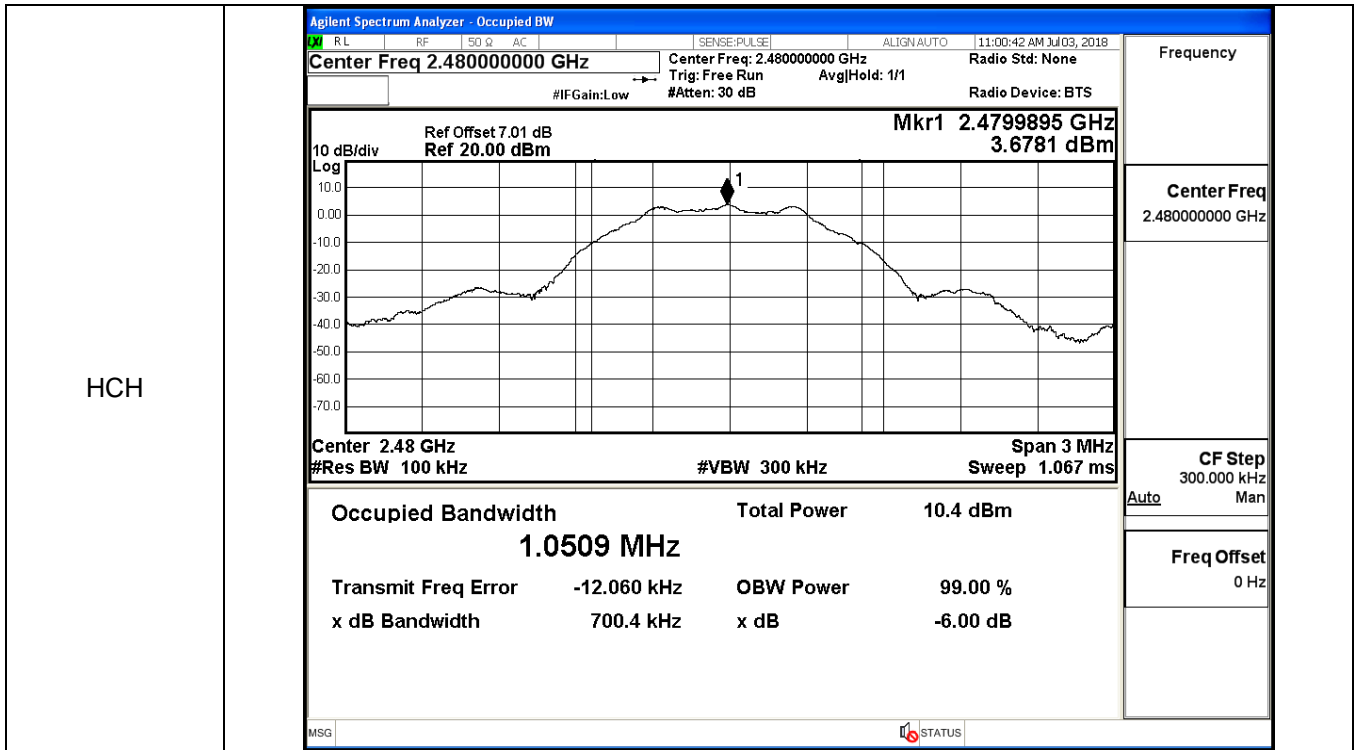


B.5 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	2.439	-45.524	-17.561	PASS
BT LE	MCH	3.31	-44.875	-16.690	PASS
BT LE	HCH	3.642	-45.168	-16.358	PASS

BT LE_LCH_Graphs

Pref/BT LE/LCH

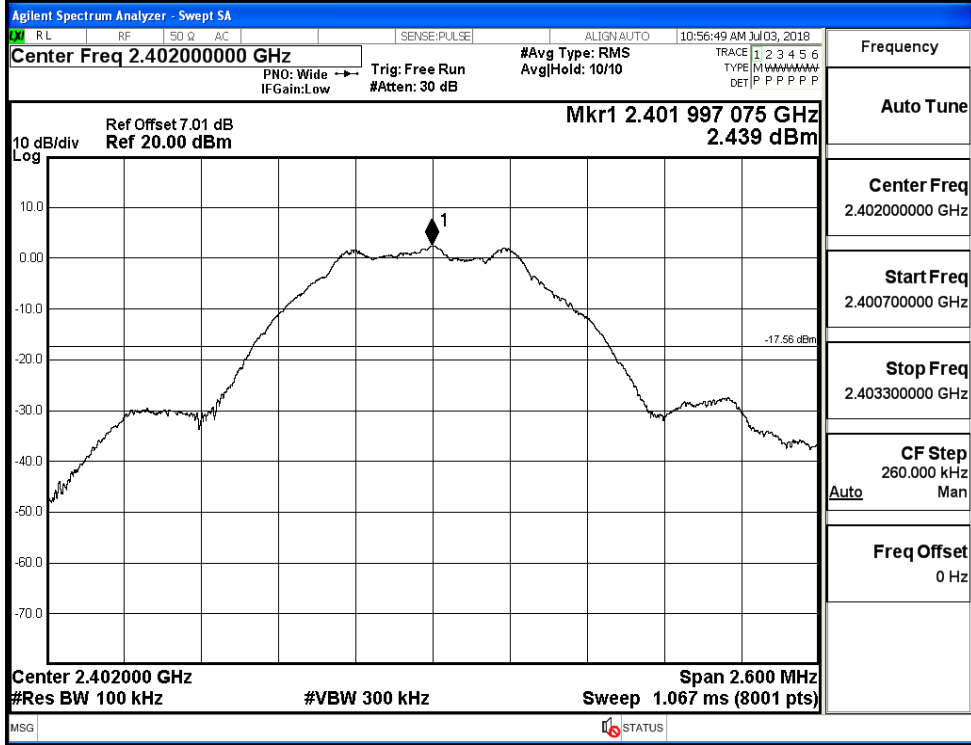


Puw/BT LE/LCH

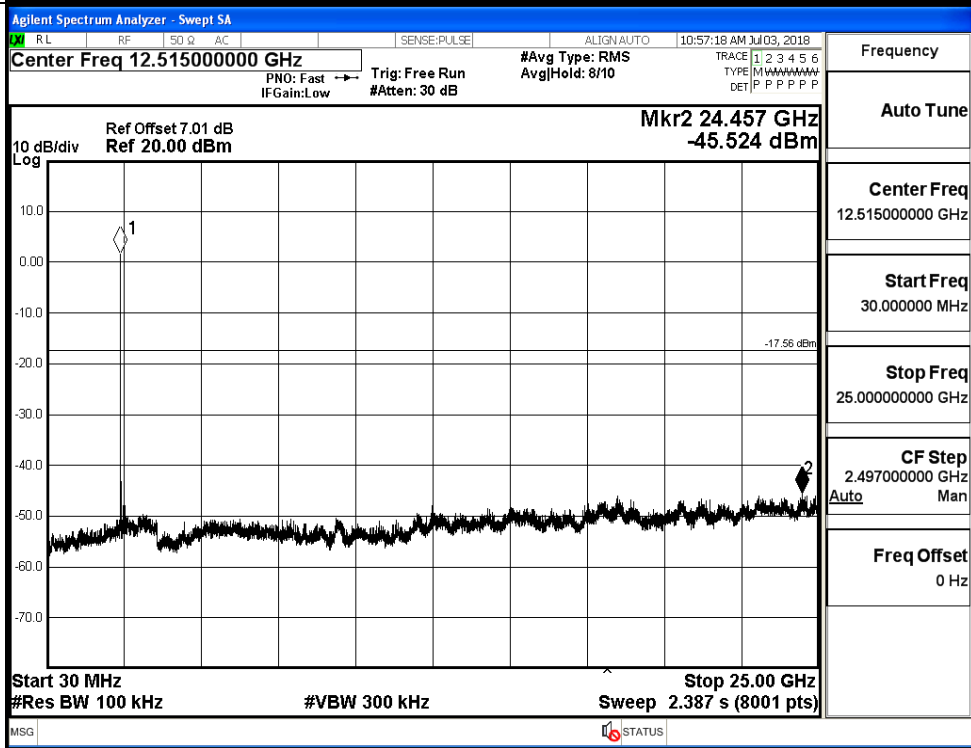


BT LE_MCH_Graphs

Pref/BT LE/MCH

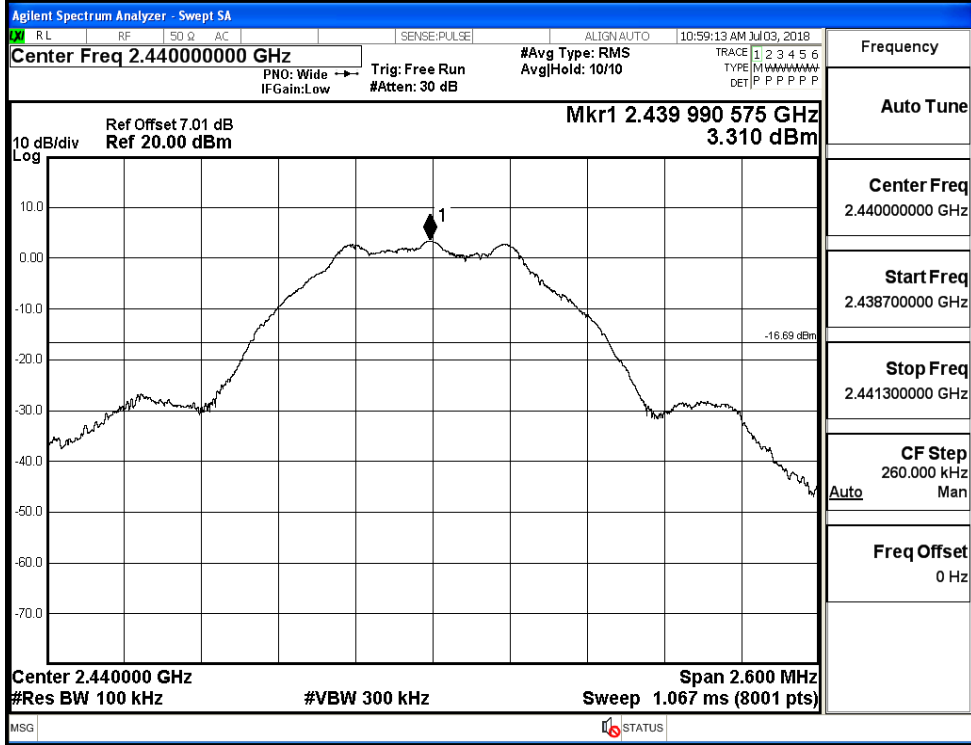


Puw/BT LE/MCH

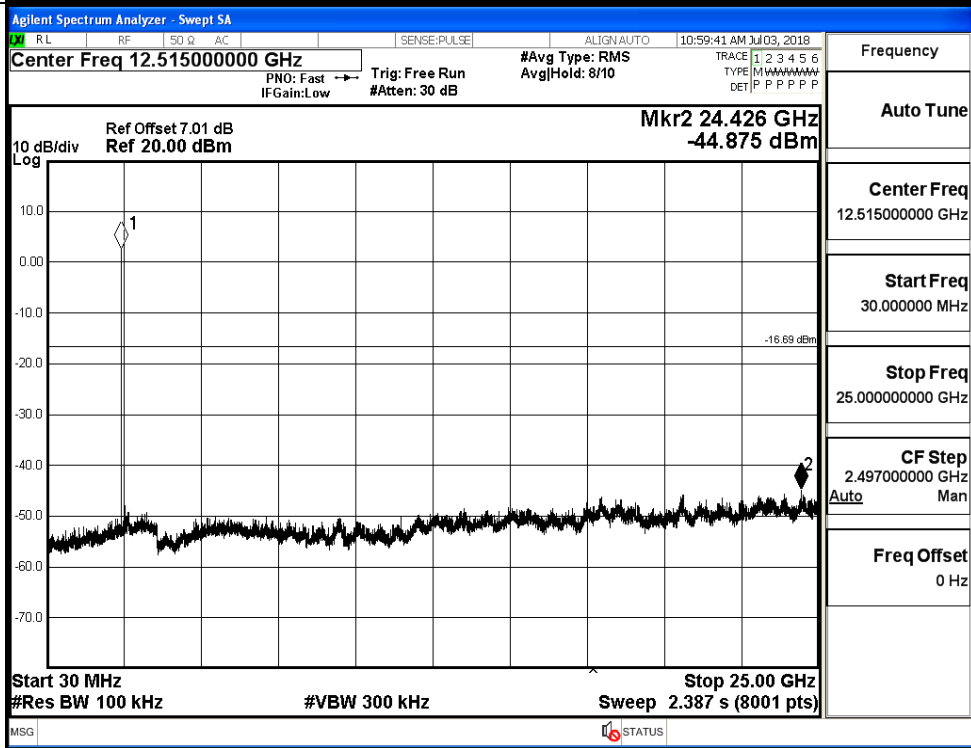


BT LE_HCH_Graphs

Pref/BT LE/HCH

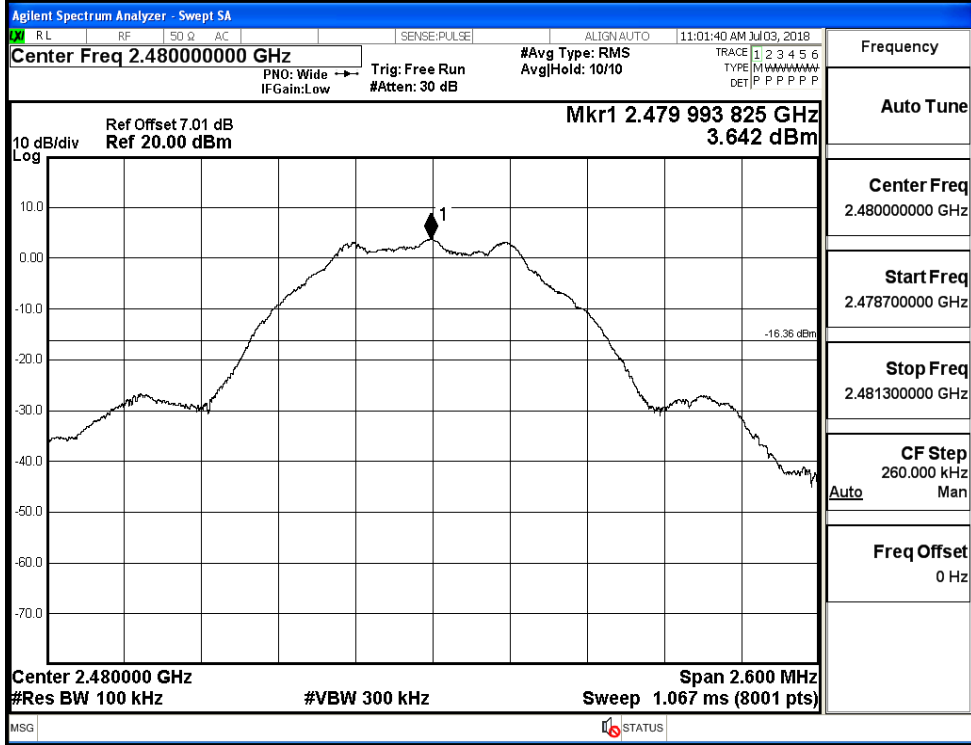



Puw/BT LE/HCH

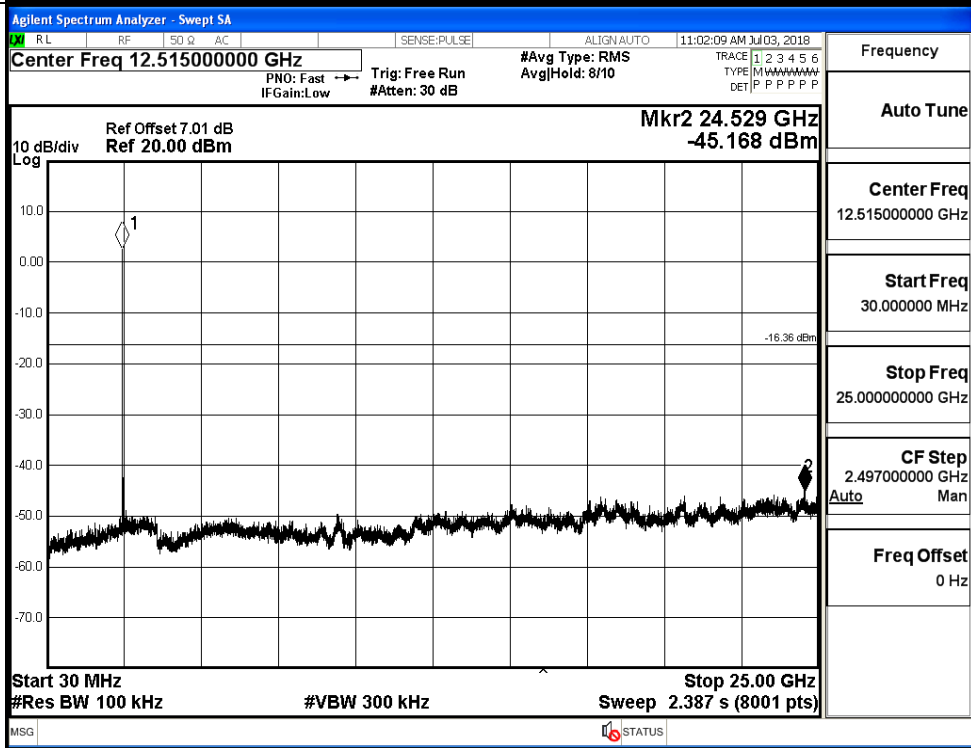

B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	2.646	-50.967	-17.35	PASS
BT LE	HCH	3.732	-49.264	-16.27	PASS


Test Graphs

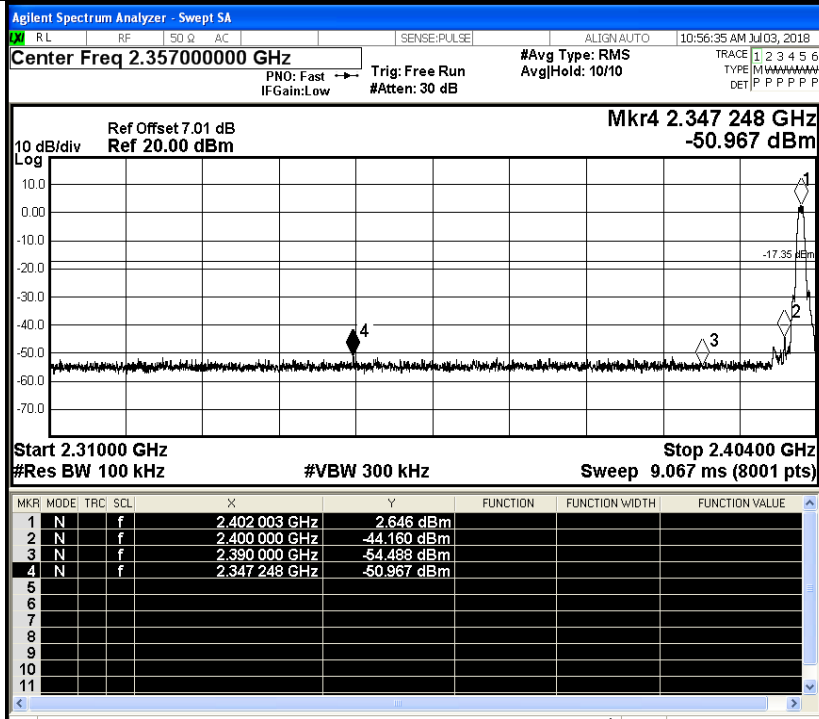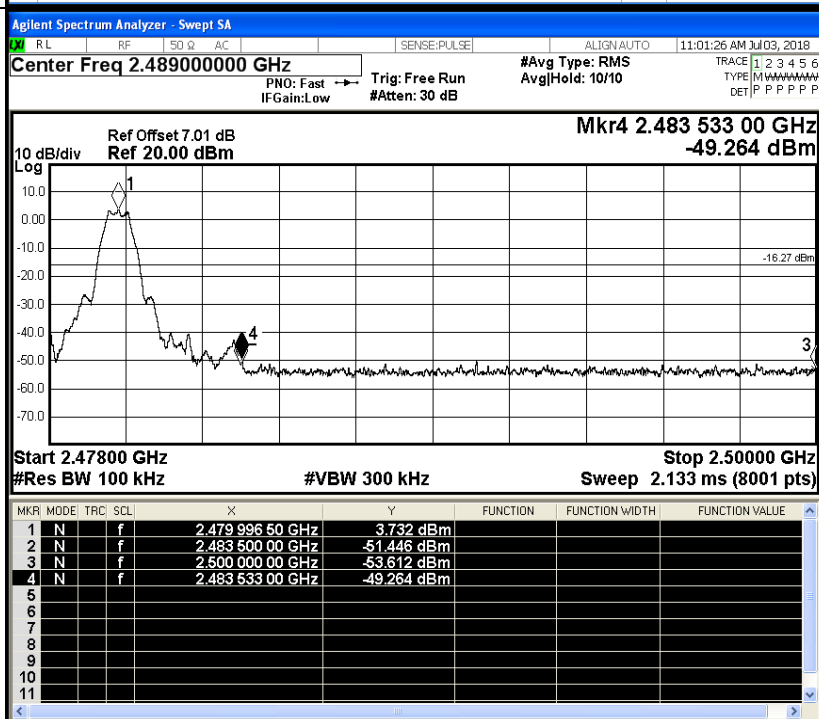LCH		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.35700000 GHz</p> <p>Start Freq 2.31000000 GHz</p> <p>Stop Freq 2.40400000 GHz</p> <p>CF Step 9.400000 MHz</p> <p>Freq Offset 0 Hz</p>
HCH		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48900000 GHz</p> <p>Start Freq 2.47800000 GHz</p> <p>Stop Freq 2.50000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>


B.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-43.70	2.0	0	53.56	PEAK	74	PASS
		Ant1	2310.0	-54.97	2.0	0	42.29	AV	54	PASS
		Ant1	2390.0	-43.71	2.0	0	53.55	PEAK	74	PASS
		Ant1	2390.0	-54.67	2.0	0	42.58	AV	54	PASS
	2480	Ant1	2483.5	-38.01	2.0	0	59.25	PEAK	74	PASS
		Ant1	2483.5	-51.89	2.0	0	45.36	AV	54	PASS
		Ant1	2500.0	-43.63	2.0	0	53.63	PEAK	74	PASS
		Ant1	2500.0	-54.26	2.0	0	43.00	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

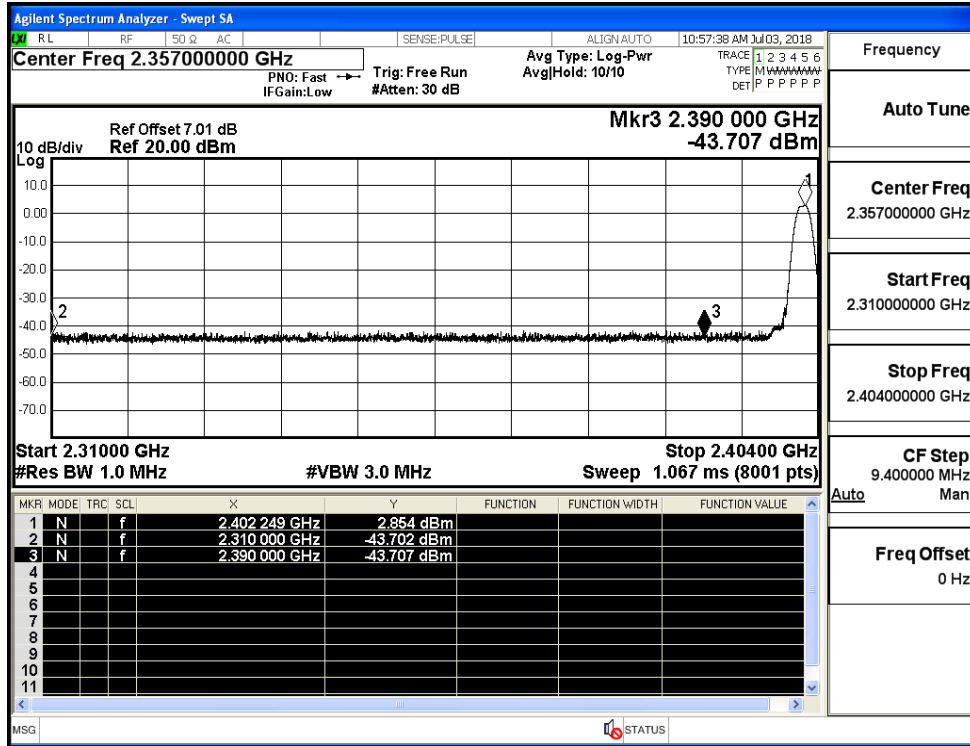

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

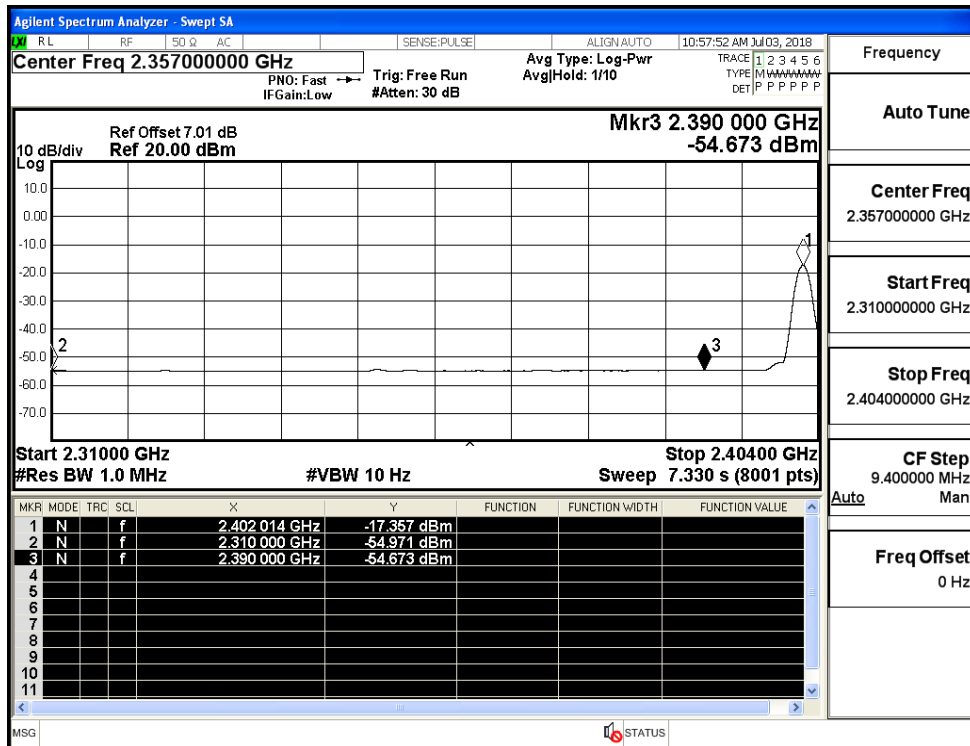

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

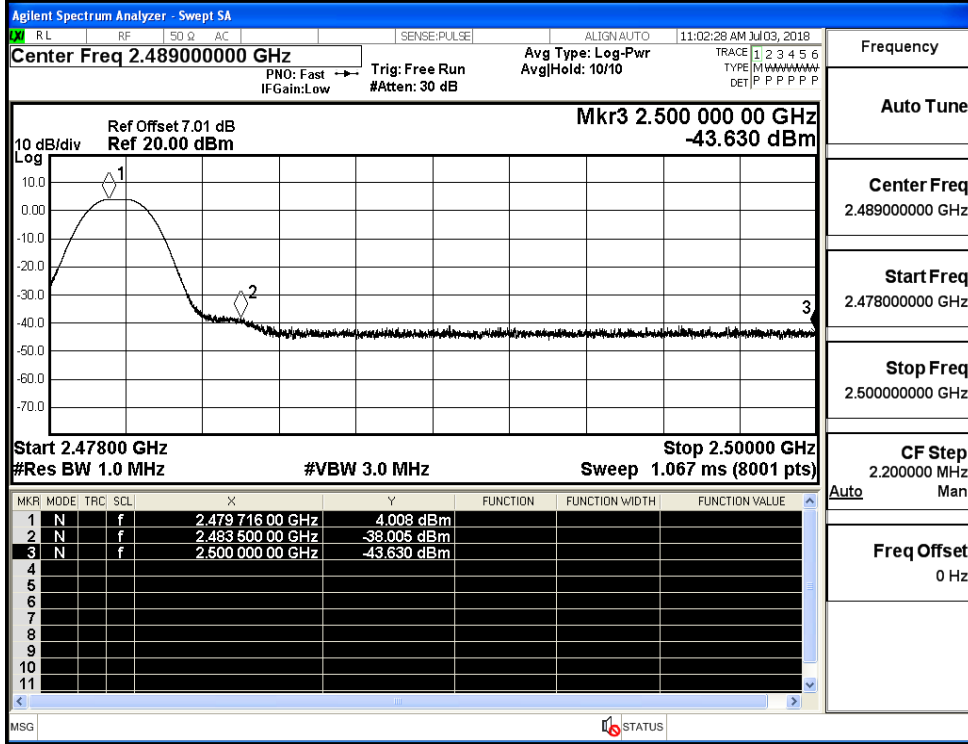

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

