



FCC TEST REPORT

**Test report
On Behalf of
Actions Microelectronics Co., Ltd.
For
Wifi dongle
Model No.: UWA5, EZC-5201BS, EZC-5200BS**

FCC ID: 2AQJT-UWA5

Prepared for : Actions Microelectronics Co., Ltd.
201, No.9 Building, Software Park, KeJiZhong Er Road, GaoXinQu, NanShan,
Shenzhen, China

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

Date of Test: Mar. 18, 2018 ~ Mar. 28, 2018

Date of Report: Mar. 28, 2018

Report Number: HK180318311-E



TEST RESULT CERTIFICATION


Applicant's name: Actions Microelectronics Co., Ltd.
Address: 201, No.9 Building, Software Park, KeJiZhong Er Road,
GaoXinQu, NanShan, Shenzhen, China
Manufacture's Name.....: ShenZhen A-unit Electronics Co., Ltd.
Address: 4th Floor, Building 8, Wisdom Land Business Park, Nanshan
District, ShenZhen City, P.R. China


Product description


Trade Mark: Acer, EZCast
Product name.....: Wifi dongle
Model and/or type reference .: UWA5, EZC-5201BS, EZC-5200BS
Standards: FCC Rules and Regulations Part 15 Subpart C Section 15.407
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test:
Date (s) of performance of tests: Mar. 18, 2018 ~ Mar. 28, 2018
Date of Issue.....: Mar. 28, 2018
Test Result.....: Pass

Prepared by: 

Project Engineer
Reviewed by: 

Project Supervisor
Approved by: 

Technical Director



TABLE OF CONTENTS

1. Test Result Summary	4
1.1. TEST PROCEDURES AND RESULTS.....	4
1.2. TEST FACILITY	4
1.3. MEASUREMENT UNCERTAINTY	5
2. EUT Description	6
2.1. GENERAL DESCRIPTION OF EUT	6
2.2. OPERATION FREQUENCY EACH OF CHANNEL.....	7
2.3. OPERATION OF EUT DURING TESTING	7
2.4. DESCRIPTION OF TEST SETUP	8
3. Genera Information	9
3.1. TEST ENVIRONMENT AND MODE	9
3.2. DESCRIPTION OF SUPPORT UNITS	10
4. Test Results and Measurement Data	11
4.1. CONDUCTED EMISSION	11
4.2. MAXIMUM CONDUCTED OUTPUT POWER	15
4.3. 6dB EMISSION BANDWIDTH	19
4.4. 26dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	28
4.5. POWER SPECTRAL DENSITY	37
4.6. BAND EDGE.....	54
4.7. SPURIOUS EMISSION	81
4.8. FREQUENCY STABILITY MEASUREMENT.....	91
4.9. ANTENNA REQUIREMENT	94
4.10. PHOTOGRAPHS OF TEST SETUP	95



1. Test Result Summary

1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a) §2.1046	PASS
6dB Emission Bandwidth	§15.407(e)	PASS
26dB Emission Bandwidth & 99% Occupied Bandwidth	§15.407(a) §2.1049	PASS
Power Spectral Density	§15.407(a)	PASS
Band edge	§15.407(a)	PASS
Radiated Emission	§15.407(a) §2.1053	PASS
Frequency Stability	§15.407(g) §2.1055	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China



1.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$



2. EUT Description

2.1. GENERAL DESCRIPTION OF EUT

Equipment	Wifi dongle
Model Name	UWA5
Serial No.	EZC-5201BS, EZC-5200BS
Trade Mark	Acer, EZCast
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: UWA5.
FCC ID	2AQJT-UWA5
Operation Frequency:	IEEE 802.11a/n/ac(HT20) 5.180GHz-5.240GHz IEEE 802.11n/ac(HT40) 5.190GHz-5.230GHz IEEE 802.11ac(HT80) 5.210GHz IEEE 802.11a/n/ac(HT20)5.745GHz-5.825GHz IEEE 802.11n/ac(HT40)5.755GHz-5.795GHz IEEE 802.11ac(HT80) 5.775GHz
Modulation Technology:	IEEE 802.11a/n/ac
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Antenna Type	PCB Antenna
Antenna Gain	1dBi
Power Source	DC 5V 0.5A from Micro USB
Power Supply:	DC 5V 0.5A from Micro USB



2.2. Operation Frequency each of channel

802.11a/802.11n(HT20) 802.11ac(HT20)		802.11n(HT40)/ 802.11ac(HT40)		802.11ac(HT80)	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180	38	5190	42	5210
40	5200	46	5230	155	5775
44	5220	151	5755		
48	5240	159	5790		
149	5745				
153	5765				
157	5785				
161	5805				
165	5825				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. Operation of EUT during testing

For 802.11a/n (HT20)/ac(HT20)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
36	Low	5180	149	Low	5745
40	Mid	5200	157	Mid	5785
48	High	5240	165	High	5825

For 802.11n (HT40)/ ac(HT40)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
38	Low	5190	151	Low	5755
46	High	5230	159	High	5795




For 802.11ac(HT80)

Band I (5150 - 5250 MHz)		Band IV (5725 - 5850 MHz)	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
42	5210	155	5775

2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and Radiation and Above1GHz Radiation testing:



- PC information
Model: TP00067A
Input: DC20V, 2.25-3.25A
Output: 5VDC, 0.5A



3. Genera Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
<p>The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

<p>We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p>	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(HT20)/ac(HT40)/ac(HT80)	/
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation



3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*
- 3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*



4. Test Results and Measurement Data

4.1. Conducted Emission

4.1.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Tx Mode														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Result:	PASS														



4.1.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2018
LISN	R&S	ENV216	HKE-002	Dec. 27, 2018
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Dec. 27, 2018
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




4.1.3. Test data

Remark: We tested three Channels in AC 120V/60Hz and AC 240V/60Hz, the worst case was recorded.

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

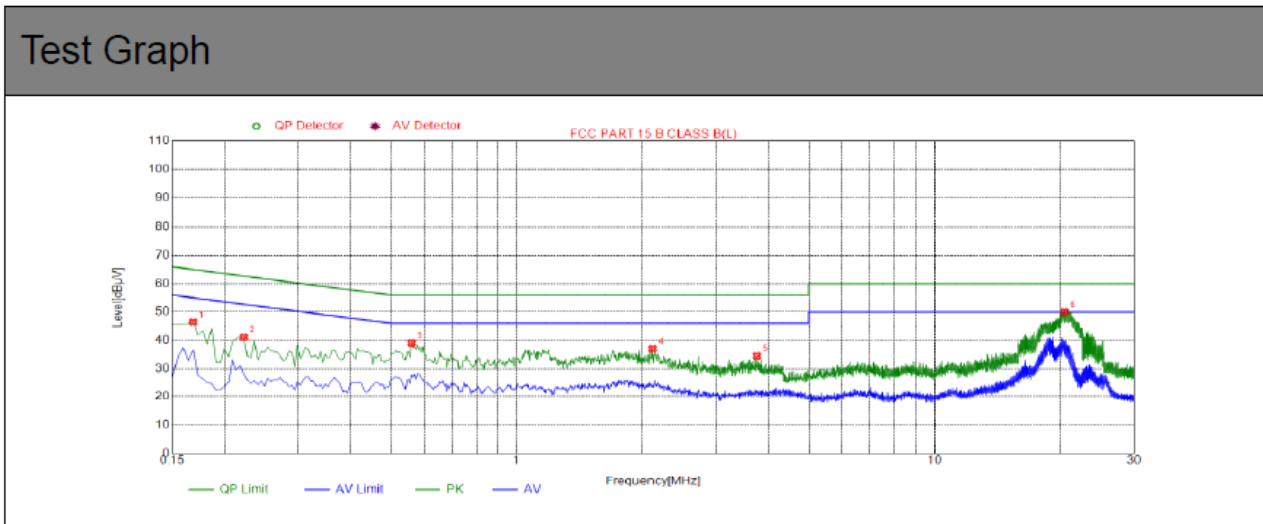

NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector
1	0.1680	46.43	10.01	65.06	18.63	PK
2	0.2220	41.08	10.04	62.75	21.67	PK
3	0.5595	39.04	10.06	56.00	16.96	PK
4	2.1120	37.01	10.16	56.00	18.99	PK
5	3.7500	34.49	10.25	56.00	21.51	PK
6	20.4180	50.01	10.12	60.00	9.99	PK


Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

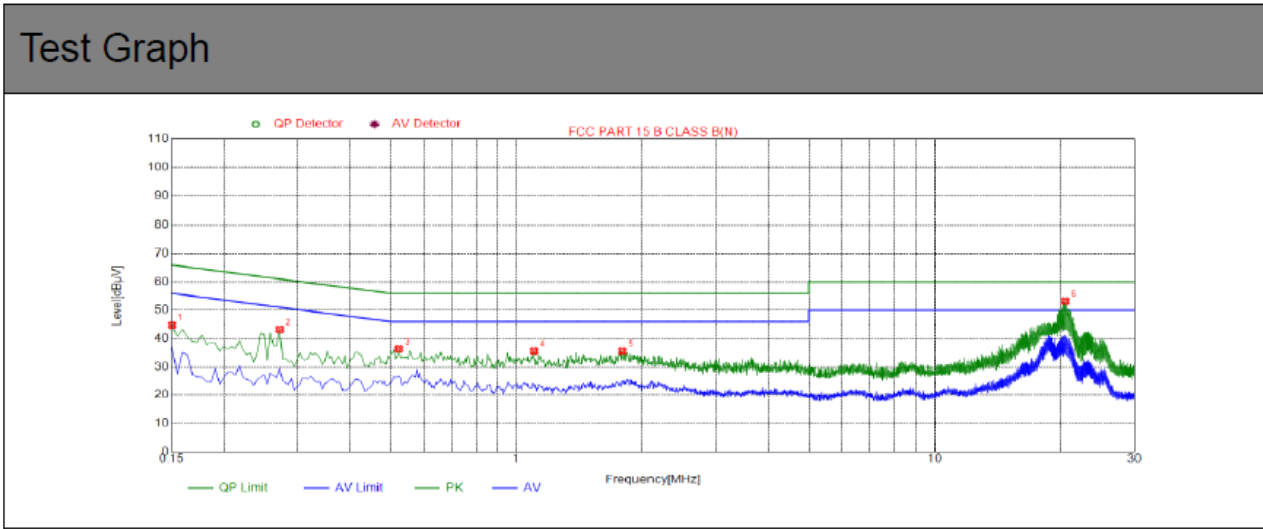

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector
1	0.1500	44.76	10.03	66.00	21.24	PK
2	0.2715	43.25	10.03	61.07	17.82	PK
3	0.5235	36.37	10.04	56.00	19.63	PK
4	1.0995	35.64	10.07	56.00	20.36	PK
5	1.7880	35.62	10.14	56.00	20.38	PK
6	20.4675	53.20	10.12	60.00	6.80	PK

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

4.2. Maximum Conducted Output Power

4.2.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046	
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02.r01 Section E	
Limit:	Frequency Band (MHz)	Limit
	5150-5250	250mW for client devices
	5725-5850	1 W
Test Setup:	<p style="text-align: center;"> Power meter EUT </p>	
Test Mode:	Transmitting mode with modulation	
Test Procedure:	<ol style="list-style-type: none"> The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Measure the conducted output power and record the results in the test report. 	
Test Result:	PASS	
Remark:	Conducted output power= measurement power $+10\log(1/x)$ X is duty cycle=1, so $10\log(1/1)=0$ Conducted output power= measurement power	



4.2.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018
Power meter	Agilent	E4419B	HKE-085	Dec. 27, 2018
Power Sensor	Agilent	E9300A	HKE-086	Dec. 27, 2018
RF cable	Times	1-40G	HKE-034	Dec. 27, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.2.3. Test Data

Configuration Band I (5150 - 5250 MHz)				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11a	CH36	10.34	23.97	PASS
11a	CH40	10.15	23.97	PASS
11a	CH48	10.21	23.97	PASS
11n(HT20)	CH36	9.97	23.97	PASS
11n(HT20)	CH40	9.73	23.97	PASS
11n(HT20)	CH48	9.65	23.97	PASS
11n(HT40)	CH38	9.55	23.97	PASS
11n(HT40)	CH46	9.41	23.97	PASS
11ac(HT20)	CH36	9.38	23.97	PASS
11ac(HT20)	CH40	9.25	23.97	PASS
11ac(HT20)	CH48	8.97	23.97	PASS
11ac(HT40)	CH38	8.52	23.97	PASS
11ac(HT40)	CH46	8.16	23.97	PASS
11ac(HT80)	CH42	8.51	23.97	PASS



Configuration Band IV (5725 - 5850 MHz)				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11a	CH149	10.39	30	PASS
11a	CH157	10.24	30	PASS
11a	CH165	10.12	30	PASS
11n (HT20)	CH149	9.68	30	PASS
11n (HT20)	CH157	9.59	30	PASS
11n (HT20)	CH165	9.44	30	PASS
11n (HT40)	CH151	9.38	30	PASS
11n (HT40)	CH159	9.21	30	PASS
11ac(HT20)	CH149	9.45	30	PASS
11ac(HT20)	CH157	9.30	30	PASS
11ac(HT20)	CH165	9.16	30	PASS
11ac(HT40)	CH151	8.83	30	PASS
11ac(HT40)	CH159	8.24	30	PASS
11ac(HT80)	CH155	8.68	30	PASS



4.3.3. Test data


Band IV (5725 - 5850 MHz)					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11a	CH149	5745	16.96	0.5	PASS
11a	CH157	5785	17.20	0.5	PASS
11a	CH161	5825	17.05	0.5	PASS
11n(HT20)	CH149	5745	17.65	0.5	PASS
11n(HT20)	CH157	5785	17.67	0.5	PASS
11n(HT20)	CH161	5825	17.69	0.5	PASS
11n(HT40)	CH151	5755	36.44	0.5	PASS
11n(HT40)	CH159	5795	36.44	0.5	PASS
11ac(HT20)	CH149	5745	17.68	0.5	PASS
11ac(HT20)	CH157	5785	17.67	0.5	PASS
11ac(HT20)	CH165	5825	17.70	0.5	PASS
11ac(HT40)	CH151	5755	36.44	0.5	PASS
11ac(HT40)	CH159	5795	36.41	0.5	PASS
11ac(HT80)	CH155	5755	74.70	0.5	PASS

Test plots as follows:




Band IV (5725 – 5850 MHz)


802.11a

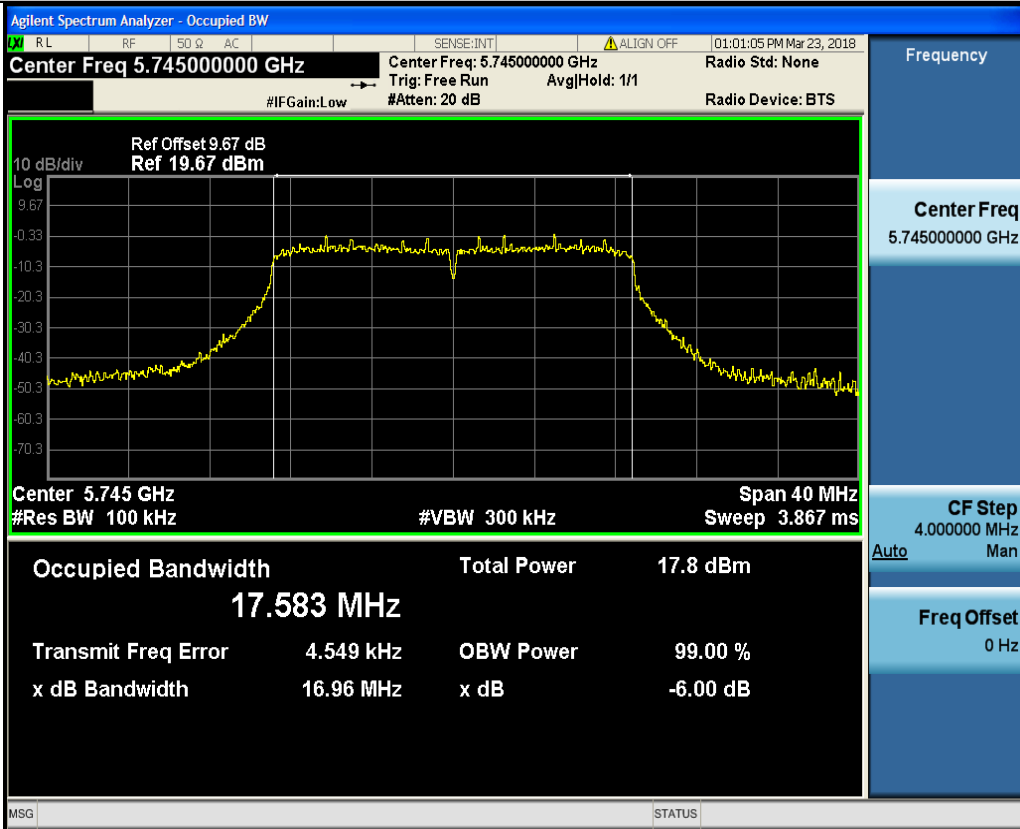


Low

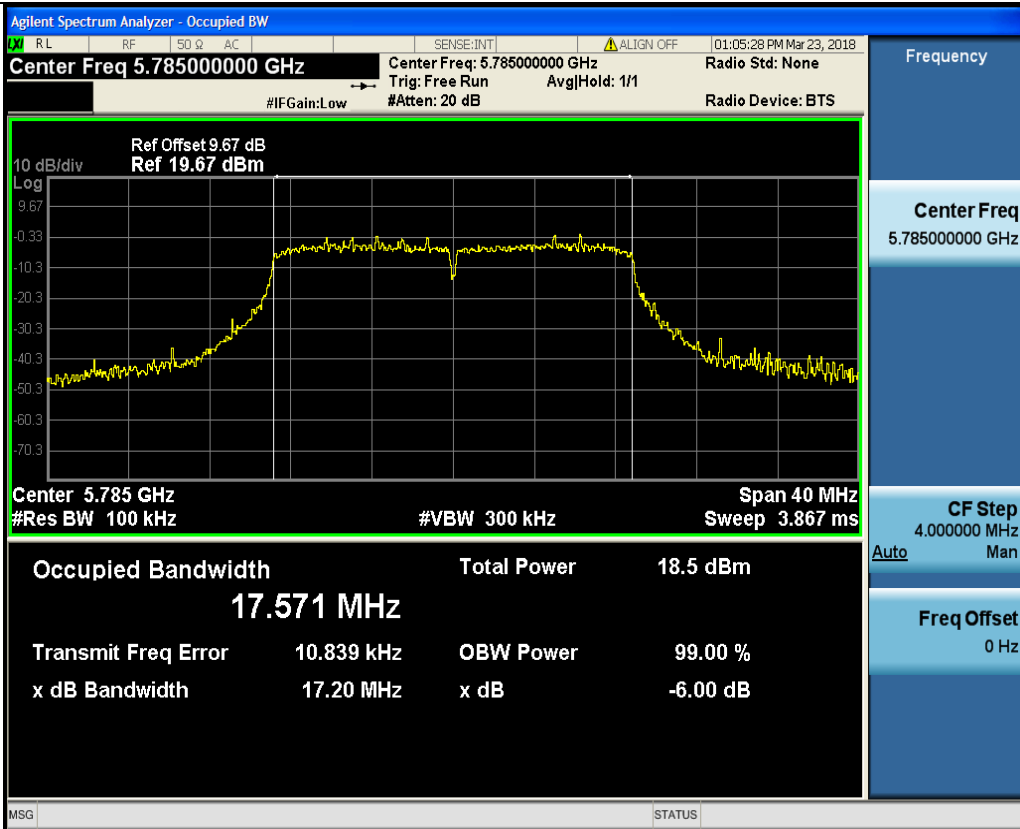


Mid

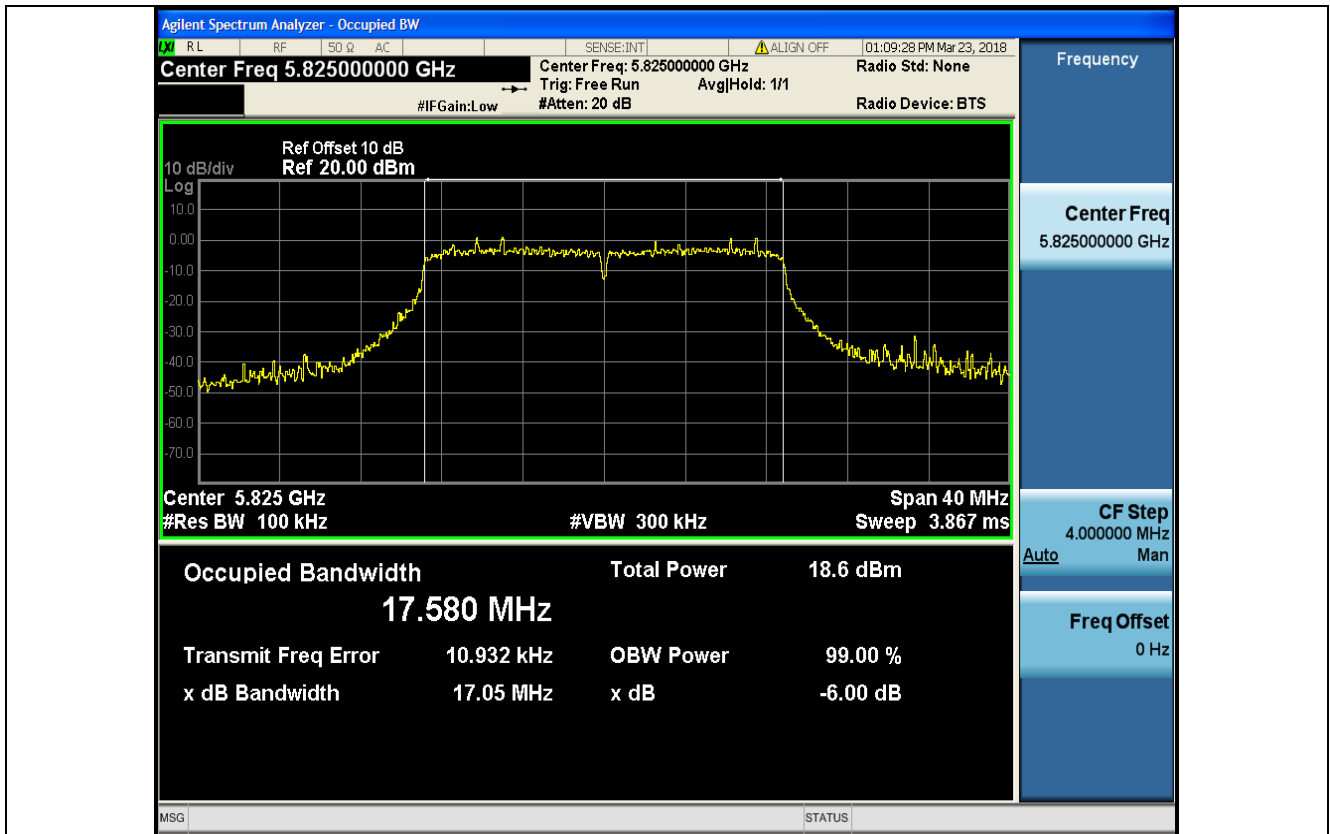


High

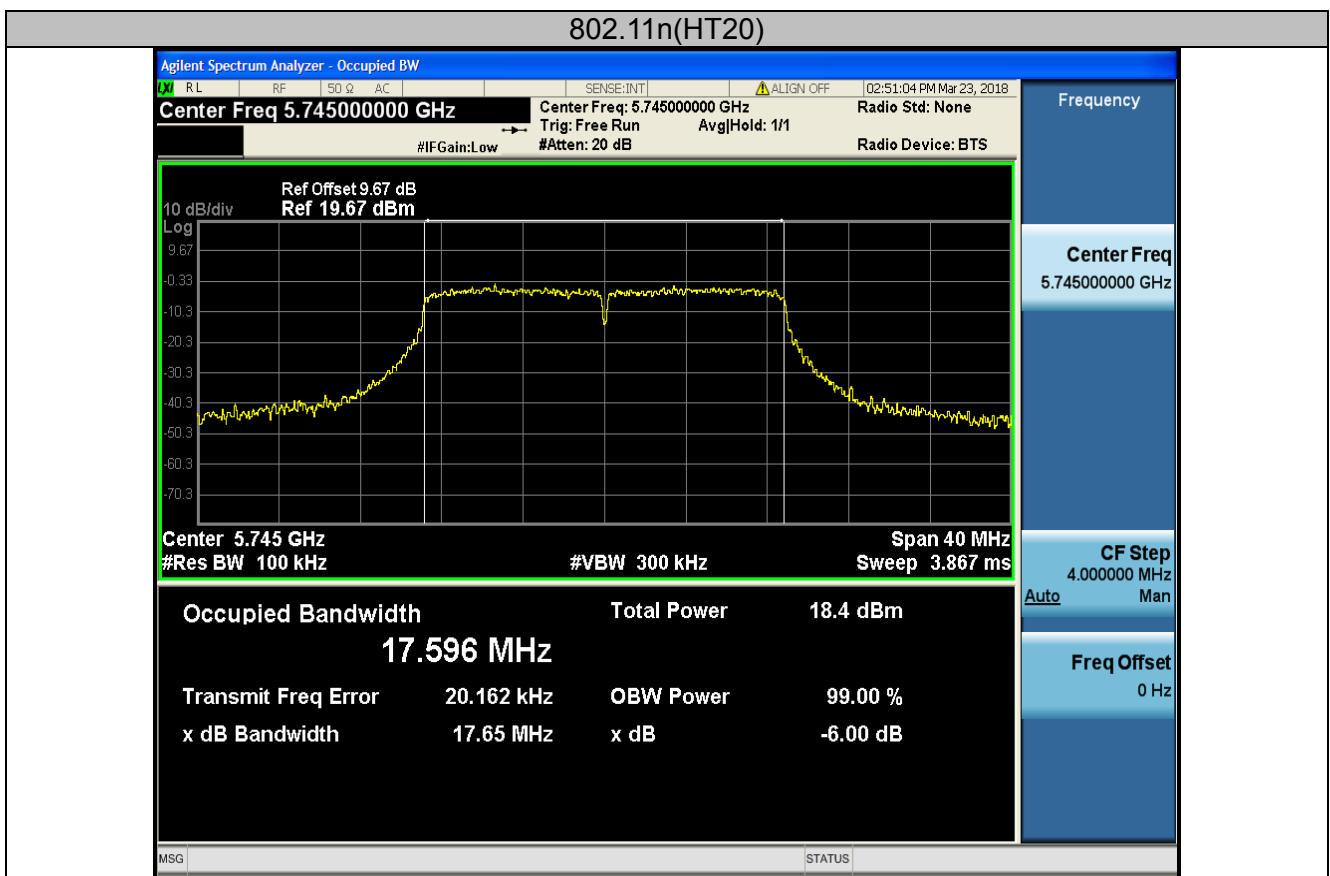

Low

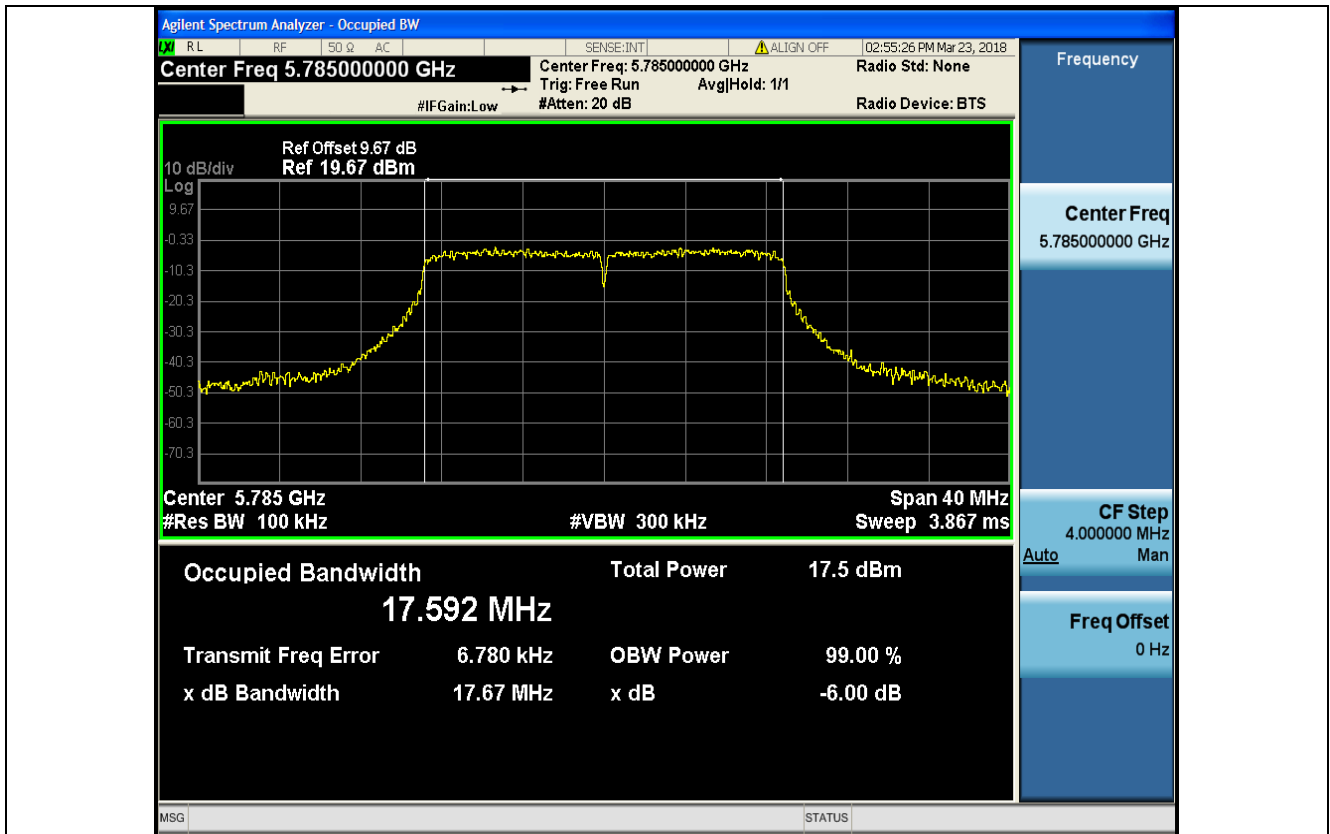


Mid

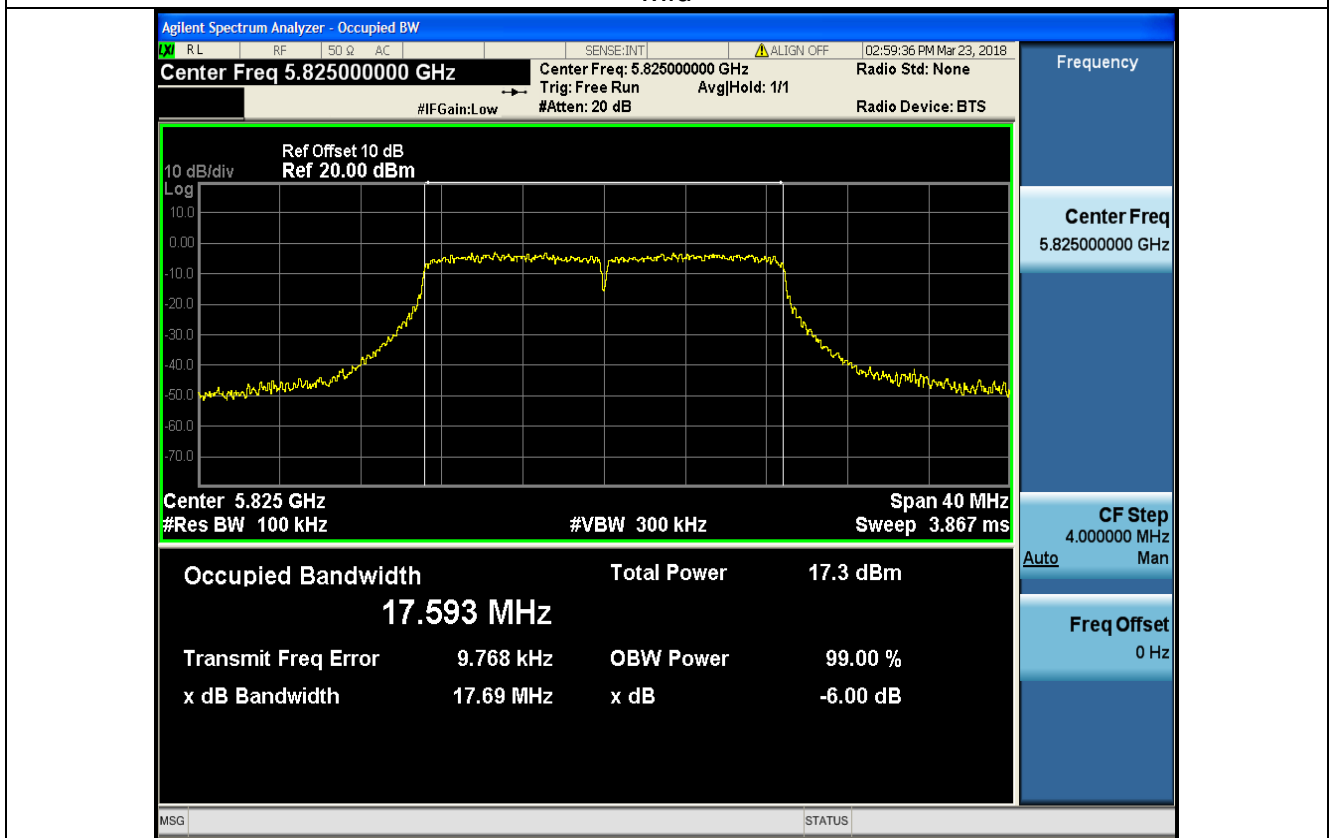


High



802.11n(HT40)

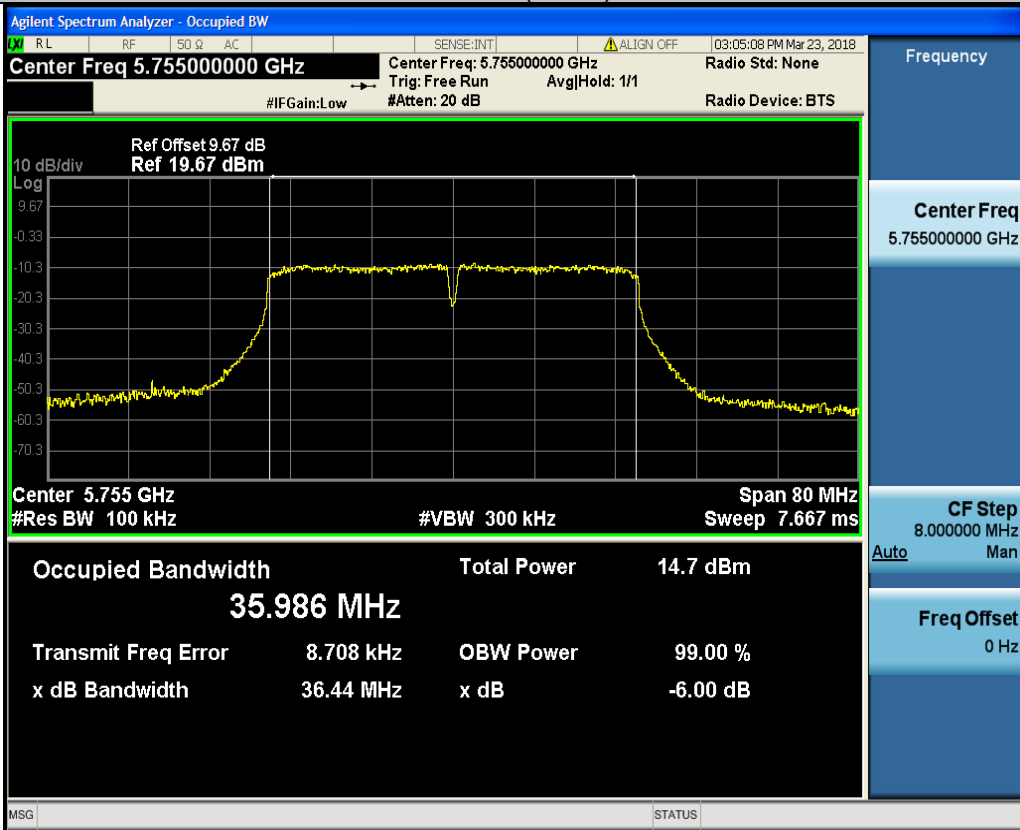


Low

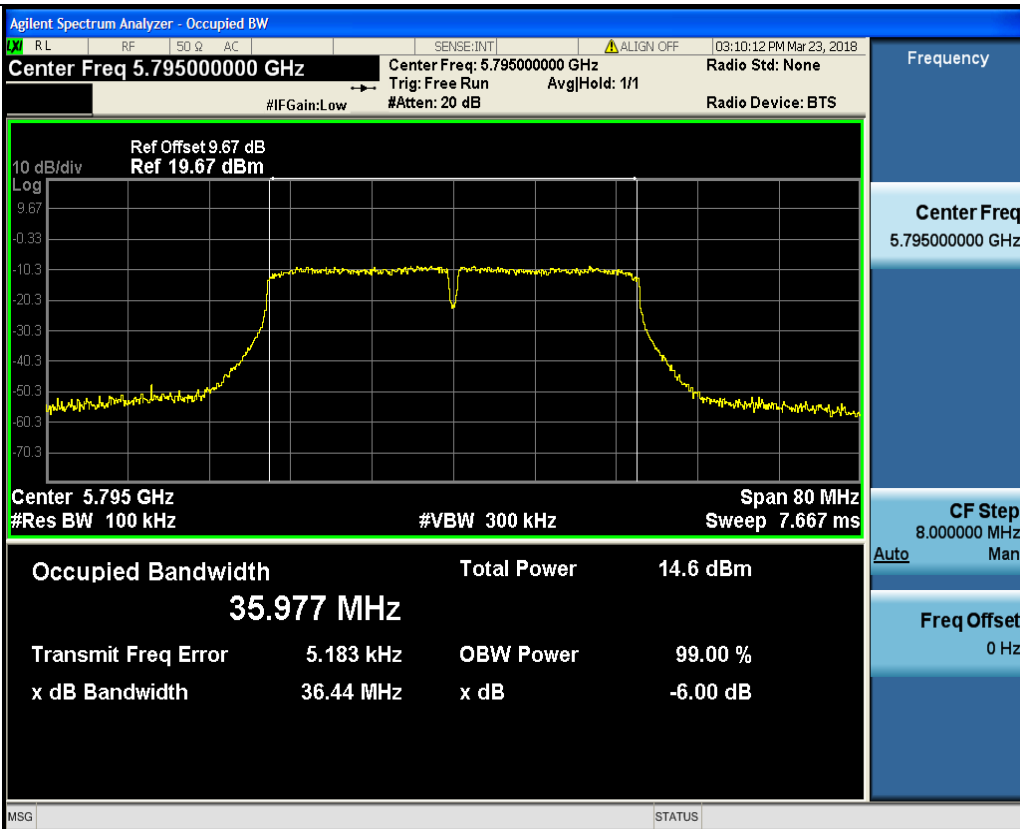


High




802.11ac(HT20)

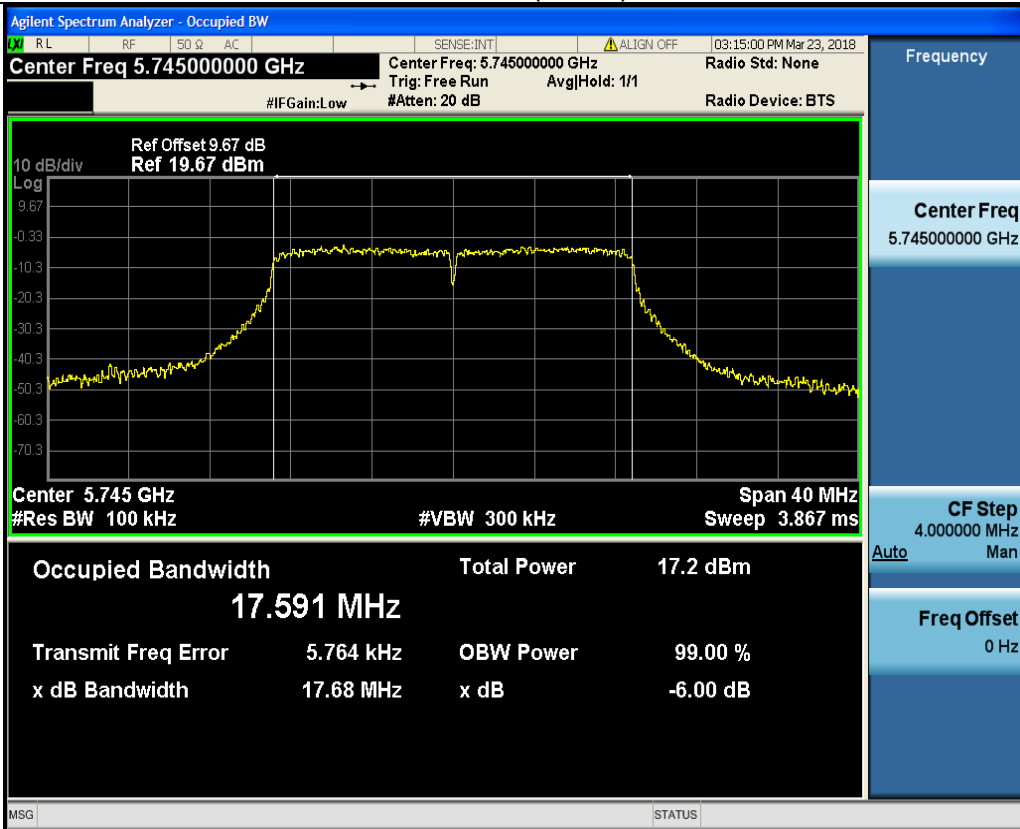


Low

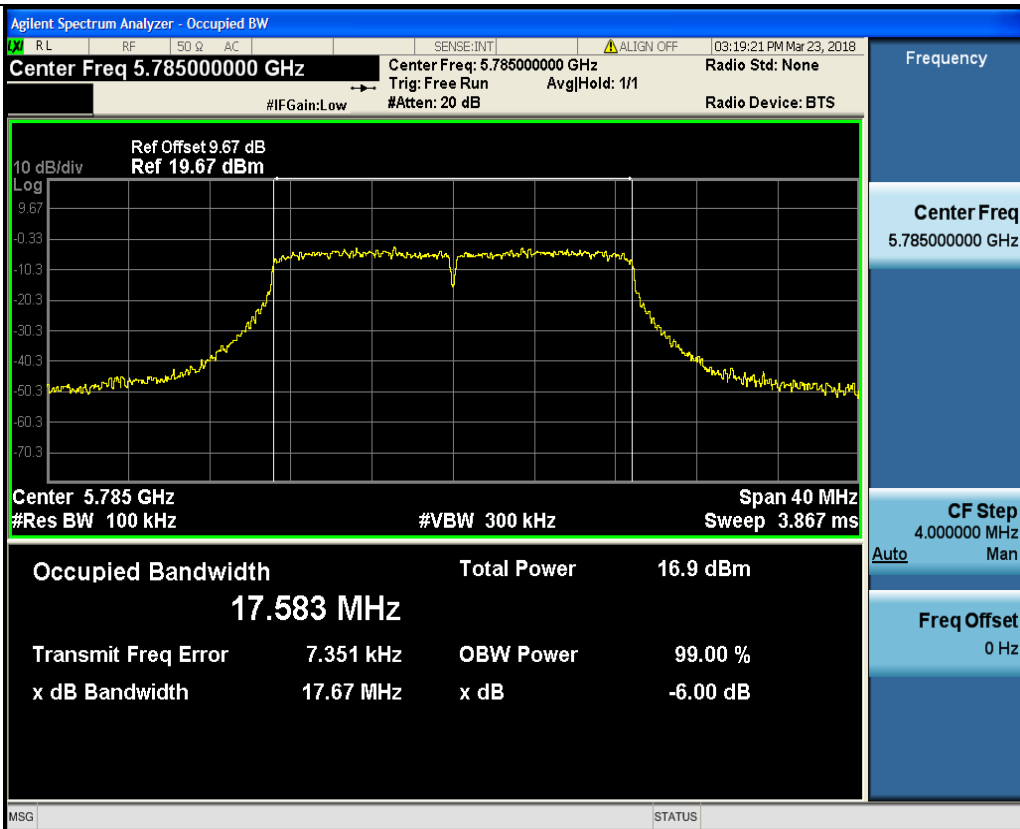


Mid

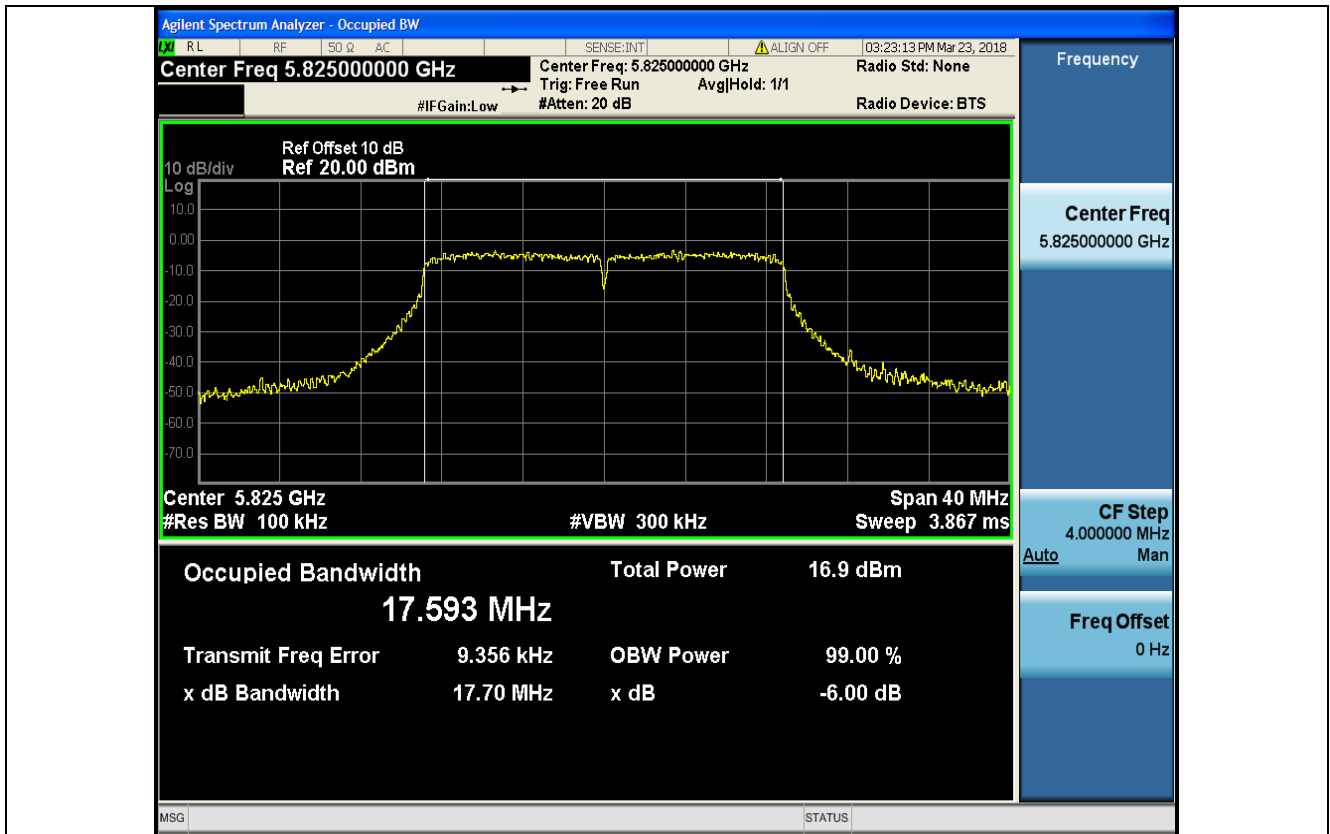

High

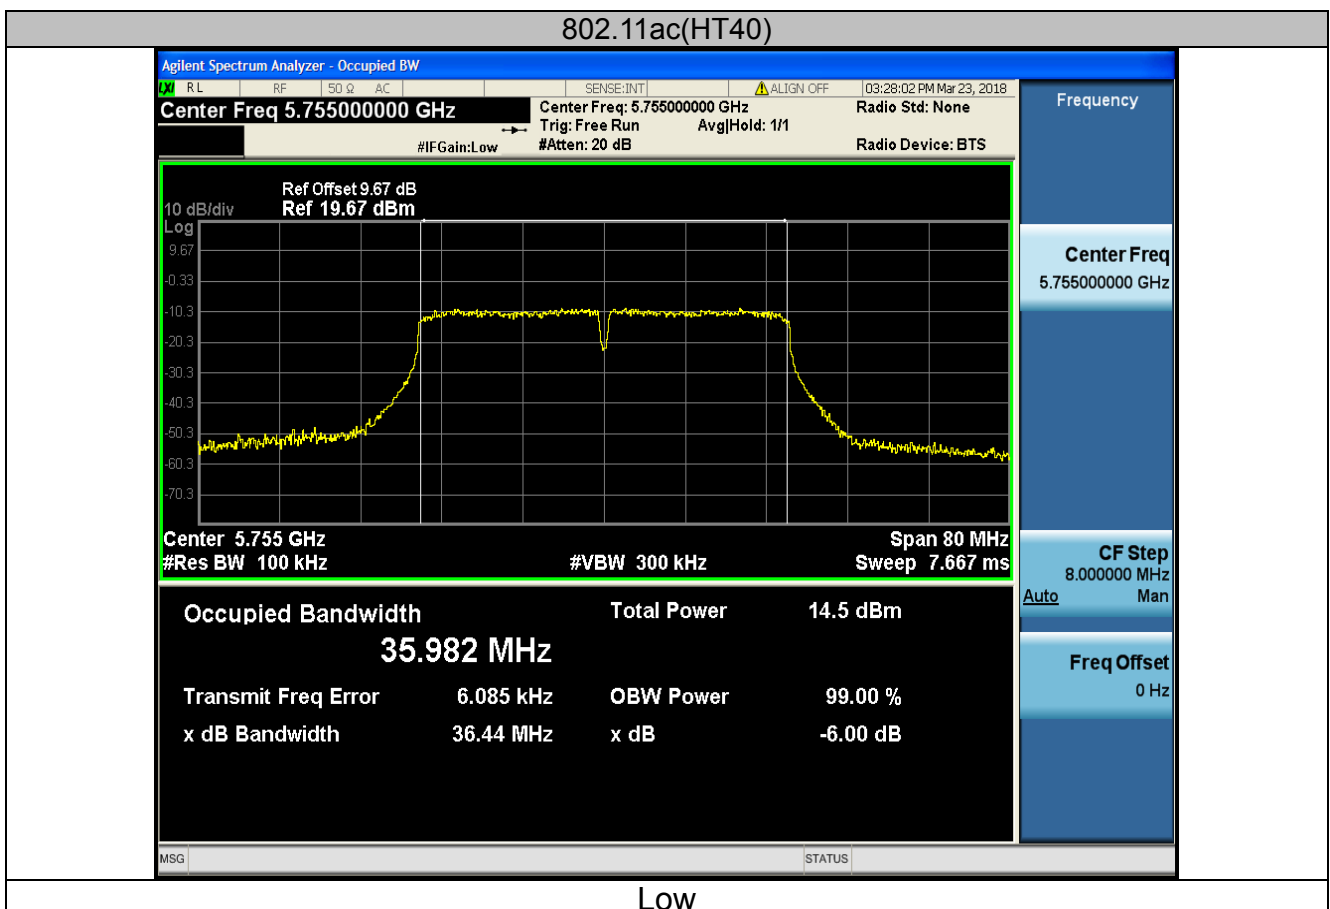


Low

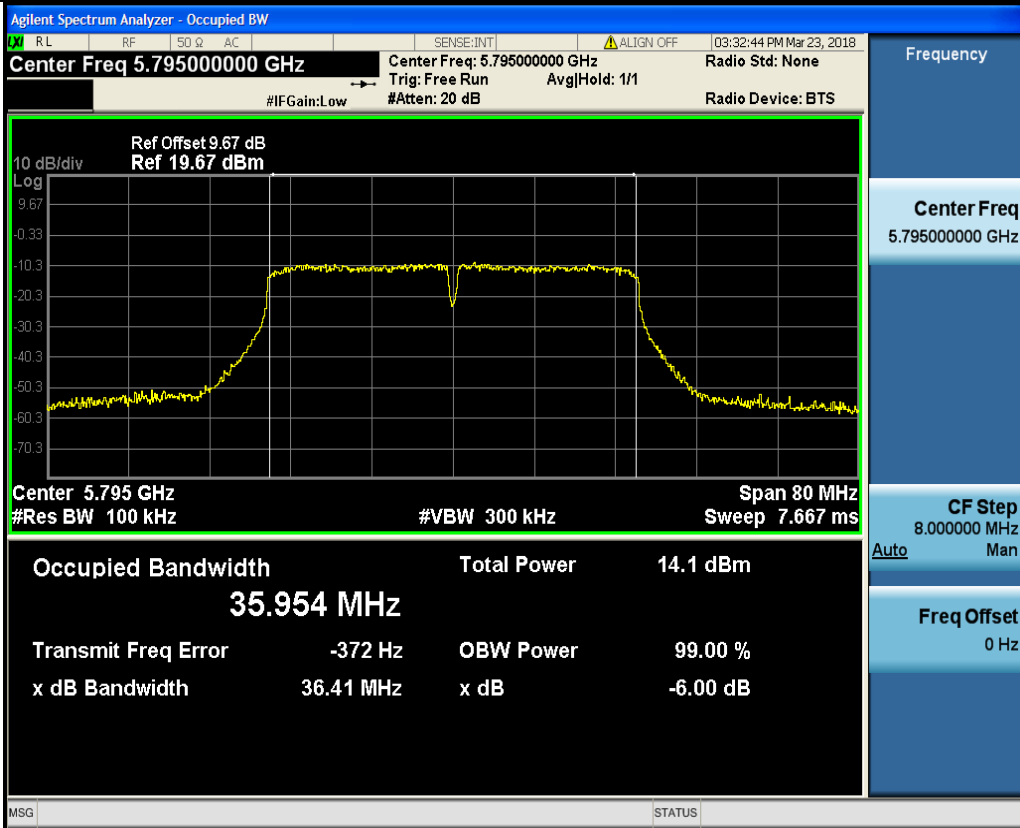

High


802.11ac(HT80)

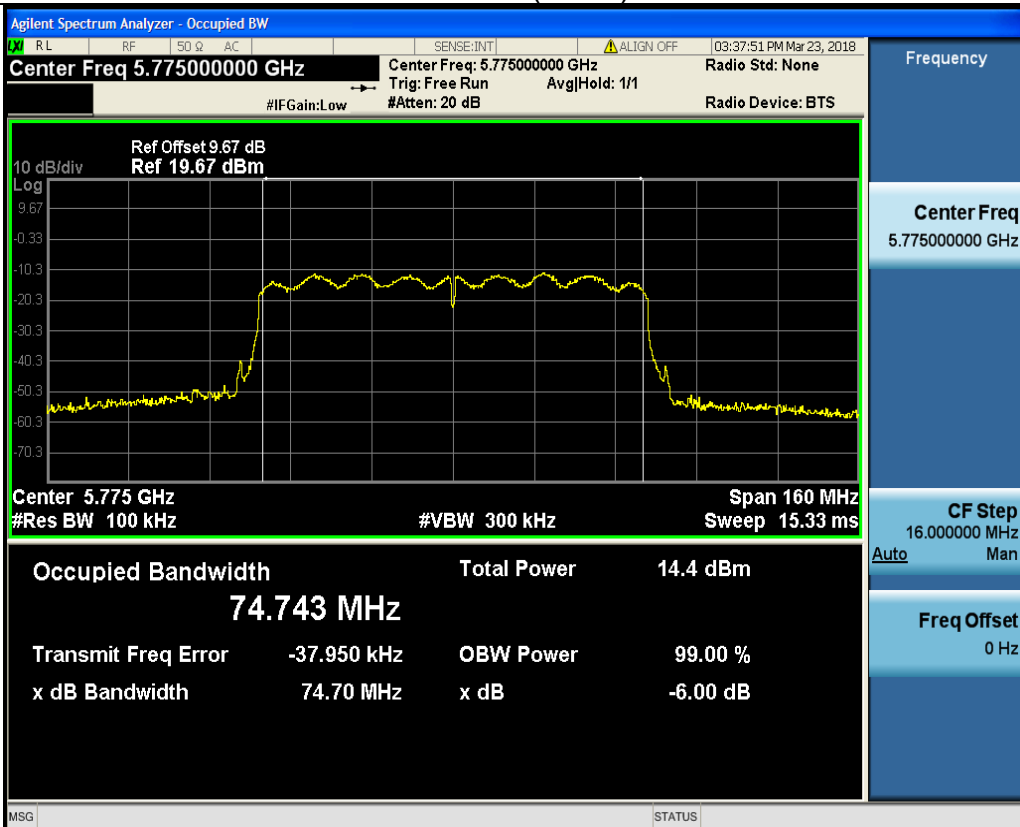



4.4. 26dB Bandwidth and 99% Occupied Bandwidth

4.4.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)& Part 2 J Section 2.1049
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	No restriction limits
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth $RBW = 1\% EBW$, $VBW \geq 3RBW$, In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	PASS

4.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018
RF cable	Times	1-40G	HKE-034	Dec. 27, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.4.3. Test data


Band I


Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Verdict
11a	CH36	5180	20.71	PASS
11a	CH40	5200	20.50	PASS
11a	CH48	5240	20.16	PASS
11n(HT20)	CH36	5180	20.86	PASS
11n(HT20)	CH40	5200	20.76	PASS
11n(HT20)	CH48	5240	21.03	PASS
11n(HT40)	CH38	5190	41.72	PASS
11n(HT40)	CH46	5230	41.42	PASS
11ac(HT20)	CH36	5180	21.07	PASS
11ac(HT20)	CH40	5200	20.78	PASS
11ac(HT20)	CH48	5240	20.58	PASS
11ac(HT40)	CH38	5190	40.92	PASS
11ac(HT40)	CH46	5230	41.18	PASS
11ac(HT80)	CH42	5210	81.04	PASS

Test plots as follows:




Band I (5150 – 5250 MHz)

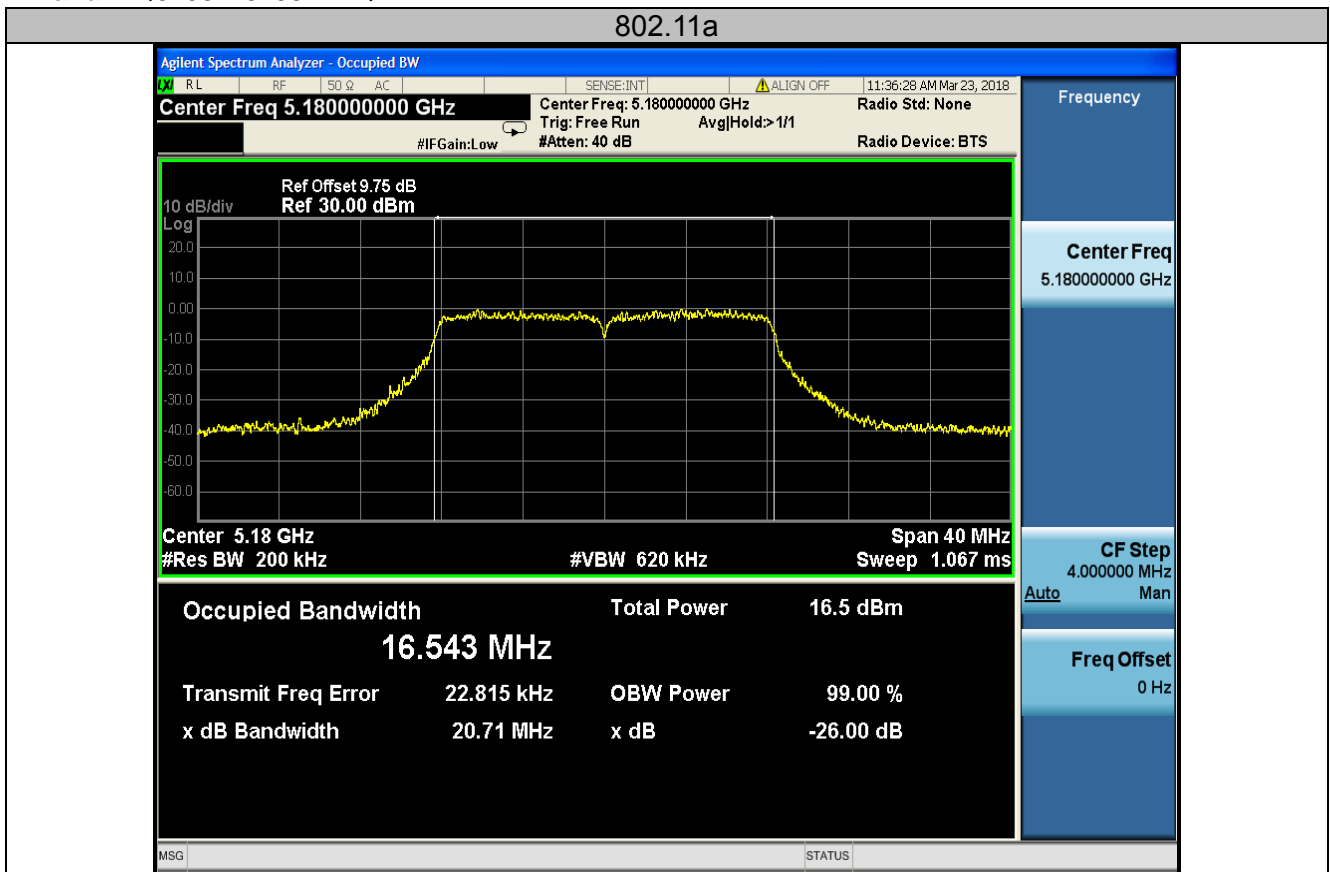


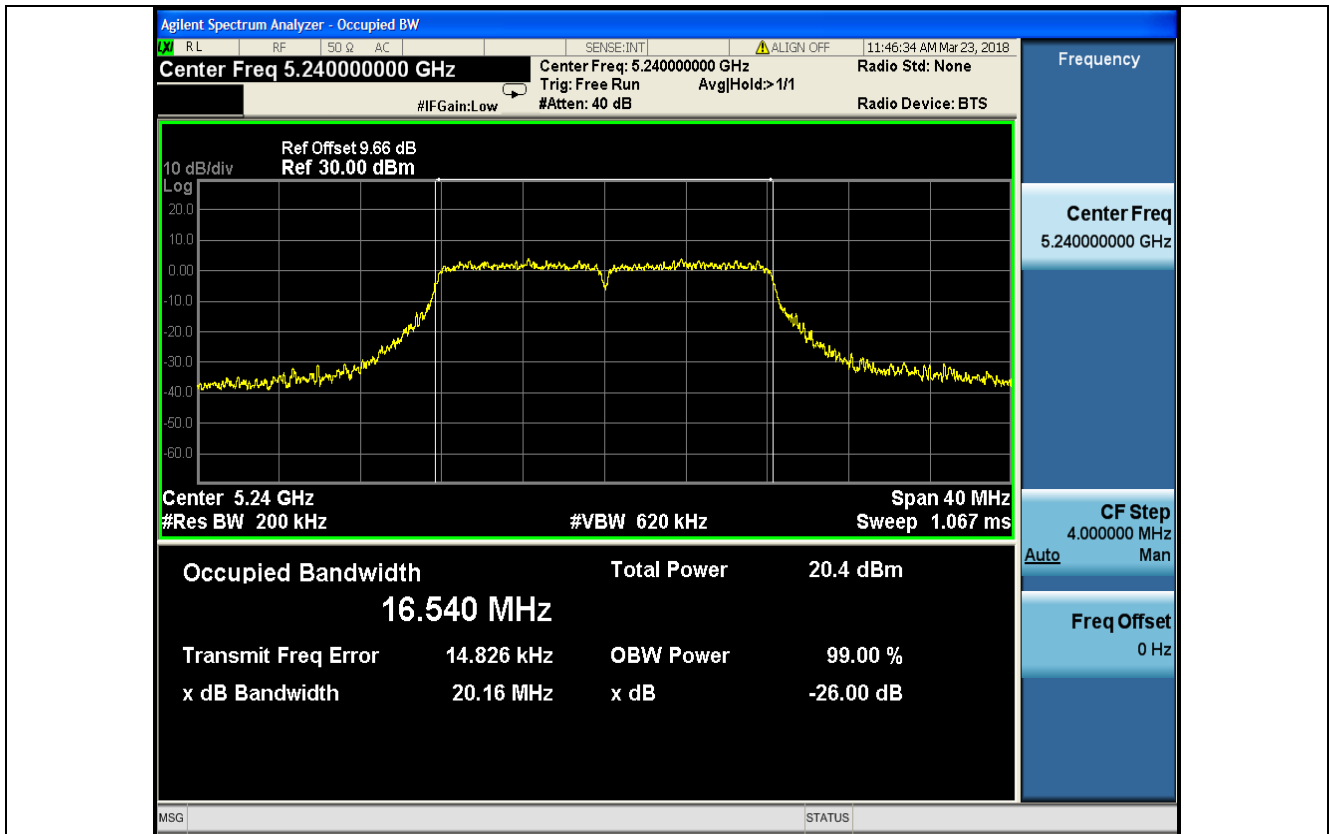


High

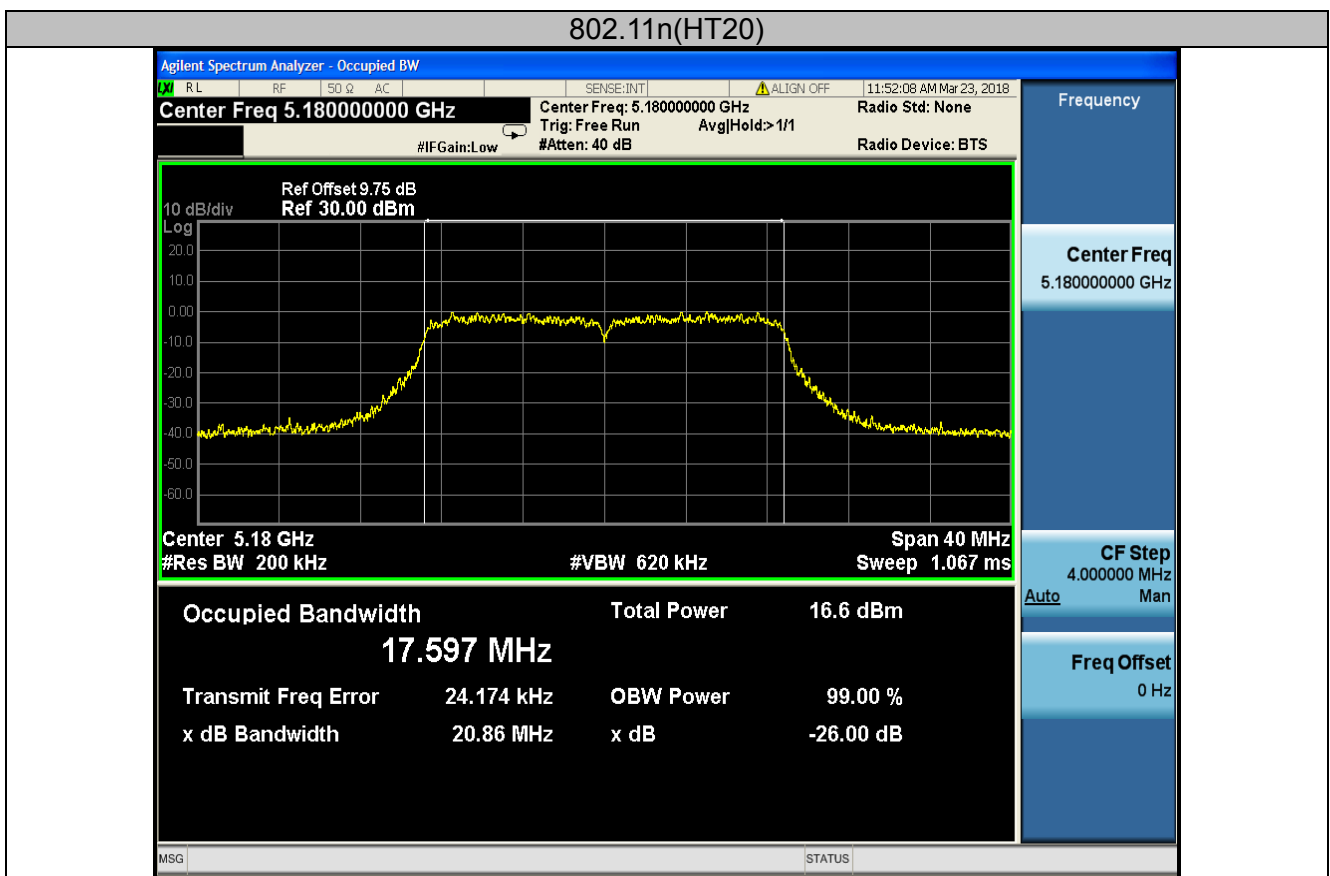

Low

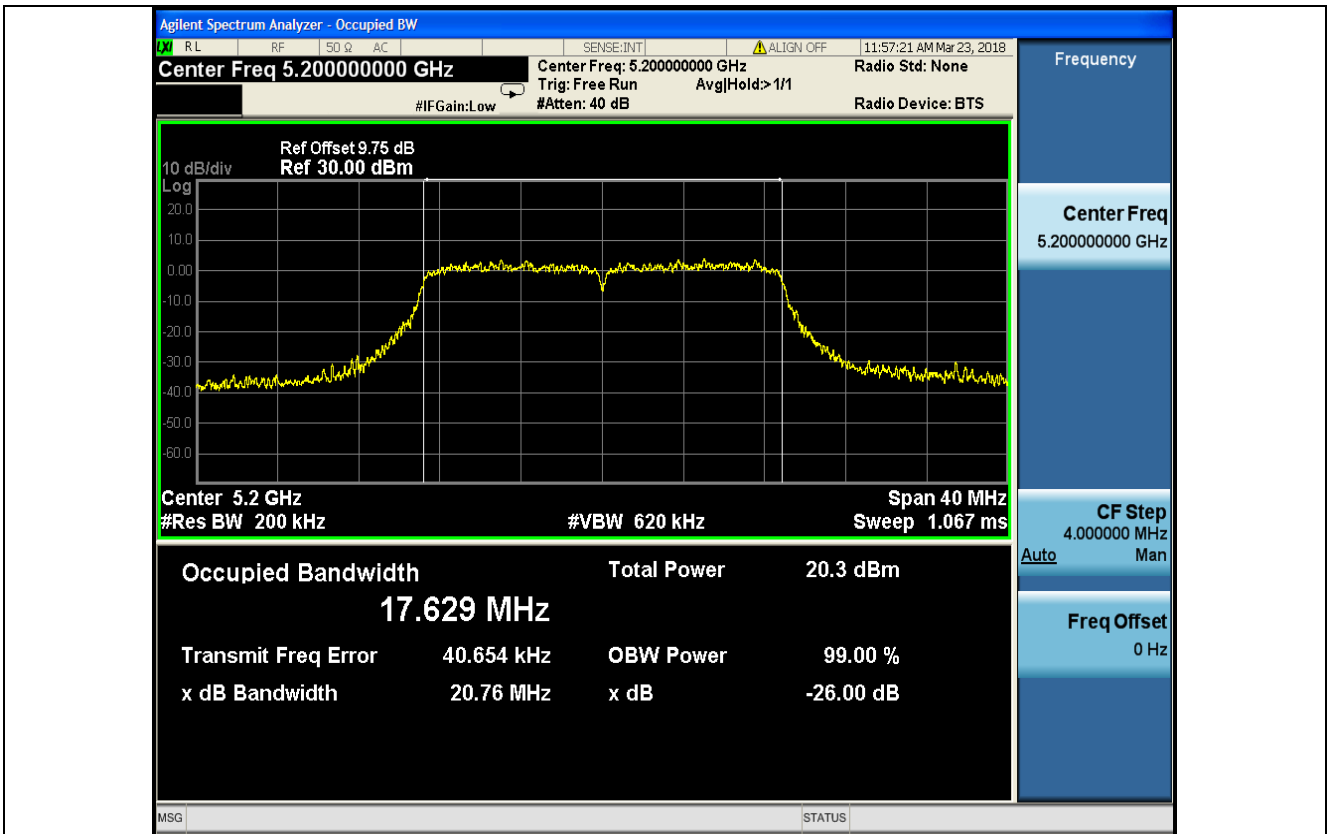


Mid

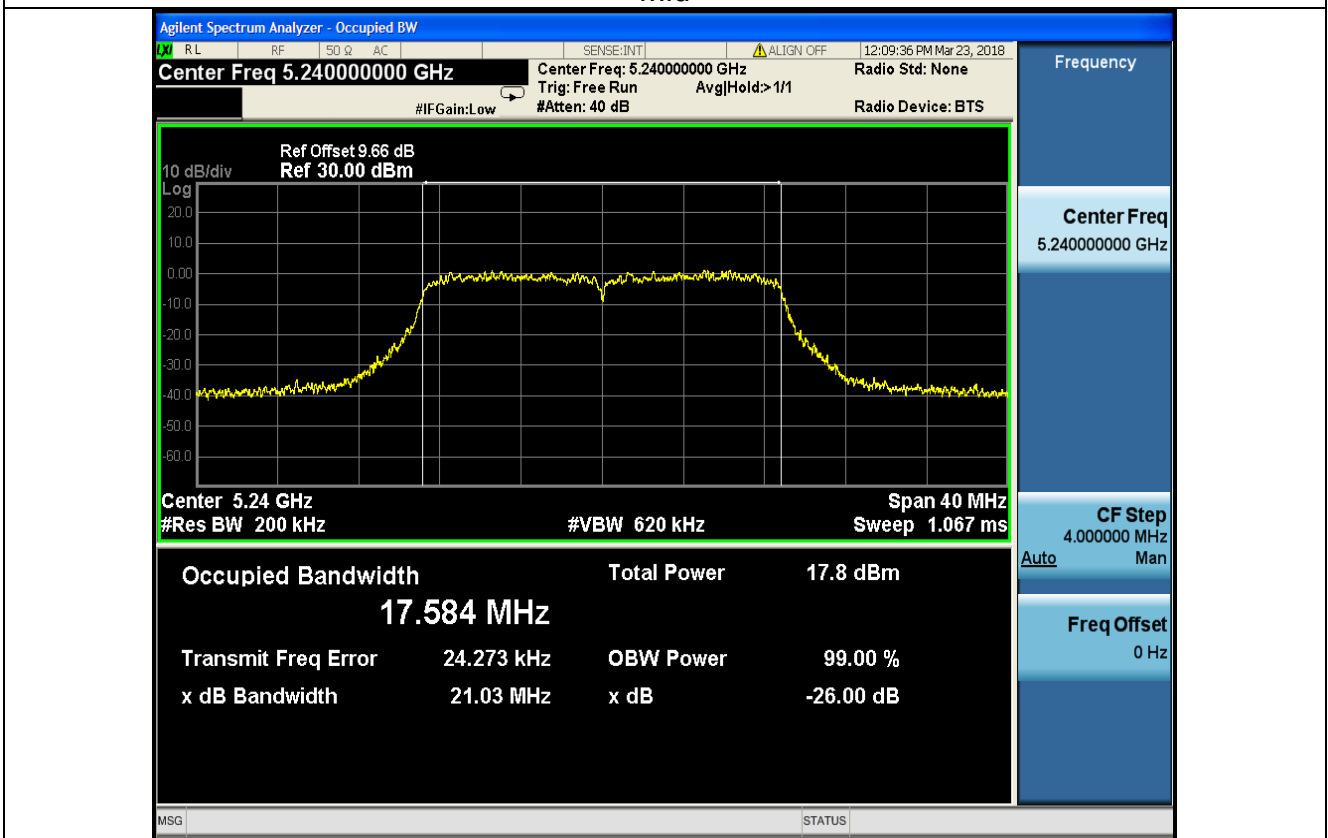


High



802.11n(HT40)

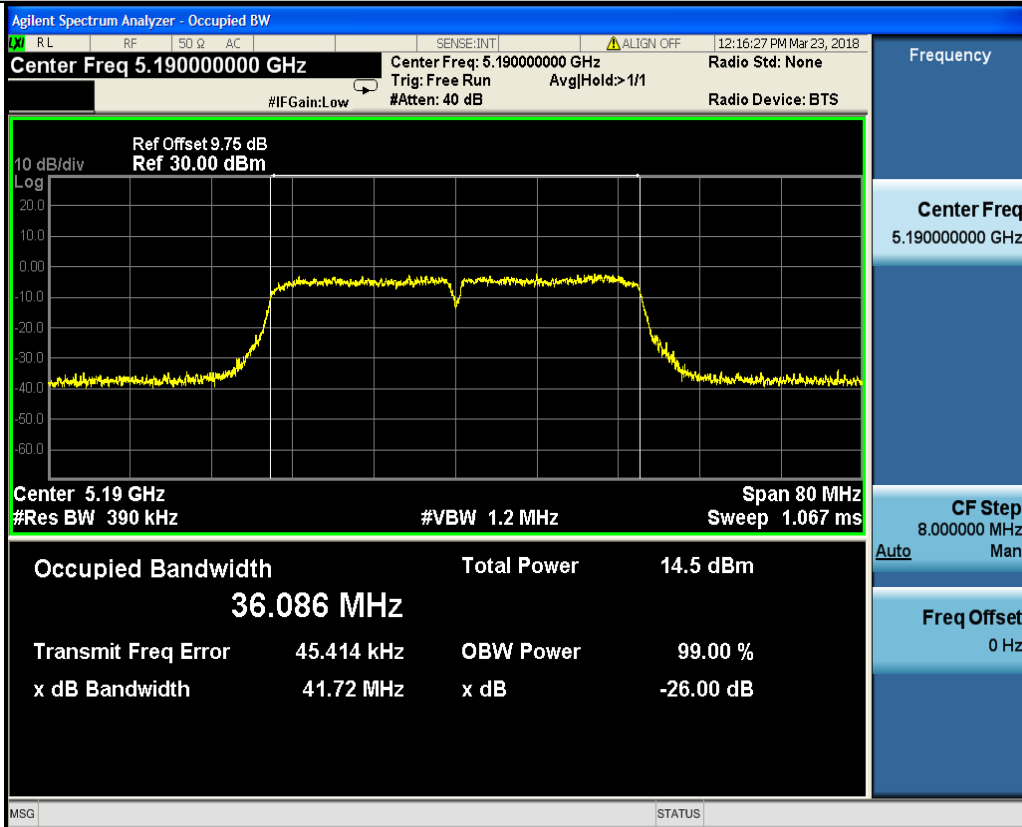


Low

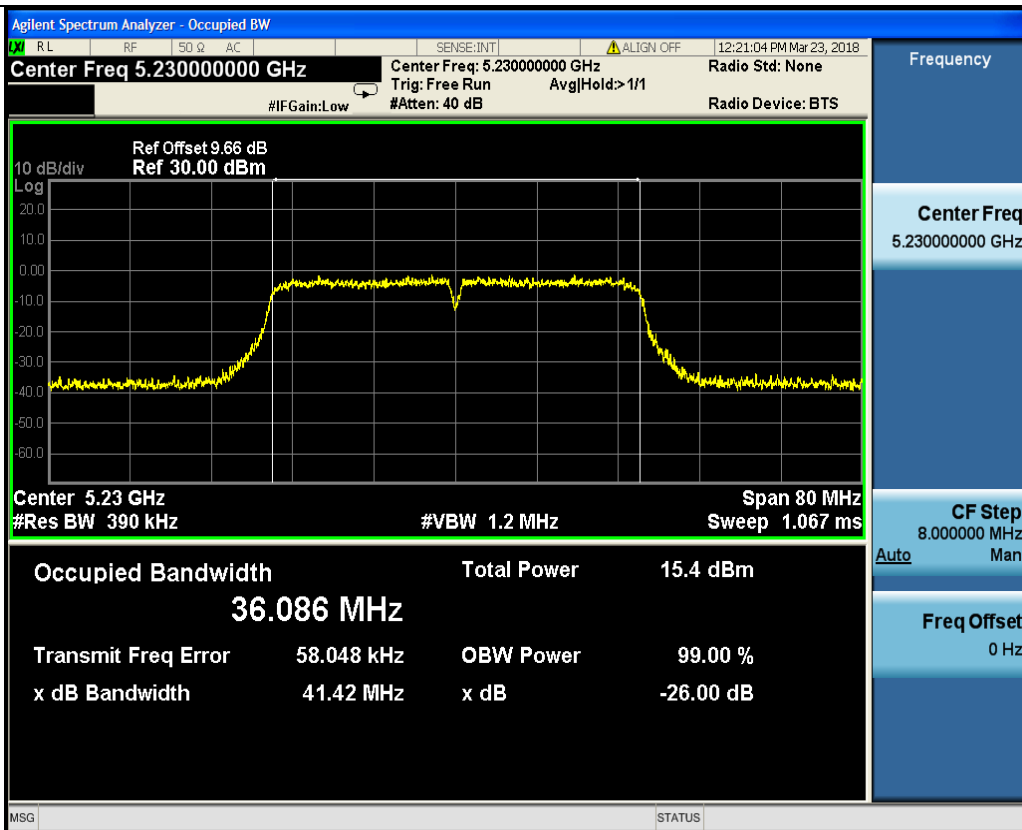


High




802.11ac(HT20)

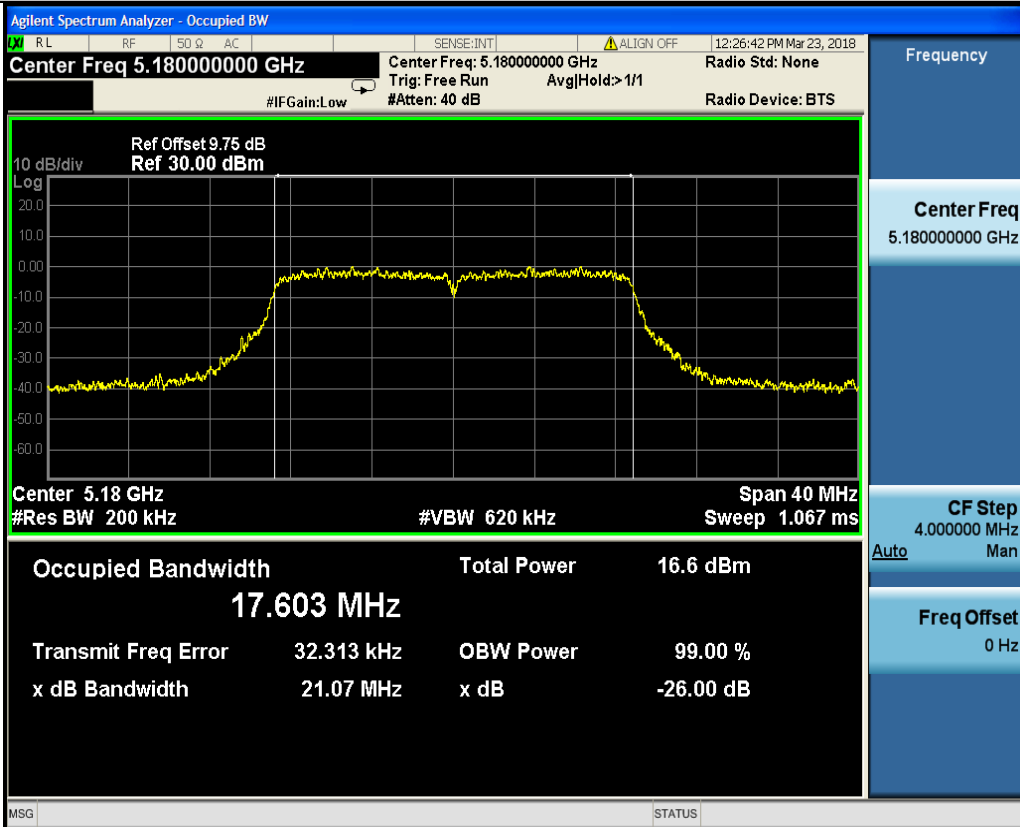


Low

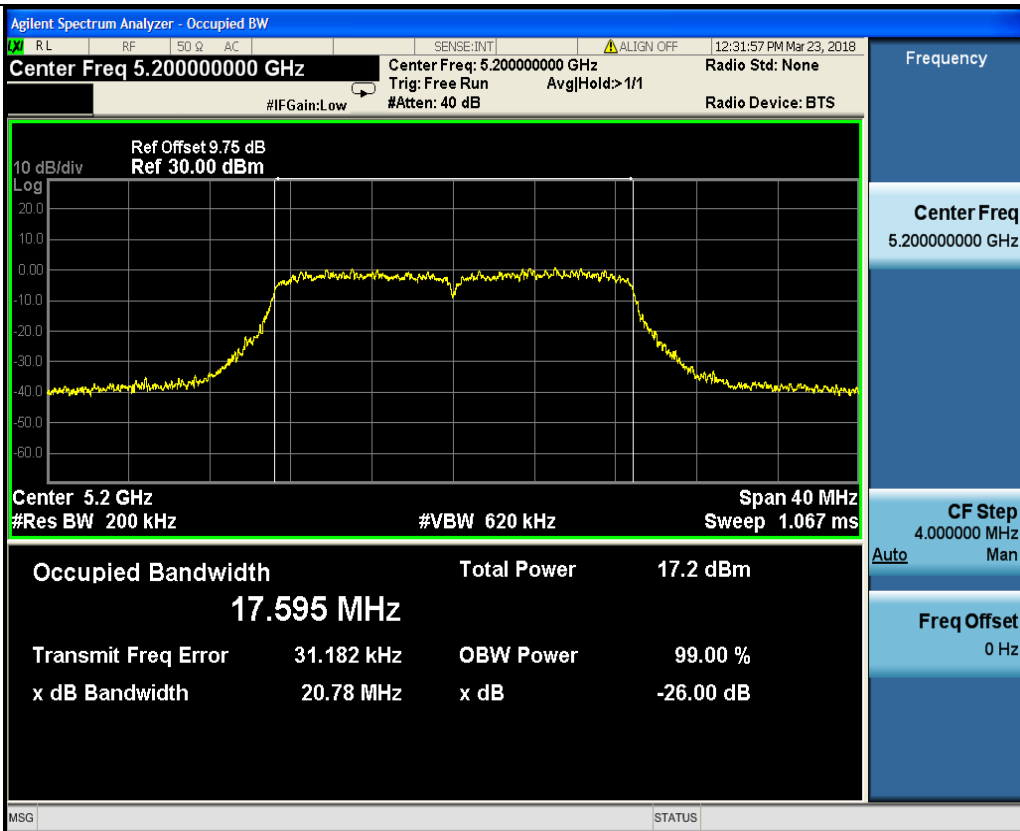


Mid

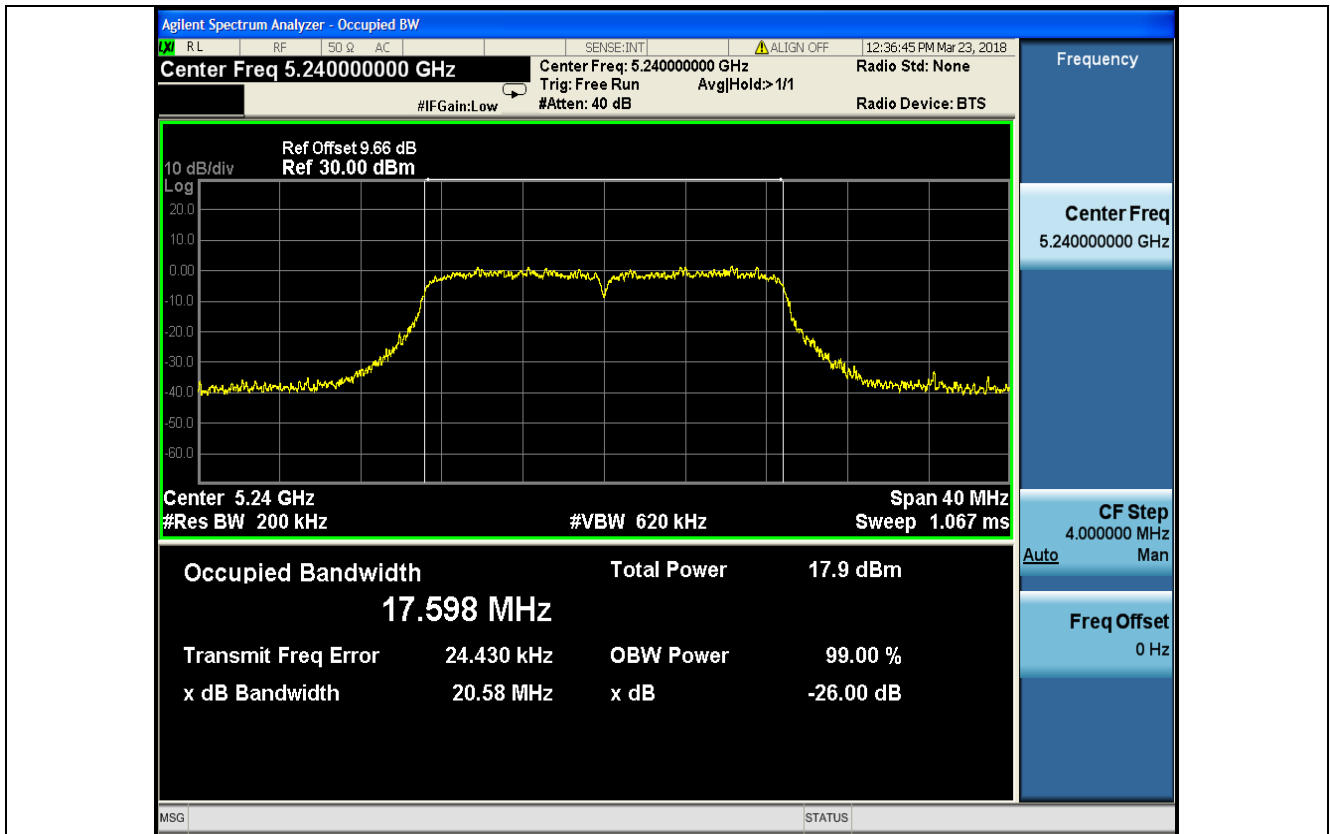


High

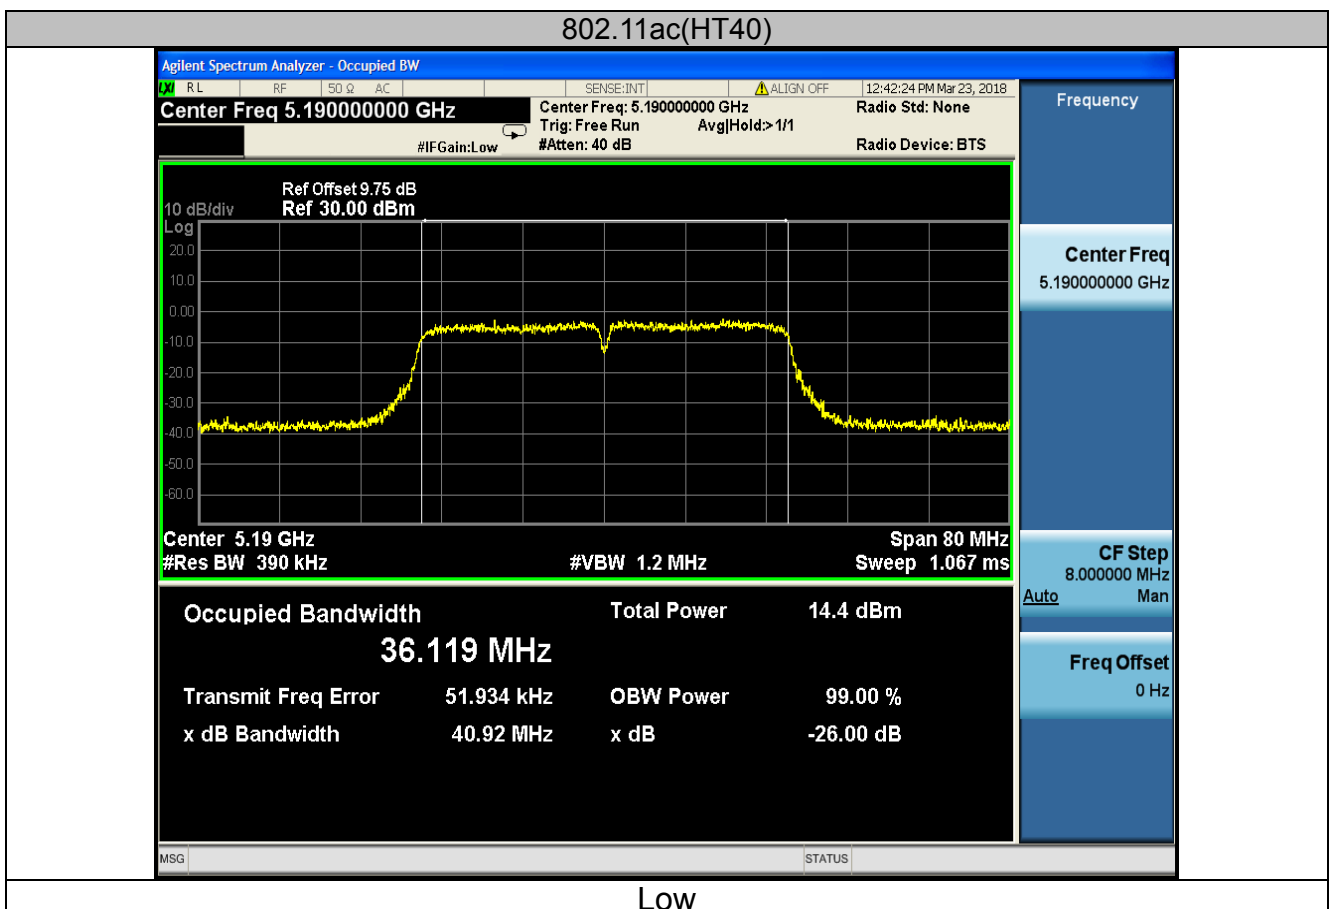

Low

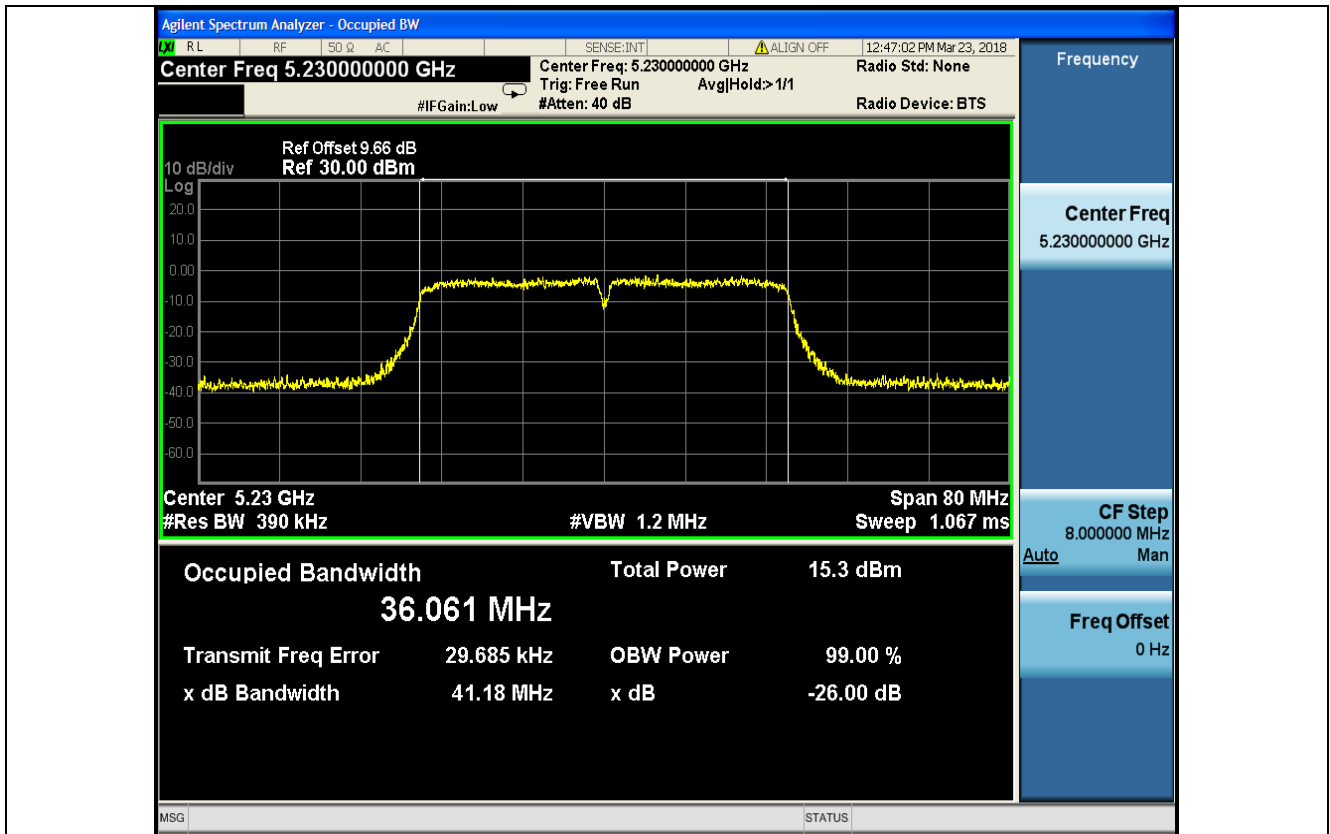

High

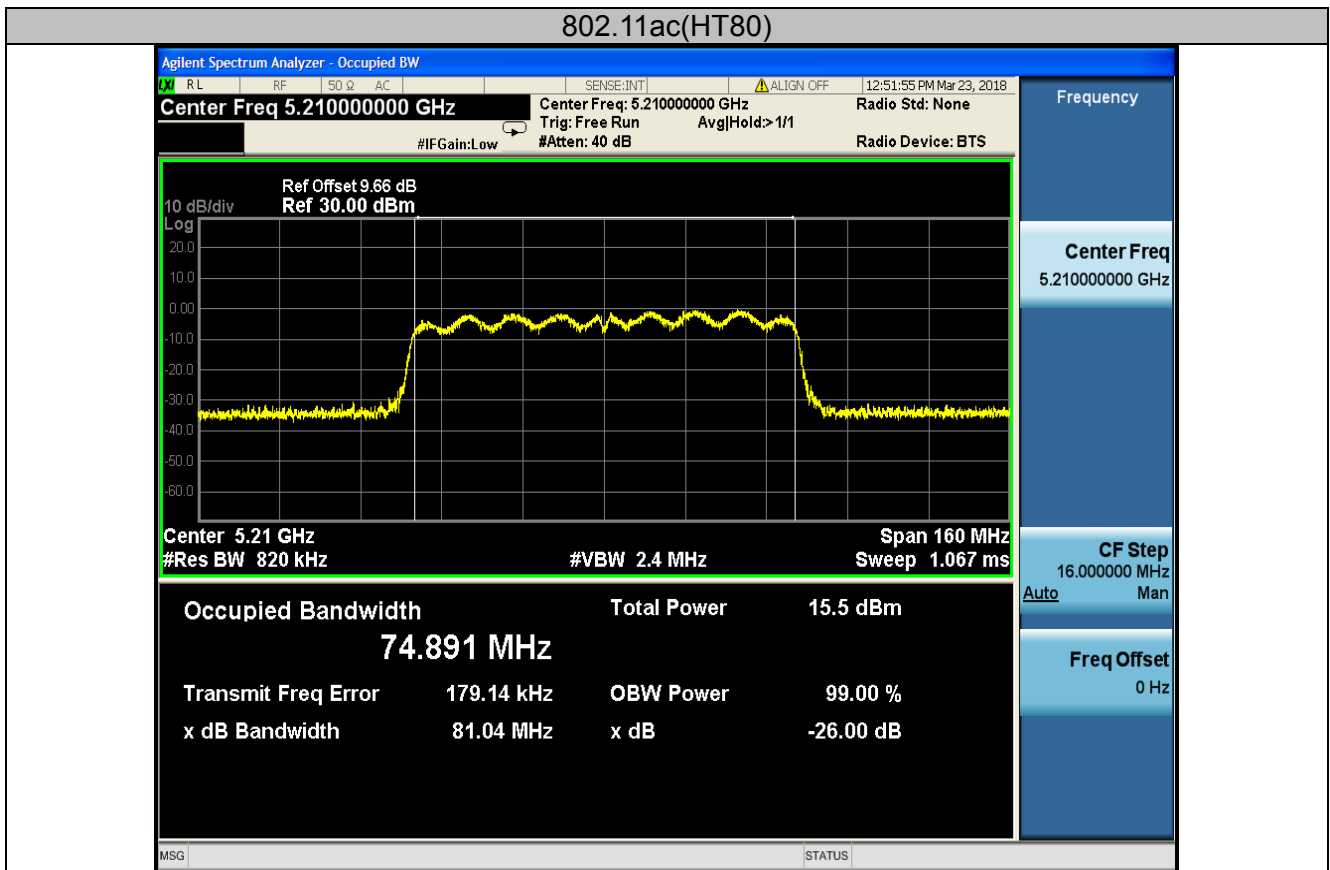

802.11ac(HT80)



4.5.3. Test data

Configuration Band I (5150 - 5250 MHz)						
Mode	Test channel	Level [dBm/MHz]	10log(1/x) Factor [dB]	Power Spectral Density	Limit (dBm/MHz)	Result
11a	CH36	5.47	0	5.47	11	PASS
11a	CH40	5.84	0	5.84	11	PASS
11a	CH48	8.83	0	8.83	11	PASS
11n(HT20)	CH36	5.66	0	5.66	11	PASS
11n(HT20)	CH40	9.19	0	9.19	11	PASS
11n(HT20)	CH48	6.77	0	6.77	11	PASS
11n(HT40)	CH38	-0.25	0	-0.25	11	PASS
11n(HT40)	CH46	0.20	0	0.20	11	PASS
11ac(HT20)	CH36	5.30	0	5.30	11	PASS
11ac(HT20)	CH40	5.93	0	5.93	11	PASS
11ac(HT20)	CH48	6.40	0	6.40	11	PASS
11ac(HT40)	CH38	-0.15	0	-0.15	11	PASS
11ac(HT40)	CH46	0.39	0	0.39	11	PASS
11ac(HT80)	CH42	-1.73	0	-1.73	11	PASS




Configuration Band IV (5725 - 5850 MHz)						
Mode	Test channel	Level [dBm/500kHz]	10log(1/x) Factor[dB]	Power Spectral Density	Limit (dBm/500kHz)	Result
11a	CH149	3.12	0	3.12	30	PASS
11a	CH157	4.00	0	4.00	30	PASS
11a	CH161	3.62	0	3.62	30	PASS
11n(HT20)	CH149	1.38	0	1.38	30	PASS
11n(HT20)	CH157	1.31	0	1.31	30	PASS
11n(HT20)	CH161	0.84	0	0.84	30	PASS
11n(HT40)	CH151	-4.78	0	-4.78	30	PASS
11n(HT40)	CH159	-4.87	0	-4.87	30	PASS
11ac(HT20)	CH149	0.35	0	0.35	30	PASS
11ac(HT20)	CH157	0.47	0	0.47	30	PASS
11ac(HT20)	CH161	0.49	0	0.49	30	PASS
11ac(HT40)	CH151	-5.11	0	-5.11	30	PASS
11ac(HT40)	CH159	-5.20	0	-5.20	30	PASS
11ac(HT80)	CH155	-7.92	0	-7.92	30	PASS

Test plots as follows:




Band I (5150 – 5250 MHz)


802.11a

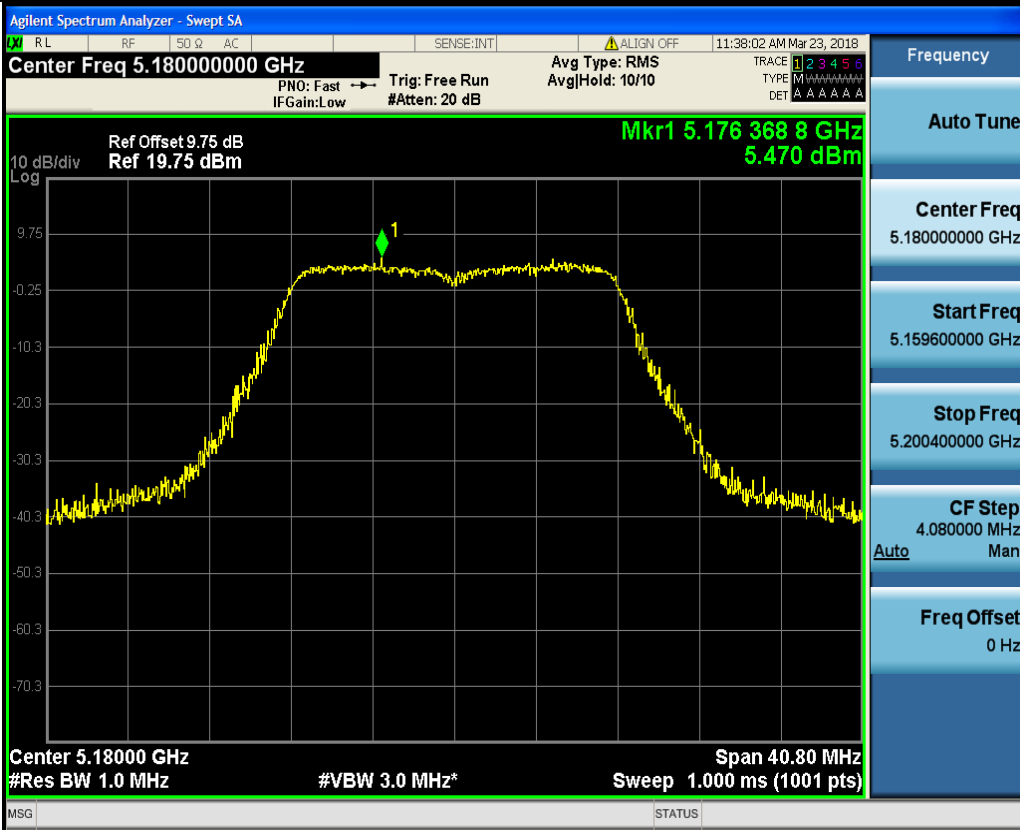


Low

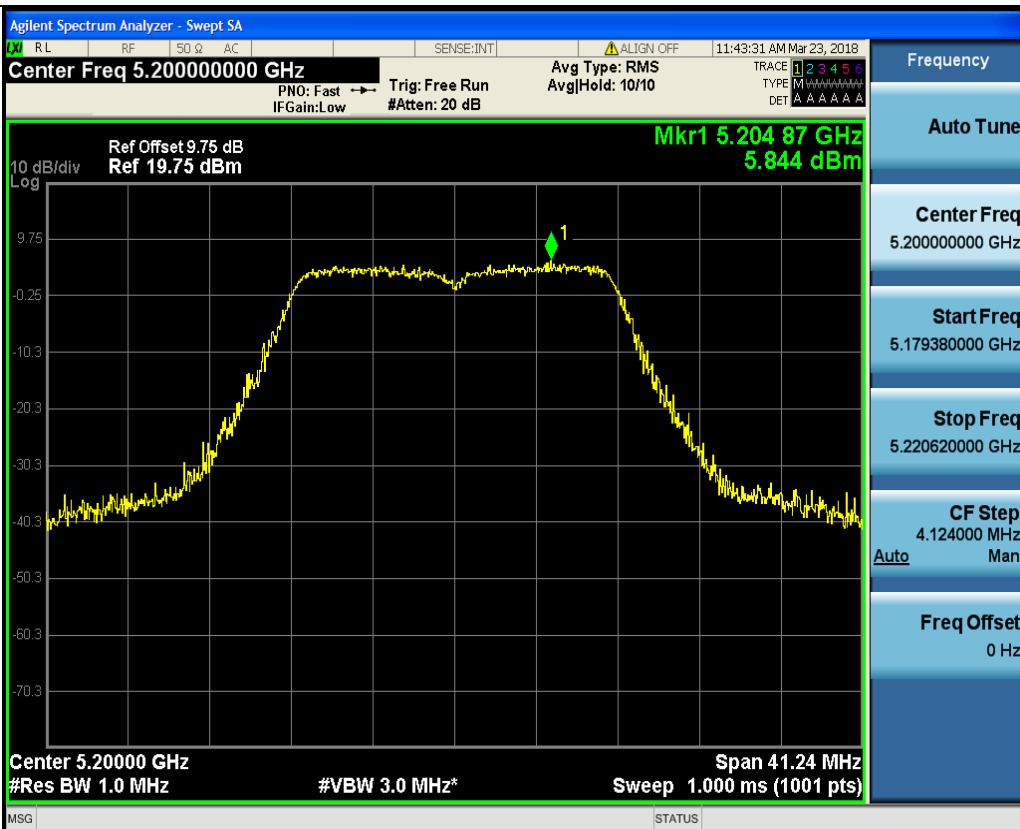


Mid

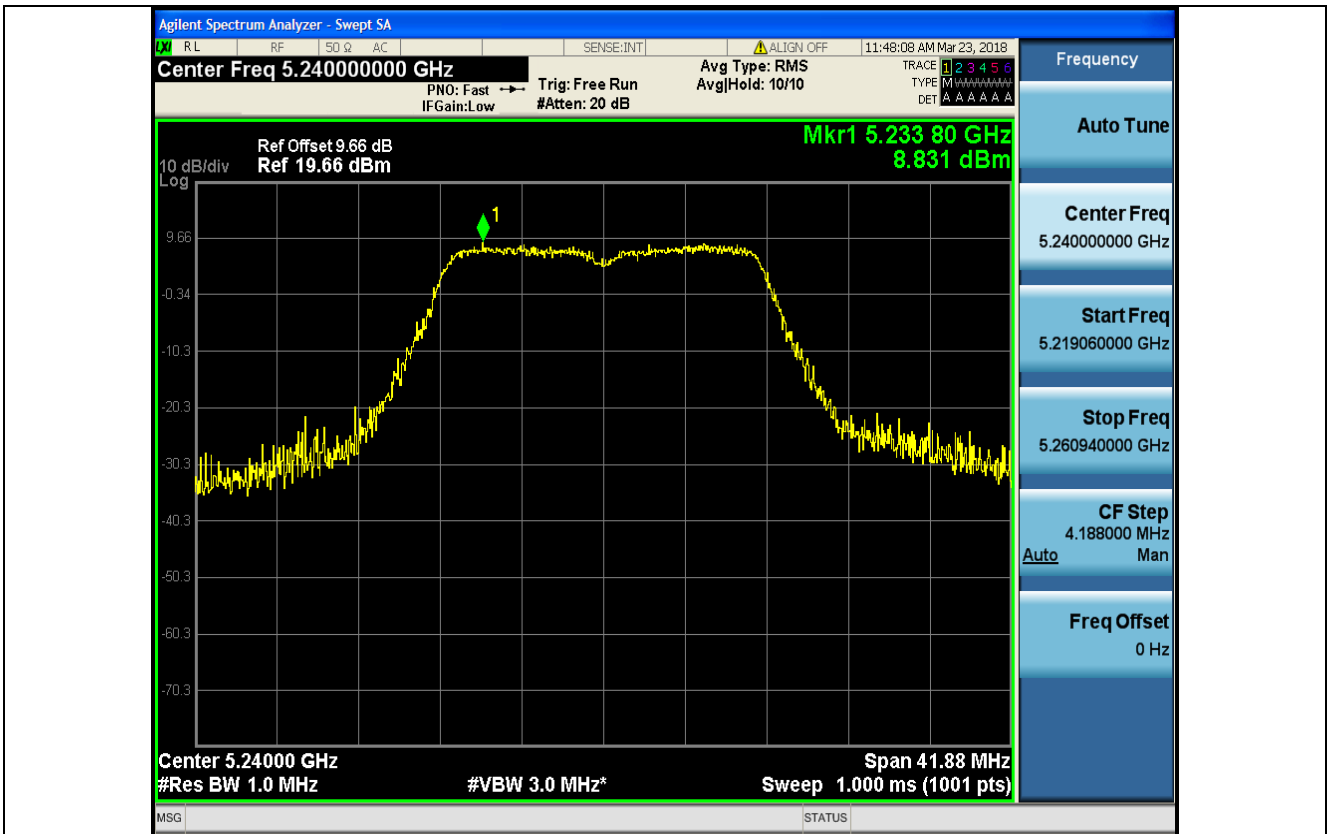


High

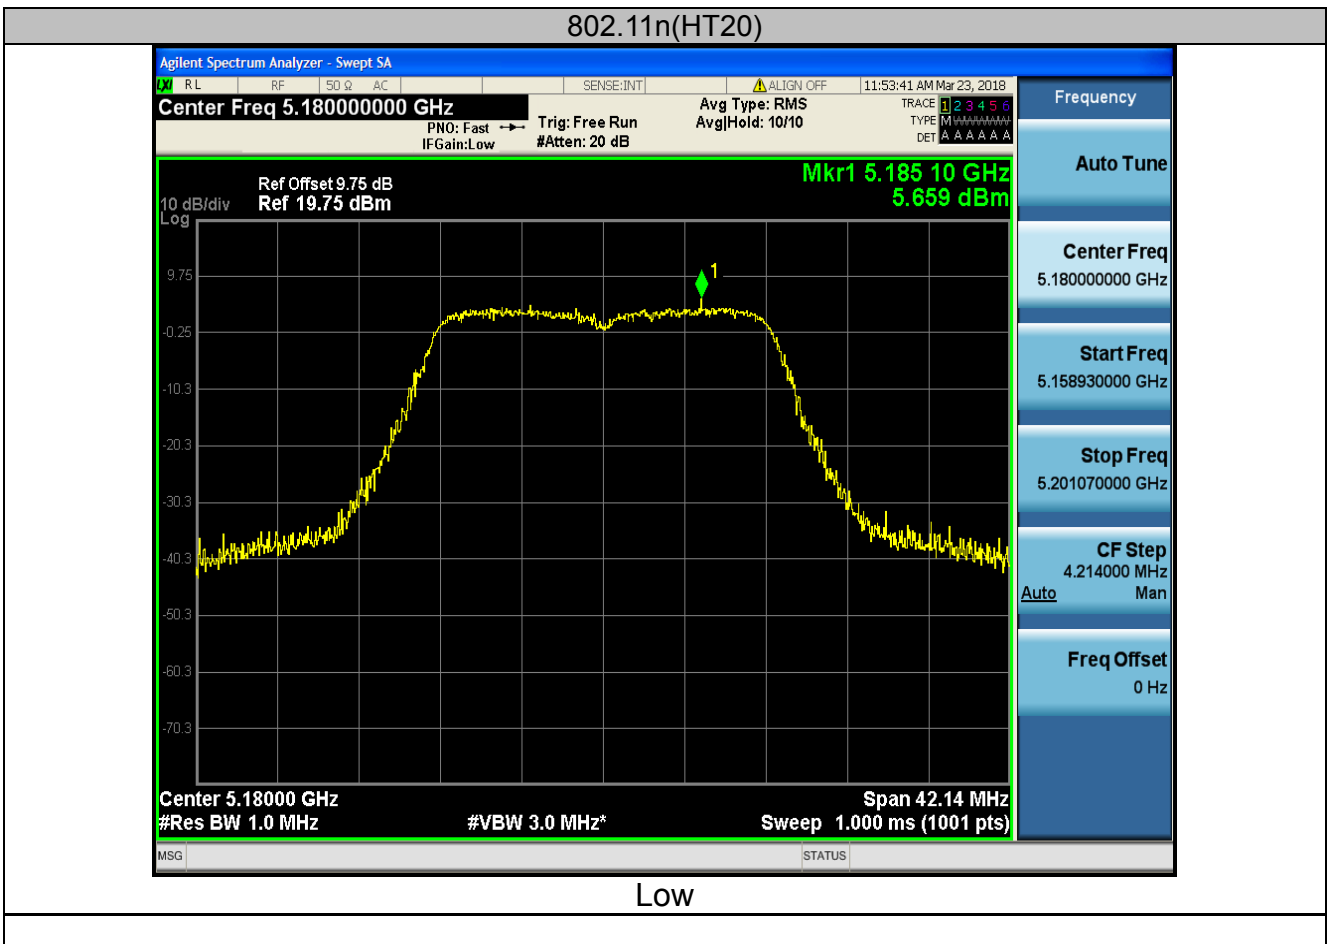

Low

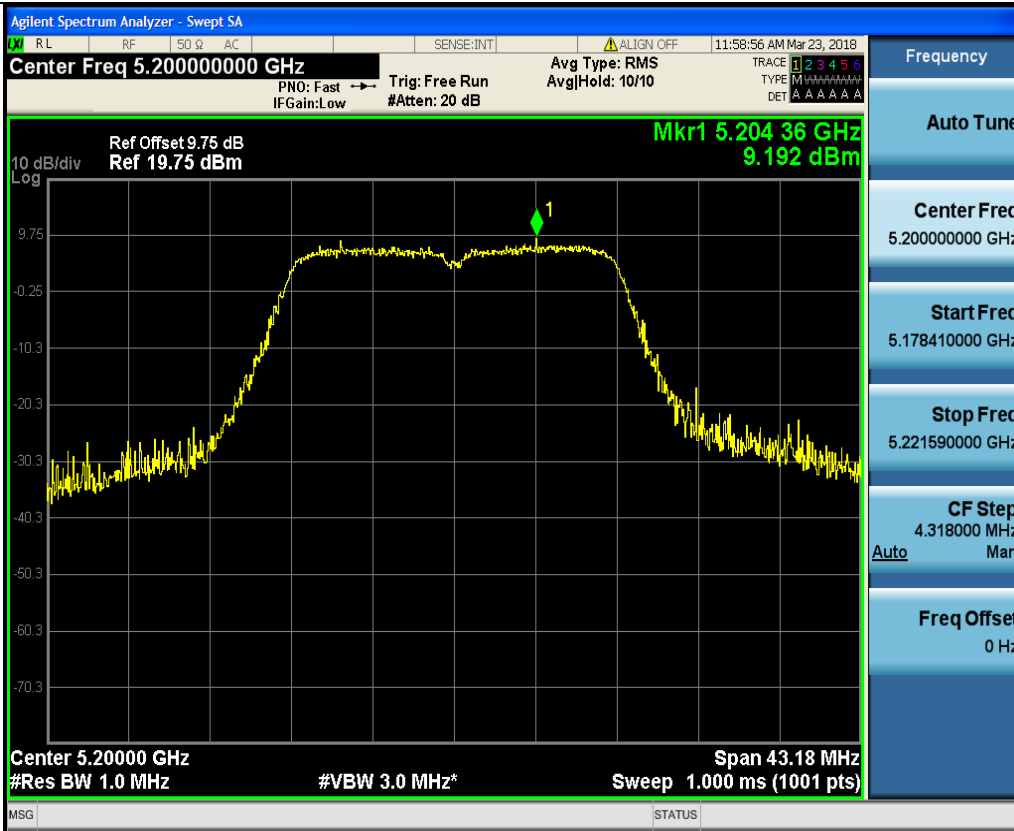


Mid

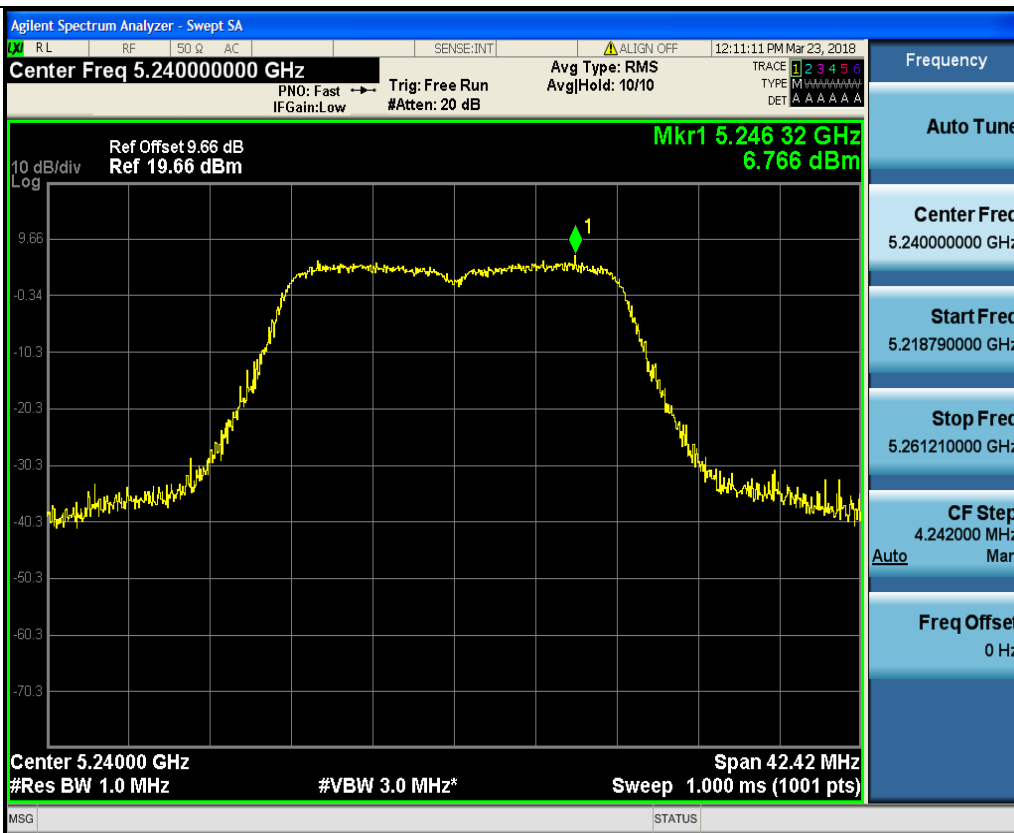


High



802.11n(HT40)

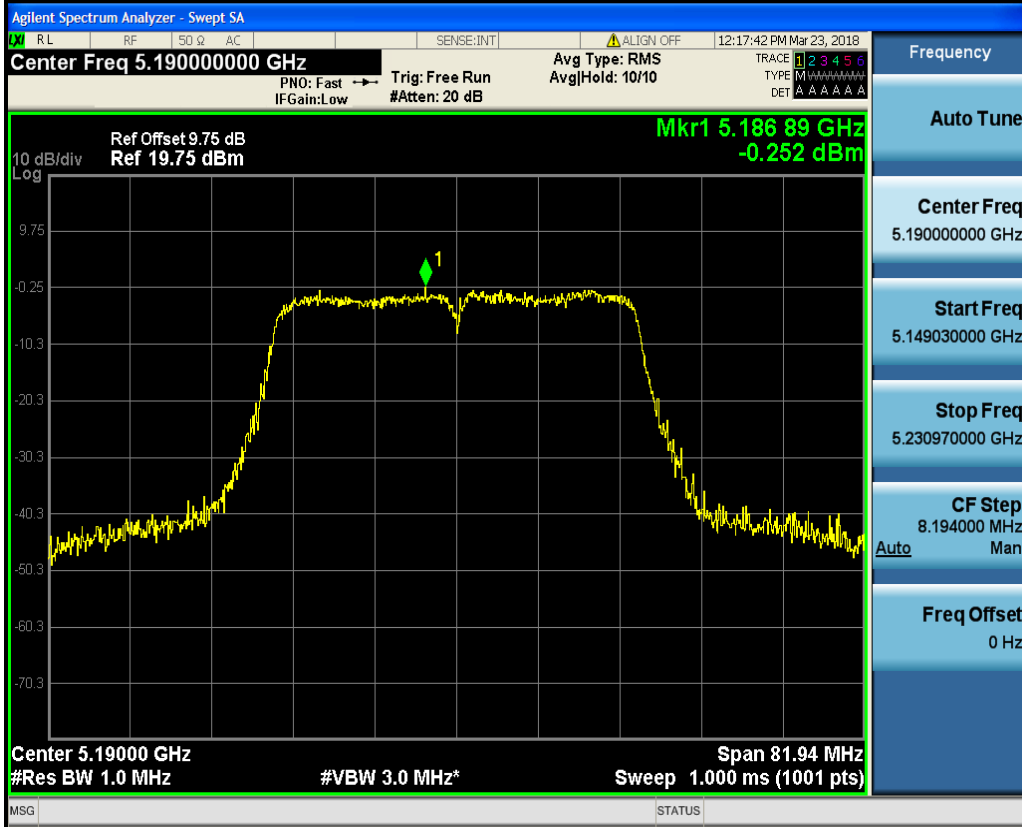


Low

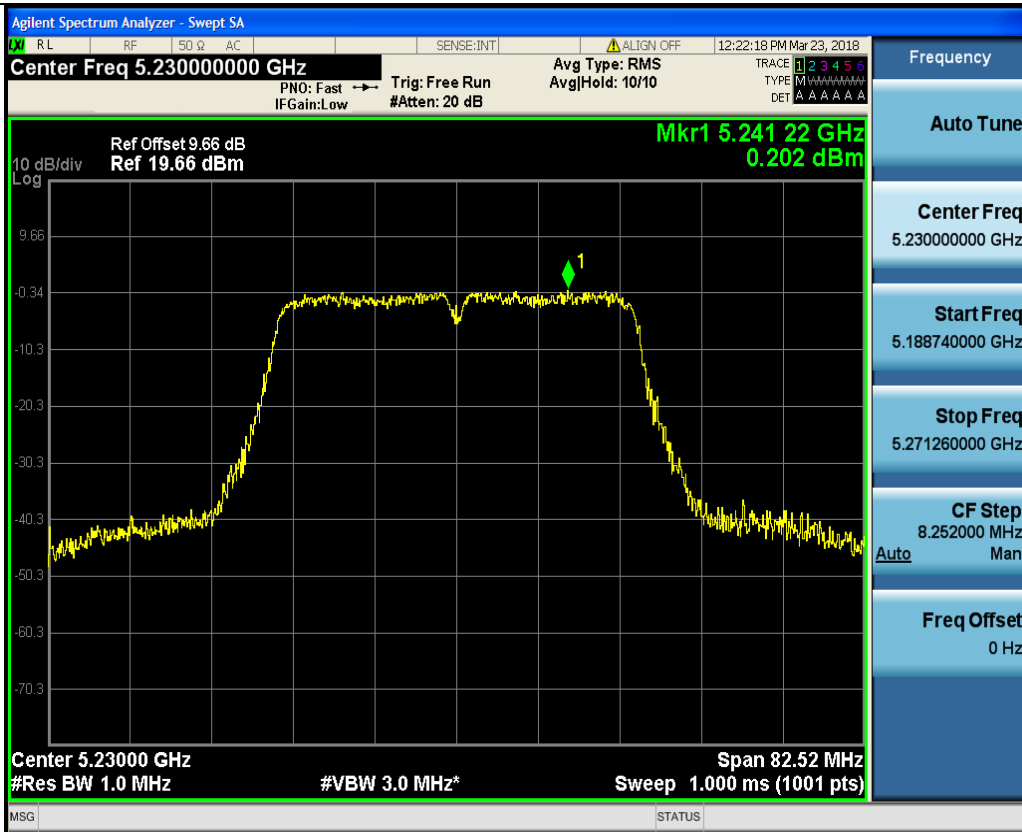


High



802.11ac(HT20)

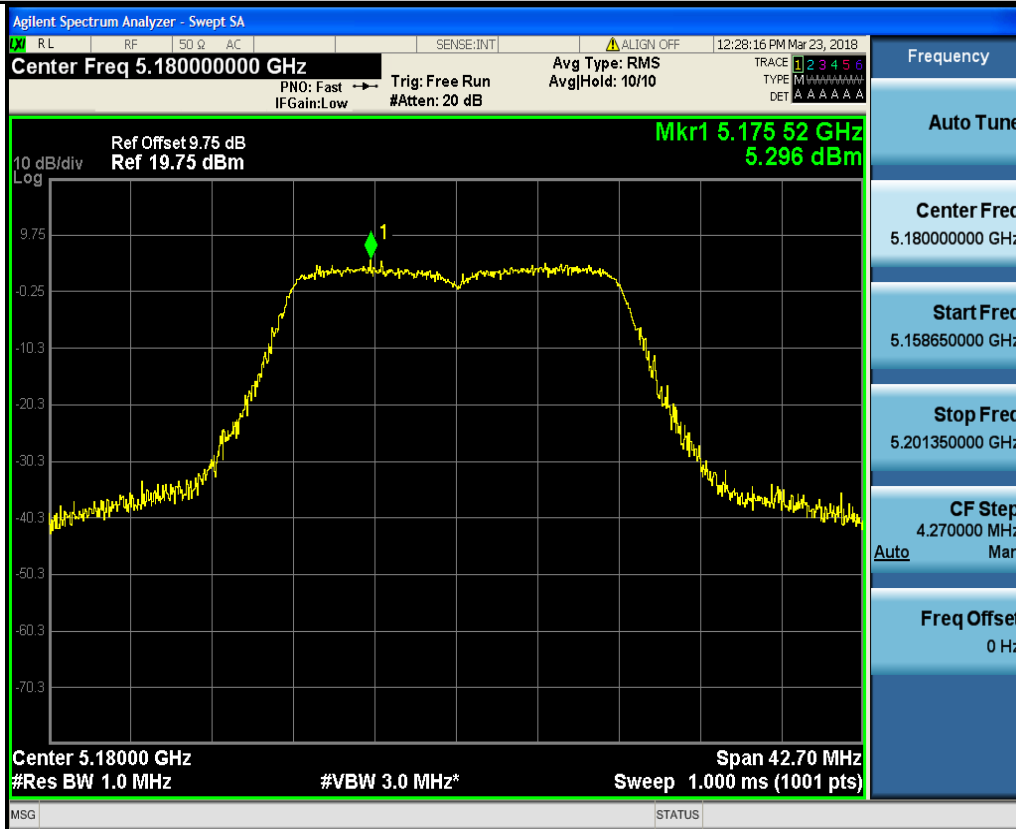

Low

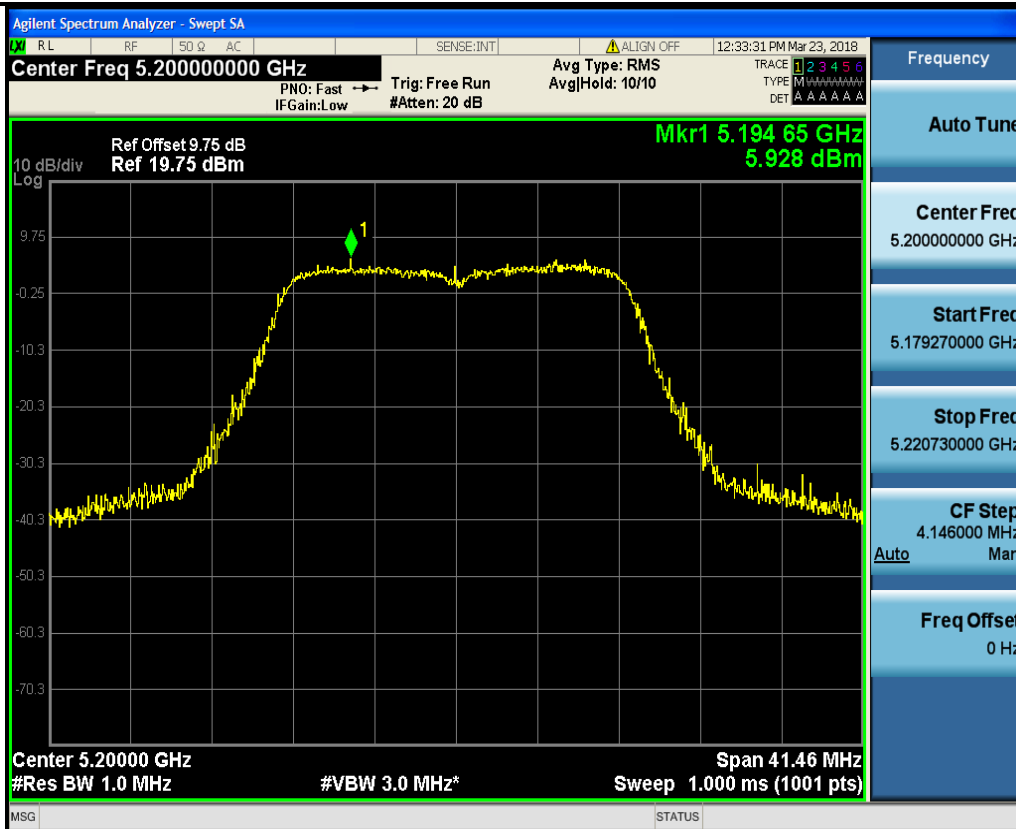


Mid




High

802.11ac(HT40)

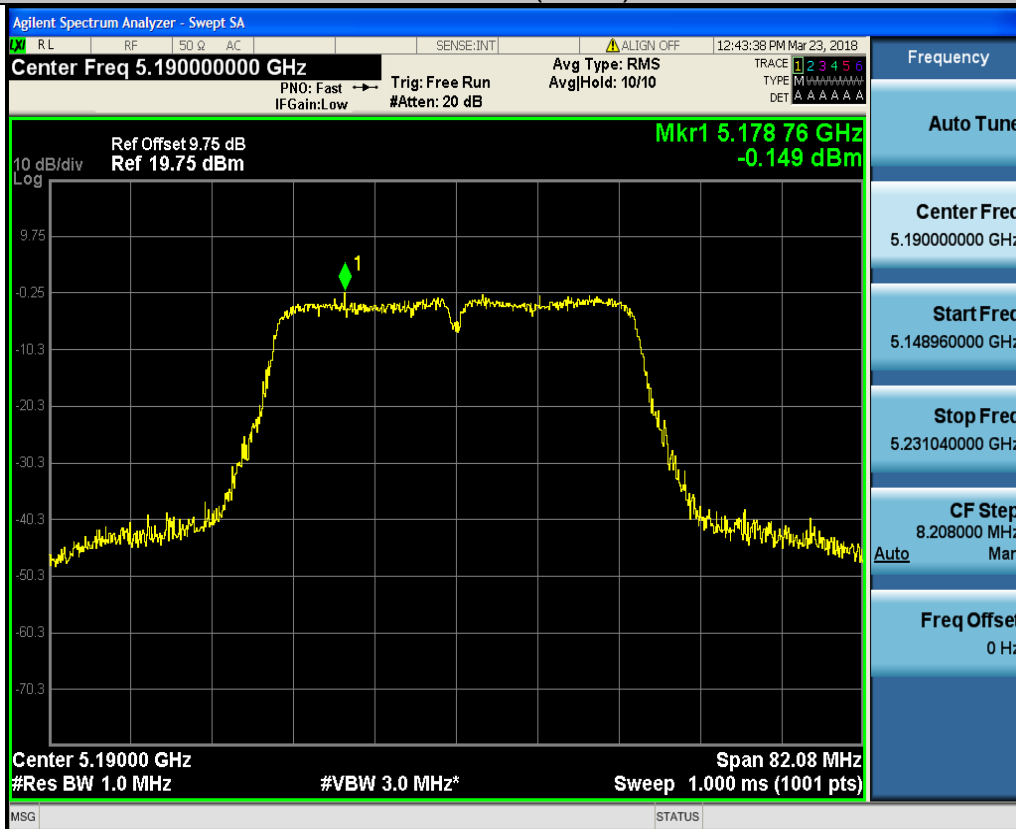


Low

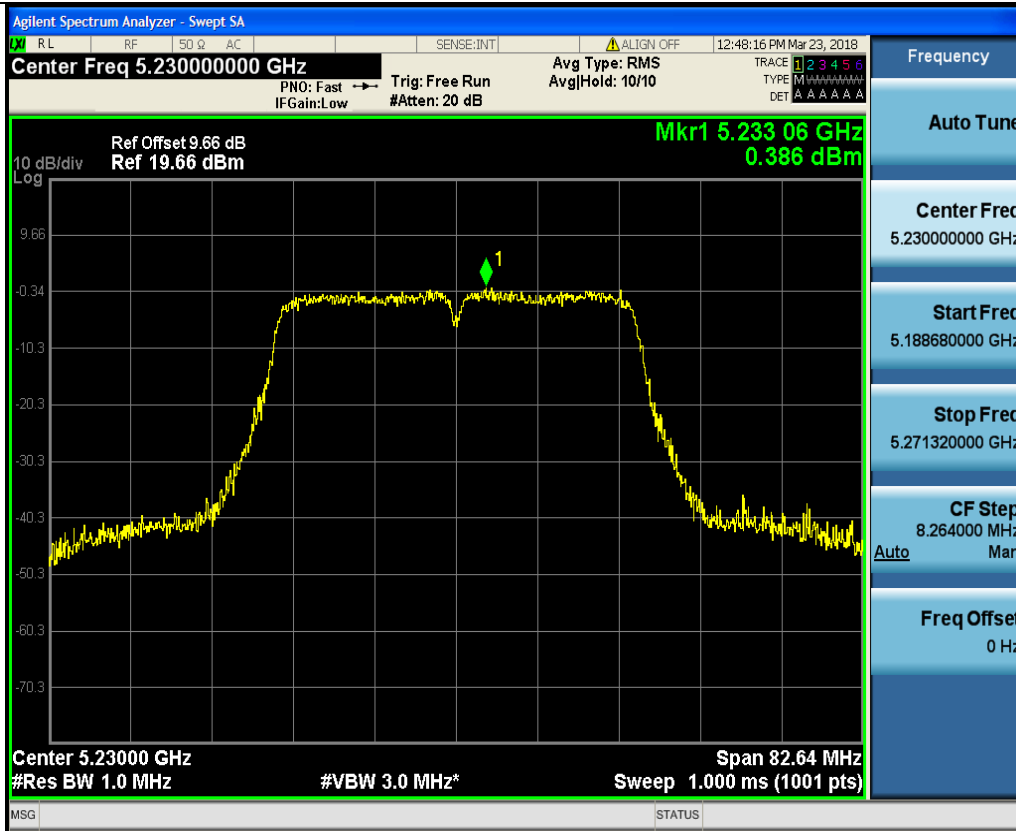

High

802.11ac(HT80)

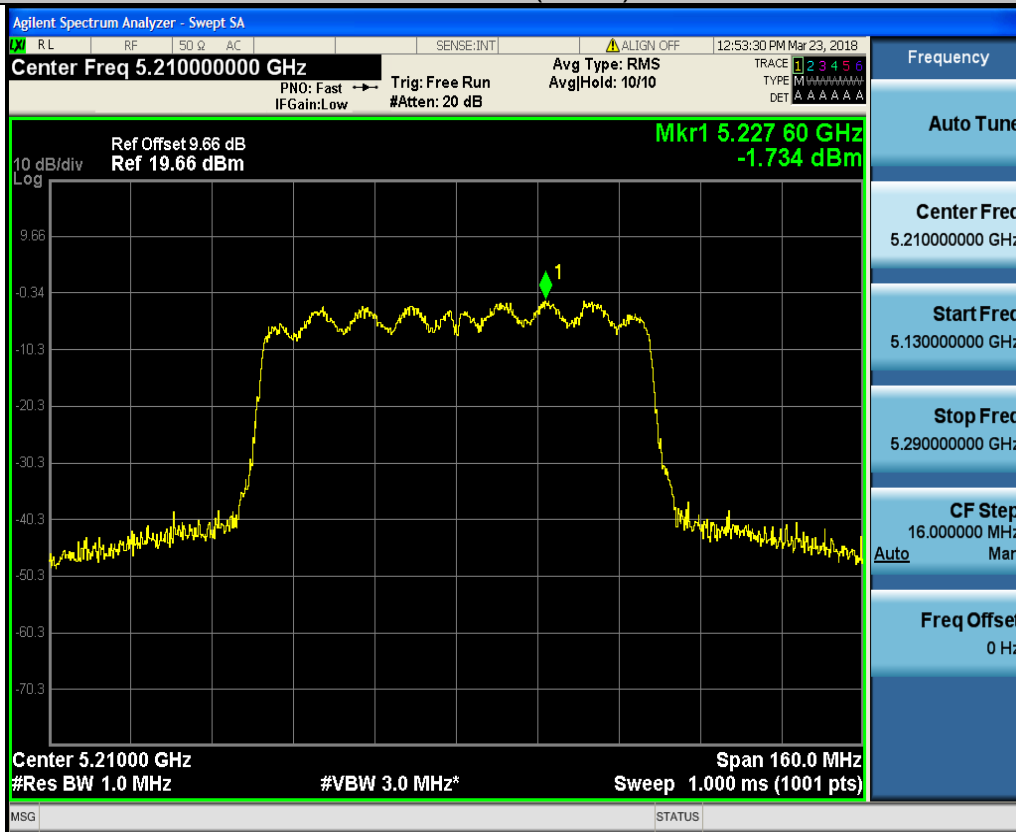


Low



Band IV (5725 – 5850 MHz)


802.11a

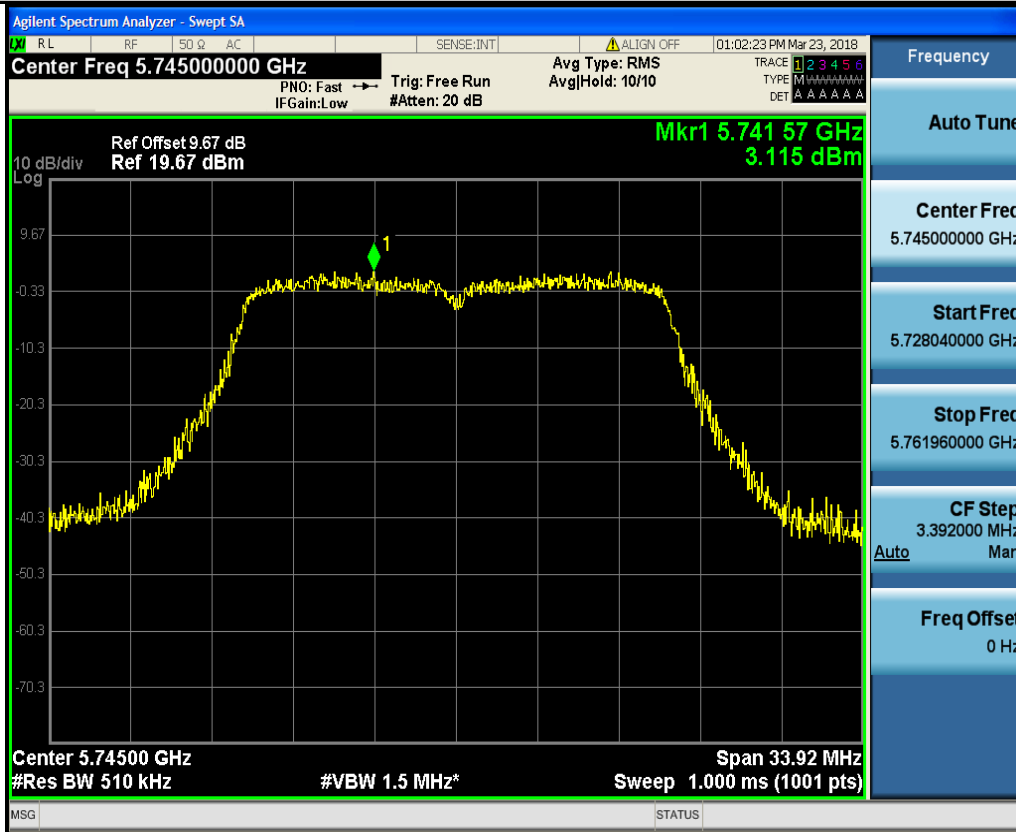

Low



Mid

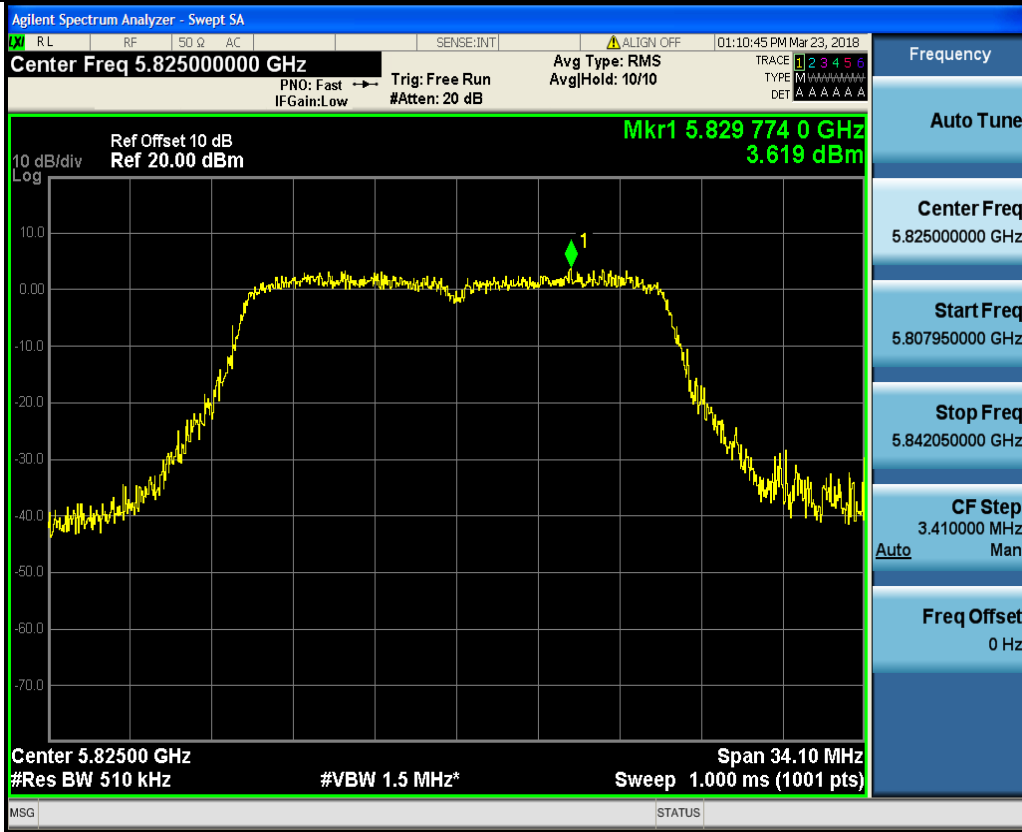

High

802.11n(HT20)



Low



Mid




High



802.11n(HT40)



Low

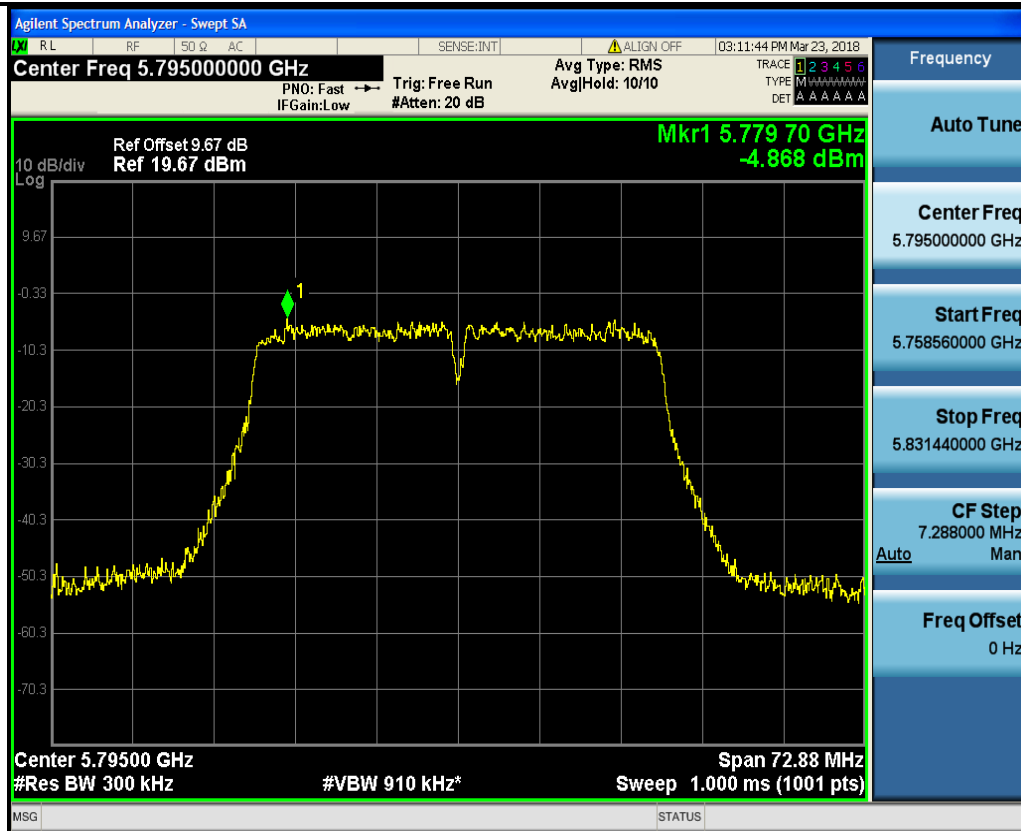

High

802.11ac(HT20)



Low



Mid




High

802.11ac(HT40)



Low

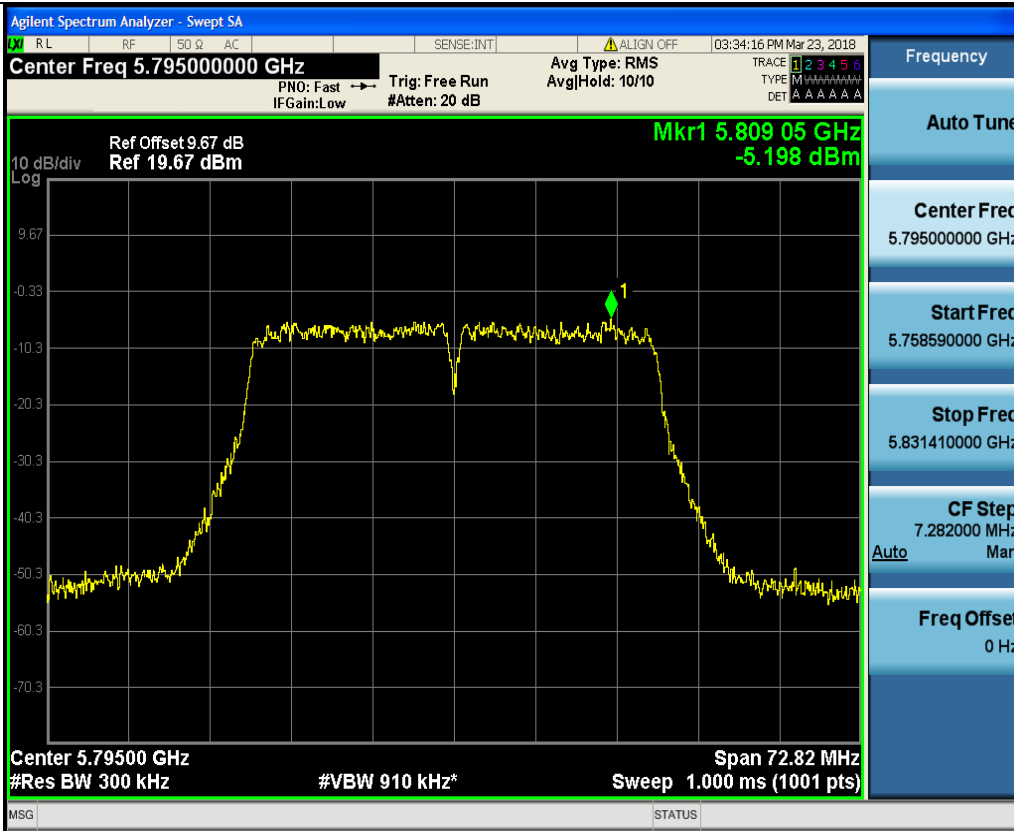


High
802.11ac(HT40)



Low

4.6. Band edge

4.6.1. Test Specification

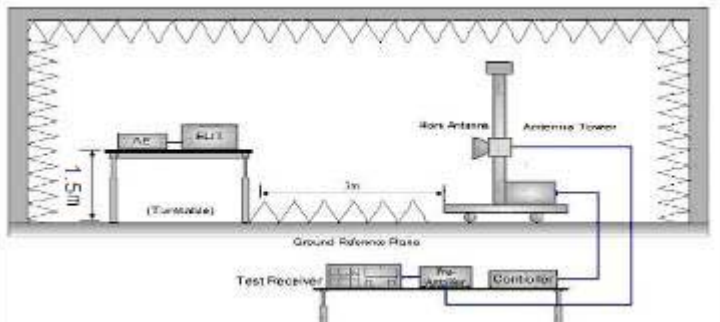Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10 2013
Limit:	<p>For band I&II&III: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$</p> <p>For transmitters operating in the 5.725-5.85 GHz band:</p> <p>All emissions shall be limited to a level of $-27 \text{ dBm}/\text{MHz}$ at 75 MHz or more above or below the band edge increasing linearly to $10 \text{ dBm}/\text{MHz}$ at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of $15.6 \text{ dBm}/\text{MHz}$ at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of $27 \text{ dBm}/\text{MHz}$ at the band edge.</p> <p>For band IV(5715-5725MHz&5850-5860MHz): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 78.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$;</p> <p>For band IV(other un-restricted band): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$</p>
Test Setup:	 <p>The diagram illustrates the test setup. A rotating table (labeled 'Turntable') is positioned 1.5m above a 'Ground Reference Plane'. On the table, an 'EUT' (Equipment Under Test) is placed. A 'Horn Antenna' is mounted on an 'Antenna Tower' at a distance of 3m from the EUT. The antenna tower is connected to a 'Test Receiver' which includes a 'Pre-Amplifier' and a 'Controller'.</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the



	<p>maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.</p>
Test Result:	PASS



4.6.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESRP3	HKE-005	Dec. 27, 2018
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018
Preamplifier	EMCI	EMC051845S E	HKE-015	Dec. 27, 2018
Preamplifier	Agilent	83051A	HKE-016	Dec. 27, 2018
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 26, 2019
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 26, 2019
Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 26, 2019
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 27, 2018
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
Hf antenna	Schwarzbeck	LB-180400-KF	HKE-031	Dec. 27, 2019
RF cable	Tonscend	1-18G	HKE-099	Dec. 27, 2018
RF cable	Times	1-40G	HKE-034	Dec. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.6.3. Test Data

Radiated Band Edge Test:

Operation Mode: 802.11a Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	51.24	-2.49	48.75	74	-25.25	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	52.37	-2.49	49.88	74	-24.12	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	53.52	-2.28	51.24	74	-22.76	peak
5250	/	-2.28	/	54	/	AVG
5350	51.46	-2.11	49.35	74	-24.65	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	52.71	-2.28	50.43	74	-23.57	peak
5250	/	-2.28	/	54	/	AVG
5350	51.63	-2.11	49.52	74	-24.48	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n20 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	53.48	-2.49	50.99	74	-23.01	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	51.33	-2.49	48.84	74	-25.16	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	51.65	-2.28	49.37	74	-24.63	peak
5250	/	-2.28	/	54	/	AVG
5350	50.19	-2.11	48.08	74	-25.92	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	53.23	-2.28	50.95	74	-23.05	peak
5250	/	-2.28	/	54	/	AVG
5350	50.57	-2.11	48.46	74	-25.54	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 n40 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	52.66	-2.49	50.17	74	-23.83	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	51.74	-2.49	49.25	74	-24.75	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	53.14	-2.28	50.86	74	-23.14	peak
5250	/	-2.28	/	54	/	AVG
5350	50.28	-2.11	48.17	74	-25.83	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	52.62	-2.28	50.34	74	-23.66	peak
5250	/	-2.28	/	54	/	AVG
5350	49.78	-2.11	47.67	74	-26.33	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 ac20 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	54.29	-2.49	51.8	74	-22.2	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	52.63	-2.49	50.14	74	-23.86	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	54.66	-2.28	52.38	74	-21.62	peak
5250	/	-2.28	/	54	/	AVG
5350	52.48	-2.11	50.37	74	-23.63	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	53.25	-2.28	50.97	74	-23.03	peak
5250	/	-2.28	/	54	/	AVG
5350	50.63	-2.11	48.52	74	-25.48	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 ac40 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	53.72	-2.49	51.23	74	-22.77	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	51.51	-2.49	49.02	74	-24.98	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	54.39	-2.28	52.11	74	-21.89	peak
5250	/	-2.28	/	54	/	AVG
5350	52.16	-2.11	50.05	74	-23.95	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	53.37	-2.28	51.09	74	-22.91	peak
5250	/	-2.28	/	54	/	AVG
5350	50.15	-2.11	48.04	74	-25.96	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 ac80 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	53.58	-2.49	51.09	74	-22.91	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	51.64	-2.49	49.15	74	-24.85	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	54.36	-2.28	52.08	74	-21.92	peak
5250	/	-2.28	/	54	/	AVG
5350	50.42	-2.11	48.31	74	-25.69	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	53.68	-2.28	51.4	74	-22.6	peak
5250	/	-2.28	/	54	/	AVG
5350	50.24	-2.11	48.13	74	-25.87	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	57.4	-2.06	55.34	68.2	-12.86	peak
5650	/	-2.06	/	48.2	/	AVG
5700	90.81	-1.96	88.85	105.2	-16.35	peak
5700	/	-1.96	/	85.2	/	AVG
5720	93.2	-2.87	90.33	110.8	-20.47	peak
5720	/	-2.87	/	90.8	/	AVG
5725	111.28	-2.14	109.14	122.2	-13.06	peak
5725	/	-2.14	/	102.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	58.45	-2.06	56.39	68.2	-11.81	peak
5650	/	-2.06	/	48.2	/	AVG
5700	91.09	-1.96	89.13	105.2	-16.07	peak
5700	/	-1.96	/	85.2	/	AVG
5720	95.37	-2.87	92.5	110.8	-18.3	peak
5720	/	-2.87	/	90.8	/	AVG
5725	111.51	-2.14	109.37	122.2	-12.83	peak
5725	/	-2.14	/	102.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	113.84	-1.97	111.87	122.2	-10.33	peak
5850	/	-1.97	/	102.2	/	AVG
5855	95.57	-2.13	93.44	110.8	-17.36	peak
5855	/	-2.13	/	90.8	/	AVG
5875	87.59	-2.65	84.94	105.2	-20.26	peak
5875	/	-2.65	/	85.2	/	AVG
5925	54.59	-2.28	52.31	68.2	-15.89	peak
5925	/	-2.28	/	48.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	112.68	-1.97	110.71	122.2	-11.49	peak
5850	/	-1.97	/	102.2	/	AVG
5855	93.25	-2.13	91.12	110.8	-19.68	peak
5855	/	-2.13	/	90.8	/	AVG
5875	86.63	-2.65	83.98	105.2	-21.22	peak
5875	/	-2.65	/	85.2	/	AVG
5925	54.78	-2.28	52.5	68.2	-15.7	peak
5925	/	-2.28	/	48.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	57.32	-2.06	55.26	68.2	-12.94	peak
5650	/	-2.06	/	48.2	/	AVG
5700	92.4	-1.96	90.44	105.2	-14.76	peak
5700	/	-1.96	/	85.2	/	AVG
5720	94.83	-2.87	91.96	110.8	-18.84	peak
5720	/	-2.87	/	90.8	/	AVG
5725	113.63	-2.14	111.49	122.2	-10.71	peak
5725	/	-2.14	/	102.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	60.62	-2.06	58.56	68.2	-9.64	peak
5650	/	-2.06	/	48.2	/	AVG
5700	98.9	-1.96	96.94	105.2	-8.26	peak
5700	/	-1.96	/	85.2	/	AVG
5720	94.54	-2.87	91.67	110.8	-19.13	peak
5720	/	-2.87	/	90.8	/	AVG
5725	112.79	-2.14	110.65	122.2	-11.55	peak
5725	/	-2.14	/	102.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
5850	111.37	-1.97	109.4	122.2	-12.8	peak
5850	/	-1.97	/	102.2	/	AVG
5855	94.24	-2.13	92.11	110.8	-18.69	peak
5855	/	-2.13	/	90.8	/	AVG
5875	87.11	-2.65	84.46	105.2	-20.74	peak
5875	/	-2.65	/	85.2	/	AVG
5925	52.23	-2.28	49.95	68.2	-18.25	peak
5925	/	-2.28	/	48.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
5850	111.03	-1.97	109.06	122.2	-13.14	peak
5850	/	-1.97	/	102.2	/	AVG
5855	93.51	-2.13	91.38	110.8	-19.42	peak
5855	/	-2.13	/	90.8	/	AVG
5875	87.64	-2.65	84.99	105.2	-20.21	peak
5875	/	-2.65	/	85.2	/	AVG
5925	56.8	-2.28	54.52	68.2	-13.68	peak
5925	/	-2.28	/	48.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	56.85	-2.06	54.79	68.2	-13.41	peak
5650	/	-2.06	/	48.2	/	AVG
5700	92.99	-1.96	91.03	105.2	-14.17	peak
5700	/	-1.96	/	85.2	/	AVG
5720	94.77	-2.87	91.9	110.8	-18.9	peak
5720	/	-2.87	/	90.8	/	AVG
5725	112.57	-2.14	110.43	122.2	-11.77	peak
5725	/	-2.14	/	102.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	61.47	-2.06	59.41	68.2	-8.79	peak
5650	/	-2.06	/	48.2	/	AVG
5700	96.74	-1.96	94.78	105.2	-10.42	peak
5700	/	-1.96	/	85.2	/	AVG
5720	92.77	-2.87	89.9	110.8	-20.9	peak
5720	/	-2.87	/	90.8	/	AVG
5725	112.18	-2.14	110.04	122.2	-12.16	peak
5725	/	-2.14	/	102.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	111.09	-1.97	109.12	122.2	-13.08	peak
5850	/	-1.97	/	102.2	/	AVG
5855	95.05	-2.13	92.92	110.8	-17.88	peak
5855	/	-2.13	/	90.8	/	AVG
5875	88.29	-2.65	85.64	105.2	-19.56	peak
5875	/	-2.65	/	85.2	/	AVG
5925	53.22	-2.28	50.94	68.2	-17.26	peak
5925	/	-2.28	/	48.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	110.86	-1.97	108.89	122.2	-13.31	peak
5850	/	-1.97	/	102.2	/	AVG
5855	93.72	-2.13	91.59	110.8	-19.21	peak
5855	/	-2.13	/	90.8	/	AVG
5875	87.89	-2.65	85.24	105.2	-19.96	peak
5875	/	-2.65	/	85.2	/	AVG
5925	52.27	-2.28	49.99	68.2	-18.21	peak
5925	/	-2.28	/	48.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	58.87	-2.06	56.81	68.2	-11.39	peak
5650	/	-2.06	/	48.2	/	AVG
5700	90.23	-1.96	88.27	105.2	-16.93	peak
5700	/	-1.96	/	85.2	/	AVG
5720	93.05	-2.87	90.18	110.8	-20.62	peak
5720	/	-2.87	/	90.8	/	AVG
5725	111.97	-2.14	109.83	122.2	-12.37	peak
5725	/	-2.14	/	102.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	59.53	-2.06	57.47	68.2	-10.73	peak
5650	/	-2.06	/	48.2	/	AVG
5700	90.69	-1.96	88.73	105.2	-16.47	peak
5700	/	-1.96	/	85.2	/	AVG
5720	95.17	-2.87	92.3	110.8	-18.5	peak
5720	/	-2.87	/	90.8	/	AVG
5725	112.51	-2.14	110.37	122.2	-11.83	peak
5725	/	-2.14	/	102.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	112.96	-1.97	110.99	122.2	-11.21	peak
5850	/	-1.97	/	102.2	/	AVG
5855	95.82	-2.13	93.69	110.8	-17.11	peak
5855	/	-2.13	/	90.8	/	AVG
5875	87.87	-2.65	85.22	105.2	-19.98	peak
5875	/	-2.65	/	85.2	/	AVG
5925	53.63	-2.28	51.35	68.2	-16.85	peak
5925	/	-2.28	/	48.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	112.58	-1.97	110.61	122.2	-11.59	peak
5850	/	-1.97	/	102.2	/	AVG
5855	92.77	-2.13	90.64	110.8	-20.16	peak
5855	/	-2.13	/	90.8	/	AVG
5875	85.5	-2.65	82.85	105.2	-22.35	peak
5875	/	-2.65	/	85.2	/	AVG
5925	55.23	-2.28	52.95	68.2	-15.25	peak
5925	/	-2.28	/	48.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	57.88	-2.06	55.82	68.2	-12.38	peak
5650	/	-2.06	/	48.2	/	AVG
5700	90.39	-1.96	88.43	105.2	-16.77	peak
5700	/	-1.96	/	85.2	/	AVG
5720	92.6	-2.87	89.73	110.8	-21.07	peak
5720	/	-2.87	/	90.8	/	AVG
5725	111.23	-2.14	109.09	122.2	-13.11	peak
5725	/	-2.14	/	102.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	59.3	-2.06	57.24	68.2	-10.96	peak
5650	/	-2.06	/	48.2	/	AVG
5700	90.77	-1.96	88.81	105.2	-16.39	peak
5700	/	-1.96	/	85.2	/	AVG
5720	95.91	-2.87	93.04	110.8	-17.76	peak
5720	/	-2.87	/	90.8	/	AVG
5725	111.85	-2.14	109.71	122.2	-12.49	peak
5725	/	-2.14	/	102.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	113.05	-1.97	111.08	122.2	-11.12	peak
5850	/	-1.97	/	102.2	/	AVG
5855	94.71	-2.13	92.58	110.8	-18.22	peak
5855	/	-2.13	/	90.8	/	AVG
5875	87.8	-2.65	85.15	105.2	-20.05	peak
5875	/	-2.65	/	85.2	/	AVG
5925	53.49	-2.28	51.21	68.2	-16.99	peak
5925	/	-2.28	/	48.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	113.15	-1.97	111.18	122.2	-11.02	peak
5850	/	-1.97	/	102.2	/	AVG
5855	92.27	-2.13	90.14	110.8	-20.66	peak
5855	/	-2.13	/	90.8	/	AVG
5875	86.47	-2.65	83.82	105.2	-21.38	peak
5875	/	-2.65	/	85.2	/	AVG
5925	55.13	-2.28	52.85	68.2	-15.35	peak
5925	/	-2.28	/	48.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	58.26	-2.06	56.2	68.2	-12	peak
5650	/	-2.06	/	48.2	/	AVG
5700	90.69	-1.96	88.73	105.2	-16.47	peak
5700	/	-1.96	/	85.2	/	AVG
5720	92.73	-2.87	89.86	110.8	-20.94	peak
5720	/	-2.87	/	90.8	/	AVG
5725	111.28	-2.14	109.14	122.2	-13.06	peak
5725	/	-2.14	/	102.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	59.67	-2.06	57.61	68.2	-10.59	peak
5650	/	-2.06	/	48.2	/	AVG
5700	90.78	-1.96	88.82	105.2	-16.38	peak
5700	/	-1.96	/	85.2	/	AVG
5720	95.72	-2.87	92.85	110.8	-17.95	peak
5720	/	-2.87	/	90.8	/	AVG
5725	113.29	-2.14	111.15	122.2	-11.05	peak
5725	/	-2.14	/	102.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	113.94	-1.97	111.97	122.2	-10.23	peak
5850	/	-1.97	/	102.2	/	AVG
5855	94.42	-2.13	92.29	110.8	-18.51	peak
5855	/	-2.13	/	90.8	/	AVG
5875	86.31	-2.65	83.66	105.2	-21.54	peak
5875	/	-2.65	/	85.2	/	AVG
5925	52.92	-2.28	50.64	68.2	-17.56	peak
5925	/	-2.28	/	48.2	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	111.74	-1.97	109.77	122.2	-12.43	peak
5850	/	-1.97	/	102.2	/	AVG
5855	93.61	-2.13	91.48	110.8	-19.32	peak
5855	/	-2.13	/	90.8	/	AVG
5875	86.46	-2.65	83.81	105.2	-21.39	peak
5875	/	-2.65	/	85.2	/	AVG
5925	55.22	-2.28	52.94	68.2	-15.26	peak
5925	/	-2.28	/	48.2	/	AVG



Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



4.7. Spurious Emission

4.7.1.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
Test Method:	KDB 789033 D02 v02r01				
Frequency Range:	9kHz to 40GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,				
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)		
	0.009-0.490	2400/F(KHz)	300		
	0.490-1.705	24000/F(KHz)	30		
	1.705-30	30	30		
	30-88	100	3		
	88-216	150	3		
	216-960	200	3		
	Above 960	500	3		
	Frequency	Limit (dBuV/m @3m)	Detector		
Above 1G	74.0	Peak			
	54.0	Average			
Test setup:	For radiated emissions below 30MHz				
	<p>Distance = 3m</p> <p>EUT</p> <p>Turn table</p> <p>Ground Plane</p> <p>Computer</p> <p>Pre -Amplifier</p> <p>Receiver</p>				
	30MHz to 1GHz				

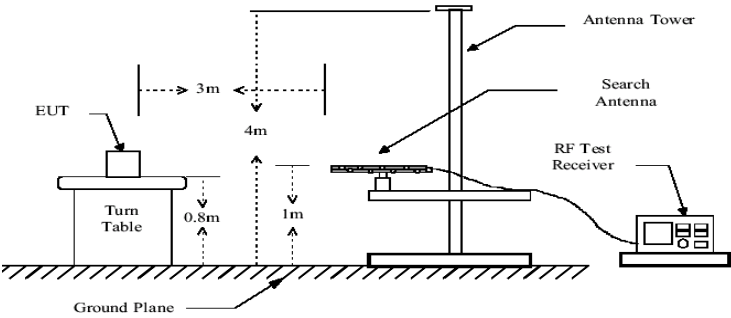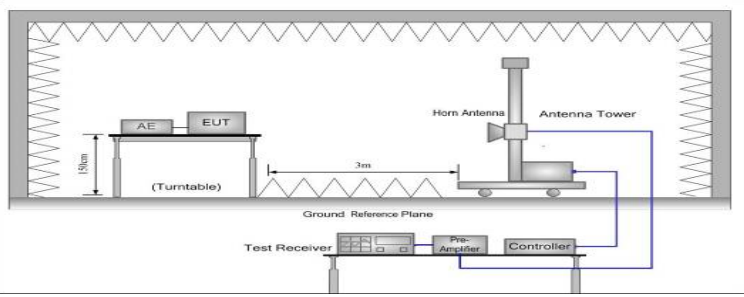	 <p>Above 1GHz</p> 
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test results:	PASS




4.7.2. Test Data

Remark: We tested all Channels, the worst case was recorded.

Please refer to following diagram for individual

Below 1GHz

Horizontal

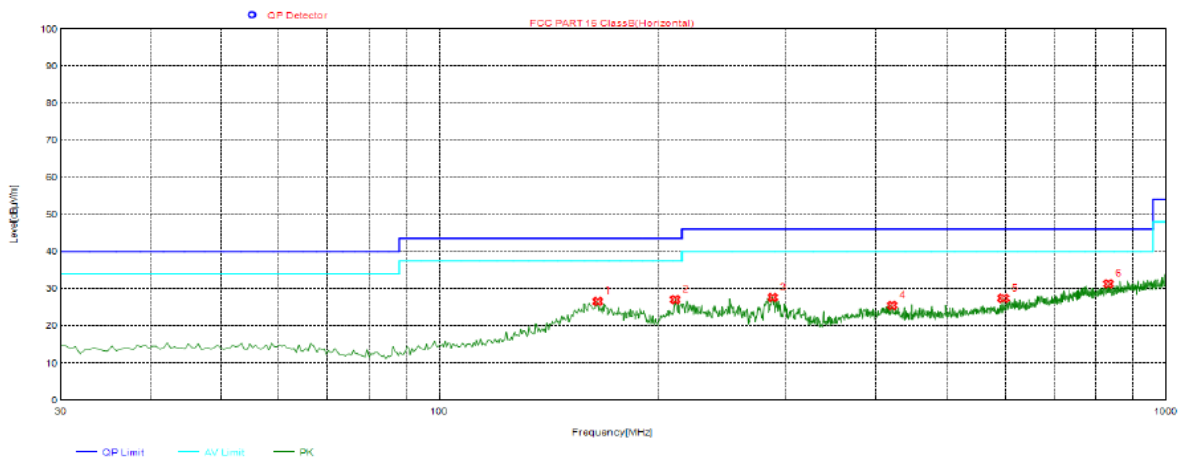


NO.	Freq. [MHz]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	165.3150	26.55	-10.07	43.50	16.95	PK	100	69	Horizontal
2	211.3900	27.06	-15.38	43.50	16.44	PK	100	56	Horizontal
3	288.0200	27.65	-13.46	46.00	18.35	PK	100	85	Horizontal
4	420.9100	25.50	-10.16	46.00	20.50	PK	100	92	Horizontal
5	597.9350	27.43	-6.25	46.00	18.57	PK	100	102	Horizontal
6	833.1600	31.29	-1.58	46.00	14.71	PK	100	11	Horizontal

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level



Vertical

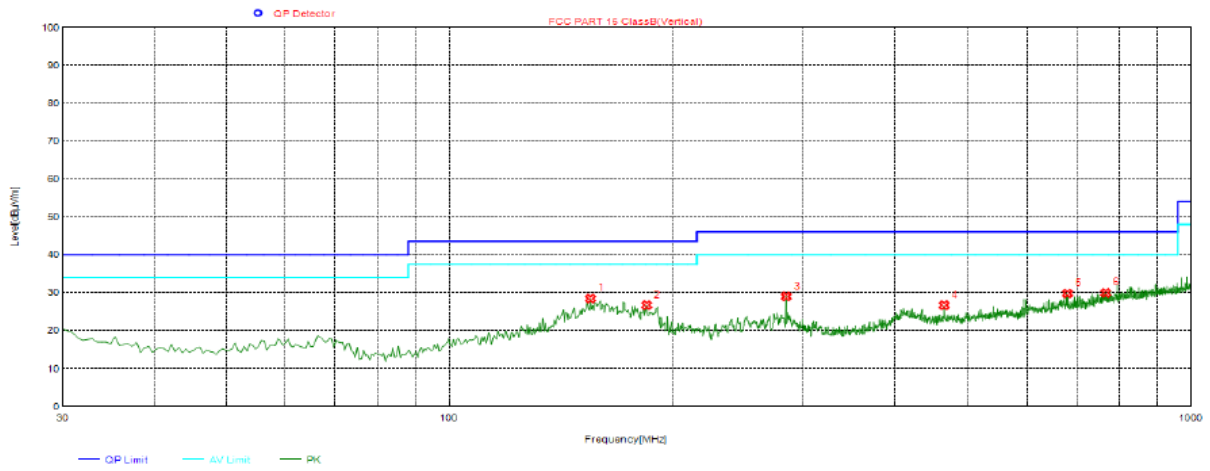

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	155.1300	28.41	-10.06	43.50	15.09	PK	100	100	Vertical
2	184.7150	26.69	-13.75	43.50	16.81	PK	100	77	Vertical
3	285.1100	28.98	-13.62	46.00	17.02	PK	100	360	Vertical
4	466.0150	26.66	-8.47	46.00	19.34	PK	100	12	Vertical
5	680.8700	29.79	-4.43	46.00	16.21	PK	100	293	Vertical
6	767.2000	29.94	-2.51	46.00	16.06	PK	100	345	Vertical

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

**Above 1GHz**

LOW CH 36 (802.11 a Mode with 5.2G)/5180

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	62.53	-4.59	57.94	74	-16.06	peak
3647	47.38	-4.59	42.79	54	-11.21	AVG
10360	52.46	3.74	56.2	74	-17.8	peak
10360	41.24	3.74	44.98	54	-9.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	62.34	-4.59	57.75	74	-16.25	peak
3647	47.18	-4.59	42.59	54	-11.41	AVG
10360	52.39	3.74	56.13	74	-17.87	peak
10360	41.05	3.74	44.79	54	-9.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH40 (802.11 a Mode with 5.2G)/5200

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	62.85	-4.59	58.26	74	-15.74	peak
3647	46.67	-4.59	42.08	54	-11.92	AVG
10400	54.33	3.74	58.07	74	-15.93	peak
10400	41.42	3.74	45.16	54	-8.84	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	62.57	-4.59	57.98	74	-16.02	peak
3647	46.34	-4.59	41.75	54	-12.25	AVG
10400	53.69	3.74	57.43	74	-16.57	peak
10400	41.02	3.74	44.76	54	-9.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH 48 (802.11a Mode with 5.2G)/5240
Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3647	61.78	-4.59	57.19	74	-16.81	
3647	46.55	-4.59	41.96	54	-12.04	AVG
10480	53.27	3.75	57.02	74	-16.98	peak
10480	40.61	3.75	44.36	54	-9.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3647	61.25	-4.59	56.66	74	-17.34	
3647	46.03	-4.59	41.44	54	-12.56	AVG
10480	52.46	3.75	56.21	74	-17.79	peak
10480	39.88	3.75	43.63	54	-10.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH 149 (802.11 a Mode with 5.8G)/5745

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	62.59	-4.59	58	74	-16	peak
3647	46.78	-4.59	42.19	54	-11.81	AVG
11570	54.35	4.21	58.56	74	-15.44	peak
11570	40.59	4.21	44.8	54	-9.2	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	61.35	-4.59	56.76	74	-17.24	peak
3647	47.19	-4.59	42.6	54	-11.4	AVG
11570	54.26	4.21	58.47	74	-15.53	peak
11570	40.32	4.21	44.53	54	-9.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH157 (802.11 a Mode with 5.8G)/5785

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	61.59	-4.59	57	74	-17	peak
3647	46.73	-4.59	42.14	54	-11.86	AVG
11570	54.47	4.21	58.68	74	-15.32	peak
11570	39.85	4.21	44.06	54	-9.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	60.45	-4.59	55.86	74	-18.14	peak
3647	46.38	-4.59	41.79	54	-12.21	AVG
11570	53.41	4.21	57.62	74	-16.38	peak
11570	39.66	4.21	43.87	54	-10.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH 165 (802.11a Mode with 5.8G)/5825

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
3647	62.57	-4.59	57.98	74	-16.02	peak
3647	47.02	-4.59	42.43	54	-11.57	AVG
11650	54.83	4.84	59.67	74	-14.33	peak
11650	42.18	4.84	47.02	54	-6.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
3647	61.84	-4.59	57.25	74	-16.75	peak
3647	46.29	-4.59	41.7	54	-12.3	AVG
11650	54.55	4.84	59.39	74	-14.61	peak
11650	41.31	4.84	46.15	54	-7.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



4.8. Frequency Stability Measurement

4.8.1. Test Specification

Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	<pre> graph TD SA[Spectrum Analyzer] --- EUT[EUT] subgraph TC [Temperature Chamber] EUT end P[AC/DC Power supply] --- EUT </pre>
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	N/A

**Test Result as follows:**

Mode	Voltage (V)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	5.5V	5179.987	13	5239.986	14
	5V	5179.988	12	5239.983	17
	4.5 V	5179.984	16	5239.988	12

Mode	Temperature (°C)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	-30	5179.968	32	5239.966	34
	-20	5179.967	33	5239.968	32
	-10	5179.971	29	5239.973	27
	0	5179.974	26	5239.975	25
	10	5179.972	28	5239.982	18
	20	5179.986	14	5239.980	20
	30	5179.981	19	5239.977	23
	40	5179.979	21	5239.979	21
	50	5179.972	28	5239.966	34



Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	5.5V	5744.988	12	5824.982	18
	5V	5744.987	13	5824.987	13
	4.5 V	5744.984	16	5824.985	15

Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	-30	5744.963	37	5824.967	33
	-20	5744.966	34	5824.964	36
	-10	5744.975	25	5824.972	28
	0	5744.977	23	5824.978	22
	10	5744.979	21	5824.976	24
	20	5744.985	15	5824.982	28
	30	5744.978	22	5824.974	26
	40	5744.976	24	5824.973	27
	50	5744.974	26	5824.977	23



4.9. ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction


The antenna used in this product is a PCB Antenna, The directional gains of antenna used for transmitting is 1dBi.

WIFI ANTENNA

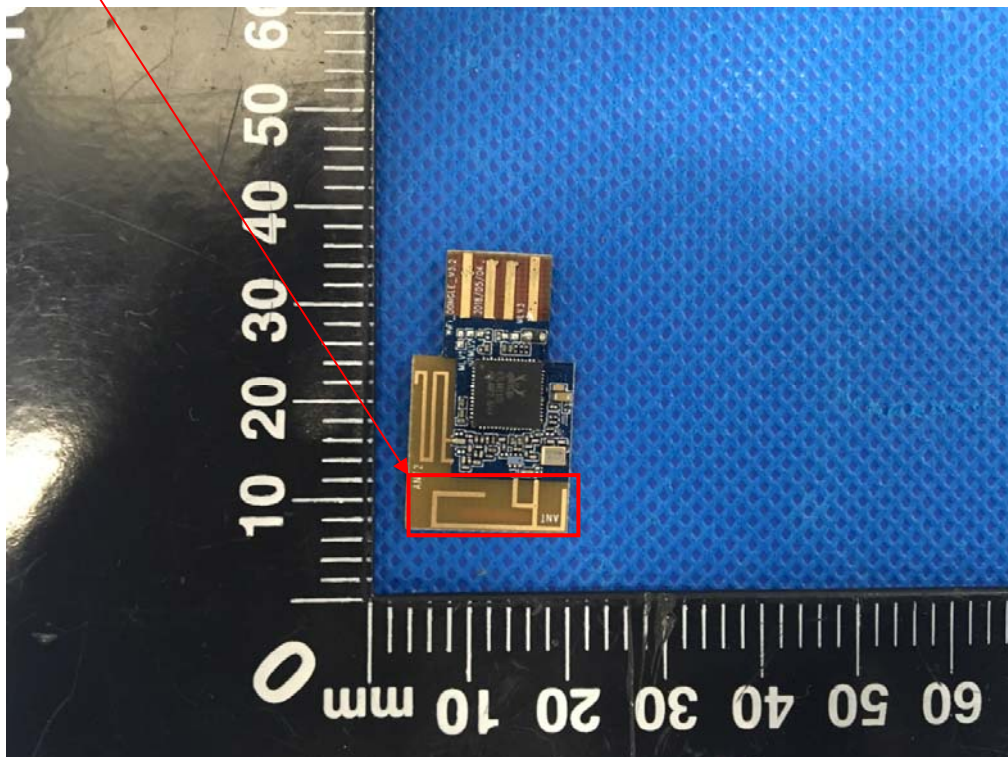

4.10. Photographs of Test Setup

Radiated Emission

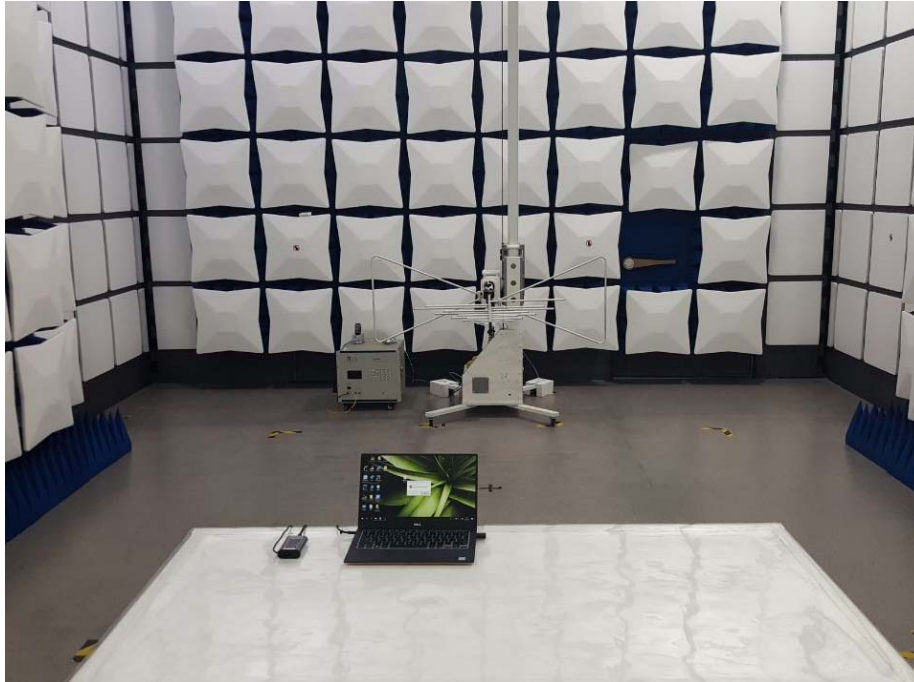



Conducted Emission

