



FCC PART 27 TEST REPORT

FCC Part 27

Report Reference No......: **HK180619343-6E**
FCC ID.....: **2AQJUN01-180515**
 Compiled by
 (position+printed name+signature)..: File administrators Gary Qian

Gary Qian

Supervised by
 (position+printed name+signature)..: Technique principal Eden Hu

Eden Hu

Approved by
 (position+printed name+signature)..: Manager Jason Zhou

Jason Zhou

Date of issue.....: June 27, 2018

Testing Laboratory Name : **Shenzhen HUAKE Testing Technology Co., Ltd.**
 Address: 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,
 Heping Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name.....: **Sweam AB**
 Address: Kistagangen 12, SE-16440 Kista, Sweden

Test specification: **FCC CFR Title 47 Part 2, Part 27**
 Standard: **EIA/TIA 603-D: 2010**
KDB 971168 D01
 TRF Originator.....: Shenzhen HUAKE Testing Technology Co., Ltd.

Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.
 This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Sweam
 Trade Mark: Sweam
Manufacturer.....: **Sweam AB**
 Model/Type reference.....: EN01-180515
 Listed Models: N/A
 Modulation Type: QPSK, 16QAM
 Rating: DC 3.70V
 Hardware version: V2.0
 Software version.....: V2.0
 Result.....: **PASS**

**TEST REPORT**

Test Report No. :	HK180619343-6E	June 27, 2018 Date of issue
--------------------------	-----------------------	--------------------------------

Equipment under Test : Sweam

Model /Type : EN01-180515

Listed Models : N/A

Applicant : **Sweam AB**

Address : Kistagangen 12, SE-16440 Kista, Sweden

Manufacturer : **Sweam AB**

Address : Kistagangen 12, SE-16440 Kista, Sweden

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Revision History

Revision	Issue Date	Revisions	Revised By
V1.0	2018-06-27	Initial Issue	James Zhou



Contents

1.	<u>TEST STANDARDS</u>	5
2.	<u>SUMMARY</u>	6
2.1.	General Remarks	6
2.2.	Product Description	6
2.3.	Equipment under Test	6
2.4.	Short description of the Equipment under Test (EUT)	6
2.5.	Normal Accessory setting	7
2.6.	EUT configuration	7
2.7.	Related Submittal(s) / Grant (s)	7
2.8.	Modifications	7
2.9.	GeneralTest Conditions/Configurations	7
3.	<u>TEST ENVIRONMENT</u>	8
3.1.	Address of the test laboratory	8
3.2.	Environmental conditions	8
3.3.	Test Description	8
3.4.	Equipments Used during the Test	9
4.	<u>TEST CONDITIONS AND RESULTS</u>	10
4.1.	Output Power	10
4.2.	Peak-to-Average Ratio (PAR)	15
4.3.	Occupied Bandwidth and Emission Bandwidth	20
4.4.	Band Edge compliance	25
4.5.	Spurious Emssion on Antenna Port	30
4.6.	Radiated Spurious Emssion	43
4.7.	Frequency Stability	49
5.	<u>TEST SETUP PHOTOS OF THE EUT</u>	51
6.	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	51



1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 27\(10-1-12 Edition\)](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES
[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[ANSI C63.4:2014](#): Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

[FCKDB971168D01](#) PowerMeasLicenseDigitalSystems



2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	April 05, 2017
Testing commenced on	:	April 05, 2017
Testing concluded on	:	June 27, 2018

2.2. Product Description

The **Sweam AB's** Model:EN01-180515 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Sweam
Model/Type reference:	EN01-180515
List Model:	/
Power supply:	DC 3.70V
Adapter Information	DC5V/3A or DC9V/2A or DC12V/1.5A From Type-C
Modulation Type	QPSK, 16QAM
Antenna Type	Internal
Antenna Gain	-1.26 dBi
Operation Frequency Band	LTE Band 7
Operation frequency	LTE Band 7: 2502.5~2567.5 MHz
LTE Release	R8
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.70VDC)

2.3. Equipment under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V/ 60 Hz	<input type="radio"/> 115V/60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.7V From Battery;
DC5V/3A or DC9V/2A or DC12V/1.5A From Type-C

2.4. Short description of the Equipment under Test (EUT)

2.4.1 General Description

EN01-180515 is subscriber equipment in the WCDMA/GSM /LTE system. The HSPA/UMTS frequency band is Band 2 and Band 5, LTE frequency band is band 2. band 7; The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II and Band V and GSM850 and PCS1900 bands test data included in this report. The Sweam implements such functions as RF signal receiving/transmitting, HSPA/UMTS ,LTE and GSM/GPRS protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.



2.5. Normal Accessory setting

Fully charged battery was used during the test.

2.6. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○ Power Cable	Length (m) :	/
	Shield :	/
	Detachable :	/
○ Multimeter	Manufacturer :	/
	Model No. :	/

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AQJUE01-180515** filing to comply with FCC Part 27, Rules.

2.8. Modifications

No modifications were implemented to meet testing criteria.

2.9. General Test Conditions/Configurations

2.10.1 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.40V
	VN	3.70V
	VH	4.20V

NOTE: VL=lower extreme test voltage VN=nominal voltage
VH=upper extreme test voltage TN=normal temperature



3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park,
Buji Street, Longgang District, Shenzhen, Guangdong

3.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.3. Test Description

3.4.1 AWS Band (1710-1755MHz paired with 2110-2155MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic)Radiated Output Power	§2.1046, §27.50(d)	EIRP ≤ 2W;	Pass
Peak-Average Ratio	§2.1046, §27.50(d)	Limit ≤ 13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §27.53(h)		Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -25dBm/1MHz,	Pass
Field Strength of Spurious Radiation	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Pass
Frequency Stability	§2.1053, §27.53(h)	±2.5ppm	

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".



3.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	ENV216	R&S	HKE-059	2017/12/28	2018/12/27
LISN	R&S	ENV216	HKE-002	2017/12/28	2018/12/27
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	2017/12/28	2019/12/26
Receiver	R&S	ESCI 7	HKE-010	2017/12/28	2018/12/27
Spectrum analyzer	Agilent	N9020A	HKE-048	2017/12/28	2018/12/27
RF automatic control unit	Tonscend	JS0806-2	HKE-060	2017/12/28	2018/12/27
Horn antenna	Schwarzbeck	9120D	HKE-013	2017/12/28	2019/12/26
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	2017/12/28	2019/12/26
Preamplifier	EMCI	EMC051845SE	HKE-015	2017/12/28	2018/12/27
Preamplifier	Agilent	83051A	HKE-016	2017/12/28	2018/12/27
Temperature and humidity meter	Boyang	HTC-1	HKE-075	2017/12/28	2018/12/27
High pass filter unit	Tonscend	JS0806-F	HKE-055	2017/12/28	2018/12/27
RF cable	Times	1-40G	HKE-034	2017/12/28	2018/12/27
Power meter	Agilent	E4419B	HKE-085	2017/12/28	2018/12/27
Power Sensor	Agilent	E9300A	HKE-086	2017/12/28	2018/12/27
Wireless Communication Test Set	R&S	CMU200	HKE-026	2017/12/28	2018/12/27



4. TEST CONDITIONS AND RESULTS


4.1. Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits

4.1.1. Conducted Output Power

TEST CONFIGURATION

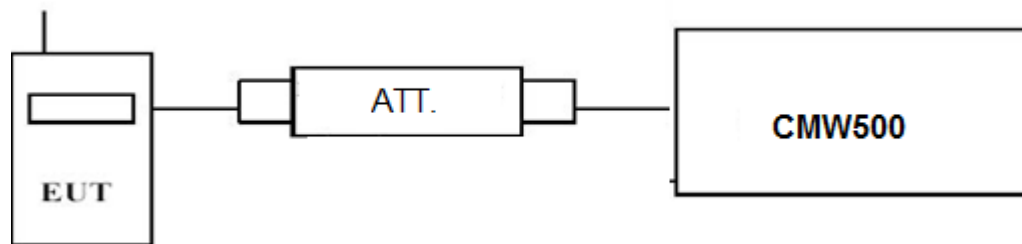

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

TEST RESULTS

Remark:

- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7;

LTE FDD Band 7				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Average Power [dBm]	
			QPSK	16QAM
5 MHz	2502.5	1 RB low	22.10	21.35
		1 RB high	21.93	21.16
		50% RB mid	21.11	20.21
		100% RB	20.95	20.13
	2535.0	1 RB low	22.13	21.42
		1 RB high	22.07	21.36
		50% RB mid	21.10	20.27
		100% RB	21.02	20.14
	2567.5	1 RB low	21.98	21.05
		1 RB high	21.80	20.84
		50% RB mid	21.25	20.32
		100% RB	21.23	20.26
10 MHz	2505.0	1 RB low	21.66	21.00
		1 RB high	20.92	19.98
		50% RB mid	20.83	20.07
		100% RB	20.71	19.92
	2535.0	1 RB low	21.78	21.25
		50% RB mid	20.75	19.63




	2565.0	100% RB	20.84	20.12
		1 RB low	21.29	20.59
		1 RB high	21.02	20.53
		50% RB mid	21.03	19.97
		100% RB	21.01	20.05
15 MHz	2507.5	1 RB low	21.66	21.03
		1 RB high	21.22	20.26
		50% RB mid	20.71	19.74
		100% RB	20.63	19.55
	2535.0	1 RB low	21.80	21.82
		1 RB high	21.27	20.65
		50% RB mid	20.55	19.60
		100% RB	20.82	19.81
	2562.5	1 RB low	20.80	19.82
		1 RB high	21.13	20.45
		50% RB mid	21.07	20.03
		100% RB	20.76	19.73
20 MHz	2510.0	1 RB low	20.57	19.74
		1 RB high	20.55	19.65
		50% RB mid	20.41	19.55
		100% RB	20.43	19.62
	2535.0	1 RB low	21.95	21.52
		1 RB high	21.43	19.57
		50% RB mid	20.45	19.60
		100% RB	20.60	19.73
	2560.0	1 RB low	20.65	19.85
		1 RB high	20.98	20.57
		50% RB mid	21.10	19.90
		100% RB	20.54	19.73

4.1.2. Radiated Output Power

LIMIT

According to §27.50 (d) (4): Fixed, mobile, and portable (hand- held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

TEST CONFIGURATION

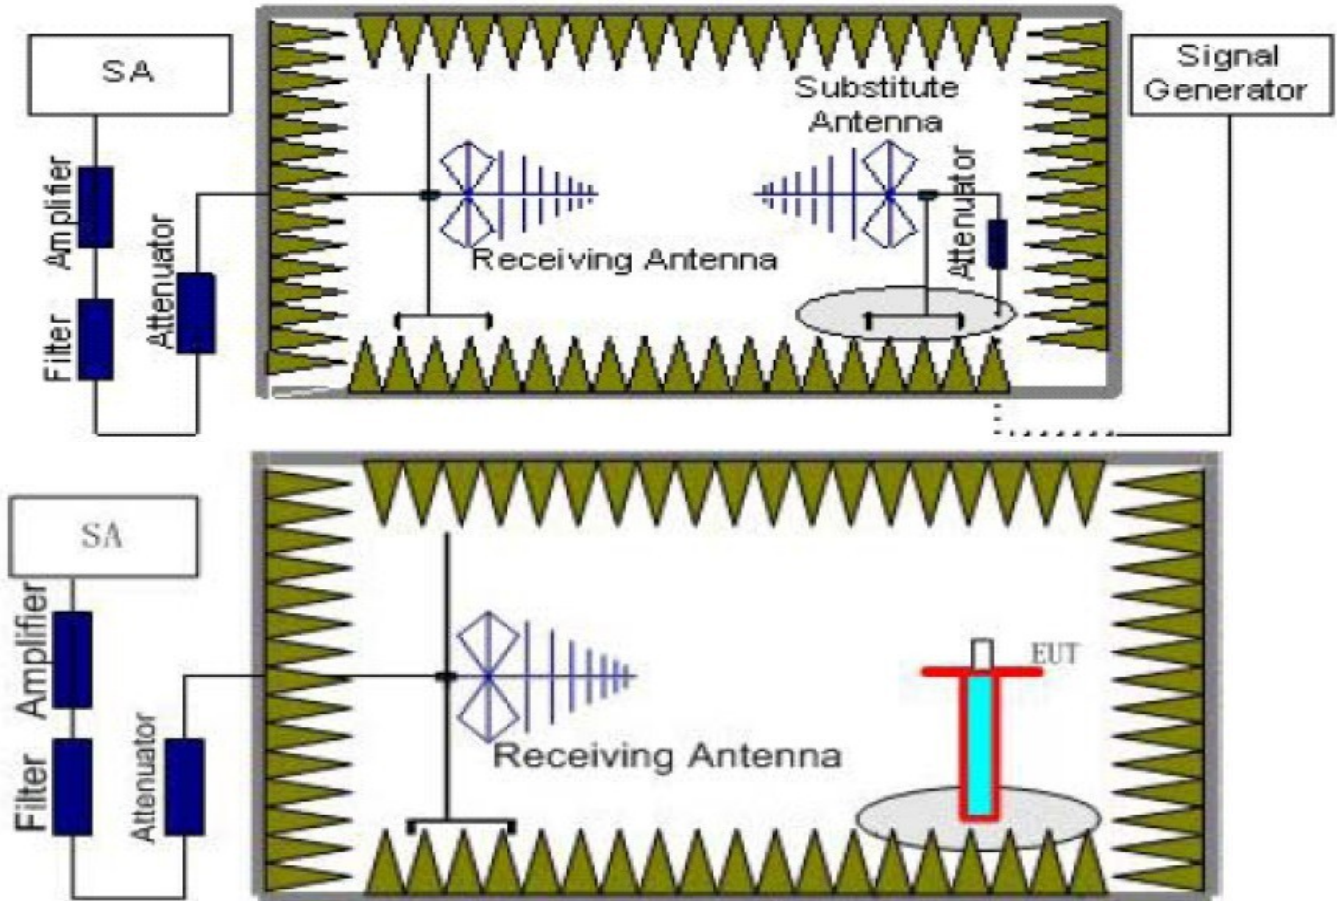

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.



- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} - P_{\text{Ag}} - P_{\text{cl}} + G_a$$

We used SMF100A microwawe signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} - P_{\text{cl}} + G_a$$

- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST RESULTS

Note: We test the H direction and V direction and V direction is worse.

Remark:

- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4; recorded worst case for each Channel Bandwidth of LTE FDD Band 4.
- $\text{EIRP} = P_{\text{Mea}}(\text{dBm}) - P_{\text{cl}}(\text{dB}) + P_{\text{Ag}}(\text{dB}) + G_a(\text{dBi})$
- We measured both Horizontal and Vertical direction, recorded worst case direction.

LTE FDD Band 7_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2502.5	-21.55	3.06	9.68	34.8	19.87	33.01	13.14	V
2535	-21.09	3.17	9.68	34.8	20.22	33.01	12.79	V
2567.5	-22.31	3.22	9.75	34.8	19.02	33.01	13.99	V

LTE FDD Band 7_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2505	-22.35	3.06	9.68	34.8	19.07	33.01	13.94	V
2535	-20.98	3.17	9.68	34.8	20.33	33.01	12.68	V
2565	-22.48	3.22	9.75	34.8	18.85	33.01	14.16	V

LTE FDD Band 7_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2507.5	-21.89	3.06	9.68	34.8	19.53	33.01	13.48	V
2535	-20.83	3.17	9.68	34.8	20.48	33.01	12.53	V
2562.5	-21.50	3.22	9.75	34.8	19.83	33.01	13.18	V

LTE FDD Band 7_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2510	-21.89	3.06	9.68	34.8	19.53	33.01	13.48	V
2535	-21.21	3.17	9.68	34.8	20.1	33.01	12.91	V
2560	-22.21	3.22	9.75	34.8	19.12	33.01	13.89	V

*LTE FDD Band 7_Channel Bandwidth 5MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2502.5	-22.16	3.06	9.68	34.8	19.26	33.01	13.75	V
2535	-21.54	3.17	9.68	34.8	19.77	33.01	13.24	V
2567.5	-22.58	3.22	9.75	34.8	18.75	33.01	14.26	V

LTE FDD Band 7_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2505	-22.46	3.06	9.68	34.8	18.96	33.01	14.05	V
2535	-22.05	3.17	9.68	34.8	19.26	33.01	13.75	V
2565	-22.28	3.22	9.75	34.8	19.05	33.01	13.96	V

LTE FDD Band 7_Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2507.5	-22.49	3.06	9.68	34.8	18.93	33.01	14.08	V
2535	-22.08	3.17	9.68	34.8	19.23	33.01	13.78	V
2562.5	-22.29	3.06	9.68	34.8	19.13	33.01	13.88	V

LTE FDD Band 7_Channel Bandwidth 20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2510	-22.11	3.06	9.68	34.8	19.31	33.01	13.70	V
2535	-21.37	3.17	9.68	34.8	19.94	33.01	13.07	V
2560	-21.99	3.22	9.75	34.8	19.34	33.01	13.67	V




4.2. Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

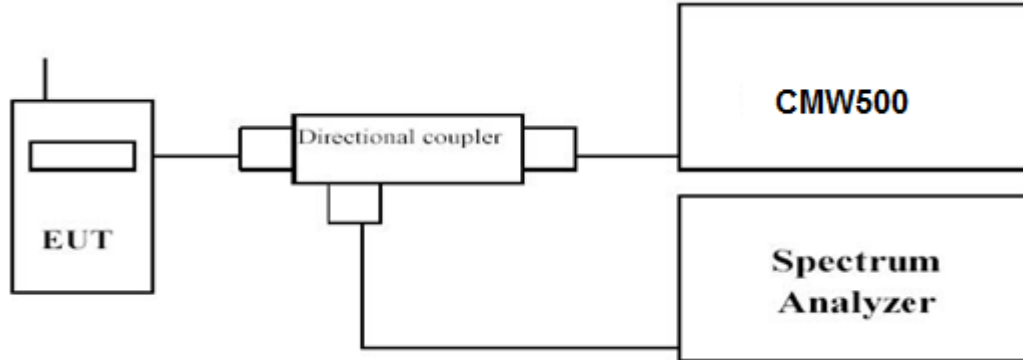

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.

LTE FDD Band 7				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR(dB)	
			QPSK	16QAM
5 MHz	2502.5	1RB#0	4.15	4.91
	2535.0		4.35	5.38
	2567.5		4.28	5.02
10 MHz	2505.0	1RB#0	4.09	4.94
	2535.0		4.38	5.21
	2565.0		4.29	5.07
15 MHz	2507.5	1RB#0	4.34	5.12
	2535.0		4.43	5.09
	2562.5		4.28	5.13
20 MHz	2510.0	1RB#0	4.33	4.88
	2535.0		4.24	5.16
	2560.0		4.42	5.31




LTE FDD Band 7-5MHz Channel Bandwidth PAPR

QPSK

16QAM

Low Channel

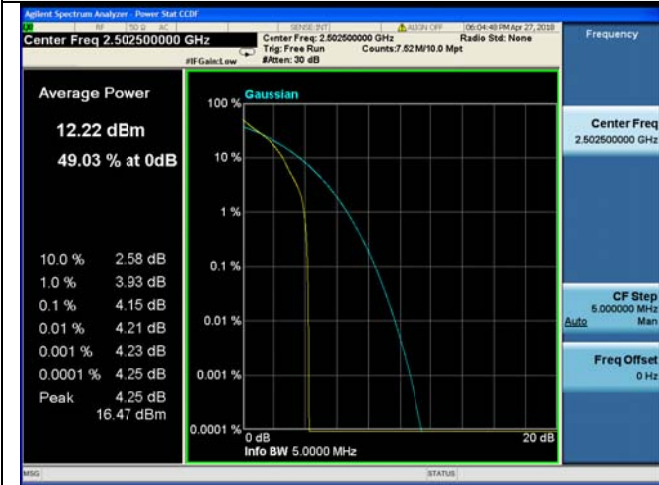


1RB#0



1RB#0

Middle Channel

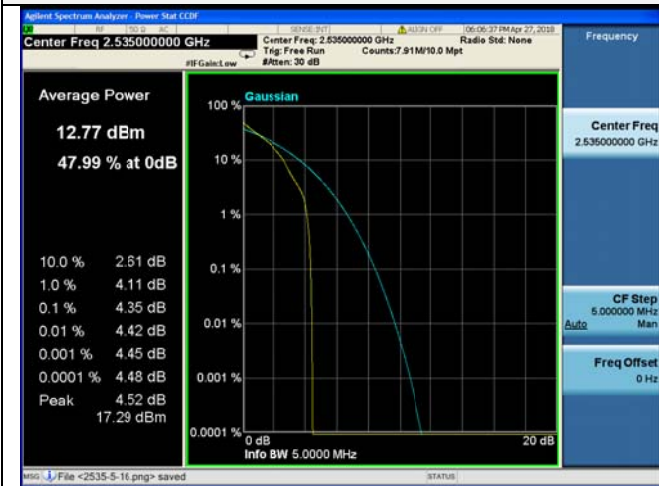

1RB#0



1RB#0

High Channel



1RB#0



1RB#0



LTE FDD Band 7- 10 MHz Channel Bandwidth PAPR

QPSK

16QAM

Low Channel




1RB#0




1RB#0

Middle Channel

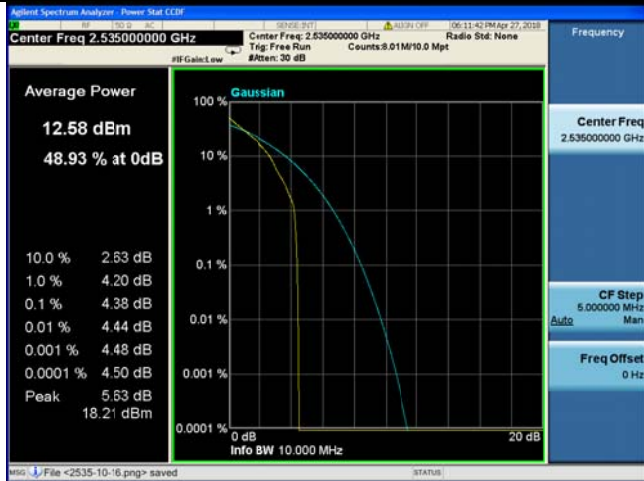

1RB#0

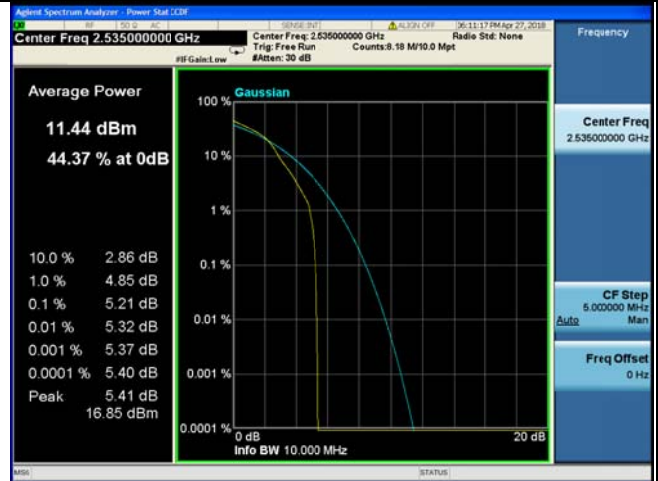

1RB#0

High Channel



1RB#0



1RB#0




LTE FDD Band 7- 15 MHz Channel Bandwidth PAPR

QPSK

16QAM

Low Channel

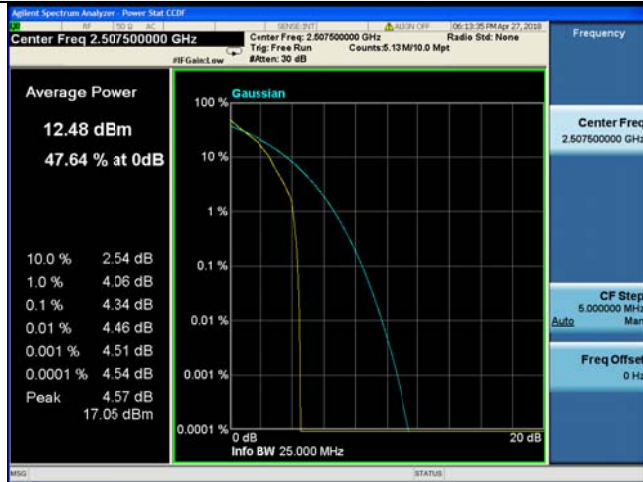

1RB#0



1RB#0

Middle Channel



1RB#0



1RB#0

High Channel



1RB#0



1RB#0




LTE FDD Band 7- 20 MHz Channel Bandwidth PAPR


QPSK

16QAM

Low Channel

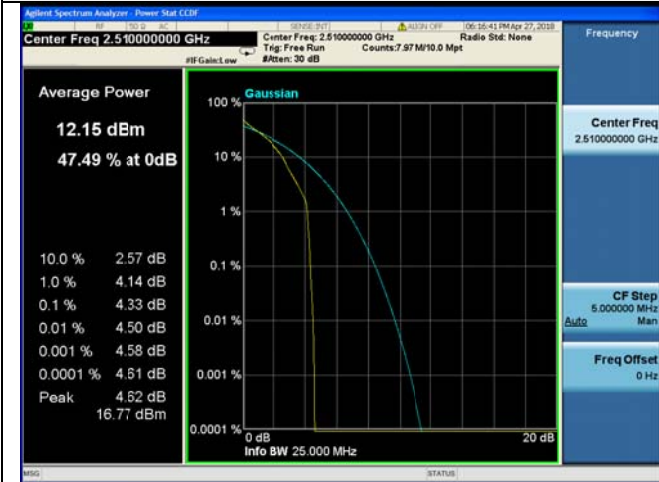


1RB#0

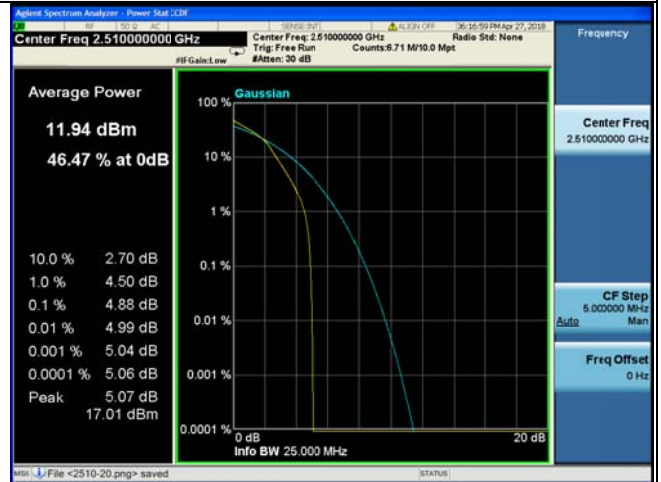

1RB#0

Middle Channel

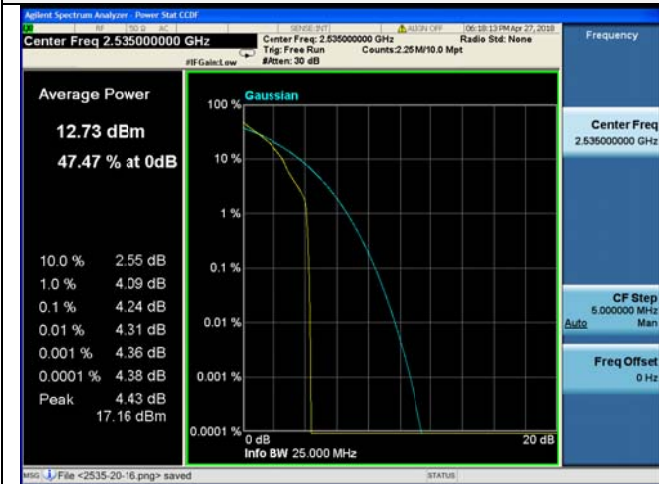

1RB#0



1RB#0

High Channel



1RB#0



1RB#0




4.3. Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

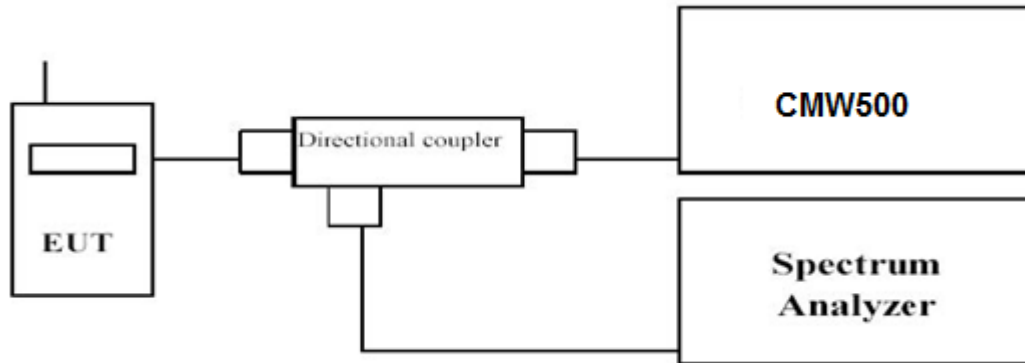

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW ≥ 3 times RBW. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.

LTE FDD Band 7						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
5 MHz	25RB#0	2502.5	4.862	4.869	4.4935	4.4961
		2535.0	4.852	4.799	4.4907	4.4899
		2567.5	4.866	4.863	4.4950	4.4950
10 MHz	50RB#0	2505.0	9.387	9.390	8.9170	8.9173
		2535.0	9.415	9.370	8.9090	8.8995
		2565.0	9.447	9.385	8.9272	8.9091
15 MHz	75RB#0	2507.5	14.08	14.02	13.382	13.373
		2535.0	14.09	14.07	13.378	13.365
		2562.5	14.07	14.09	13.381	13.386
20 MHz	100RB#0	2510.0	18.57	18.55	17.799	17.808
		2535.0	18.55	18.60	17.791	17.826
		2560.0	18.61	18.62	17.847	17.839




LTE FDD Band 7 – 5 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM

Low Channel

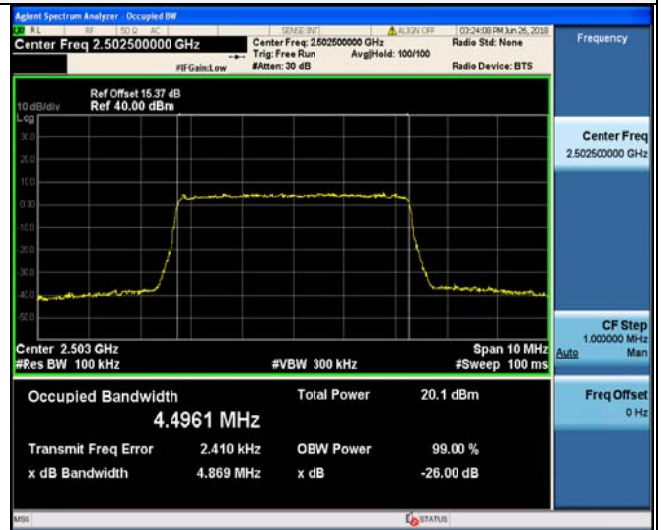

25RB#0

25RB#0


Middle Channel



25RB#0

25RB#0

High Channel

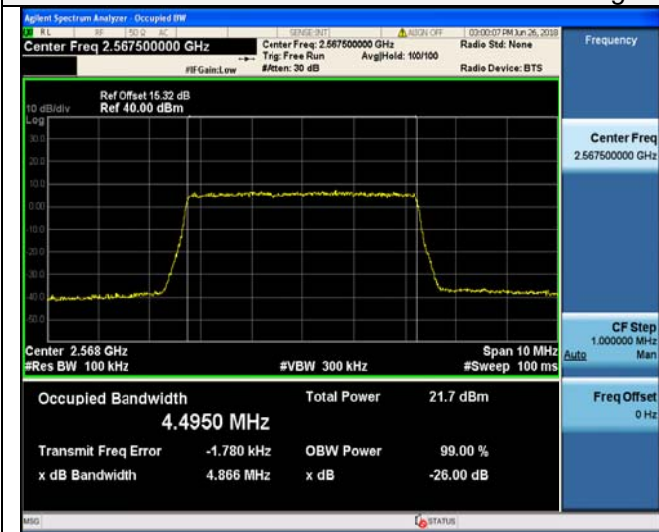

25RB#0

25RB#0




LTE FDD Band 7 – 10 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM


Low Channel

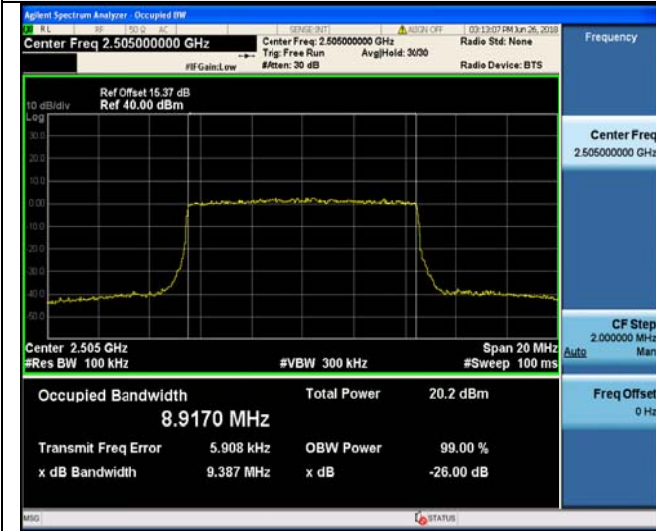

50RB#0

50RB#0


Middle Channel

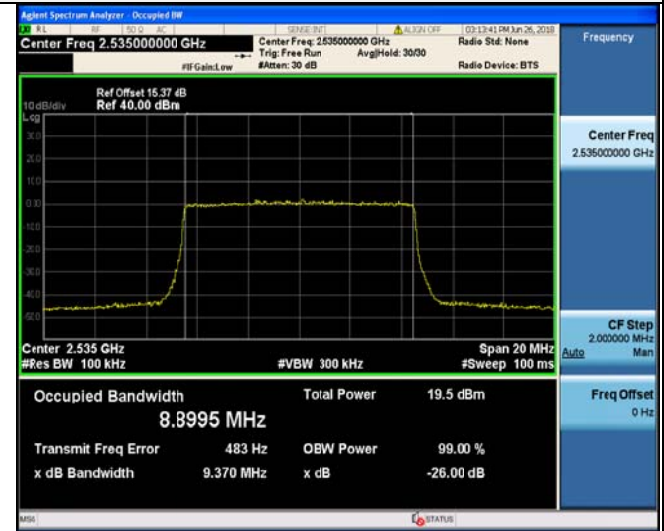

50RB#0

50RB#0

High Channel

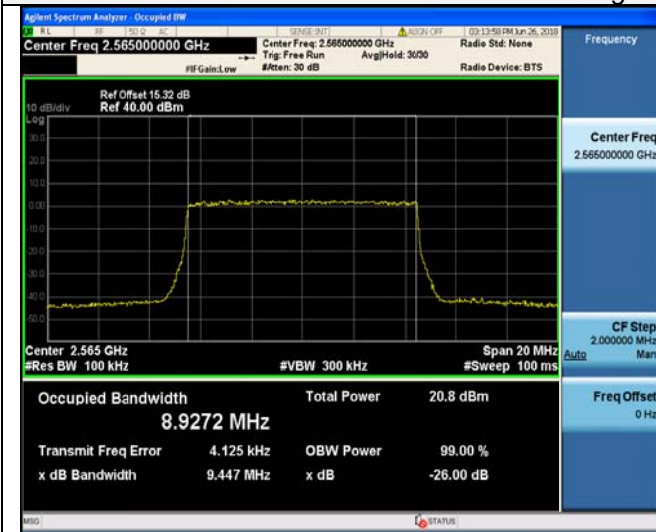

50RB#0

50RB#0





LTE FDD Band 7 – 15 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

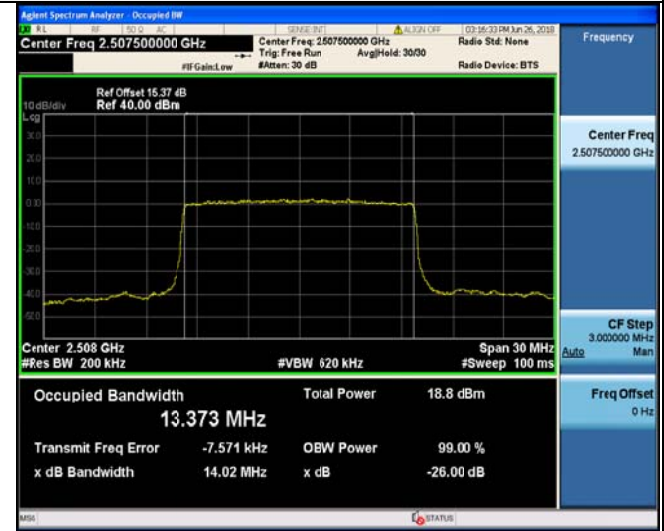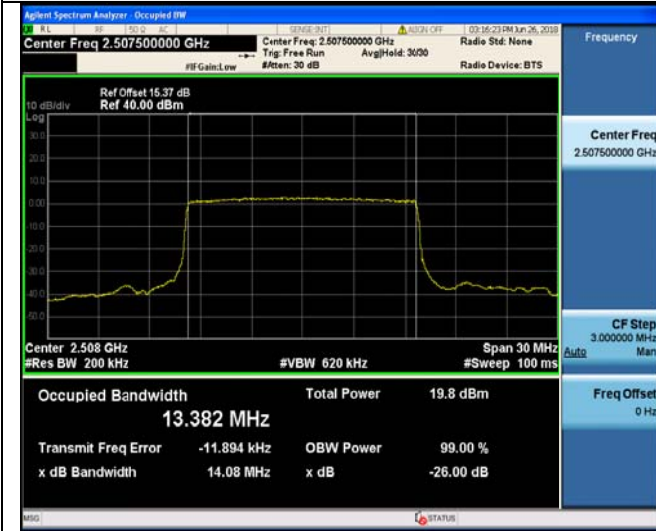

75RB#0

75RB#0



Middle Channel

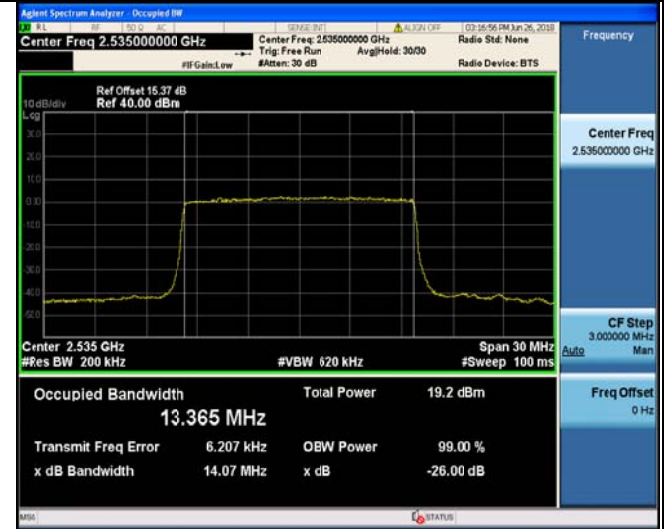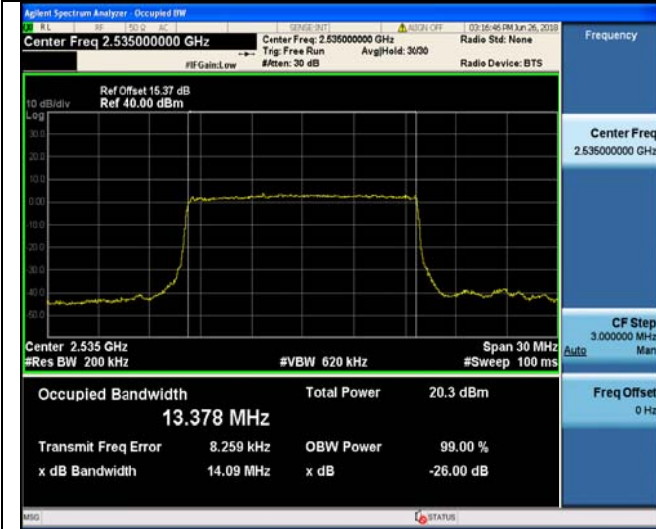

75RB#0

75RB#0

High Channel

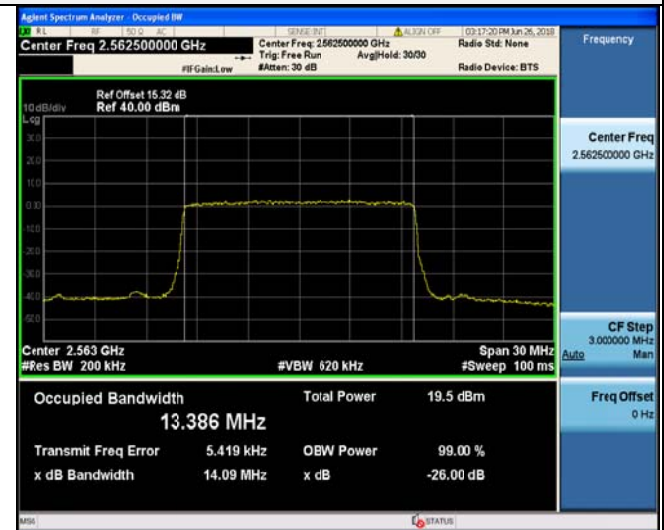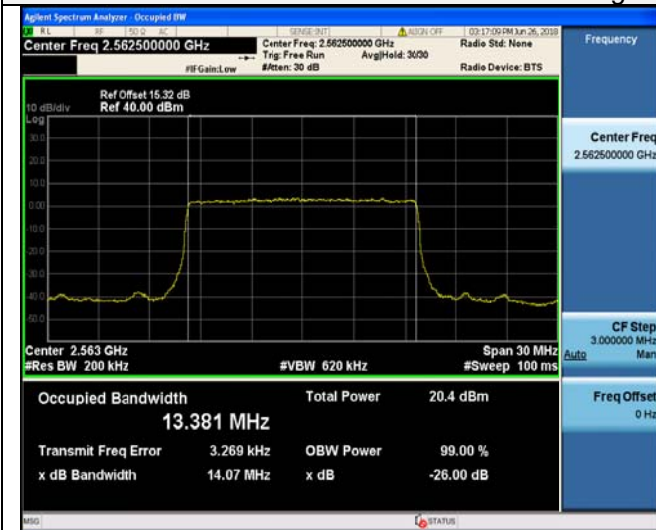

75RB#0

75RB#0




LTE FDD Band 7 – 20 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth


QPSK

16QAM

Low Channel

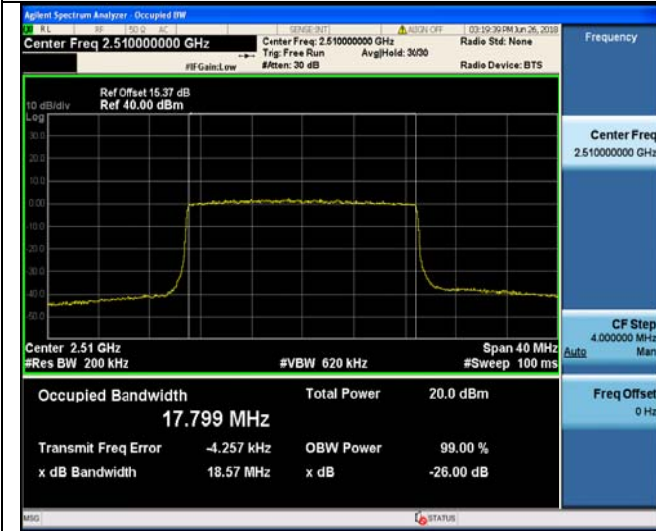


100RB#0

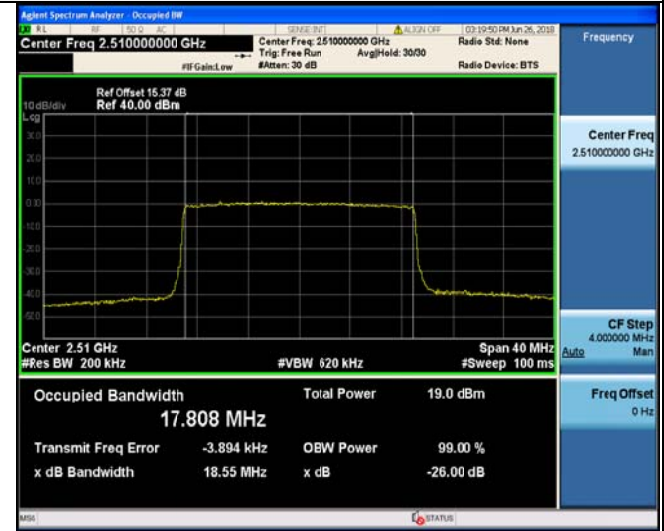


100RB#0

Middle Channel

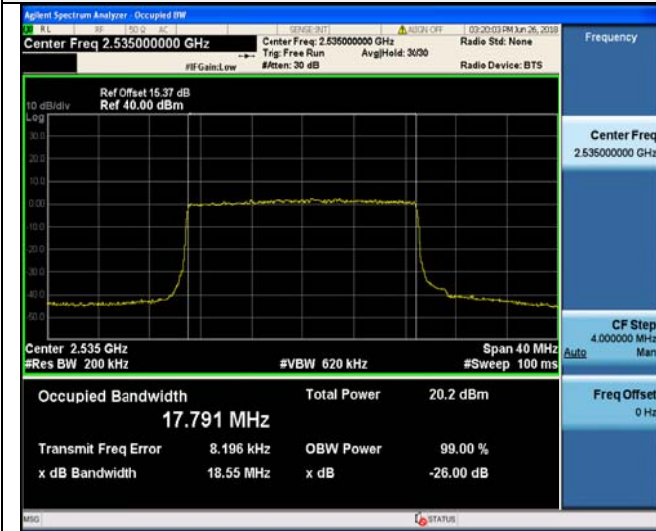


100RB#0

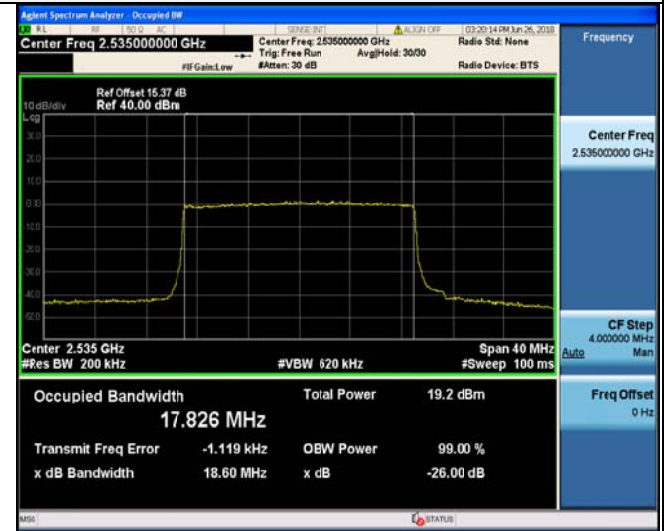


100RB#0

High Channel

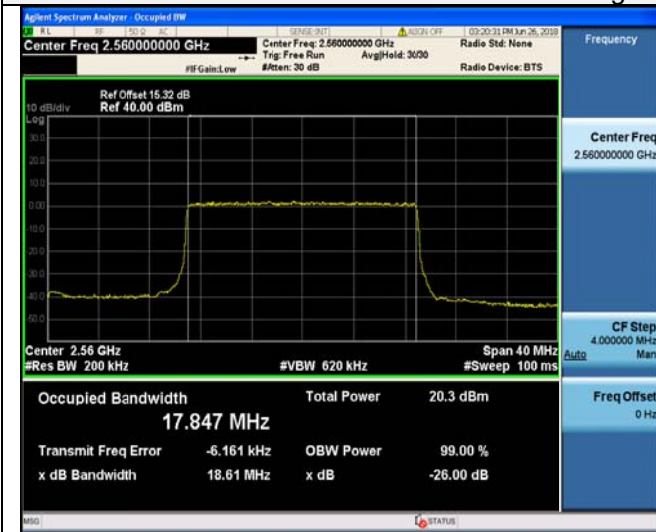

100RB#0

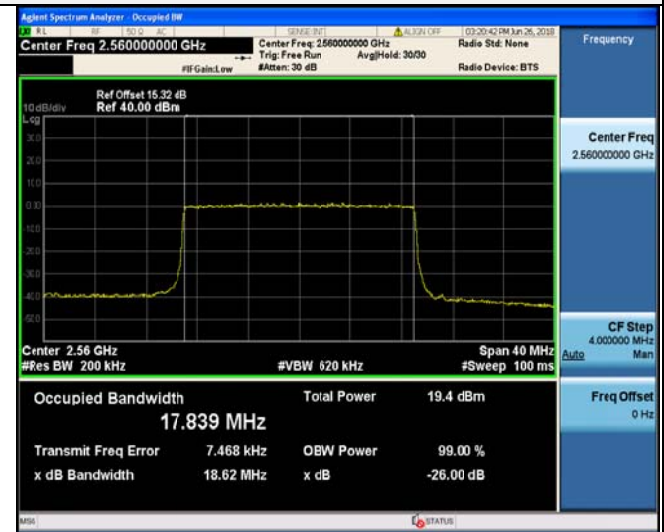

100RB#0



4.4. Band Edge compliance

LIMIT

According to 971168D02

For mobile digital station devices, the attenuation factor shall be not less than:

$40 + 10 \log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge,

$43 + 10 \log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge, and


$55 + 10 \log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB). [Section 27.53(m)(4)]

In addition, the attenuation factor (fixed limit) shall not be less than:

$43 + 10 \log P$ dB on all frequencies between 2490.5 MHz and 2496 MHz, and

$55 + 10 \log P$ dB at or below 2490.5 MHz. [Section 27.53(m)(4)]

TEST CONFIGURATION

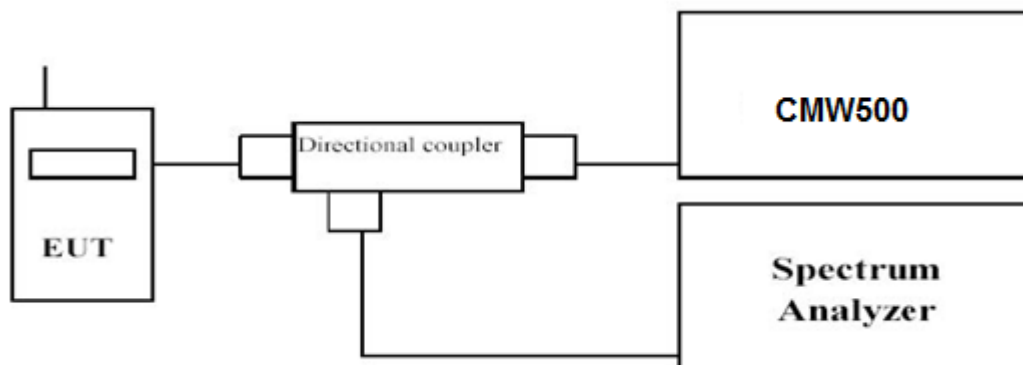

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.



LTE FDD Band 7 – 5 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM

Low Channel



25RB#0



25RB#0

High Channel



25RB#0



25RB#0



LTE FDD Band 7 – 10 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM

Low Channel



50RB#0

50RB#0

High Channel



50RB#0

50RB#0



LTE FDD Band 7 –15 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM

Low Channel



75RB#0

75RB#0

High Channel



75RB#0

75RB#0



LTE FDD Band 7 -20 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM

Low Channel



100RB#0

100RB#0

High Channel



100RB#0

100RB#0




4.5. Spurious Emission on Antenna Port

LIMIT

According to §27.53(h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB.

TEST CONFIGURATION

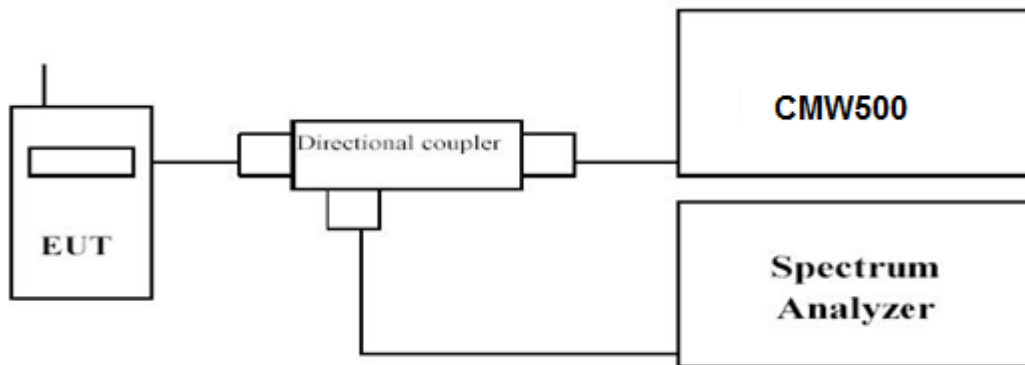

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Coupler.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10^{th} harmonic.
- Please refer to following tables for test antenna conducted emissions.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 7	0.01~26.5	1 MHz	3 MHz	Auto

TEST RESULTS

Remark:


- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case at the QPSK Mode for each Channel Bandwidth of LTE FDD Band 7



LTE FDD Band 7-5 MHz Channel Bandwidth

Low Channel

QPSK

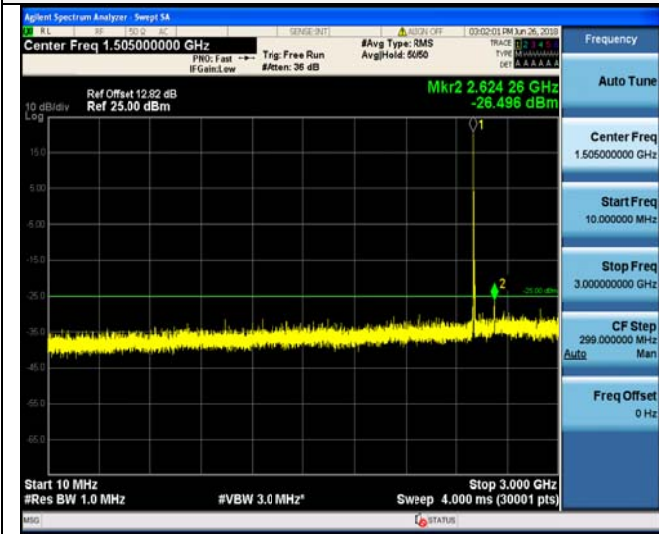

10MHz~3GHz



3 GHz ~9 GHz



9 GHz ~15 GHz




15 GHz ~26.5 GHz



LTE FDD Band 7-5 MHz Channel Bandwidth

Middle Channel

QPSK

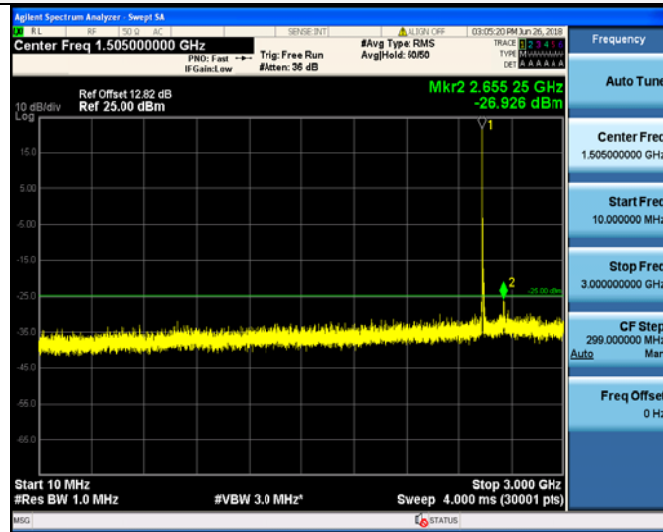

10MHz~3GHz

3 GHz ~9 GHz



9 GHz ~15 GHz


15 GHz ~26.5 GHz



LTE FDD Band 7-5 MHz Channel Bandwidth

High Channel

QPSK

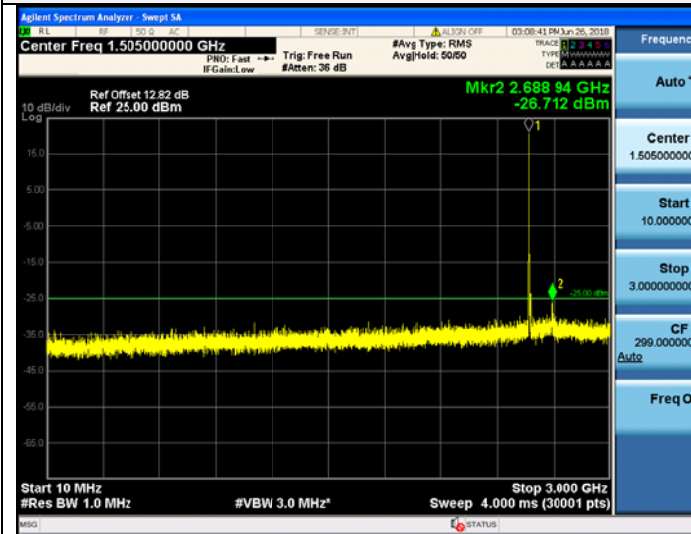

10MHz~3GHz



3 GHz ~9 GHz



9 GHz ~15 GHz



15 GHz ~26.5 GHz



LTE FDD Band 7-10 MHz Channel Bandwidth

Low Channel


QPSK



10MHz~3GHz



3 GHz ~9 GHz

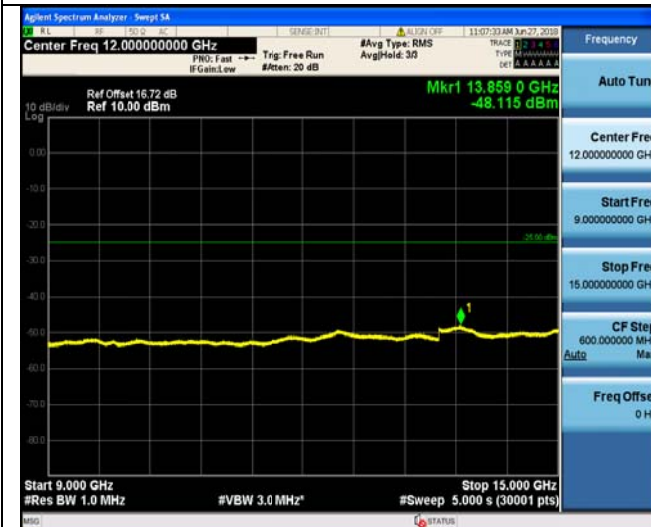

9 GHz ~15 GHz




15 GHz ~26.5 GHz



LTE FDD Band 7-10 MHz Channel Bandwidth

Middle Channel

QPSK

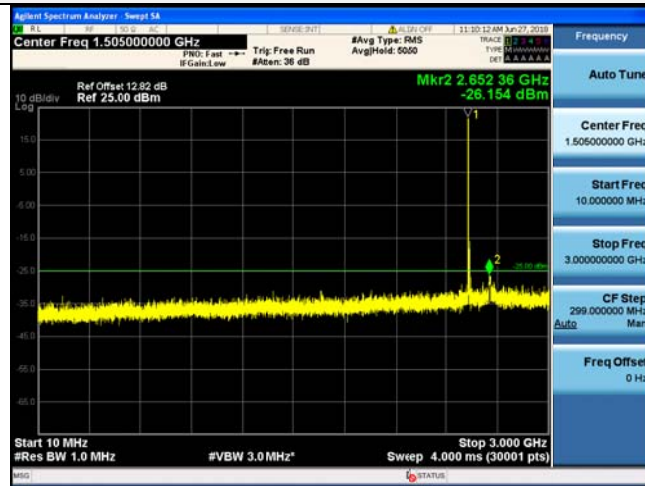

10MHz~3GHz



3 GHz ~9 GHz



9 GHz ~15 GHz




15 GHz ~26.5 GHz



LTE FDD Band 7-10 MHz Channel Bandwidth

High Channel

QPSK

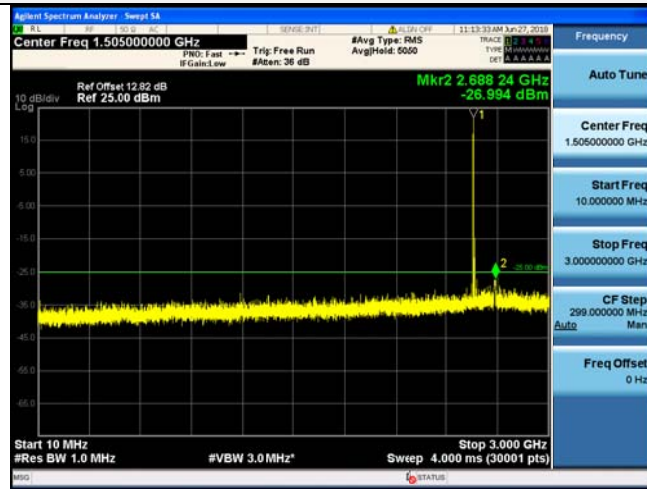

10MHz~3GHz

3 GHz ~9 GHz



9 GHz ~15 GHz


15 GHz ~26.5 GHz



LTE FDD Band 7-15 MHz Channel Bandwidth

Low Channel


QPSK

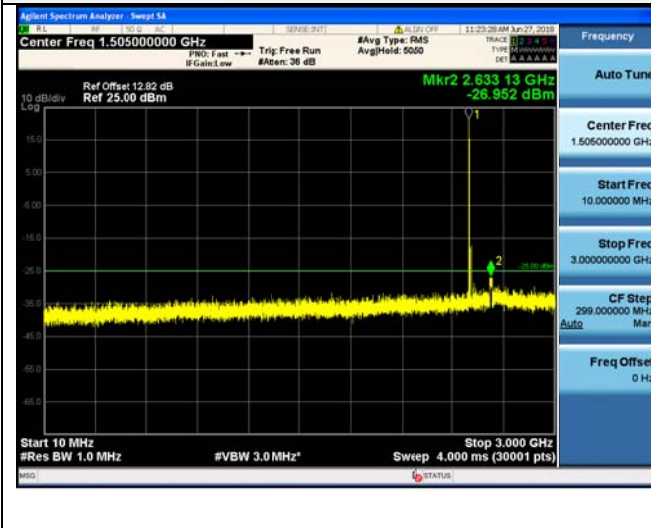

10MHz~3GHz



3 GHz ~9 GHz

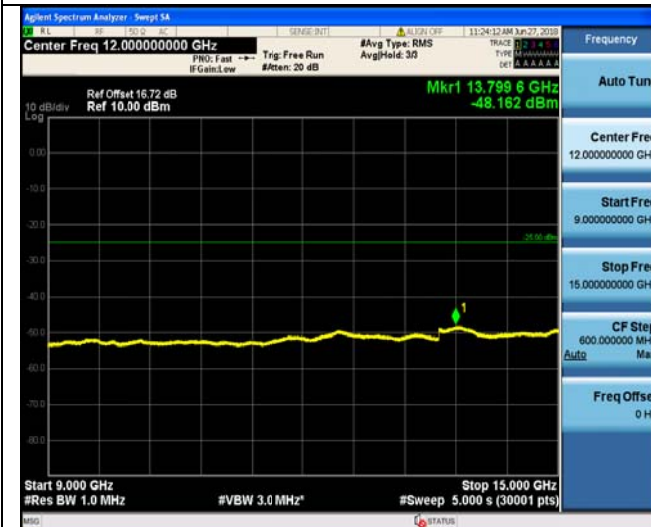

9 GHz ~15 GHz




15 GHz ~26.5 GHz



LTE FDD Band 7-15 MHz Channel Bandwidth

Middle Channel

QPSK

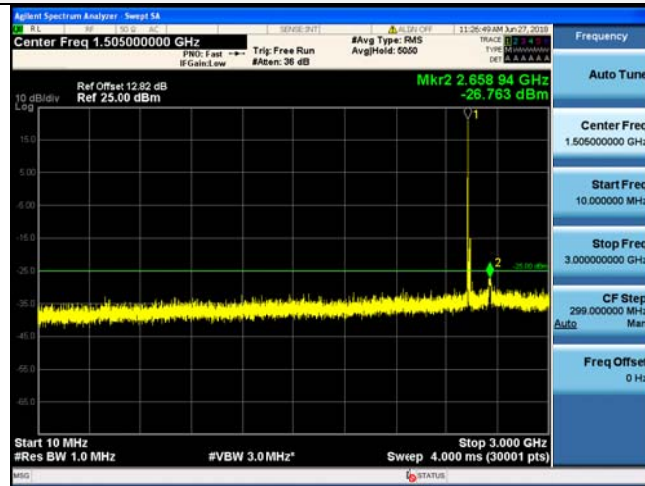

10MHz~3GHz

3 GHz ~9 GHz



9 GHz ~15 GHz


15 GHz ~26.5 GHz



LTE FDD Band 7-15 MHz Channel Bandwidth


High Channel

QPSK

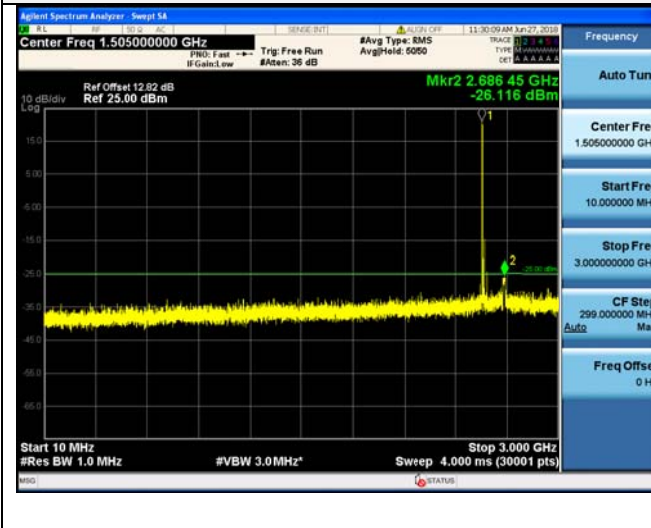

10MHz~3GHz

3 GHz ~9 GHz

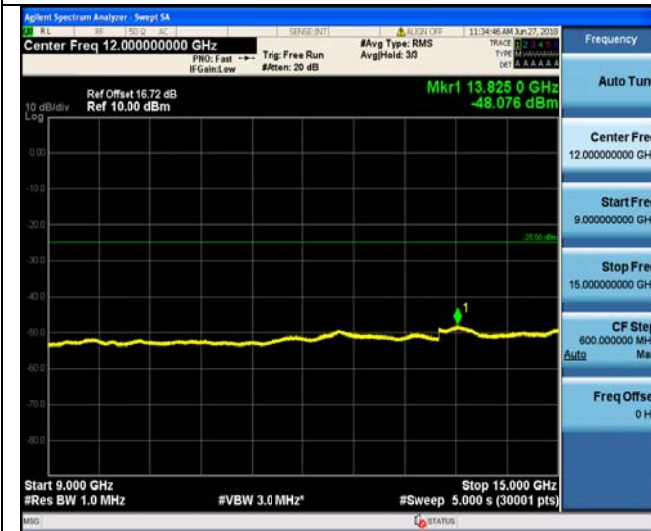

9 GHz ~15 GHz


15 GHz ~26.5 GHz



LTE FDD Band 7-20 MHz Channel Bandwidth

Low Channel

QPSK

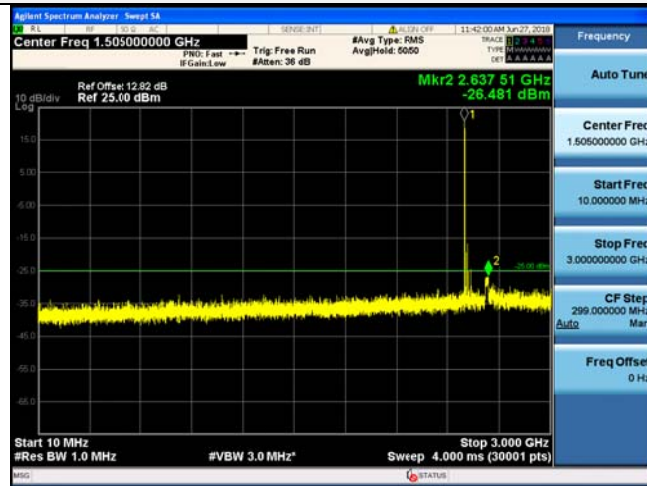

10MHz~3GHz

3 GHz ~9 GHz



9 GHz ~15 GHz


15 GHz ~26.5 GHz



LTE FDD Band 7-20 MHz Channel Bandwidth

Middle Channel

QPSK

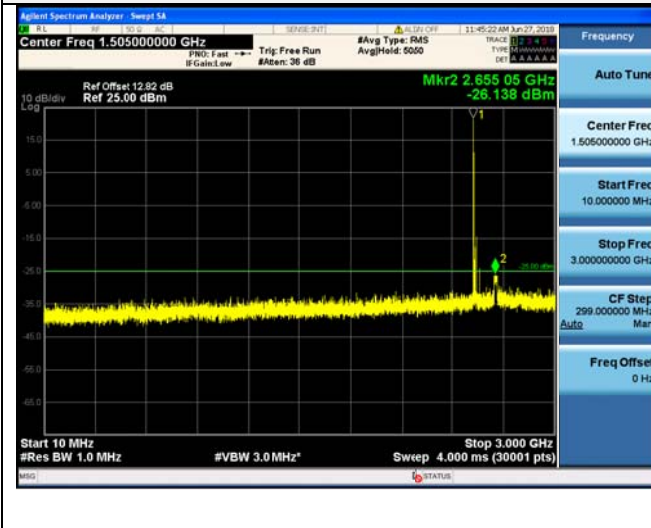

10MHz~3GHz

3 GHz ~9 GHz



9 GHz ~15 GHz


15 GHz ~26.5 GHz



LTE FDD Band 7-20 MHz Channel Bandwidth

High Channel

QPSK

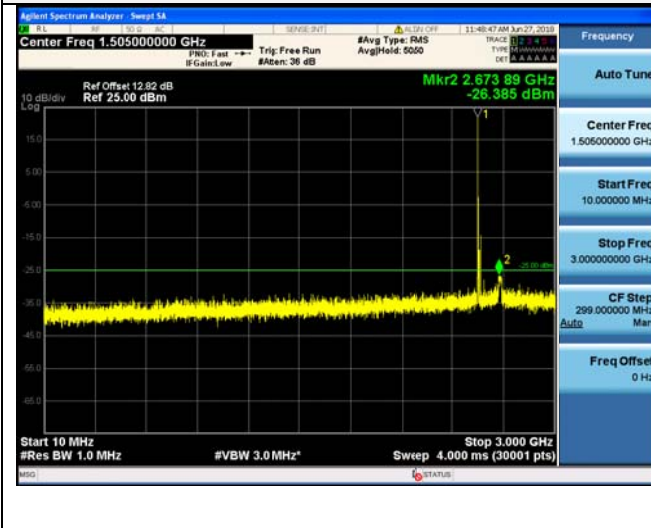

10MHz~3GHz

3 GHz ~9 GHz



9 GHz ~15 GHz


15 GHz ~26.5 GHz

4.6. Radiated Spurious Emission

LIMIT

According to §27.53(h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB.

TEST CONFIGURATION

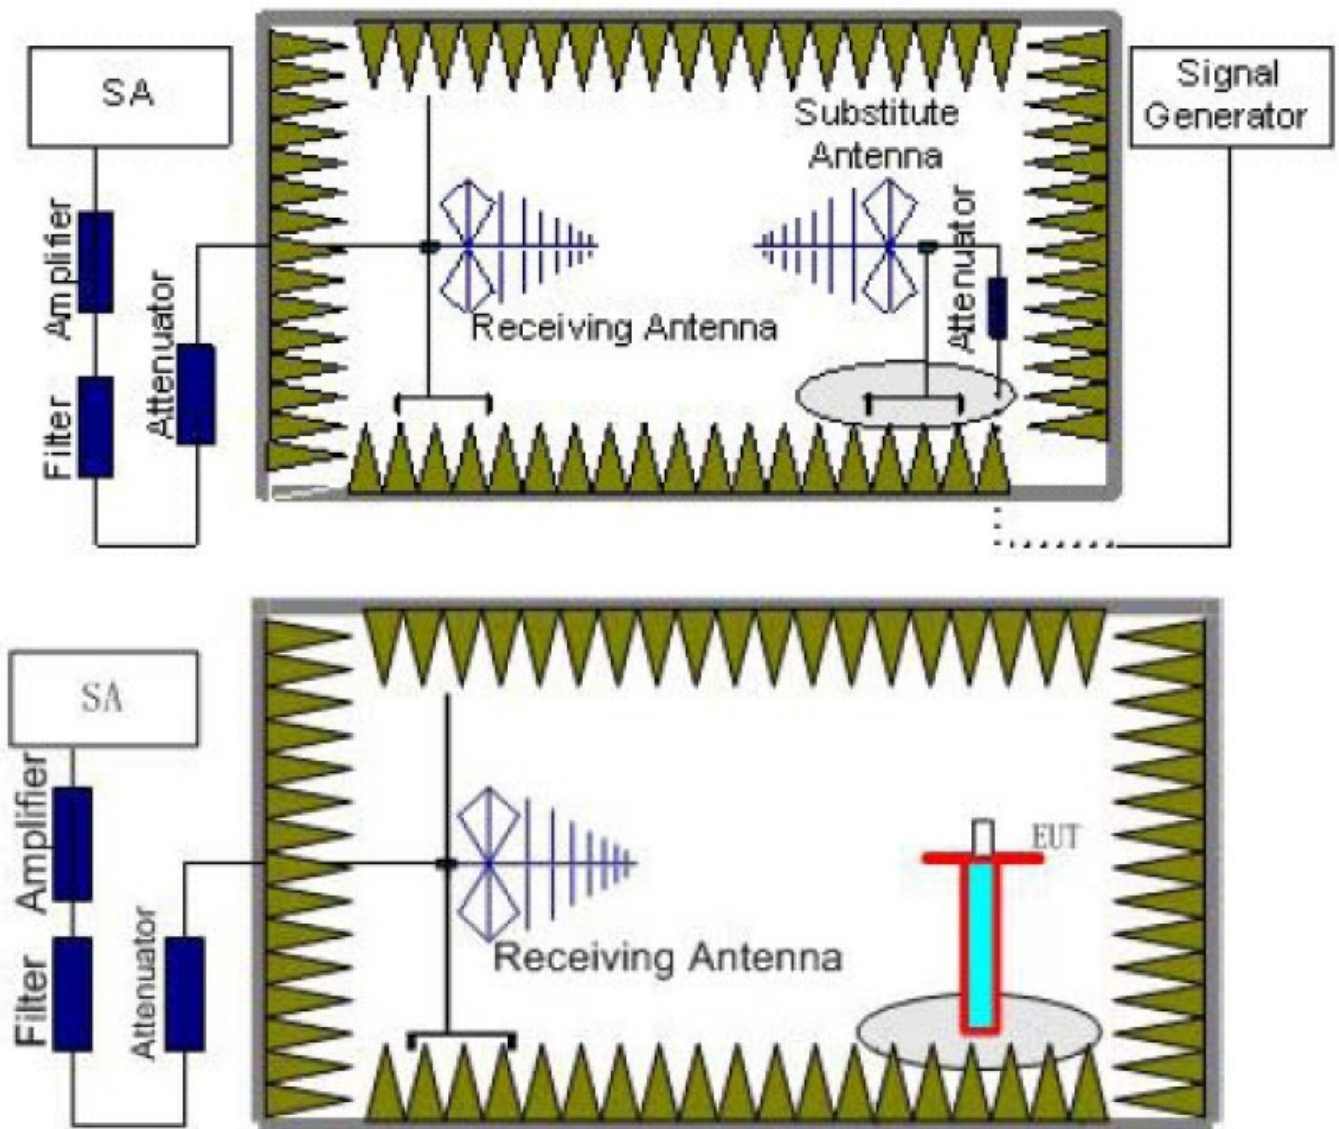

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 meter. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.



3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test. The measurement results are obtained as described below:
Power(EIRP) = $P_{Mea} - P_{Ag} - P_{cl} + G_a$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP - 2.15dBi.
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 7	0.03~1	100KHz	300KHz	10
	1~26.5	1 MHz	3 MHz	2

TEST LIMITS

According to 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
LTE FDD Band 7	Low	30MHz -26.5GHz	PASS
	Middle	30MHz -26.5GHz	PASS
	High	30MHz -26.5GHz	PASS

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. Margin = Limit - EIRP

*LTE FDD Band 7_Channel Bandwidth 5MHz_QPSK_Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5005.00	-44.28	5.11	3.00	13.38	-36.01	-25.00	11.01	H
7507.50	-49.58	6.02	3.00	13.98	-41.62	-25.00	16.62	H
5005.00	-44.97	5.11	3.00	13.38	-36.70	-25.00	11.7	V
7507.50	-50.83	6.02	3.00	13.98	-42.87	-25.00	17.87	V

LTE FDD Band 7_Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-41.80	5.11	3.00	13.38	-33.53	-25.00	8.53	H
7605.00	-49.62	6.02	3.00	13.98	-41.66	-25.00	16.66	H
5070.00	-45.38	5.11	3.00	13.38	-37.11	-25.00	12.11	V
7605.00	-51.56	6.02	3.00	13.98	-43.60	-25.00	18.6	V

LTE FDD Band 7_Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5135.00	-44.49	5.11	3.00	13.38	-35.86	-25.00	10.86	H
7702.50	-48.13	6.02	3.00	13.98	-42.86	-25.00	17.86	H
5135.00	-51.94	5.11	3.00	13.38	-37.11	-25.00	12.11	V
7702.50	-53.73	6.02	3.00	13.98	-44.28	-25.00	19.28	V

LTE FDD Band 7_Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010.00	-46.84	5.11	3.00	13.38	-38.57	-25.00	13.57	H
7515.00	-51.16	6.02	3.00	13.98	-43.2	-25.00	18.2	H
5010.00	-45.9	5.11	3.00	13.38	-37.63	-25.00	12.63	V
7515.00	-53.3	6.02	3.00	13.98	-45.34	-25.00	20.34	V

LTE FDD Band 7_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-45.65	5.11	3.00	13.38	-37.38	-25.00	12.38	H
7605.00	-50.47	6.02	3.00	13.98	-42.51	-25.00	17.51	H
5070.00	-48.47	5.11	3.00	13.38	-40.2	-25.00	15.2	V
7605.00	-50.78	6.02	3.00	13.98	-42.82	-25.00	17.82	V

LTE FDD Band 7_Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5130.00	-44.9	5.11	3.00	13.38	-36.63	-25.00	11.63	H
7695.00	-50.14	6.02	3.00	13.98	-42.18	-25.00	17.18	H
5130.00	-48.49	5.11	3.00	13.38	-40.22	-25.00	15.22	V
7695.00	-51.8	6.02	3.00	13.98	-43.84	-25.00	18.84	V

LTE FDD Band 7_Channel Bandwidth 15MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5015.00	-45.9	5.11	3.00	13.38	-37.63	-25.00	12.63	H
7522.50	-48.57	6.02	3.00	13.98	-40.61	-25.00	15.61	H
5015.00	-48.04	5.11	3.00	13.38	-39.77	-25.00	14.77	V
7522.50	-50.88	6.02	3.00	13.98	-42.92	-25.00	17.92	V

*LTE FDD Band 7_Channel Bandwidth 15MHz_QPSK_Middle Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-45.13	5.11	3.00	13.38	-36.86	-25.00	11.86	H
7605.00	-51.49	6.02	3.00	13.98	-43.53	-25.00	18.53	H
5070.00	-45.82	5.11	3.00	13.38	-37.55	-25.00	12.55	V
7605.00	-53.51	6.02	3.00	13.98	-45.55	-25.00	20.55	V

LTE FDD Band 7_Channel Bandwidth 15MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5125.00	-45.46	5.11	3.00	13.38	-37.19	-25.00	12.19	H
7687.50	-51.70	6.02	3.00	13.98	-43.74	-25.00	18.74	H
5125.00	-46.58	5.11	3.00	13.38	-38.31	-25.00	13.31	V
7687.50	-53.51	6.02	3.00	13.98	-45.55	-25.00	20.55	V

LTE FDD Band 7_Channel Bandwidth 20MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5020.00	-46.03	5.11	3.00	13.38	-37.76	-25.00	12.76	H
7530.00	-52.72	6.02	3.00	13.98	-44.76	-25.00	19.76	H
5020.00	-48.75	5.11	3.00	13.38	-40.48	-25.00	15.48	V
7530.00	-54.85	6.02	3.00	13.98	-46.89	-25.00	21.89	V

LTE FDD Band 7_Channel Bandwidth 20MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-48.03	5.11	3.00	13.38	-39.76	-25.00	14.76	H
7605.00	-51.09	6.02	3.00	13.98	-43.13	-25.00	18.13	H
5070.00	-48.50	5.11	3.00	13.38	-40.23	-25.00	15.23	V
7605.00	-51.74	6.02	3.00	13.98	-43.78	-25.00	18.78	V

LTE FDD 7_Channel Bandwidth 20MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5120.00	-47.11	5.11	3.00	13.38	-38.84	-25.00	13.84	H
7680.00	-51.68	6.02	3.00	13.98	-43.72	-25.00	18.72	H
5120.00	-48.02	5.11	3.00	13.38	-39.75	-25.00	14.75	V
7680.00	-53.56	6.02	3.00	13.98	-45.6	-25.00	20.6	V

LTE FDD Band 7_Channel Bandwidth 5MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5005.00	-45.95	5.11	3.00	13.38	-37.68	-25.00	12.68	H
7507.50	-50.29	6.02	3.00	13.98	-42.33	-25.00	17.33	H
5005.00	-48.01	5.11	3.00	13.38	-39.74	-25.00	14.74	V
7507.50	-52.59	6.02	3.00	13.98	-44.63	-25.00	19.63	V

LTE FDD Band 7_Channel Bandwidth 5MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-44.57	5.11	3.00	13.38	-36.3	-25.00	11.3	H
7605.00	-48.33	6.02	3.00	13.98	-40.37	-25.00	15.37	H
5070.00	-46.36	5.11	3.00	13.38	-38.09	-25.00	13.09	V
7605.00	-51.58	6.02	3.00	13.98	-43.62	-25.00	18.62	V

*LTE FDD Band 7_Channel Bandwidth 5MHz_16QAM_High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5135.00	-45.97	5.11	3.00	13.38	-37.7	-25.00	12.7	H
7702.50	-49.29	6.02	3.00	13.98	-41.33	-25.00	16.33	H
5135.00	-49.29	5.11	3.00	13.38	-41.02	-25.00	16.02	V
7702.50	-51.31	6.02	3.00	13.98	-43.35	-25.00	18.35	V

LTE FDD Band 7_Channel Bandwidth 10MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010.00	-37.19	5.11	3.00	13.38	-28.92	-25.00	3.92	H
7515.00	-43.67	6.02	3.00	13.98	-35.71	-25.00	10.71	H
5010.00	-39.64	5.11	3.00	13.38	-31.37	-25.00	6.37	V
7515.00	-45.23	6.02	3.00	13.98	-37.27	-25.00	12.27	V

LTE FDD Band 7_Channel Bandwidth 10MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-45.91	5.11	3.00	13.38	-37.64	-25.00	12.64	H
7605.00	-50.46	6.02	3.00	13.98	-42.50	-25.00	17.5	H
5070.00	-48.01	5.11	3.00	13.38	-39.74	-25.00	14.74	V
7605.00	-51.89	6.02	3.00	13.98	-43.93	-25.00	18.93	V

LTE FDD Band 7_Channel Bandwidth 10MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5130.00	-47.75	5.11	3.00	13.38	-39.48	-25.00	14.48	H
7695.00	-53.79	6.02	3.00	13.98	-45.83	-25.00	20.83	H
5130.00	-49.21	5.11	3.00	13.38	-40.94	-25.00	15.94	V
7695.00	-52.46	6.02	3.00	13.98	-44.50	-25.00	19.5	V

LTE FDD Band 7_Channel Bandwidth 15MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5015.00	-48.76	5.11	3.00	13.38	-40.49	-25.00	15.49	H
7522.50	-50.69	6.02	3.00	13.98	-42.73	-25.00	17.73	H
5015.00	-50.00	5.11	3.00	13.38	-41.73	-25.00	16.73	V
7522.50	-52.45	6.02	3.00	13.98	-44.49	-25.00	19.49	V

LTE FDD Band 7_Channel Bandwidth 15MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-46.56	5.11	3.00	13.38	-38.29	-25.00	13.29	H
7605.00	-50.62	6.02	3.00	13.98	-42.66	-25.00	17.66	H
5070.00	-49.00	5.11	3.00	13.38	-40.73	-25.00	15.73	V
7605.00	-51.93	6.02	3.00	13.98	-43.97	-25.00	18.97	V

LTE FDD Band 7_Channel Bandwidth 15MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5125.00	-48.96	5.11	3.00	13.38	-40.69	-25.00	15.69	H
7687.50	-51.37	6.02	3.00	13.98	-43.41	-25.00	18.41	H
5125.00	-50.00	5.11	3.00	13.38	-41.73	-25.00	16.73	V
7687.50	-54.11	6.02	3.00	13.98	-46.15	-25.00	21.15	V

*LTE FDD Band 7_Channel Bandwidth 20MHz_16QAM_ Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5020.00	-49.95	5.11	3.00	13.38	-41.68	-25.00	16.68	H
7530.00	-54.92	6.02	3.00	13.98	-46.96	-25.00	21.96	H
5020.00	-49.01	5.11	3.00	13.38	-40.74	-25.00	15.74	V
7530.00	-55.40	6.02	3.00	13.98	-47.44	-25.00	22.44	V

LTE FDD Band 7_Channel Bandwidth 20MHz_16QAM_ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-47.75	5.11	3.00	13.38	-39.48	-25.00	14.48	H
7605.00	-50.47	6.02	3.00	13.98	-42.51	-25.00	17.51	H
5070.00	-46.44	5.11	3.00	13.38	-38.17	-25.00	13.17	V
7605.00	-51.69	6.02	3.00	13.98	-43.73	-25.00	18.73	V

LTE FDD Band 7_Channel Bandwidth 20MHz_16QAM_ High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5120.00	-46.65	5.11	3.00	13.38	-38.38	-25.00	13.38	H
7680.00	-51.63	6.02	3.00	13.98	-43.67	-25.00	18.67	H
5120.00	-48.88	5.11	3.00	13.38	-40.61	-25.00	15.61	V
7680.00	-53.93	6.02	3.00	13.98	-45.97	-25.00	20.97	V




4.7. Frequency Stability

LIMIT

According to §27.54, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

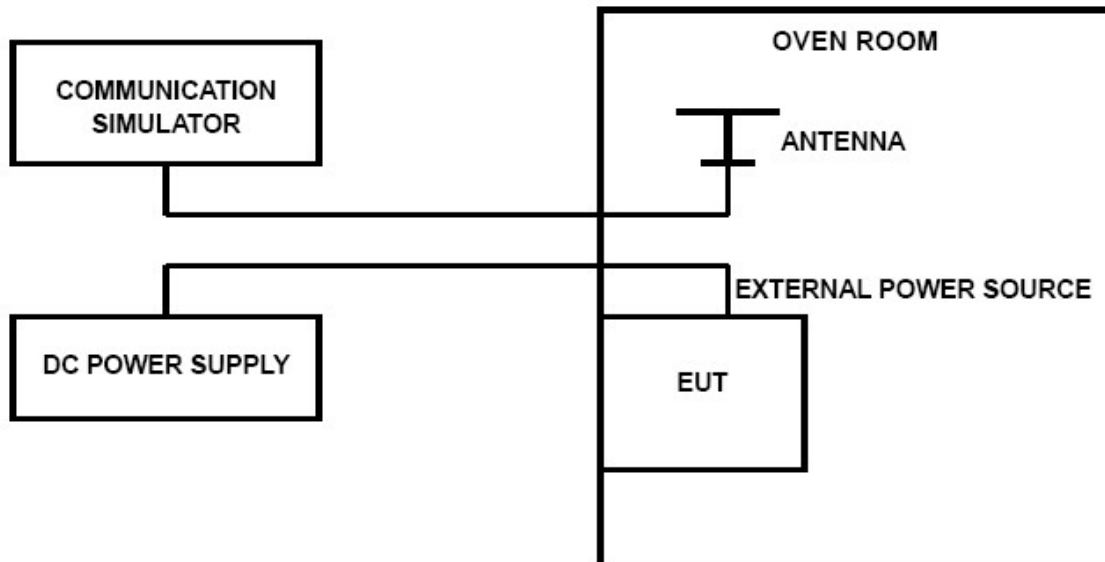

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 4, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

**TEST RESULTS**

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case.


LTE Band 7, 5 MHz bandwidth , QPSK (worst case of all bandwidths)

LTE FDD Band 7					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
3.40	20	17	0.0067	2.50	PASS
3.70	20	23	0.0091	2.50	PASS
4.20	20	25	0.0099	2.50	PASS
3.70	-30	26	0.0103	2.50	PASS
3.70	-20	37	0.0146	2.50	PASS
3.70	-10	12	0.0047	2.50	PASS
3.70	0	9	0.0036	2.50	PASS
3.70	10	13	0.0051	2.50	PASS
3.70	20	15	0.0059	2.50	PASS
3.70	30	13	0.0051	2.50	PASS
3.70	40	27	0.0107	2.50	PASS
3.70	50	32	0.0126	2.50	PASS

LTE Band 7, 5 MHz bandwidth , 16QAM (worst case of all bandwidths)

LTE FDD Band 7					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
3.40	20	19	0.0075	2.50	PASS
3.70	20	17	0.0067	2.50	PASS
4.20	20	23	0.0091	2.50	PASS
3.70	-30	31	0.0122	2.50	PASS
3.70	-20	33	0.0130	2.50	PASS
3.70	-10	17	0.0067	2.50	PASS
3.70	0	22	0.0087	2.50	PASS
3.70	10	65	0.0256	2.50	PASS
3.70	20	16	0.0063	2.50	PASS
3.70	30	21	0.0083	2.50	PASS
3.70	40	29	0.0114	2.50	PASS
3.70	50	21	0.0083	2.50	PASS

5. Test Setup Photos of the EUT

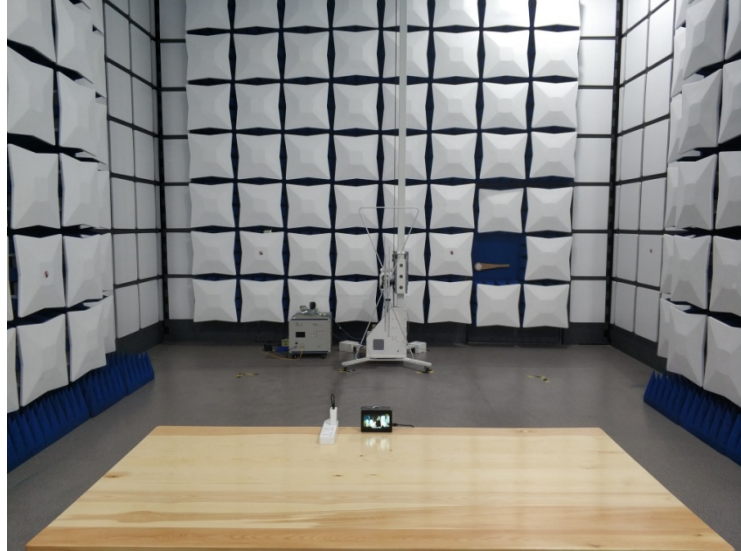

6. External and Internal Photos of the EUT

Reference to the test report No. HK180619343-1E

*****End of Report*****