

# **FCC Test Report**

Report No.:AGC00384180701FE02

FCC ID : 2AQLUTD-11

APPLICATION PURPOSE : Original Equipment

**PRODUCT DESIGNATION**: WCDMA Wireless Data Terminal

BRAND NAME : CarePro

MODEL NAME : TD-11

**CLIENT**: SHENZHEN MOTTO ELECTRONICS CO., LTD.

**DATE OF ISSUE** : Aug. 03, 2018

**STANDARD(S)** : FCC Part 22H & 24E Rules

REPORT VERSION : V1.1

# Attestation of Global Compliance (Shenzhen) Co., Ltd.

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spowfor this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-cett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118
Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 68

#### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0		July 27, 2018	Invalid	Initial Release
V1.1	1 <sup>st</sup>	Aug. 03, 2018	Valid	Revise Report

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955

Fax: +86-755 2600 8484

E-mail: agc@agc-cert.com

**6** 400 089 2118

 $Add: 2/F.\ , Building\ 2, No.1-4, Chaxi\ Sanwei\ Technical\ Industrial\ Park, Gushu,\ Xixiang,\ Baoan\ District,\ Shenzhen,\ Guangdong\ Chinang Chinangdong\ Ch$ 



# Report No.: AGC00384180701FE02 Page 3 of 68

# TABLE OF CONTENTS

1.VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION	6
2.2RELATED SUBMITTAL(S) / GRANT (S)	
2.3 TEST METHODOLOGY	
2.4 TEST FACILITY	
2.6 SPECIAL ACCESSORIES	
2.7 EQUIPMENT MODIFICATIONS	10
3. SYSTEM TEST CONFIGURATION	
3.1 EUT CONFIGURATION	11
3.2 EUT EXERCISE	11
3.3 CONFIGURATION OF EUT SYSTEM	
4. SUMMARY OF TEST RESULTS	
5. DESCRIPTION OF TEST MODES	13
6. OUTPUT POWER	14
6.1 CONDUCTED OUTPUT POWER	14
6.2 RADIATED OUTPUT POWER	20
6.2.1 MEASUREMENT METHOD	20
6.2.2 PROVISIONS APPLICABLE	21
6.3. PEAK-TO-AVERAGE RATIO	24
6.3.1 MEASUREMENT METHOD	24
6.3.2 PROVISIONS APPLICABLE	24
6.3.3 MEASUREMENT RESULT	
7. OCCUPIED BANDWIDTH	26
7.1 MEASUREMENT METHOD	26
7.2 PROVISIONS APPLICABLE	
7.3 MEASUREMENT RESULT	27
8. BAND EDGE	33
8.1 MEASUREMENT METHOD8.2 PROVISIONS APPLICABLE	33
8.2 PROVISIONS APPLICABLE	33
8.3 MEASUREMENT RESULT	34
9. SPURIOUS EMISSION	
9.1 CONDUCTED SPURIOUS EMISSION	37
9.2 RADIATED SPURIOUS EMISSION	52
9.2.2 TEST SETUP	53
10. FREQUENCY STABILITY  The results spowther this jest report refer only to the sample(s) rested unless otherwise stated and the sample(s) are retained for 31 issued by AGG this opposition and the details and the authorifirmed at all provided the confirmed at all provided th	U days only. The documen enticity of the report will by



Report No.: AGC00384	180701FE02
	Page 4 of 68

10.2 PROVISIONS APPLICABLE	The state of	58
10.2 MEACHDEMENT DECLUT		bal Con
APPENDIX A: PHOTOGRAPHS OF TEST SETUP		67

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

 $Add: 2/F.\ , Building\ 2, No.1-4, Chaxi\ Sanwei\ Technical\ Industrial\ Park, Gushu,\ Xixiang,\ Baoan\ District,\ Shenzhen,\ Guangdong\ Chinang Chinangdong\ Ch$ 



Page 5 of 68

#### 1.VERIFICATION OF COMPLIANCE

SHENZHEN MOTTO ELECTRONICS CO., LTD.  Floor 2,Building D,No.71-4 Of Xintian Avenue,Fuyong St.,Baoan Dist.,518103 Shenzhen,Guangdong,China
32 183
SHENZHEN MOTTO ELECTRONICS CO., LTD.
Floor 2, Building D, No. 71-4 Of Xintian Avenue, Fuyong St., Baoan Dist., 518103 Shenzhen, Guangdong, China
WCDMA Wireless Data Terminal
CarePro
TD-11
July 11, 2018~July 27, 2018
None
Normal

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

Tested By	donjon strang	
C Market of Control	Donjon Huang(Huang dongyang)	July 27, 2018
Reviewed By	Bore sie	
And Colonic Co	Bart Xie(Xie Xiaobin)	Aug. 03, 2018
Approved By	Forest ei	
© Mary Took of Contract Company	Forrest Lei(Lei Yonggang)  Authorized Officer	Aug. 03, 2018

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 6 of 68

#### 2. GENERAL INFORMATION

#### 2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	WCDMA Wireless Data Terminal
Hardware version:	G76-MB
Software version:	G76lca_b2b5_akq_boy_fcc_english_20180709
IN The produce IN The produce	⊠GSM 850 ⊠PCS1900 (U.S. Bands)
	⊠GSM 900 ⊠DCS 1800 (Non-U.S. Bands)
Frequency Bands:	☑UMTS FDD Band II ☐UMTS FDD Band IV
	⊠UMTS FDD Band V (U.S. Bands)
	☐UMTS FDD Band I ☐UMTS FDD Band VIII (Non-U.S. Bands)
Antenna Type	Internal Antenna
The of Madulation	GSM / GPRS :GMSK
Type of Modulation	WCDMA: QPSK
在型	GSM850:1.20dBi; PCS1900: 1.10dBi;
Antenna gain	WCDMA850: 1.12dBi; WCDMA1900:1.10dBi
Power Supply:	DC 3.7V by battery
Battery parameter:	DC3.7V/550mAh
Single Card:	GSM /WCDMA Card Slot
GPRS Class	12
Extreme Vol. Limits:	DC3.4 V to 4.2 V (Normal: DC3.2 V)
Extreme Temp. Tolerance	-10°C to +50°C
*** Note: 1. The High Voltage D	C4.2V and Low Voltage DC3.4V were declared by manufacturer
2. The EUT couldn't be	e operating normally with higher or lower voltage.

2. We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst caseas a representative.

The results spown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

<sup>\*\*\*</sup> Note:1.The maximum power levels are GSM for MCS-4: GMSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band V, only these modes were used for all tests.



Page 7 of 68

#### **GSM/WCDMA Card Slot:**

	Maximum ERP/EIRP	Max. Conducted Power	Max. Average
	(dBm)	(dBm)	Burst Power (dBm)
GSM 850	31.01	32.44	31.24
PCS 1900	27.44	29.28	28.56
UMTS BAND II	21.69	23.40	22.61
UMTS BAND V	21.11	23.52	21.32

The results spouroid this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 8 of 68

#### 2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AQLUTD-11**, filing to comply with the FCC Part 22H&24E requirements.

#### 2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-E-2016, and KDB 971168 D01 Power Means License Digital Systems V03R01.

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Report No.: AGC00384180701FE02 Page 9 of 68

#### 2.4 TEST FACILITY

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, ChaxiSanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, BaoanBldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP LAB CODE	600153-0
Designation Number	CN5028
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0

#### **ALL TEST EQUIPMENT LIST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.12, 2018	Jun.11, 2019
LISN	R&S	ESH2-Z5	100086	Aug.21, 2017	Aug.20, 2018
TEST RECEIVER	R&S	ESCI	10096	Jun.12, 2018	Jun.11, 2019
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May.18, 2017	May.17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.12, 2018	Jun.11, 2019
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
SIGNAL ANALYZER	Agilent	N9020A	MY52090123	Sep. 21, 2017	Sep. 20, 2018
USB Wideband Power Sensor	Agilent	U2021XA	MY54110007	Sep. 21, 2017	Sep. 20, 2018
Universal Radio Communication Tester	R&S	CMU200	120237	Mar.01,2018	Feb.28,2019
Universal Radio Communication Tester	Agilent	8960	GB46200384	July 14,2018	July 13,2019
Power Splitter	Agilent	11636A	34	Sep.21,2017	Sep.20,2018
Attenuator	JFW 1	50FHC-006-50	N/A	Jun.12, 2018	Jun.11, 2019

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 10 of 68

#### 2.6 SPECIAL ACCESSORIES

The battery wassupplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

#### 2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a titp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 11 of 68

#### 3. SYSTEM TEST CONFIGURATION

#### 3.1 EUT CONFIGURATION

The EUTconfiguration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

#### 3.3 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Remark
# 1000 m	WCDMA Wireless Data Terminal	TD-11	2AQLUTD-11	EUT
2	Battery	602930	DC3.7V/ 550mAh	Accessory
3	USB	N/A	N/A	Accessory

<sup>\*\*\*</sup>Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 12 of 68

**@** 400 089 2118

# 4. SUMMARY OF TEST RESULTS

Item Number	Item Des	cription	FCC Rules	Result
	A Second	Conducted Output Power	2.1046	
1 Output Power	Output Power	Radiated Output Power	22.913(a) (2) / 24.232 (c)	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
The state of the s		Conducted Spurious Emission	2.4054/22.047/24.220	GC Pass
3 Spurious Emission	Spurious Emission	Radiated Spurious Emission	2.1051/22.917/24.238	Pass
4	Frequency Stability		2.1055/22.355/24.235	Pass
5	Occupied Bandwidth		2.1049	Pass
6	Band Edge		2.1051/22.917(a)/24.238(a)	Pass

The results spouroid this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 13 of 68

#### 5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200)to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSMand PCS frequency band.

\*\*\*Note: GSM/GPRS 850, GSM/GPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V,mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.

The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 14 of 68

#### 6. OUTPUT POWER

#### **6.1 CONDUCTED OUTPUT POWER**

#### **6.1.1 MEASUREMENT METHOD**

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS 850, GSM/GPRS1900, WCDMA/HSPA band II,WCDMA/HSPA band V)at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

#### **6.1.2 MEASUREMENT RESULT**

	Conducted Output Power Limits for	or GPRS 850band		
Mode	Nominal Peak Power	Tolerance(dB)		
GSM	33 dBm (2W)	- 2		
GPRS	33 dBm (2W)	- 2		
<u>_</u>	Conducted Output Power Limits fo	or GPRS 1900band		
Mode	Nominal Peak Power	Tolerance(dB)		
GSM	30 dBm (1W)	- 2		
GPRS	30 dBm (1W)	- 2		
<u> </u>	Conducted Output Power Limits	for UMTS band V		
Mode	Nominal Peak Power	Tolerance(dB)		
WCDMA	24dBm (0.25W)	- 2		
	Conducted Output Power Limits f	or UMTS band IV		
Mode	Nominal Peak Power	Tolerance(dB)		
WCDMA	24dBm (0.25W)	- 2		
	Conducted Output Power Limits	for UMTS band II		
Mode	Nominal Peak Power	Tolerance(dB)		
WCDMA	24dBm (0.25W)	-2		

The results spowfill this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gott.com.



Page 15 of 68

#### **GSM 850:**

Alle			- All		LA.	3/1	Jak Cou.
Mode	Frequency	Reference	Peak	Tolerance	Avg.Burst	Duty cycle	Frame
(MF	(MHz)	Power	Power	Tolerance	Power	Factor(dB)	Power(dBm)
obalco.	824.2	33	32.44	-0.56	31.24	-9	22.24
GSM850	836.6	33	32.23	-0.77	31.17	-9	22.17
	848.8	33	32.11	-0.89	31.18	J. J	22.18
CDDCCC	824.2	33	31.08	-1.92	30.11	-9	21.11
GPRS850 (1 Slot)	836.6	33	31.11	-1.89	30.23	-9	21.23
	848.8	33	31.32	-1.68	30.46	-9 🔨	21.46
ODDOOSO	824.2	30	29.58	-0.42	28.33	-6	22.33
GPRS850	836.6	30	29.34	-0.66	28.05	-6	22.05
(2 Slot)	848.8	30	29.74	-0.26	28.11	-6	22.11
000000	824.2	28.23	27.36	-0.87	26.12	-4.26	21.86
GPRS850	836.6	28.23	27.11	-1.12	26.26	-4.26	22.00
(3 Slot)	848.8	28.23	27.23	-1.00	26.33	-4.26	22.07
GPRS850	824.2	27	26.29	-0.71	25.42	-3	22.42
	836.6	27	26.34	-0.66	25.25	-3	22.25
(4 Slot)	848.8	27	26.42	-0.58	25.42	-3	22.42

The results spouroid this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 16 of 68

#### PCS 1900:

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
® Allestation	1850.2	30	29.28	-0.72	28.56	-9	19.56
GSM1900	1880	30	29.10	-0.90	28.44	√ -9	19.44
TK 控制	1909.8	30	29.09	-0.91	28.37	-9	19.37
00004000	1850.2	30	28.25	-1.75	27.25	-9	18.25
GPRS1900	1880	30	28.36	-1.64	27.08	-9	18.08
(1 Slot)	1909.8	30	28.47	-1.53	27.19	-9	18.19
00004000	1850.2	27	25.28	-1.72	24.34	-6	18.34
GPRS1900	1880	27	25.43	-1.57	24.42	-6	18.42
(2 Slot)	1909.8	27	25.53	-1.47	24.35	-6	18.35
ODD04000	1850.2	25.23	24.11	-1.12	23.25	-4.26	18.99
(3 Slot)	1880	25.23	24.09	-1.14	23.44	-4.26	19.18
	1909.8	25.23	24.43	-0.80	23.34	-4.26	19.08
60	1850.2	24	23.27	-0.73	22.47	-3	19.47
GPRS1900	1880	24	23.34	-0.66	22.35	-3	19.35
(4 Slot)	1909.8	24	23.27	-0.73	22.50	-3	19.50

The results spouroid this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Report No.: AGC00384180701FE02 Page 17 of 68

#### **UMTS BAND II**

		CIVITS	DANDII		
Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Powe
(a) The state of t	1852.4	24	23.02	-0.98	22.61
WCDMA1900 RMC	1880	24	23.40	-0.60	22.39
CINIC	1907.6	24	23.18	-0.82	22.51
The Compliance	1852.4	24	23.06	-0.94	22.04
WCDMA1900 AMR	1880	24	23.13	-0.87	21.98
AlviiX	1907.6	24	23.34	-0.66	21.88
11000	1852.4	24	21.02	-2.98	20.93
HSDPA -	1880	24	20.85	-3.15	21.13
Subtest 1	1907.6	24	21.07	-2.93	20.78
LICDEA	1852.4	24	22.19	-1.81	20.28
HSDPA -	1880	24	22.36	-1.64	20.48
Subtest 2	1907.6	24	22.20	-1.80	20.78
LIODDA	1852.4	24	22.24	-1.76	20.14
HSDPA -	1880	24	22.18	-1.82	20.15
	1907.6	24	22.10	-1.90	20.11
LICDDA	1852.4	24	22.74	-1.26	20.20
HSDPA -	1880	24	22.31	-1.69	20.46
Subtest 4	1907.6	24	22.16	-1.84	20.41
LICLIDA	1852.4	24	22.42	-1.58	20.84
HSUPA -	1880	24	21.61	-2.39	20.68
Subtest 1	1907.6	24	22.42	-1.58	20.24
HSUPA -	1852.4	24	22.40	-1.60	21.49
	1880	24	22.40	-1.60	21.48
Subtest 2	1907.6	24	22.63	-1.37	21.56
LICUDA	1852.4	24	22.52	-1.48	21.22
HSUPA -	1880	24	22.25	-1.75	21.42
Subtest 3	1907.6	24	21.57	-2.43	21.44
HCI IDA	1852.4	24	22.48	-1.52	21.37
HSUPA -	1880	24	22.30	-1.70	22.27
Subtest 4	1907.6	24	22.18	-1.82	22.24
HCLIDA	1852.4	24	22.88	-1.12	21.24
HSUPA -	1880	24	22.44	-1.56	21.82
Subtest 5	1907.6	24	22.75	-1.25	21.94

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



Report No.: AGC00384180701FE02 Page 18 of 68

#### **UMTS BAND V**

		UMITS	BAND V		
Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Powe
abal Compile	826.4	24	23.45	-0.55	21.14
WCDMA850 RMC	836.4	24	23.15	-0.85	21.07
	846.6	24	23.52	-0.48	21.32
10 m	826.4	o / 24	22.66	-1.34	20.92
WCDMA850 AMR	836.4	24	22.66	-1.34	20.94
	846.6	24	22.77	-1.23	20.80
HSDPA -	826.4	24	22.40	-1.60	19.65
	836.4	24	22.56	-1.44	19.76
Subtest 1	846.6	24	22.38	-1.62	20.05
HSDPA	826.4	24	21.80	-2.20	19.58
	836.4	24	22.49	-1.51	19.66
Subtest 2	846.6	24	22.31	-1.69	19.83
HSDPA	826.4	24	21.19	-2.81	20.18
® E Jion o	836.4	24	20.98	-3.02	20.30
Subtest 3	846.6	24	21.89	-2.11	20.51
HSDPA	826.4	24	22.33	-1.67	21.09
Kil nilance	836.4	24	22.40	-1.60	20.56
Subtest 4	846.6	24	22.50	-1.50	20.73
HSUPA	826.4	24	22.58	-1.42	20.65
	836.4	24	22.17	-1.83	20.80
Subtest 1	846.6	24	22.97	-1.03	20.39
HSUPA -	826.4	24	22.16	-1.84	20.81
	836.4	24	22.16	-1.84	20.07
Subtest 2	846.6	24	22.29	-1.71	20.77
HSUPA	826.4	24	22.15	-1.85	20.25
W. Pal Coll.	836.4	24	22.06	-1.94	20.58
Subtest 3	846.6	24	22.36	-1.64	20.71
HSUPA	826.4	24	22.44	-1.56	20.78
MS Alas	836.4	24	22.42	-1.58	20.45
Subtest 4	846.6	24	22.29	-1.71	21.14
HSUPA -	826.4	24	22.63	-1.37	20.50
Ge Committee	836.4	24	22.63	-1.37	20.63
Subtest 5	846.6	24	22.89	-1.11	20.33

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



Page 19 of 68

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH	0< CM<2.5	MAX/CM 1 O)
HS-DPDCH,E-DPDCH and E-DPCCH	0≤ CM≤3.5	MAX(CM-1,0)

Note: CM=1 for  $\beta$   $_{c}/\beta$   $_{d}$ =12/15,  $\beta$   $_{hs}/\beta$   $_{c}$ =24/15.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XQC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Report No.: AGC00384180701FE02 Page 20 of 68

# 6.2 RADIATED OUTPUT POWER 6.2.1 MEASUREMENT METHOD

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

- 1. Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signal operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT operating at its maximum duty cycle, at maximum power, and at the approximate frequencies.
- 2. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 3. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. TheARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 4. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 5. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 6. The EUT is then put into continuously transmitting mode at its maximum power level.
- 7. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 8. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 9. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi...

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gott.com.



Page 21 of 68

#### **6.2.2 PROVISIONS APPLICABLE**

Alle Control of the C		
Mode	FCC Part Section(s)	Nominal Peak Power
GSM/GPRS 850	22.913(a)(2)	<=38.45dBm (7W). ERP
GSM/GPRS 1900	24.232(c)	<=33dBm (2W). EIRP
UMTS BAND II	24.232(c)	<=33dBm (2W),EIRP
UMTS BANDV	22.913(a)(2)	<=38.45dBm (7W).ERP

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.cett.com.



Report No.: AGC00384180701FE02 Page 22 of 68

#### **6.2.3 MEASUREMENT RESULT**

Radiated Power (ERP) for GSM/GPRS 850							
		Res	sult				
Mode	Frequency	Max. Peak ERP (dBm)	Polarization Of Max. ERP	Conclusion			
45L	824.2	30.85	Horizontal	Pass			
F of Global Compil	836.6	30.79	Horizontal	Pass			
GSM	848.8	31.01	Horizontal	Pass			
GSIVI	824.2	28.11	Vertical	Pass			
	836.6	28.42	Vertical	Pass			
® ## ste	848.8	28.35	Vertical	Pass			
GO .	824.2	25.44	Horizontal	Pass			
	836.6	25.25	Horizontal	Pass			
EDGE	848.8	25.36	Horizontal	Pass			
EDGE	824.2	23.42	Vertical	Pass			
All Maria	836.6	23.25	Vertical	Pass			
O	848.8	23.36	Vertical	Pass			

Radiated Power (E.I.R.P) for GSM/GPRS 1900							
		Res	Result				
Mode	Frequency	Max. Peak	Polarization	Conclusion			
		E.I.R.P.(dBm)	Of Max. E.I.R.P.				
ALC ALCOHOL	1850.2	27.55	Horizontal	Pass			
G	1880.0	27.26	Horizontal	Pass			
GSM	1909.8	27.44	Horizontal	Pass			
GSIVI	1850.2	24.11	Vertical	Pass			
	1880.0	24.25	Vertical	Pass			
	1909.8	24.25	Vertical	Pass			
人也	1850.2	23.42	Horizontal	Pass			
® # Jalion of Global Co.	1880.0	23.10	Horizontal	Pass			
FDCF	1909.8	23.36	Horizontal	Pass			
EDGE	1850.2	21.09	Vertical	Pass			
KE mphanes	1880.0	21.17	Vertical	Pass			
(B) And Control	1909.8	21.34	Vertical	Pass			

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at the confirm



Page 23 of 68

	Ra	adiated Power (E.I.R.P) for	UMTS band II	
		Res	ult	
Mode	Frequency	Max. Peak E.I.R.P (dBm)	Polarization Of Max. E.I.R.P	Conclusion
	1852.4	21.58	Horizontal	Pass
	1880	21.69	Horizontal	Pass
UMTS	1907.6	21.47	Horizontal	Pass
UIVITS	1852.4	19.45	Vertical	Pass # 5000
	1880	19.36	Vertical	Pass
	1907.6	19.40	Vertical	Pass

		Radiated Power (ERP) for UMT	S band V	
		Res	sult	
Mode	Frequency	Max. Peak ERP (dBm)	Polarization	Conclusion
			Of Max. ERP	
	826.4	21.09	Horizontal	Pass
The Complies	836.4	21.07	Horizontal	Pass
LIMTO	846.6	21.11	Horizontal	Pass
	826.4	19.44	Vertical	Pass
	836.4	19.49	Vertical	Pass
® ## G	846.6	19.34	Vertical	Pass

Note: Above is the worst mode data.

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at all the confirmed a



Page 24 of 68

#### 6.3. PEAK-TO-AVERAGE RATIO

#### 6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

PAPR (dB) = PPk (dBm) - PAvg (dBm).

#### 6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

The results spowfil this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 25 of 68

#### **6.3.3 MEASUREMENT RESULT**

	-311			
Modes	GSM850(GSM)			
Ohannal	128	190	251	
Channel	(Low)	(Mid)	(High)	
Frequency	004.0	000.0	0.40.0	
(MHz)	824.2	836.6	848.8	
Peak-To-Average Ratio (dB)/GSM	1.25	1.36	1.26	
Peak-To-Average Ratio (dB)/GRPS	1.00	0.99	1.07	

			30,050
Modes	PCS1900 (GSM)		
Channal	512	661	810
Channel -	(Low)	(Mid)	(High)
Frequency	4050.0	4000	1909.8
(MHz)	1850.2	1880	
Peak-To-Average Ratio (dB)/GSM	0.82	0.77	0.69
Peak-To-Average Ratio (dB)/GRPS	1.14	1.25	1.56

the most than the second of th	HON O'S ASSIGNATION OF THE PROPERTY OF THE PRO		
Modes		UMTS BAND II	
Channel	9262	9400	9538
Channel	(Low)	(Mid)	(High)
Frequency	1852.4	1000	1007.6
(MHz)	1052.4	1880	1907.6
Peak-To-Average Ratio (dB)	1.42	1.34	1.58

Modes	UMTS BAND V		
Channel	4132	4182	4233
Channel	(Low)	(Mid)	(High)
Frequency	926.4	926.4	946.6
(MHz)	826.4	836.4	846.6
Peak-To-Average Ratio (dB)	1.75	1.65	1.35

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 26 of 68

400 089 2118

#### 7. OCCUPIED BANDWIDTH

#### 7.1 MEASUREMENT METHOD

- 1. The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper Frequency limits, the mean power radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.
- 2. RBW=1~5% of the expected OBW, VBW>=3 x RBW, Detector=Peak, Trace mode=max hold, Sweep=auto couple, and the trace was allowed to stabilize.

#### 7.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

The results shown this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 💢 €, this document to cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-cent.com.



age 27 of 68

# 7.3 MEASUREMENT RESULT

# **Test Results**

Test	Test	Test	Occupied Bandwidth	Emission Bandwidth	Verdict
Band	Mode	Channel	(KHZ)	(KHZ)	verdict
	GSM	LCH	244.14	313.1	PASS
· W		MCH	245.11	306.8	PASS
CCMOEO	(C) St. Sign of Globs	HCH	245.02	311.3	PASS
GSM850	C Milester	LCH	243.73	313.0	PASS
	GPRS	MCH	243.64	311.9	PASS
® <b>4</b>	Son of Clobal Comm	HCH	244.04	312.9	PASS

Test Band	Test	Test	Occupied Bandwidth	Emission Bandwidth	Verdict
rest band	Mode	Channel	(KHZ)	(KHZ)	verdict
obal Compliance	For Global Compliant	LCH	247.41	316.3	PASS
2G	GSM	MCH	246.23	310.3	PASS
CCM1000	3	HCH	243.48	316.0	PASS
GSM1900	CO TO TOO GOOD	LCH	246.12	314.4	PASS
Allestation of	GPRS	MCH	249.54	309.5	PASS
	177	HCH	248.54	309.8	PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at all the confirmed a




Page 28 of 68

#### For GSM

#### Test Band=GSM850/PCS1900

### Test Mode=GSM/GPRS

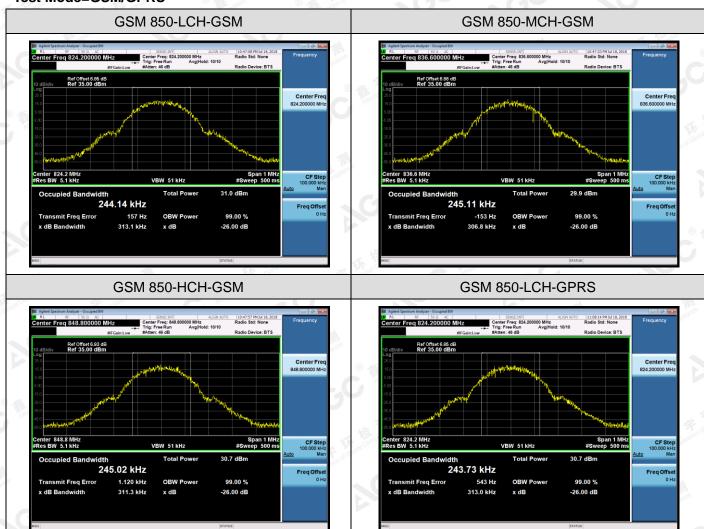



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-cert.com.


VGC 8





Report No.: AGC00384180701FE02 Page 29 of 68

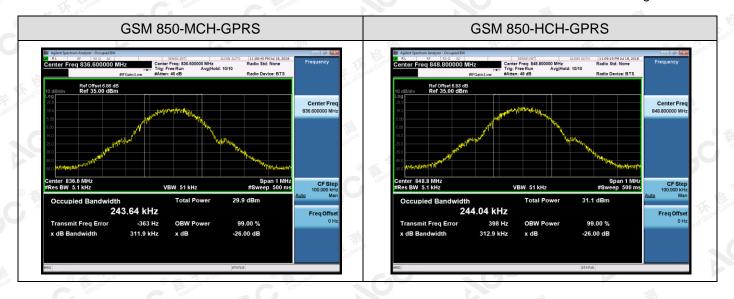



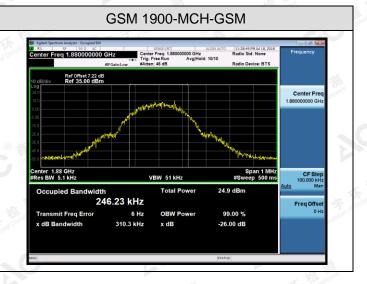

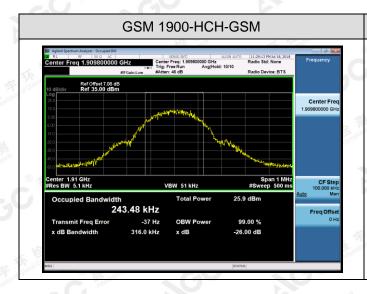

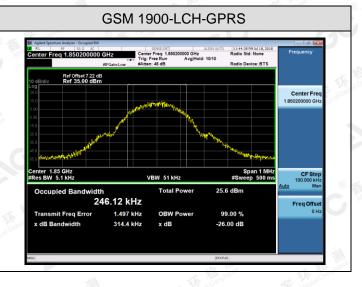


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gott.com.

**IGC** 8



Page 30 of 68

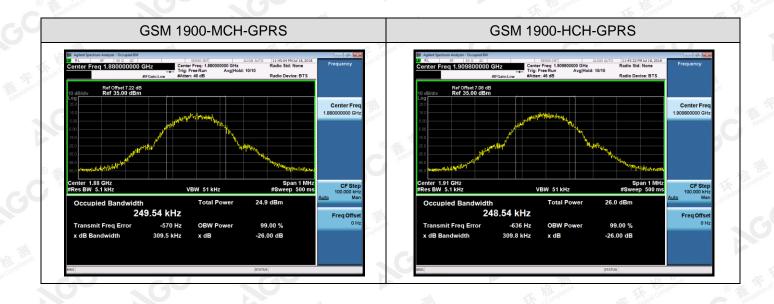

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at all the confirmed a

Attestation of Global Compliance

AGC 8

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com **@** 400 089 2118  $Add: 2/F.\ , Building\ 2, No.1-4, Chaxi\ Sanwei\ Technical\ Industrial\ Park, Gushu, Xixiang,\ Baoan\ District,\ Shenzhen,\ Guangdong\ Chinang Chinangdong\ Chi$ 



Report No.: AGC00384180701FE02 Page 31 of 68


9	Test Band	Test	Test	Occupied Bandwidth	Emission Bandwidth	Verdict
1		Mode	Channel	(KHZ)	(KHZ)	
	MCDMA	162 mores	LCH	4153.8	4665	PASS
0	WCDMA 850	UMTS	MCH	4161.9	4678	PASS
	030		HCH	4141.0	4672	PASS

Test Band	Test	Test	Occupied Bandwidth	Emission Bandwidth	Verdict
	Mode	Channel	(KHZ)	(KHZ)	
MCDMA		LCH	4161.5	4701	PASS
WCDMA	UMTS	MCH	4158.2	4691	PASS
1900	on of Global Con."	HCH	4180.6	4724	PASS

#### For WCDMA

#### Test Band=WCDMA850/WCDMA1900


#### Test Mode=UMTS

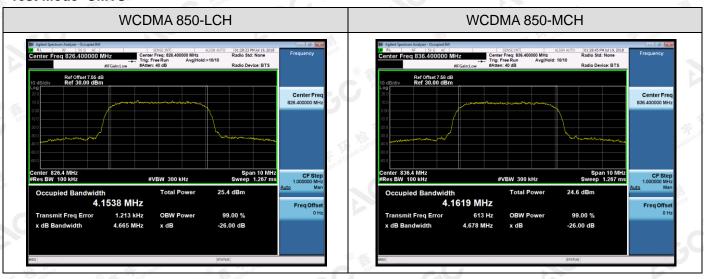


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at alther. I www.agc. gett.com.



Report No.: AGC00384180701FE02 Page 32 of 68

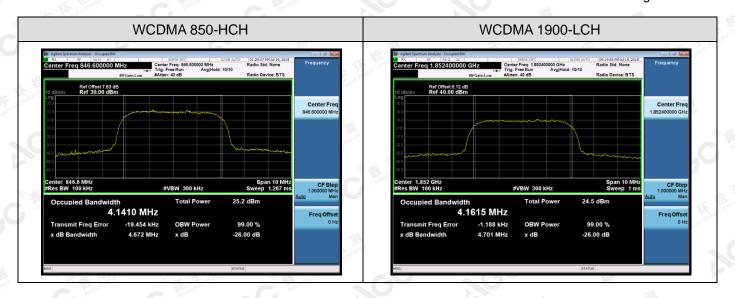

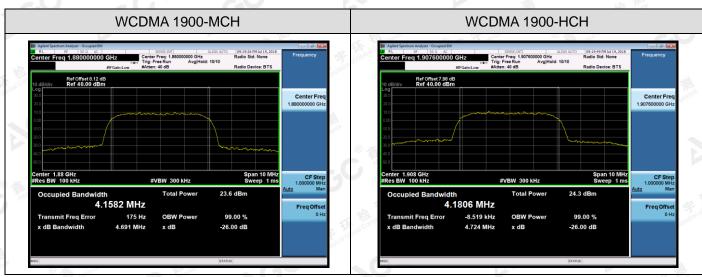

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 33 of 68

#### 8. BAND EDGE

#### **8.1 MEASUREMENT METHOD**

- 1. All out of band emissions are measured with an analyzer spectrum connected to the antenna terminal of the EUT while the EUT at its maximum duty cycle, at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration
- 2. The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.
- 3. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
- 4. Span was set large enough so as to capture all out of band emissions near the band edge.
- 5. RBW>1% of the emission bandwidth, VBW >=3 x RBW, Detector=RMS, Number of points>=2 x Span/RBW Trace mode=max hold, Sweep time=auto couple, and the trace was allowed to stabilize

### **8.2 PROVISIONS APPLICABLE**

As Specified in FCC rules of 22.917(a) < 24.238(a) and KDB 971168 D1 V03R01.

The results spowfil this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 34 of 68


#### **8.3 MEASUREMENT RESULT**


**Test Results** 

For GSM

Test Band=GSM850/GSM1900

Test Mode=GSM/GPRS

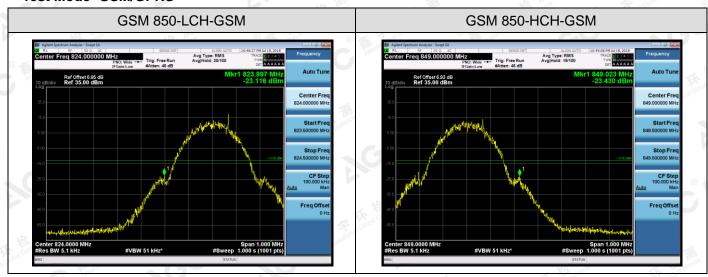

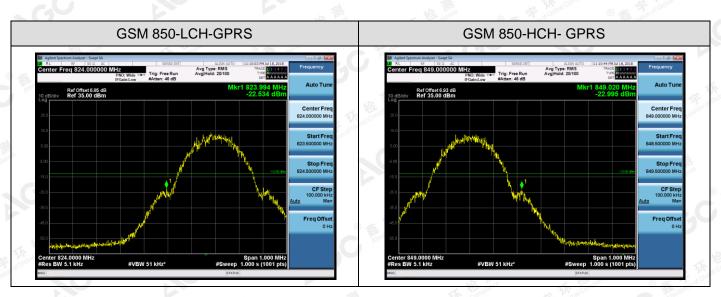

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.

**IGC** 8