




# FX2

HELMET BLUETOOTH INTERCOM

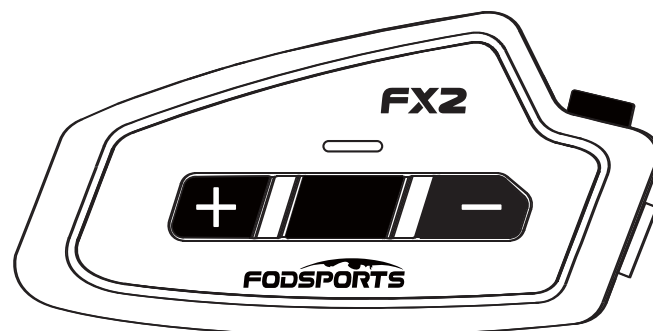

## User Manual



FOCUS ON OUTDOOR SPORTS


Manufacturer: Shenzhen winnerelec Industrial CO.,LTD

Address: 411-416 Room Social security building,  
Honghua Bei, Road Gongming Street Guangming New  
District, Shenzhen, China


## CONTENTS

1. Package Contents	2
2. Charging	3
3. Installation Instructions	4
4. General Operation Instructions	8
5. Pairing the FX2 with a Bluetooth Device	11
6. Bluetooth Intercom Talk	13
7. Technical Specifications	29
8. Maintenance and Care	30
9. After-Sale Service	31

## 1. Package Contents

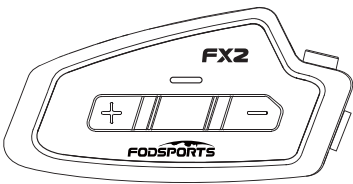


FX2




Speaker & Hard Tube  
Microphone




Button Microphone




USB Cable




Clip Mounting Bracket




3M  
Tape Bracket



wrench&screw




Velcro



User Manual

## 2.Charging:

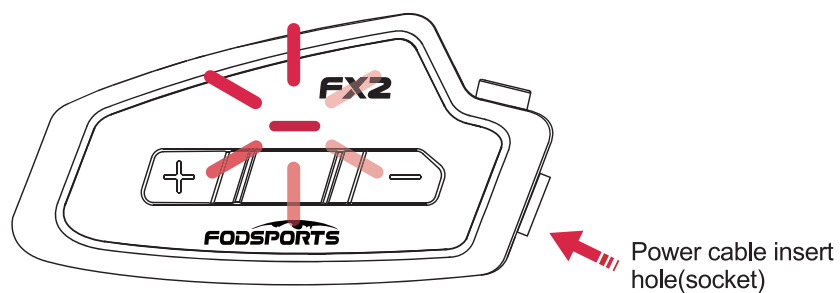


2.1. When charging, the red light flashes, and when it is full, the blue light turns on. (As shown below). Please charge before using for the first time.


2.2 Please use a qualified charger 5V/1A±0.5A.

2.3 Please keep charging at least once every 2 months if the product is not used for a long time.

### 3. Installation Instructions

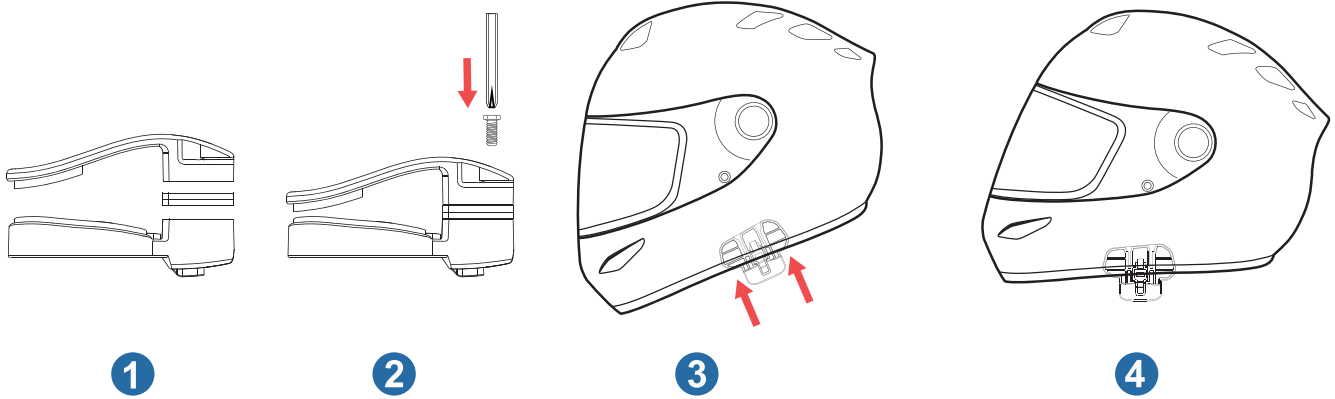


3.1.2 If there are any problems with mounting the bracket, you may use the 3M tape bracket. Peel off the protective backing sheet of the 3M tape and adhere the bracket onto the helmet. Press for 15 seconds and glue dry for 24 hours.

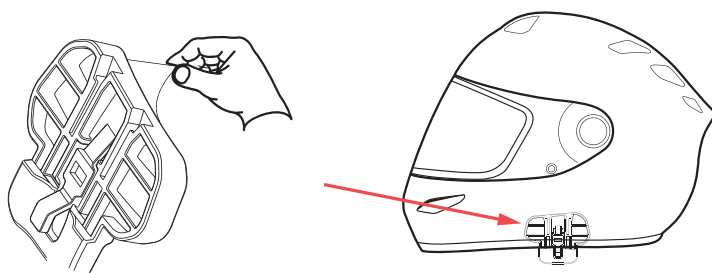


**Note:** Even though the 3M Tape mounting is provided for convenience, FODSPORTS recommends using the bracket mounting. The 3M Tape mounting is offered as an option that you may use at your own risk and responsibility, FODSPORTS does not assume any responsibility for use of it.

3.2 Locate an area in the nose section just to the left of center to mount the button microphone for full helmets . Place the button microphone to the velcro pad and connect it to the connector of the headset.

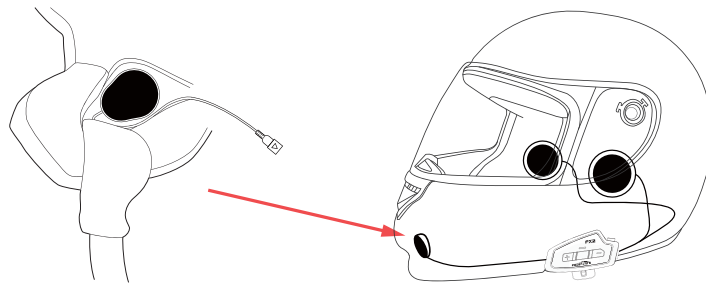


If you are installing into an open face helmet, please adjust the direction of the microphone so that the triangular mark on the microphone is pointing towards your mouth.

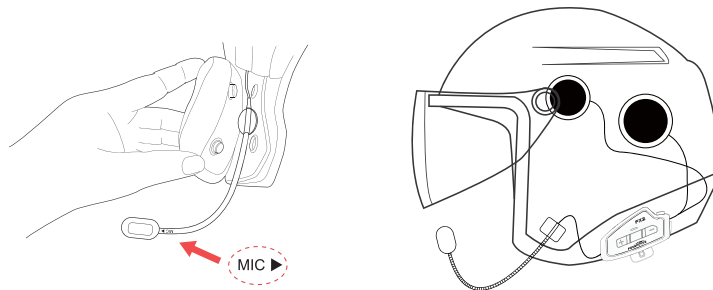

3.3 Place the speakers into the cheek pads. Push the speakers and microphone firmly against the Velcro pads.


3.4 Press the wires into the gap between the helmet liner and shell.

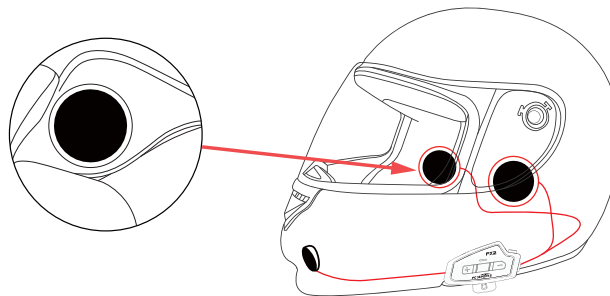




**Note:** The speaker with shorter wire is for the left ear and the speaker with the longer one is for the right ear, to enhance the FM radio reception as well.


3.5 Mount the **FX2** main unit on the bracket. Slide the main unit down onto the bracket until it clicks firmly into the bottom portion of the bracket.

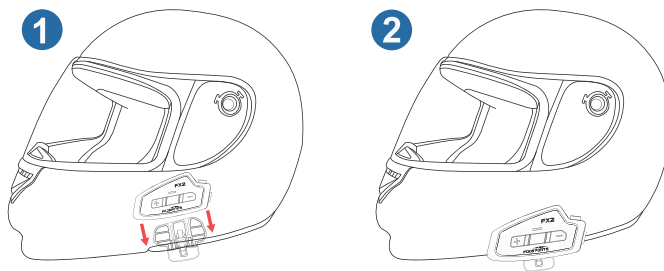

3.6 To remove the host of the **FX2** from the bracket, just push it up from the bracket.

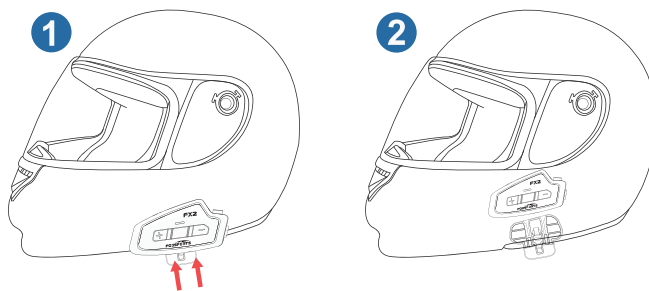

## 4. General Operation Instructions

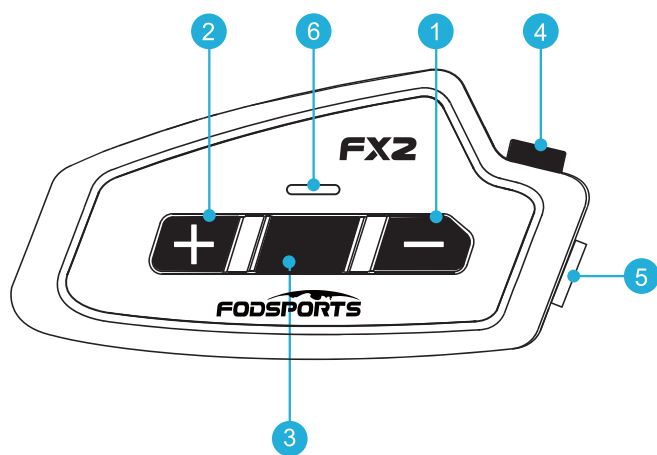

1. Volume-
2. Volume+
3. Power button
4. Intercom button
5. Earphone port(charging)
6. LED Indicator

### Switch On/Off

**Switch On:** Press and hold the "Power button" for about 3 seconds to switch on. The light will flash blue only.

**Switch Off:** Press and hold the "Power button" for about 3 seconds to switch off. The blue light will turn red then off.

## Power Detect & Notification Function

FX2 has power detect Function,when device is on, short press "Power button" twice,recorded voice message will tell you:

Battery 100%

Battery 80%

Battery 50%

Battery 25%

Battery Low

## Low Battery Alert

When the main battery unit falls below 20% charge the light will flash red and there will be a tone alert every five minutes until the condition is remedied.

## Cellphone

**Answer incoming call:** The unit will automatically answer the incoming phone call after 12 seconds. Or press the "Power button" to answer the incoming phone call immediately.

**Reject incoming call:** Double-click "Power button".

**End active phone call:** Short press the "Power button" to end a phone call.

**Last phone call number redial:**When in standby mode, double click the Volume + button to redial the last phone call number.

**Volume Up:** Short press "Volume+ button".

**Volume Down:** Short press "Volume- button".

**Switch manual/automatic answering calls:** While in standby, press and hold the "Volume - "button for 7 seconds. (Default: answer incoming calls automatically)

**Note:** In some cases (e.g. high-power RF radio influence or metal blocking), the headset might disconnect from the mobile phone. Please short press the "Power button" to reconnect.

### Voice Command

When in standby mode, double click the "Volume- button" to activate Siri or S-Voice. You will hear a beepsound, and then there will be a voice prompt from the mobile phone. Simply speak the name from your phone list to dial.

### Music Function

**Play:** Short press "Power button" .

**Pause:** Short press "Power button" .

**Play Previous:** Double click "Volume- button".

**Play Next:** Double click "Volume+ button".

**Volume Up:** Short press "Volume+ button".

**Volume Down:** Short press "Volume- button" .

**Note:** When in music mode from phone, you will need to adjust the volume on phone as well to get louder volume.

### FM Function

**FM ON:** Long press "Volume+ button" for 3 seconds.

**FM OFF:** ,Long press "Volume+ button" for 3 seconds.

**Volume Up:** Short press "Volume+ button" .

**Volume Down:** Short press "Volume- button" .

**Search channels:** Double click "Volume- button" / "Volume- button".

### Intercom Function

**Switch Intercom On:** Short press "Intercom button" .

**Switch Intercom Off:** Short press "Intercom button".

**Volume Up:** Short press "Volume+ button" .

**Volume Down:** Short press "Volume- button" .

### Memory Clear(Reset)

To clear the previous pairing, long press "Volume+" and "Volume-" button for 3 seconds simultaneously until the red light flashes.

### Switch prompt tone

Switch prompt tone( English/Japanese ):While in standby, press and hold the "Volume - " button for 10 seconds.

## 5. Pairing the FX2 with a Bluetooth Device

Before using the FX2 Bluetooth headset with any Bluetooth device for the first time you need to pair them. It can be paired with mobile phones, audio devices such as MP3 or GPS, and other FODSPORTS Bluetooth headsets. This pairing operation is only required once for each Bluetooth device, and the headset will remain pair with each device and automatically reconnects to the paired devices when within range.


### Pairing a Mobile Phone

Step 1. Start with the unit turned off, press and hold the "Power button" on both units for 9 seconds until the LED light alternates between red and blue.

Step 2. Search for Bluetooth devices on your mobile phone. The headset will be listed on your mobile phone as "FODSPORTS FX2".

Step 3. Enter 0000 for the PIN if needed.

Step 4. Your mobile phone will confirm that pairing is complete. The blue light flash after they are connected.

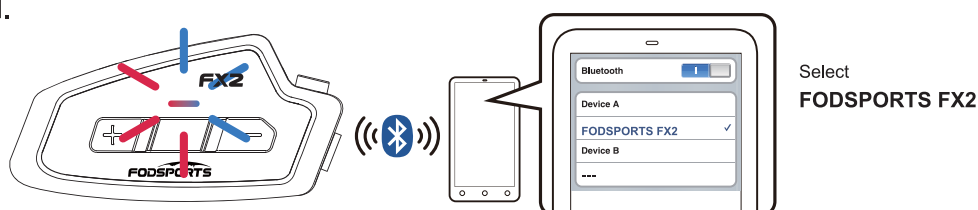

## Pairing Bluetooth GPS Navigation

Step 1. The pairing procedure is the same with "Pairing Mobile Phone"

Step 2. Please refer to the manual of the Bluetooth GPS navigation for details.

Step 3. You can listen to Bluetooth voice instructions from Bluetooth GPS navigation.

## 6. Bluetooth Intercom Talk

### Pairing with other FX2 headsets for Intercom Talk :

The FX2 can be paired with other FX2 up to three units for full duplex Bluetooth intercom talk. There is a different pairing process for each scenario: two intercoms and three intercoms. When more than two units are connected, there are Last units and Bridge units. To maximize range, the riders should stay in the same order that the units are connected.

**Note:** Prior to pairing units for communications before riding. We strongly suggest (to clear the previous connection from the intercom units) that existing connections be cleared from unit. To clear existing connections, press and hold the "volume + " and "volume -" together until the red light flash, all previous connections are cleared from unit.

**\* There are two ways pairing model, you can choose one of two models.**

**Channel -1:** When both unit A and B are turned off, then simultaneously hold the "Power button" on both units for 9 seconds. Then click the "Intercom button" on either unit.

**Channel -2:** Turn on both units, then simultaneously hold the "Intercom button" and "Volume-button" on both units for 3 seconds. Then click the "Intercom button" on either unit.

**\* Turn off the pairing mode: If you need the device to exit the pairing mode, double-click the "Power" button.**


## 6.1 Pairing two FX2 headsets to talk



**Tips:** To start an intercom talk, you should pair the two units firstly.


### Step 1: Pairing two FX2 units firstly.

When both unit A and B are turned off, then simultaneously hold the "Power button" on both units for 9 seconds to enter pairing mode for channel-1, until the red and blue light flash on both units .

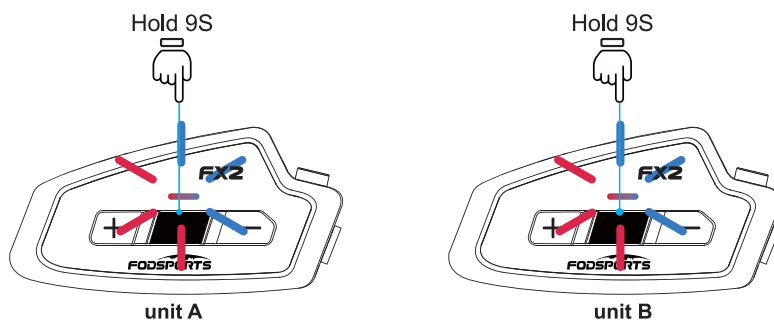




Then click the "Intercom button" on either unit, the blue light will flashes quickly on this unit. Once the pairing is complete you will see the blue light flashing on both units .

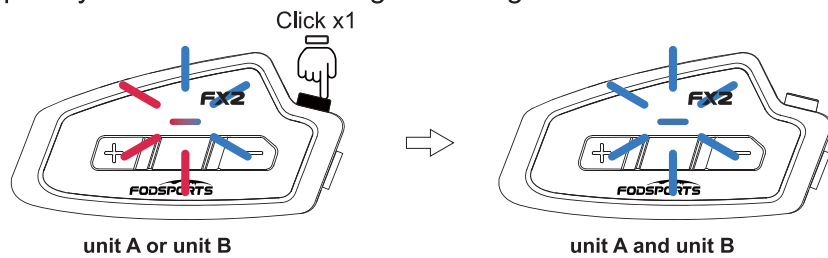


### Step 2: Start an intercom talk

Click the "Intercom button" on one unit to start an intercom talk. Wait 3-5 seconds for the unit to connect. When in Intercom mode, you can see the blue light flashes simultaneously on both units.

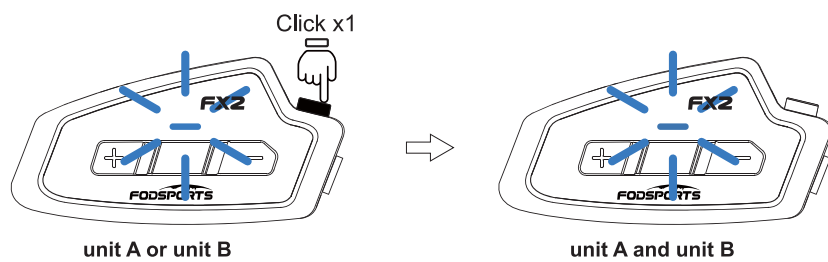

### Step 3: Disconnect an intercom talk

Click the "Intercom button" on one unit to quit the intercom. After disconnected you will see blue light flashing on both units.

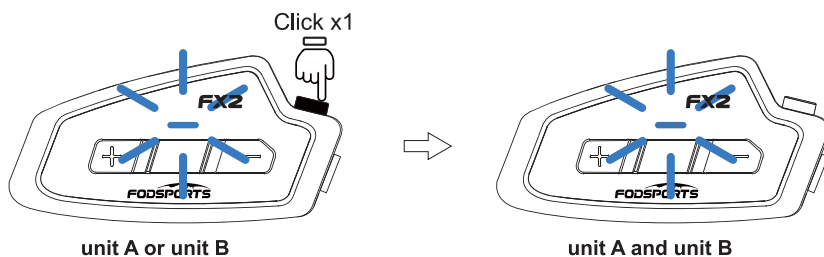


### 6.2 Pairing three FX2 headsets to talk




3 Persons Toggle Intercom Chatting

**Step 1: Pairing unit A with unit B firstly.**

When both unit A and B are turned off, then simultaneously hold the "Power button" on both units for 9 seconds to enter pairing mode for channel-1, until the red and blue light flash on both units .

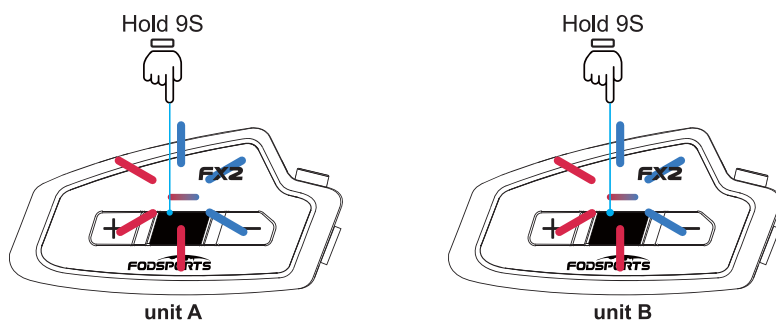


Then click the "Intercom button" on either unit, the blue light will flash quickly on this unit. Once the pairing is complete you will see the blue light flashing on both units.

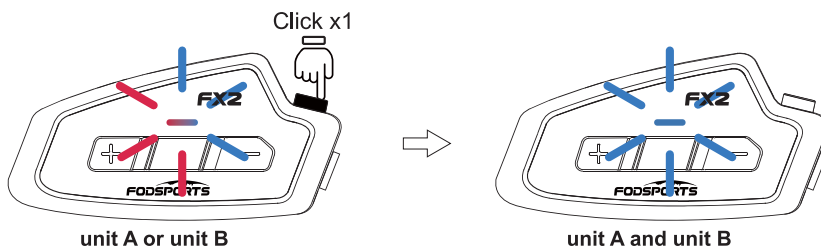


**Step 2: Then pairing unit B with unit C**

Turn on unit C. Simultaneously hold the "Intercom button" and "Volume- button" on both unit B and unit C for 3 seconds until the red and blue lights flash to enter pairing mode for channel-2.

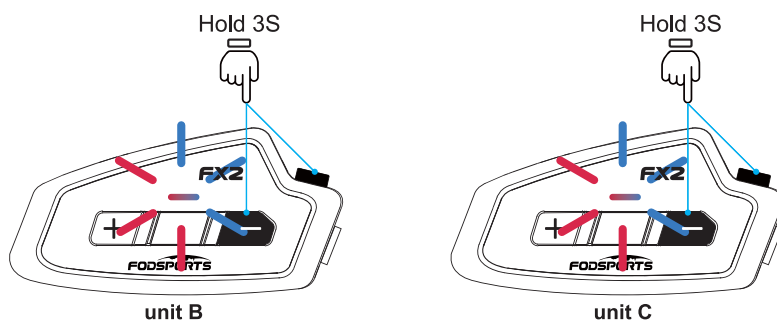


Then press the "Intercom button" on either unit until the blue light flashes quickly on this unit. Once the pairing is complete you will see the blue light flashing on both units.

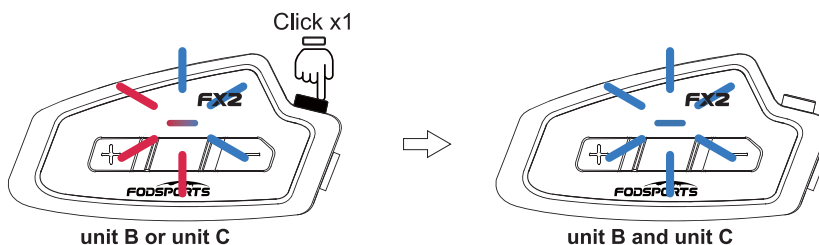


### Step 3: Start 3 Persons Toggle intercom talk

After all three units are paired, unit B will be set as the bridge unit.


3.1 Click the "Intercom button" on unit A or unit B to connect the two units. unit A and unit B will start talking.

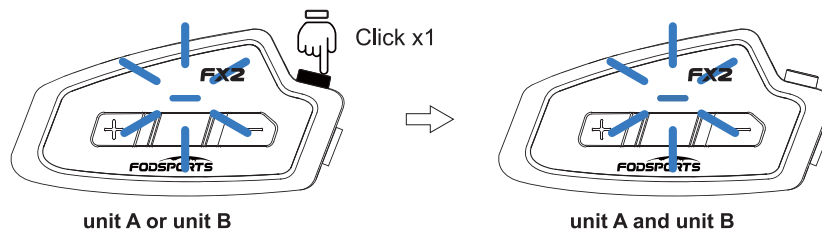

3.2 Click the "Intercom button" on unit A or unit B to disconnect the intercom talk. Double click the "Intercom button" on unit C or unit B to connect the two units. unit B and unit C will start talking. Toggle intercom talk complete.

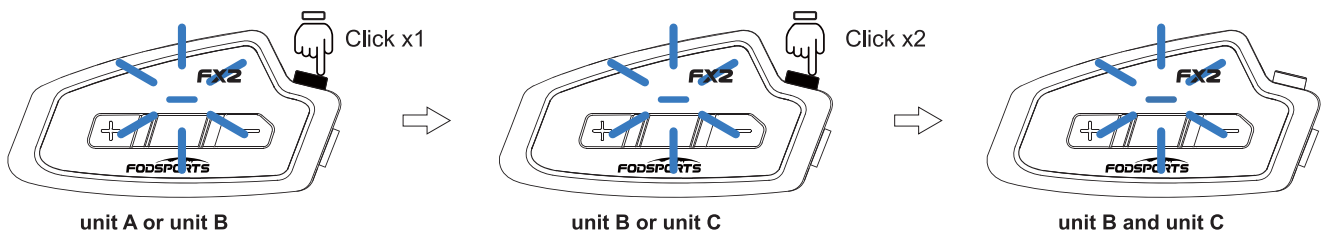


3.3 Double click the "Intercom button" on unit B or unit C to disconnect the intercom talk. Click the "Intercom button" on unit A or unit B to connect the two units. unit A and unit B will start talking. Toggle intercom talk complete.

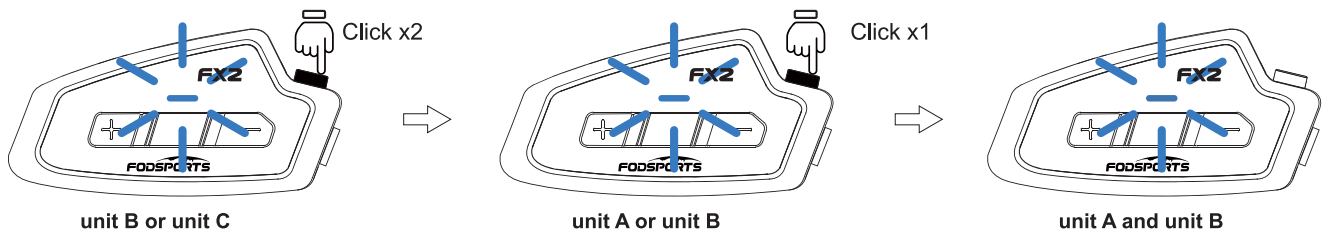


### 6.3 Quickly switch intercom


**Situation 1:** During intercom talking, Click the "Power button" to exit intercom mode.



**Situation 2:** During unit B and unit C intercom talking, unit A wants to talk to unit B, click "Intercom button" of unit A, unit B can hear the intercom call ringtone. Double-click "Power button" of unit B to talk to unit A directly. (Double-click the "Intercom button" of unit B within 10 seconds of hearing the intercom call ringtone to be effective.)

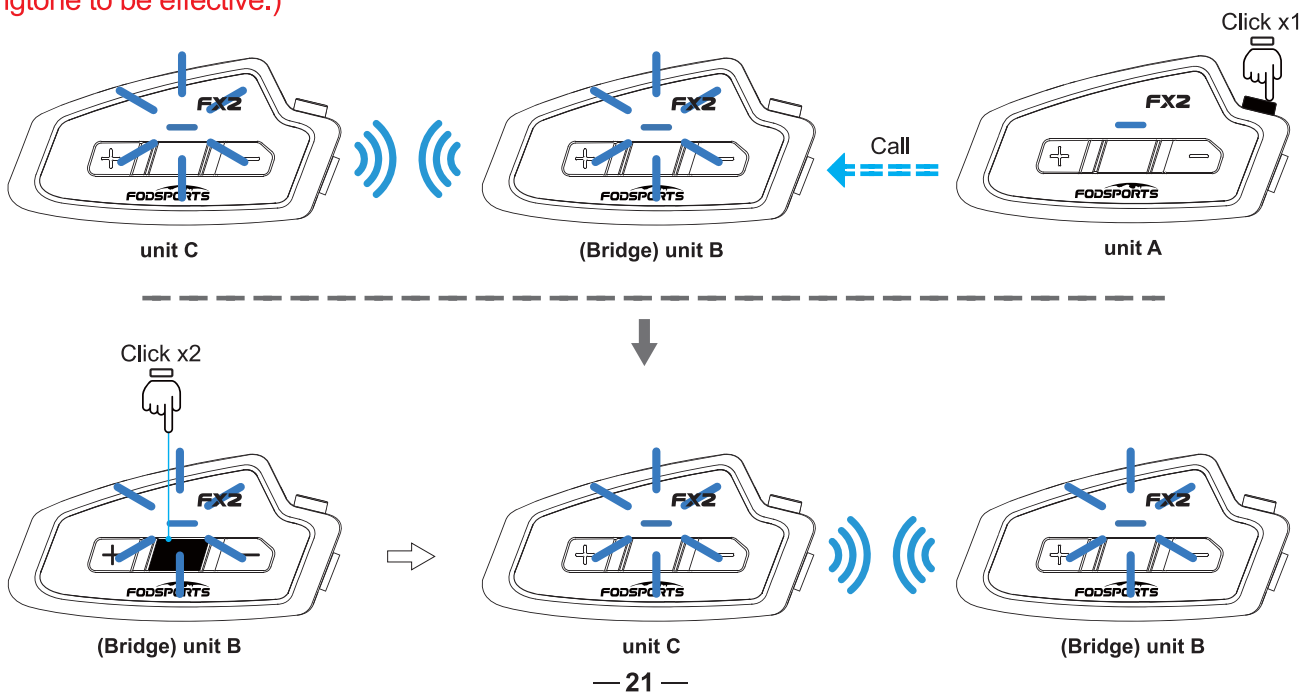

**Situation 3:** During unit A and unit B intercom talking, unit C wants to talk to unit B, Double-click "Intercom button" of unit C, unit B can hear the intercom call ringtone. Double-click the "Power button" of unit B to talk to unit C directly. (Double-click the "Power button" of unit B within 10 seconds of hearing the intercom call ringtone to be effective.)

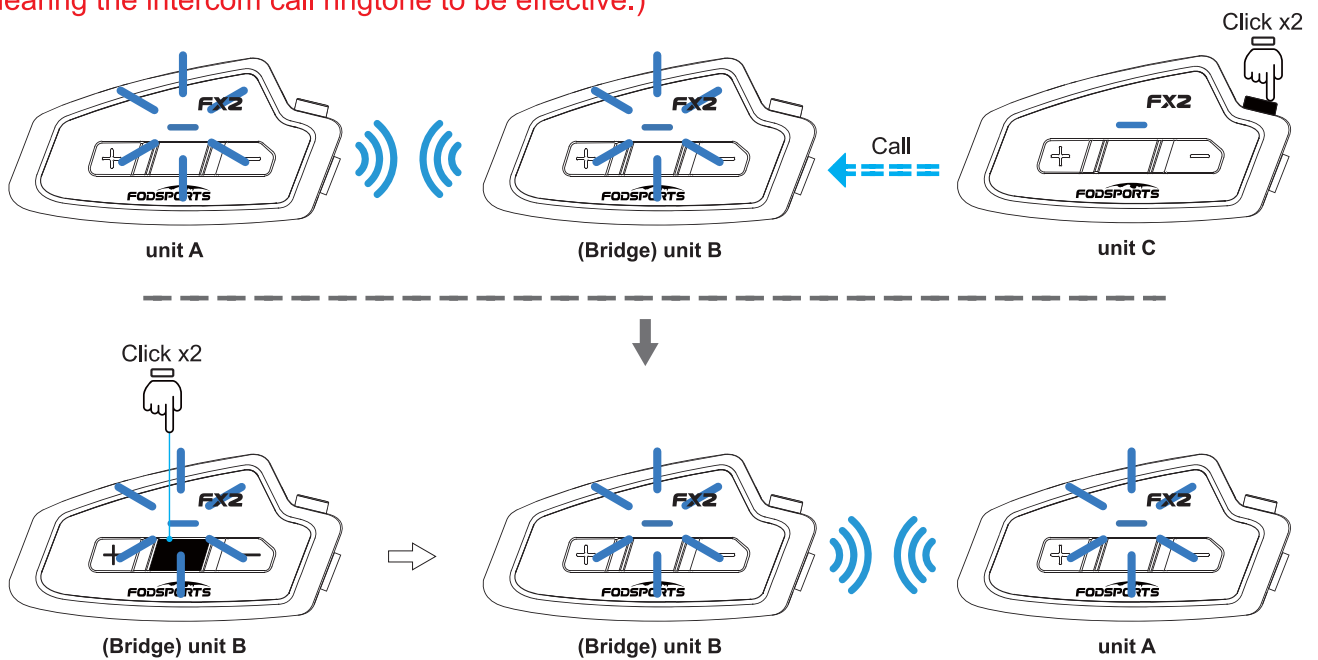



## 7. Technical Specifications

**Bluetooth Support:** HSP,HFP,A2DP,AVRCP, AGHSP

**Battery:** lithium battery, 850mA , 3.7v

**Dimensions:** 8.9cm \* 4.3cm \* 2.5cm

**Weight:** 50G, 100G(Include Headphone & Mic Kits)

**Frequency Range:** 2.4G-2.485G

**Operating temperature:** -20 ℃ -50 ℃

**Certification:** CE FCC ROHS BQB TELEC

**USB Adapter standard charge voltage:** DC 5V±0.2V

**USB Adapter standard charge circuit:** DC 1A±0.5A

**Charging time:** 2-3 hours

**\*The FX2 operates in the following order of priority:**

1. Phone call (highest)

2. Intercom

3. Music, FM radio (lowest)

4. A lower-priority Function is always interrupted by a higher-priority Function. For example, stereo music is interrupted by an Intercom call, and Intercom conversation is interrupted by an incoming mobile phone call.

## **8.Maintenance and Care**

The FX2 should be treated with care and the following suggestions will help maintain your Warranty.

1. Do not use or store the device in dusty or dirty environments. Moving parts and electronic components can be damaged.
2. Do not store the device in high heat areas. High temperatures can shorten the life of electronic devices,damage batteries, and warp or melt certain plastics.
3. Do not store the device in cold temperature areas. When the device returns to its normal temperaturemoisture can form inside the device and damage electronic circuit boards.
4. Do not attempt to open the FX2 case.
5. Do not drop or knock the device. Rough handling can break internal circuit boards and fine mechanics.
6. Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the device.
7. Do not paint the device. Paint can clog the moving parts and prevent proper operation. These suggestions apply equally to the headset main unit, speaker-microphone clamp unit, and power charger.

## **9.After-Sale Service**

For any quality problem or missing accessories, especially pairing problem between 2 or more FX2 headsets, please feel free to contact us at email: [winzon.cs@outlook.com](mailto:winzon.cs@outlook.com). We're always here ready to help, will reply to you in 24 hours.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



# FX2

Bluetoothヘルメットインカム

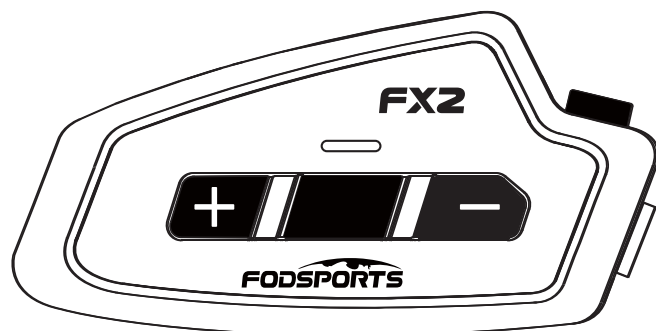

## 取扱説明書




アウトドアスポーツにフォーカス


## 目次

1. パッケージ内容	2
2. 充電	3
3. 取り付け方法	4
4. 操作方法	8
5. FX2とBluetoothデバイスのペアリング	12
6. Bluetoothインターコム通話	13
7. 製品仕様	23
8. メンテナンスとケア	24
9. アフターサービス	24


## 1. パッケージ内容

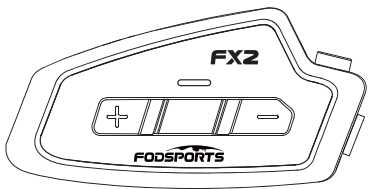


FX2




スピーカー&ハードマイク




ソフトマイク




USB 充電ケーブル




クリップ取り付け  
ブラケット




3Mテープブラケット



ドライバー  
&ネジ




ベルクロパッド



取扱説明書

## 2. 充電

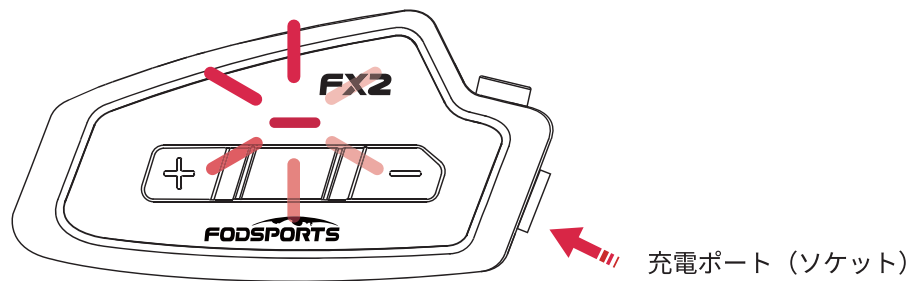


2.1 充電中は赤いライトが点滅し、満充電後は青ライトが点灯します(以下の通り)。初めて使用される場合は、十分充電してからご使用ください。

2.2 5V/1A±0.5Aの認定充電器を使用してください。

2.3 長期間使用されない場合は、最低でも2ヶ月に1回は充電してください。


### 3. 取り付け方法

3.1.1 クリップ式取り付けブラケットをヘルメット左側の帽体と内装の間に差し込みます。

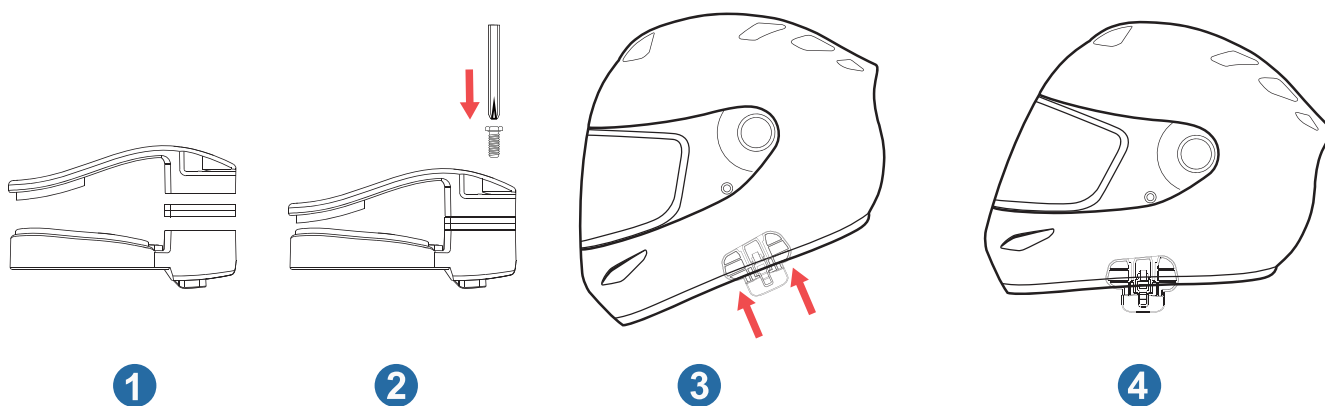


3.1.2 もし取付ブラケットを使用する時、何か困ったことがございましたら、3M両面テープをご利用ください。ヘルメットに貼るために、しっかりと貼ることができるようにその箇所をきれいに拭いてください。両面テープ部分のカバーシールを剥がしてヘルメット表面に貼り、15秒ぐらい押しつけてください。完全に乾くまで24時間乾燥させてください。



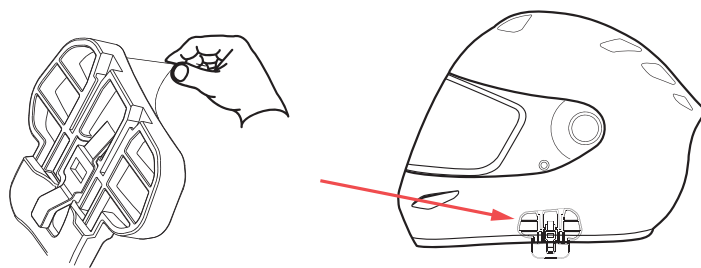


**注意：**お客様の利便性向上のため、3Mテープブラケットをご提供いたしておりますが、クリック式のブラケットのご利用がお勧めです。3M両面テープを使用した際に発生したリスクにつきまして、FODSPORTSは一切の責任を負いかねます。

3.2フルフェイスヘルメットに大体鼻の位置の左側には、ボタンマイクのベルク口を置いてください。そして、ナイロンテープを合わせて、スピーカーに接続してください。

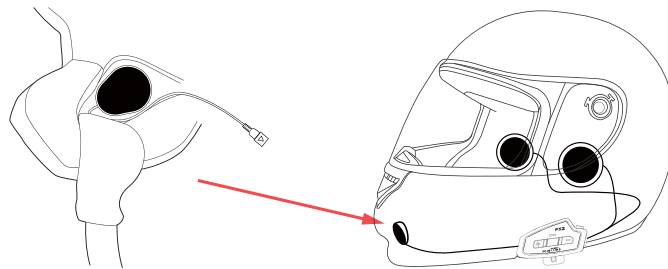


オープンフェイスヘルメットに装着する場合は、マイクに印されている三角マークが口のほうを向くようにしてください。

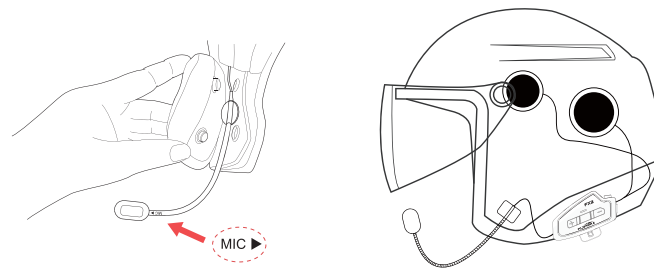


3.3 スピーカーを頬のパッドに入れます。スピーカーとマイクをマジックテープパッドにしっかりと押し付けてください

3.4 スピーカーとマイクの線をヘルメットライナーとシェルの際間に押し込んでください。

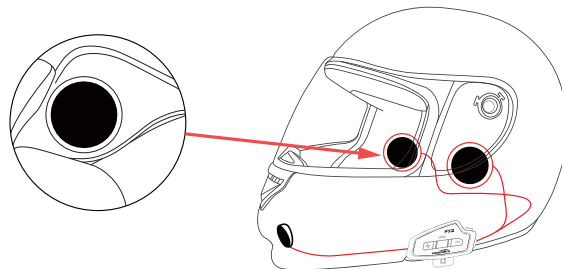


**注意：**短いスピーカーをヘルメットの左側に、長いスピーカーを右側に置いてください。  
これにより、FMラジオの受信も強化されています。


3.5 FX2 メインユニットをブラケットに取り付けます。「ガッチ」と音がするまで、メインユニットをブラケットの上から底部にスライドさせてください。

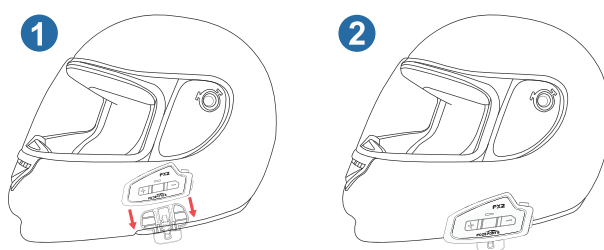

3.6 FX2本体をブラケットから取り外すには、ブラケットから押し上げてください。

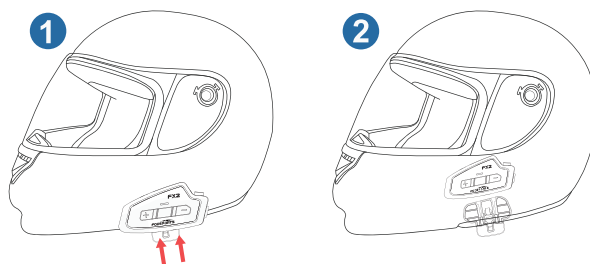

## 4. 操作方法

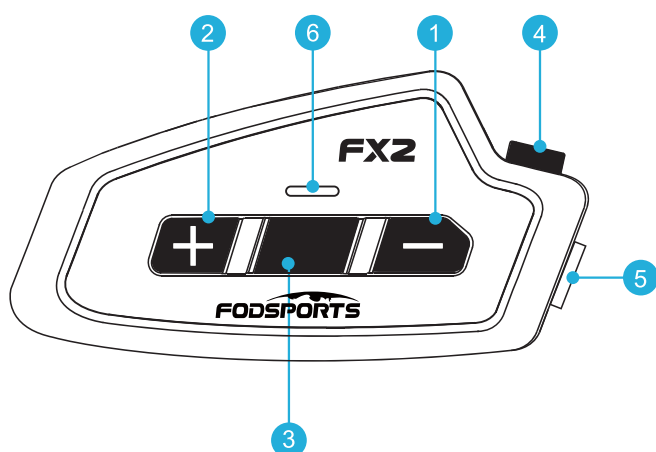

1. 音量- (ボリューム-, V-)
2. 音量+ (ボリューム+, V+)
3. 電源ボタン (オン/オフボタン)
4. インターコムボタン
5. スピーカーポート (充電ポート)
6. LEDインジケータ

### 電源のオン/オフ

**電源をオンにする:**電源ボタンを約3秒間長押しして、LEDライトが青色になり点灯すれば、電源がオンになります。

**電源をオフにする:**電源ボタンを約3秒間長押しして、LEDランプが赤色になり点灯すれば、電源がオフになります。

## バッテリー残量検出&通知機能

FX2には電源検出機能があります。インカムをオンにした状態で、「電源ボタン」を2回押すと以下のいずれかが聞こえます。

バッテリー残量100パーセントです

バッテリー残量80パーセントです

バッテリー残量50パーセントです

バッテリー残量25パーセントです

電池残量が少ない

## バッテリー低下のお知らせ

約20%低バッテリーになると、赤いライトが点滅しています。そして、充電されるまで5分間毎に音が鳴り、バッテリーが低下していることを知らせます。

## 電話

**着信応答:**電話がかかってきて着信音が約12秒間鳴った後、自動で電話を受けるように設定します。または「電源ボタン」を押すと、すぐ電話に出ます。

**着信拒否:**「電源ボタン」を2回押してください。

**通話終了:**「電源ボタン」を短く押して、通話が終了されます。

**リダイヤル:**待受状態で「音量+ボタン」をダブルクリックすると、直前にかけた電話番号にもう一度電話します。

**音量を上げる:**「音量+ボタン」を短く押してください。

**音量を下げる:**「音量-ボタン」を短く押してください。

**手動/自動応答の切り替え:**待機中に「音量-ボタン」を7秒間長押してください  
(デフォルトでは自動応答になっています)。

**注意：**場合によって、電波の干渉、金属のブロッキングなどの影響でBluetooth接続が切断されることが可能です。この時、電源ボタンを短く押して、再接続してください。

## 音声コマンド

待機中に「音量-ボタン」をダブルクリックすると、SiriまたはS-Voiceが起動します。「ビーブ」音が鳴り、携帯電話からの音声プロンプトが表示されます。電話リストから名前を呼んでハンズフリーで電話をかけます

## 音楽機能

**再生：**「電源ボタン」を短く押してください。

**一時停止：**「電源ボタン」を短く押してください。

**曲戻し：**「音量-ボタ」を2回押してください。

**曲送り：**「音量+ボタン」を2回押してください。

**音量を上げる：**「音量+ボタン」を短く押してください。

**音量を下げる：**「音量-ボタン」を短く押してください。

**注意：**携帯電話から音楽モードに入っている場合、より大きな音量を得るためには、携帯電話の音量を調整する必要があります。

## FM機能

FMをオンにする:「音量+ボタン」を3秒長押ししてください。

FMをオフにする:「音量+ボタン」を3秒長押ししてください。

音量を上げる:「音量+ボタン」を短く押ししてください。

音量を下げる:「音量-ボタン」を短く押ししてください。

チャンネルを検索する:「音量+/音量-ボタン」を2回短く押ししてください。

## インターコム機能

インターコムをオンにする:「インターコムボタン」を短く押ししてください。

インターコムをオフにする:「インターコムボタン」を短く押ししてください。

音量を上げる:「音量+ボタン」を短く押ししてください。

音量を下げる:「音量-ボタン」を短く押ししてください。

## メモリ削除(リセット)

ペアリングされた機器のメモリをクリアするには、赤ライトが点滅するまで「音量+」と「音量-」ボタンを同時に3秒間長押ししてください。

## 音声案内の切り替え

(日本語/英語) 音声案内の切り替え:スタンバイ状態で、「音量-ボタン」を10秒間押し続けてください

## 5. FX2とBluetoothデバイスのペアリング

FX2はiPhoneやAndroidスマートフォン、MP3とGPSのようなBluetooth デバイス、他のFODSPORTS バイクインカム製品とペアリングできます。(Bluetooth機能が備えればペアリングできます。)そして、ペアリングしたら、次回対応範囲に入れば自動的にペアリングできます。


### 携帯電話とペアリング

ステップ1.インカムをオフにした状態で、「電源ボタン」を約9秒間長押ししてください。LEDライトが赤色と青色で交互に点滅すれば、ペアリングモードに入ります。

ステップ2.携帯電話でBluetoothデバイスを検索します。ヘッドセットは携帯電話に「FODSPORTS FX2」と表示されます。

ステップ3.暗証番号が必要な場合0000を入力してください。

ステップ4.LEDライトが青色に点滅すると、ペアリング完了されました。

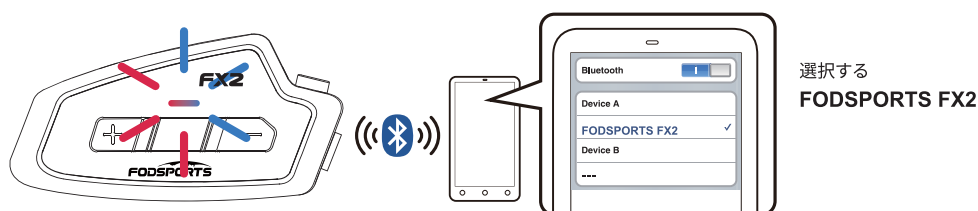



## Bluetooth GPSナビとペアリング

ステップ1. ペアリングの手順は「携帯電話のペアリング」と同じです。

ステップ2. 詳しくはBluetooth GPSナビゲーションのマニュアルをご参照ください。

ステップ3. Bluetooth GPSナビゲーションからBluetoothの音声指示を聞くことができます。

## 6. Bluetoothインターコム通話

### インターコム通話用の他のFX2ヘッドセットとペアリング:

全二重通信で、FX2を他のFX2同士とペアリングし、最大3台まで接続できます。2台のFX2、3台のFX2を接続操作がそれぞれ違います。3台のFX2をペアリングするとき、端末機とブリッジ機があります。通信距離を最大の範囲にするため、走行中ライダーはインカムが接続された順序と同じく並んでください。

**注意:** 走行前にペアリングをして通信を行う場合は、(前回のインターコム接続を解除するために)既存の接続を解除することを強くお勧めします。既存の接続を解除するには、赤いライトが点滅するまで、「音量+ボタン」と「音量-ボタン」を同時に長押しすると、既存の接続が全て解除されます。

**\* ペアリングモデルは二つあります。いずれかを選択してペアリングしてください。**

**チャンネル1:** ユニットAとユニットBの両方のインカムをオフにした状態で、両方のインカムの「電源ボタン」を同時に9秒間押し続けてから、いずれかのインカムの「インターコムボタン」をクリックしてください。

**チャンネル2:** 両ユニットをオンにし、「インターコム」と「音量-」ボタンを同時に3秒間押した後、いずれかのユニットの「インターコム」ボタンをクリックしてください。

**\* ペアリングモードをオフにする: デバイスでペアリングモードを終了しようすれば、「電源ボタン」をダブルクリックしてください。**


## 6.1 2台のFX2ヘッドセットをペアリングして通話する




**注意：**インターコム通話を開始するには、まず2台をペアリングする必要があります。

### ステップ1:まず2台FX2をペアリングしてください

ユニットAとユニットBの両方インカムをオフにした状態で、両方のユニットの「電源ボタン」を同時に9秒間押し続け、両方のユニットの赤と青のライトが点滅するまで、チャンネル1のペアリングモードに入ります。

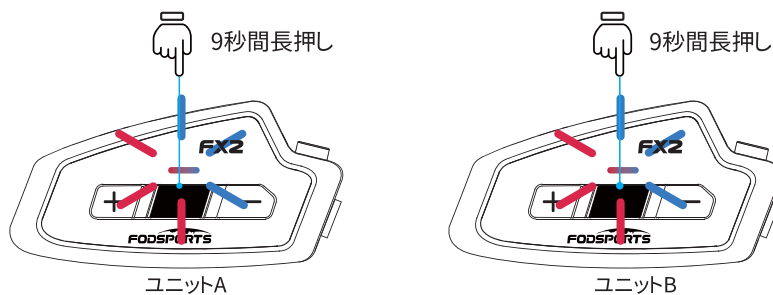


次に、いずれかのユニットの「インターコムボタン」をクリックすると、このユニットの青いライトがすばやく点滅します。ペアリングが完了すると、両方のユニットで青いライトが点滅します。

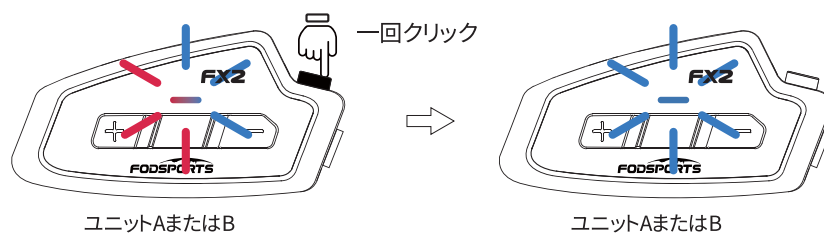


### ステップ2: インターコム通話を始める

その後、一つのインカムの「インターコムボタン」を1回クリックし、3-5 秒間後 2 台の インカム同士の間通信できます。インターコムモードに入ると、両方のユニットは同時に青いライトが点滅しています。

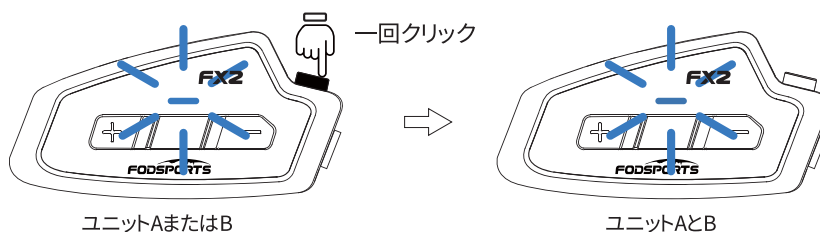

### ステップ3: インターコム通話を切断する

通信する時、1台のユニットの「インターコムボタン」をクリックして、インターカム通信が切断されます。切断された後、両方のユニットのライトが青点滅の状態となります。

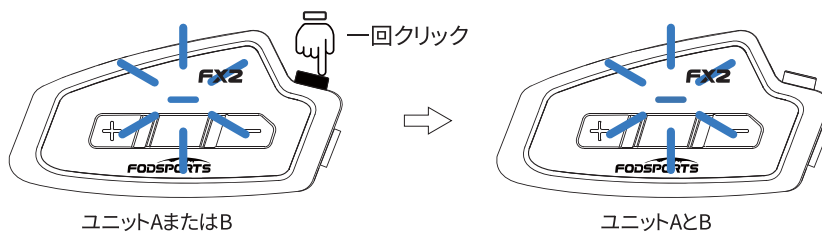


## 6.2 3台のFX2ヘッドセットをペアリングして通話する




### ステップ1:まずユニットAとユニットBをペアリングしてください

ユニットAとユニットBの両方インカムをオフにした状態で、両方のユニットの「電源ボタン」を同時に9秒間押し続け、両方のユニットの赤と青のライトが点滅するまで、チャンネル1のペアリングモードに入ります。

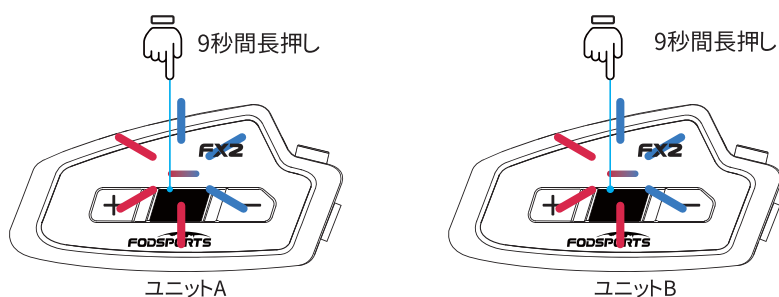


次に、いずれかのユニットの「インターコムボタン」をクリックすると、このユニットの青いライトがすばやく点滅します。ペアリングが完了すると、両方のユニットで青いライトが点滅します。

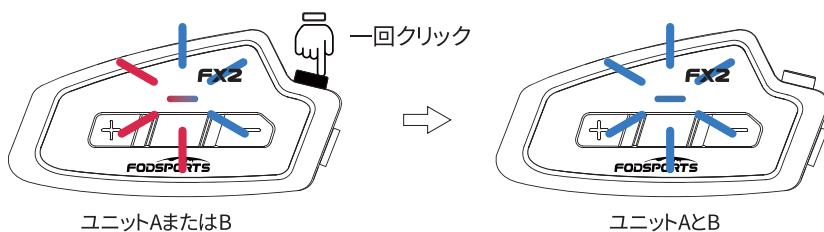


## ステップ2:次にユニットBとユニットCをペアリングする

ユニットCをオンにします。ユニットBとユニットCの「インターコム」と「音量-」ボタンを同時に3秒間押しと、赤と青のライトが点滅してチャンネル2のペアリングモードに入ります。

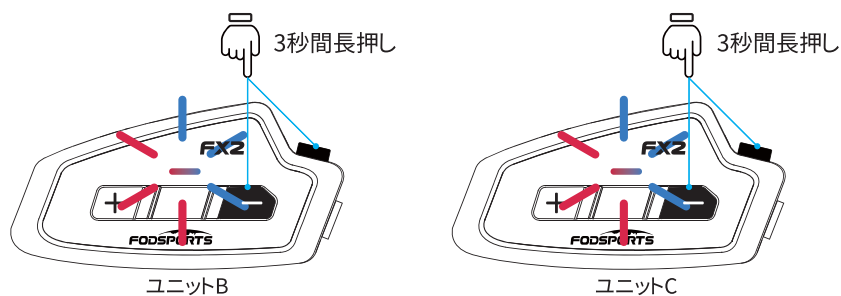


次に、このユニットの青いライトがすばやく点滅するまで、いずれかのユニットの「インターコムボタン」を押します。ペアリングが完了すると、両方のユニットで青いライトが点滅します。

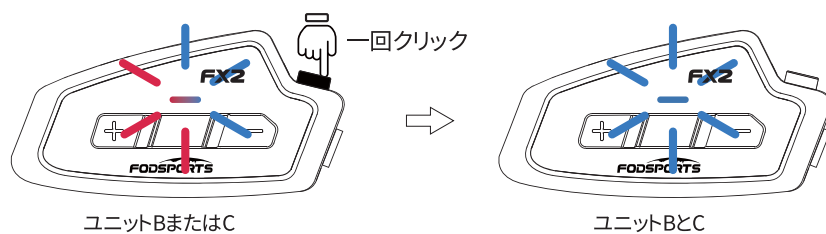


### ステップ3:3台のインカム同士の通話

3台すべてがペアリングされた後、ユニットBがブリッジユニットとして設定されます。


3.1 ユニットAまたはユニットBの「インターコムボタン」をクリックし、2つのユニットを接続します。

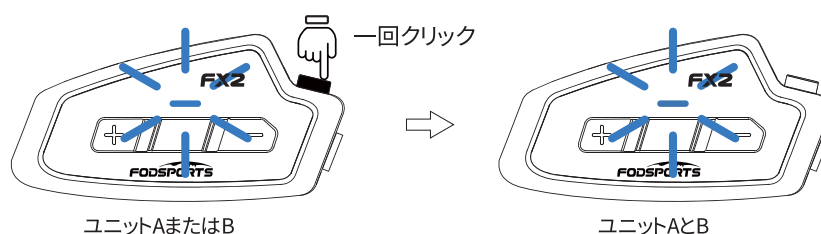

3.2 ユニットAまたはユニットBの「インターコムボタン」をクリックしてインターコム通話を切断します。ユニットCまたはユニットBの「インターコムボタン」をダブルクリックして2つのユニットを接続します。ユニットBとユニットCが通話を開始します。インターコム通話を切り替えました。

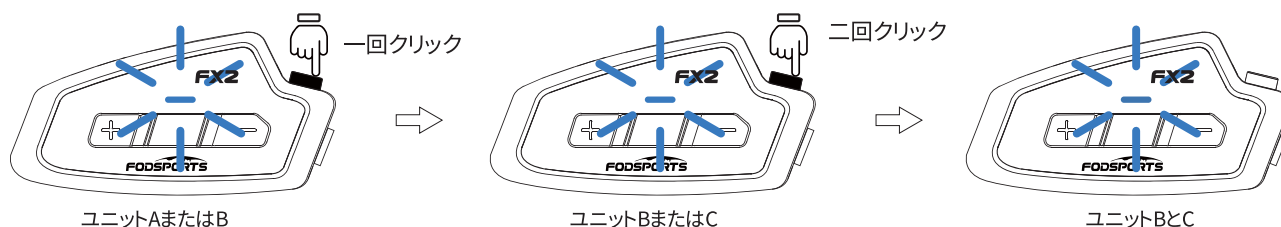


3.3 ユニットBまたはユニットCの「インターコムボタン」をダブルクリックして、インターコム通話を切断します。ユニットAまたはユニットBの「インターコムボタン」をクリックして、2つのユニットを接続します。ユニットAとユニットBが通話を開始します。インターコム通話を切り替えました。

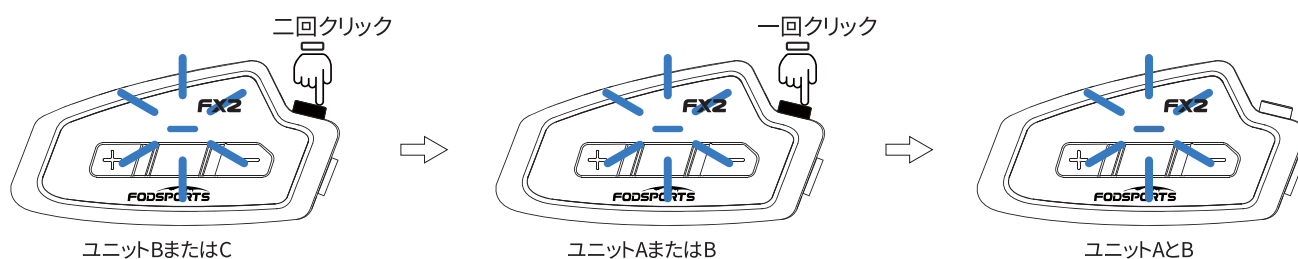


### 6.3 インターコムをすばやく切り替える

シーン1: インターコム通話中に「電源ボタン」をクリックしてインターコムモードを終了します。






シーン2: ユニットBとユニットCのインターコム通話中に、ユニットAがユニットBと通話したい場合、ユニットAの「インターコムボタン」をクリックすると、ユニットBにインターコム通話の着信音が聞こえます。ユニットBの「電源ボタン」をダブルクリックして、ユニットAと直接話します。(インターコム通話の着信音が鳴ってから10秒以内にユニットBの「インターコムボタン」をダブルクリックすると有効になります。)

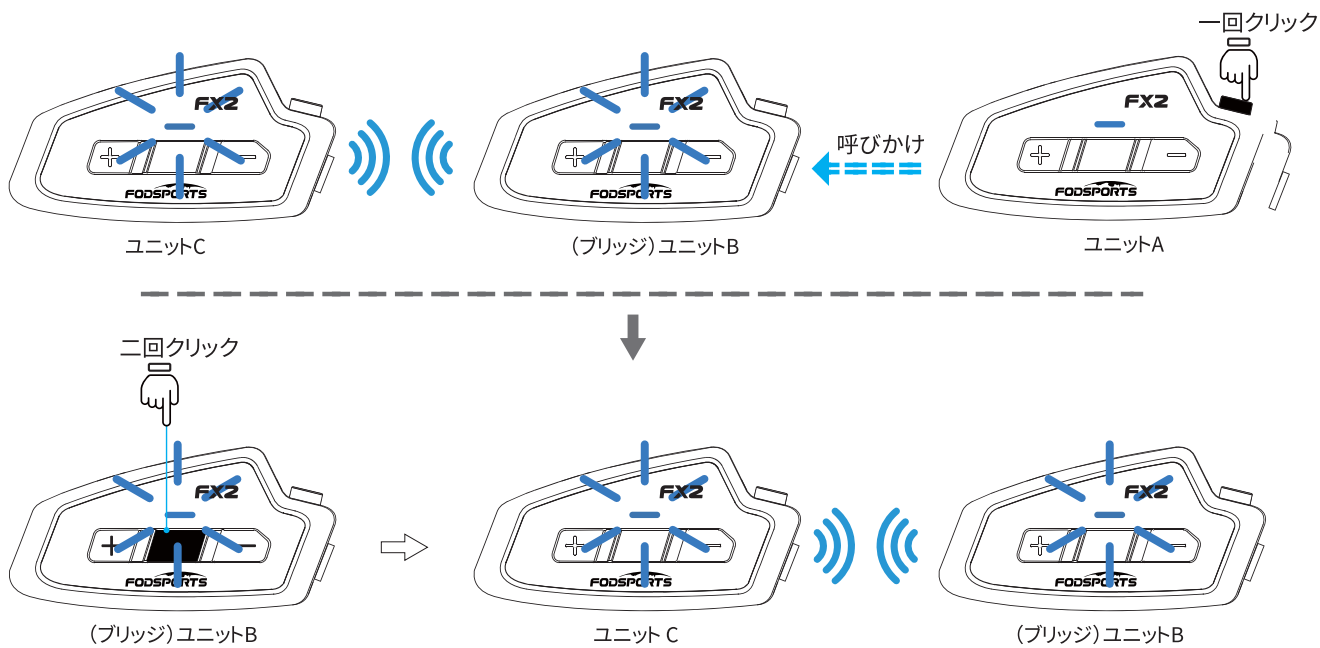

**シーン3:**ユニットAとユニットBのインターコム通話中に、ユニットCがユニットBと通話したい場合、ユニットCの「インターコムボタン」をダブルクリックすると、ユニットBにインターコム通話の着信音が聞こえます。ユニットBの「電源ボタン」をダブルクリックして、ユニットCと直接話します。(インターコム通話の着信音が鳴ってから10秒以内にユニットBの「電源ボタン」をダブルクリックすると有効になります。)

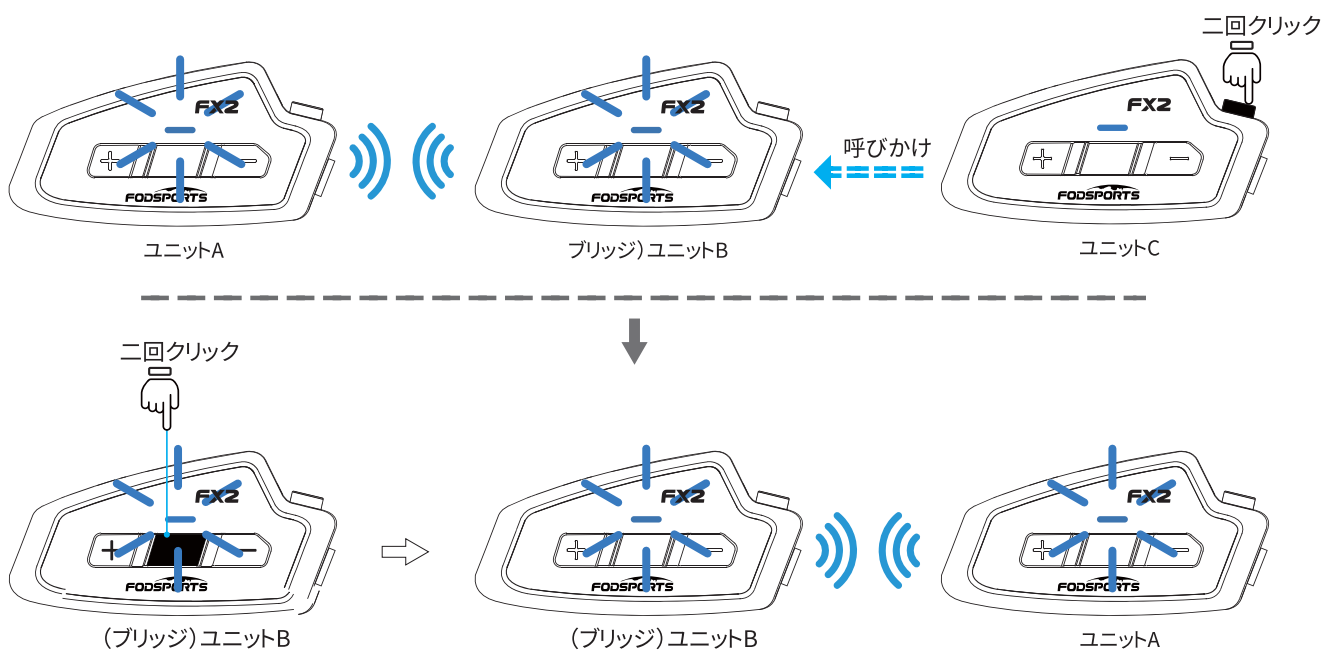

## 7. 製品仕様

**Bluetooth対応プロファイル:** HSP、HFP、A2DP、AVRCP、AGHSP

**電池:** リチウム電池、850mA、3.7v

**サイズ:** 8.9cm \* 4.3cm \* 2.5cm

**重量:** 50G、100G (ヘッドホン及びマイクキットを含む)

**周波数範囲:** 2.4G-2.485G

**作動温度:** -20°C ~ 50°C

**認証:** CE FCC ROHS BQB TELEC

**USBアダプターの標準充電電圧:** DC 5V±0.2V

**USBアダプターの標準充電回路:** DC 1A±0.5A

**充電時間:** 2~3時間

**\*FX2は以下の優先順位で動作します。**

1. 携帯電話 (最高)
2. インターコム
3. Bluetoothステレオ音楽、FMラジオ (最低)
4. 優先度の低い機能は、常に優先度の高い機能によって常に中断されます。例えば、ステレオ音楽はインターコムの通話によって中断され、インターコムの会話は携帯電話の着信によって中断されます。

## 8. メインテナンスとケア

FX2本体およびアクセサリを正しく使用するために、必ずお読みください。

1. ほこりや汚れの多い環境でデバイスを使用または保管しないでください。可動部品や電子部品が損傷する可能性があります。
  2. 高温の場所に保管しないでください。高温は、電子機器の寿命を縮め、バッテリーを損傷し、特定のプラスチックを変形または溶解させる可能性があります。
  3. 低温の場所には保管しないでください。常温に戻ったときに、内部に湿気が発生し、電子回路基板を損傷することがあります。
  4. FX2を分解・改造しないでください。火事や感電などの原因になります。
  5. 落したり、叩いたりしないでください。乱暴な取り扱いは、内部の回路基板や微細な機構を壊す可能性があります。
  6. デバイスの洗浄には、強力な化学薬品、洗浄溶剤、または洗剤を使わないでください。
  7. デバイスを塗装しないでください。塗料は可動部分を詰まらせ、適切な動作を妨げる可能性があります。
- これらの提案は、ヘッドセット本体、スピーカーマイククランプユニット、および電源充電器にも同様に適用されます。

## 9. アフターサービス

本商品は厳重に管理された工場にて生産・管理しておりますが、万が一不良が発生した場合(初期不良や付属品欠品など)、またはご使用上の問題がございましたら(特に2台以上のFX2インカムのペアリング方法について)、お気軽に電子メール: [winzon.cs@outlook.com](mailto:winzon.cs@outlook.com)までお問い合わせくださいませ。弊社では万全なアフターサービス、迅速な修理、良品との交換を実施しております。24時間以内に返信いたします。



# Warranty Card

Purchase Date: \_\_\_\_\_

Dealer/Retailer: \_\_\_\_\_

Item No.: \_\_\_\_\_

Customer Name: \_\_\_\_\_

Customer Tel: \_\_\_\_\_

Customer E-mail: \_\_\_\_\_



## Product Failure Description:

(Please be sure to fill in your related information so that we can better serve you in time)







## User Manual Download



<https://community.fodsports.com/support/fx2-user-manual/>

**FODSPORTS**



fodsports.com

