



FCC TEST REPORT

Test report
On Behalf of
SHENZHEN SUNVEYTECH CO.,LTD
For
Digital Wireless Backup Camera
Model No.: SV-928WL,
SV-612WL,SV-208WL,SV-7018WL,SV-7028WL,
SV-7068WL,SV-7078WL,SV-7088WL,SV-7098WL

FCC ID: 2AQNR-928WL

Prepared for : SHENZHEN SUNVEYTECH CO.,LTD
6/8F, Mantong Building, No. 13, Dafu Road, Guanlan, Longhua
District, Shenzhen

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

Date of Test: July.10, 2018 ~ Oct.17, 2018
Date of Report: Oct.17, 2018
Report Number: HUAK180723586E

TEST RESULT CERTIFICATION

Applicant's name: SHENZHEN SUNVEYTECH CO.,LTD
Address.....: 6/8F, Mantong Building, No. 13, Dafu Road, Guanlan, Longhua District, Shenzhen
Manufacture's Name.....: SHENZHEN SUNVEYTECH CO.,LTD
Address.....: 6/8F, Mantong Building, No. 13, Dafu Road, Guanlan, Longhua District, Shenzhen

Product description

Trade Mark: SVTCAM CARMOUR
Product name: Digital Wireless Backup Camera
Model and/or type reference : SV-928WL,SV-612WL,SV-208WL,SV-7018WL,SV-7028WL,SV-7068WL,SV-7078WL,SV-7088WL,SV-7098WL
Standards: FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test..... :
Date (s) of performance of tests..... : Sep.10, 2018 ~ Oct.12, 2018
Date of Issue : Oct.12, 2018
Test Result : **Pass**

Testing Engineer : Gary Qian
(Gary Qian)
Technical Manager : Eden Hu
(Eden Hu)
Authorized Signatory : Jason Zhou
(Jason Zhou)

TABLE OF CONTENTS

1. Test Result Summary	4
1.1. TEST PROCEDURES AND RESULTS	4
1.2. TEST FACILITY	4
1.3. MEASUREMENT UNCERTAINTY	5
2. EUT Description	6
2.1. GENERAL DESCRIPTION OF EUT	6
2.2. CARRIER FREQUENCY OF CHANNELS	7
2.3. OPERATION OF EUT DURING TESTING.....	7
2.4. DESCRIPTION OF TEST SETUP	7
3. General Information.....	8
3.1. TEST ENVIRONMENT AND MODE	8
3.2. DESCRIPTION OF SUPPORT UNITS	9
4. Test Results and Measurement Data.....	10
4.1. CONDUCTED EMISSION.....	10
4.2. MAXIMUM CONDUCTED OUTPUT POWER.....	12
4.3. EMISSION BANDWIDTH	14
4.4. POWER SPECTRAL DENSITY	20
4.5. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	30
4.6. RADIATED SPURIOUS EMISSION MEASUREMENT	36
4.7. ANTENNA REQUIREMENT	62
4.8. PHOTOGRAPH OF TEST	63

1. Test Result Summary

1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	N/A
Conducted Peak Output Power	§15.247 (b)(3) §2.1046	PASS
6dB Emission Bandwidth	§15.247 (a)(2) §2.1049	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	1§5.247(d) §2.1051, §2.1057	PASS
Spurious Emission	§15.205/§15.209 §2.1053, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

1.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

2. EUT Description

2.1. GENERAL DESCRIPTION OF EUT

Equipment	Digital Wireless Backup Camera
Model Name	SV-928WL
Serial No.	SV-612WL,SV-208WL,SV-7018WL,SV-7028WL, SV-7068WL,SV-7078WL,SV-7088WL,SV-7098WL
Model Difference	It's the same except the name is different
Trade Mark	SVTCAM CARMOUR
FCC ID	2AQNR-928WL
Antenna Type	External Antenna
Antenna Gain	2dBi
Operation frequency	802.11b/g/n 20:2412~2462 MHz 802.11n 40: 2422~2452MHz
Number of Channels	802.11b/g/n20: 11CH 802.11n 40: 7CH
Modulation Type	CCK/OFDM/DBPSK/DAPSK
PowerSource	DC12V
Power Rating	DC12V

2.2. Carrier Frequency of Channels

Channel List for 802.11b/802.11g/802.11n (HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List For 802.11n(HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
--	--	04	2427	07	2442	--	--
--	--	05	2432	08	2447	--	--
03	2422	06	2437	09	2452		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode for 802.11b/802.11g/802.11n (HT20)**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

The mode is used: Transmitting mode for 802.11n (HT40)


Low Channel: 2422MHz

Middle Channel: 2437MHz

High Channel: 2452MHz

2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and Radiation and Above1GHz Radiationtesting:



3. Genera Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%)
<p>The sample was placed (0.8m below 1GHz, 1.5m above 1GHz)above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.For the full battery state and The output power to the maximum state.</p>	

<p>We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p>	
<p>Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.</p>	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps
802.11n(H40)	13.5Mbps
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation
<p>1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.</p> <p>2.According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20),13.5Mbps for 802.11(H40).Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.</p>	

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/


Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*
- 3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*

4. Test Results and Measurement Data

4.1. Conducted Emission

Test Specification

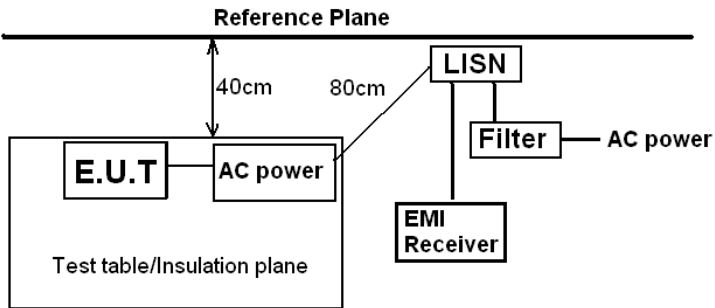Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	 <p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Charging + transmitting with modulation														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Result:	PASS														

Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Sep. 27, 2018
LISN	R&S	ENV216	HKE-002	Sep. 27, 2018
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

Test Result

Not applicable for device which is DC Power supply.

4.2. Maximum Conducted Output Power

Test Specification

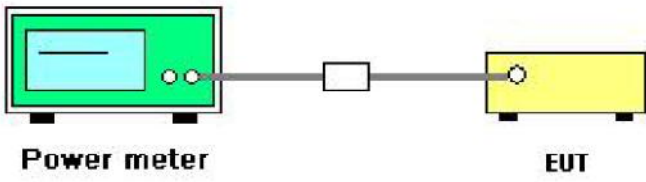Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB 558074
Limit:	30dBm
Test Setup:	 <p>The diagram illustrates the test setup. On the left is a green Power meter. A cable connects it to a small white attenuator. Another cable connects the attenuator to a yellow EUT (Equipment Under Test) on the right.</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the Peak output power and record the results in the test report.
Test Result:	PASS

Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power meter	Agilent	E4417B	HKE-107	Sep. 27, 2018
Power Sensor	Agilent	E9327A	HKE-113	Sep. 27, 2018
RF cable	Times	1-40G	HKE-034	Sep. 27, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Sep. 27, 2018


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

Test Data

TX 802.11b Mode			
Test Channe	Frequency	Maximum Peak Conducted Output Power	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	12.63	30
CH06	2437	11.94	30
CH11	2462	11.62	30
TX 802.11g Mode			
CH01	2412	12.16	30
CH06	2437	11.52	30
CH11	2462	11.37	30
TX 802.11n20 Mode			
CH01	2412	11.86	30
CH06	2437	11.07	30
CH11	2462	10.85	30
TX 802.11n40 Mode			
CH03	2422	10.17	30
CH06	2437	10.77	30
CH09	2452	10.39	30

4.3. Emission Bandwidth

Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB 558074
Limit:	>500kHz
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2018
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Sep. 27, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


Test data

Test channel	6dB Emission Bandwidth (MHz)			
	802.11b	802.11g	802.11n(H20)	802.11n(H40)
Lowest	10.12	16.34	16.96	35.46
Middle	10.10	16.34	17.23	35.18
Highest	10.11	16.34	17.20	35.26
Limit:	>500KHz			
Test Result:	PASS			


Test plots as follows:

802.11b Modulation

Lowest channel

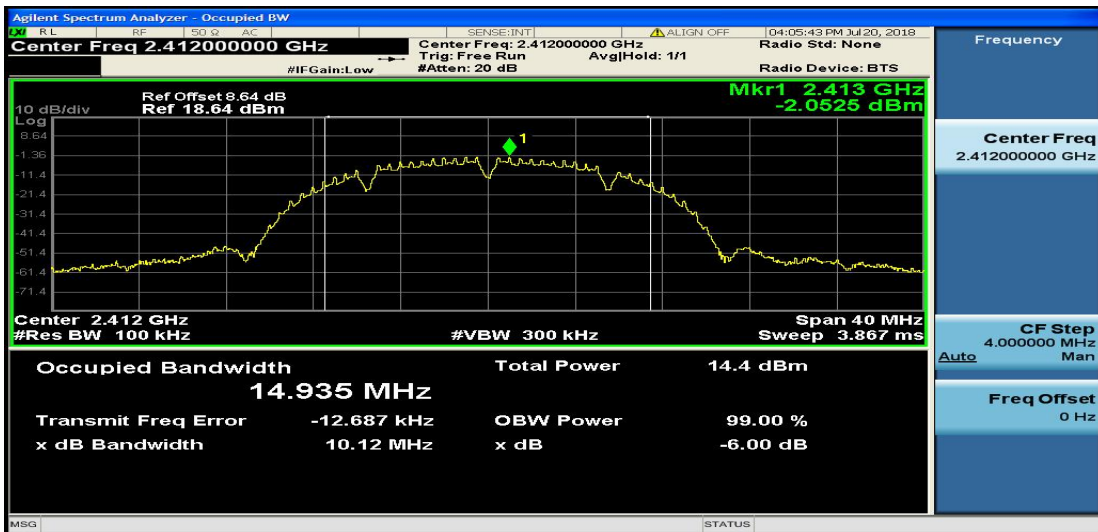

Middle channel

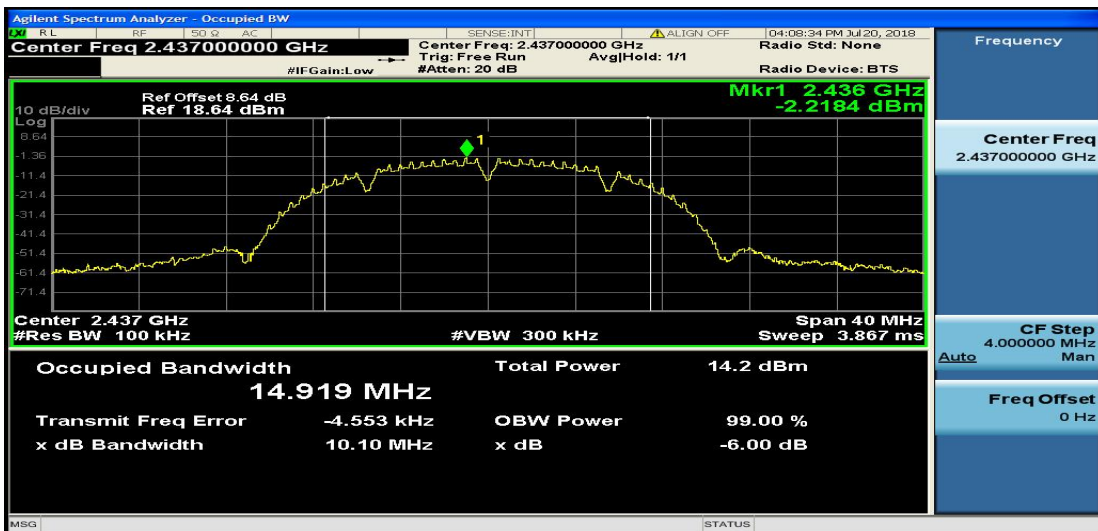


Highest channel




802.11g Modulation


Lowest channel

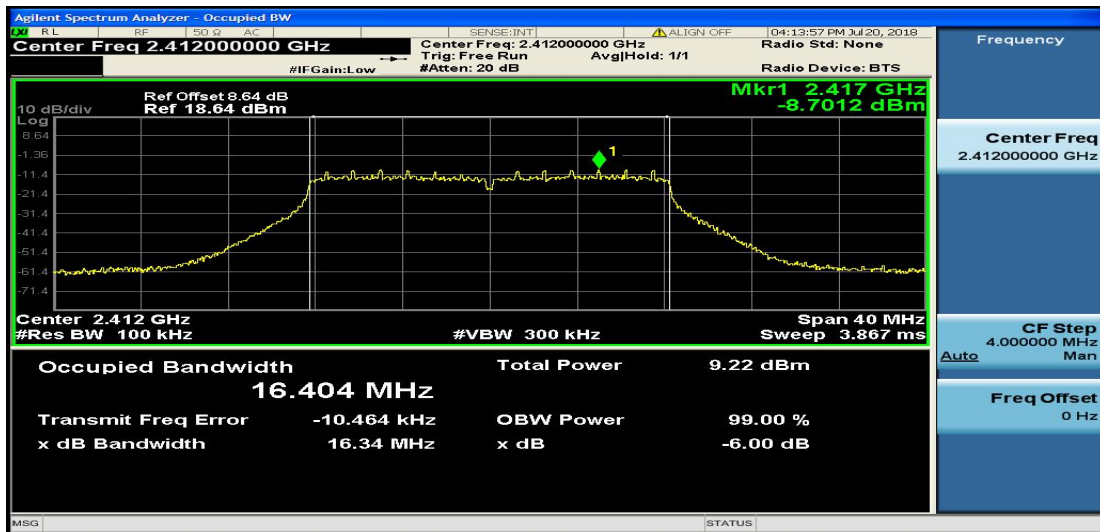

Middle channel

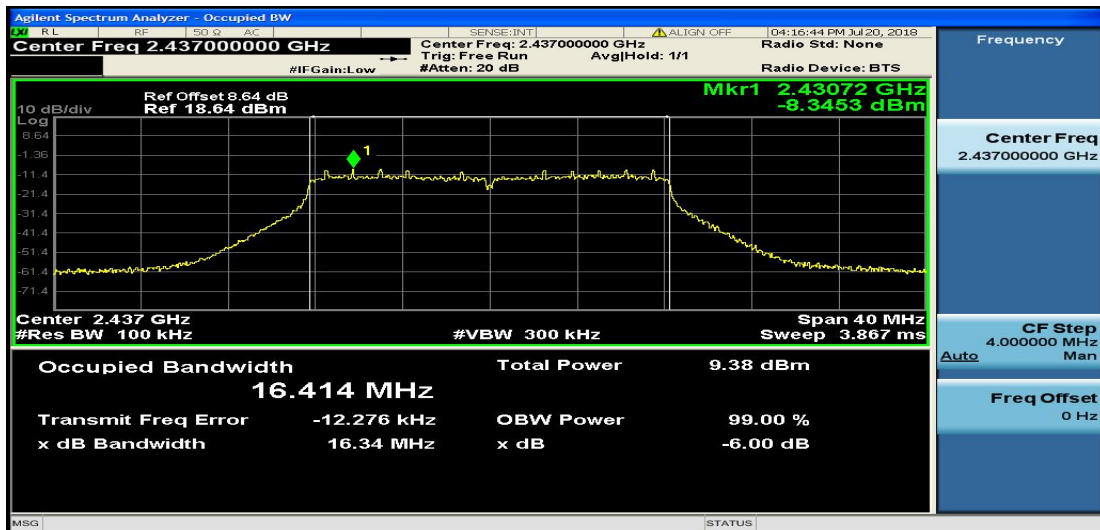

Highest channel

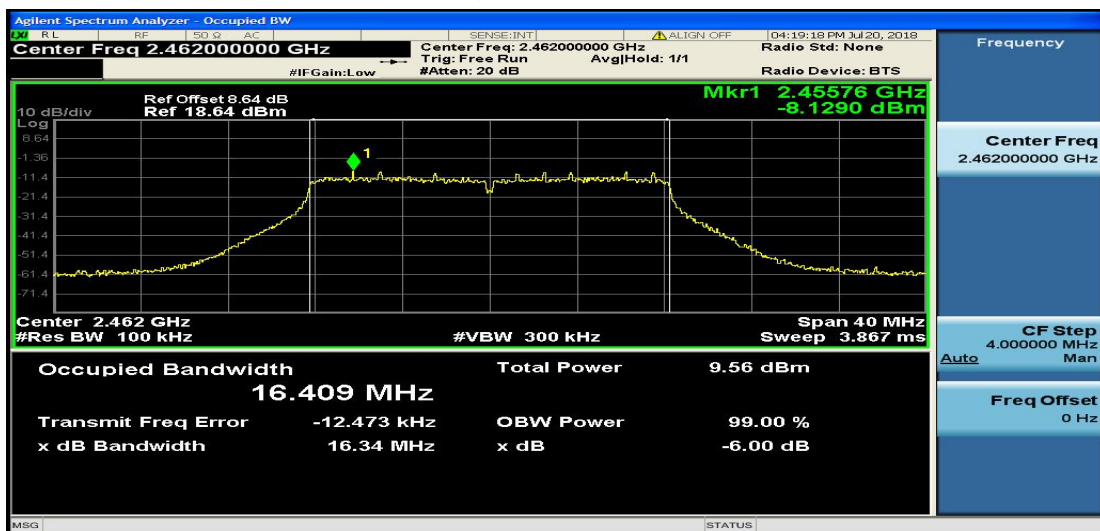


802.11n (HT20) Modulation


Lowest channel



Middle channel

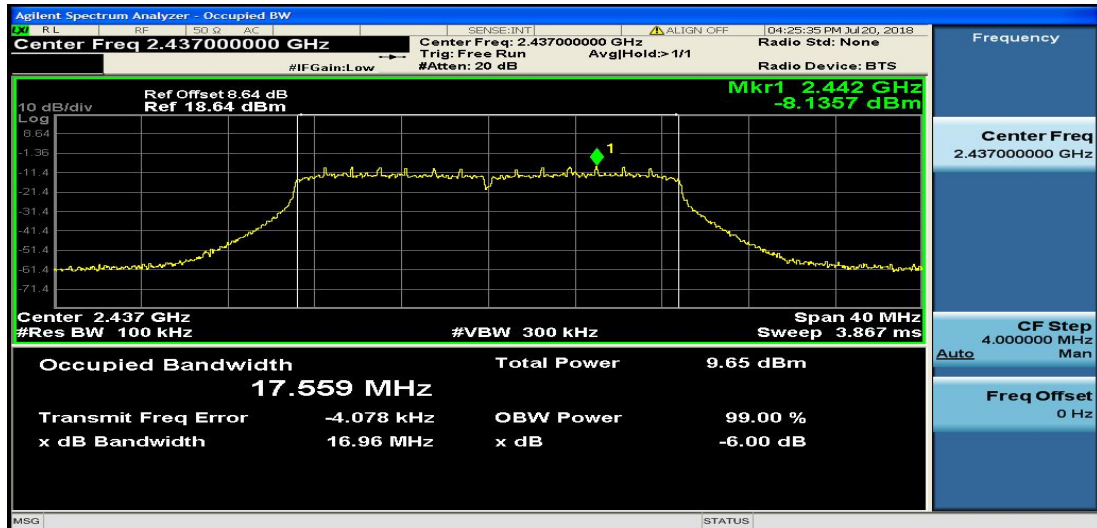

Highest channel

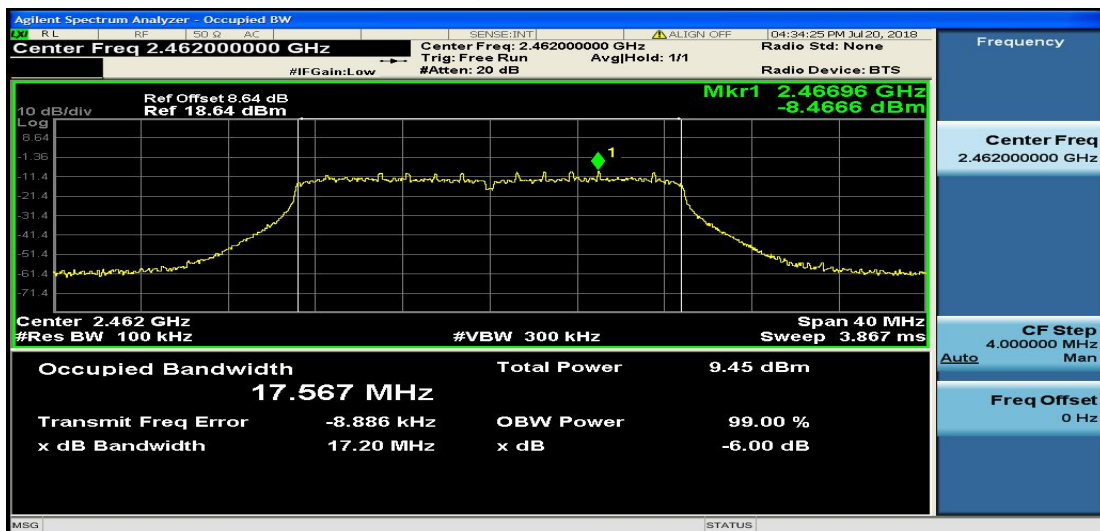


802.11n (HT40) Modulation


Lowest channel



Middle channel

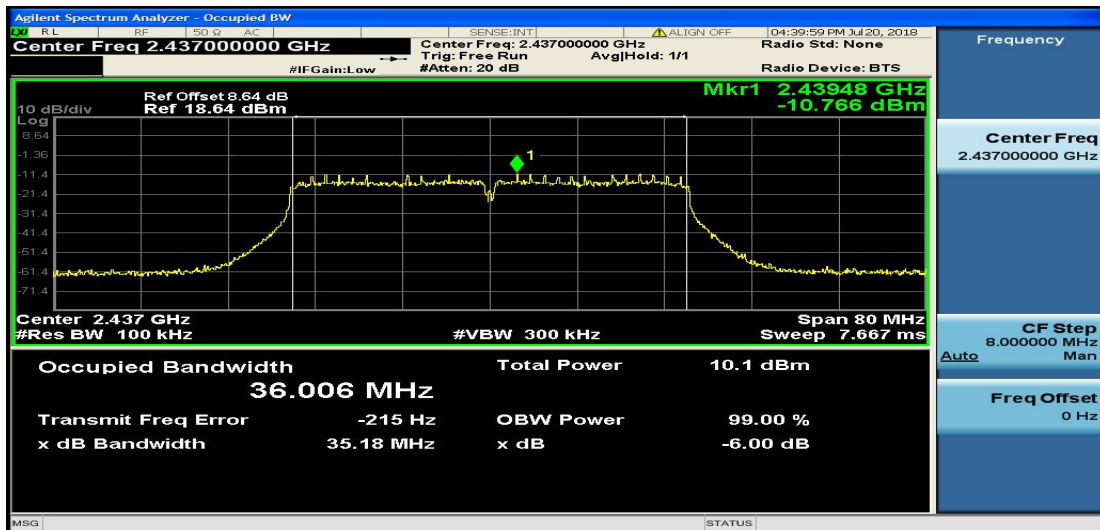


Highest channel

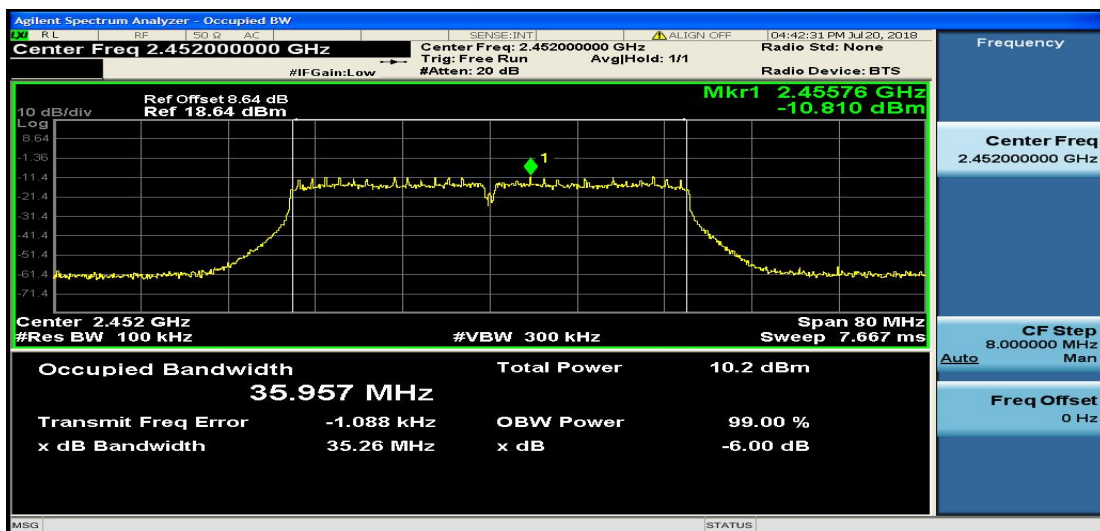

4.4. Power Spectral Density

Test Specification

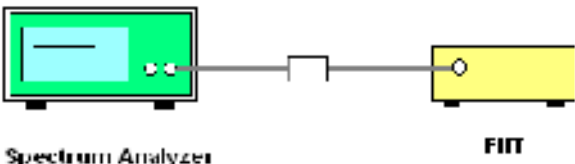Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB 558074
Limit:	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 <p>The diagram illustrates the test setup. On the left is a Spectrum Analyzer with a green screen and two ports. A cable connects one of its ports to an attenuator (represented by a small rectangle with a break symbol). Another cable connects the other side of the attenuator to a FIT device (represented by a yellow rectangle with a port).</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows Measurement Procedure 10.3 Method AVGPSD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v04 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. Video bandwidth $\text{VBW} \geq 3 \times \text{RBW}$. Set the span to at least 1.5 times the OBW. 5. Detector = RMS, Sweep time = auto couple. 6. Employ trace averaging (RMS) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level. 6. Measure and record the results in the test report.
Test Result:	PASS

Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2018
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Sep. 27, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

Test data

Test channel	Power Spectral Density (dBm/30kHz)			
	802.11b	802.11g	802.11n(H20)	802.11n(H40)
Lowest	-2.126	-8.02	-7.82	-5.573
Middle	-2.449	-8.1	-7.53	-6.466
Highest	-3.32	-7.72	-8.23	-5.912
Limit:	18dBm/30kHz			
Test Result:	PASS			

Test plots as follows:

802.11b Modulation

Lowest channel



Middle channel



Highest channel



802.11g Modulation

Lowest channel



Middle channel



Highest channel



802.11n (HT20) Modulation

Lowest channel



Middle channel




Highest channel




802.11n (HT40) Modulation


Lowest channel

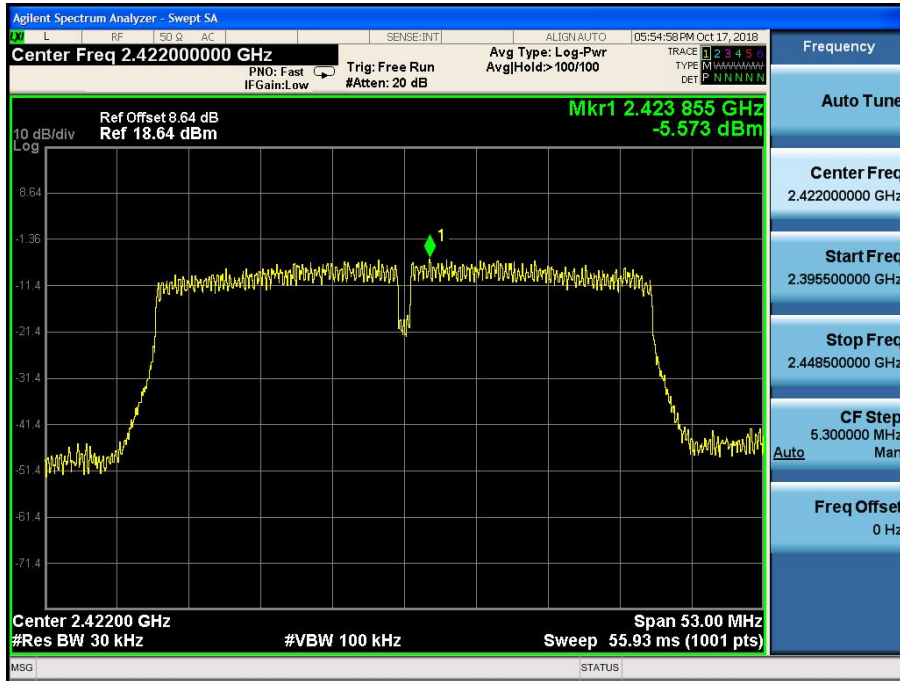

Middle channel

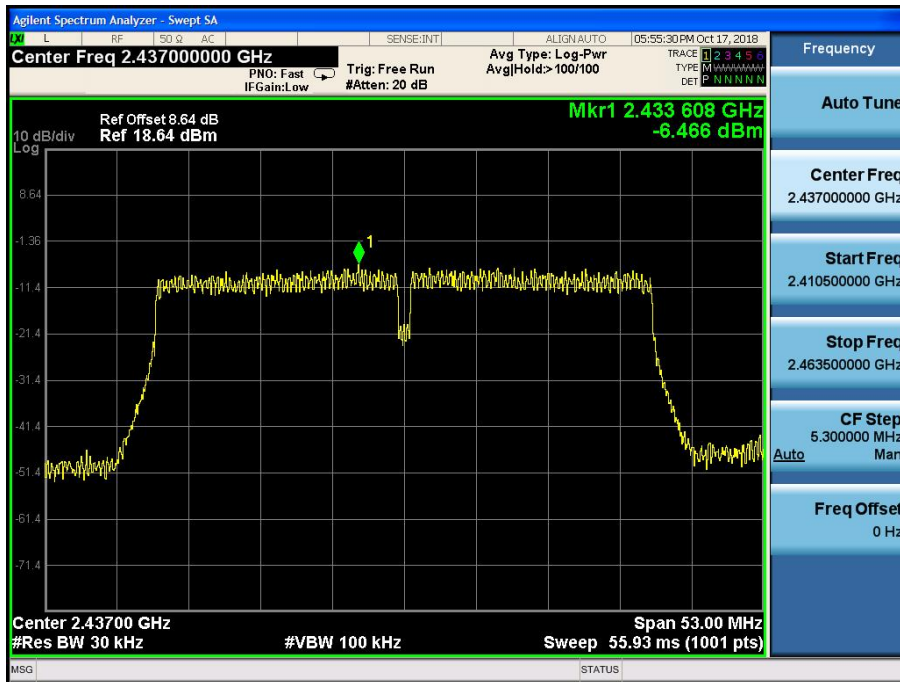


Highest channel

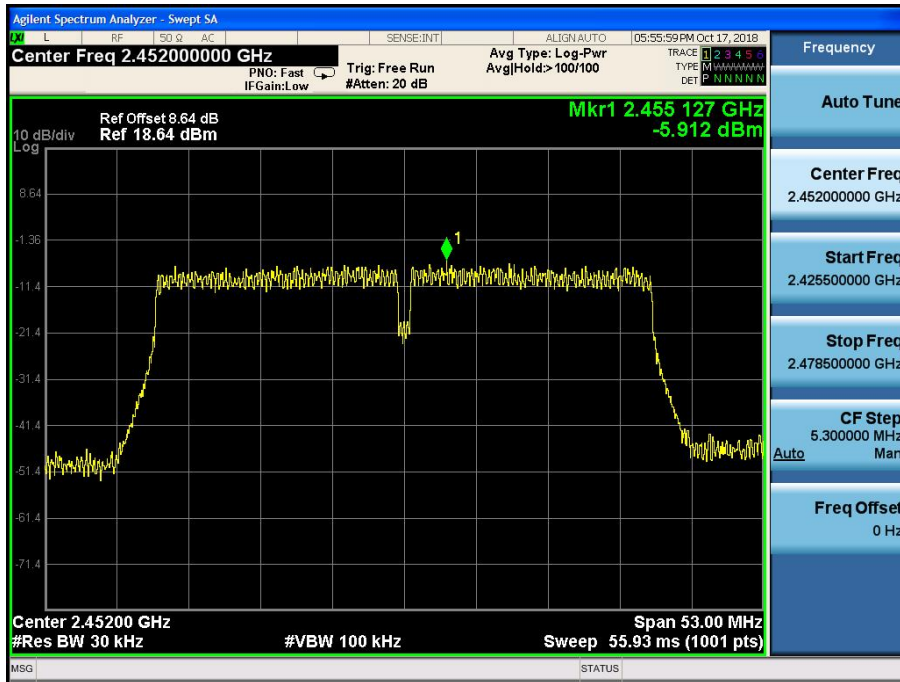

4.5. Conducted Band Edge and Spurious Emission Measurement

Test Specification

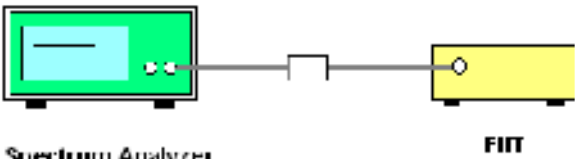Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in thenon-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, asdefined in Section 15.205(a), must also comply with the radiated emission limits specified in Section15.209(a).
Test Setup:	 <p>The diagram illustrates the test setup. On the left is a Spectrum Analyzer with a green screen and a red cursor. A cable connects it to a small white attenuator box. Another cable connects the attenuator to a yellow FIIT device.</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS


Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2018
Signal generator	Agilent	N5183A	HKE-071	Sep. 27, 2018
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Sep. 27, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

Test Data

802.11b Modulation

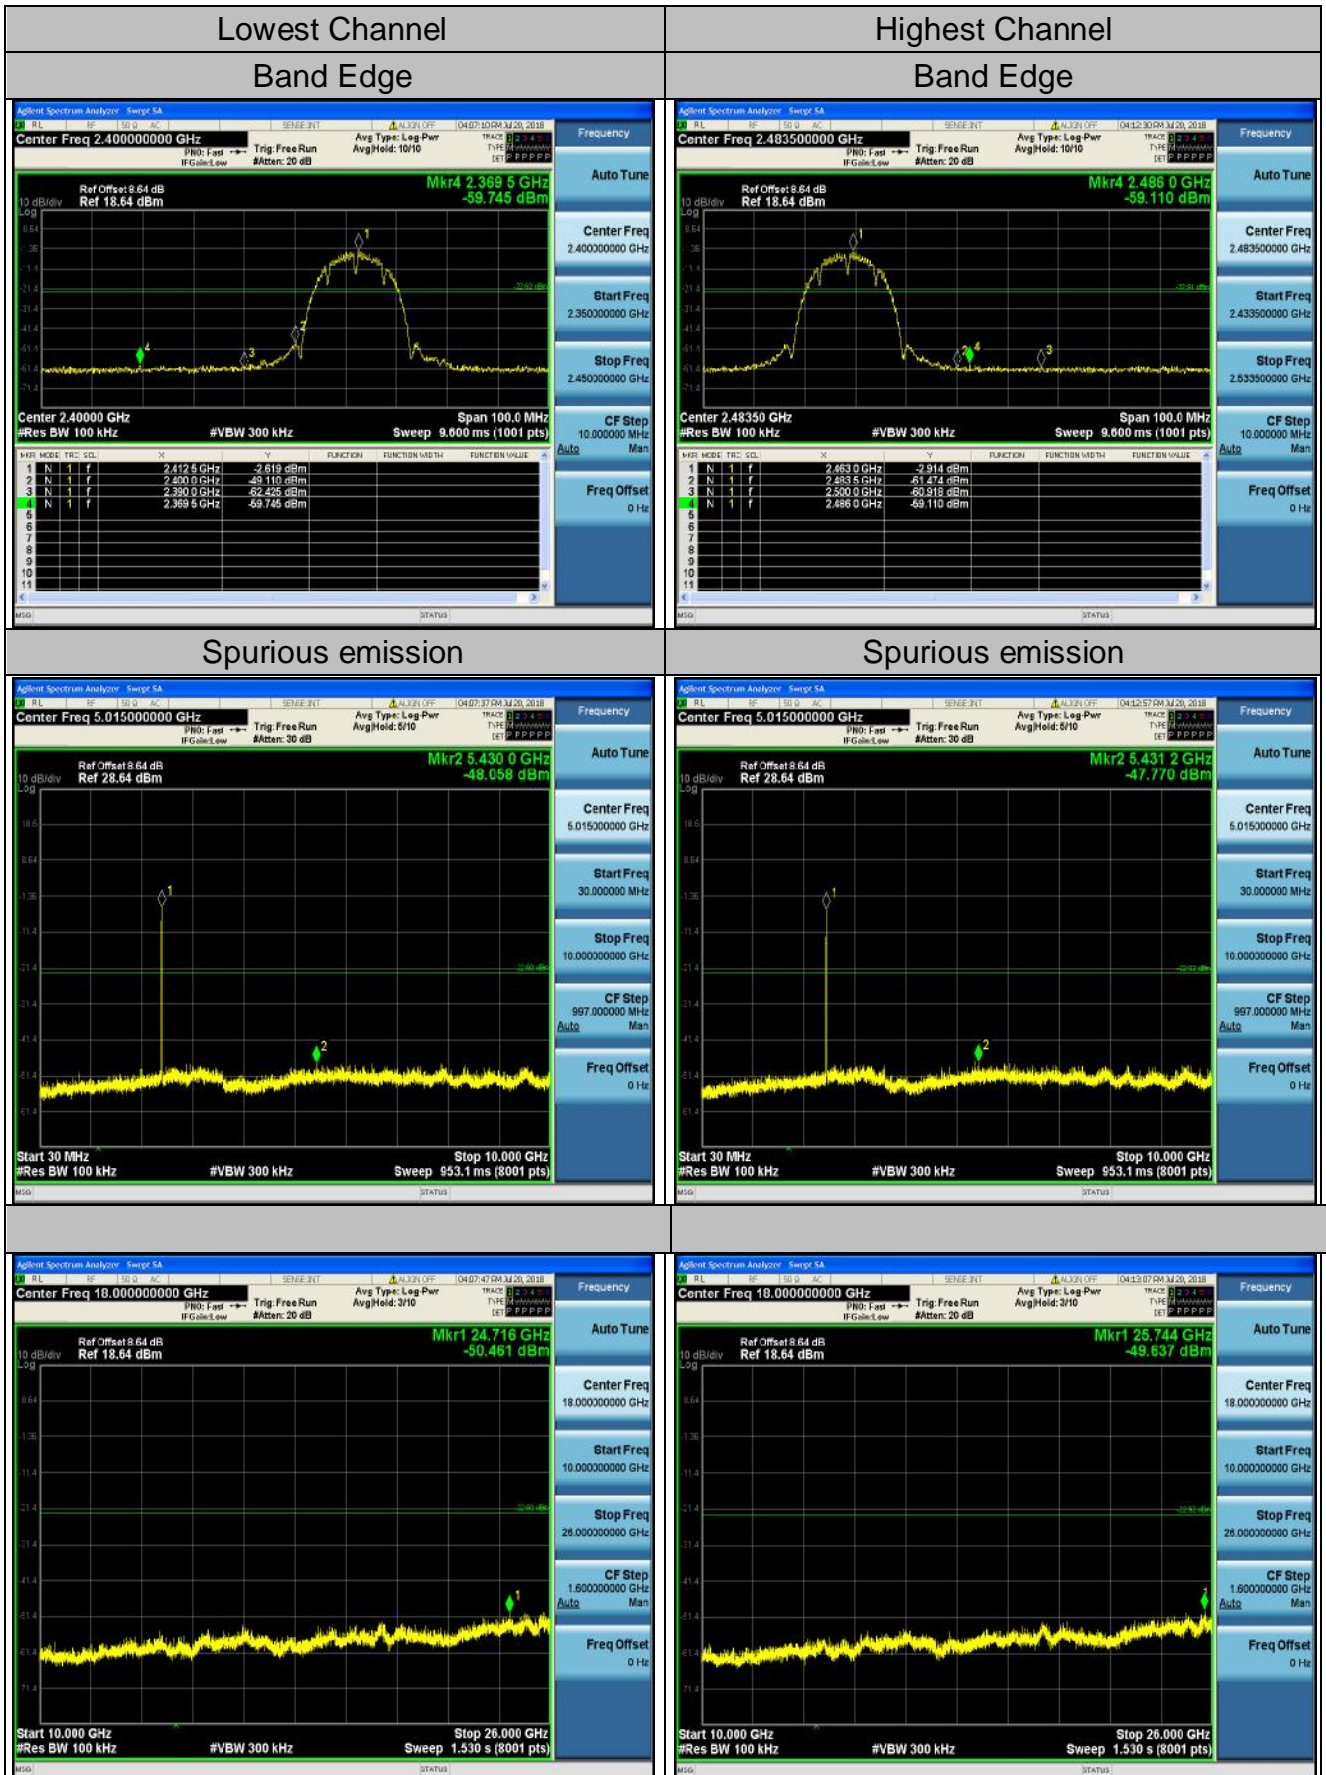

802.11g Modulation

Lowest Channel
Band Edge



Highest Channel
Band Edge




Spurious emission



Spurious emission



802.11n (HT20) Modulation

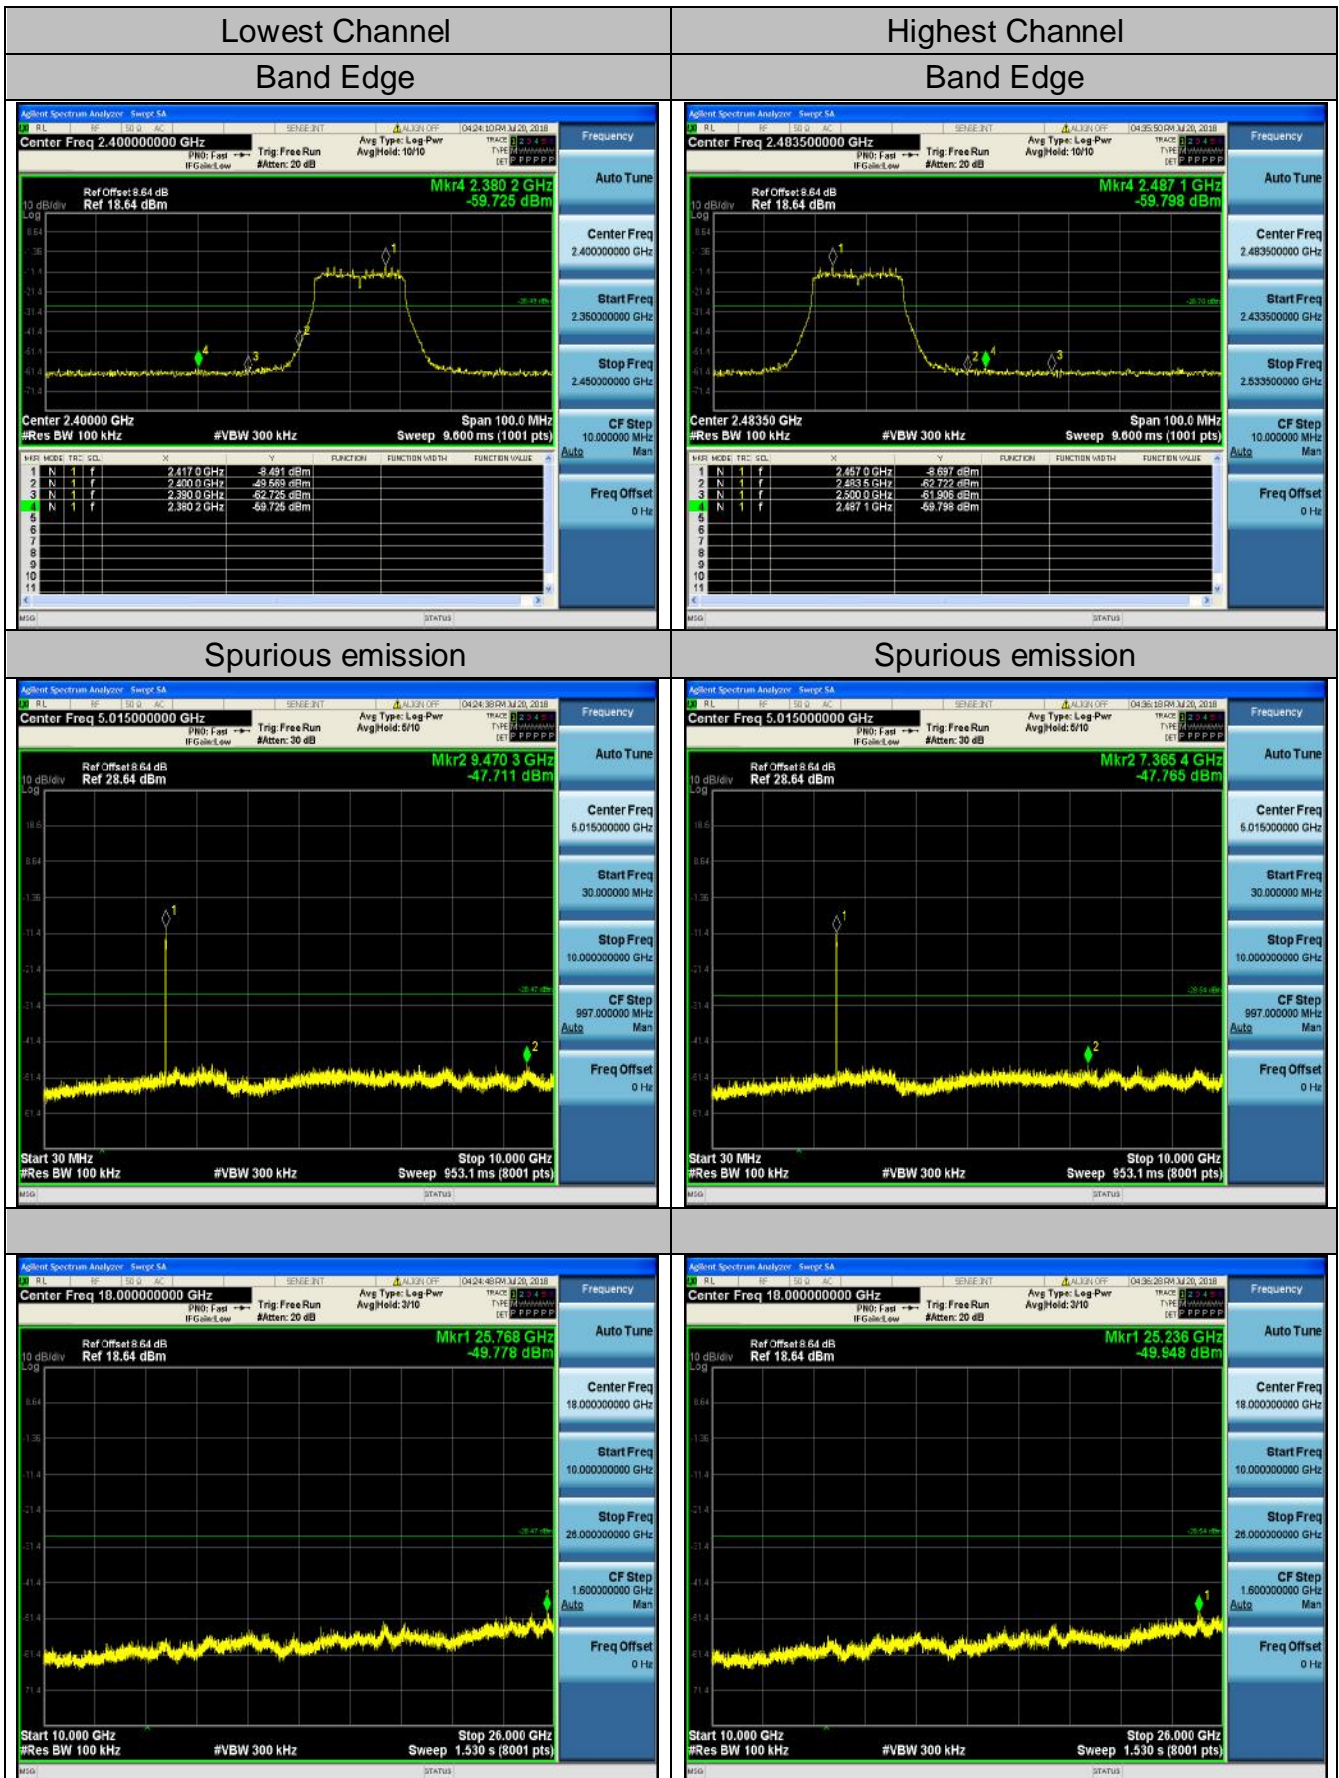

802.11n (HT40) Modulation


Lowest Channel

Band Edge




Highest Channel

Band Edge

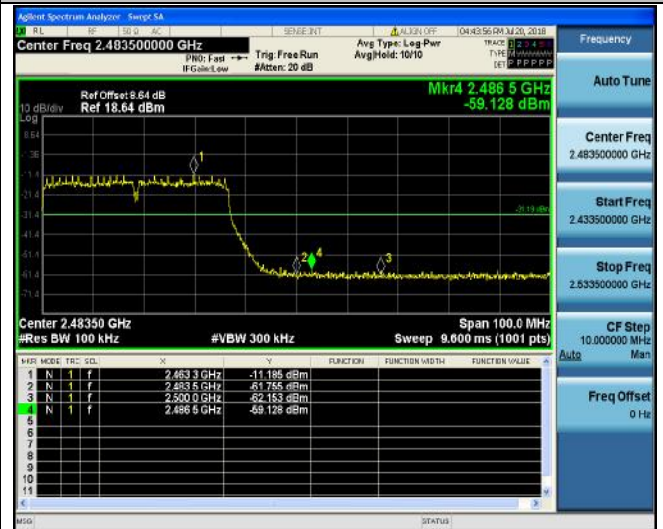

Spurious emission

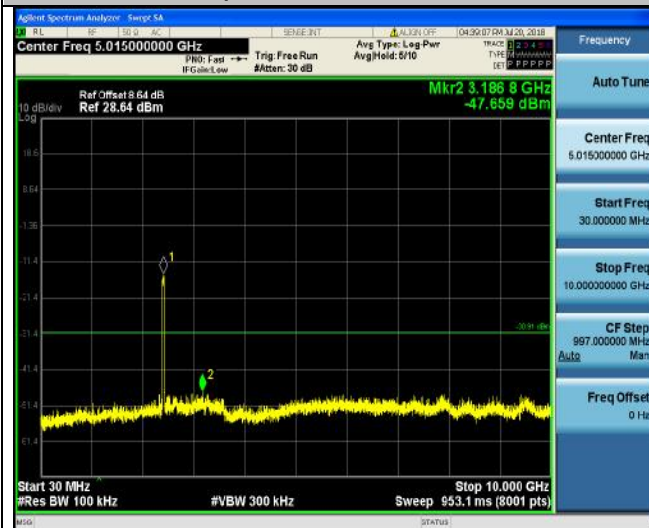


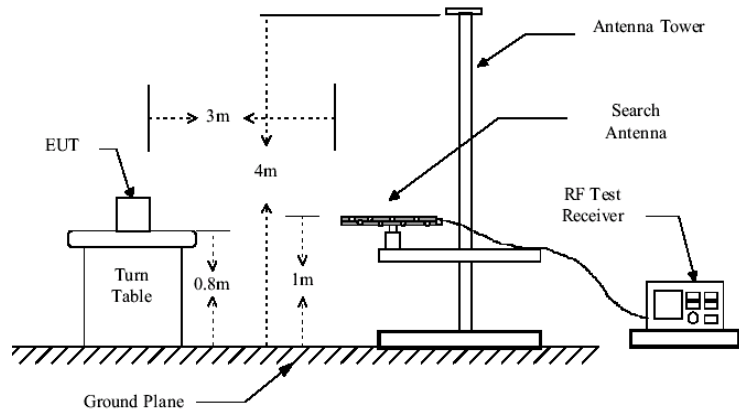
Spurious emission




4.6. Radiated Spurious Emission Measurement

Test Specification

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10: 2013				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)		
	0.009-0.490	2400/F(KHz)	300		
	0.490-1.705	24000/F(KHz)	30		
	1.705-30	30	30		
	30-88	100	3		
	88-216	150	3		
	216-960	200	3		
	Above 960	500	3		
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	
	Above 1GHz	500	3	Average	
5000		3	Peak		
Test setup:	For radiated emissions below 30MHz				
					
30MHz to 1GHz					



Above 1GHz

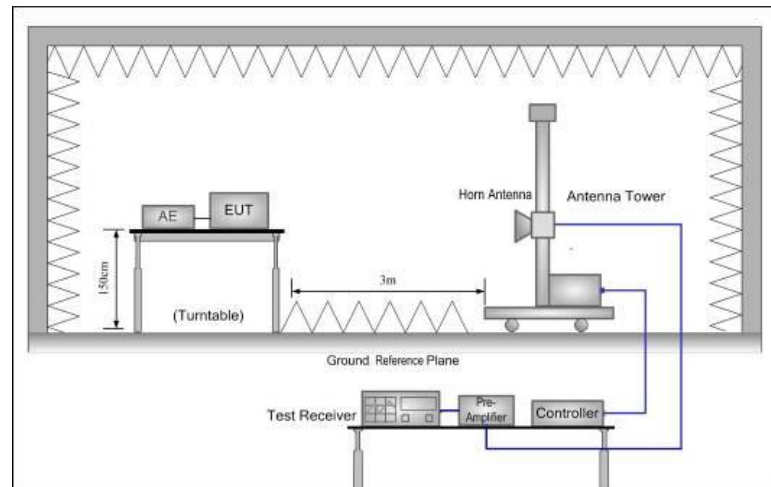

Test Procedure:

1. For the radiated emission test below 1GHz:
 The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a highPASS filter are used for the test in order to get better signal level.
- For the radiated emission test above 1GHz:
 Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the

	<p>emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>5. Use the following spectrum analyzer settings:</p> <p>(1) Span shall wide enough to fully capture the emission being measured;</p> <p>(2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;</p> <p>(3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f > 1$ GHz for peak measurement.</p> <p>For average measurement: $VBW = 10$ Hz, when duty cycle is no less than 98 percent. $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Test results:	PASS

Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI-7	HKE-010	Sep. 27, 2018
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2018
Preamplifier	EMCI	EMC051845 SE	HKE-015	Sep. 27, 2018
Preamplifier	Agilent	83051A	HKE-016	Sep. 27, 2018
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Sep. 26, 2019
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Sep. 26, 2019
Horn antenna	Schwarzbeck	9120D	HKE-013	Sep. 26, 2019
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Sep. 27, 2018
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
RF cable	Times	1-40G	HKE-034	Sep. 27, 2018


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

Test Data

Please refer to following diagram for individual
Below 1GHz

Horizontal

Test Graph

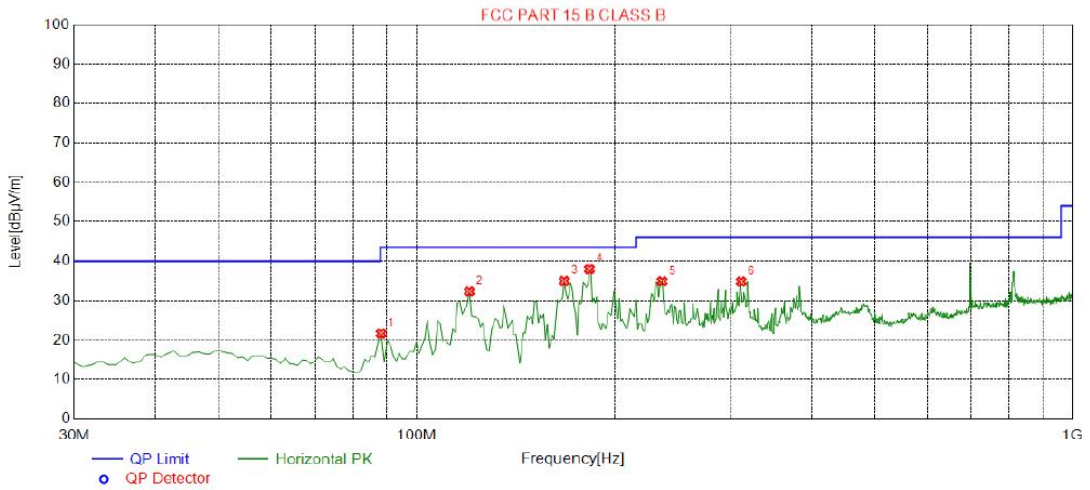

Suspected List


Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	88.2000	21.68	-17.50	43.50	21.82	100	224	Horizontal
2	120.210	32.35	-17.13	43.50	11.15	100	242	Horizontal
3	167.740	35.00	-17.51	43.50	8.50	100	328	Horizontal
4	183.260	38.02	-16.58	43.50	5.48	100	315	Horizontal
5	236.610	34.93	-14.01	46.00	11.07	100	338	Horizontal
6	312.270	34.86	-12.49	46.00	11.14	100	23	Horizontal

Final Data List

Remark: Level(Measurements) = Reading+factor; Margin = Limit – Level
Factor= Cable lose + Antenna factor - Pre-amplifier

Vertical

Test Graph

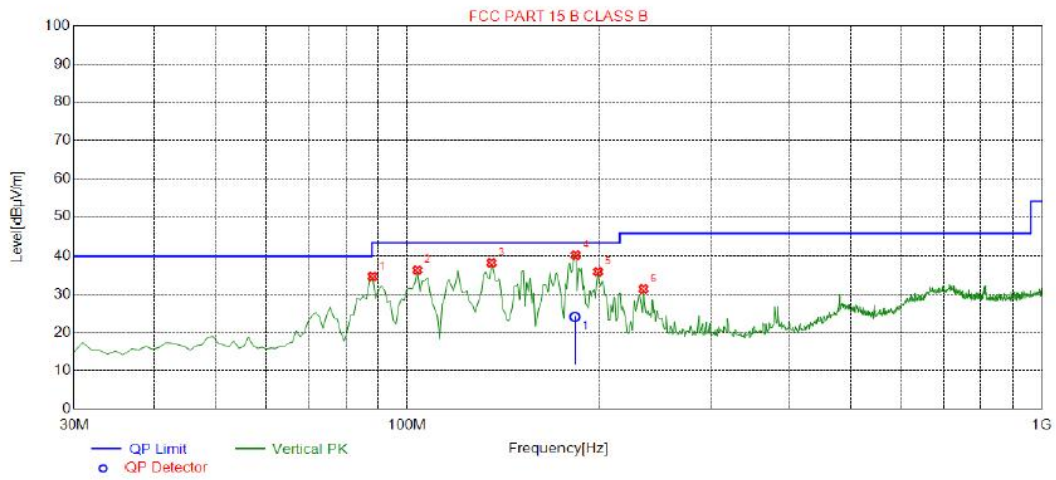

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	88.2000	34.71	-17.50	43.50	8.79	100	357	Vertical
2	103.720	36.38	-15.41	43.50	7.12	100	357	Vertical
3	135.730	38.28	-18.92	43.50	5.22	100	45	Vertical
4	184.230	40.30	-16.50	43.50	3.20	100	340	Vertical
5	199.750	35.94	-15.08	43.50	7.56	100	18	Vertical
6	235.640	31.42	-14.06	46.00	14.58	100	20	Vertical

Final Data List

Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	183.629	-16.55	24.15	43.50	19.35	102.9	328	Vertical

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Level(Measurements) = Reading+factor; Margin = Limit – Level

Factor= Cable lose + Antenna factor - Pre-amplifier

Above 1GHz**RADIATED EMISSION TEST**

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	63.59	-3.64	59.95	74	-14.05	peak
4824	47.24	-3.64	43.6	54	-10.4	AVG
7236	56.65	-0.95	55.7	74	-18.3	peak
7236	42.48	-0.95	41.53	54	-12.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	62.95	-3.64	59.31	74	-14.69	peak
4824	47.02	-3.64	43.38	54	-10.62	AVG
7236	56.38	-0.95	55.43	74	-18.57	peak
7236	42.16	-0.95	41.21	54	-12.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	62.61	-3.51	59.1	74	-14.9	peak
4874	46.46	-3.51	42.95	54	-11.05	AVG
7311	56.35	-0.82	55.53	74	-18.47	peak
7311	41.67	-0.82	40.85	54	-13.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	62.34	-3.51	58.83	74	-15.17	peak
4874	46.25	-3.51	42.74	54	-11.26	AVG
7311	56.11	-0.82	55.29	74	-18.71	peak
7311	41.47	-0.82	40.65	54	-13.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	62.34	-3.43	58.91	74	-15.09	peak
4924	46.03	-3.43	42.6	54	-11.4	AVG
7386	55.72	-0.75	54.97	74	-19.03	peak
7386	40.89	-0.75	40.14	54	-13.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	61.34	-3.43	57.91	74	-16.09	peak
4924	45.68	-3.43	42.25	54	-11.75	AVG
7386	55.45	-0.75	54.7	74	-19.3	peak
7386	40.21	-0.75	39.46	54	-14.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes bandedge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) <54dB μ V/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	62.69	-3.64	59.05	74	-14.95	peak
4824	46.85	-3.64	43.21	54	-10.79	AVG
7236	56.72	-0.95	55.77	74	-18.23	peak
7236	42.64	-0.95	41.69	54	-12.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	62.36	-3.64	58.72	74	-15.28	peak
4824	46.42	-3.64	42.78	54	-11.22	AVG
7236	56.57	-0.95	55.62	74	-18.38	peak
7236	42.19	-0.95	41.24	54	-12.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	62.12	-3.51	58.61	74	-15.39	peak
4874	46.18	-3.51	42.67	54	-11.33	AVG
7311	56.32	-0.82	55.5	74	-18.5	peak
7311	41.75	-0.82	40.93	54	-13.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	61.73	-3.51	58.22	74	-15.78	peak
4874	45.86	-3.51	42.35	54	-11.65	AVG
7311	55.14	-0.82	54.32	74	-19.68	peak
7311	41.52	-0.82	40.7	54	-13.3	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	61.53	-3.43	58.1	74	-15.9	peak
4924	45.79	-3.43	42.36	54	-11.64	AVG
7386	56.14	-0.75	55.39	74	-18.61	peak
7386	41.32	-0.75	40.57	54	-13.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	60.98	-3.43	57.55	74	-16.45	peak
4924	45.41	-3.43	41.98	54	-12.02	AVG
7386	55.64	-0.75	54.89	74	-19.11	peak
7386	40.58	-0.75	39.83	54	-14.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes bandedge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	62.71	-3.64	59.07	74	-14.93	peak
4824	46.75	-3.64	43.11	54	-10.89	AVG
7236	56.69	-0.95	55.74	74	-18.26	peak
7236	42.52	-0.95	41.57	54	-12.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	62.34	-3.64	58.7	74	-15.3	peak
4824	46.28	-3.64	42.64	54	-11.36	AVG
7236	56.45	-0.95	55.5	74	-18.5	peak
7236	42.19	-0.95	41.24	54	-12.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874.00	62.02	-3.51	59.73	74.00	-14.27	peak
4874.00	46.18	-3.51	59.73	54.00	5.73	AVG
7311.00	56.24	-0.82	59.73	74.00	-14.27	peak
7311.00	41.85	-0.82	59.73	54.00	5.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874.00	61.83	-3.51	58.32	74.00	-15.68	peak
4874.00	45.76	-3.51	42.25	54.00	-11.75	AVG
7311.00	55.69	-0.82	54.87	74.00	-19.13	peak
7311.00	41.42	-0.82	40.60	54.00	-13.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	61.55	-3.43	58.12	74	-15.88	peak
4924	45.42	-3.43	41.99	54	-12.01	AVG
7386	55.47	-0.75	54.72	74	-19.28	peak
7386	41.08	-0.75	40.33	54	-13.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	61.21	-3.43	57.78	74	-16.22	peak
4924	45.09	-3.43	41.66	54	-12.34	AVG
7386	55.32	-0.75	54.57	74	-19.43	peak
7386	40.78	-0.75	40.03	54	-13.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4844	62.84	-3.63	59.21	74	-14.79	peak
4844	46.73	-3.63	43.1	54	-10.9	AVG
7266	57.18	-0.94	56.24	74	-17.76	peak
7266	42.86	-0.94	41.92	54	-12.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4844	62.46	-3.63	58.83	74	-15.17	peak
4844	46.27	-3.63	42.64	54	-11.36	AVG
7266	56.85	-0.94	55.91	74	-18.09	peak
7266	42.61	-0.94	41.67	54	-12.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	61.99	-3.51	58.48	74	-15.52	peak
4874	46.03	-3.51	42.52	54	-11.48	AVG
7311	56.57	-0.82	55.75	74	-18.25	peak
7311	42.25	-0.82	41.43	54	-12.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	61.46	-3.51	57.95	74	-16.05	peak
4874	45.82	-3.51	42.31	54	-11.69	AVG
7311	56.31	-0.82	55.49	74	-18.51	peak
7311	41.87	-0.82	41.05	54	-12.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4904	60.83	-3.43	57.4	74	-16.6	peak
4904	45.46	-3.43	42.03	54	-11.97	AVG
7356	55.51	-0.75	54.76	74	-19.24	peak
7356	41.04	-0.75	40.29	54	-13.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4904	60.47	-3.43	57.04	74	-16.96	peak
4904	45.03	-3.43	41.6	54	-12.4	AVG
7356	55.16	-0.75	54.41	74	-19.59	peak
7356	40.75	-0.75	40	54	-14	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes bandedge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) < 54dB μ V/m(AV Limit), the Average Detected not need to completed.

Test Result of Radiated Spurious at Band edges

Operation Mode:
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310	58.36	-5.81	52.55	74	-21.45	peak
2310	/	-5.81	/	54	/	AVG
2390	63.54	-5.84	57.7	74	-16.3	peak
2390	43.18	-5.84	37.34	54	-16.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310	57.35	-5.81	51.54	74	-22.46	peak
2310	/	-5.81	/	54	/	AVG
2390	66.95	-5.84	61.11	74	-12.89	peak
2390	46.81	-5.84	40.97	54	-13.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	55.76	-5.65	50.11	74	-23.89	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	56.32	-5.65	50.67	74	-23.33	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	57.26	-5.65	51.61	74	-22.39	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	56.18	-5.65	50.53	74	-23.47	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310	58.43	-5.81	52.62	74	-21.38	peak
2310	/	-5.81	/	54	/	AVG
2390	63.54	-5.84	57.7	74	-16.3	peak
2390	46.32	-5.84	40.48	54	-13.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310	56.15	-5.81	50.34	74	-23.66	peak
2310	/	-5.81	/	54	/	AVG
2390	62.98	-5.84	57.14	74	-16.86	peak
2390	46.82	-5.84	40.98	54	-13.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	55.28	-5.65	49.63	74	-24.37	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	54.94	-5.65	49.29	74	-24.71	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	56.12	-5.65	50.47	74	-23.53	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	55.76	-5.65	50.11	74	-23.89	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310	57.92	-5.81	52.11	74	-21.89	peak
2310	/	-5.81	/	54	/	AVG
2390	63.88	-5.84	58.04	74	-15.96	peak
2390	47.28	-5.84	41.44	54	-12.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310	56.29	-5.81	50.48	74	-23.52	peak
2310	/	-5.81	/	54	/	AVG
2390	62.91	-5.84	57.07	74	-16.93	peak
2390	45.16	-5.84	39.32	54	-14.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	54.87	-5.65	49.22	74	-24.78	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	54.18	-5.65	48.53	74	-25.47	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	54.35	-5.65	48.7	74	-25.3	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	53.28	-5.65	47.63	74	-26.37	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310	56.78	-5.81	49.35	74	-24.65	peak
2310	/	-5.81	/	54	/	AVG
2390	60.98	-5.84	56.74	74	-17.26	peak
2390	46.48	-5.84	41.28	54	-12.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310	54.13	-5.81	48.32	74	-25.68	peak
2310	/	-5.81	/	54	/	AVG
2390	61.29	-5.84	55.45	74	-18.55	peak
2390	43.18	-5.84	37.34	54	-16.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	53.17	-5.65	47.52	74	-26.48	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	52.86	-5.65	47.21	74	-26.79	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	54.71	-5.65	49.06	74	-24.94	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	53.56	-5.65	47.91	74	-26.09	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

4.7. ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

This device uses a whip antenna with RP-SMA connector, the maximum antenna gain is 2dBi. No antenna other than that furnished by the responsible party shall be used with the device.

WIFI ANTENNA

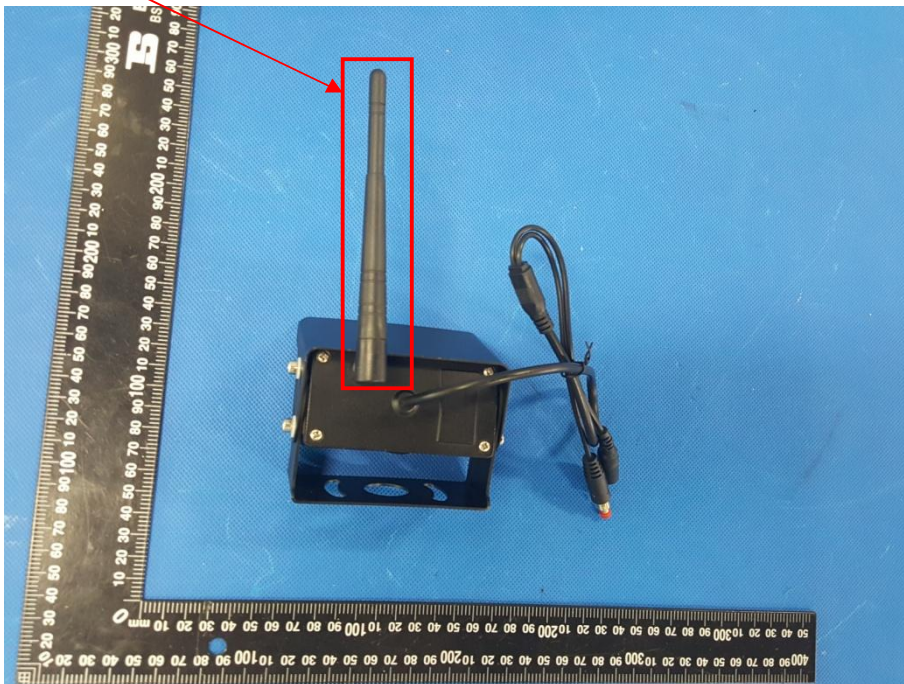

4.8. PHOTOGRAPH OF TEST

Radiated Emission

