


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	26.84	PASS
EGPRS1900 1 Slot	661	1880	27.03	PASS
EGPRS1900 1 Slot	810	1909.8	26.64	PASS
EGPRS1900 2 Slot	512	1850.2	25.95	PASS
EGPRS1900 2 Slot	661	1880	25.60	PASS
EGPRS1900 2 Slot	810	1909.8	25.52	PASS
EGPRS1900 3 Slot	512	1850.2	23.55	PASS
EGPRS1900 3 Slot	661	1880	23.45	PASS
EGPRS1900 3 Slot	810	1909.8	23.35	PASS
EGPRS1900 4 Slot	512	1850.2	21.62	PASS
EGPRS1900 4 Slot	661	1880	21.95	PASS
EGPRS1900 4 Slot	810	1909.8	22.22	PASS
EGPRS850 1 Slot	128	824.2	27.90	PASS
EGPRS850 1 Slot	189	836.4	27.63	PASS
EGPRS850 1 Slot	251	848.8	27.87	PASS
EGPRS850 2 Slot	128	824.2	26.51	PASS
EGPRS850 2 Slot	189	836.4	26.66	PASS
EGPRS850 2 Slot	251	848.8	26.94	PASS
EGPRS850 3 Slot	128	824.2	24.25	PASS
EGPRS850 3 Slot	189	836.4	24.19	PASS
EGPRS850 3 Slot	251	848.8	24.54	PASS
EGPRS850 4 Slot	128	824.2	22.85	PASS
EGPRS850 4 Slot	189	836.4	22.64	PASS
EGPRS850 4 Slot	251	848.8	22.55	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	5.916216216	13.00	PASS
EGPRS1900	661	1880	6.17729064	13.00	PASS
EGPRS1900	810	1909.8	5.875625	13.00	PASS
EGPRS850	128	824.2	7.131886792	13.00	PASS
EGPRS850	189	836.4	7.243469388	13.00	PASS
EGPRS850	251	848.8	7.303658537	13.00	PASS


EGPRS1900 Channel=661

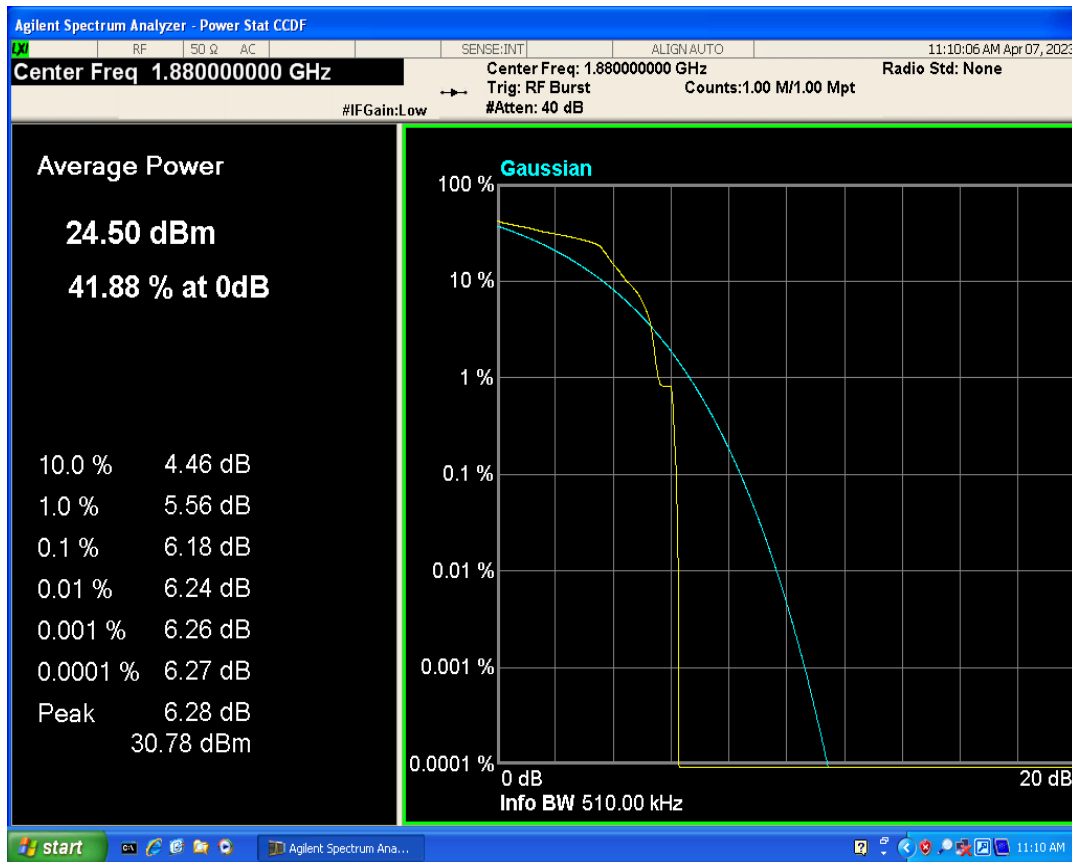


EGPRS1900 Channel=512

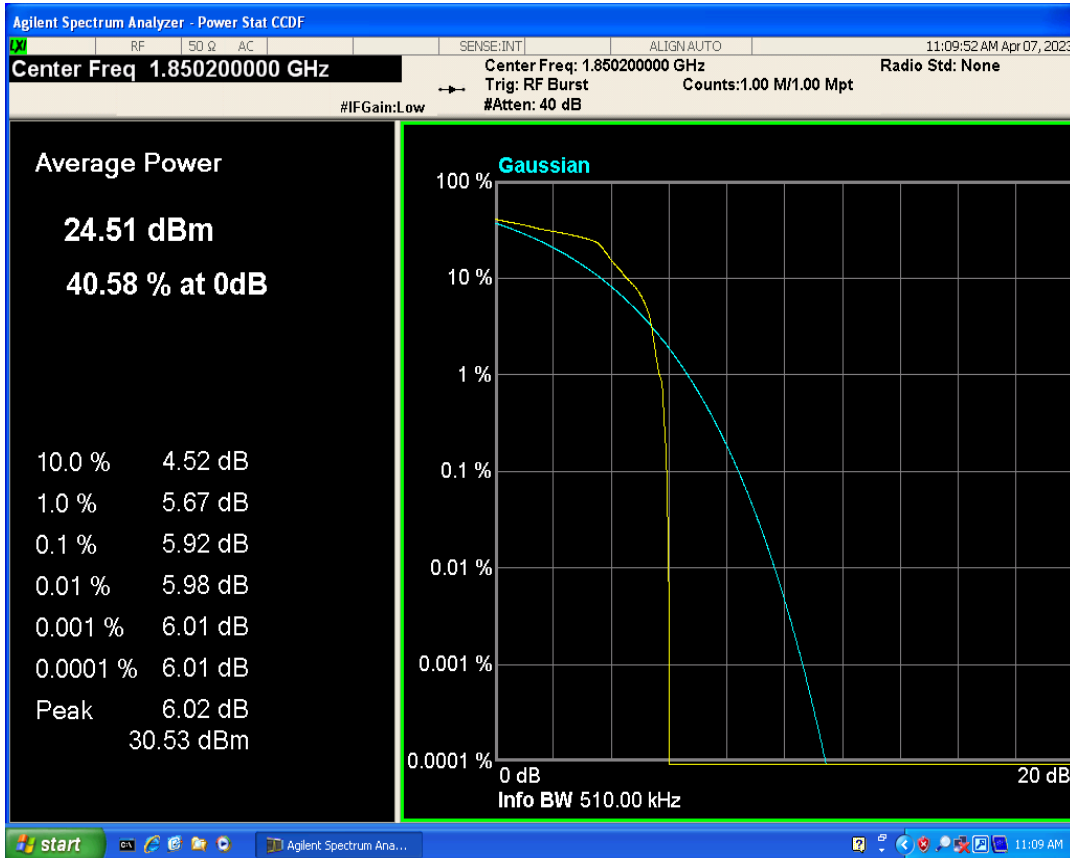

EGPRS1900 Channel=810

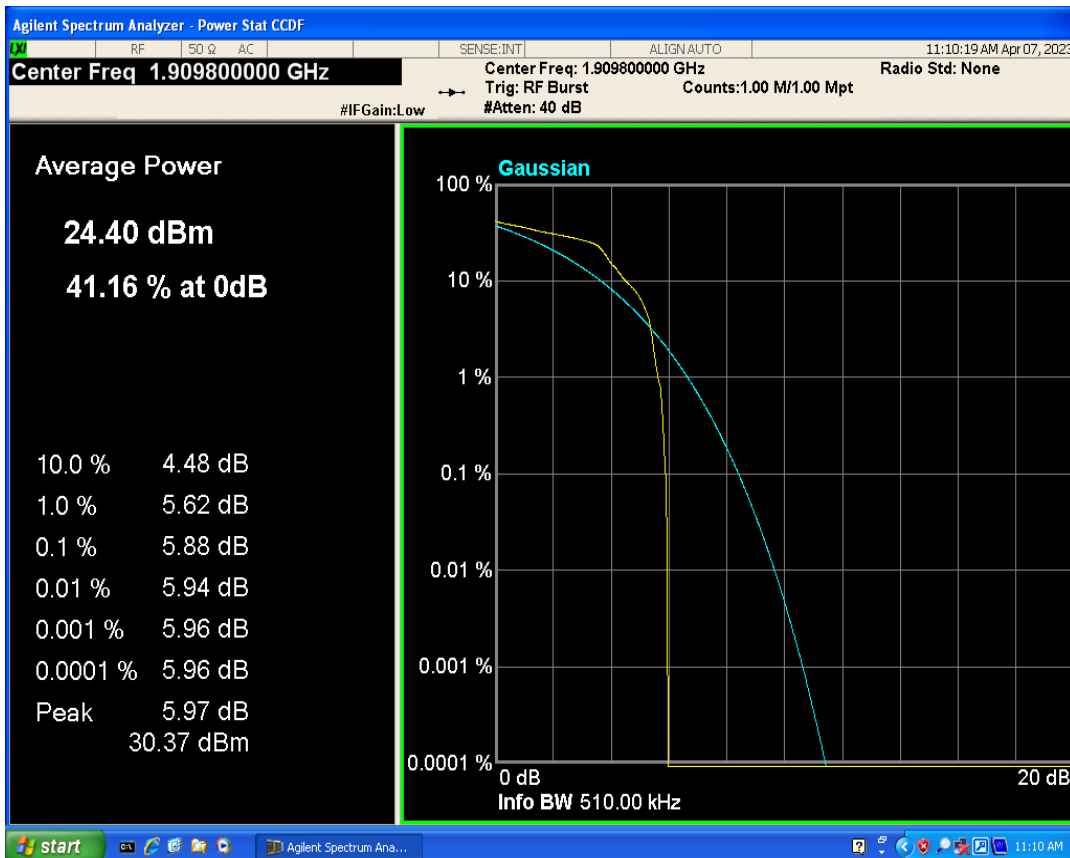

EGPRS850 Channel=128

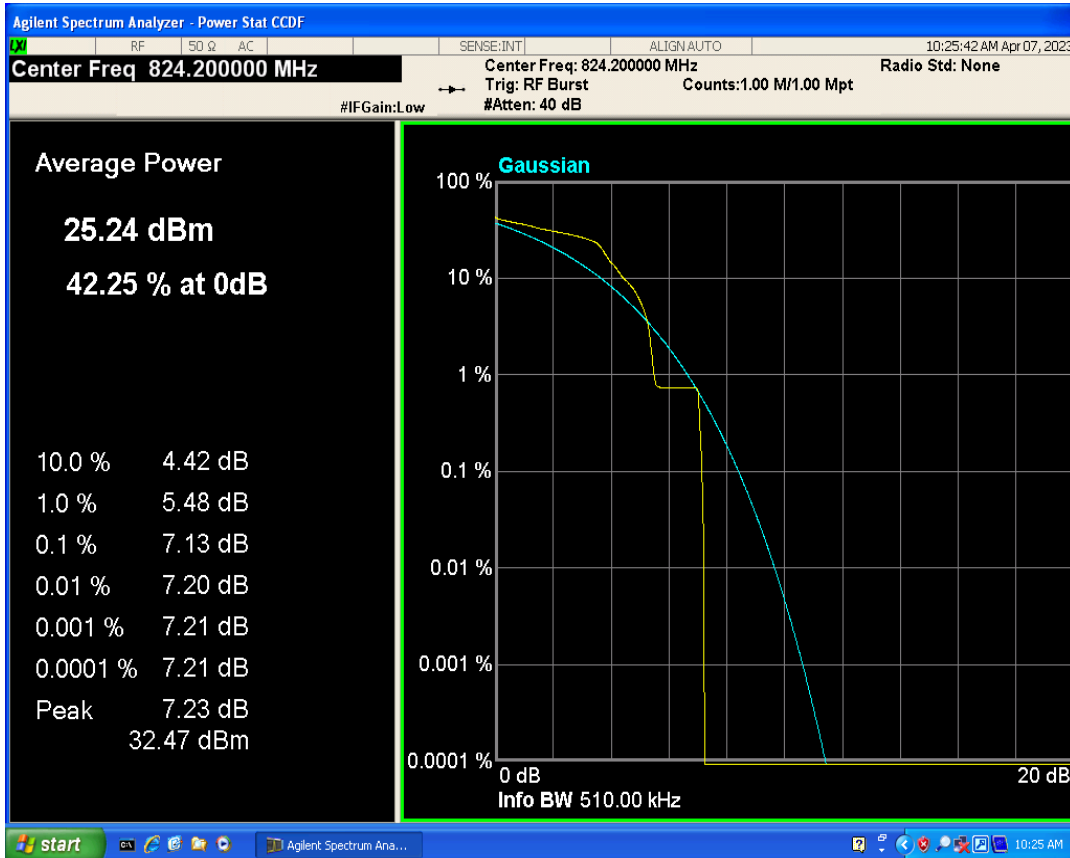

EGPRS850 Channel=251




EGPRS850 Channel=189




Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	249.918	305.161	PASS
EGPRS1900	661	1880	245.969	311.164	PASS
EGPRS1900	810	1909.8	239.456	316.715	PASS
EGPRS850	128	824.2	249.131	315.383	PASS
EGPRS850	189	836.4	241.369	310.606	PASS
EGPRS850	251	848.8	251.186	312.708	PASS


EGPRS1900 Channel=512

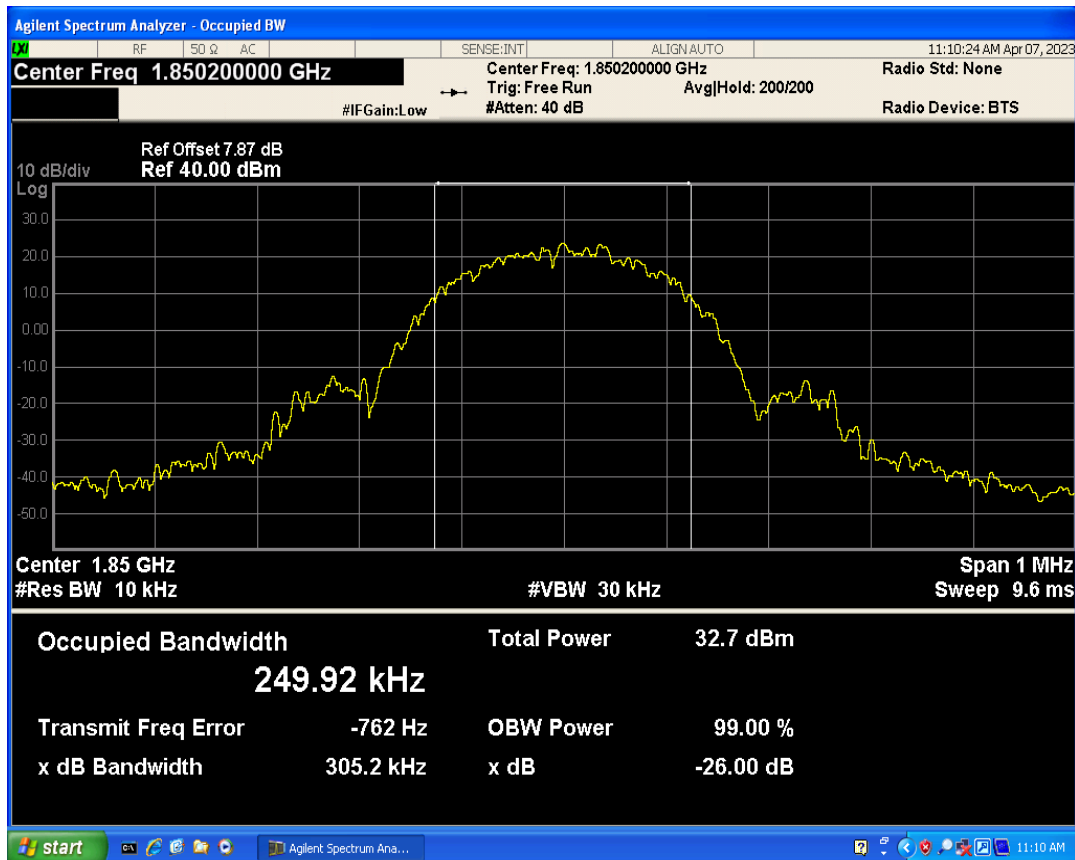


EGPRS1900 Channel=810

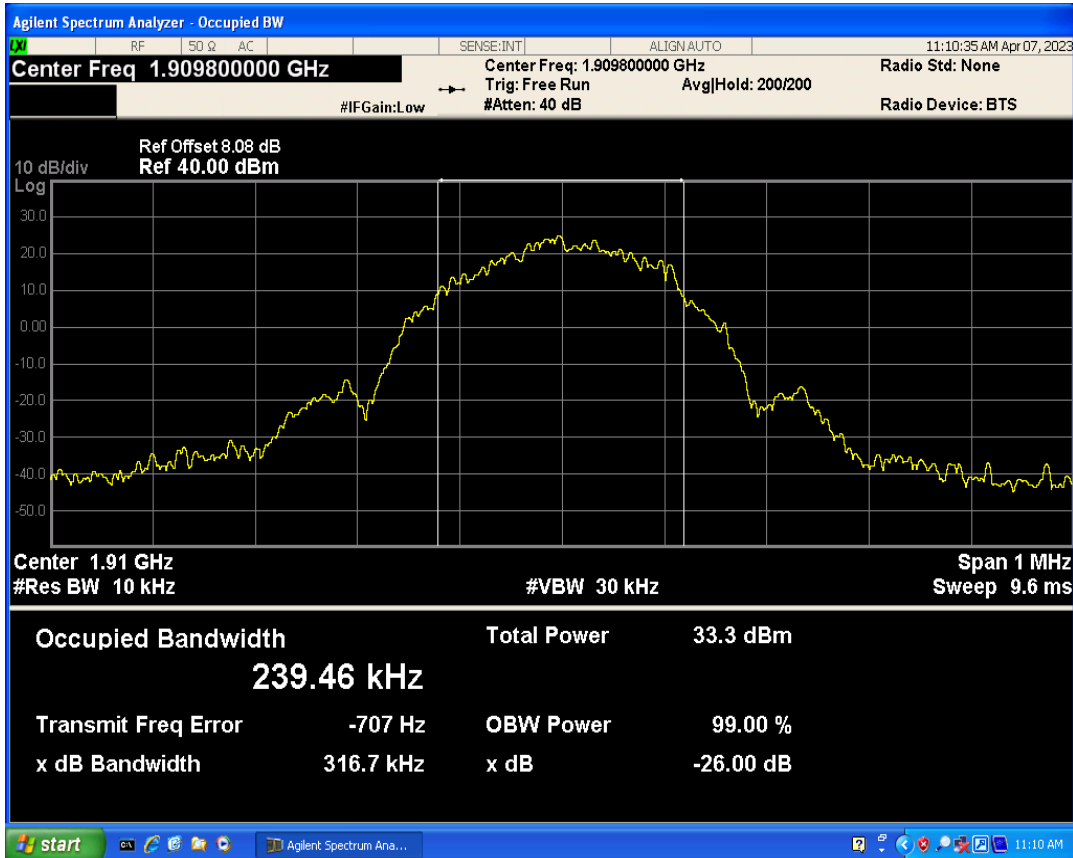


EGPRS1900 Channel=661

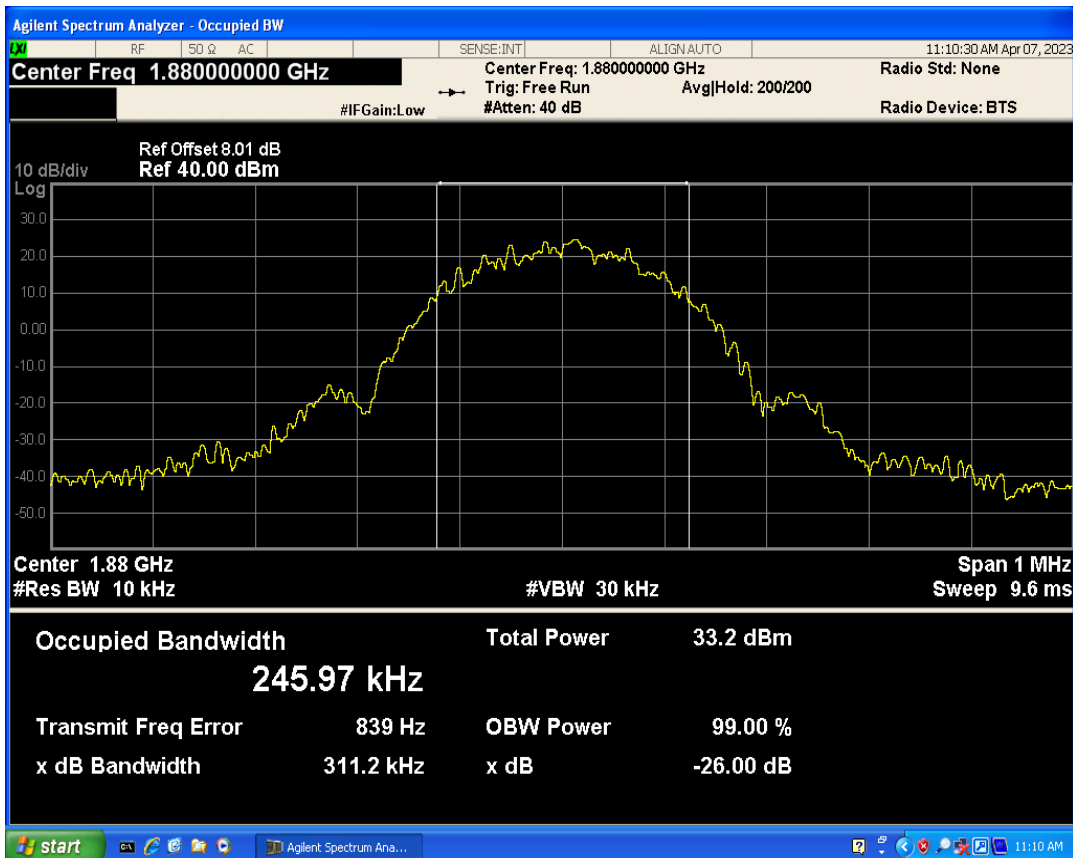


EGPRS850 Channel=128

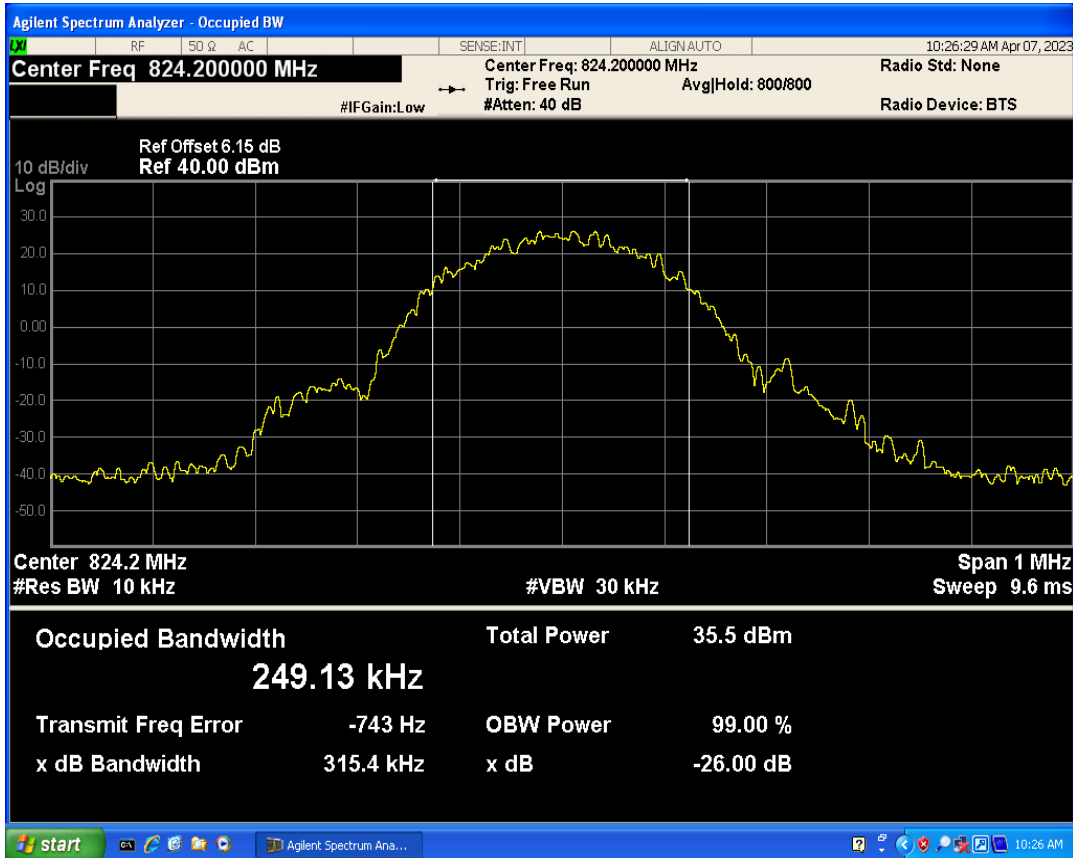

EGPRS850 Channel=189

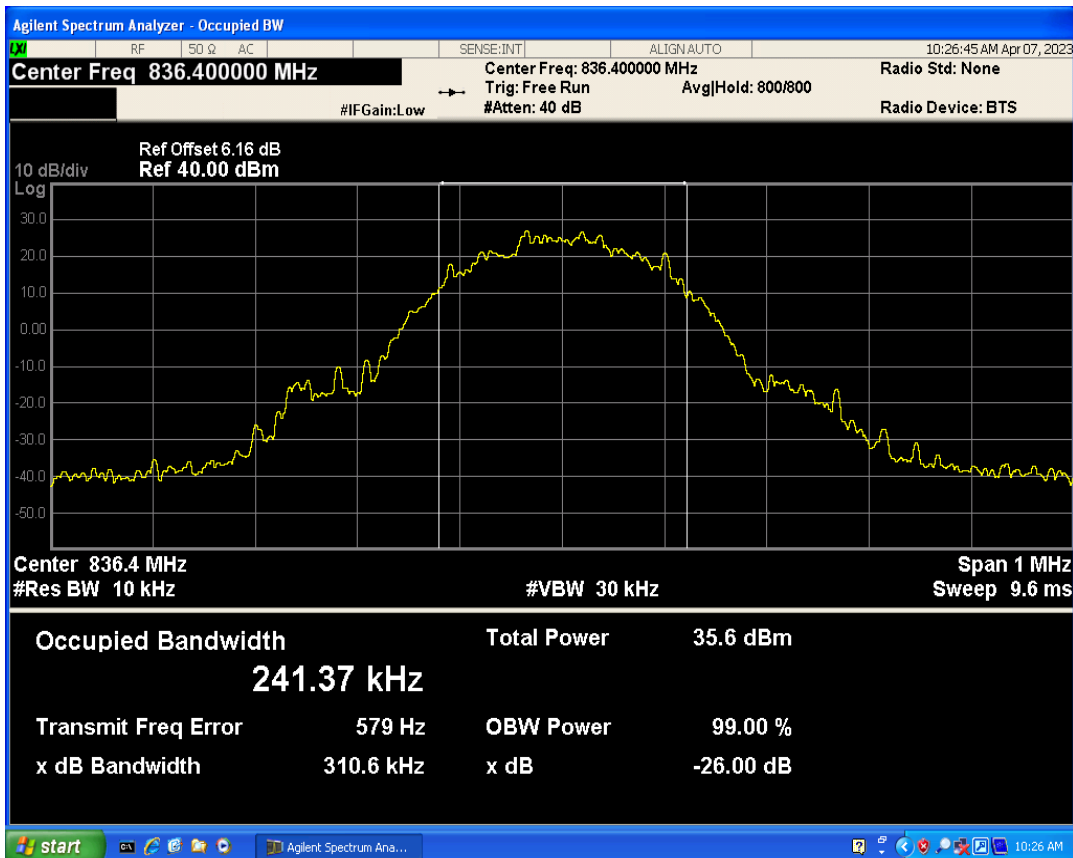


EGPRS850 Channel=251

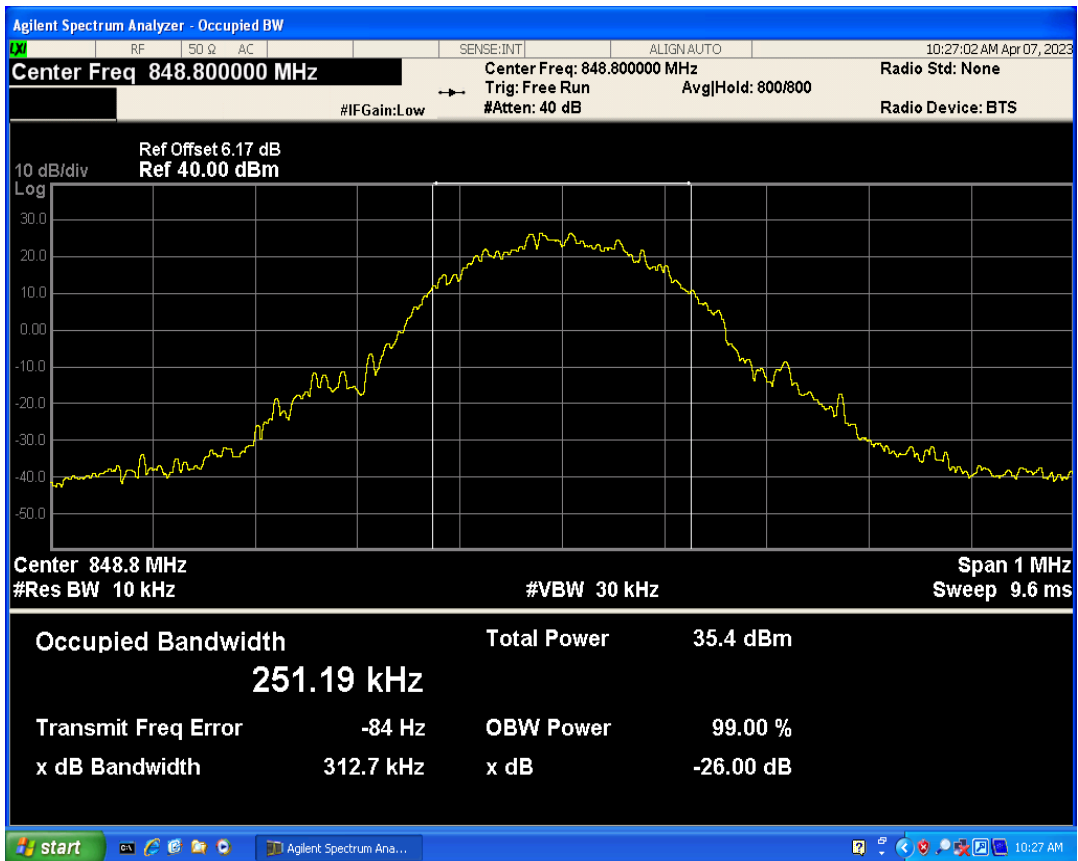


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.96	-35.08	-13	PASS
EGPRS1900	810	1909.8	1910.03	-35.29	-13	PASS
EGPRS850	128	824.2	823.99	-33.39	-13	PASS
EGPRS850	251	848.8	849.01	-34.06	-13	PASS


EGPRS1900 Channel=512

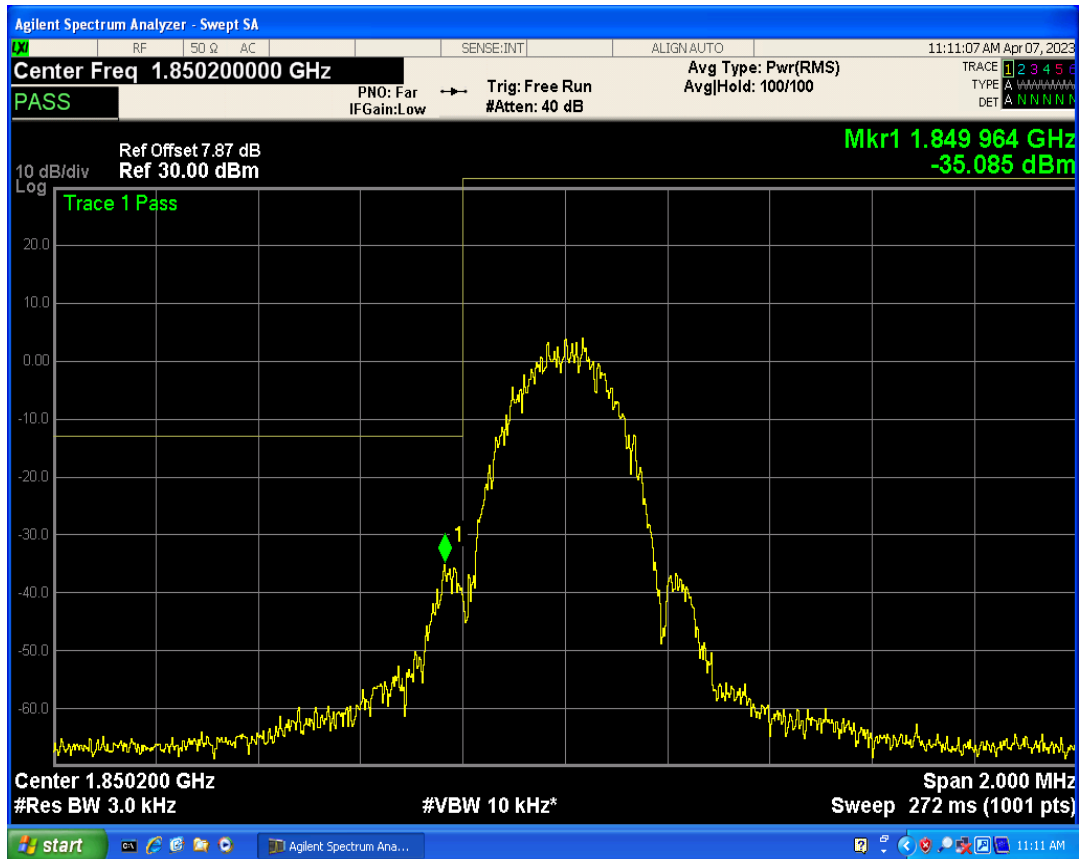


EGPRS1900 Channel=810

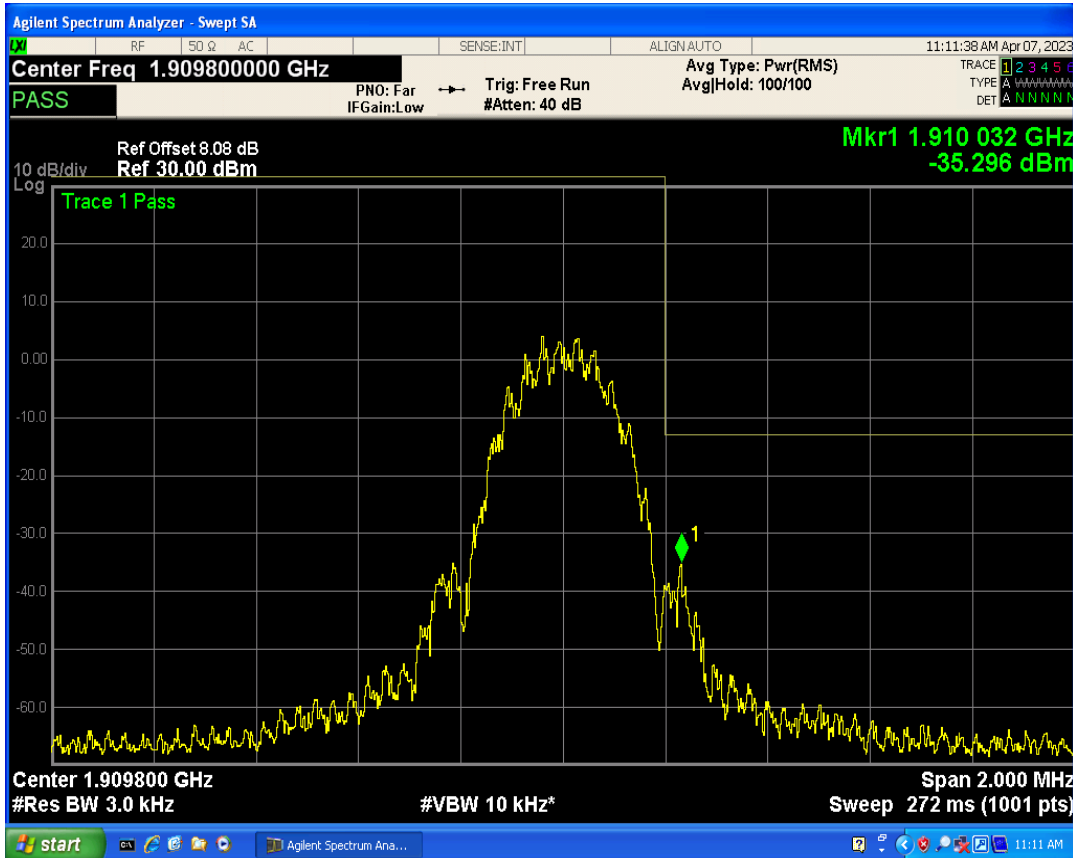

EGPRS850 Channel=128

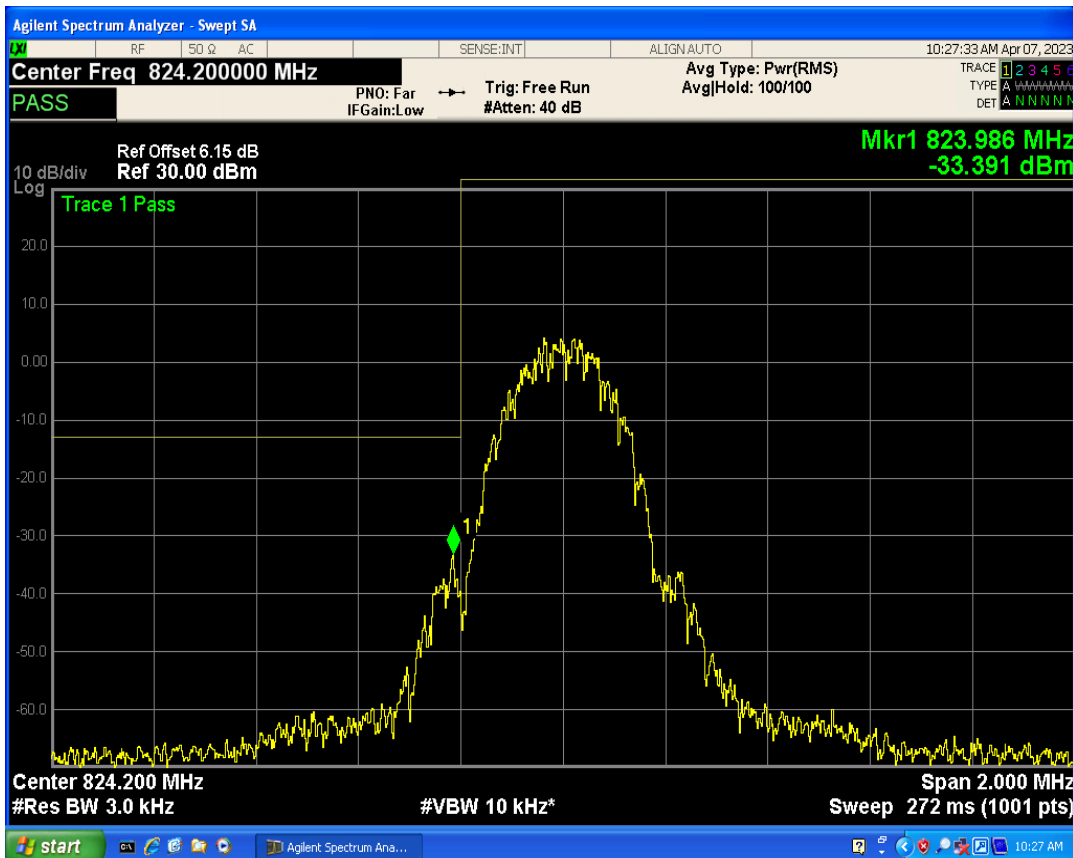


EGPRS850 Channel=251

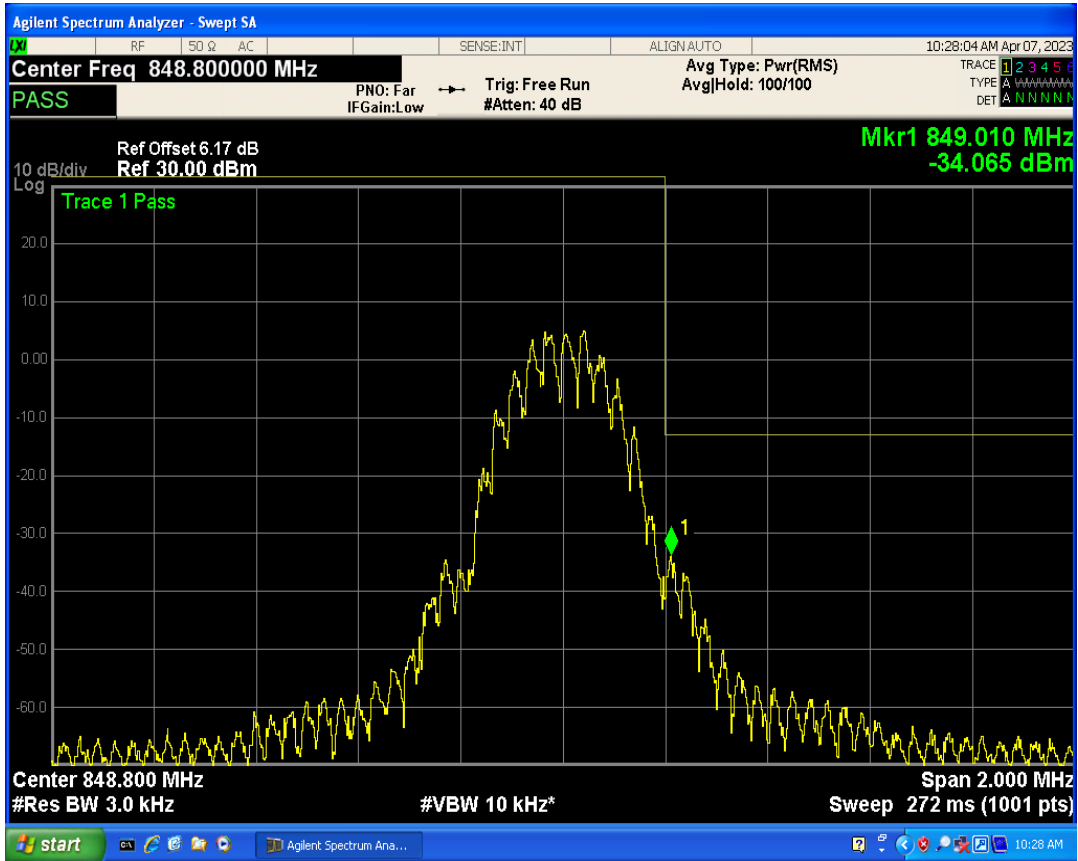


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	25973.91	-18.53	-13	PASS
EGPRS1900	661	1880	26042.07	-18.24	-13	PASS
EGPRS1900	810	1909.8	25524.58	-17.77	-13	PASS
EGPRS850	128	824.2	25806.49	-19.28	-13	PASS
EGPRS850	189	836.4	26063.25	-19.72	-13	PASS
EGPRS850	251	848.8	26057.29	-20.67	-13	PASS


EGPRS1900 Channel=512

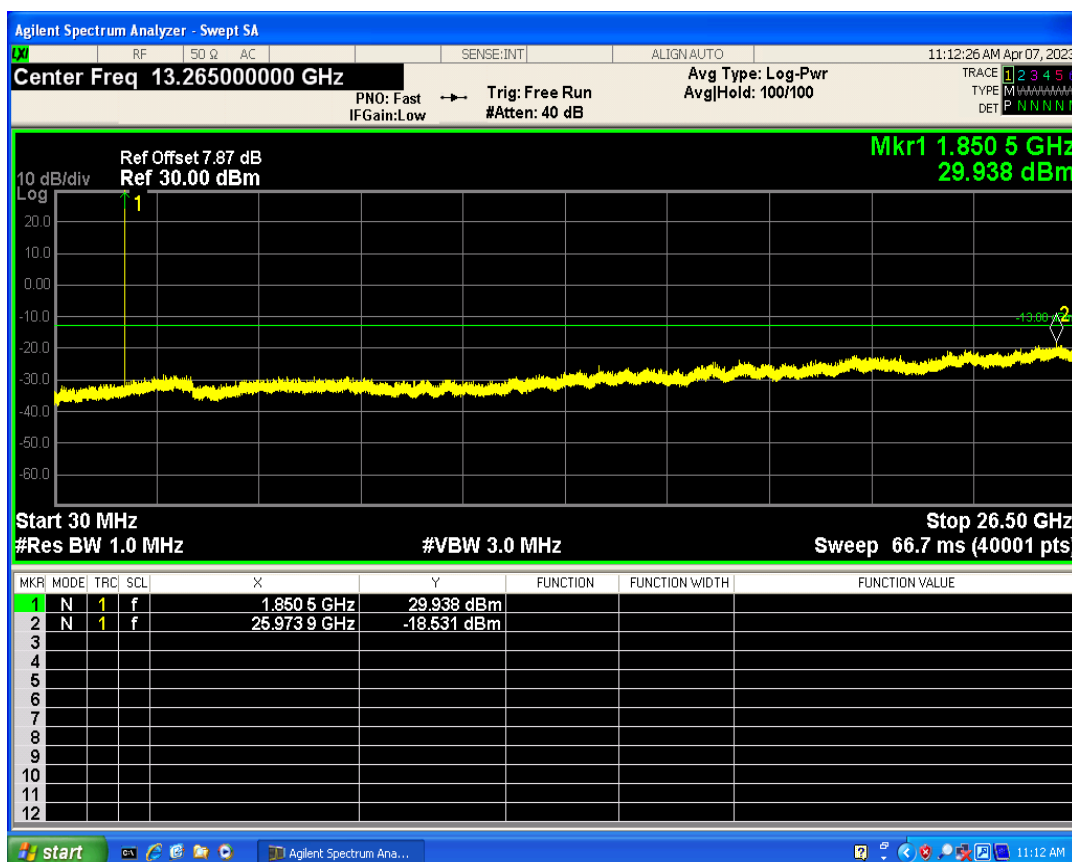


EGPRS1900 Channel=661

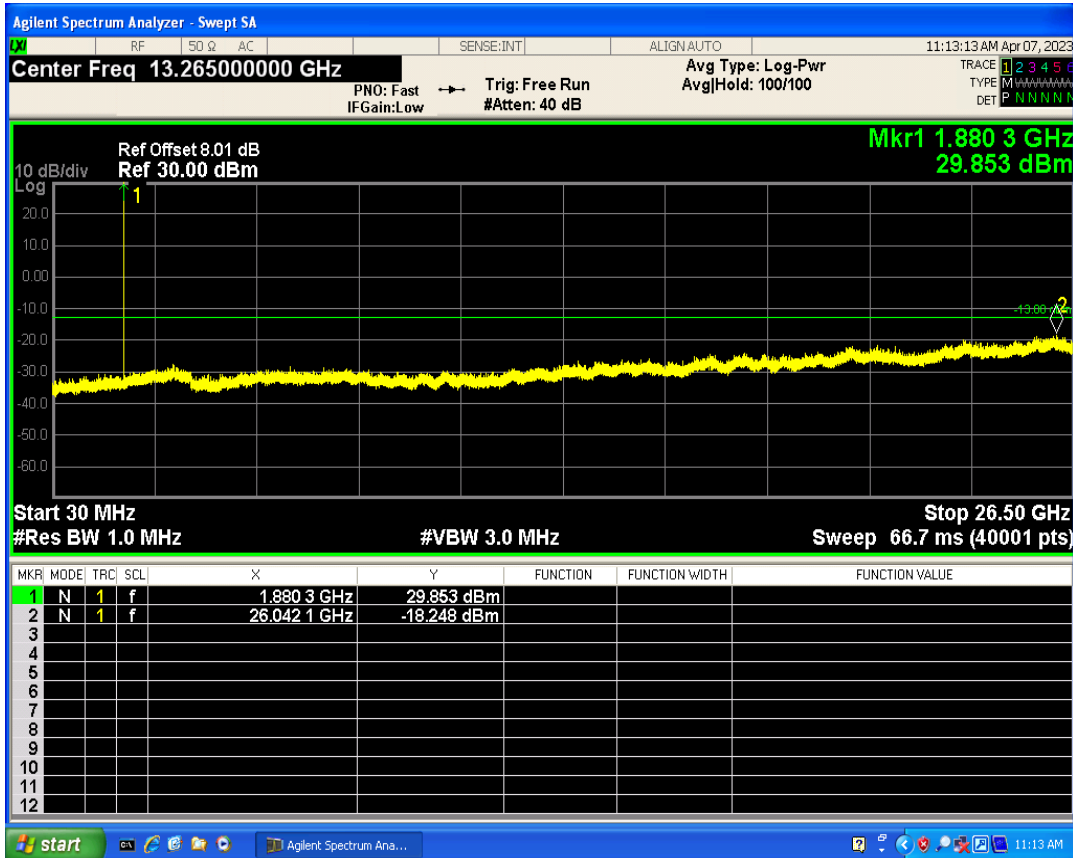


EGPRS1900 Channel=810

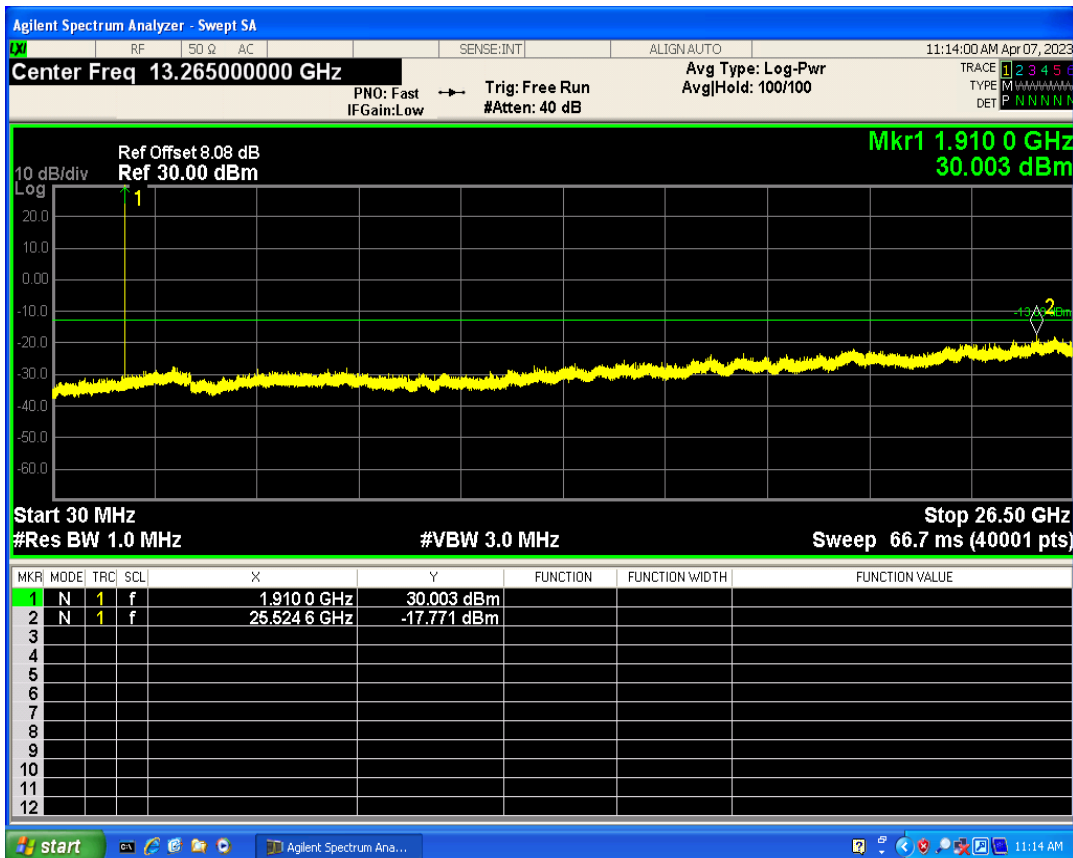


EGPRS850 Channel=189

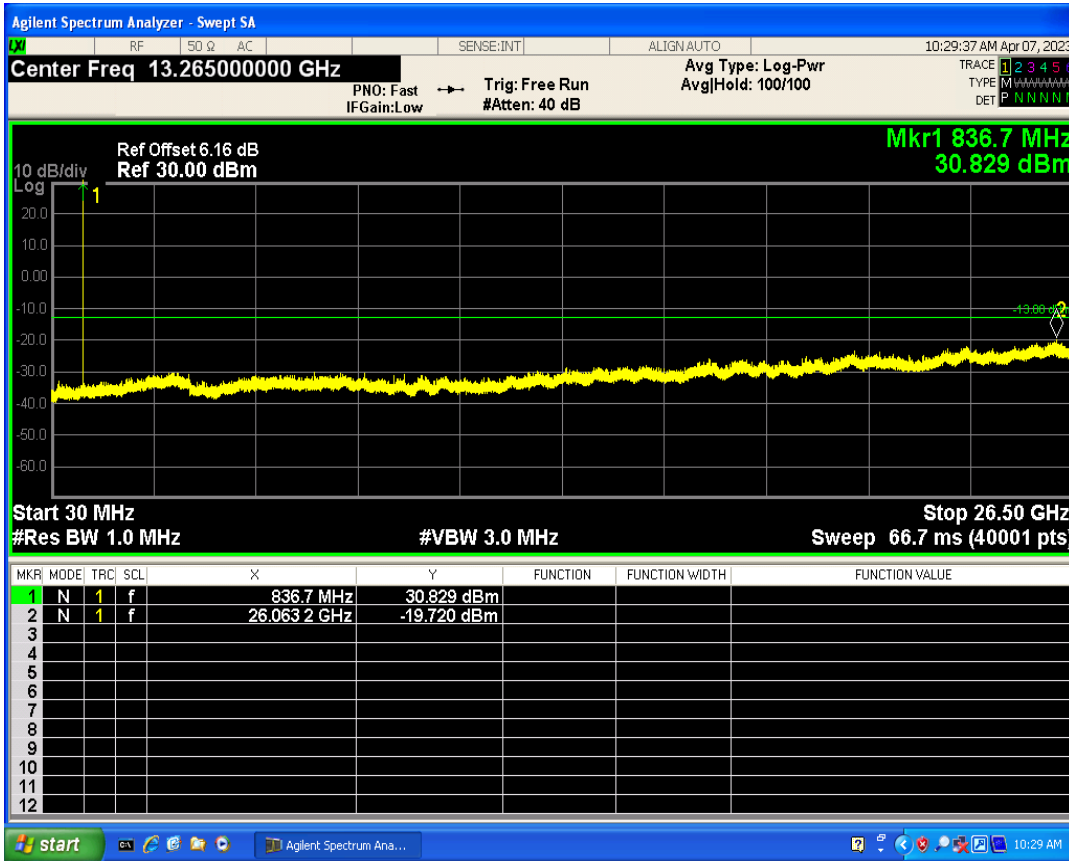

EGPRS850 Channel=128

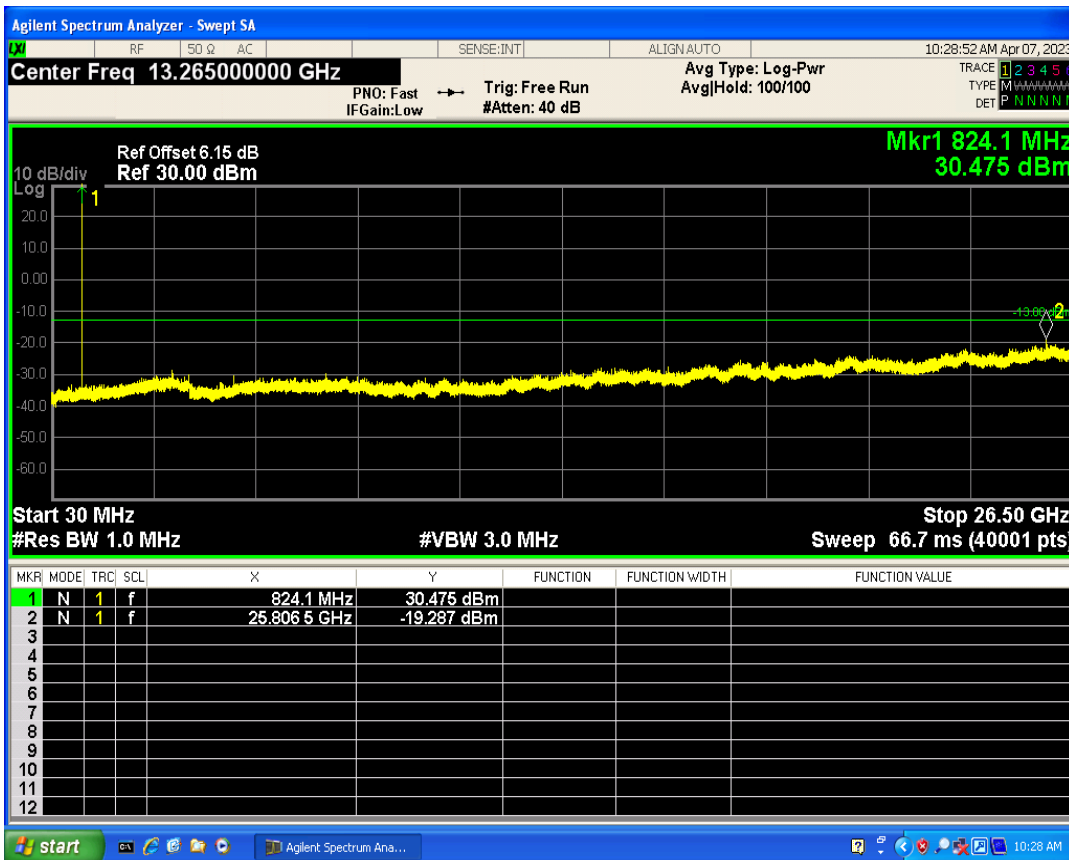

EGPRS850 Channel=251

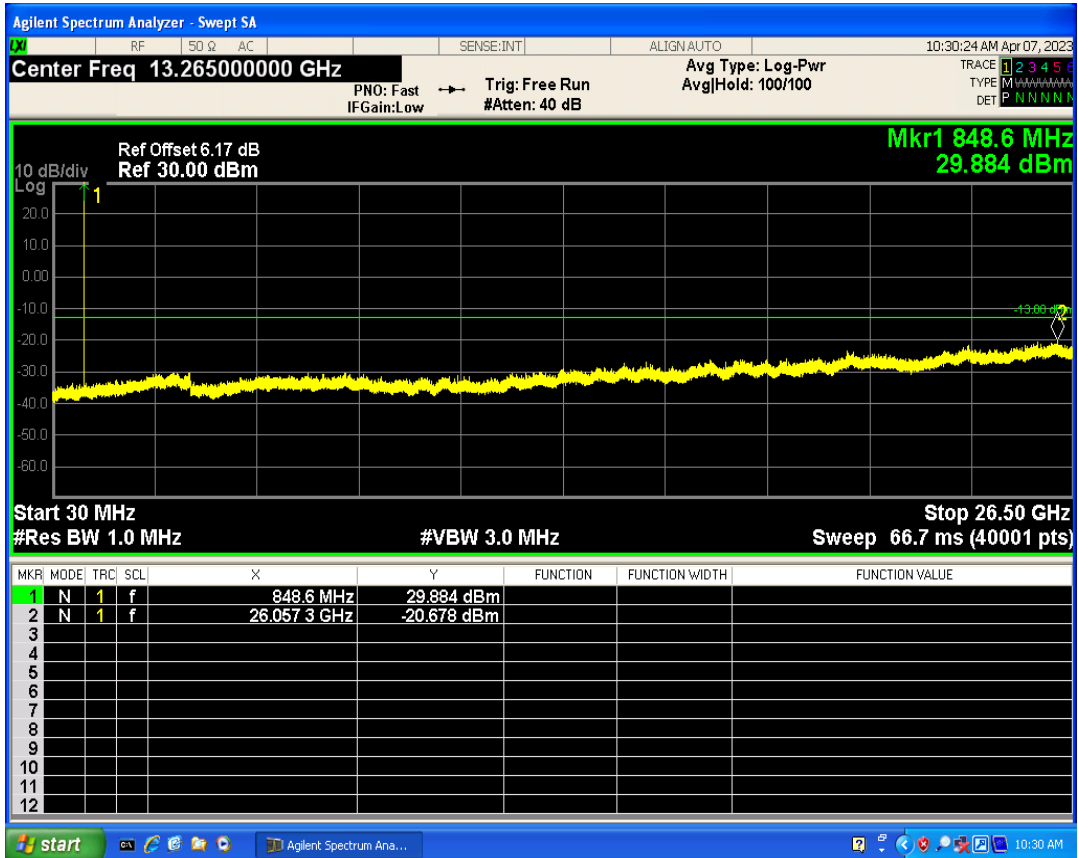


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GPRS1900 1 Slot	512	1850.2	30.19	PASS
GPRS1900 1 Slot	661	1880	30.41	PASS
GPRS1900 1 Slot	810	1909.8	30.33	PASS
GPRS1900 2 Slot	512	1850.2	29.28	PASS
GPRS1900 2 Slot	661	1880	29.44	PASS
GPRS1900 2 Slot	810	1909.8	29.34	PASS
GPRS1900 3 Slot	512	1850.2	27.35	PASS
GPRS1900 3 Slot	661	1880	27.52	PASS
GPRS1900 3 Slot	810	1909.8	27.42	PASS
GPRS1900 4 Slot	512	1850.2	26.15	PASS
GPRS1900 4 Slot	661	1880	26.36	PASS
GPRS1900 4 Slot	810	1909.8	26.24	PASS
GPRS850 1 Slot	128	824.2	32.74	PASS
GPRS850 1 Slot	189	836.4	32.56	PASS
GPRS850 1 Slot	251	848.8	32.73	PASS
GPRS850 2 Slot	128	824.2	31.95	PASS
GPRS850 2 Slot	189	836.4	31.84	PASS
GPRS850 2 Slot	251	848.8	31.98	PASS
GPRS850 3 Slot	128	824.2	30.32	PASS
GPRS850 3 Slot	189	836.4	30.15	PASS
GPRS850 3 Slot	251	848.8	30.28	PASS
GPRS850 4 Slot	128	824.2	29.06	PASS
GPRS850 4 Slot	189	836.4	28.86	PASS
GPRS850 4 Slot	251	848.8	28.96	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.84843342	13.00	PASS
GPRS1900	661	1880	2.848841099	13.00	PASS
GPRS1900	810	1909.8	2.8340732	13.00	PASS
GPRS850	128	824.2	2.781208373	13.00	PASS
GPRS850	189	836.4	2.784281768	13.00	PASS
GPRS850	251	848.8	2.779388228	13.00	PASS

GPRS1900 Channel=661

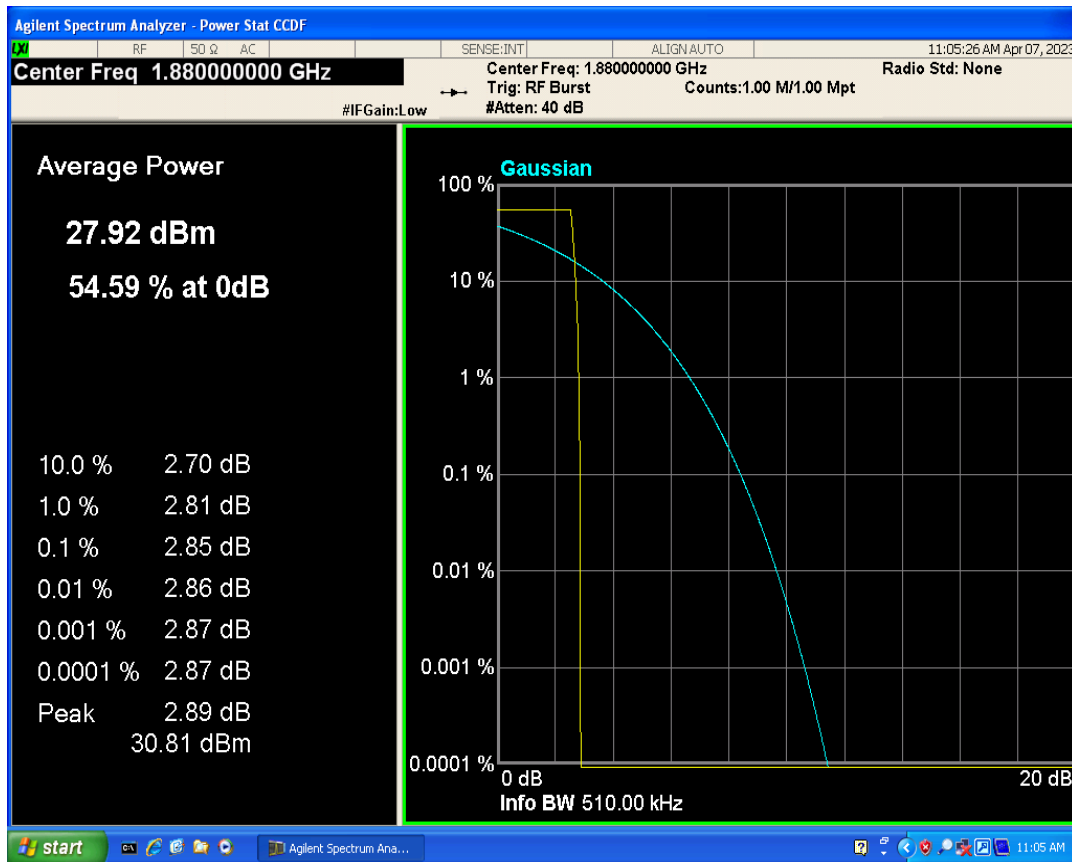

GPRS1900 Channel=512

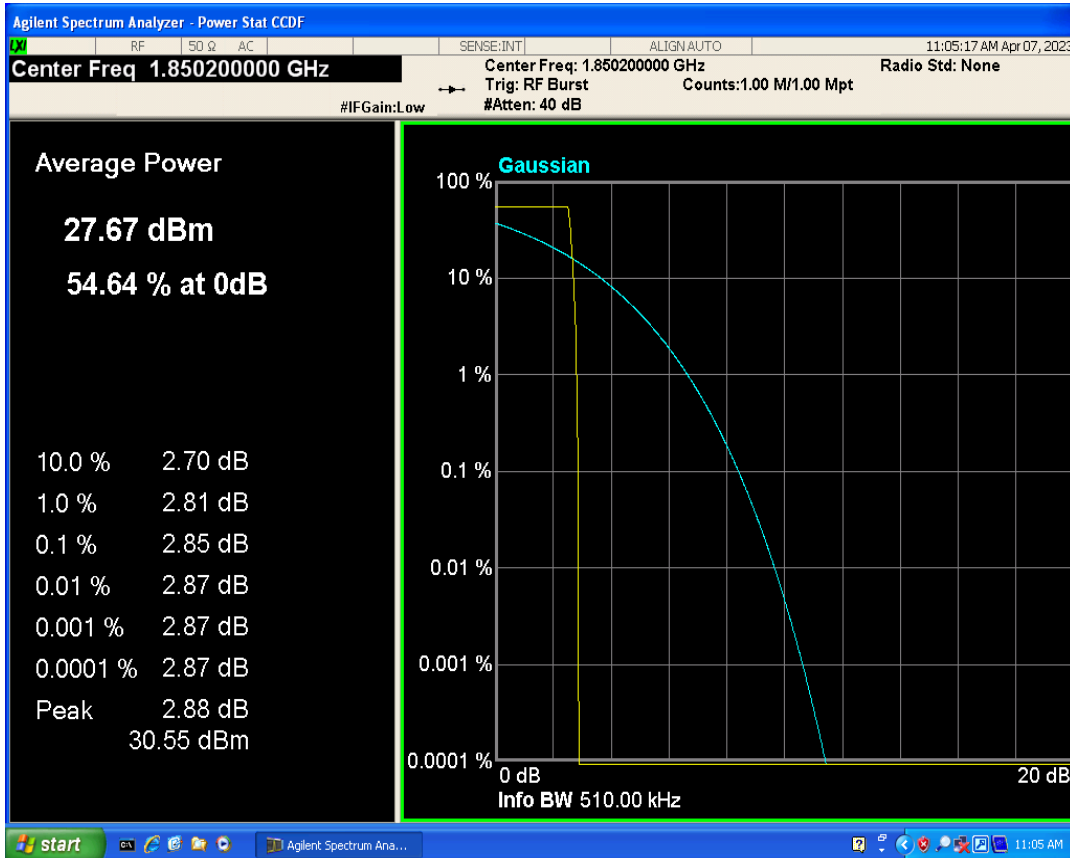

GPRS1900 Channel=810



GPRS850 Channel=189



GPRS850 Channel=128




GPRS850 Channel=251




Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	243.897	321.394	PASS
GPRS1900	661	1880	248.655	318.781	PASS
GPRS1900	810	1909.8	244.134	314.054	PASS
GPRS850	128	824.2	243.497	310.304	PASS
GPRS850	189	836.4	240.632	313.726	PASS
GPRS850	251	848.8	250.159	320.033	PASS


GPRS1900 Channel=661

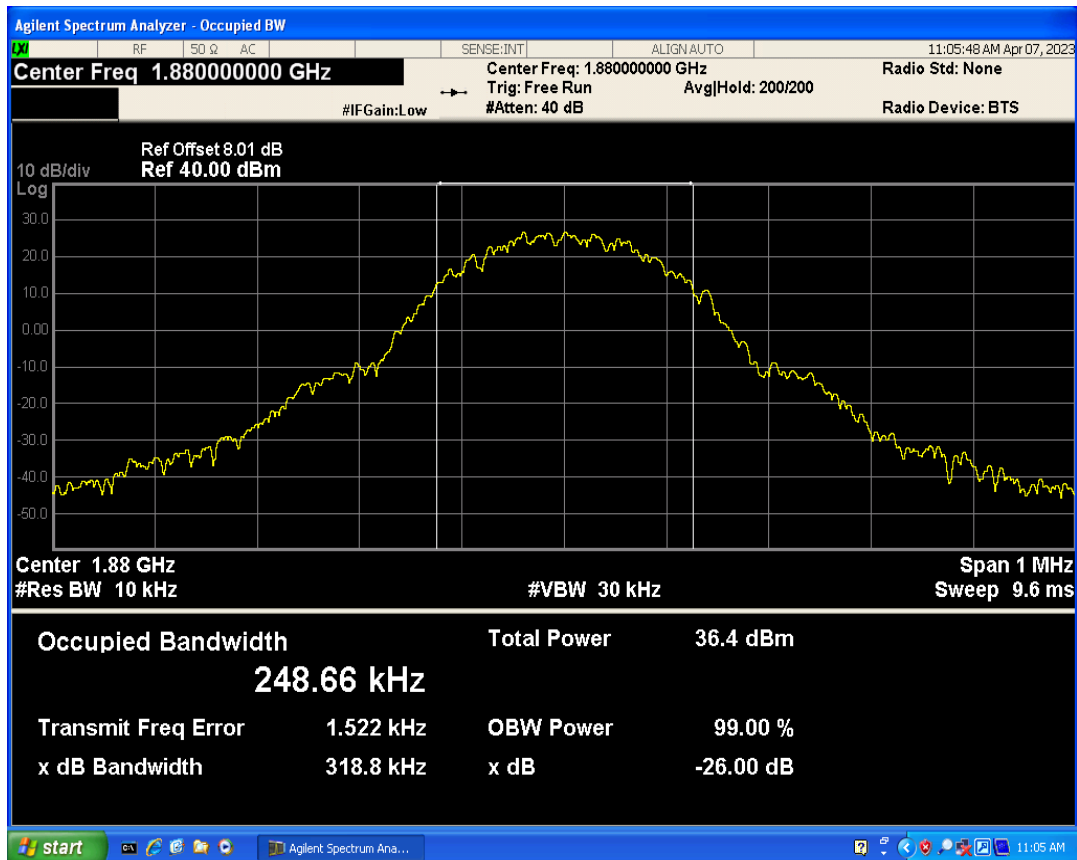


GPRS1900 Channel=512

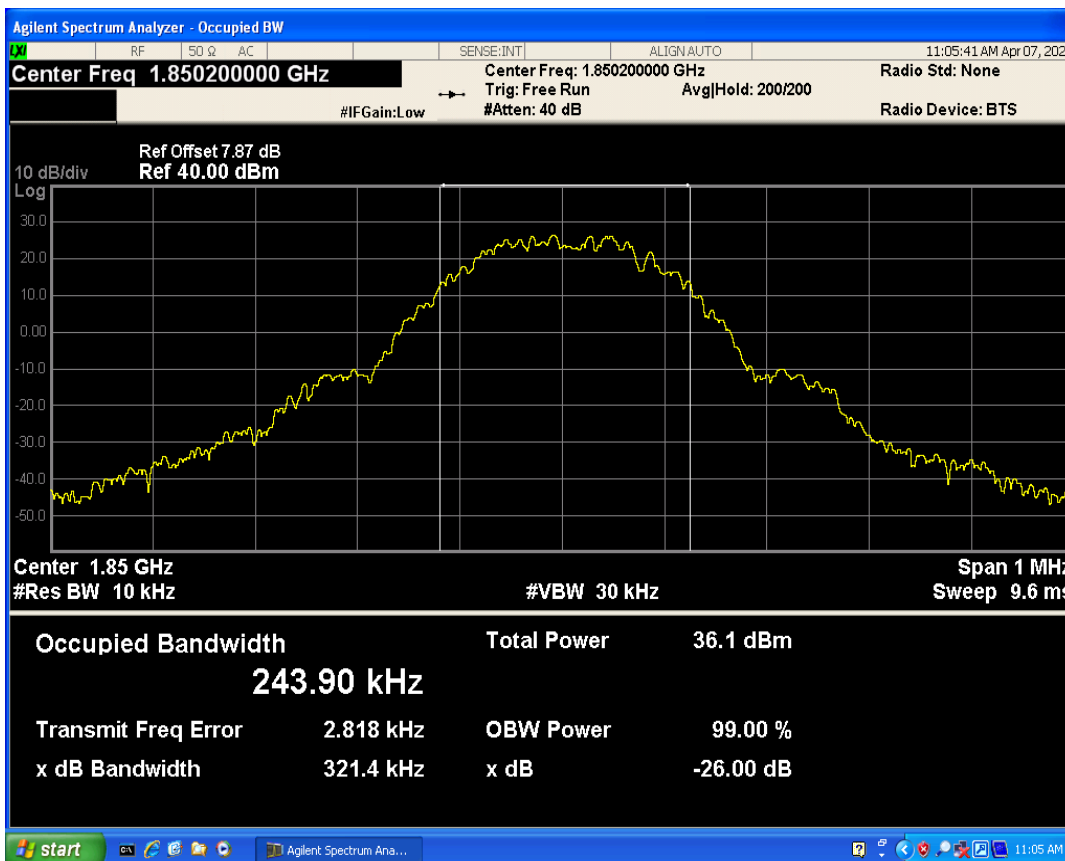


GPRS1900 Channel=810

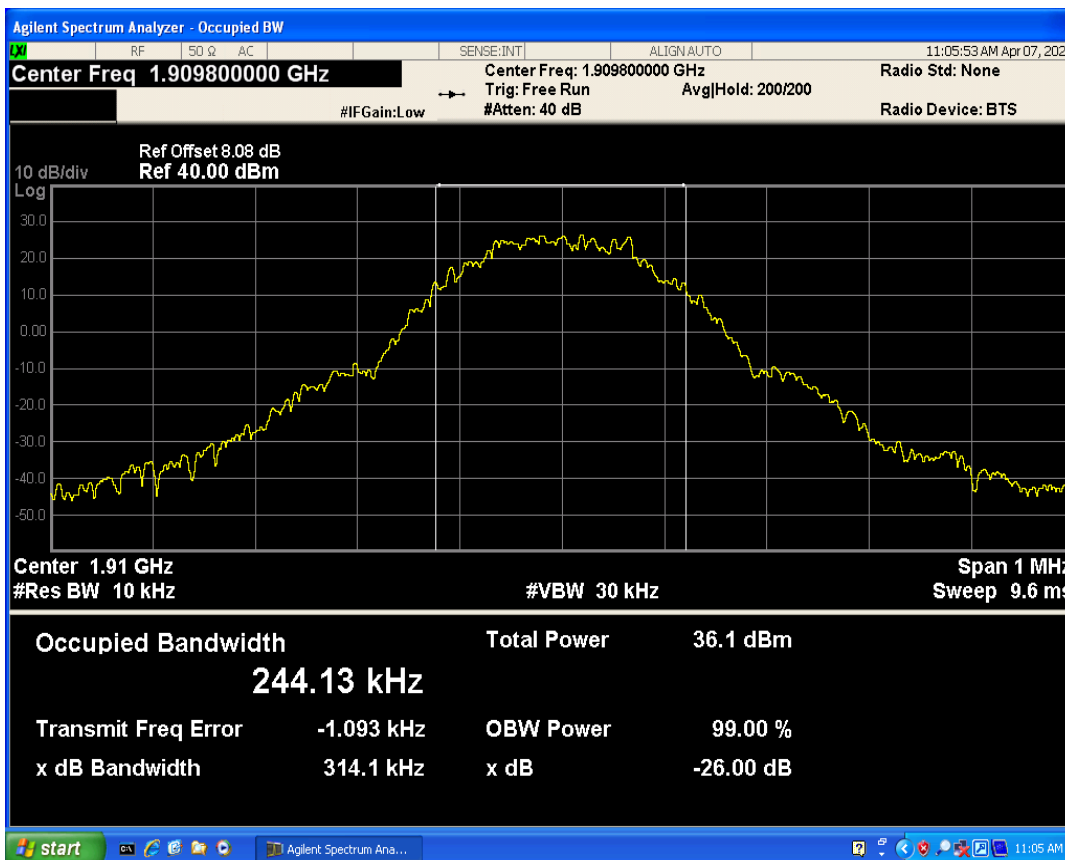


GPRS850 Channel=128

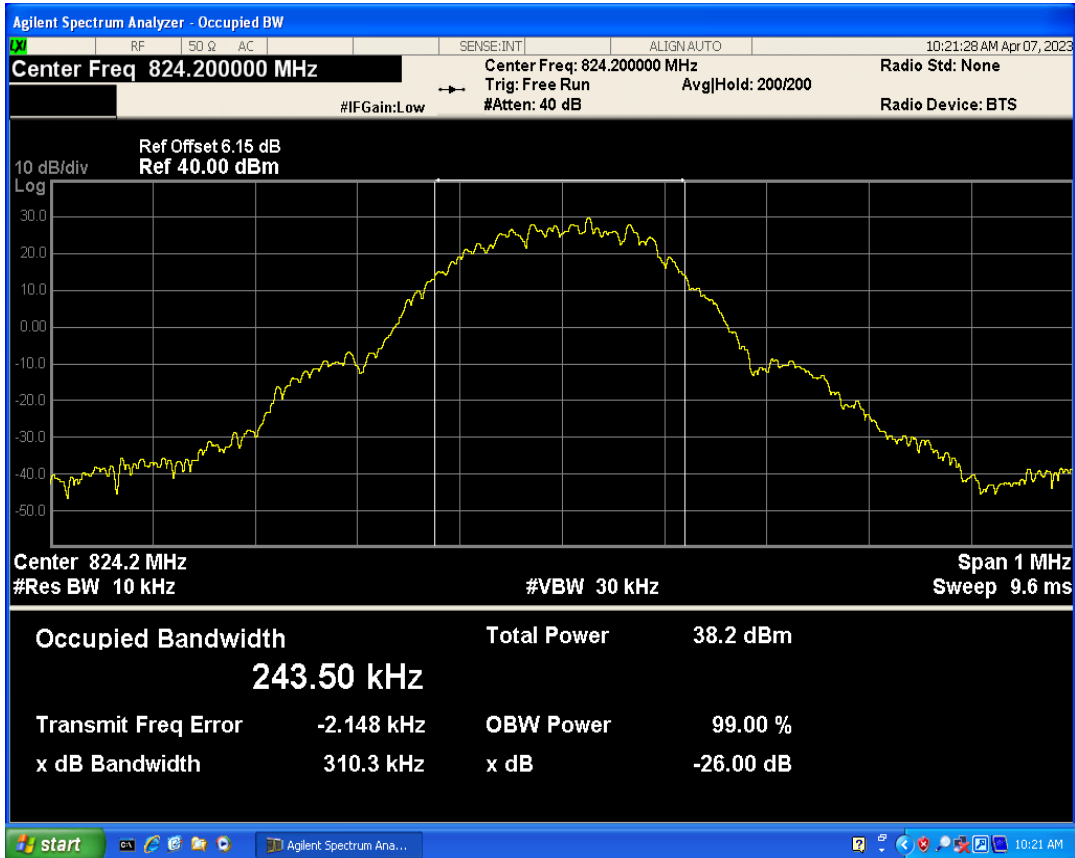

GPRS850 Channel=251

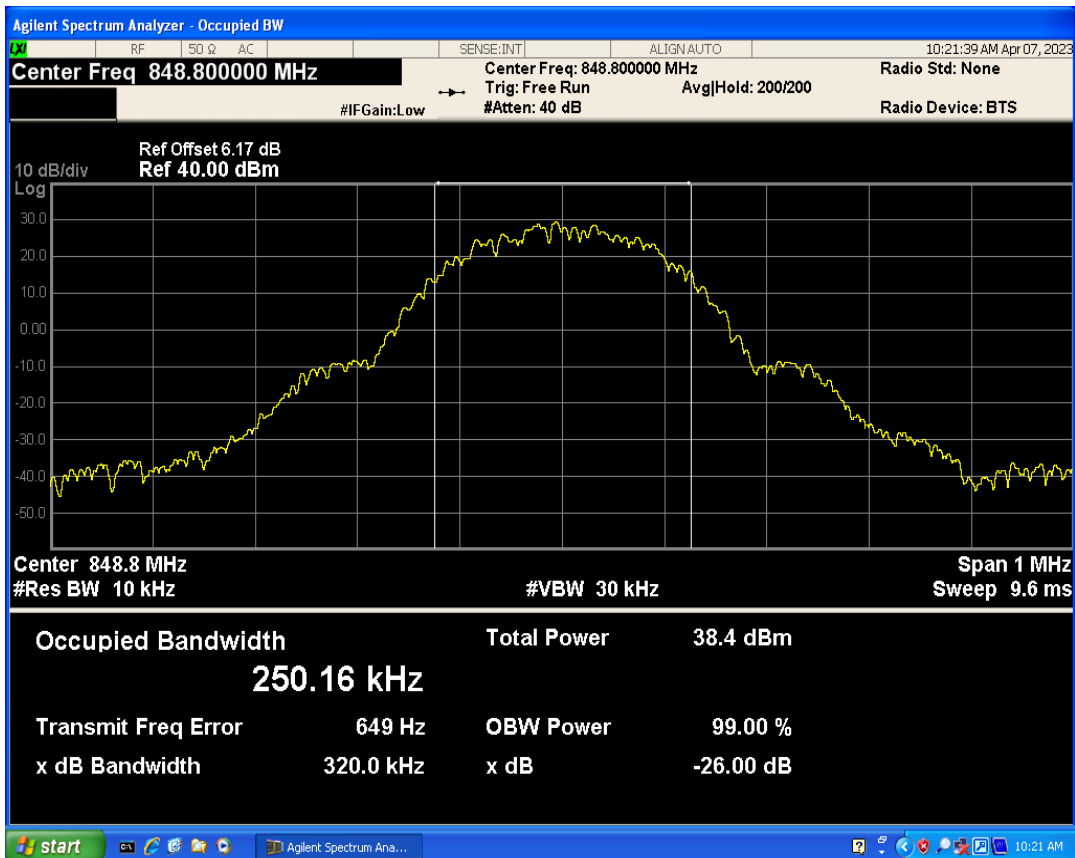


GPRS850 Channel=189

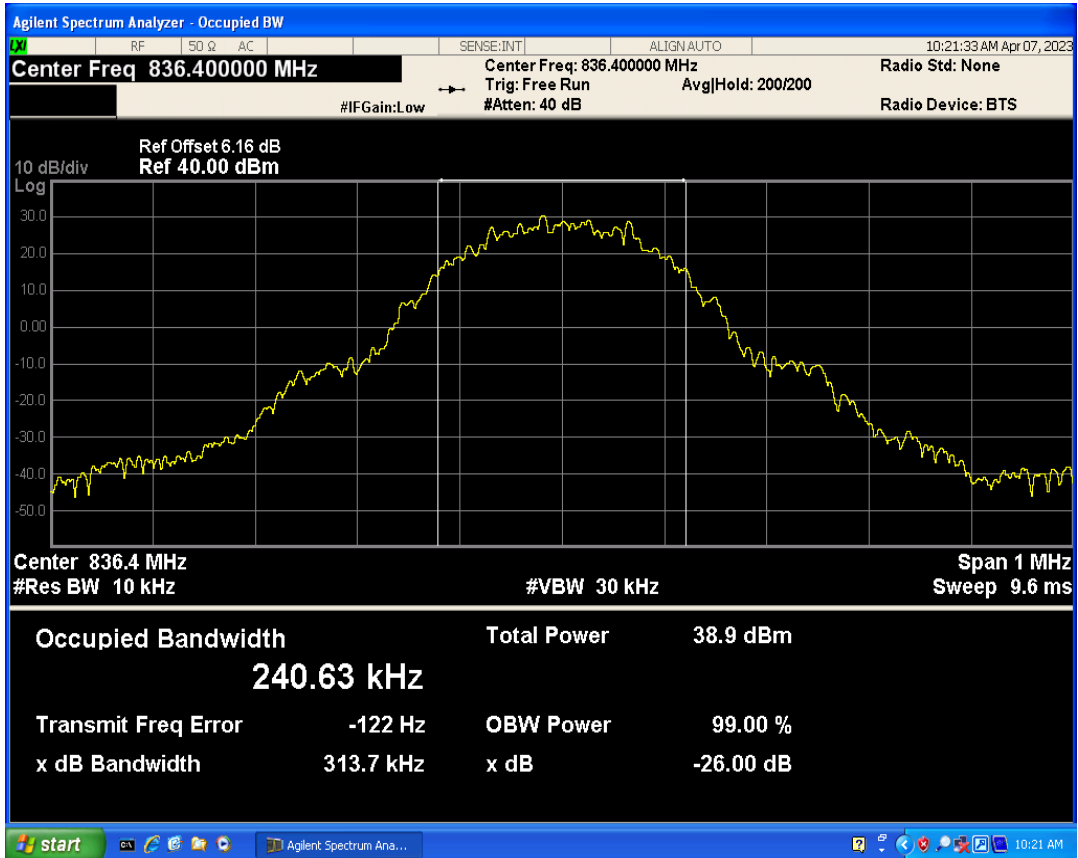


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-29.33	-13	PASS
GPRS1900	810	1909.8	1910.00	-29.69	-13	PASS
GPRS850	128	824.2	823.99	-26.80	-13	PASS
GPRS850	251	848.8	849.01	-27.62	-13	PASS

GPRS1900 Channel=512

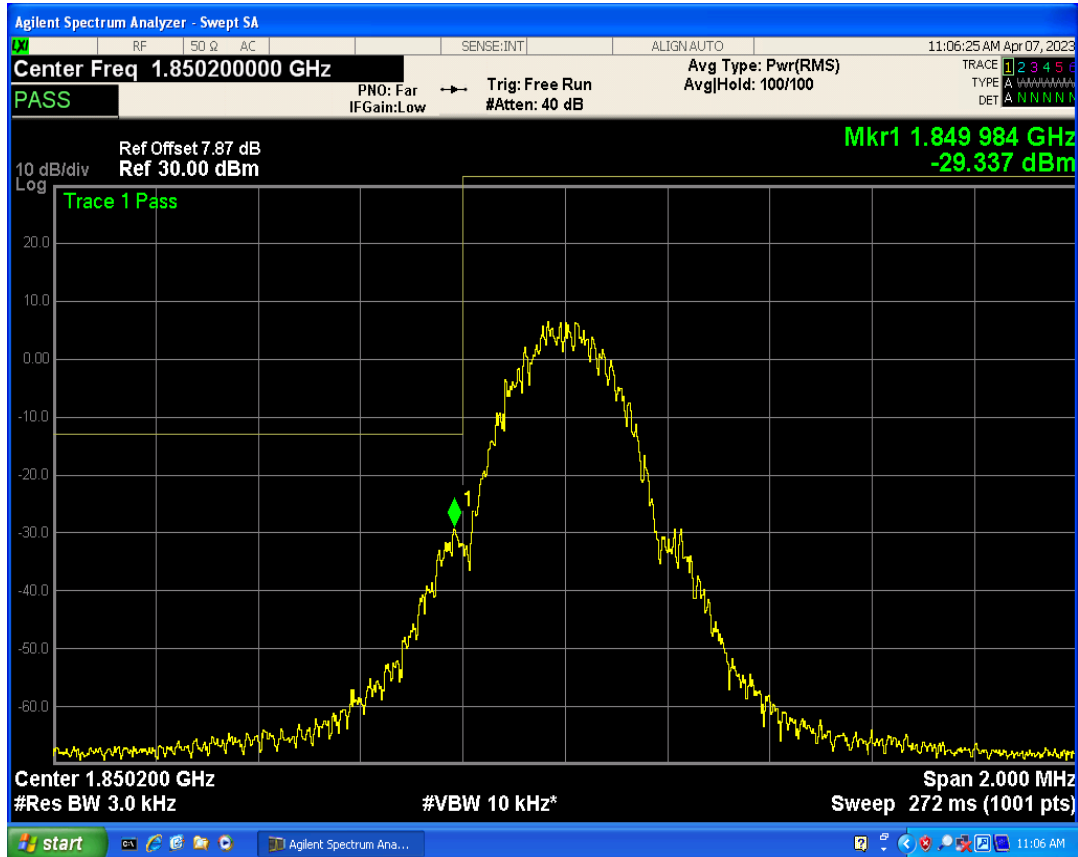

GPRS1900 Channel=810

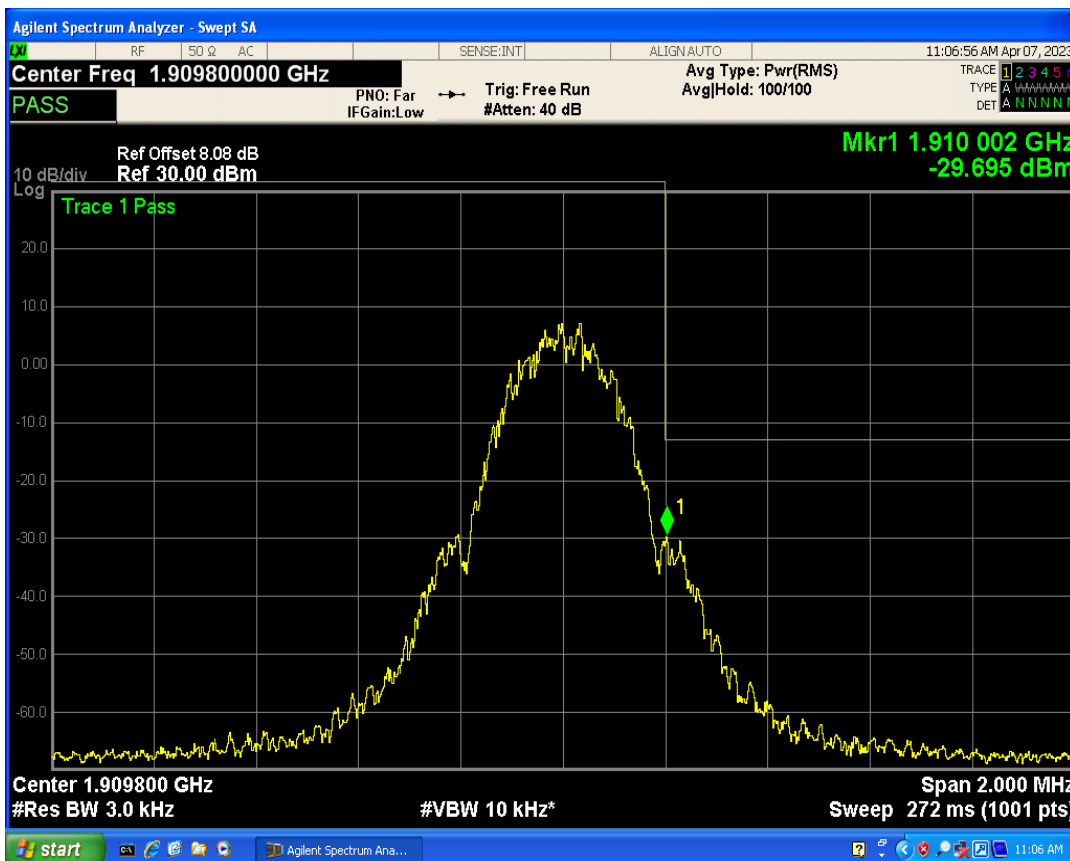

GPRS850 Channel=128




GPRS850 Channel=251




Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25442.52	-18.71	-13	PASS
GPRS1900	661	1880	25960.67	-18.90	-13	PASS
GPRS1900	810	1909.8	26028.17	-18.09	-13	PASS
GPRS850	128	824.2	26037.44	-19.64	-13	PASS
GPRS850	189	836.4	26050.01	-20.45	-13	PASS
GPRS850	251	848.8	25983.17	-20.20	-13	PASS


GPRS1900 Channel=512

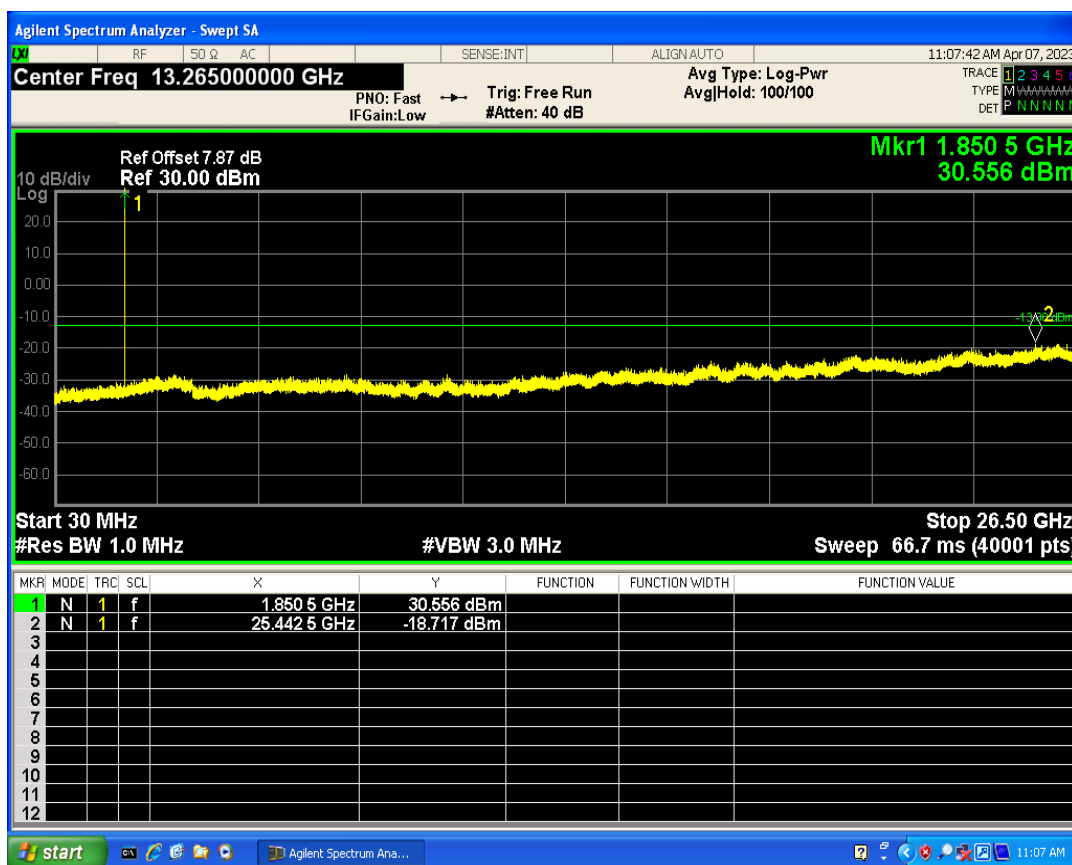


GPRS1900 Channel=810

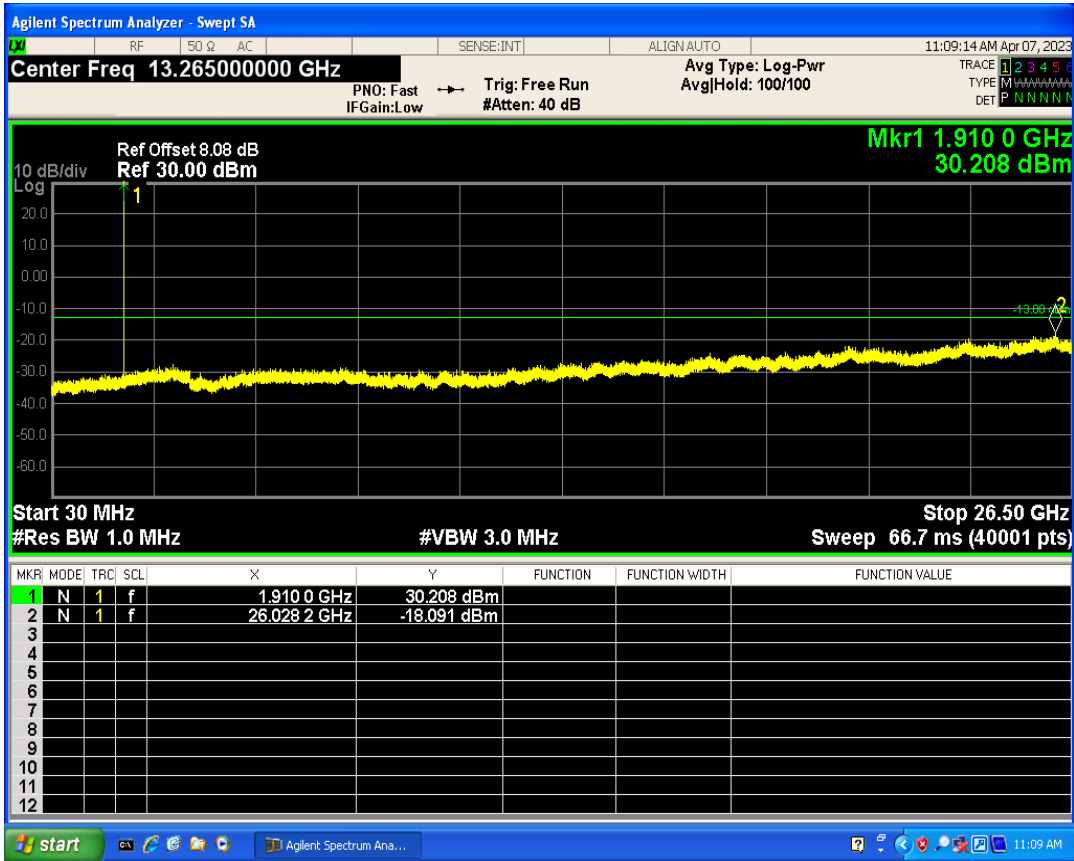


GPRS1900 Channel=661

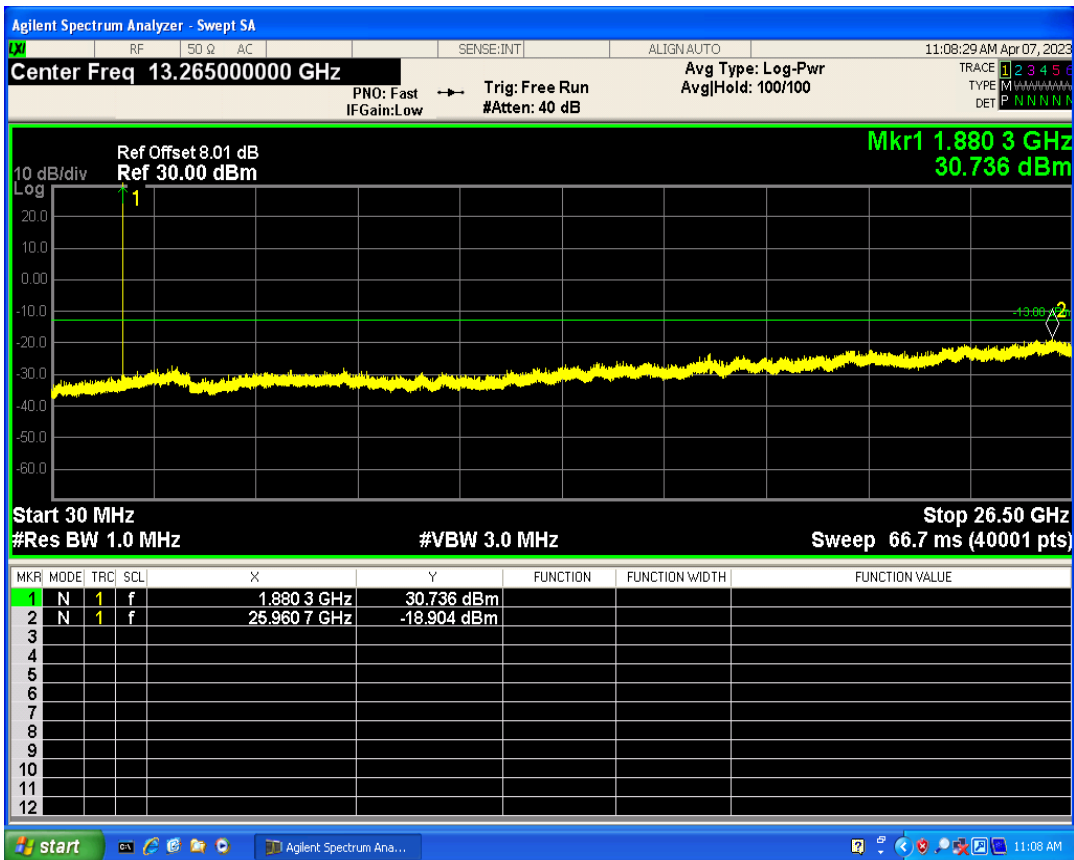


GPRS850 Channel=128

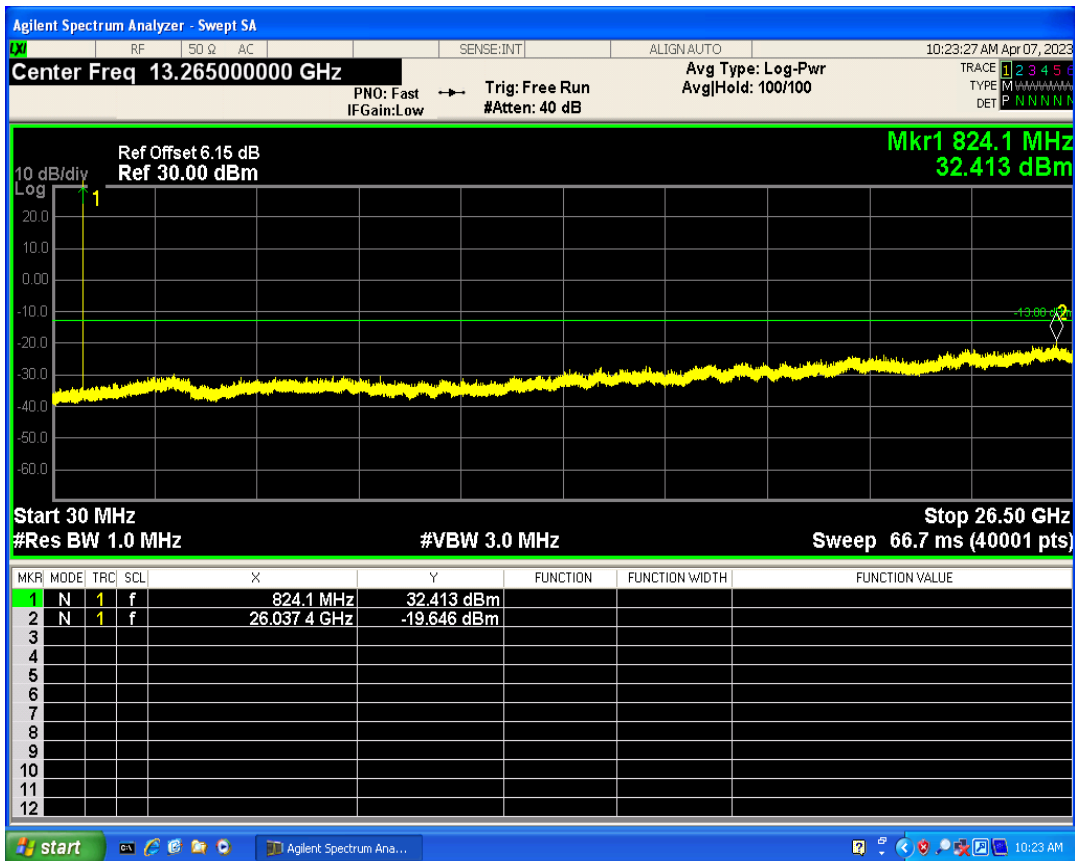

GPRS850 Channel=251

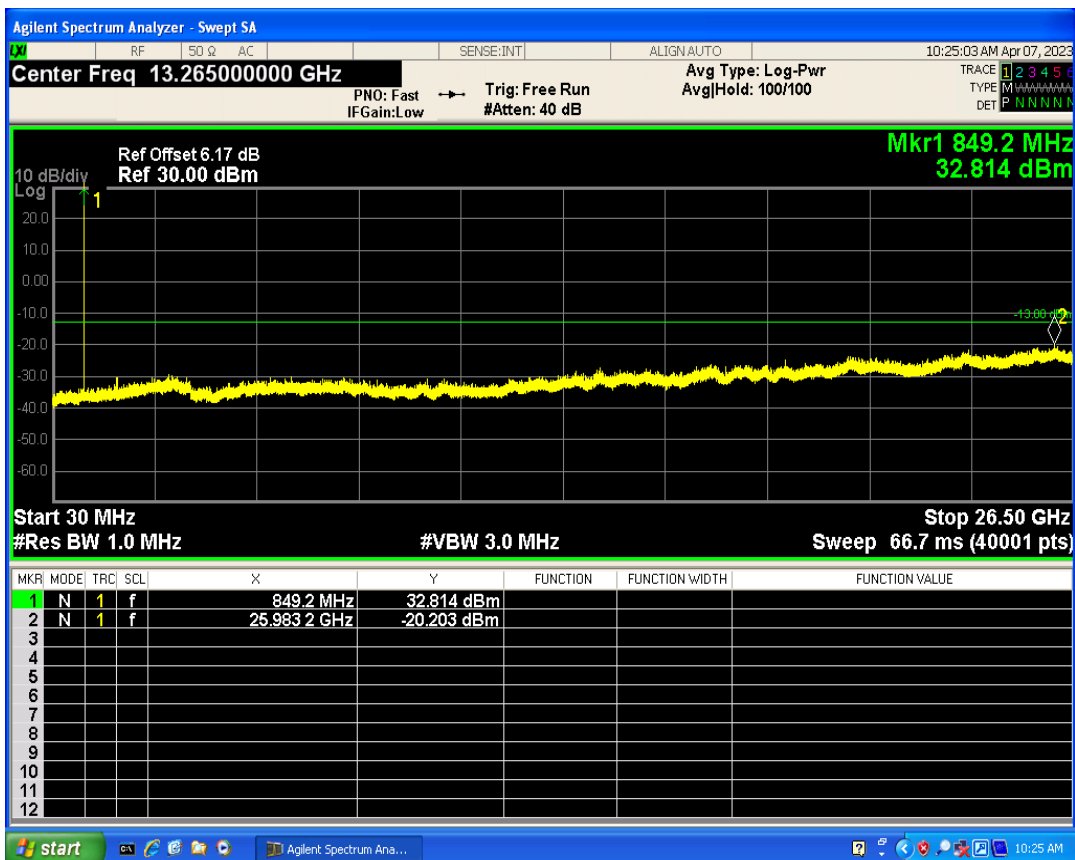

GPRS850 Channel=189

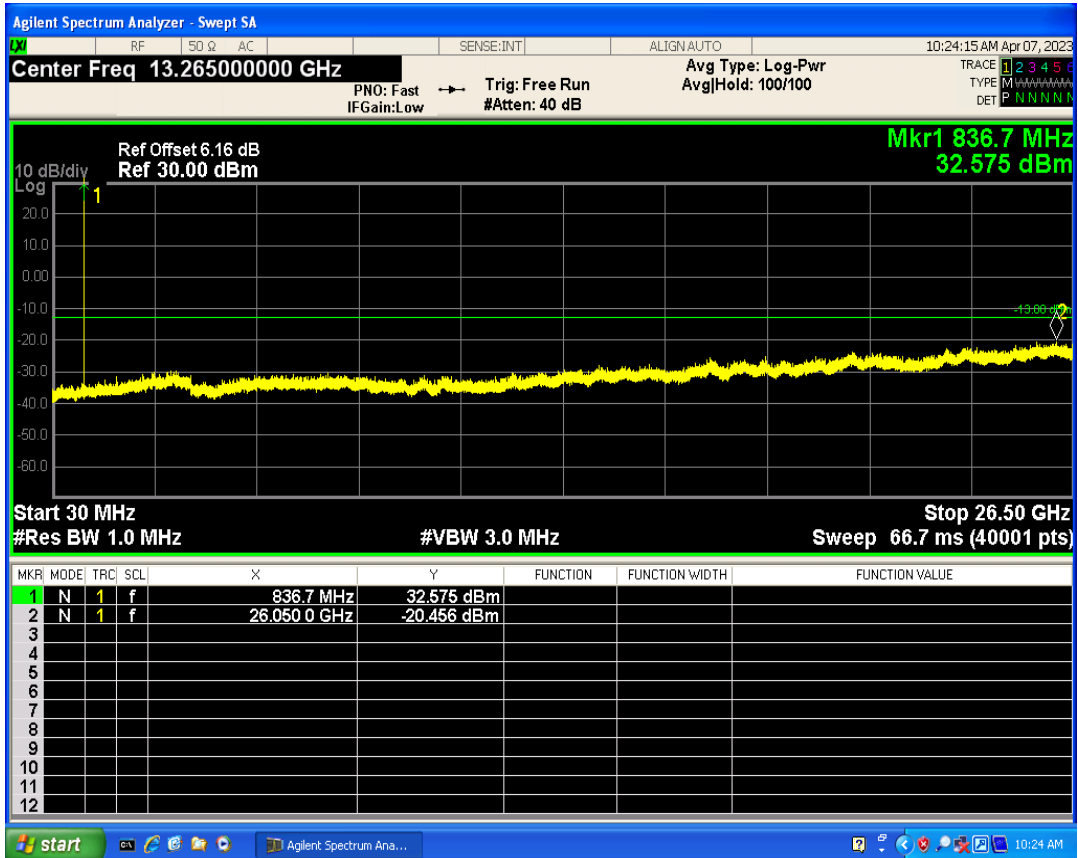

Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GSM1900	512	1850.2	30.25	PASS
GSM1900	661	1880	30.45	PASS
GSM1900	810	1909.8	30.35	PASS
GSM850	128	824.2	32.79	PASS
GSM850	189	836.4	32.63	PASS
GSM850	251	848.8	32.77	PASS

Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.80	13	PASS
GSM1900	661	1880	2.79	13	PASS
GSM1900	810	1909.8	2.79	13	PASS
GSM850	128	824.2	2.75	13	PASS
GSM850	189	836.4	2.75	13	PASS
GSM850	251	848.8	2.75	13	PASS

GSM1900 Channel=512



GSM1900 Channel=810



GSM1900 Channel=661




GSM850 Channel=128



GSM850 Channel=251




GSM850 Channel=189

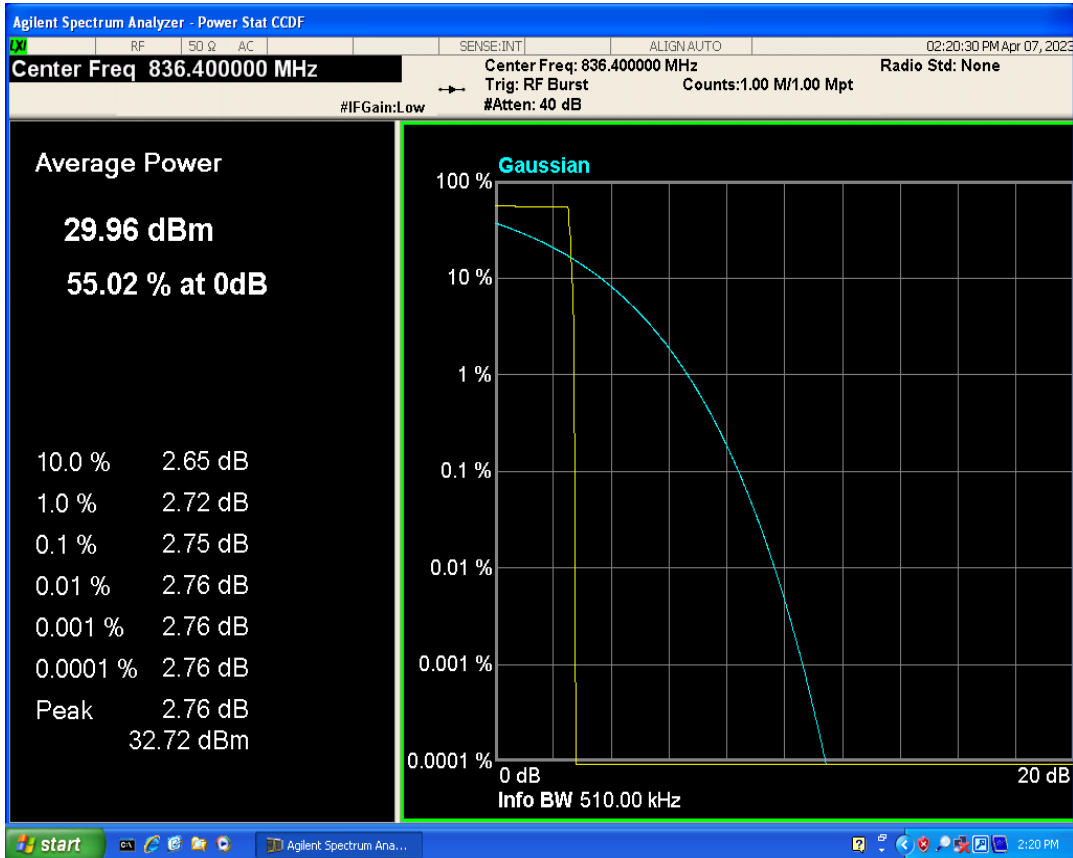


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	245.854	315.582	PASS
GSM1900	661	1880	244.045	314.445	PASS
GSM1900	810	1909.8	247.206	317.024	PASS
GSM850	128	824.2	243.533	312.716	PASS
GSM850	189	836.4	244.660	321.566	PASS
GSM850	251	848.8	243.167	318.897	PASS


GSM1900 Channel=512

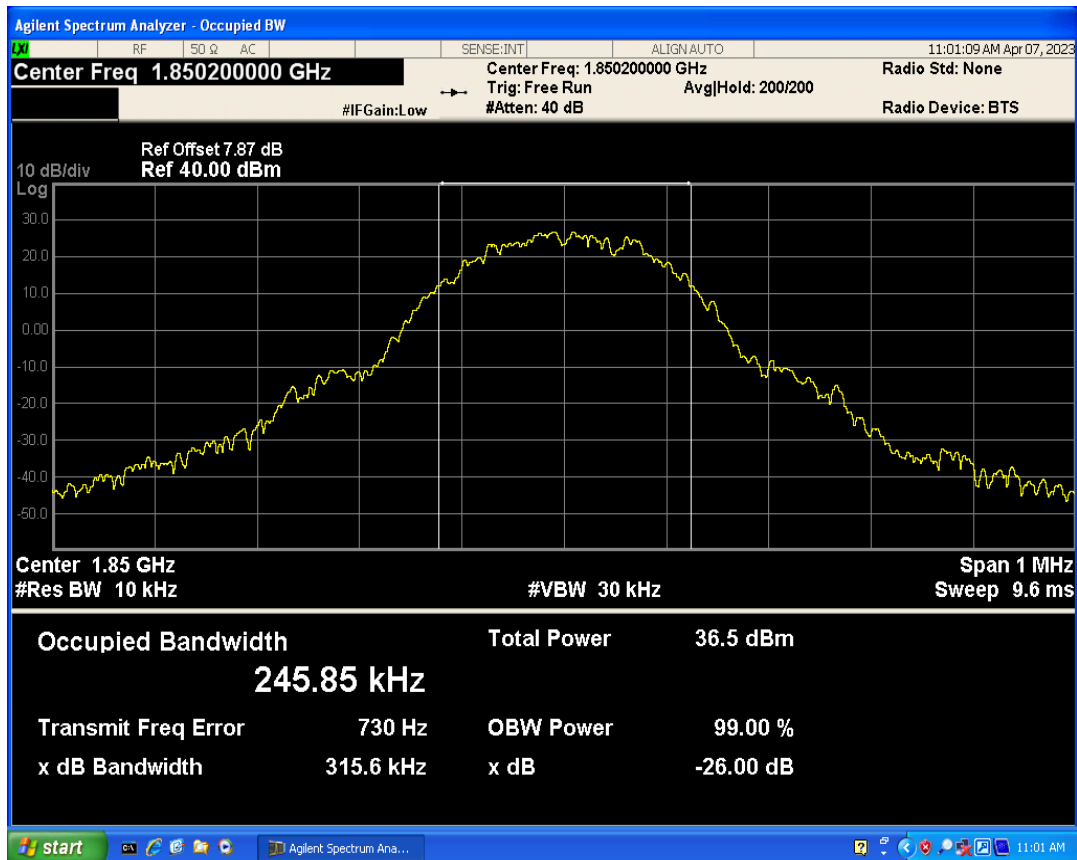


GSM1900 Channel=810

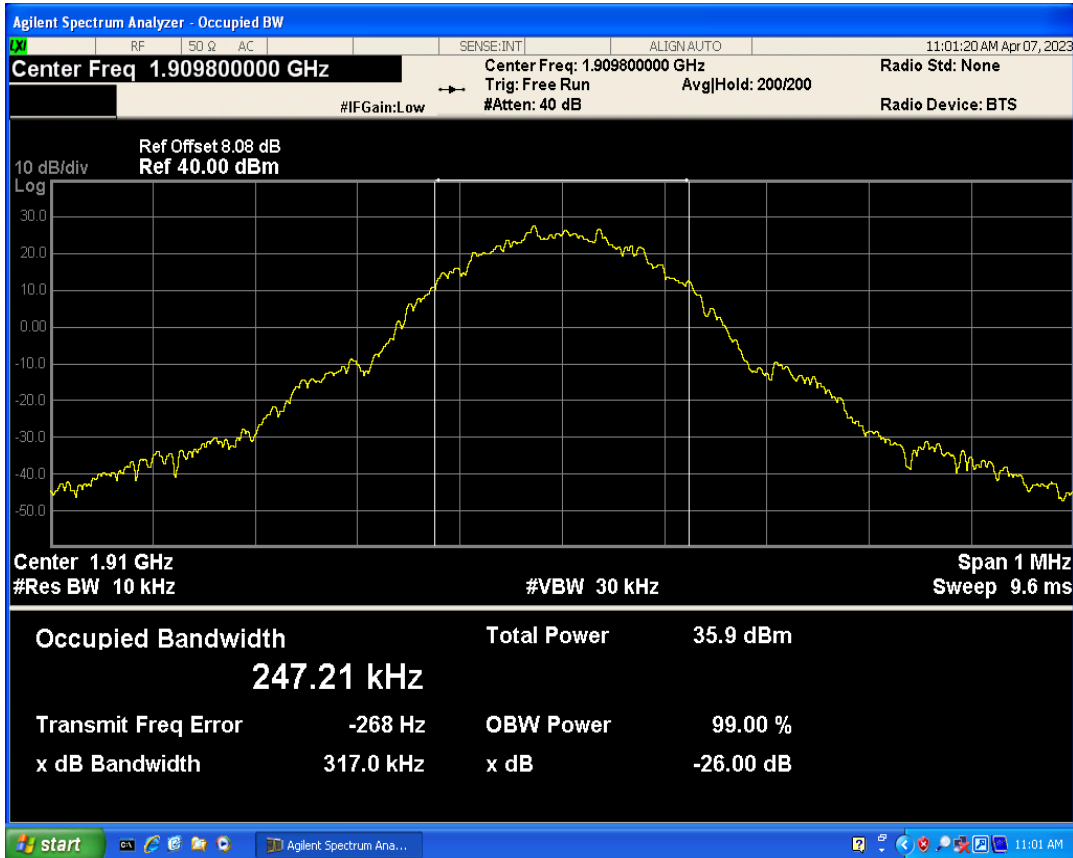


GSM1900 Channel=661

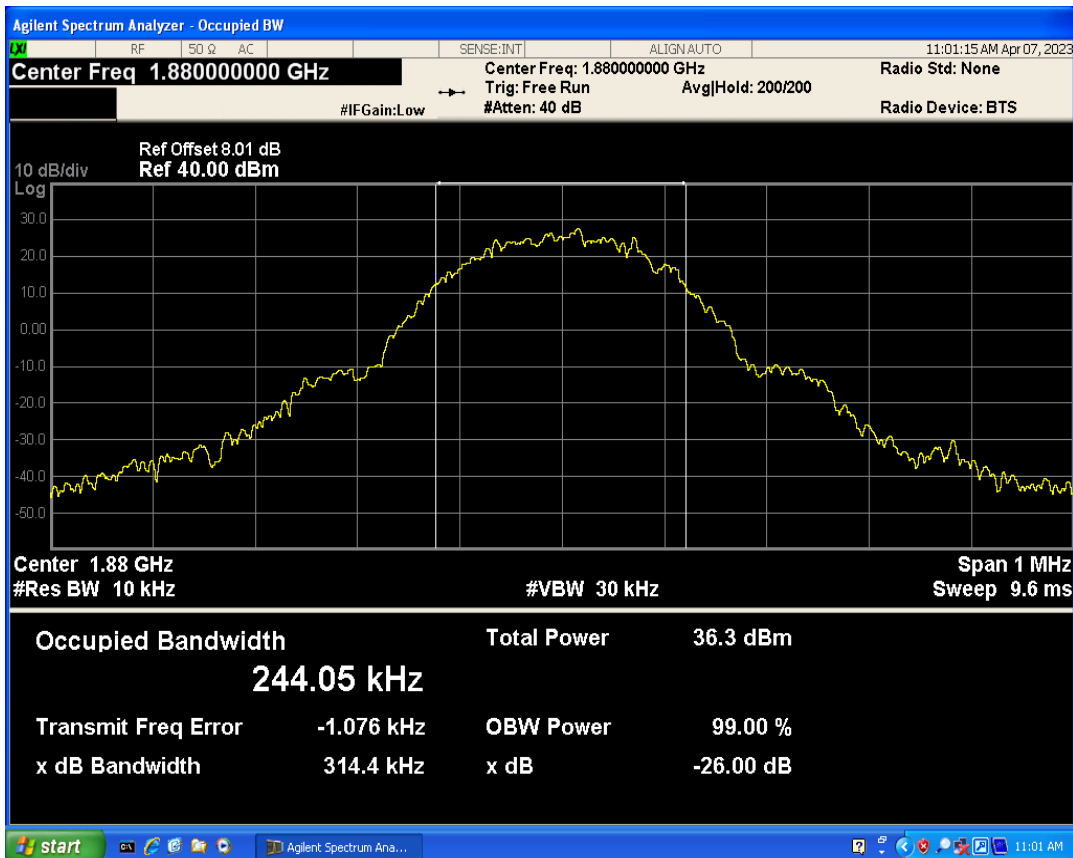


GSM850 Channel=128

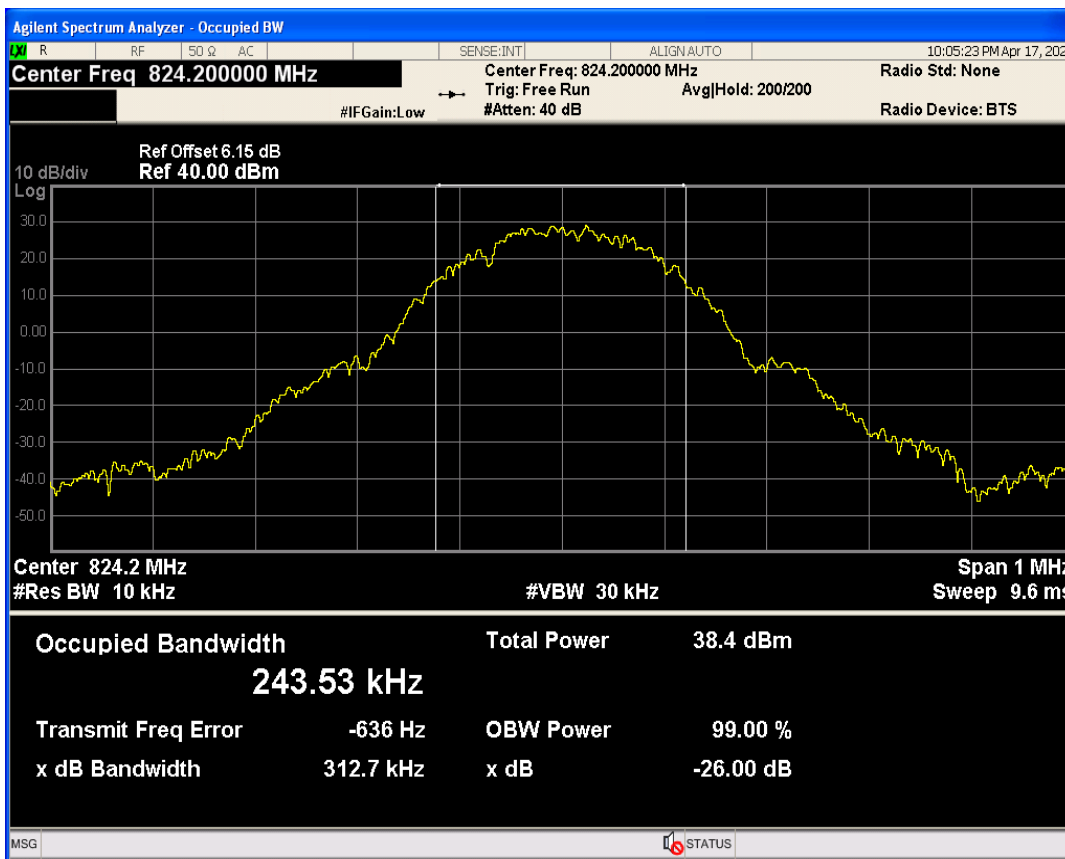

GSM850 Channel=189

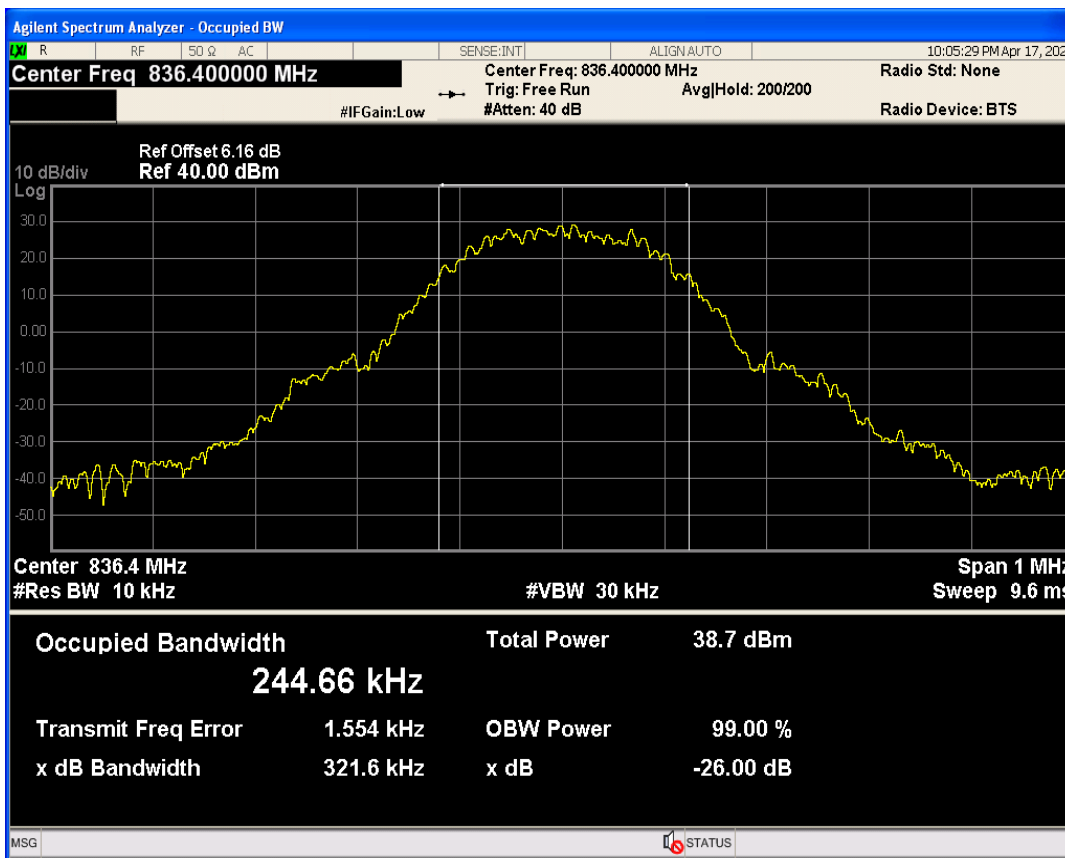


GSM850 Channel=251

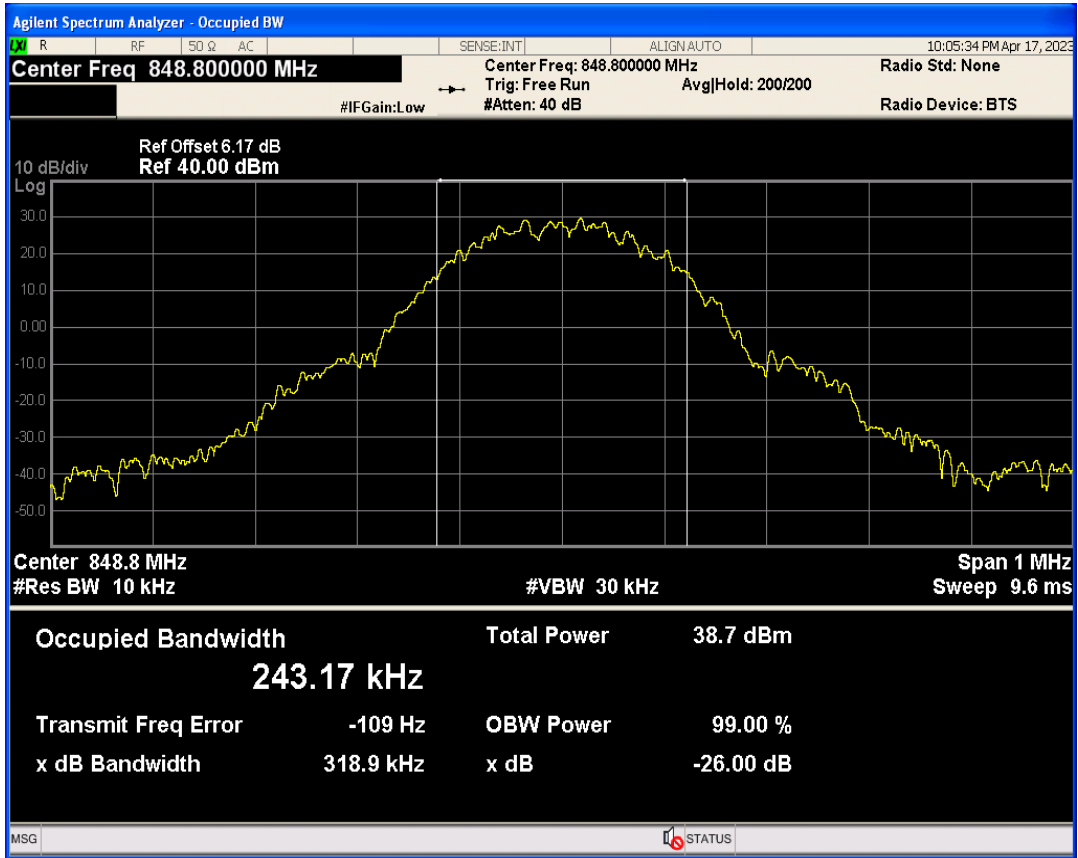


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1849.98	-27.94	-13	PASS
GSM1900	810	1909.8	1910.02	-29.29	-13	PASS
GSM850	128	824.2	823.99	-26.31	-13	PASS
GSM850	251	848.8	849.02	-25.88	-13	PASS


GSM1900 Channel=512

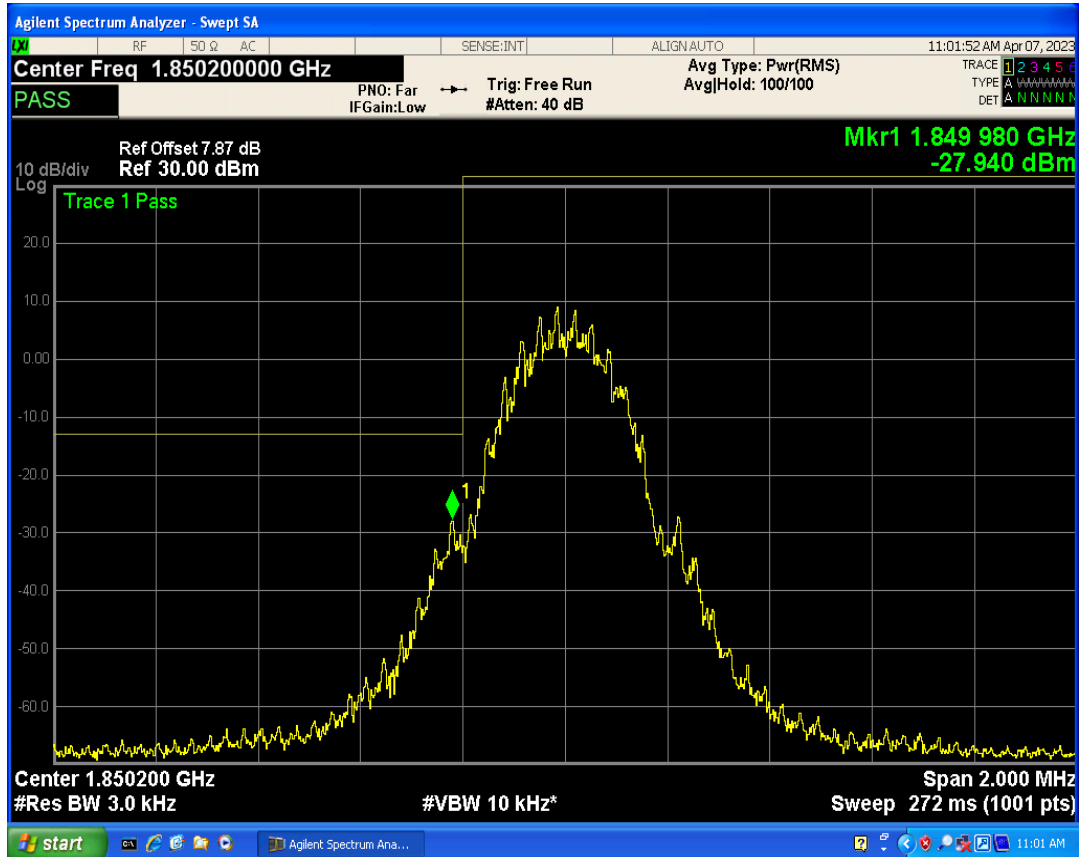

GSM1900 Channel=810

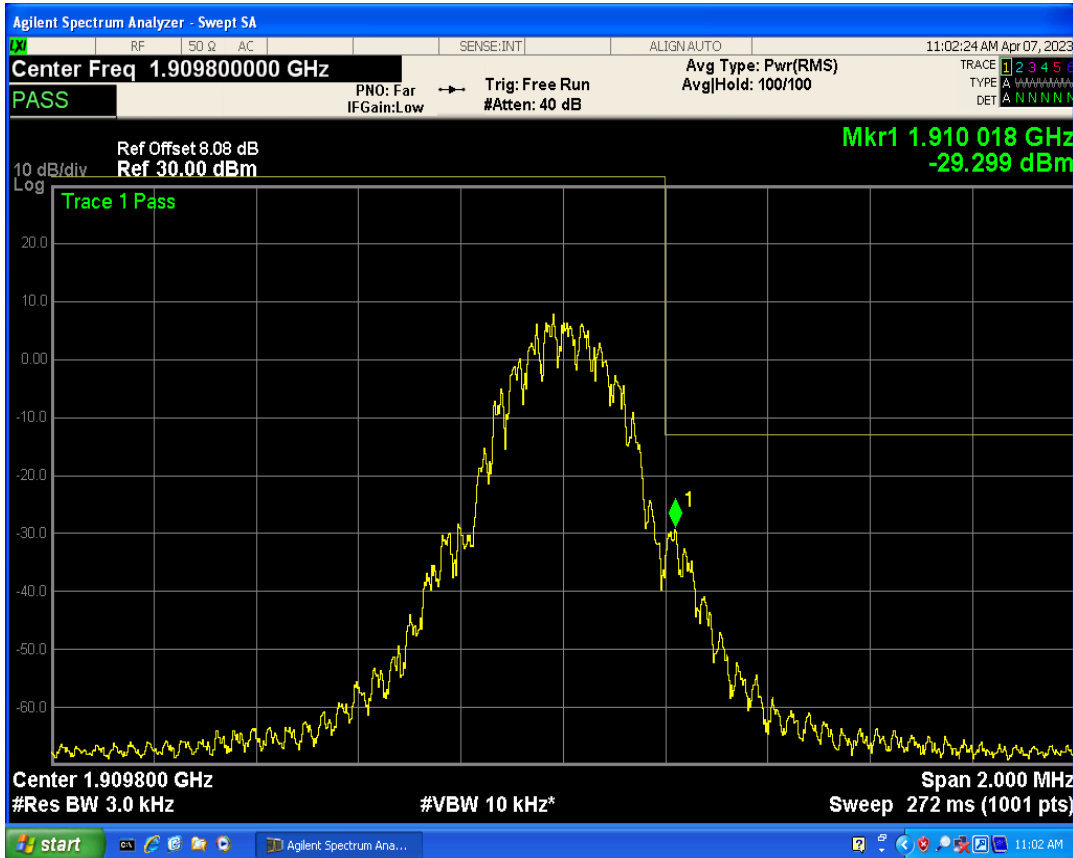

GSM850 Channel=128

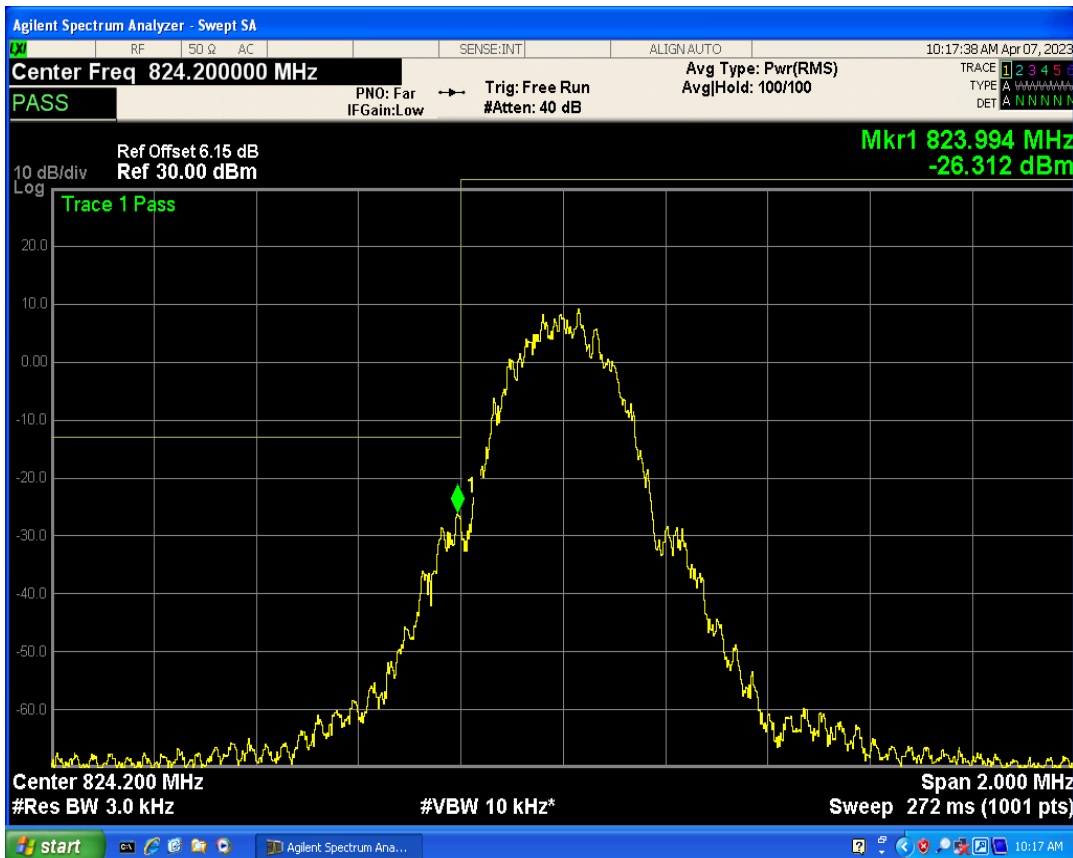


GSM850 Channel=251




Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	25992.44	-18.12	-13	PASS
GSM1900	661	1880	26057.29	-18.75	-13	PASS
GSM1900	810	1909.8	25577.52	-18.65	-13	PASS
GSM850	128	824.2	26107.58	-20.42	-13	PASS
GSM850	189	836.4	25541.12	-20.47	-13	PASS
GSM850	251	848.8	25997.73	-20.15	-13	PASS


GSM1900 Channel=512

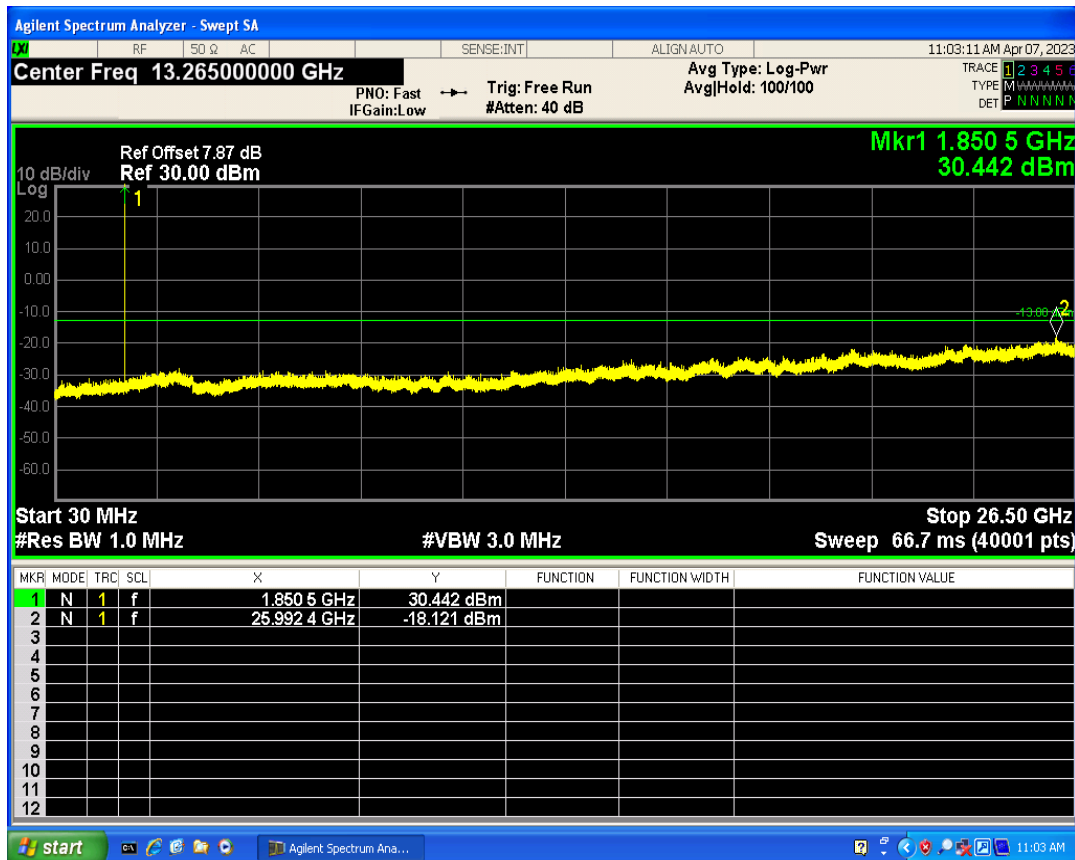


GSM1900 Channel=661

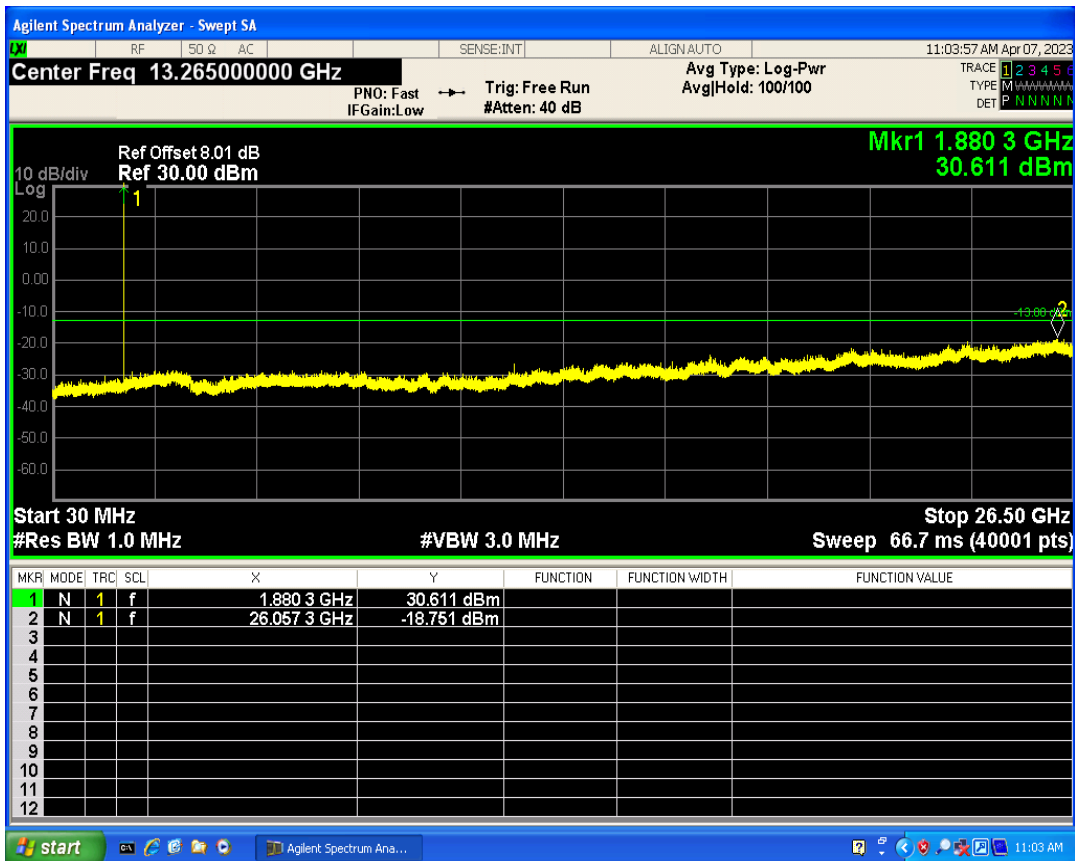


GSM1900 Channel=810

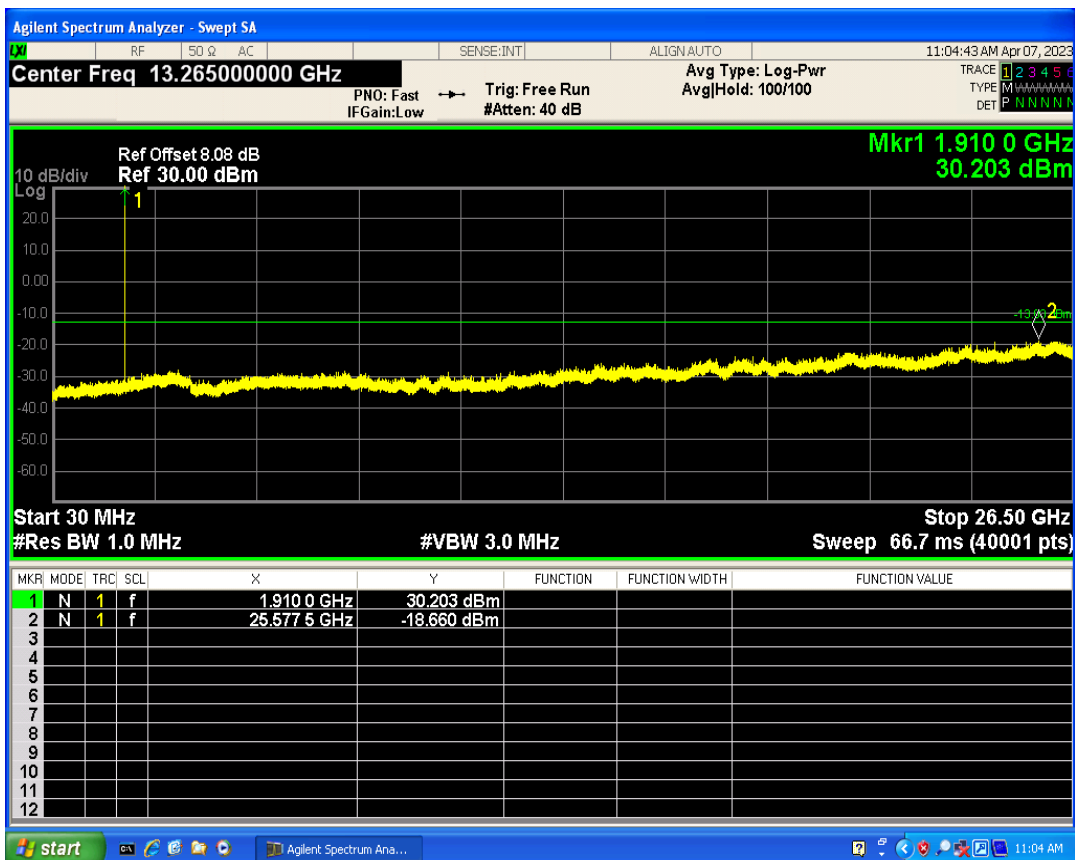

GSM850 Channel=189

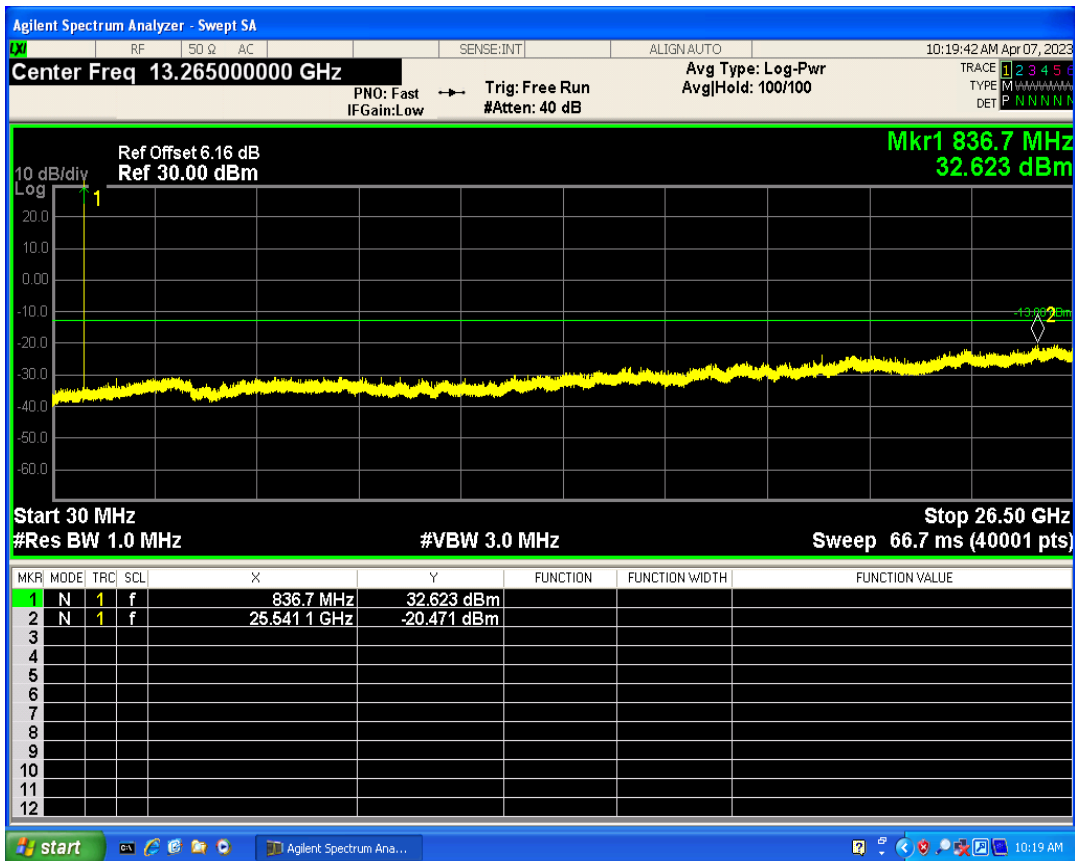

GSM850 Channel=128

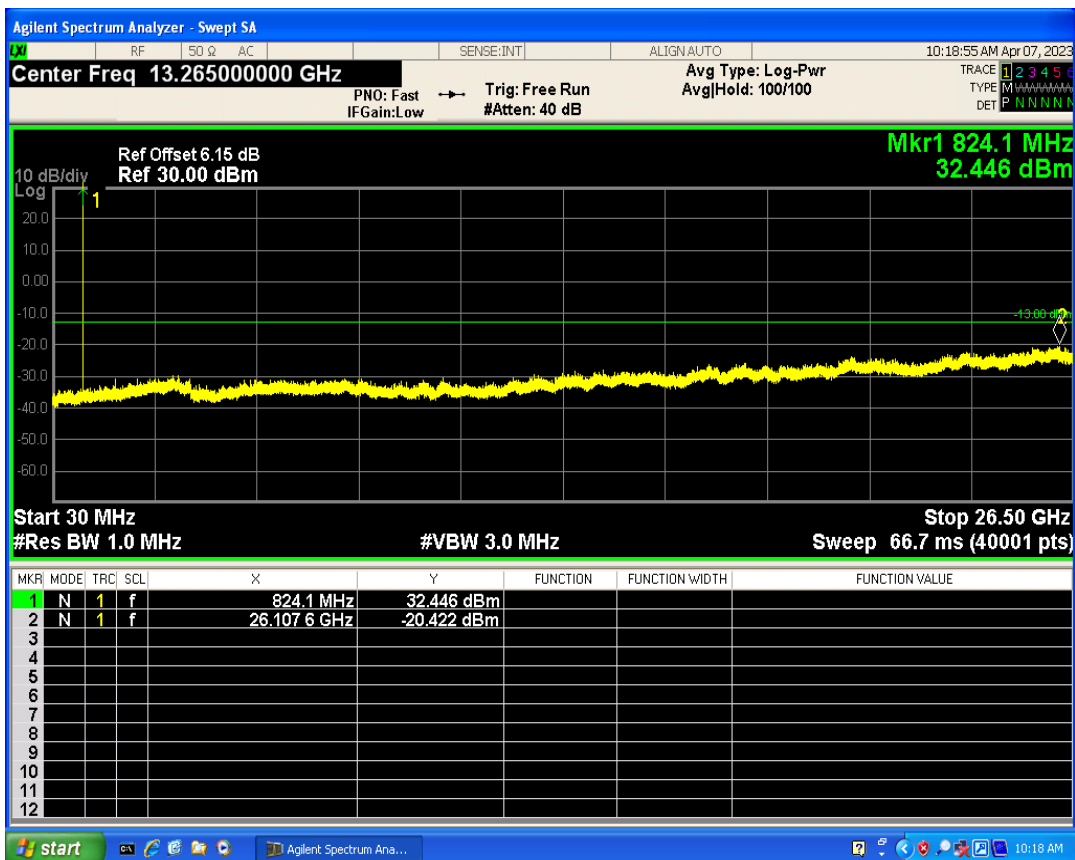

GSM850 Channel=251

