

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1:  $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

### 13.4 TEST DATA

[TestMode: TX low channel]; [Polarity: Horizontal]

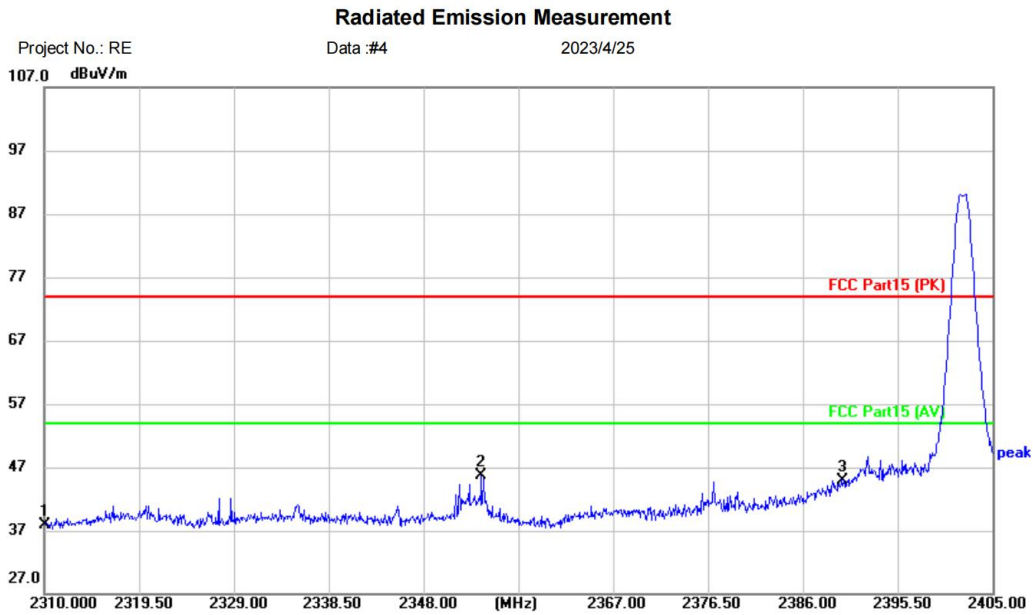

Site	Polarization: <b>Horizontal</b>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: LED lamp		
M/N: 16000312		
Mode: BLE TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2310.000	42.26	-4.27	37.99	74.00	-36.01	peak	
2	*	2353.795	49.69	-4.01	45.68	74.00	-28.32	peak	
3		2390.000	48.82	-3.82	45.00	74.00	-29.00	peak	

\*:Maximum data    x:Over limit    !:over margin      (Reference Only)

Receiver:      ESR\_1      Spectrum Analyzer:      FSP40  
Antenna:      EZ 9120D 1G-18G      Engineer Signature:

**Test Result: Pass**

[TestMode: TX low channel]; [Polarity: Vertical]

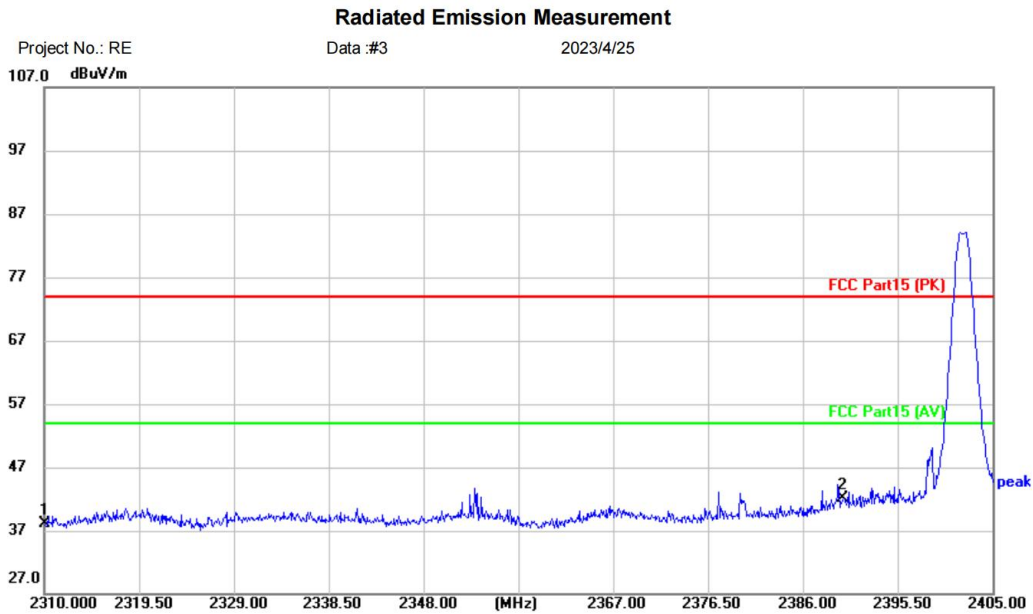

Site	Polarization: <b>Vertical</b>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: LED lamp		
M/N: 16000312		
Mode: BLE TX-L		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	42.42	-4.27	38.15	74.00	-35.85	peak	
2	*	2390.000	45.92	-3.82	42.10	74.00	-31.90	peak	

\*:Maximum data    x:Over limit    !:over margin      <Reference Only


Receiver:      ESR\_1      Spectrum Analyzer:      FSP40

Antenna:      EZ 9120D 1G-18G      Engineer Signature:

**Test Result: Pass**



[TestMode: TX high channel]; [Polarity: Vertical]

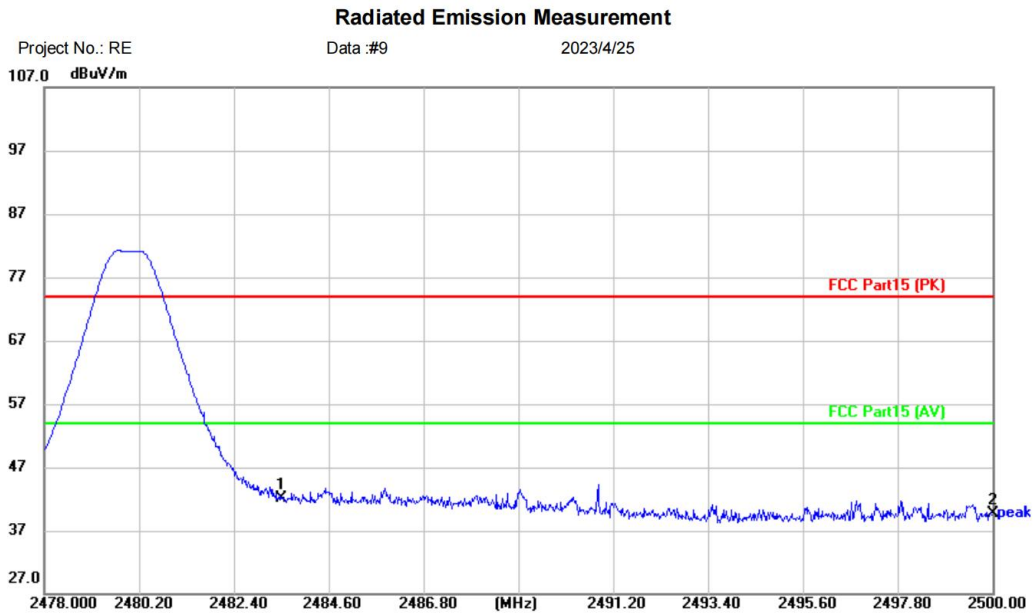

Site	Polarization: <b>Vertical</b>	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: LED lamp		
M/N: 16000312		
Mode: BLE TX-H		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	46.09	-3.96	42.13	74.00	-31.87	peak	
2		2500.000	43.78	-4.00	39.78	74.00	-34.22	peak	

\*:Maximum data    x:Over limit    !:over margin      <Reference Only

Receiver:      ESR\_1      Spectrum Analyzer:      FSP40

Antenna:      EZ 9120D 1G-18G      Engineer Signature:

**Test Result: Pass**


## 14 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

### 14.1 LIMITS

<b>Limit:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

### 14.2 BLOCK DIAGRAM OF TEST SETUP

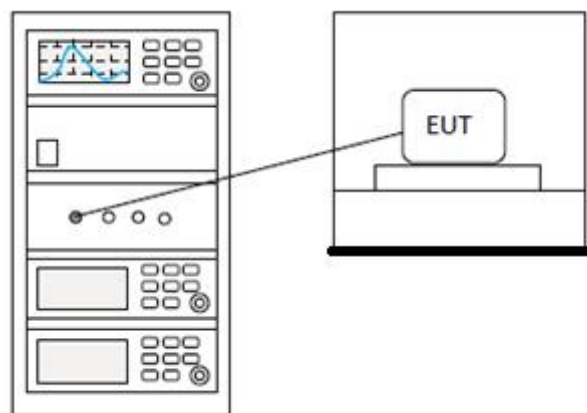

### 14.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


## 15 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

### 15.1 LIMITS

**Limit:**  $\leq 8\text{dBm}$  in any 3 kHz band during any time interval of continuous transmission

### 15.2 BLOCK DIAGRAM OF TEST SETUP

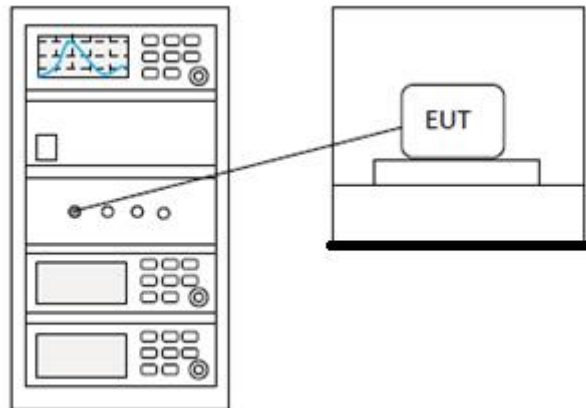

### 15.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**




## 16 CONDUCTED PEAK OUTPUT POWER

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Jozu
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 16.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 16.2 BLOCK DIAGRAM OF TEST SETUP

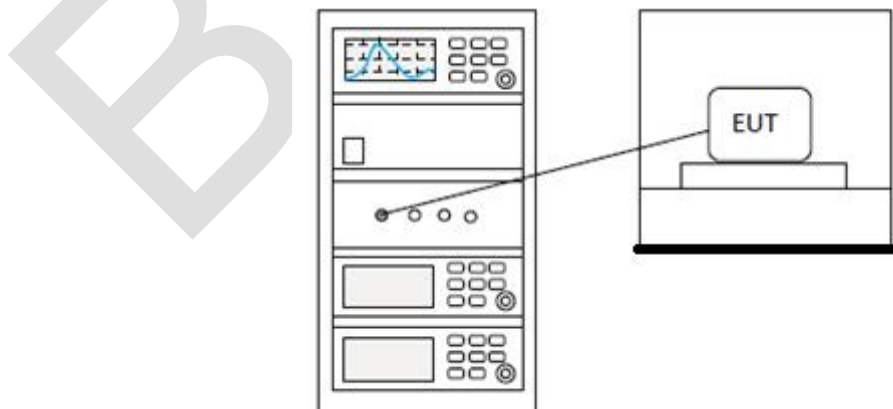

### 16.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


## 17 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

### 17.1 LIMITS

Limit:	$\geq 500$ kHz
--------	----------------

### 17.2 BLOCK DIAGRAM OF TEST SETUP

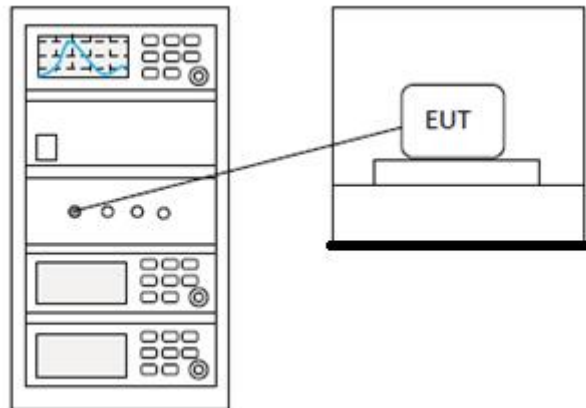

### 17.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

## 18 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

### 18.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The best case gain of the antenna is 1.67dBi.


## 19 APPENDIX

### Appendix1


#### Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-1.297	30	Pass
NVNT	BLE	2440	Ant1	-0.512	30	Pass
NVNT	BLE	2480	Ant1	-1.848	30	Pass


Power NVNT BLE 2402MHz Ant1

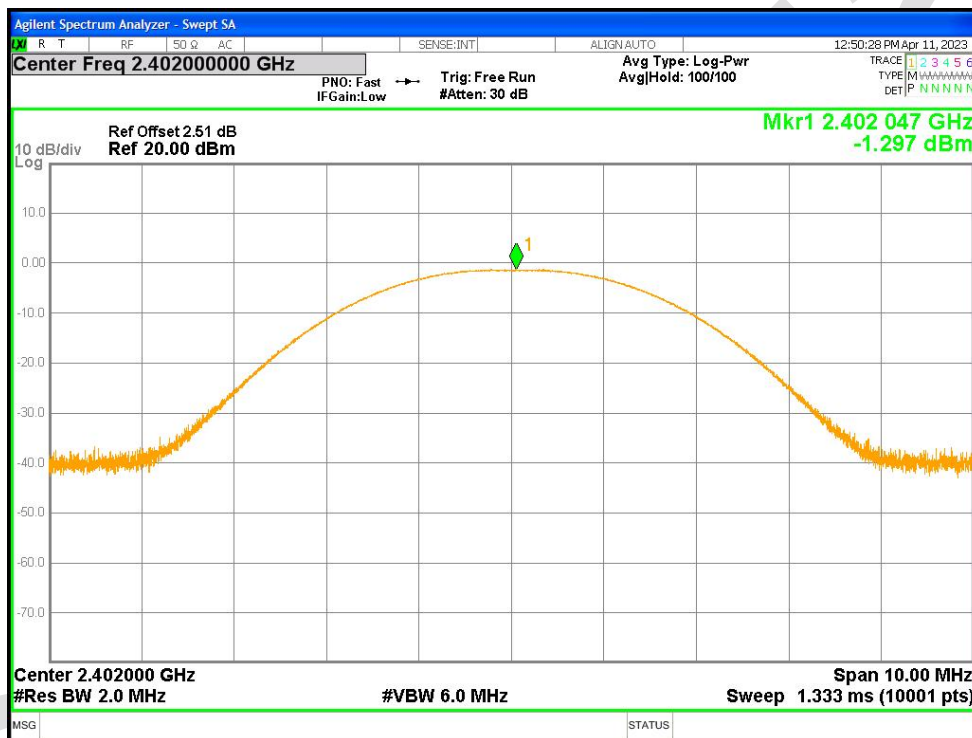

Power NVNT BLE 2440MHz Ant1

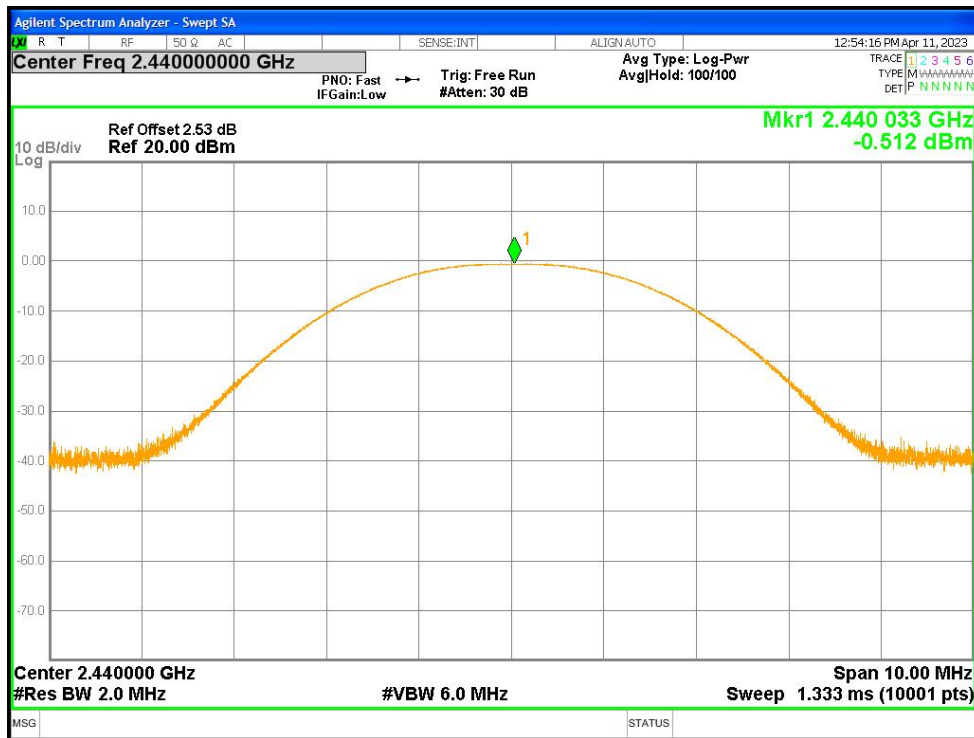



Power NVNT BLE 2480MHz Ant1

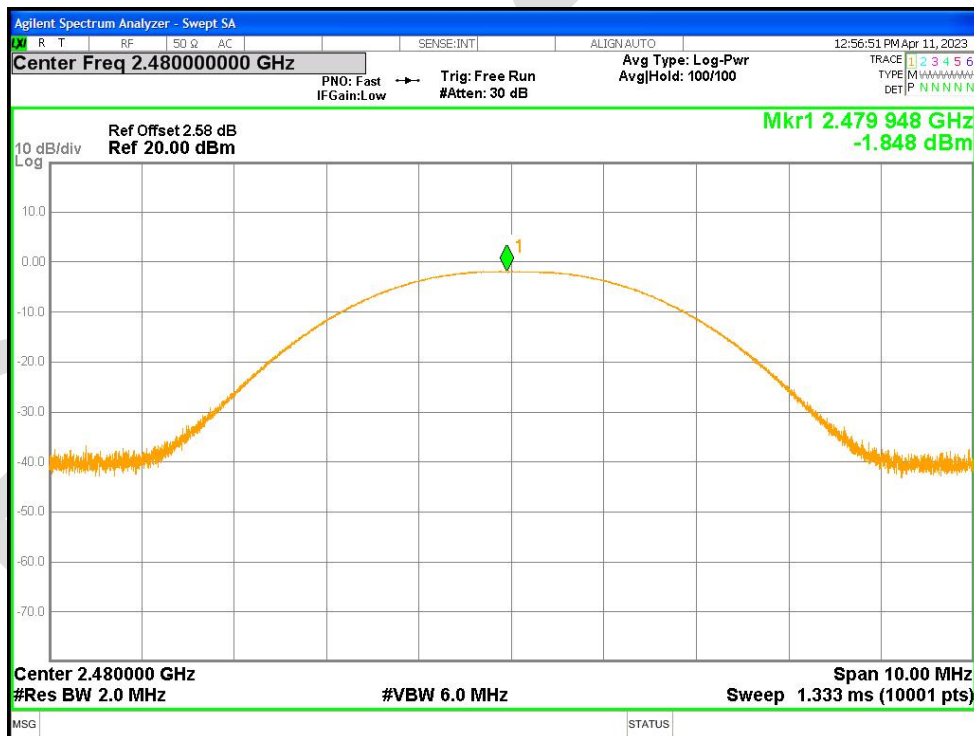


**-6dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	0.721	0.5	Pass
NVNT	BLE	2440	Ant1	0.715	0.5	Pass
NVNT	BLE	2480	Ant1	0.694	0.5	Pass

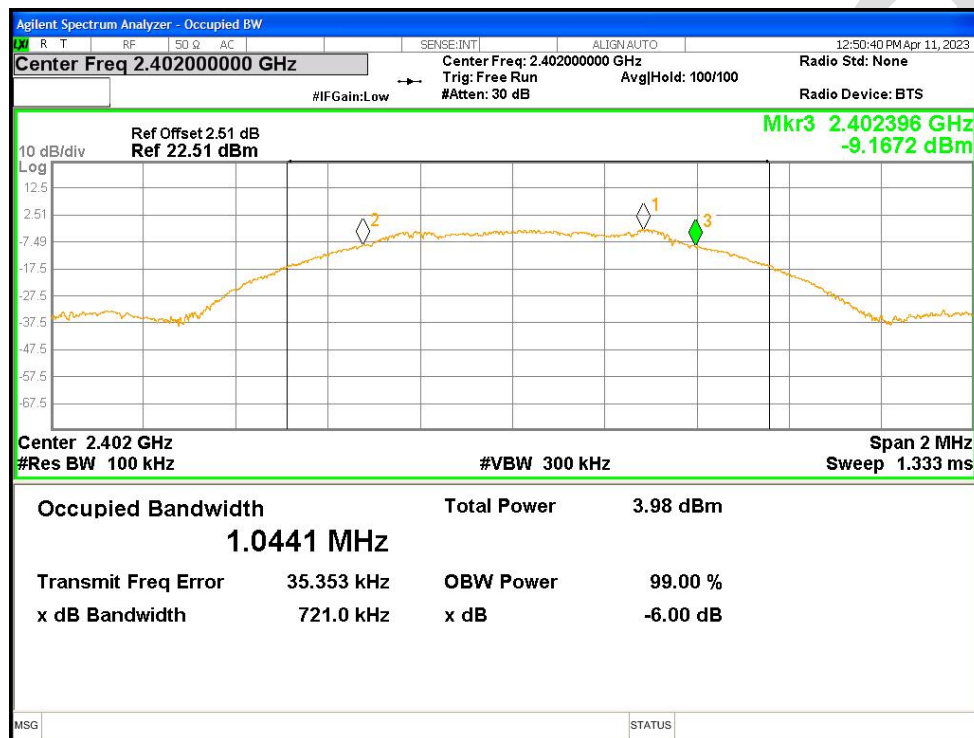**-6dB Bandwidth NVNT BLE 2402MHz Ant1**

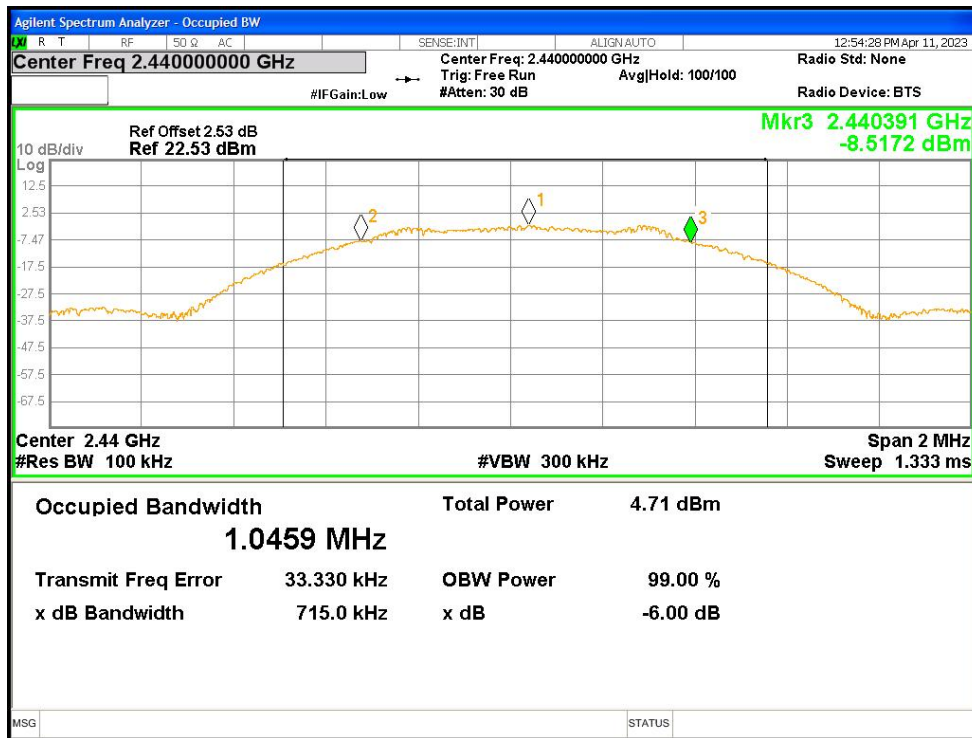**-6dB Bandwidth NVNT BLE 2440MHz Ant1**

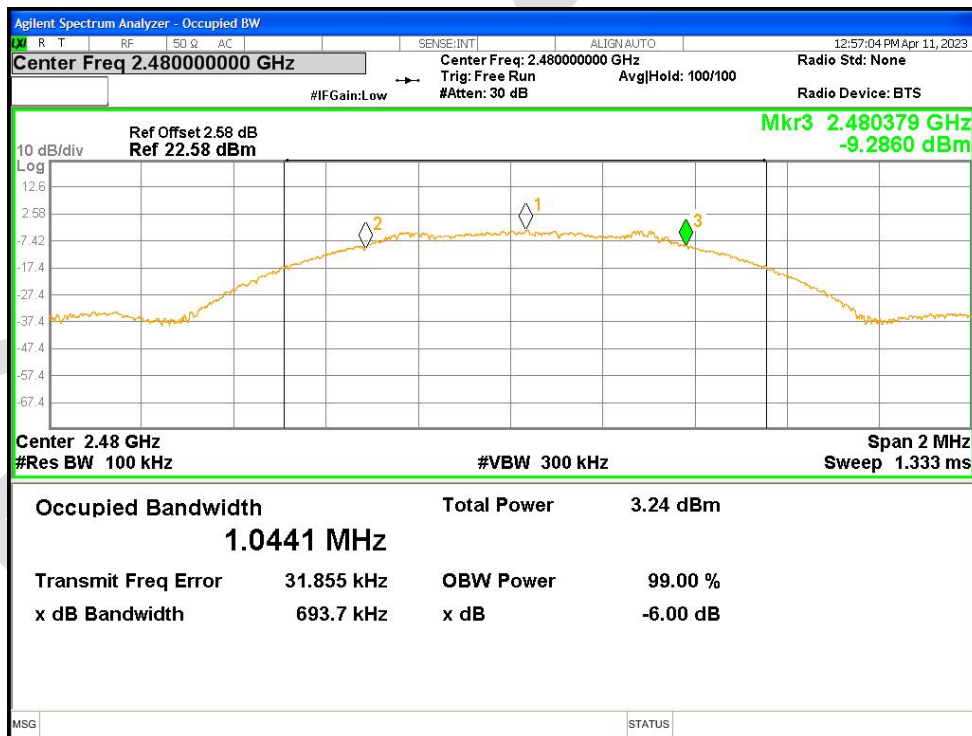

-6dB Bandwidth NVNT BLE 2480MHz Ant1







**Occupied Channel Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	1.0470
NVNT	BLE	2440	Ant1	1.0448
NVNT	BLE	2480	Ant1	1.0457


OBW NVNT BLE 2402MHz Ant1

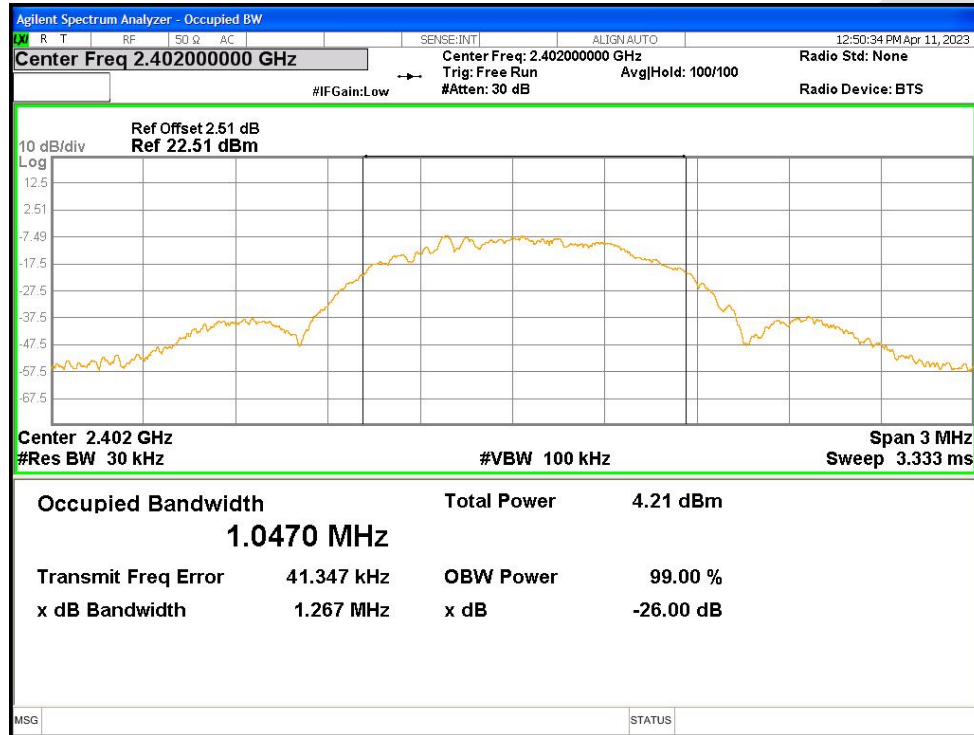

OBW NVNT BLE 2440MHz Ant1

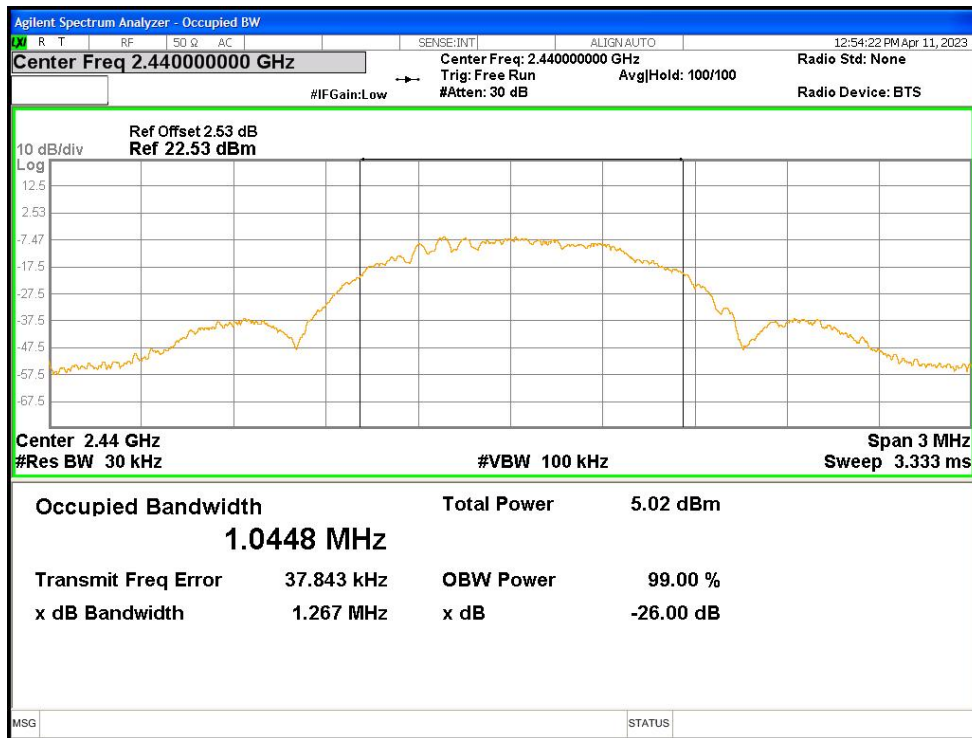


OBW NVNT BLE 2480MHz Ant1

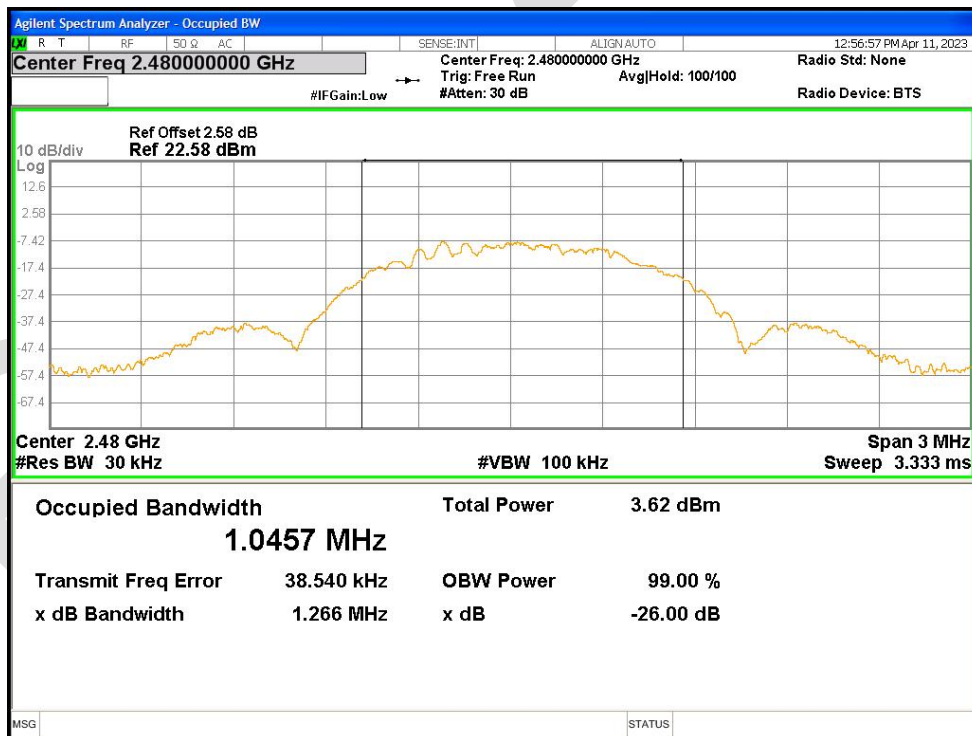

**Maximum Power Spectral Density Level**

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-16.409	8	Pass
NVNT	BLE	2440	Ant1	-14.955	8	Pass
NVNT	BLE	2480	Ant1	-15.670	8	Pass


PSD NVNT BLE 2402MHz Ant1

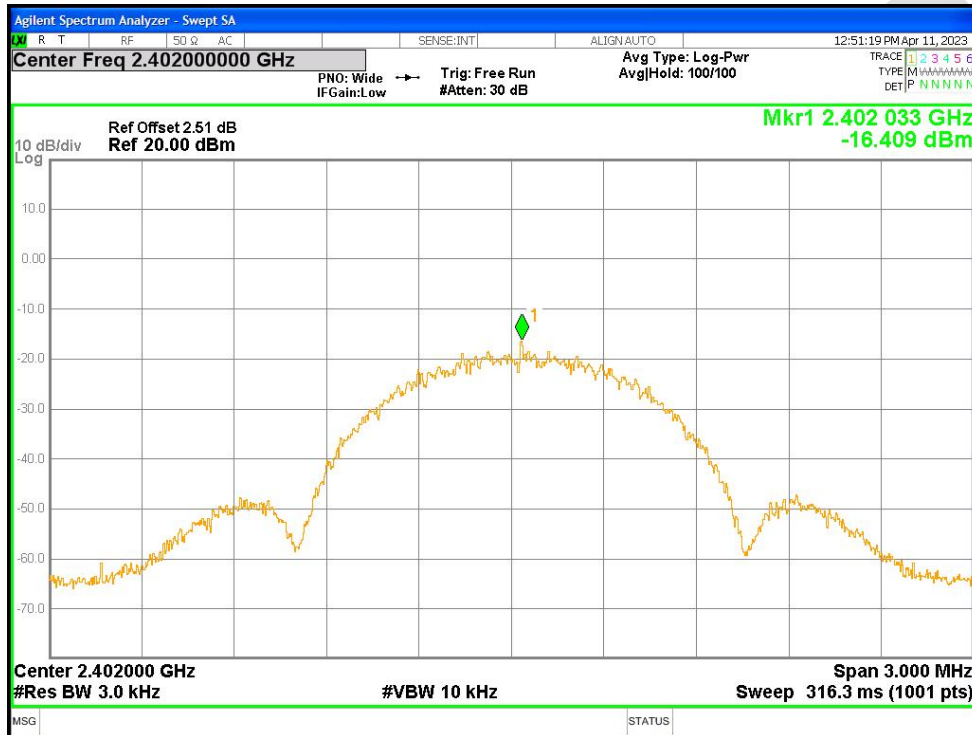

PSD NVNT BLE 2440MHz Ant1




PSD NVNT BLE 2480MHz Ant1

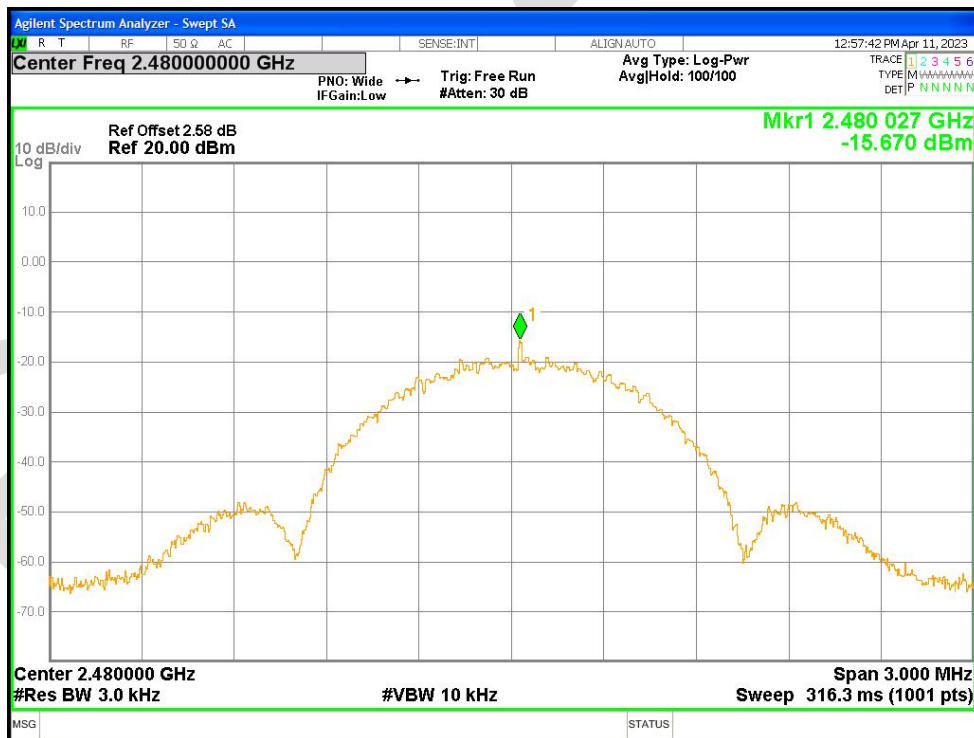


**Band Edge**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-49.58	-30	Pass
NVNT	BLE	2480	Ant1	-47.65	-30	Pass


Band Edge NVNT BLE 2402MHz Ant1 Ref

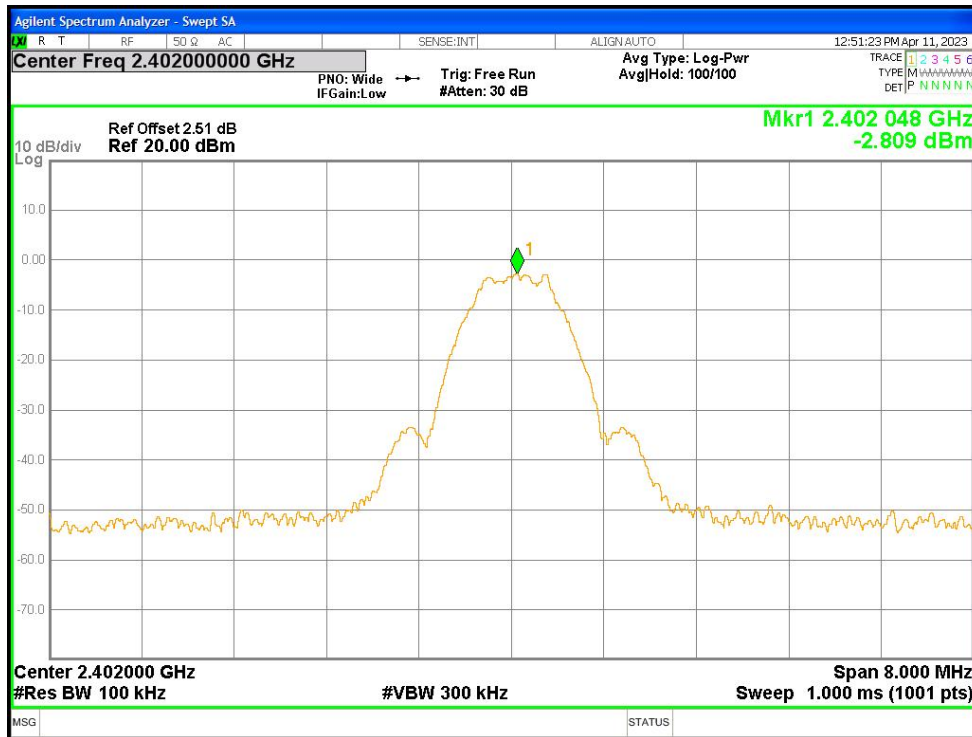


Band Edge NVNT BLE 2402MHz Ant1 Emission

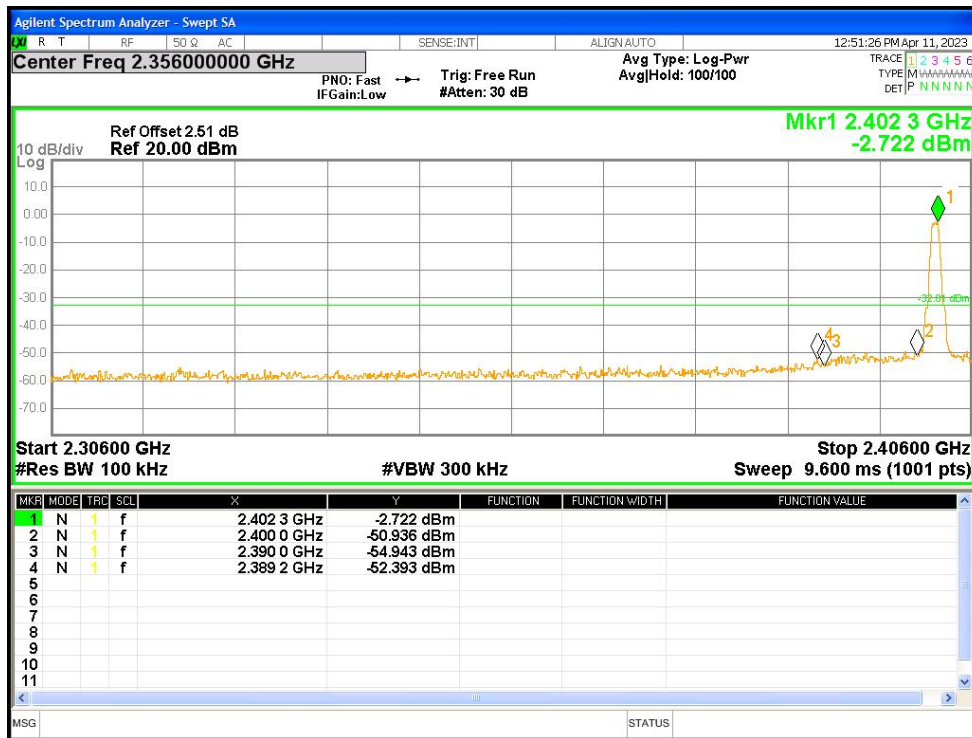

Band Edge NVNT BLE 2480MHz Ant1 Ref

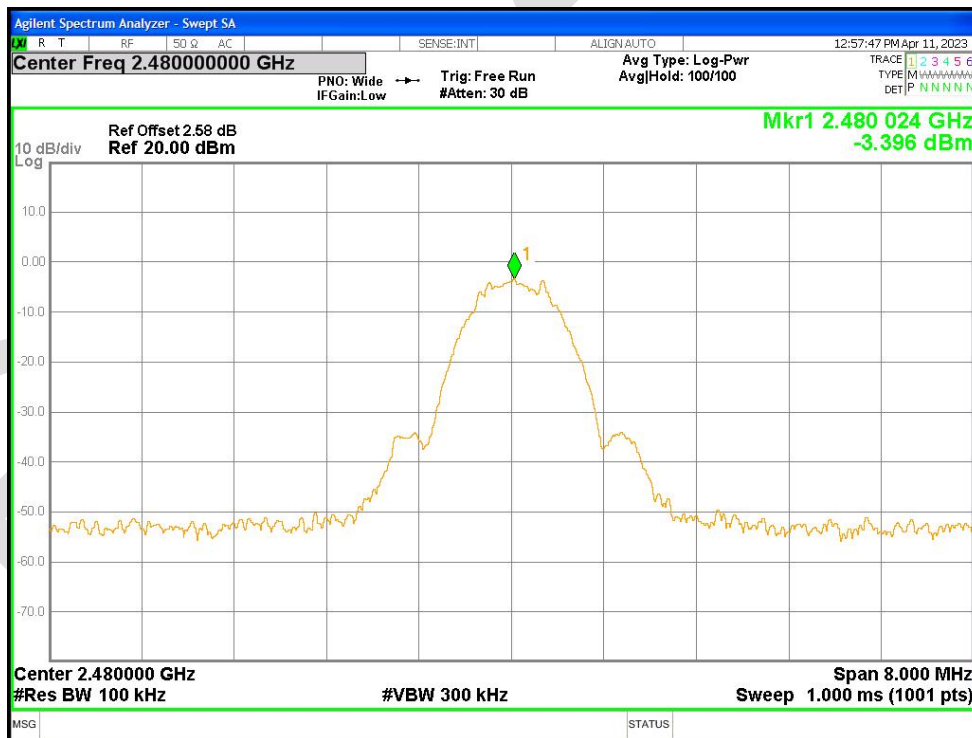


Band Edge NVNT BLE 2480MHz Ant1 Emission

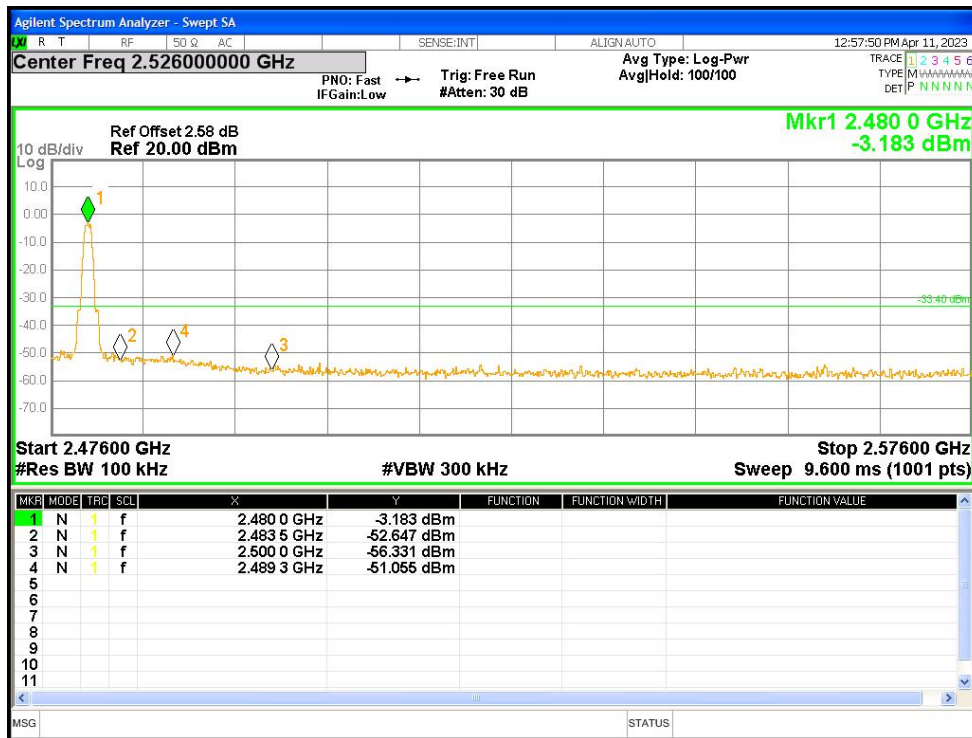

**Conducted RF Spurious Emission**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-42.3	-30	Pass
NVNT	BLE	2440	Ant1	-42.75	-30	Pass
NVNT	BLE	2480	Ant1	-41.54	-30	Pass

Tx. Spurious NVNT BLE 2402MHz Ant1 Ref

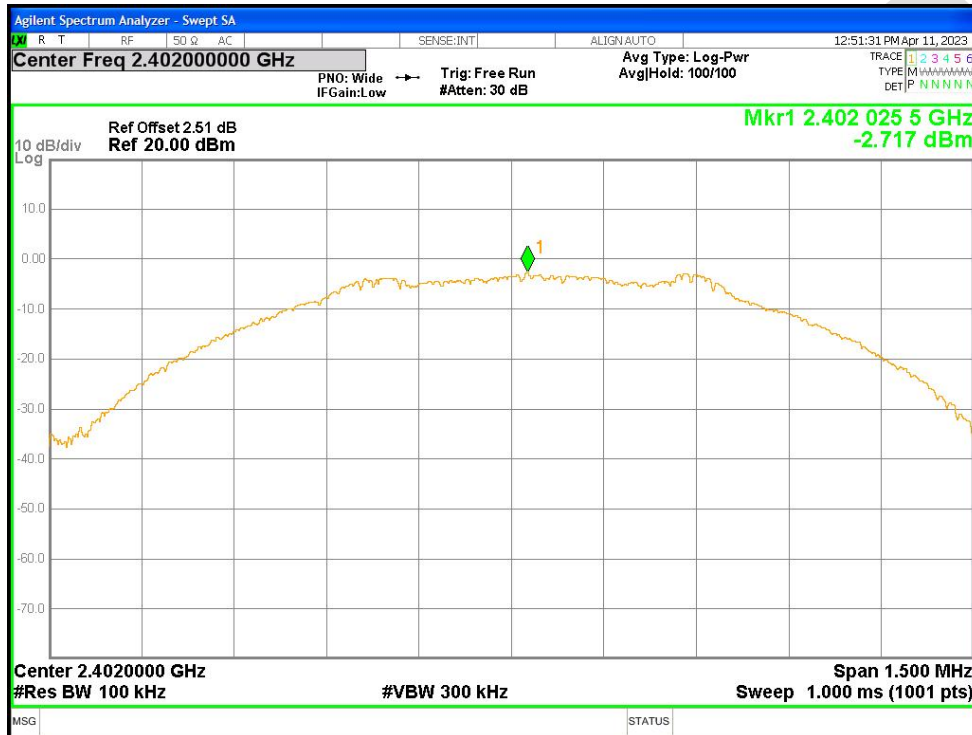


Tx. Spurious NVNT BLE 2402MHz Ant1 Emission




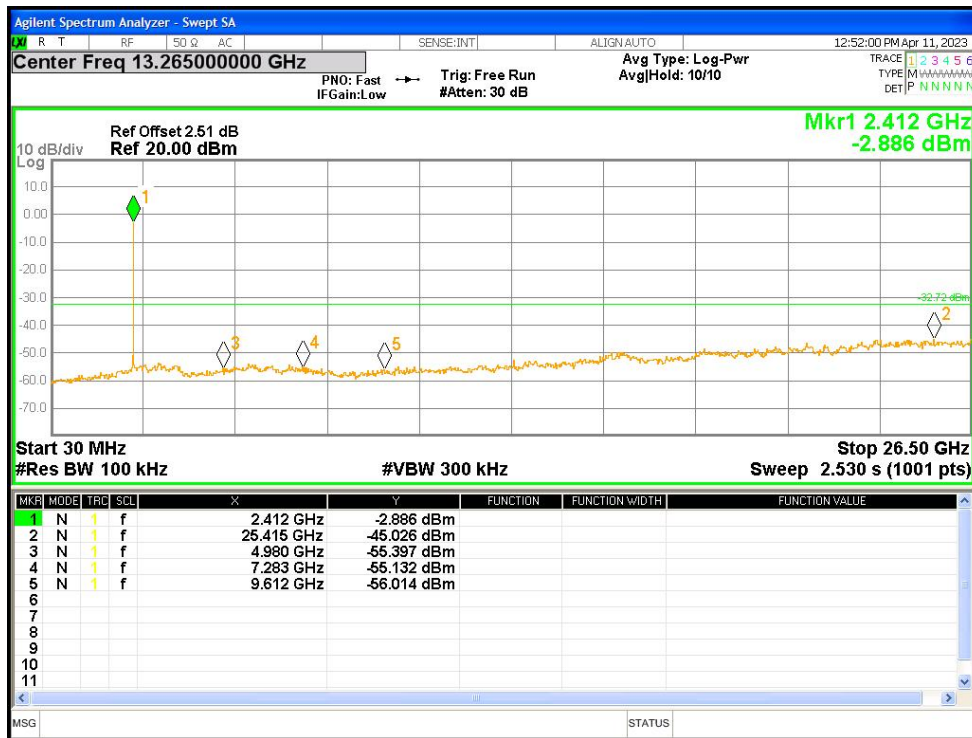


Tx. Spurious NVNT BLE 2440MHz Ant1 Ref

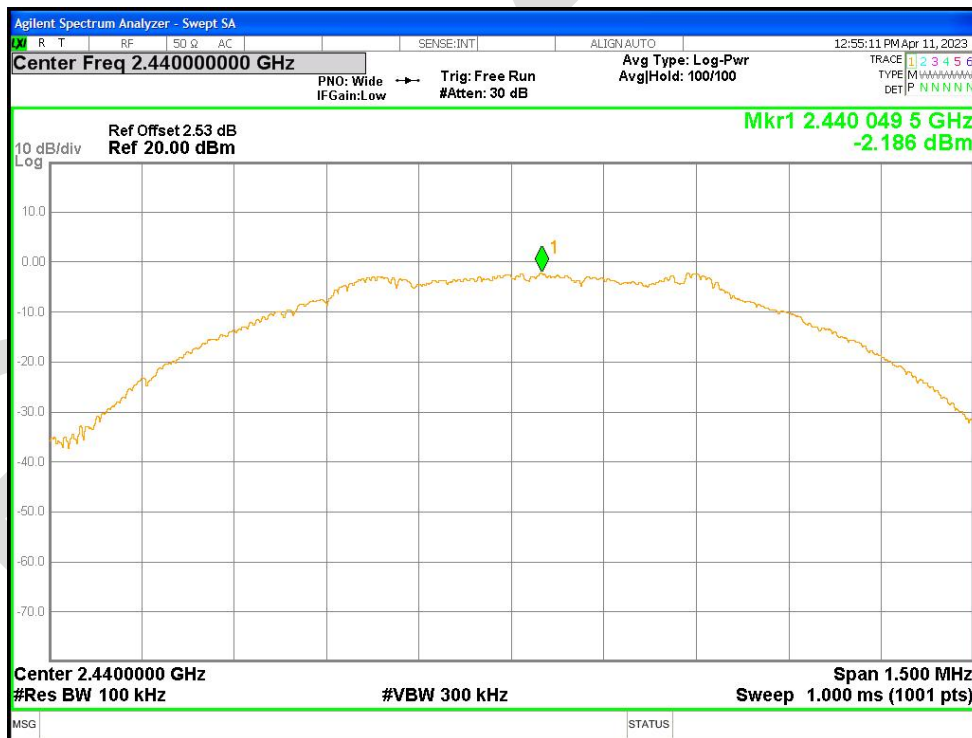


Tx. Spurious NVNT BLE 2440MHz Ant1 Emission

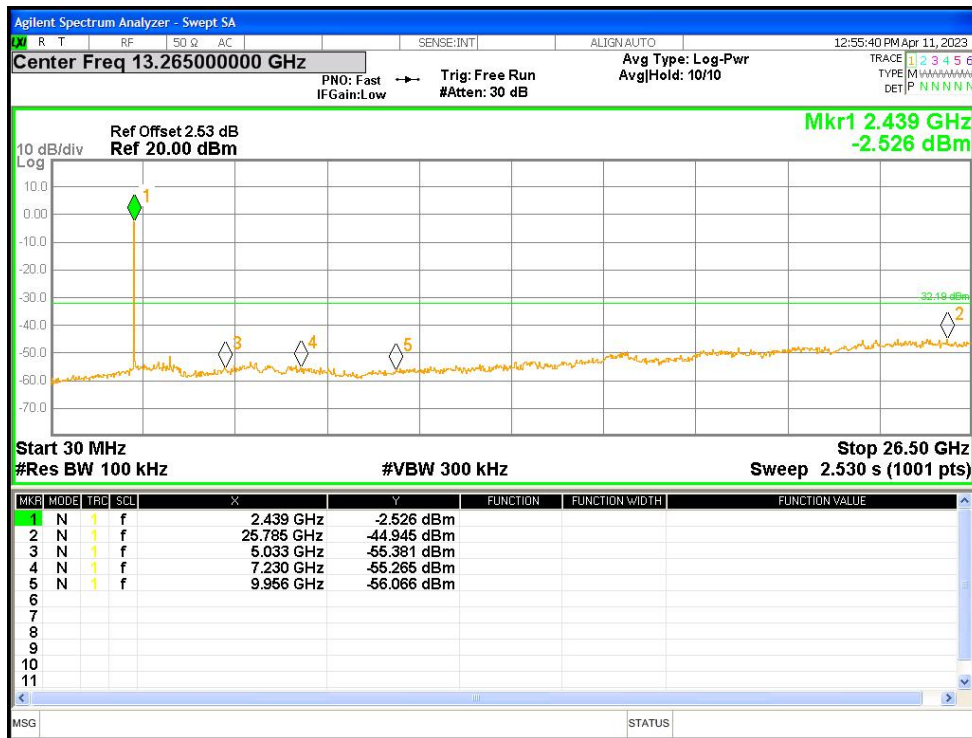

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref


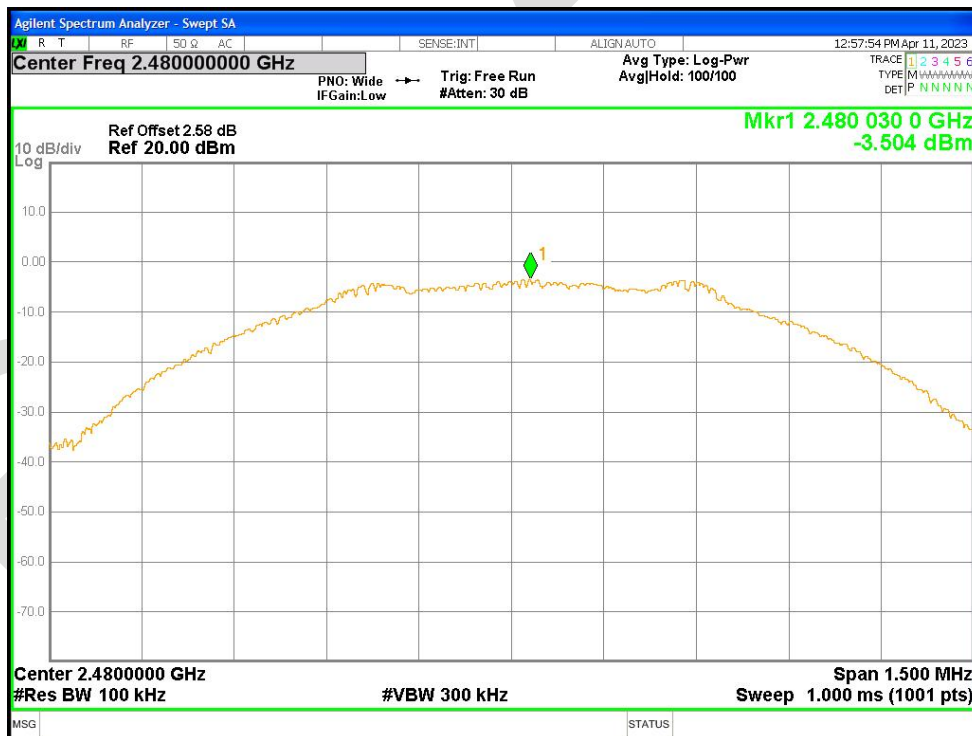


Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

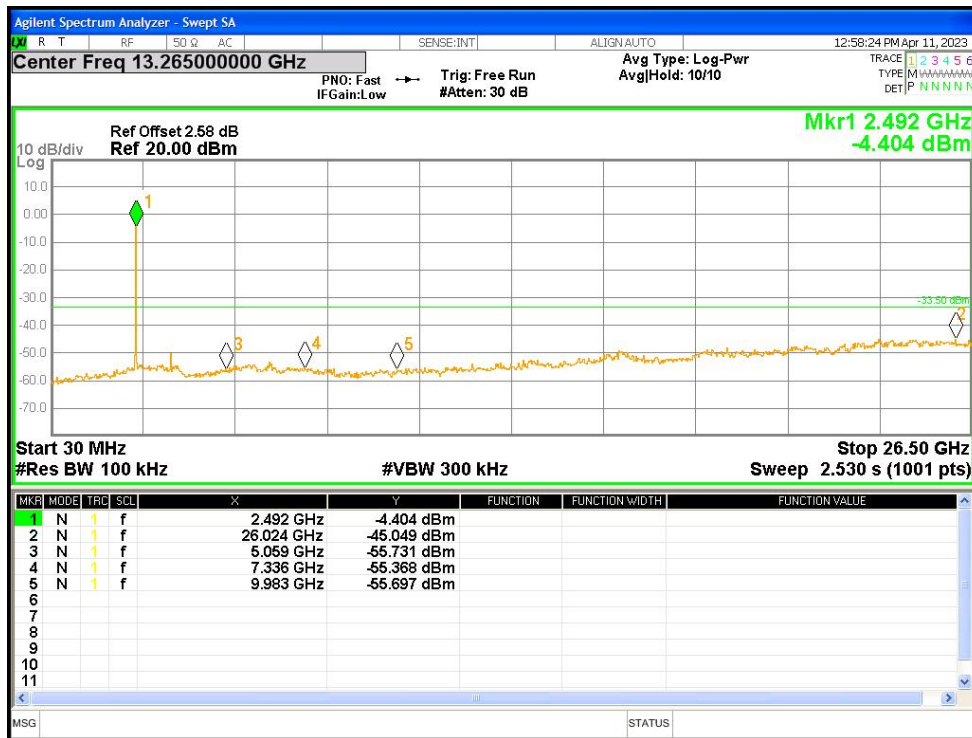

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

### Radiated Spurious Emissions

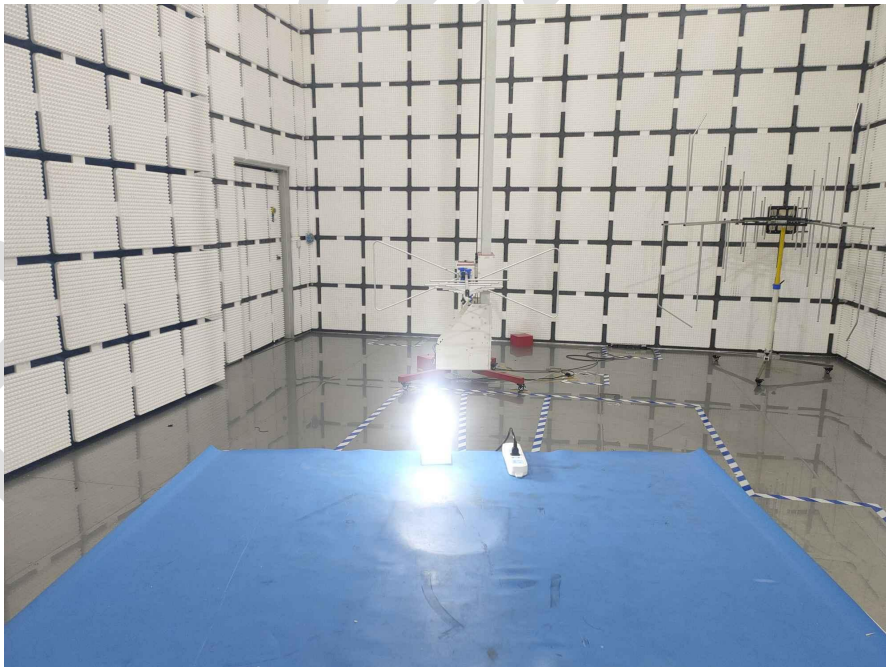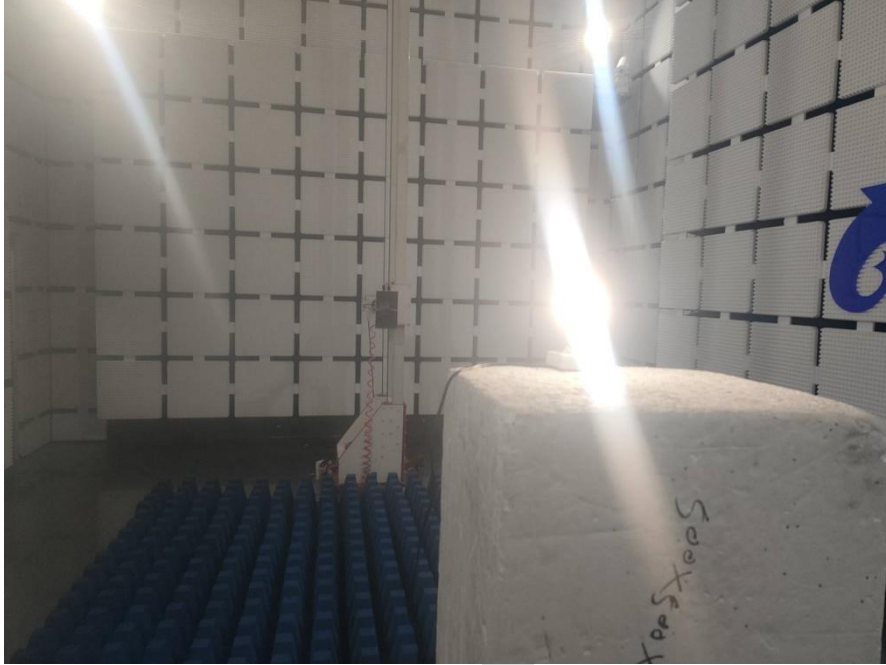

**Conducted Emissions at AC Power Line (150kHz-30MHz)**



BlueAsia

**APPENDIX B: PHOTOGRAPHS OF EUT**

Reference to the test report No. BLA-EMC-202304-A2701

**----END OF REPORT----**

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia