






Test Graphs:

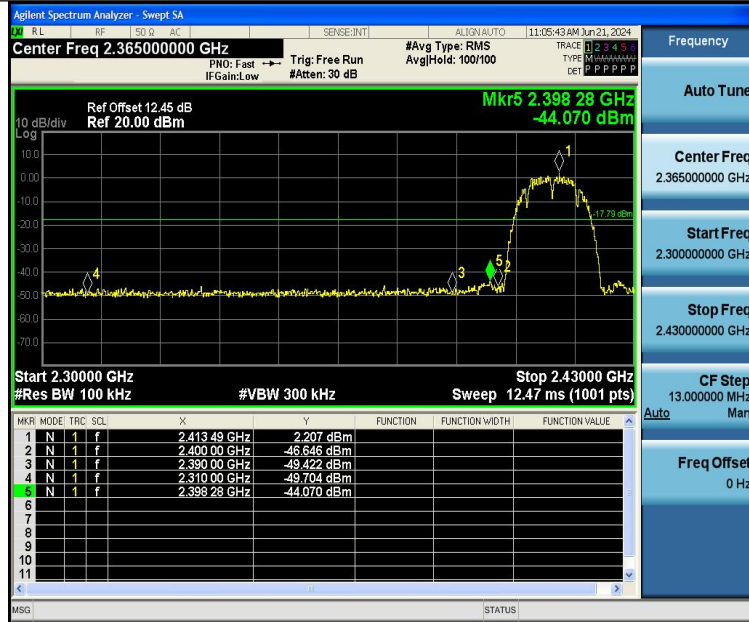


11B-Ant1-2412-PASS

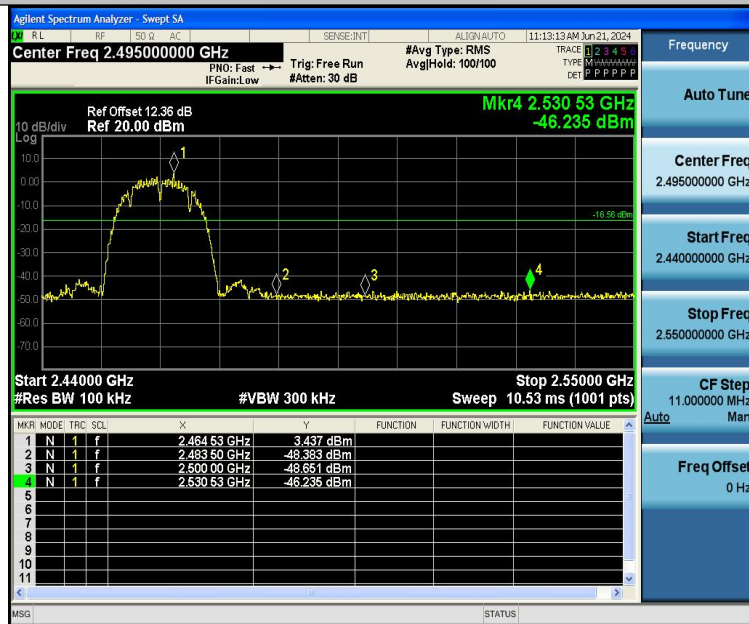

11B-Ant1-2462-PASS

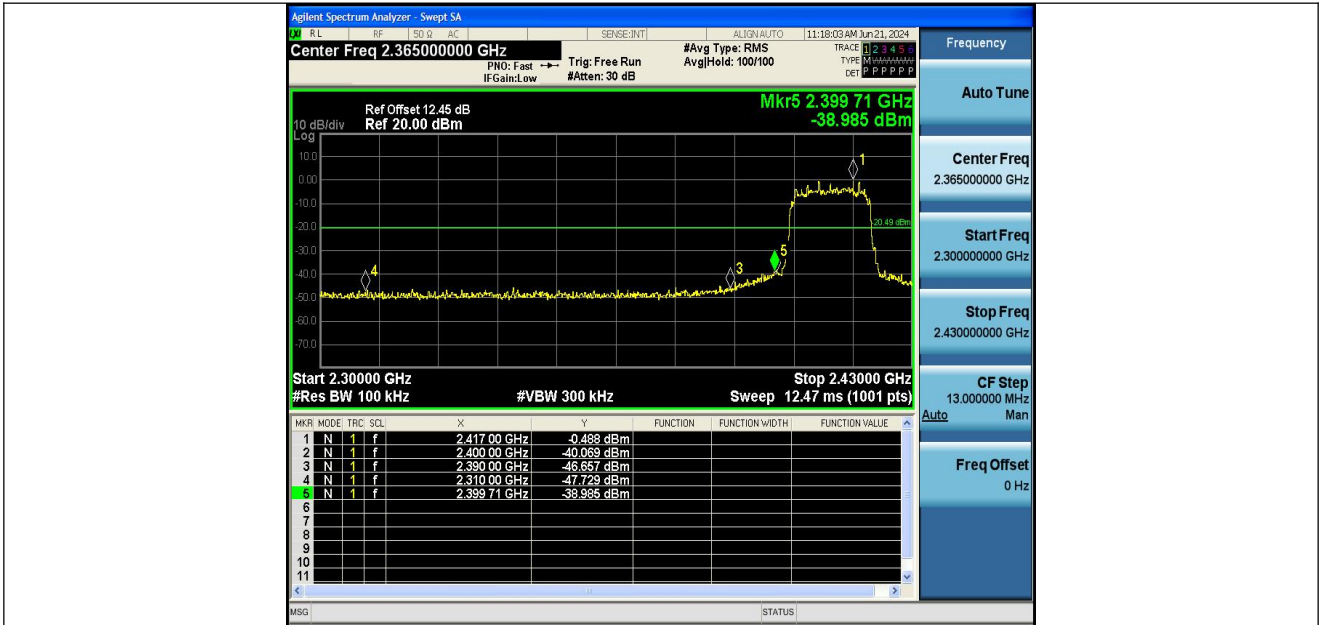


11G-Ant1-2412-PASS

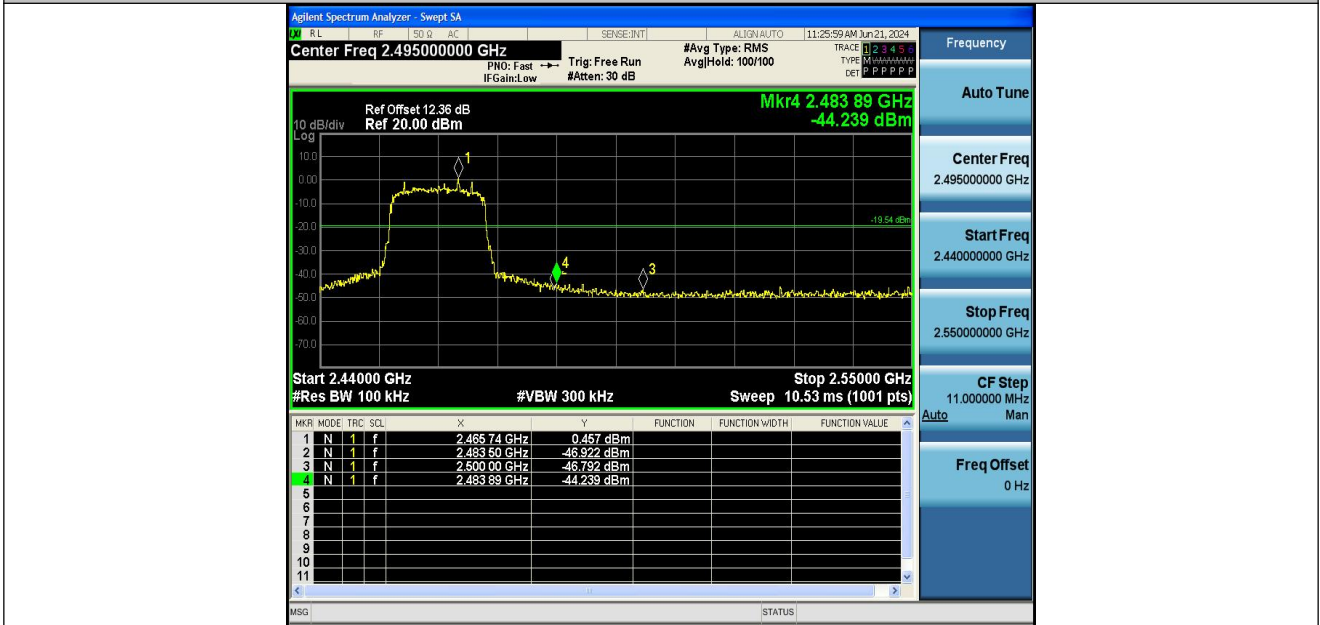

11G-Ant1-2462-PASS



11N20SISO-Ant1-2412-PASS

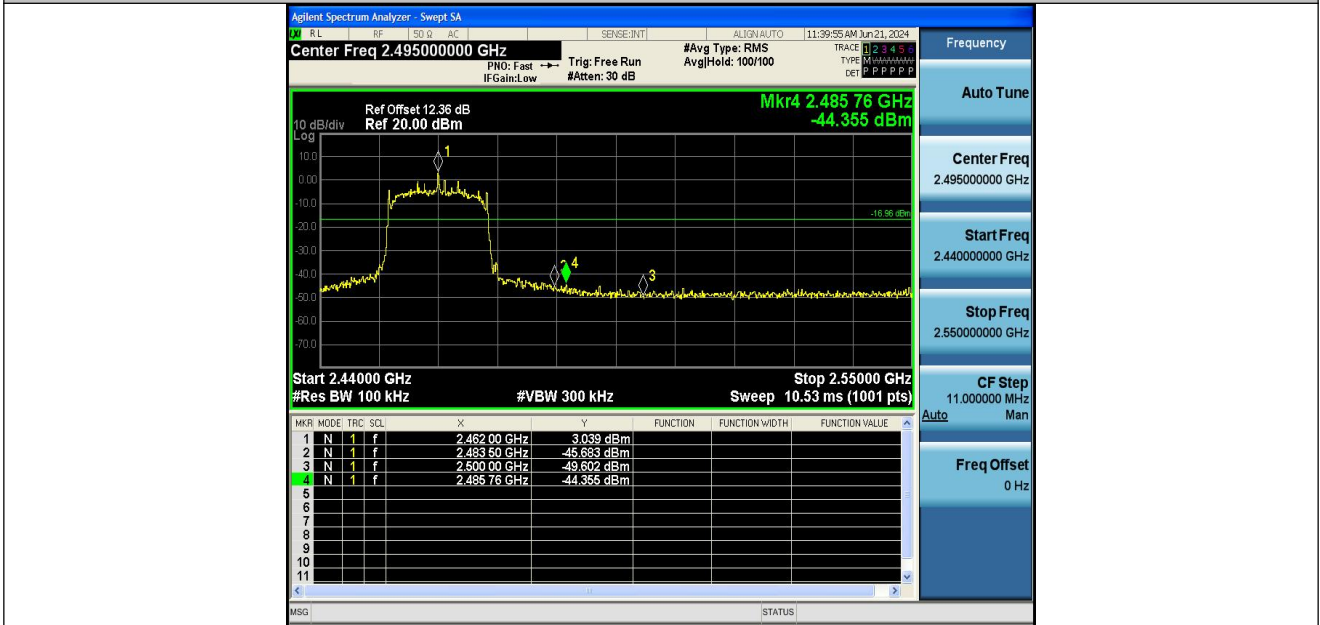

11N20SISO-Ant1-2462-PASS



9 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247


Test Method : ANSI C63.10:2013

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

9.2 Test Setup

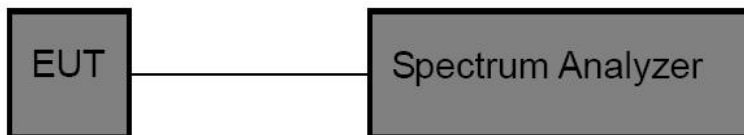


9.3 Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.080	2405.960	2418.040	0.5	PASS
11B	Ant1	2437	12.080	2430.920	2443.000	0.5	PASS
11B	Ant1	2462	10.080	2456.960	2467.040	0.5	PASS
11G	Ant1	2412	15.040	2404.520	2419.560	0.5	PASS
11G	Ant1	2437	14.160	2430.320	2444.480	0.5	PASS
11G	Ant1	2462	15.040	2454.440	2469.480	0.5	PASS
11N20SISO	Ant1	2412	13.800	2404.480	2418.280	0.5	PASS
11N20SISO	Ant1	2437	15.040	2429.480	2444.520	0.5	PASS
11N20SISO	Ant1	2462	16.560	2452.920	2469.480	0.5	PASS




Test Graphs:

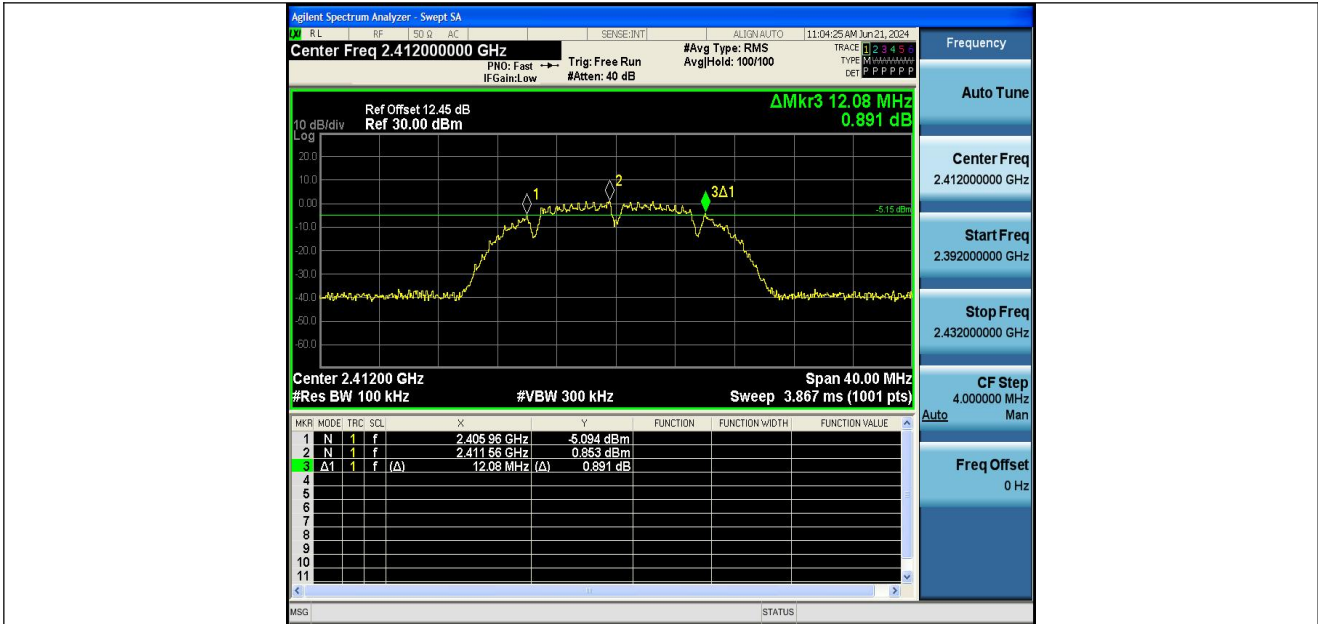


11B-Ant1-2412-PASS




11B-Ant1-2437-PASS

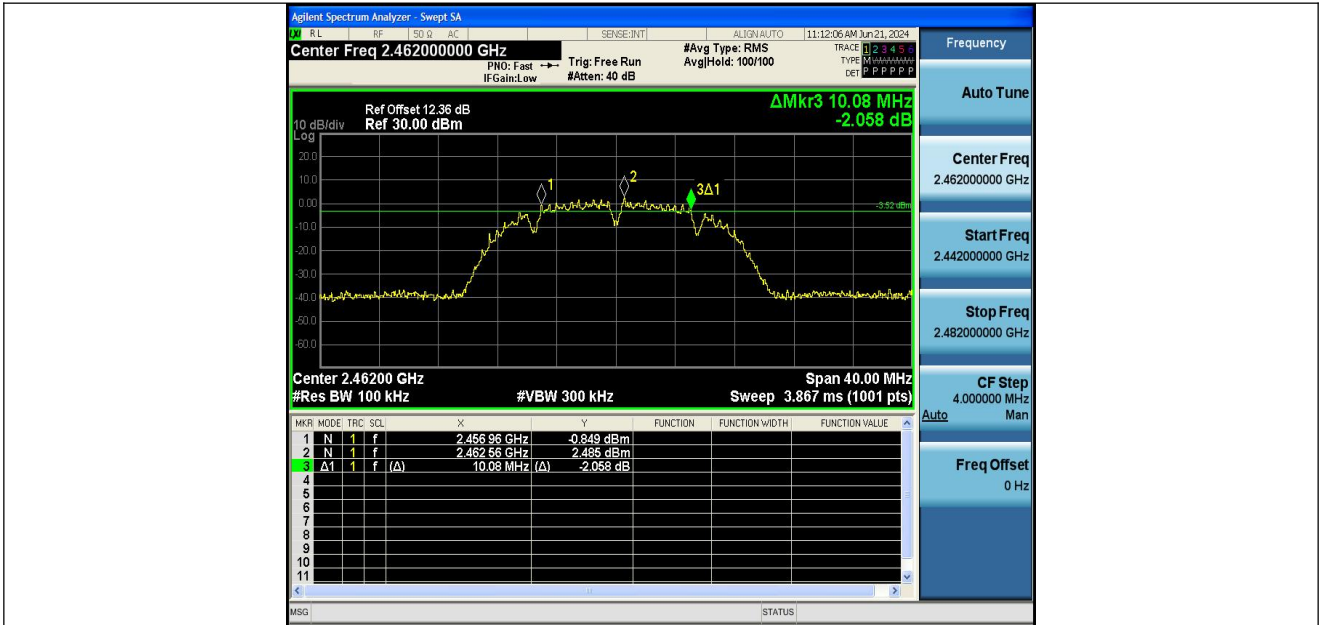


11B-Ant1-2462-PASS

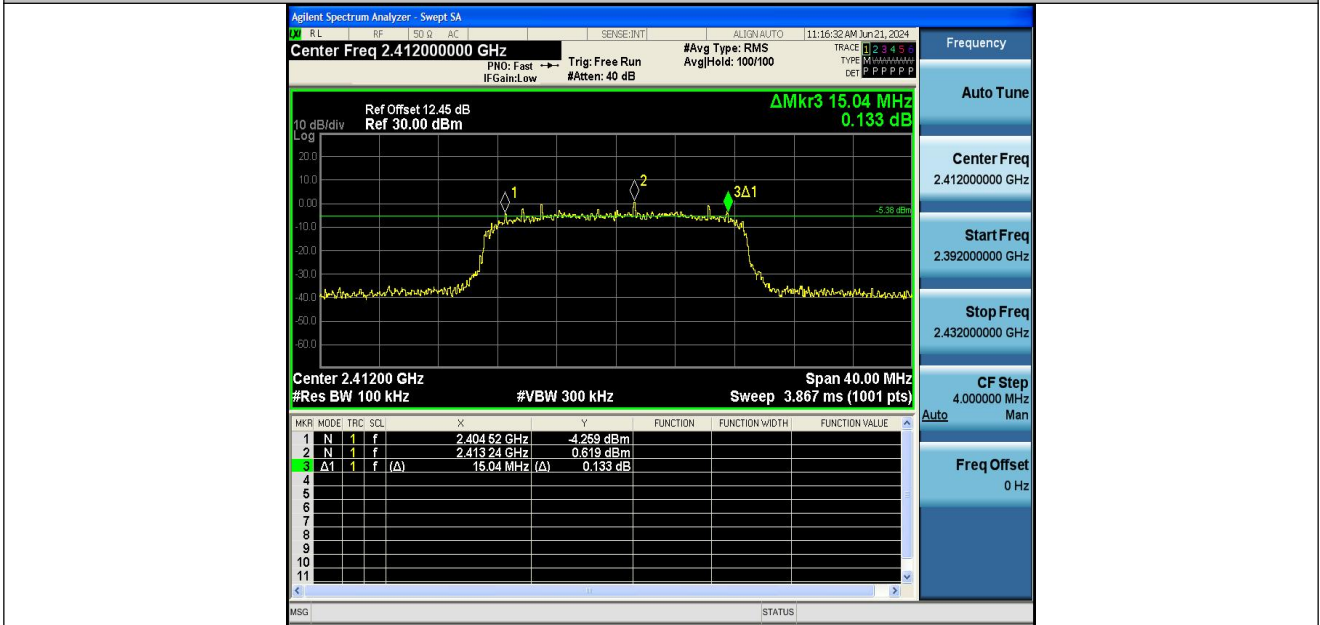


11G-Ant1-2412-PASS

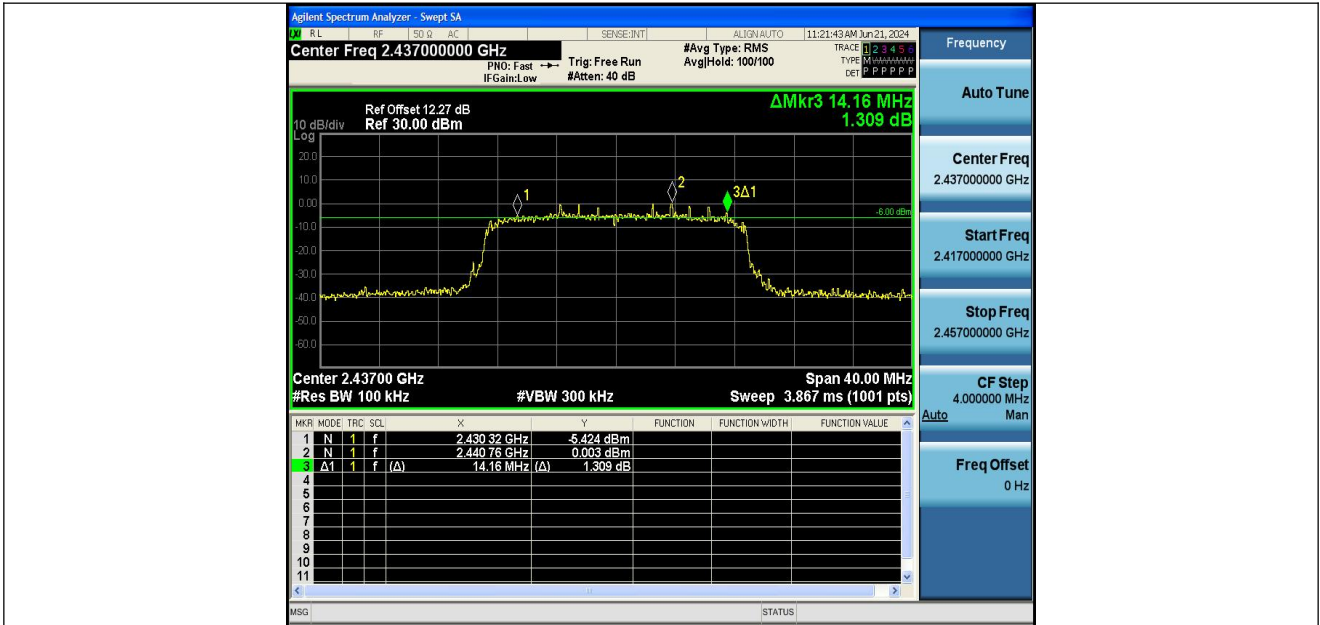


11G-Ant1-2437-PASS

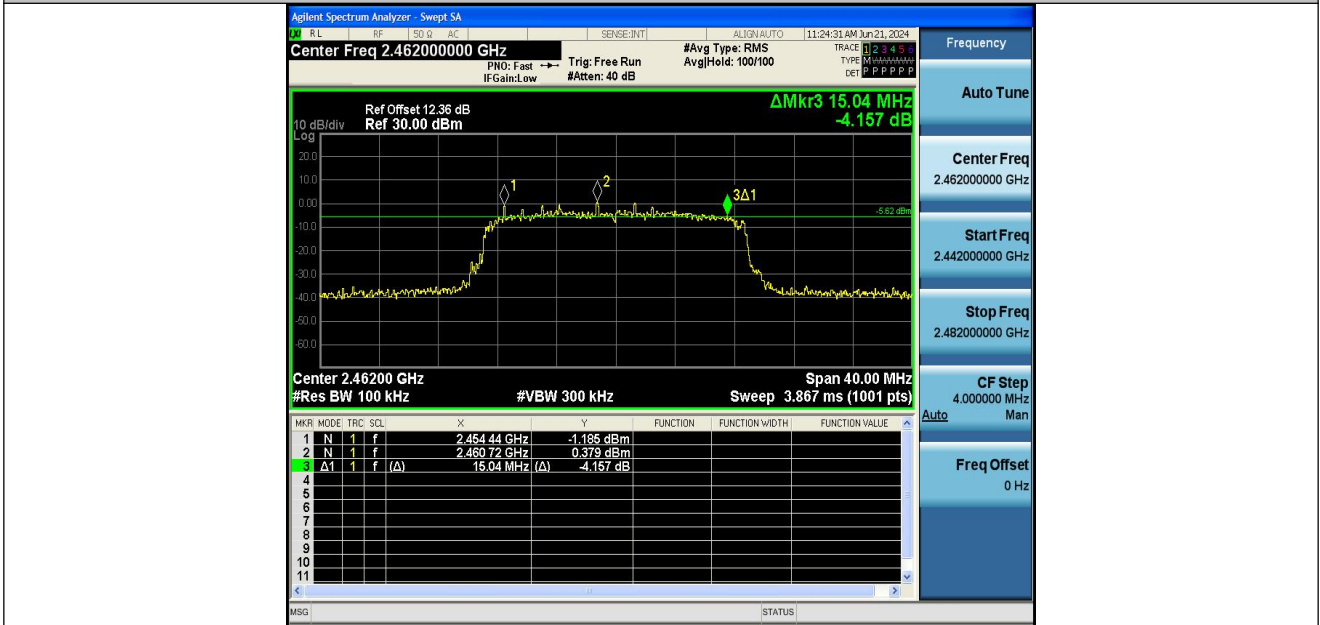


11G-Ant1-2462-PASS

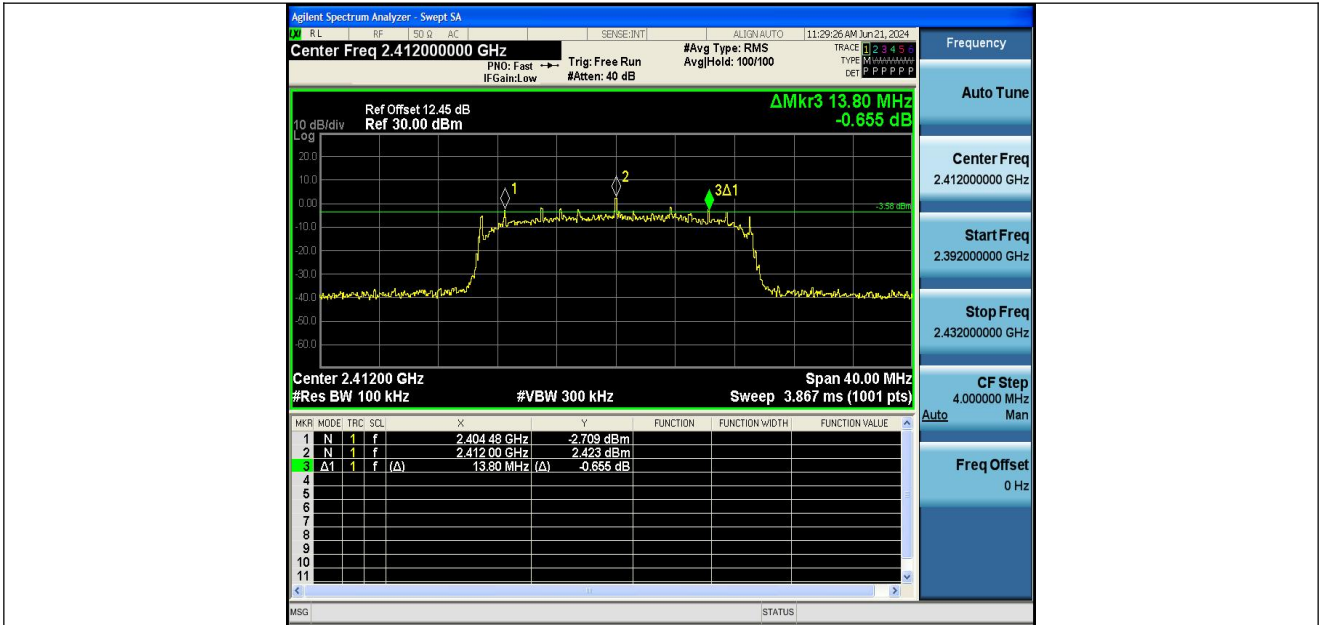

11N20SISO-Ant1-2412-PASS

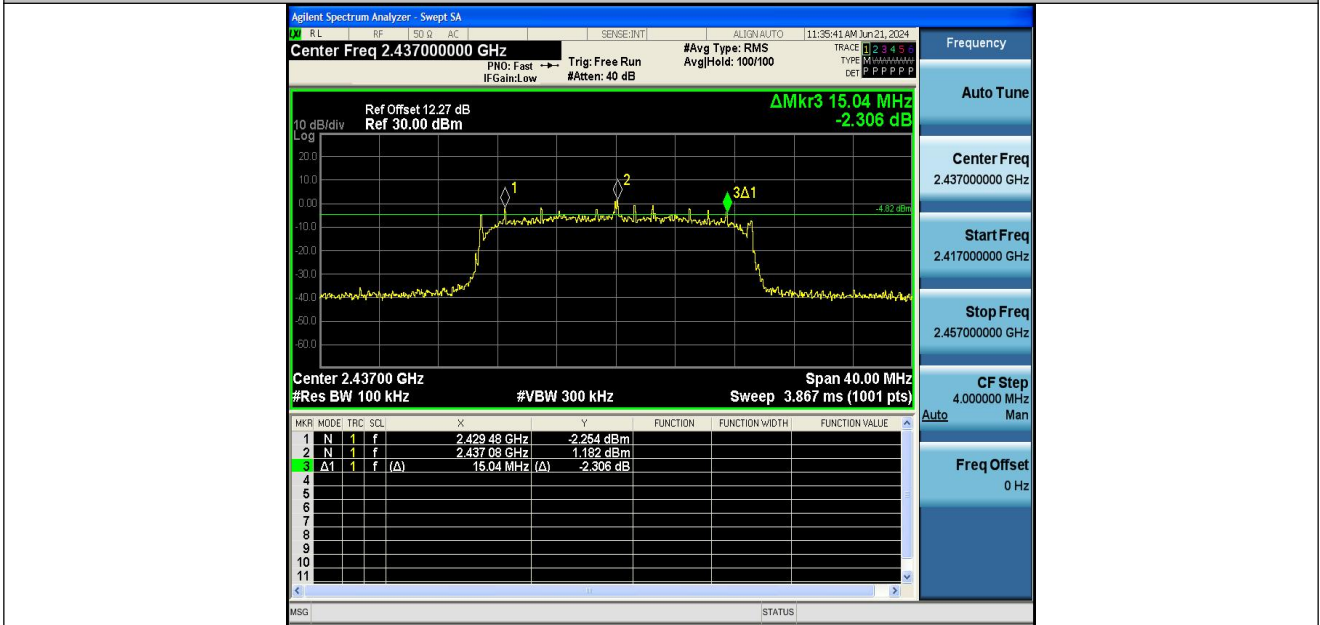

11N20SISO-Ant1-2437-PASS

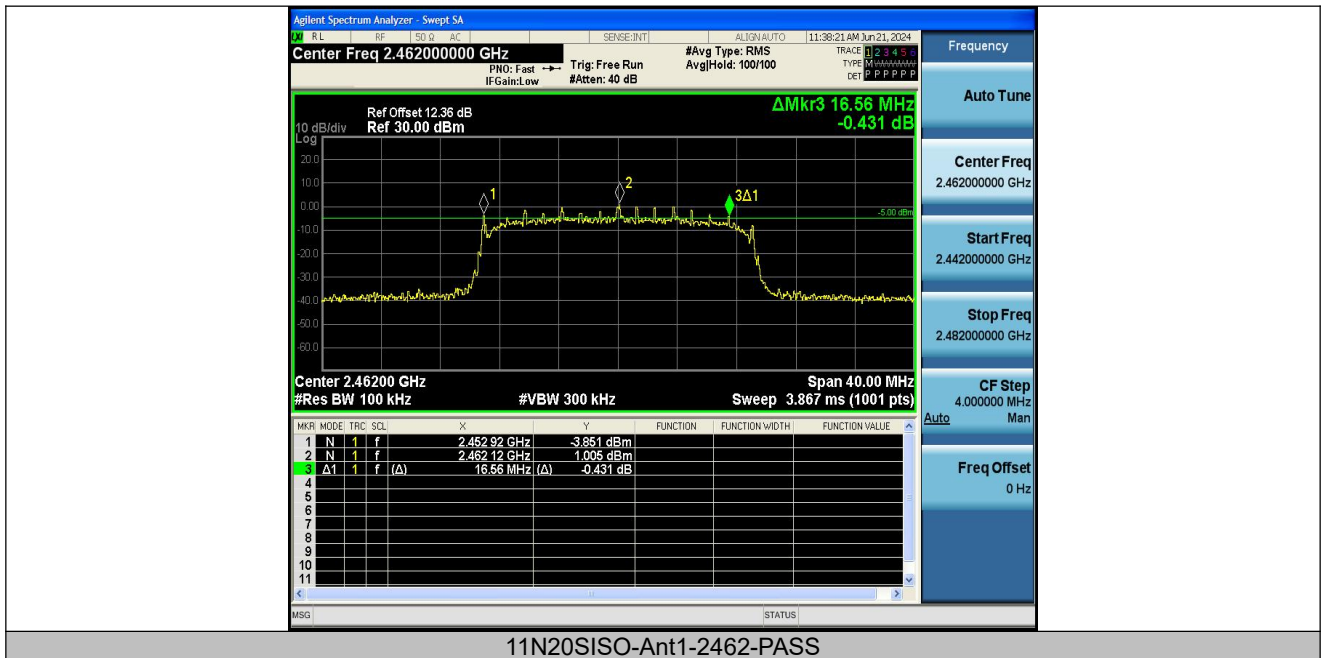

11N20SISO-Ant1-2462-PASS



10 Maximum conducted output power

Test Requirement : FCC CFR47 Part 15 Section 15.247


Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

10.1 Test Procedure

1. According to ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter method. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

10.2 Test Setup

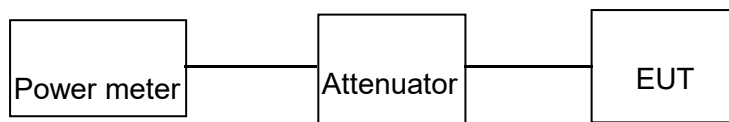

10.3 Test Result

TestMode	Antenna	Frequency[MHz]	Set Power	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	---	14.77	≤30.00	PASS
11B	Ant1	2437	---	14.68	≤30.00	PASS
11B	Ant1	2462	---	15.13	≤30.00	PASS
11G	Ant1	2412	---	17.05	≤30.00	PASS
11G	Ant1	2437	---	16.68	≤30.00	PASS
11G	Ant1	2462	---	17.80	≤30.00	PASS
11N20SISO	Ant1	2412	---	15.73	≤30.00	PASS
11N20SISO	Ant1	2437	---	15.93	≤30.00	PASS
11N20SISO	Ant1	2462	---	16.95	≤30.00	PASS




11 Power Spectral density

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.1 Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span = 1.5 times the DTS bandwidth
RBW = 3KHz, VBW = 10KHz
Sweep time = auto couple
Detector = peak
Trace mode =max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW(no less than 3KHz) and repeat.

11.2 Test Setup

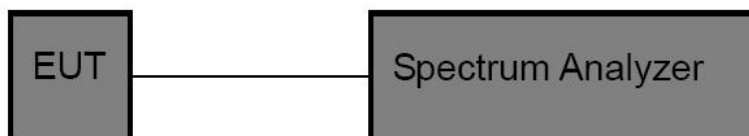


11.3 Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-12.56	≤8.00	PASS
11B	Ant1	2437	-13.24	≤8.00	PASS
11B	Ant1	2462	-12.44	≤8.00	PASS
11G	Ant1	2412	-14.12	≤8.00	PASS
11G	Ant1	2437	-14.31	≤8.00	PASS
11G	Ant1	2462	-13.87	≤8.00	PASS
11N20SISO	Ant1	2412	-15.27	≤8.00	PASS
11N20SISO	Ant1	2437	-15.37	≤8.00	PASS
11N20SISO	Ant1	2462	-14.97	≤8.00	PASS




Test Graphs:

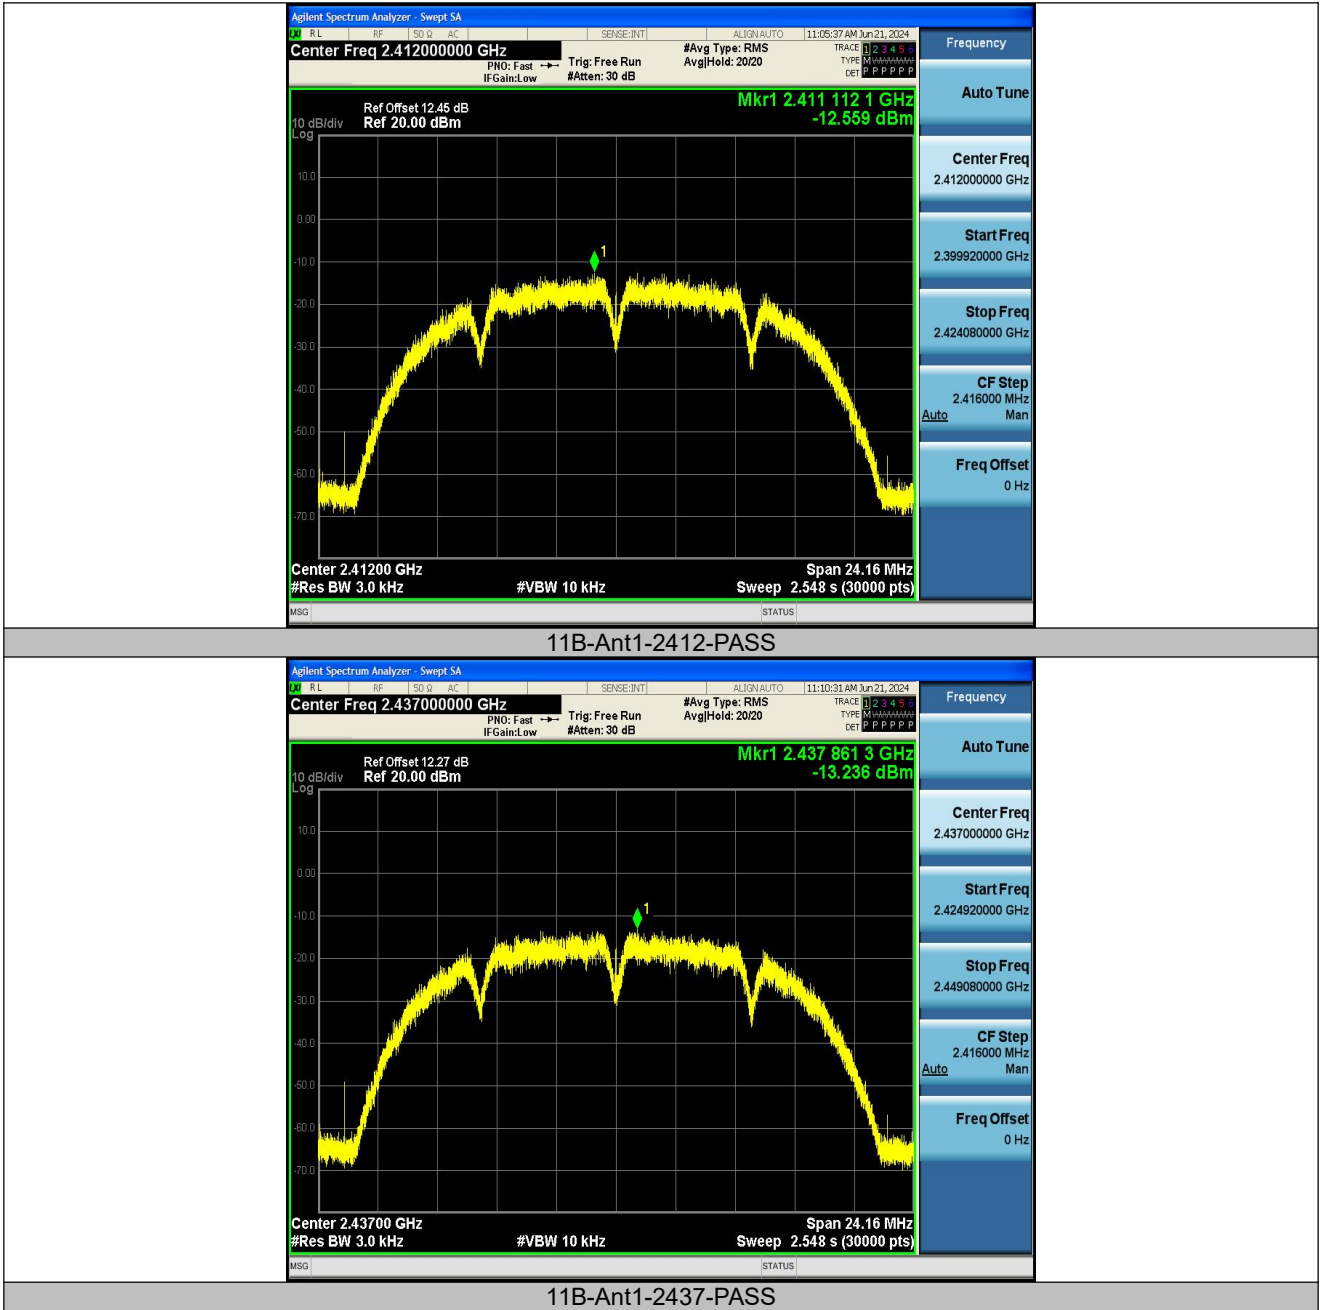




11B-Ant1-2462-PASS

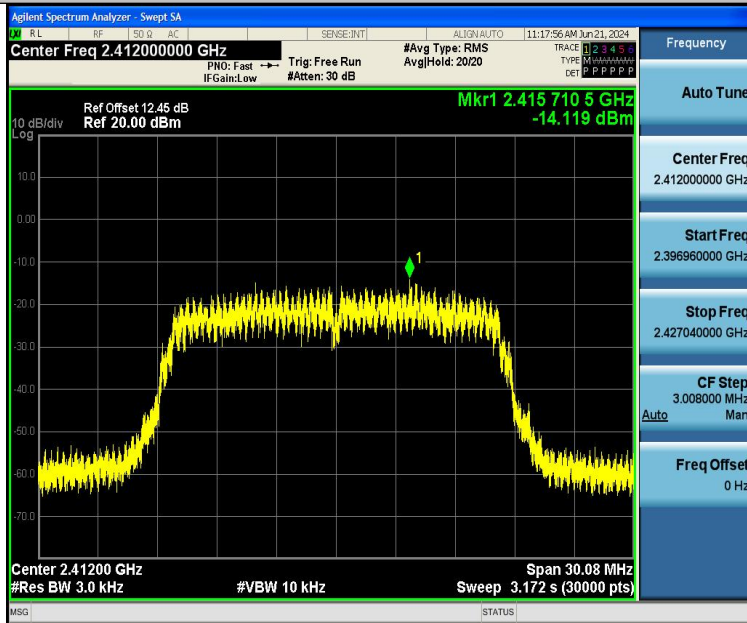


11G-Ant1-2412-PASS




11G-Ant1-2437-PASS

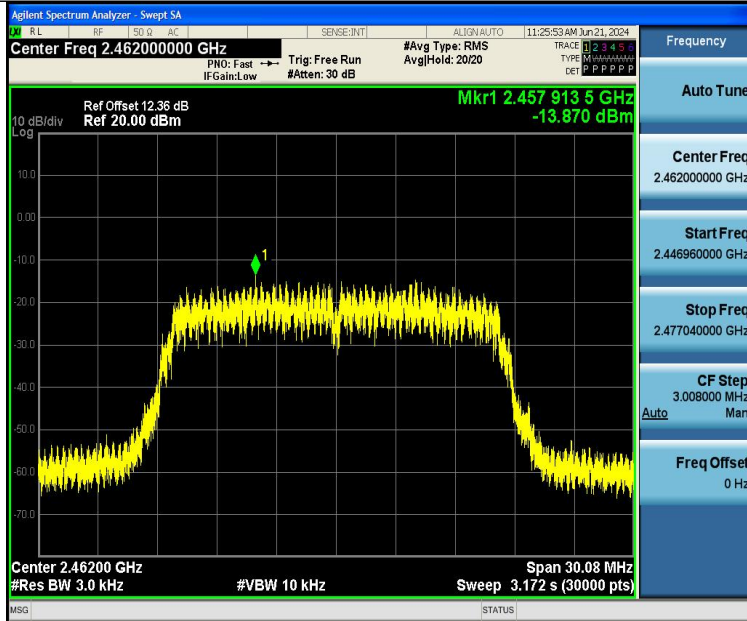


11G-Ant1-2462-PASS

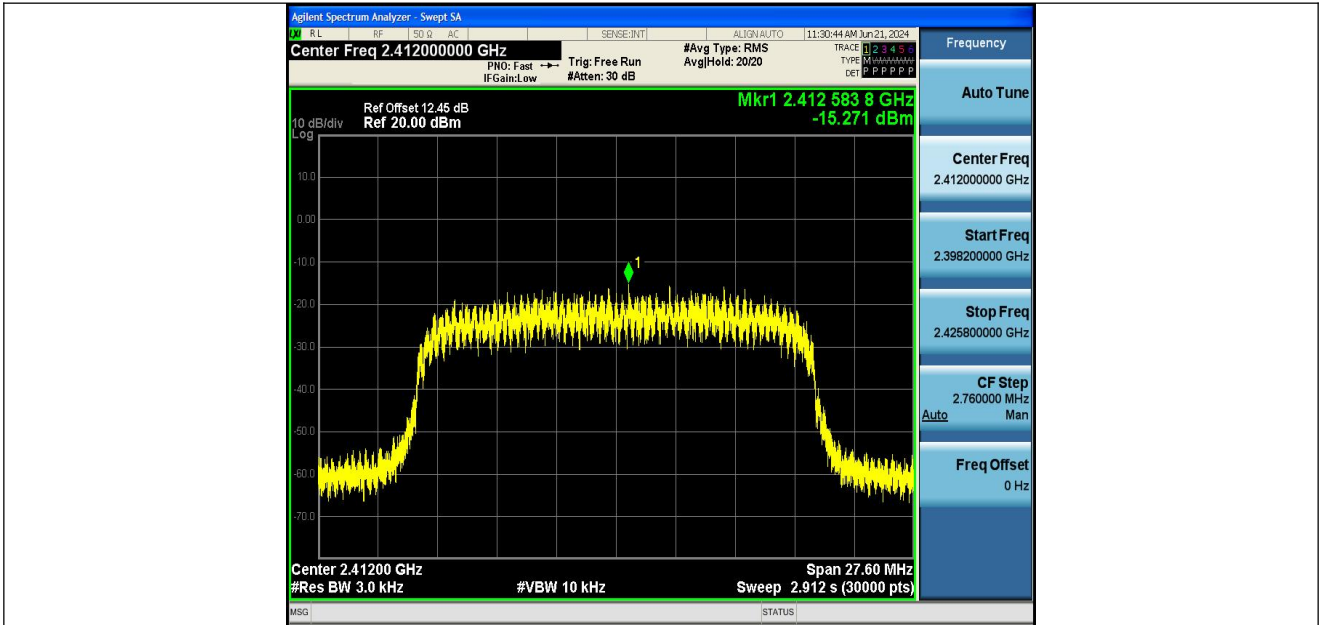

11N20SISO-Ant1-2412-PASS

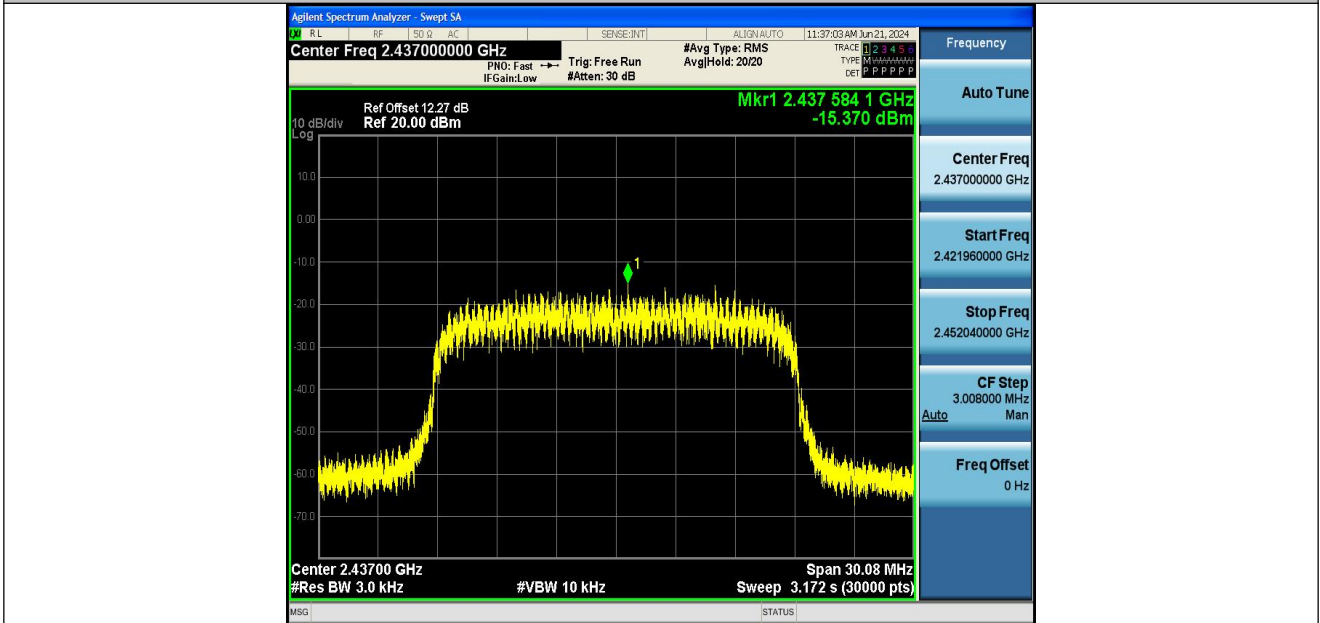

11N20SISO-Ant1-2437-PASS

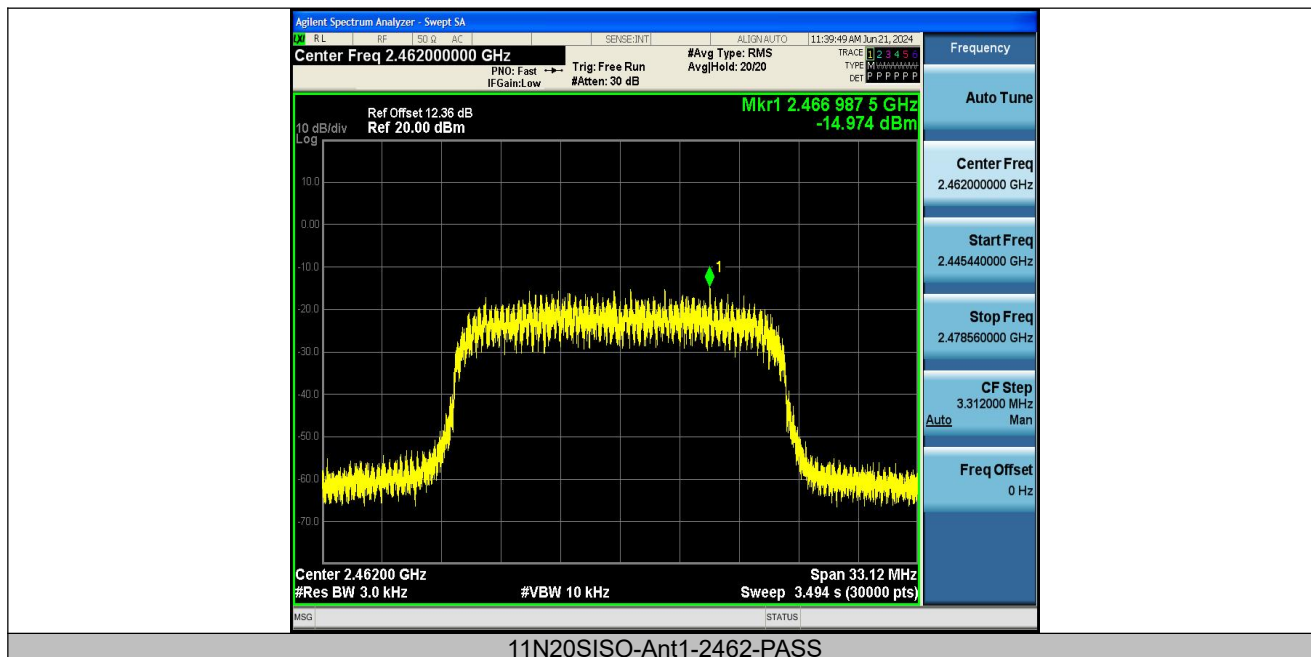



12 Antenna Application

12.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result

The EUT'S antenna, permanent attached antenna, is PCB Antenna. The antenna's gain is -0.24 dBi and meets the requirement.

13 Test Setup

Conducted Emissions



Radiated Spurious Emissions
From 30MHz-1000MHz





Test frequency from Above 1GHz



14 EUT PHOTOS

