




11N40MIMO_Ant1_5755

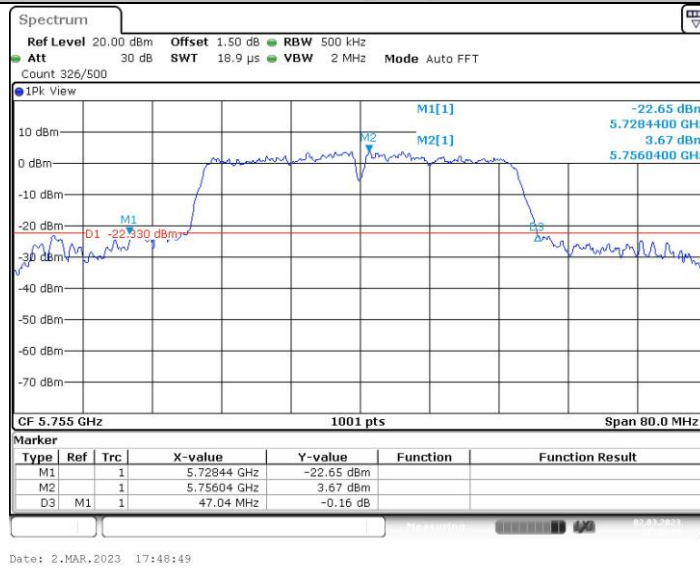


11N40MIMO_Ant2_5755

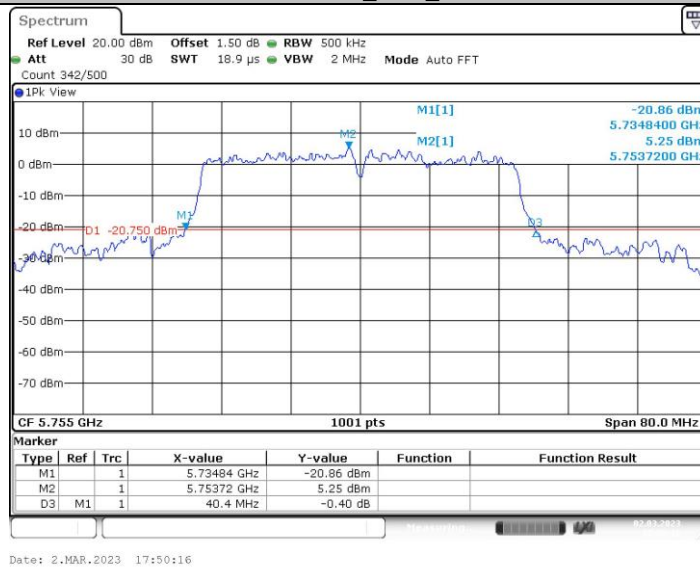

11N40MIMO_Ant1_5795




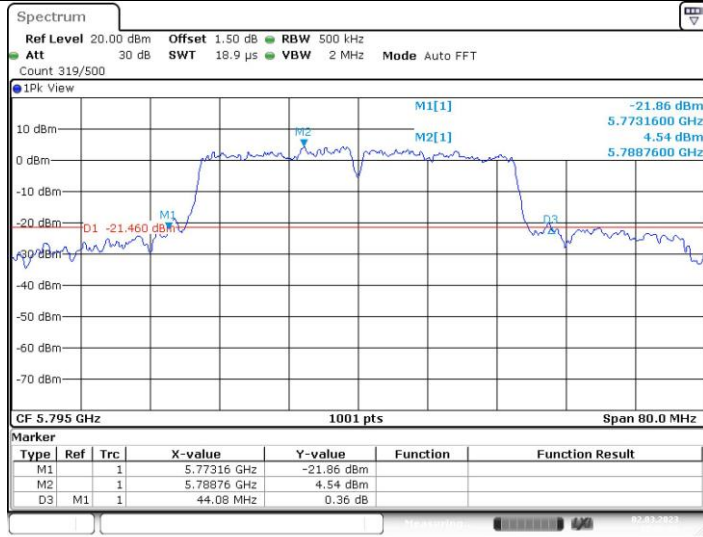



11N40MIMO_Ant2_5795

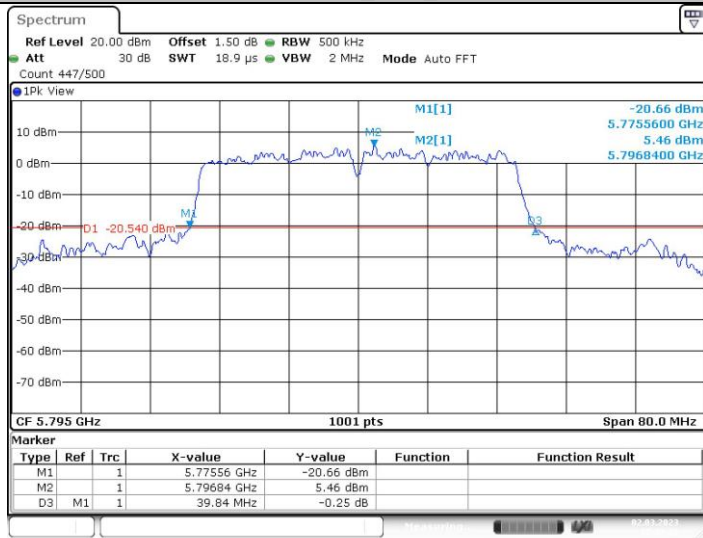




6dB Bandwidth Test

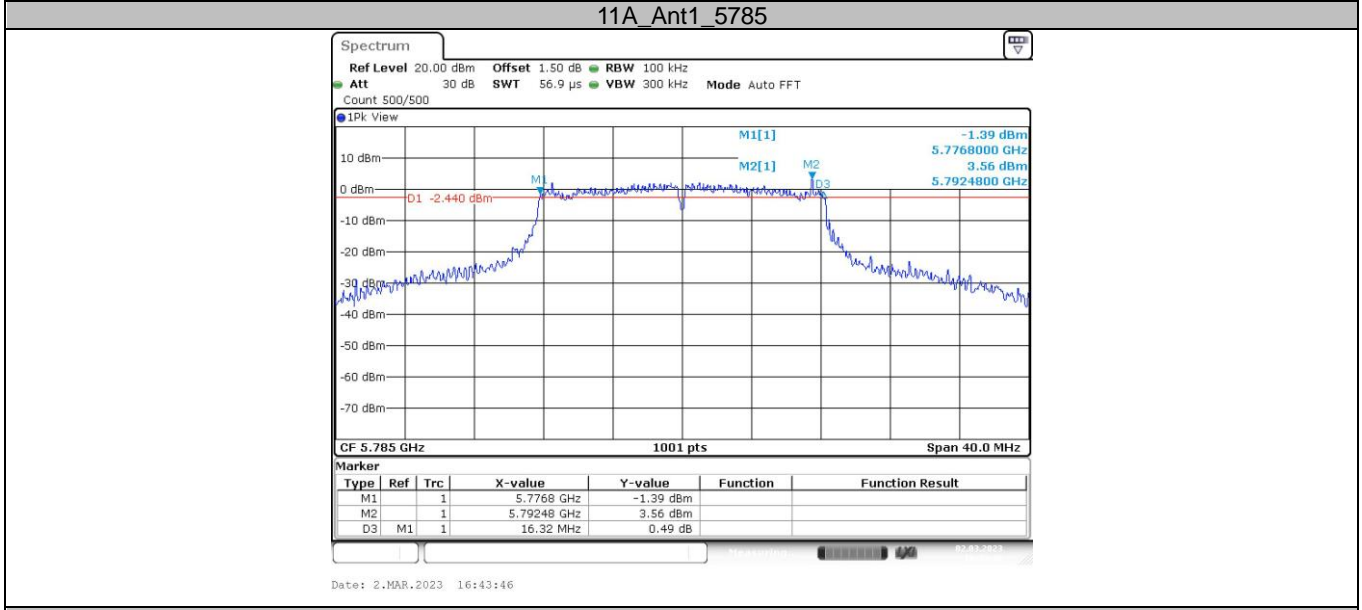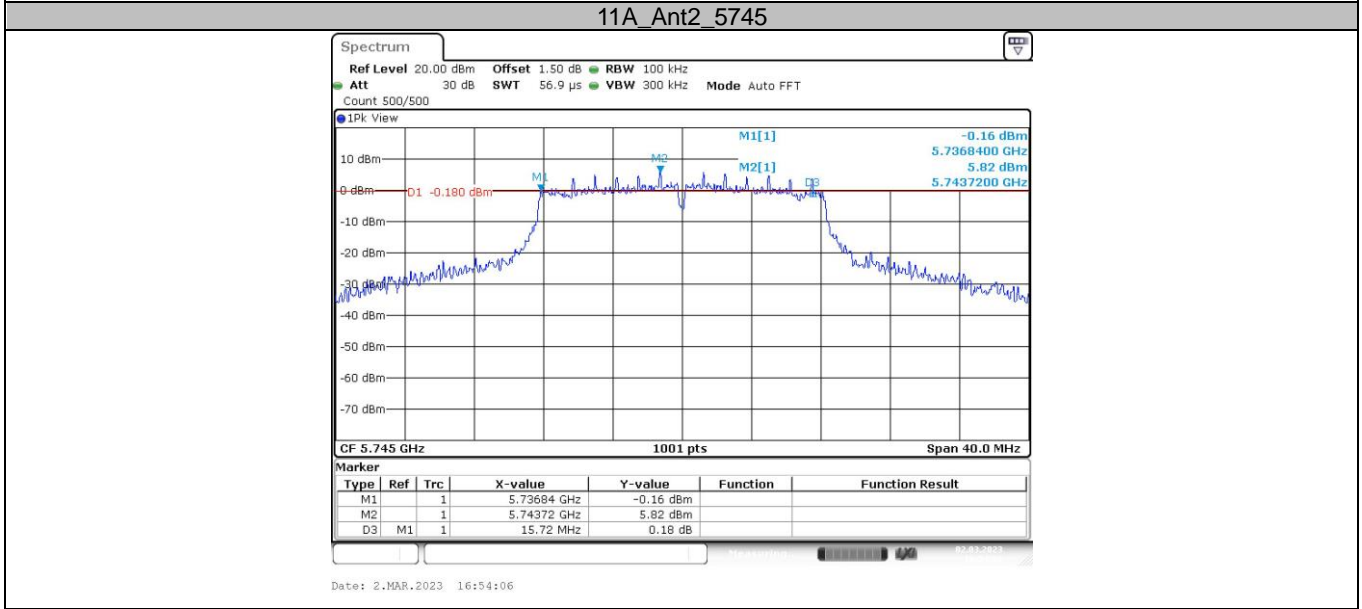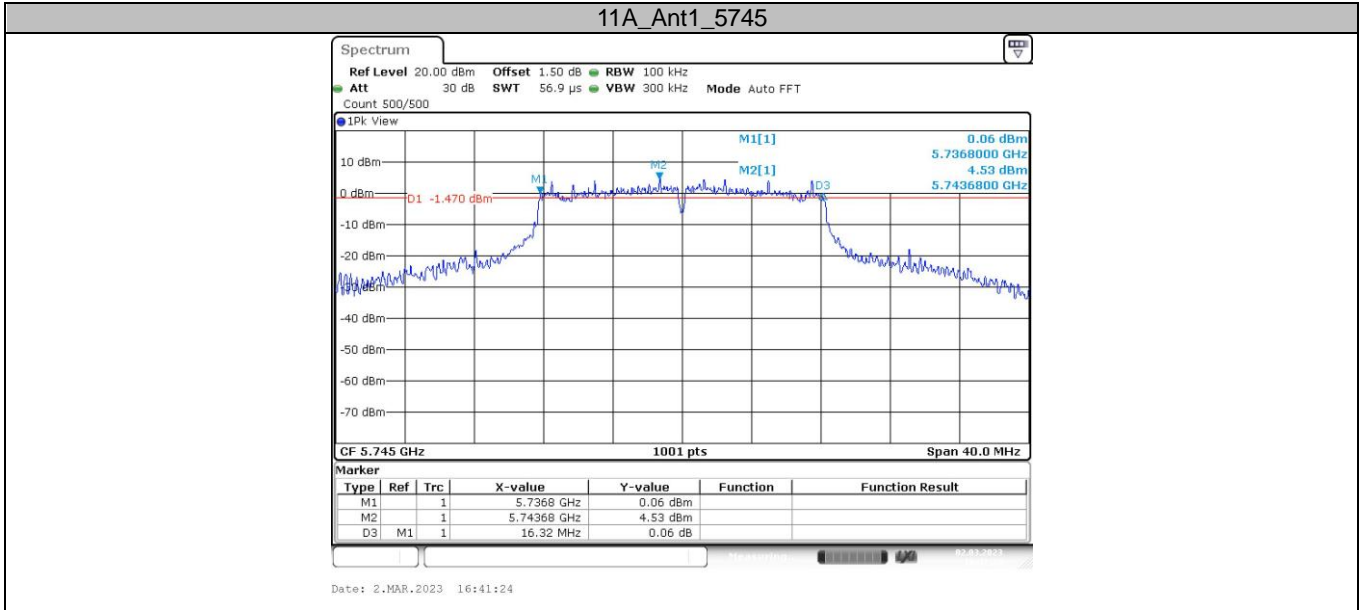


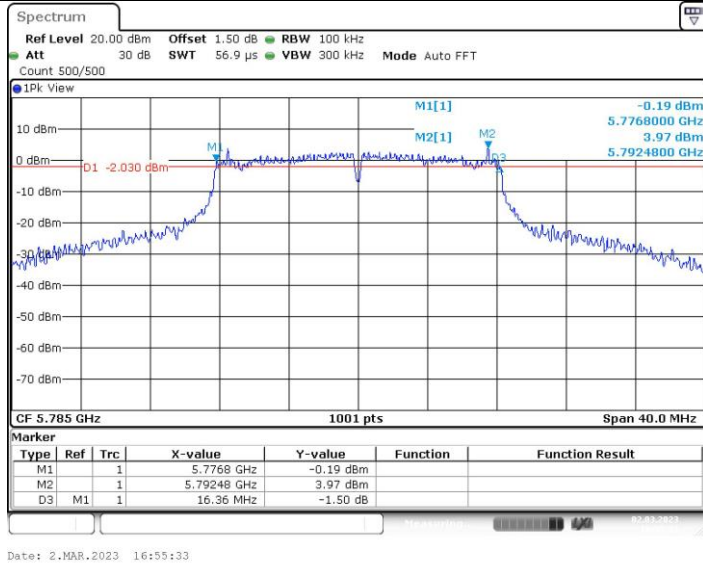


11A_Ant1_5825

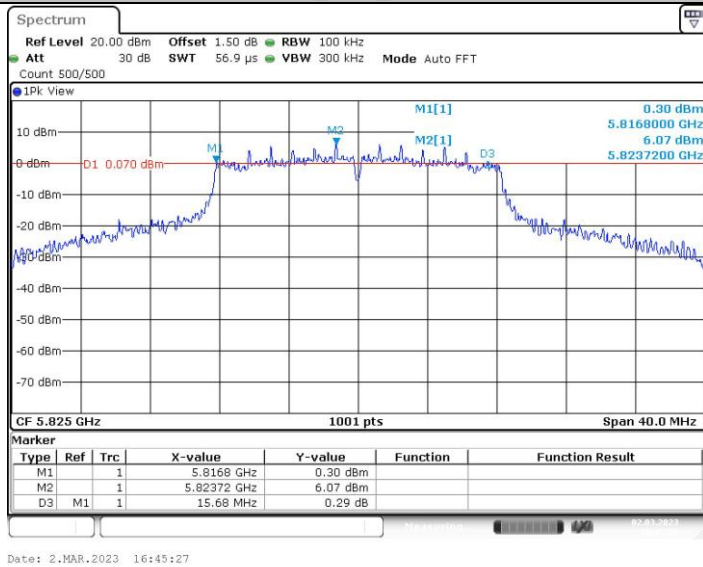

11A_Ant2_5825

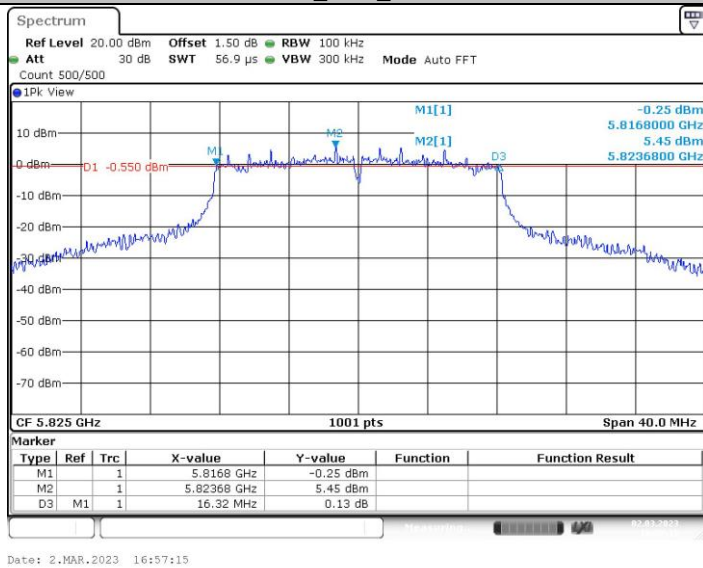


11N20MIMO_Ant1_5745

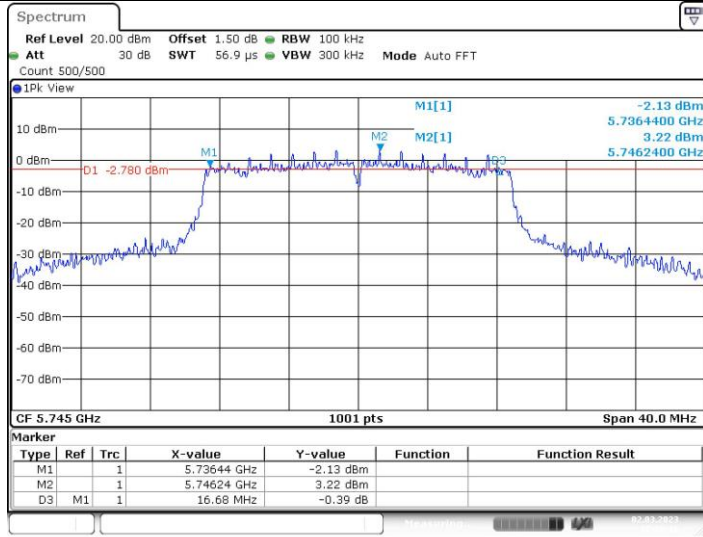


Date: 2.MAR.2023 17:30:18

11N20MIMO_Ant2_5745

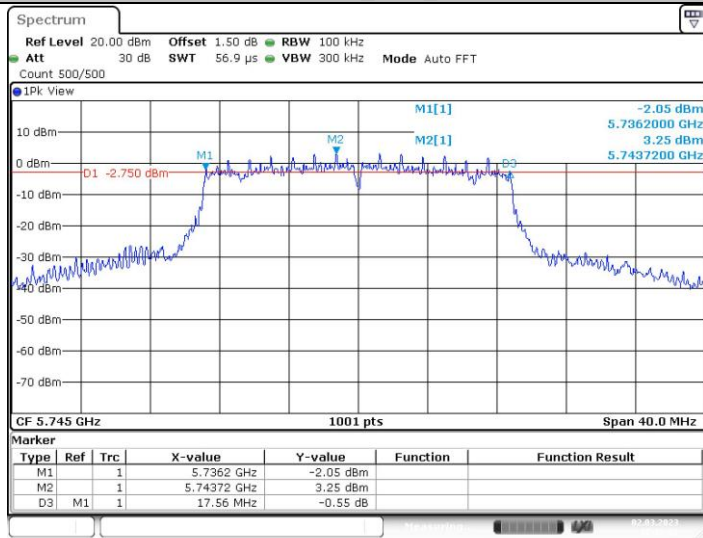


Date: 2.MAR.2023 17:32:02

11N20MIMO_Ant1_5785

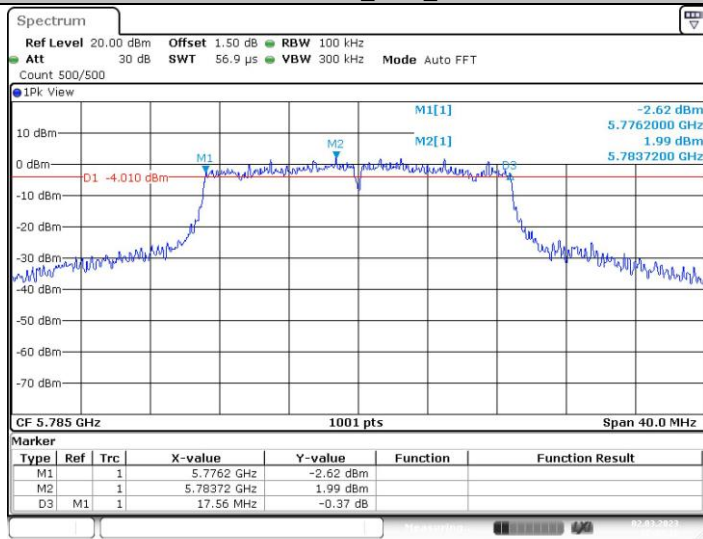


Date: 2.MAR.2023 17:34:16


11N20MIMO_Ant2_5785

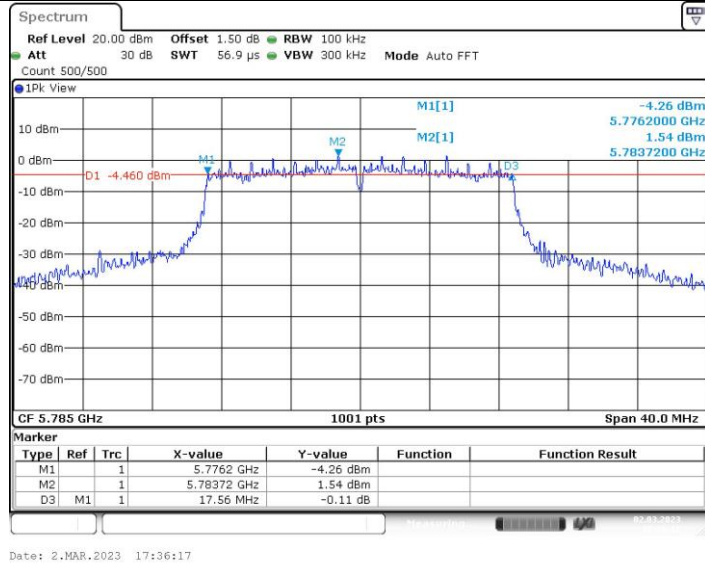


11N20MIMO_Ant1_5825

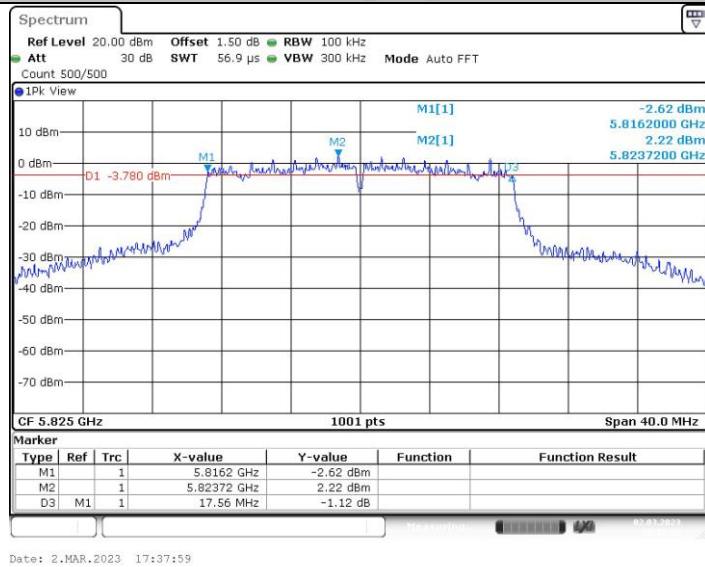

11N20MIMO_Ant2_5825

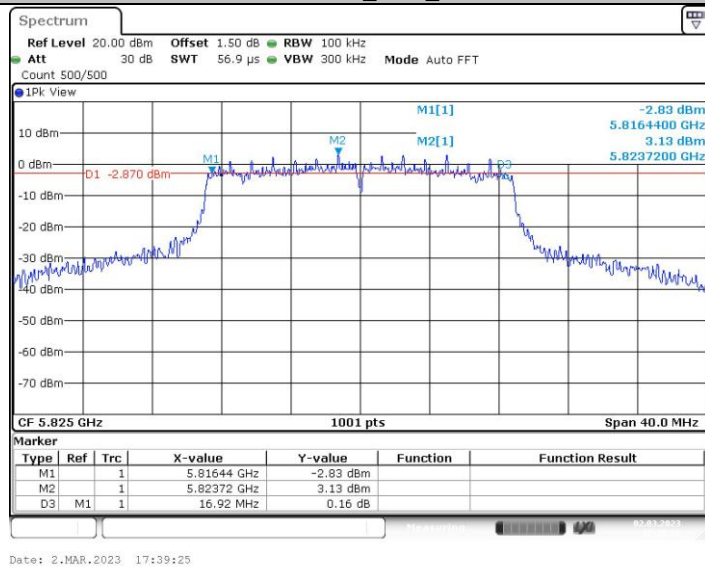


11N40MIMO_Ant1_5755

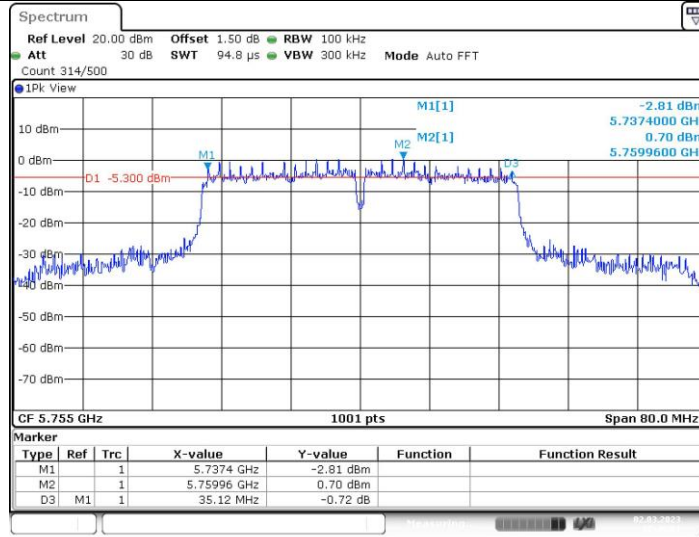


Date: 2.MAR.2023 17:49:01

11N40MIMO_Ant2_5755

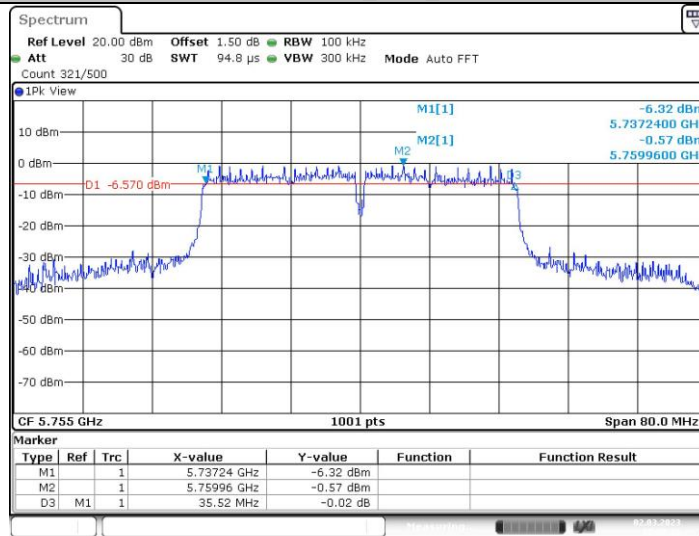

Date: 2.MAR.2023 17:50:28


11N40MIMO_Ant1_5795

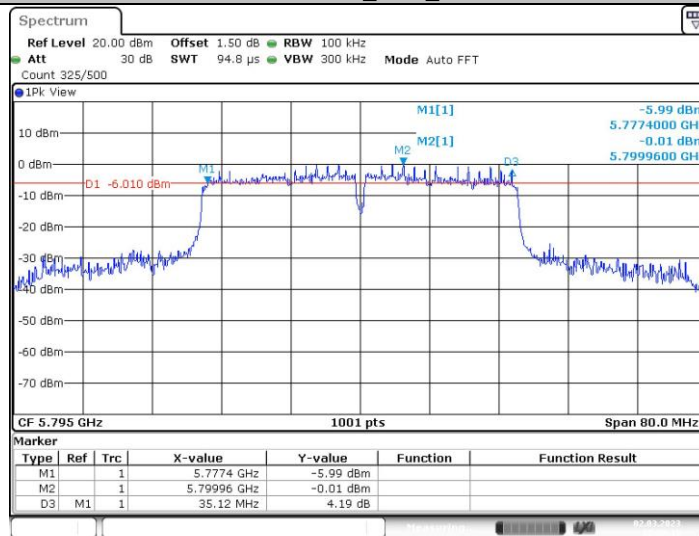





Date: 2.MAR.2023 17:52:15


11N40MIMO_Ant2_5795



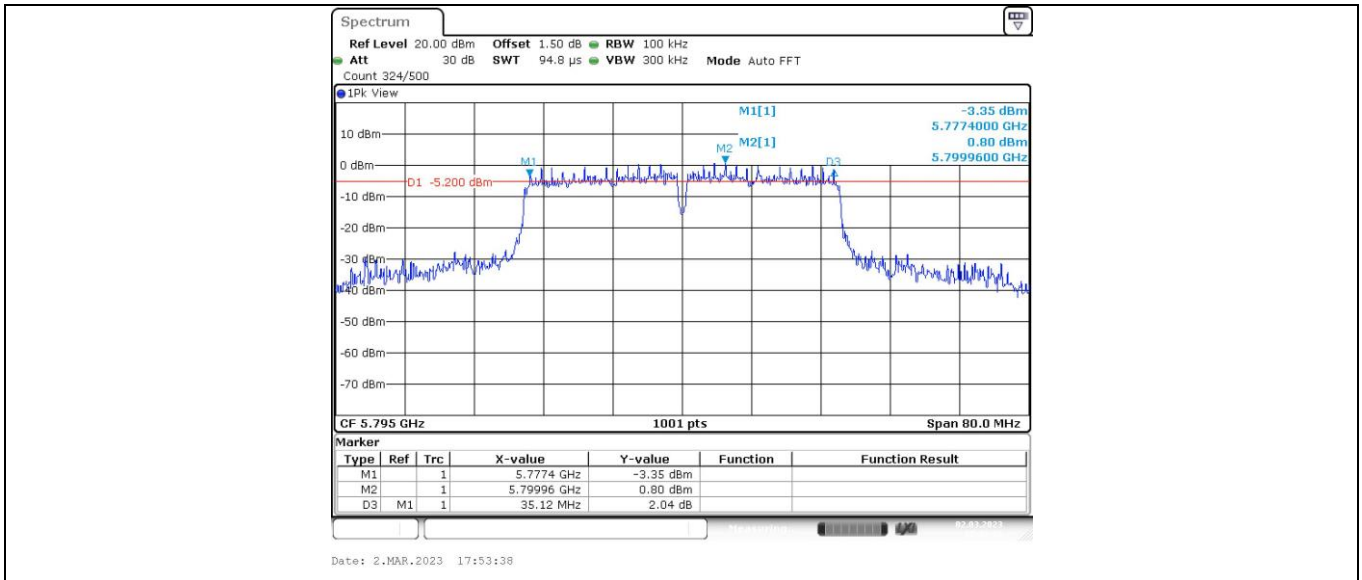


99% Occupied Bandwidth Test

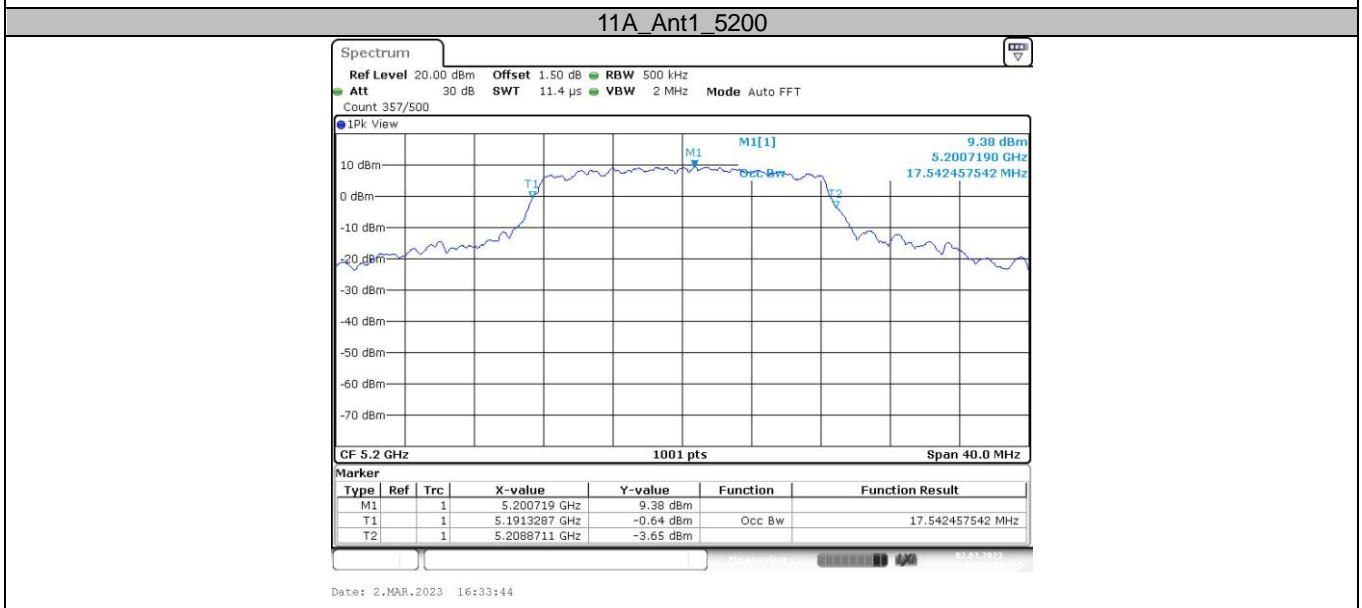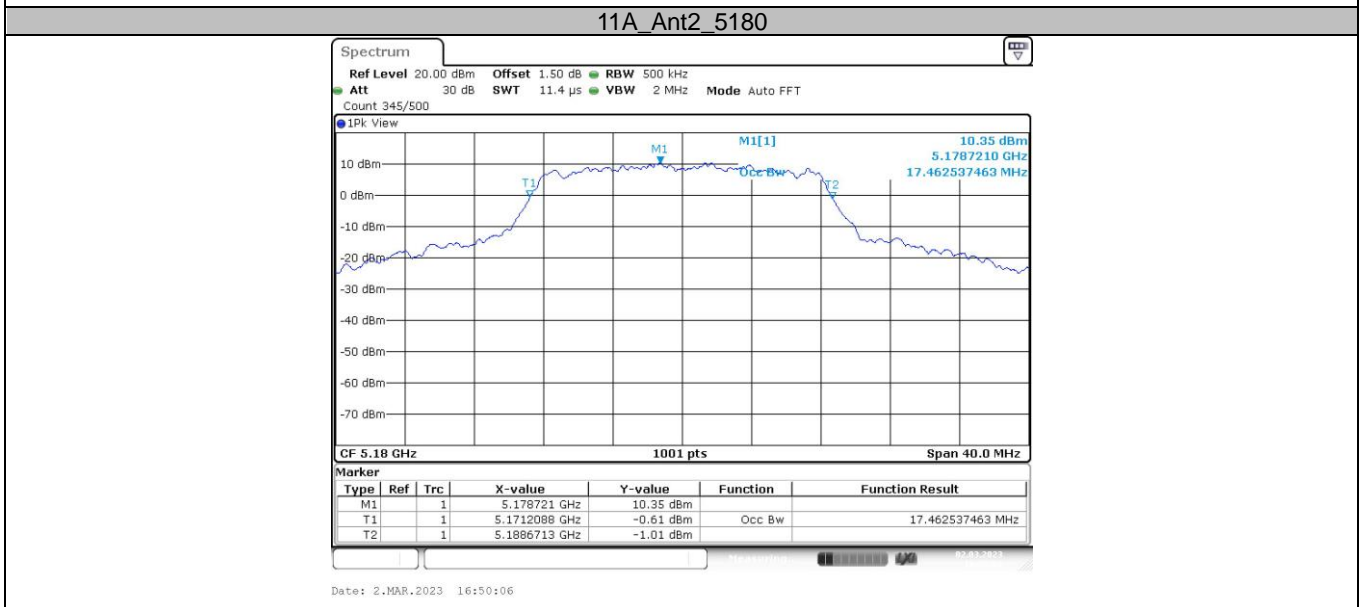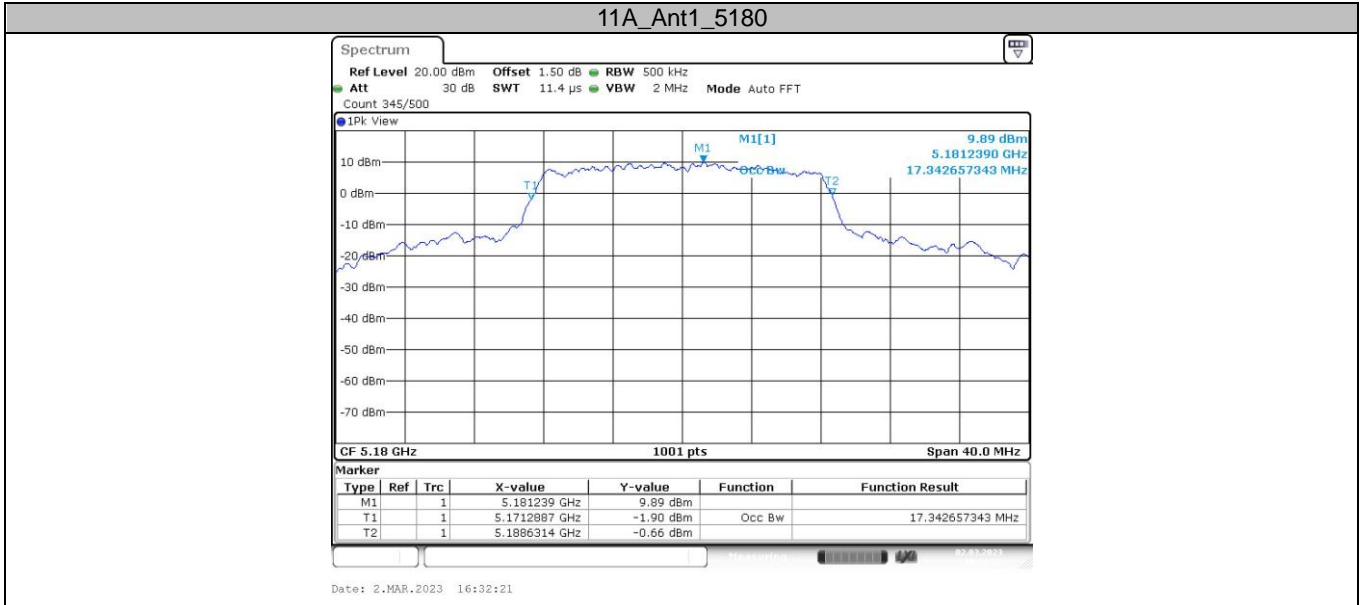


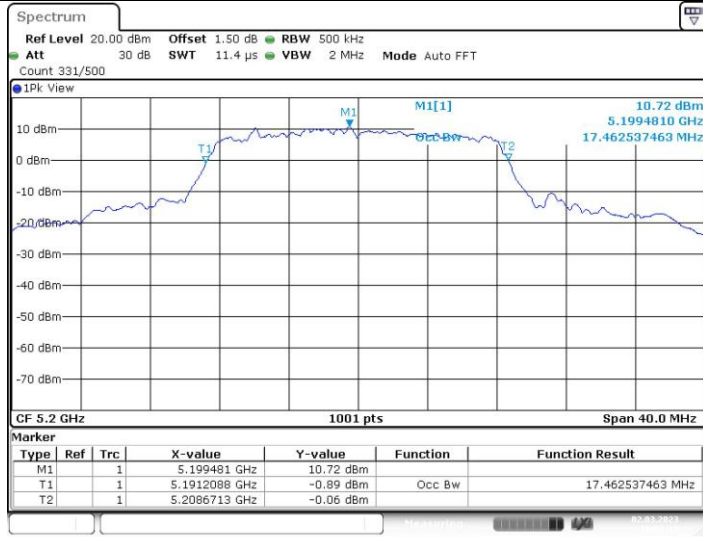


11A_Ant1_5240

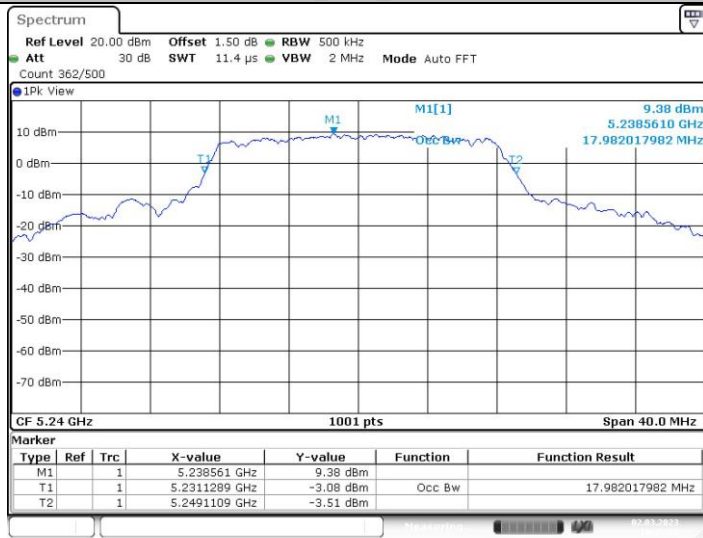


11A_Ant2_5240

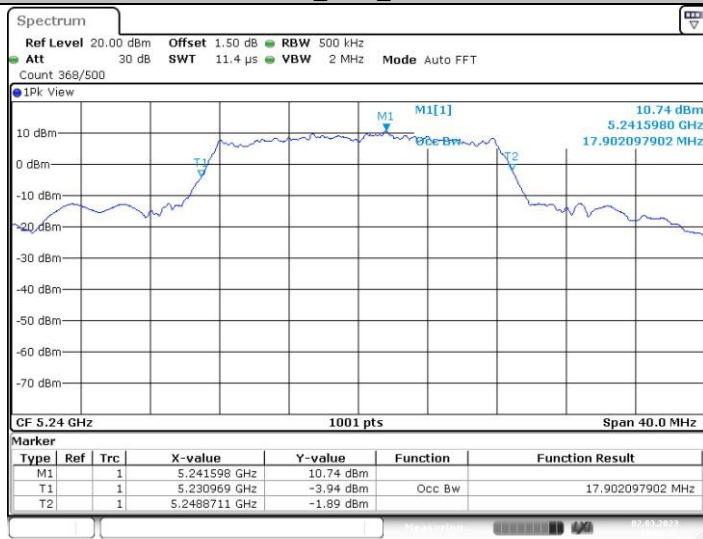


11A_Ant1_5745

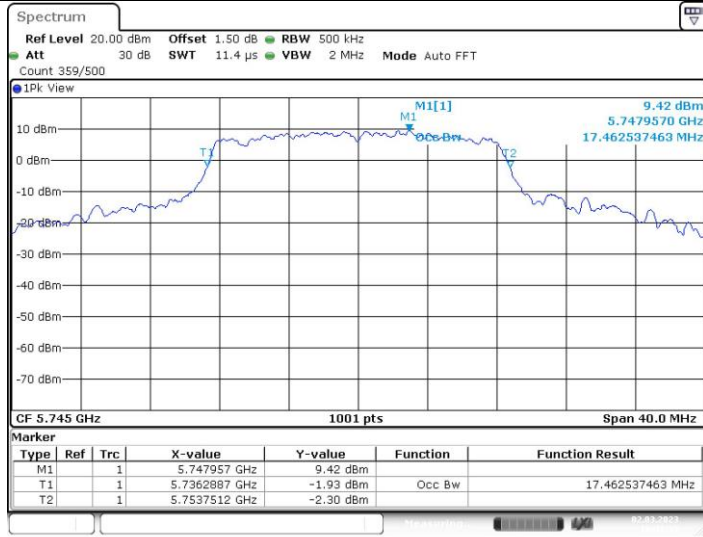


11A_Ant2_5745

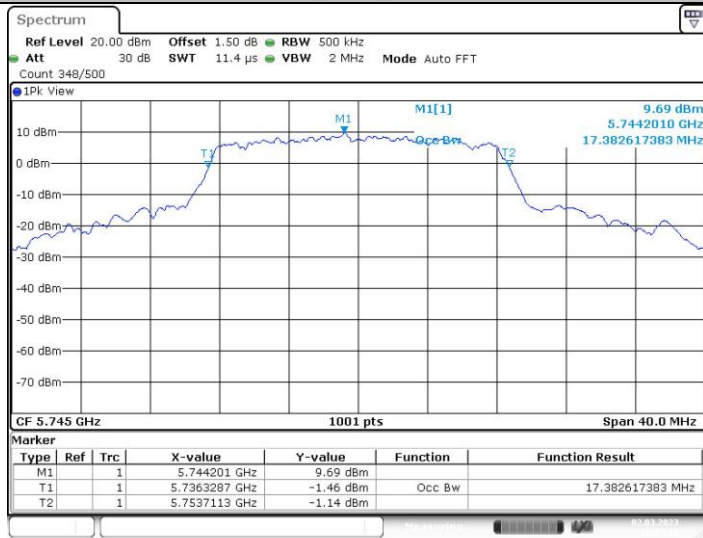


11A_Ant1_5785

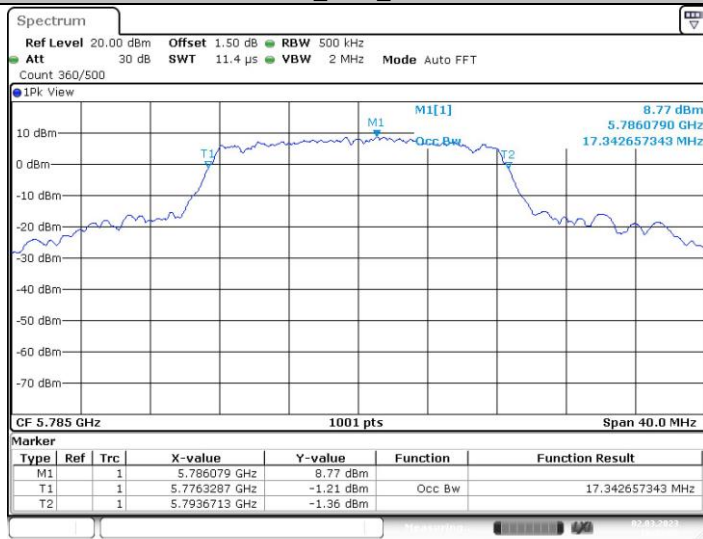


11A_Ant2_5785

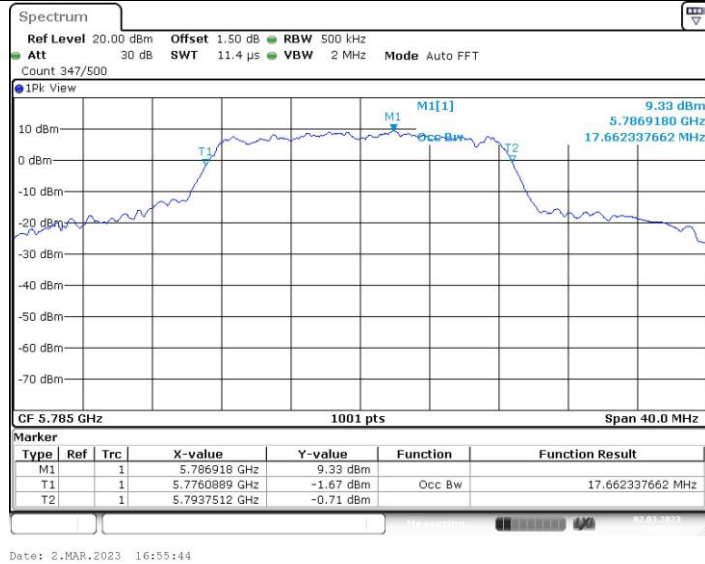


11A_Ant1_5825

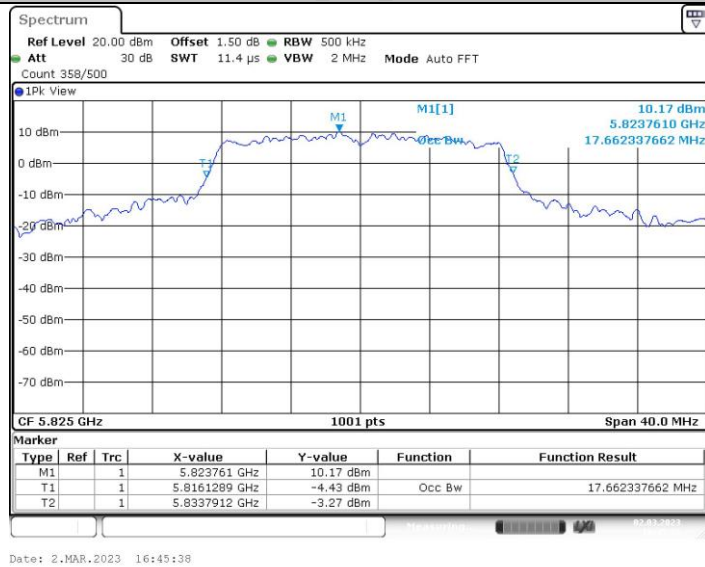


11A_Ant2_5825

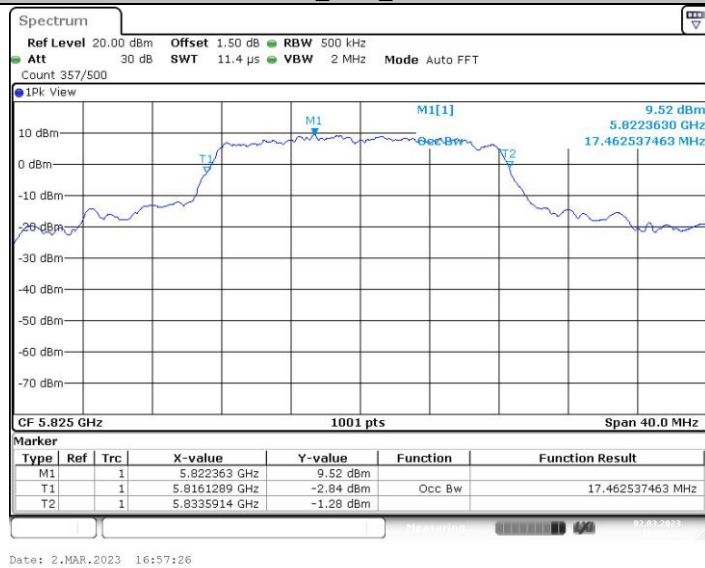


11N20MIMO_Ant1_5180

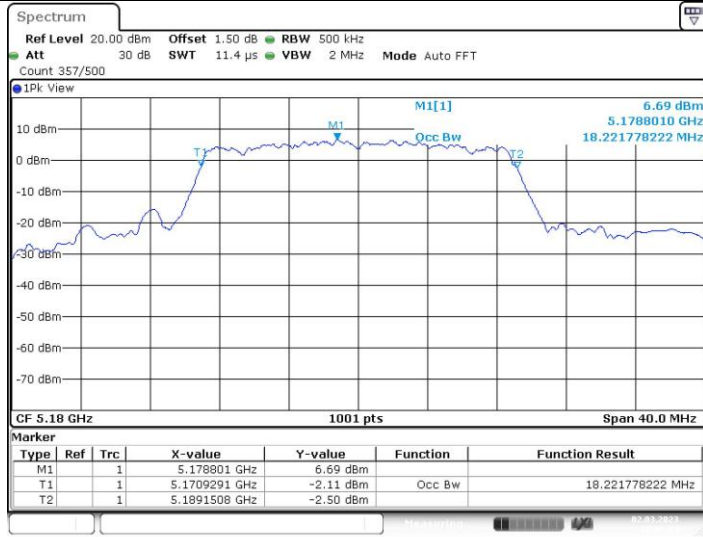

11N20MIMO_Ant2_5180

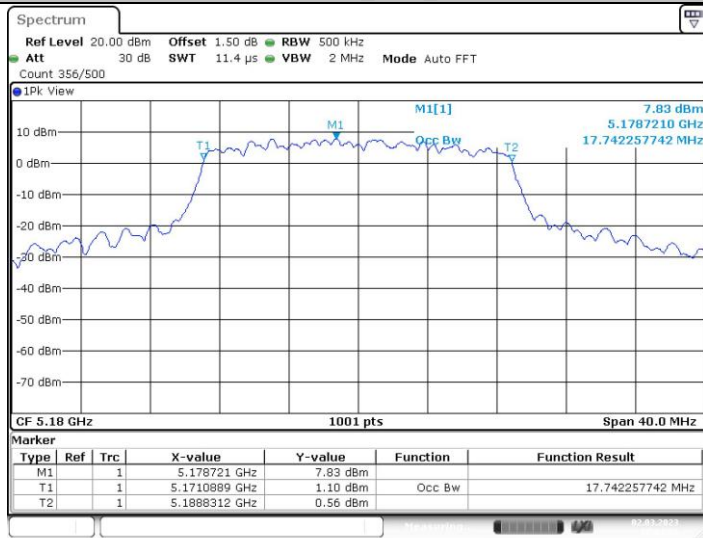


11N20MIMO_Ant1_5200

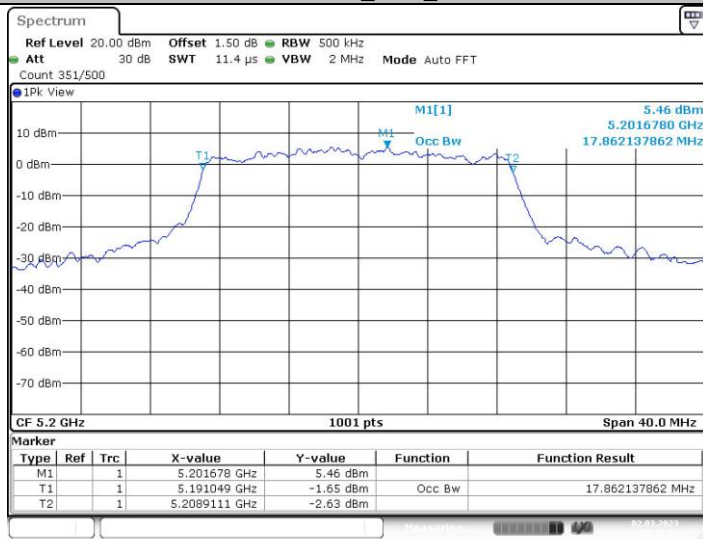


11N20MIMO_Ant2_5200




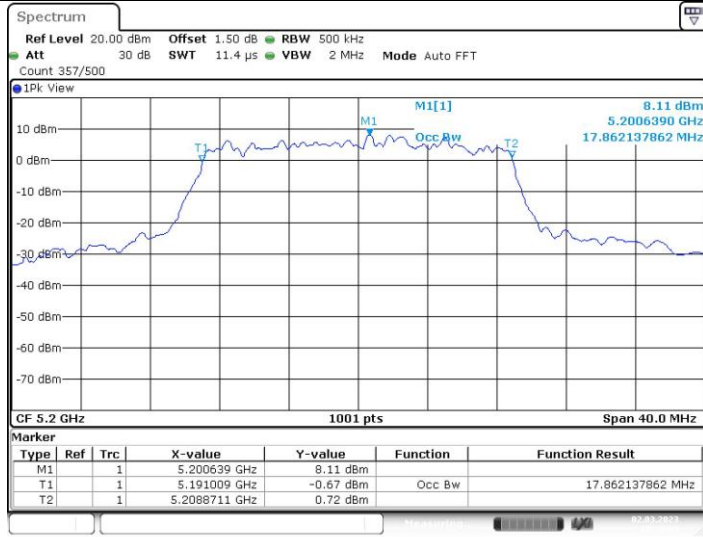


11N20MIMO_Ant1_5240

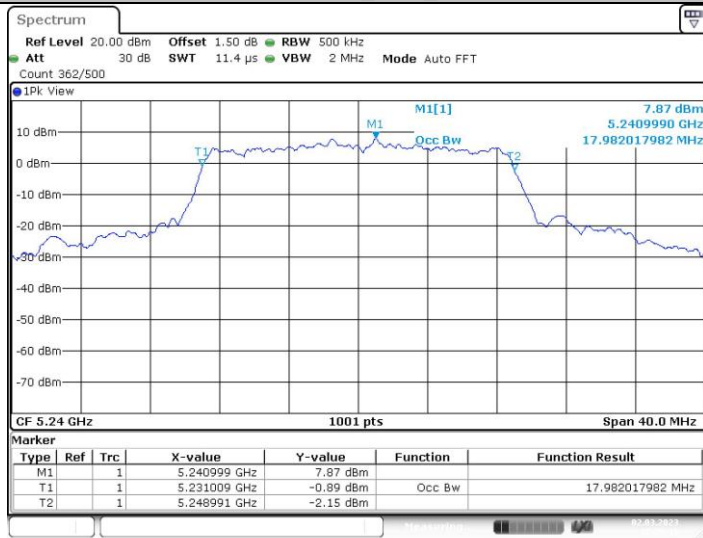


11N20MIMO_Ant2_5240

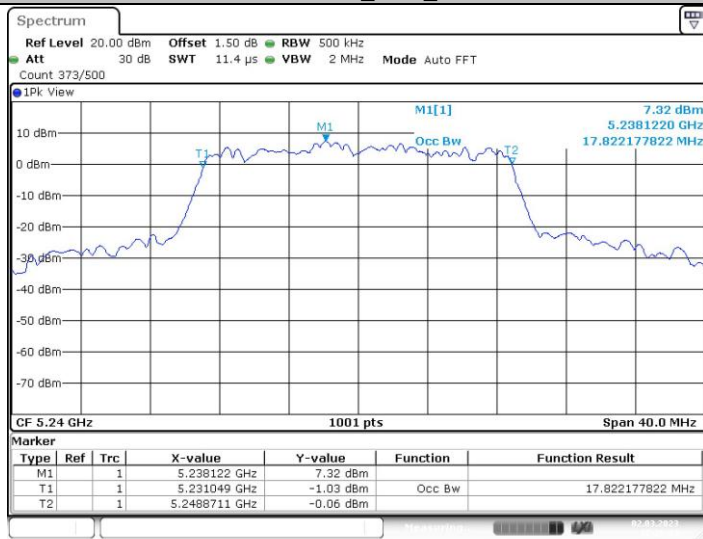


11N20MIMO_Ant1_5745

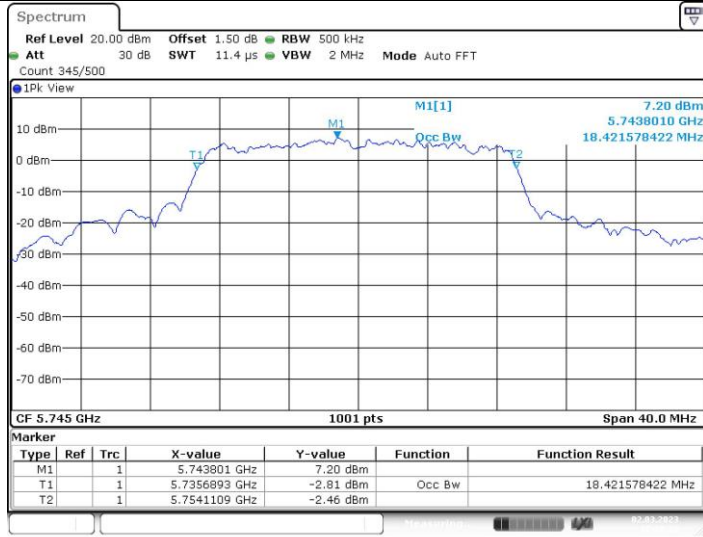


11N20MIMO_Ant2_5745

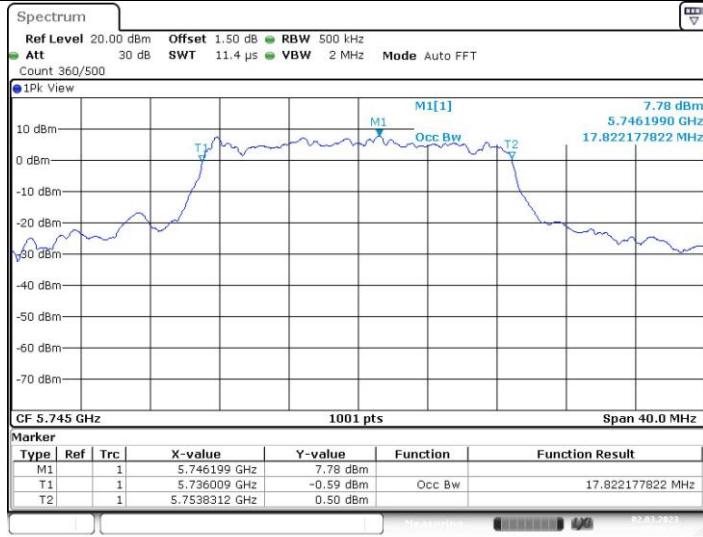


11N20MIMO_Ant1_5785

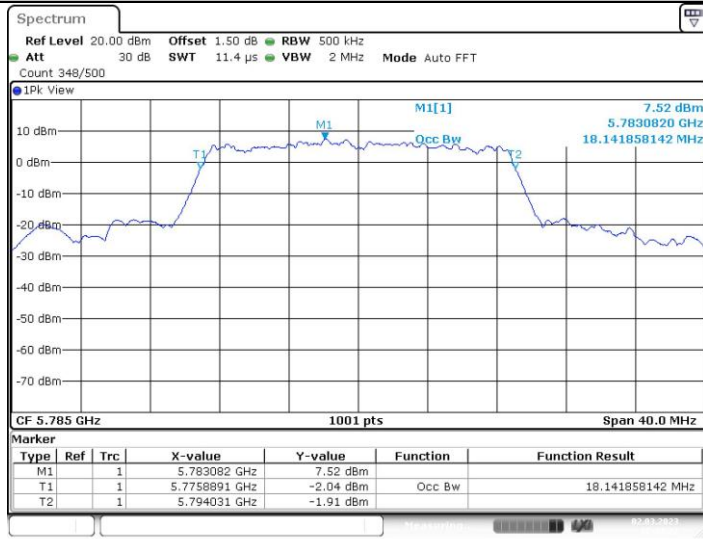


11N20MIMO_Ant2_5785

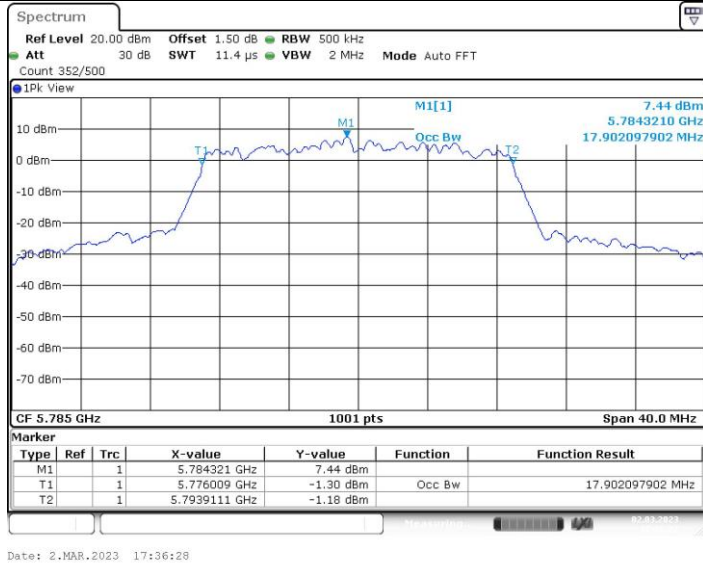

11N20MIMO_Ant1_5825

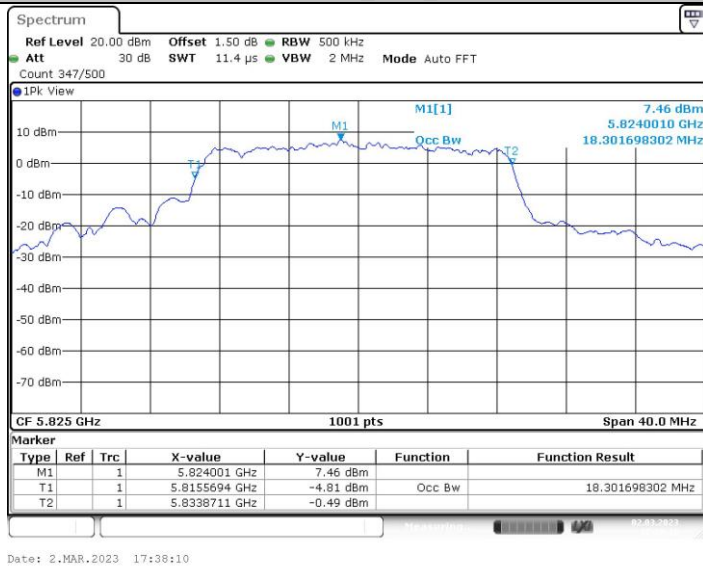


11N20MIMO_Ant2_5825

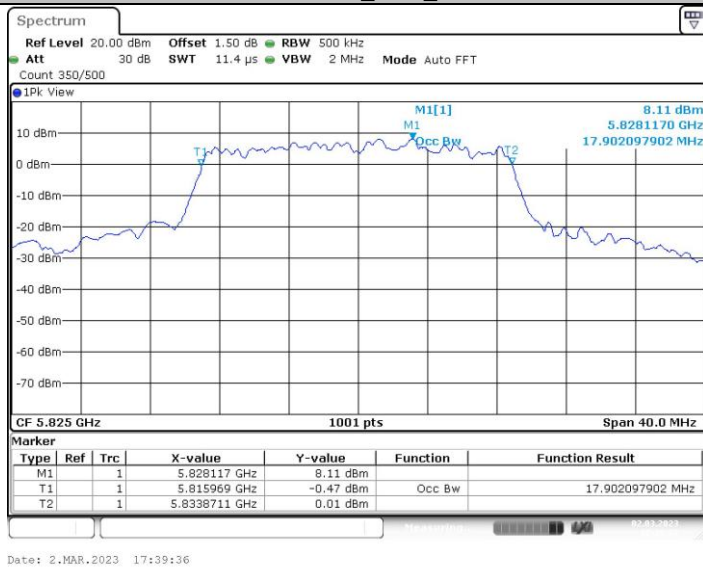


11N40MIMO_Ant1_5190




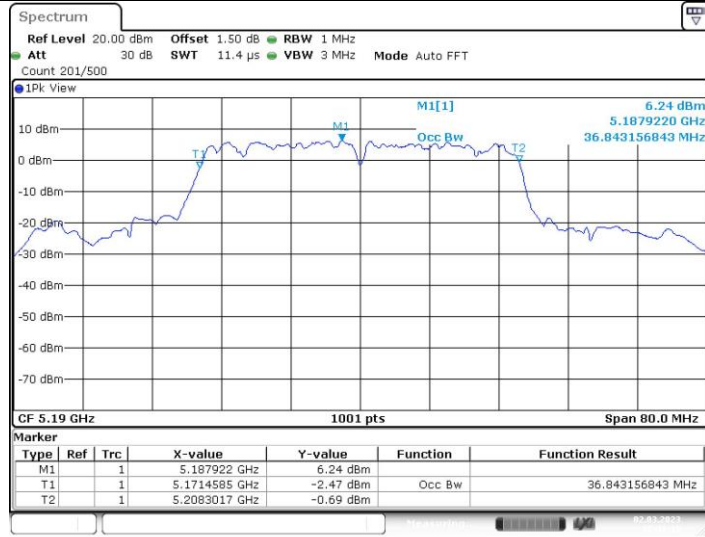

11N40MIMO_Ant2_5190

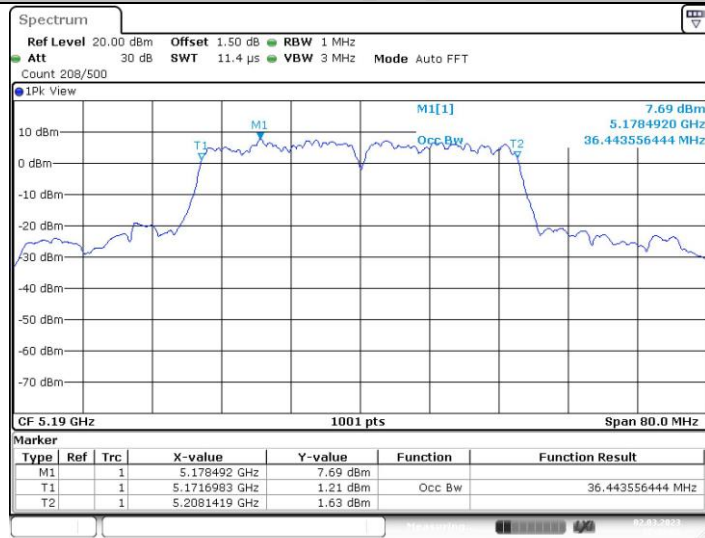

11N40MIMO_Ant1_5230

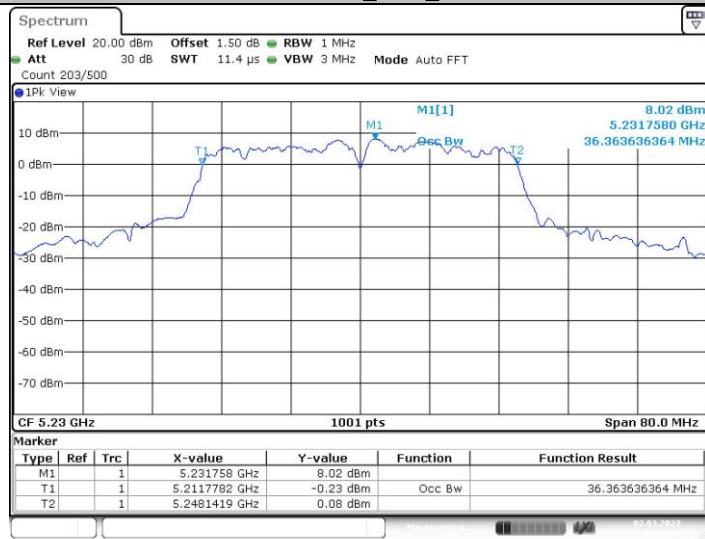


11N40MIMO_Ant2_5230







11N40MIMO_Ant1_5755

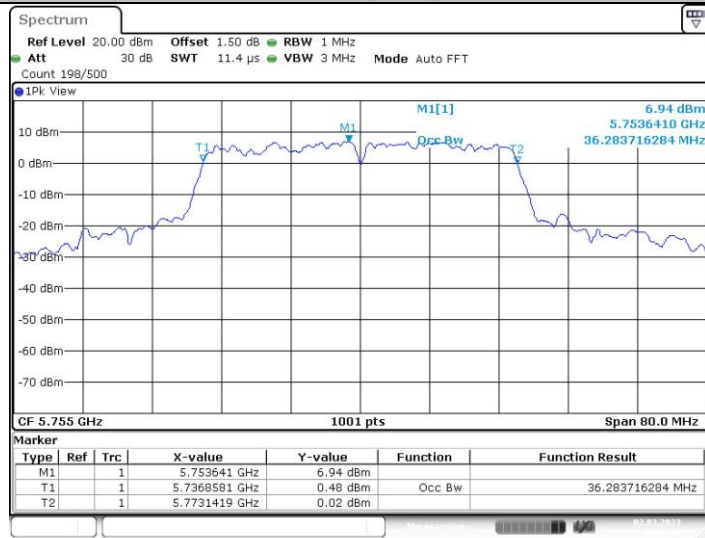


11N40MIMO_Ant2_5755

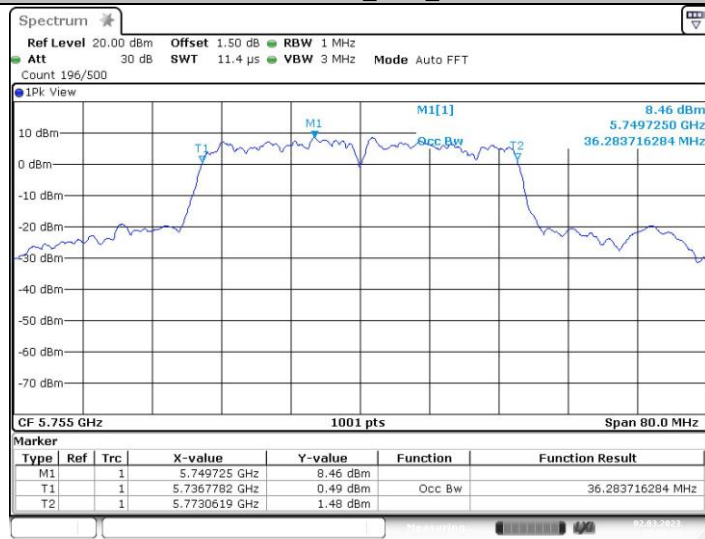

11N40MIMO_Ant1_5795

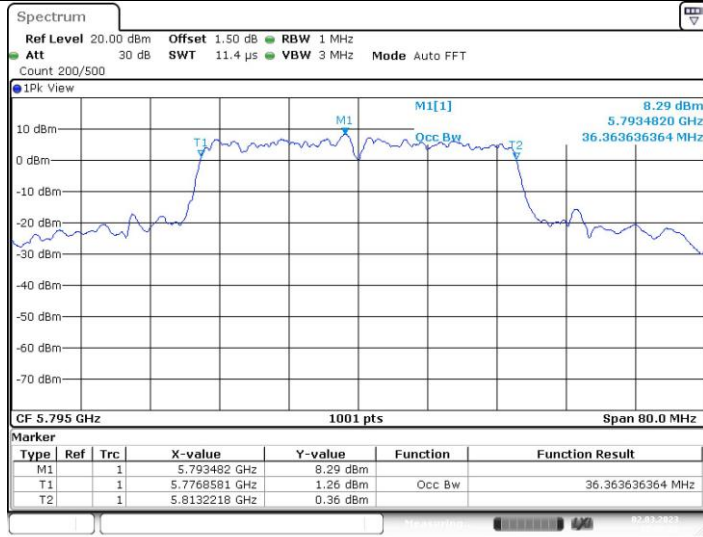

11N40MIMO_Ant2_5795

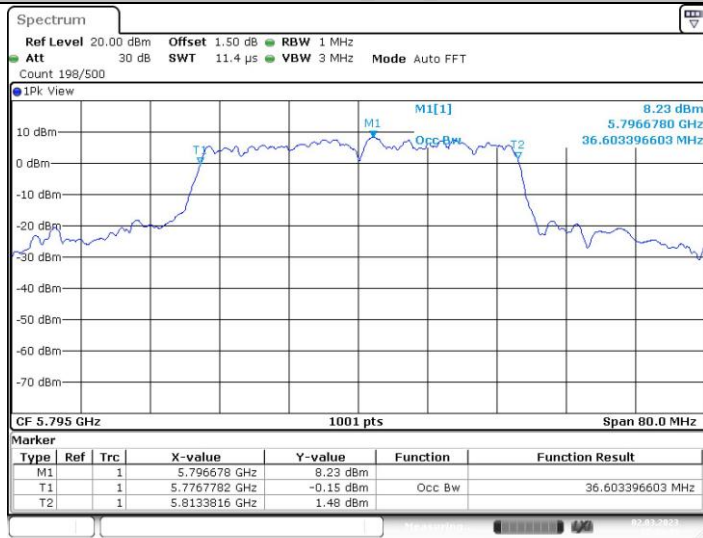


3.5. Output Power Test

Limit

FCC Part 15 Subpart E (15.407)		
Test Item	Limit	Frequency Range(MHz)
Conducted Output Power	Fixed: 1 Watt (30dBm) Mobile and Portable: 250mW (24dBm)	5150~5250
	250mW (24dBm)	5250~5350
	250mW (24dBm)	5500~5700
	1 Watt (30dBm)	5725~5850

IC Power@PSD Limit					
Frequency	Type of devices	Maximum Conducted Output Power	EIRP Output Power	Conducted Power Spectral Density	EIRP Power Spectral Density
5150MHz-5250MHz	in vehicles		30mW or $1.76 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)		
	Other Devices		200mW or $10 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)		10dBm/MHz
5250MHz-5350MHz	in vehicles		30mW or $1.76 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)		
	Other Devices	250mW or $11 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)	1W or $17 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)	11dBm/MHz	
5470MHz-5600MHz 5650MHz-5725MHz	ALL Devices	250mW or $11 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)	1W or $17 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)	11dBm/MHz	
5725MHz-5850MHz	ALL Devices	1W		30dBm/500KHz	

Test Configuration

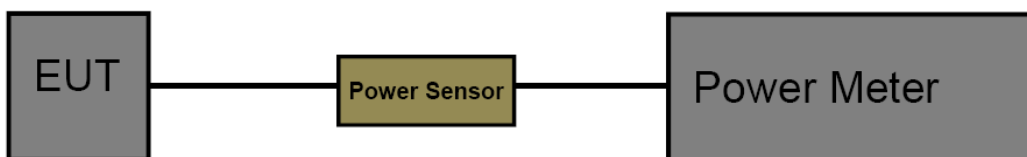

**Test Procedure**

The measurement is according to section 3 of KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

Test Mode

Please refer to the clause 2.4.

Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	16.30	≤30	PASS
	Ant2	5180	16.56	≤30	PASS
	Ant1	5200	16.13	≤30	PASS
	Ant2	5200	16.52	≤30	PASS
	Ant1	5240	16.31	≤30	PASS
	Ant2	5240	16.45	≤30	PASS
	Ant1	5745	15.92	≤30	PASS
	Ant2	5745	15.62	≤30	PASS
	Ant1	5785	15.20	≤30	PASS
	Ant2	5785	15.82	≤30	PASS
11N20MIMO	Ant1	5825	15.95	≤30	PASS
	Ant2	5825	15.88	≤30	PASS
	Ant1	5180	13.41	≤28	PASS
	Ant2	5180	13.71	≤28	PASS
	total	5180	16.6	≤28	PASS
	Ant1	5200	12.18	≤28	PASS
	Ant2	5200	13.27	≤28	PASS
	total	5200	15.8	≤28	PASS
	Ant1	5240	13.64	≤28	PASS
	Ant2	5240	12.63	≤28	PASS
	total	5240	16.2	≤28	PASS
	Ant1	5745	13.70	≤28	PASS
	Ant2	5745	13.43	≤28	PASS
	total	5745	16.6	≤28	PASS
	Ant1	5785	13.59	≤28	PASS
	Ant2	5785	12.06	≤28	PASS
	total	5785	15.9	≤28	PASS
	11N40MIMO	Ant1	5825	13.62	≤28
Ant2		5825	13.47	≤28	PASS
total		5825	16.6	≤28	PASS
Ant1		5190	13.42	≤28	PASS
Ant2		5190	13.70	≤28	PASS
total		5190	16.6	≤28	PASS
Ant1		5230	13.60	≤28	PASS
Ant2		5230	13.92	≤28	PASS
total		5230	16.8	≤28	PASS
Ant1		5755	13.73	≤28	PASS
Ant2		5755	14.07	≤28	PASS
total		5755	16.91	≤28	PASS
	Ant1	5795	13.96	≤28	PASS
	Ant2	5795	13.86	≤28	PASS
	total	5795	16.94	≤28	PASS
	total	5795	16.94	≤28	PASS

3.6. Power Spectral Density Test

Limit

FCC Part 15 Subpart E(15.407)/ RSS-247

For the 5.15~5.25GHz band:

- Outdoor AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
If $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 6)$.
- Indoor AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
If $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 6)$.
- Point-to-point AP
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.
If $G_{TX} > 23\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 23)$.
- Client devices
The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.
If $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 11 - (G_{TX} - 6)$.

For the 5.25~5.35GHz band:

The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.
If $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 11 - (G_{TX} - 6)$.

For the 5.47~5.725GHz band:

The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.
If $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 11 - (G_{TX} - 6)$.


For the 5.725~5.85GHz band:

- Point-to-multipoint systems (P2M)
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.
If $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 30 - (G_{TX} - 6)$.
- Point-to-point systems (P2P)
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.

Note: G_{TX} : EUT Antenna gain.

IC Power&PSD Limit					
Frequency	Type of devices	Maximum Conducted Output Power	EIRP Output Power	Conducted Power Spectral Density	EIRP Power Spectral Density
5150MHz-5250MHz	in vehicles		30mW or $1.76 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)		
	Other Devices		200mW or $10 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)		10dBm/MHz
5250MHz-5350MHz	in vehicles		30mW or $1.76 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)		
	Other Devices	250mW or $11 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)	1W or $17 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)	11dBm/MHz	
5470MHz-5600MHz 5650MHz-5725MHz	ALL Devices	250mW or $11 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)	1W or $17 + 10 \times \log_{10}B$ dBm, whichever is less (B=99% OBW in MHz)	11dBm/MHz	
5725MHz-5850MHz	ALL Devices	1W		30 dBm/500KHz	

Test Configuration

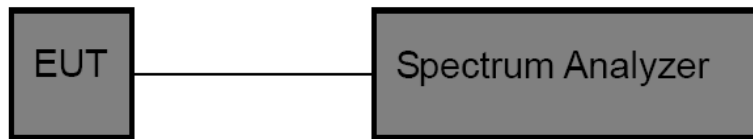

Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement is according to KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyzer center frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW)(alternatively, the entire 99% OBW) of the signal.
- (4) RBW=1MHz for devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz
RBW=500kHz for devices operating in the band 5.725-5.85 GHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz/RBW})$ to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement. If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1\text{MHz/RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- (5) Set the VBW to: $\geq 3 \text{ RBW}$
- (6) Detector: AVG
- (7) Trace: Max Hold and View
- (7) Sweep time: auto
- (8) Trace average at least 100 traces in power averaging.
- (9) Use the peak marker function to determine the maximum amplitude level within the RBW. Apply correction to the result if different RBW is used.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.




Test Mode

Please refer to the clause 2.4.

Test Result




TestMode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	5.76	≤17	PASS
	Ant2	5180	6.47	≤17	PASS
	Ant1	5200	6.27	≤17	PASS
	Ant2	5200	6.46	≤17	PASS
	Ant1	5240	6.58	≤17	PASS
	Ant2	5240	6.12	≤17	PASS
	Ant1	5745	2.77	≤30	PASS
	Ant2	5745	2.24	≤30	PASS
	Ant1	5785	2.48	≤30	PASS
	Ant2	5785	2.53	≤30	PASS
	Ant1	5825	2.33	≤30	PASS
Ant2	5825	2.61	≤30	PASS	
11N20MIMO	Ant1	5180	2.85	≤15	PASS
	Ant2	5180	3.32	≤15	PASS
	total	5180	6.10	≤15	PASS
	Ant1	5200	1.66	≤15	PASS
	Ant2	5200	2.49	≤15	PASS
	total	5200	5.11	≤15	PASS
	Ant1	5240	2.89	≤15	PASS
	Ant2	5240	3.55	≤15	PASS
	total	5240	6.24	≤15	PASS
	Ant1	5745	0.71	≤28	PASS
	Ant2	5745	-0.07	≤28	PASS
	total	5745	3.35	≤28	PASS
	Ant1	5785	1.08	≤28	PASS
	Ant2	5785	0.51	≤28	PASS
	total	5785	3.81	≤28	PASS
	Ant1	5825	0.60	≤28	PASS
	Ant2	5825	0.53	≤28	PASS
total	5825	3.58	≤28	PASS	
11N40MIMO	Ant1	5190	0.57	≤15	PASS
	Ant2	5190	0.35	≤15	PASS
	total	5190	3.47	≤15	PASS
	Ant1	5230	0.27	≤15	PASS
	Ant2	5230	0.78	≤15	PASS
	total	5230	3.54	≤15	PASS
	Ant1	5755	-2.88	≤28	PASS
	Ant2	5755	-2.25	≤28	PASS
	total	5755	0.46	≤28	PASS
	Ant1	5795	-5.18	≤28	PASS
	Ant2	5795	-2.08	≤28	PASS
total	5795	-0.35	≤28	PASS	

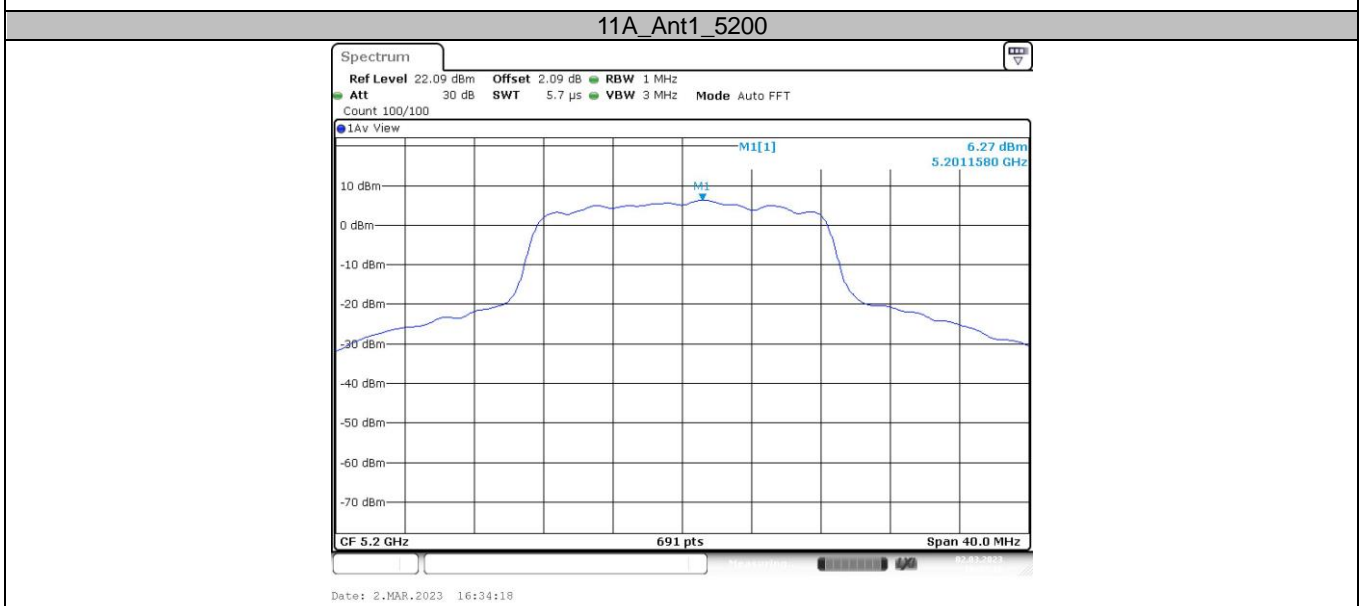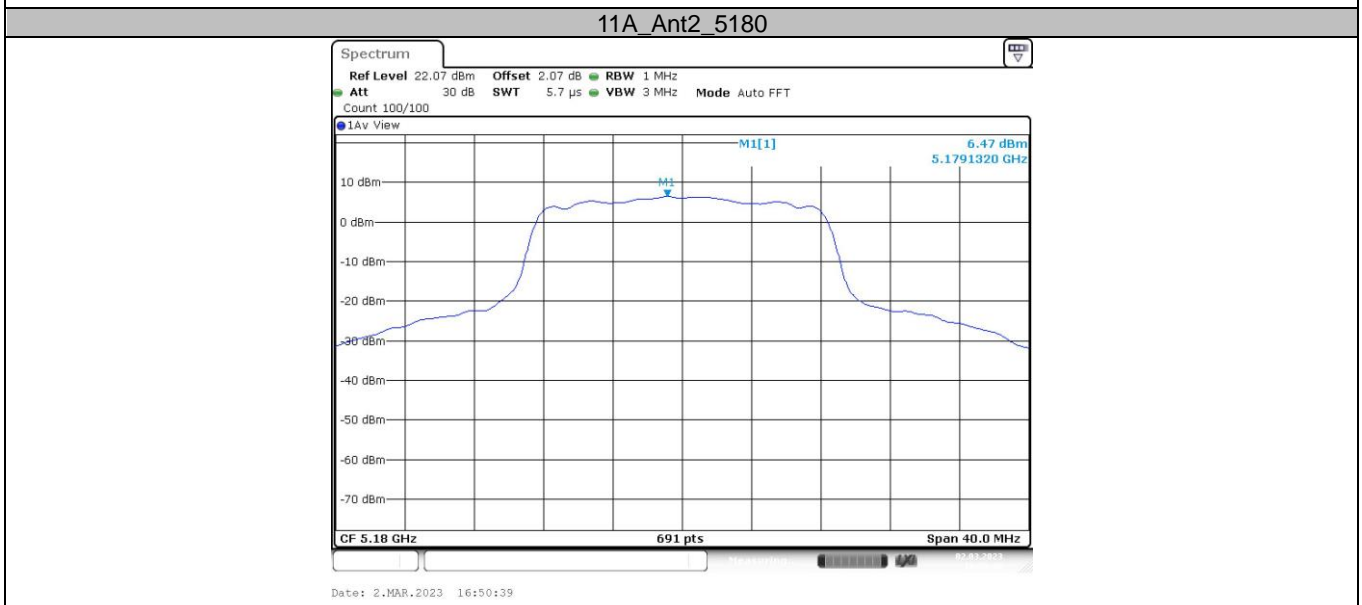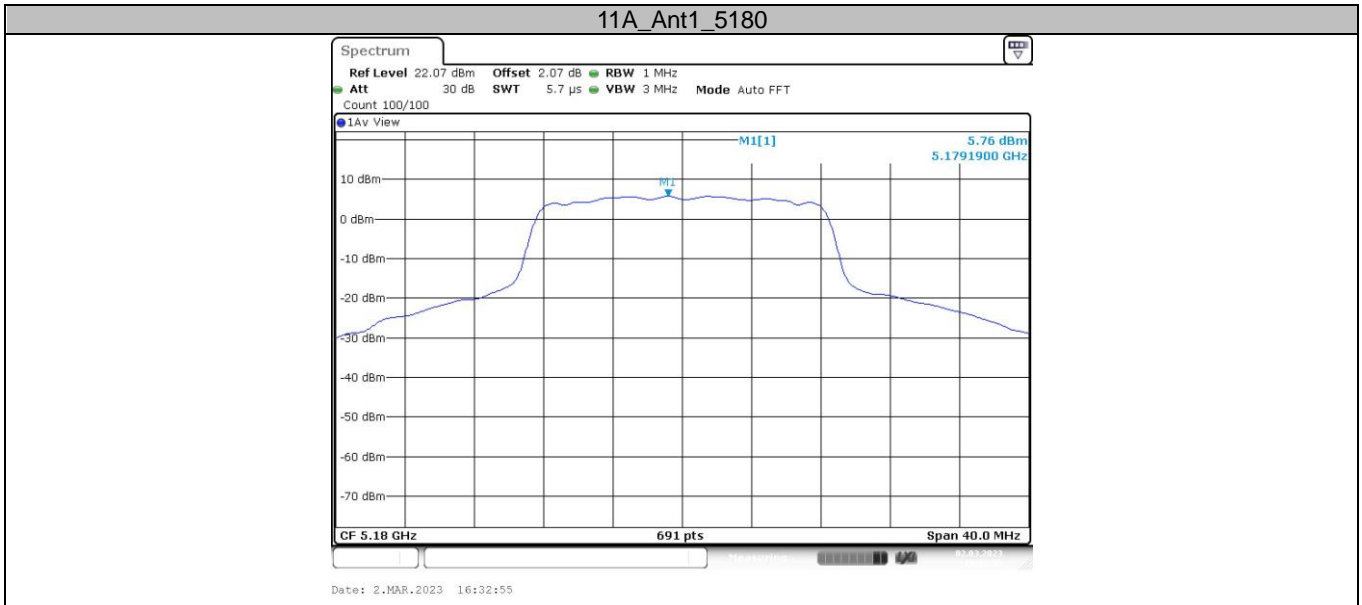


11A_Ant2_5200



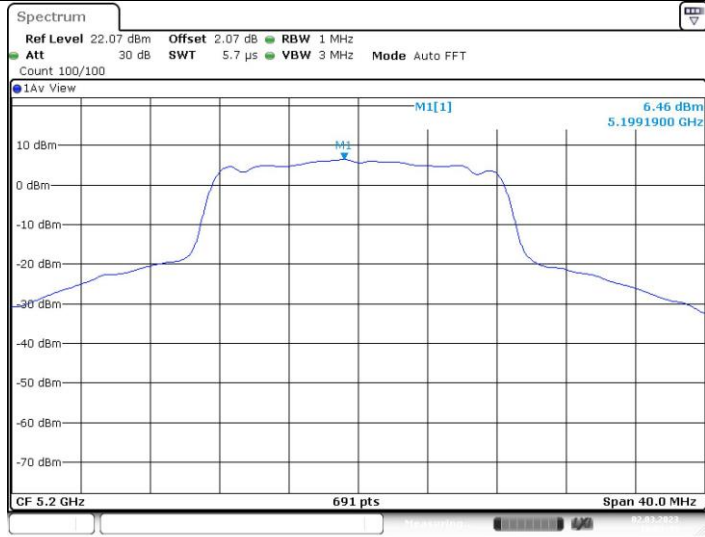


Date: 2.MAR.2023 16:51:48

11A_Ant1_5240

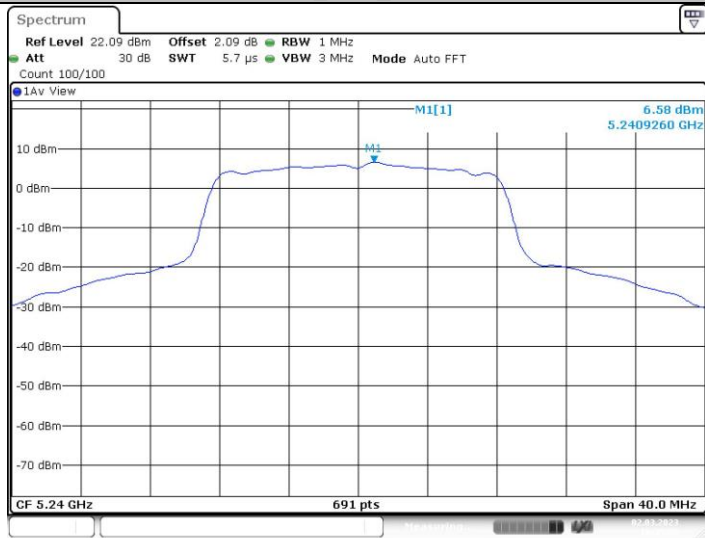


Date: 2.MAR.2023 16:35:58

11A_Ant2_5240

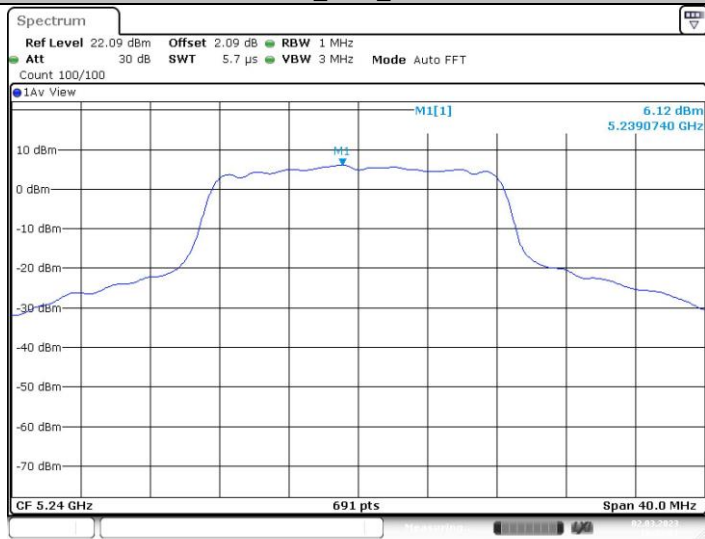


Date: 2.MAR.2023 16:53:01

11A_Ant1_5745

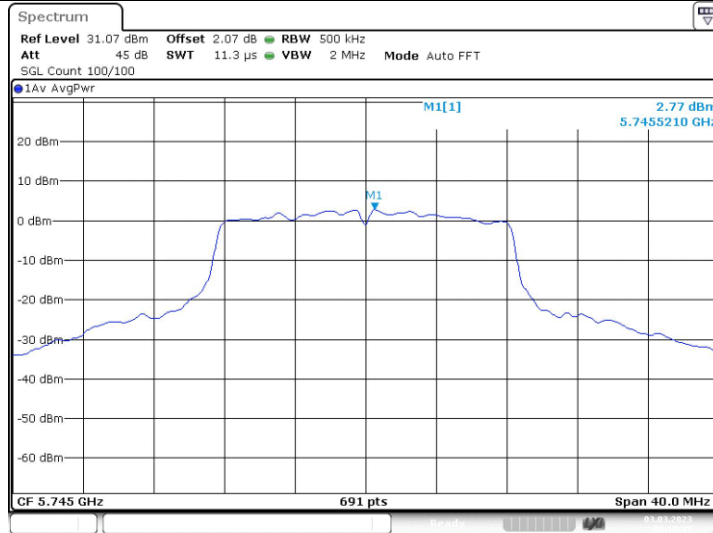


Date: 3.MAR.2023 09:19:35

11A_Ant2_5745

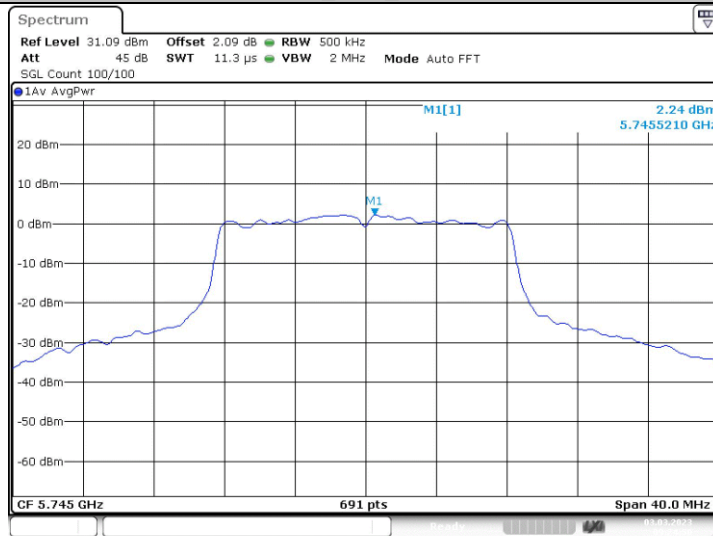

Date: 3.MAR.2023 09:24:50


11A_Ant1_5785

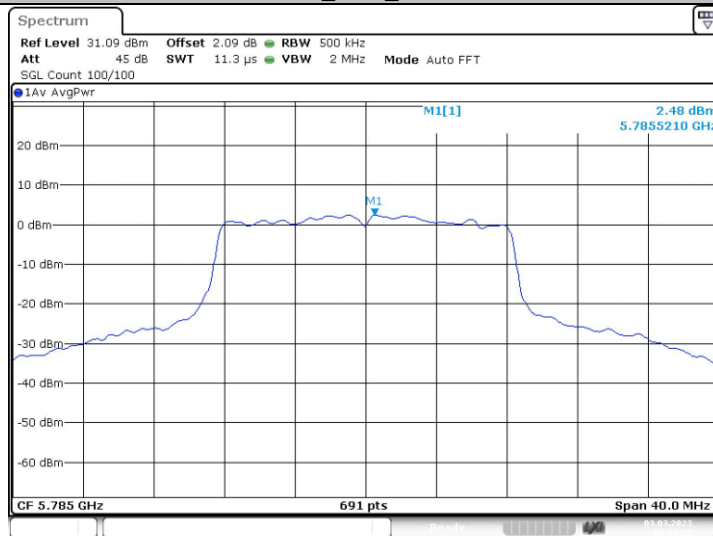

Date: 3.MAR.2023 09:38:37


11A_Ant2_5785



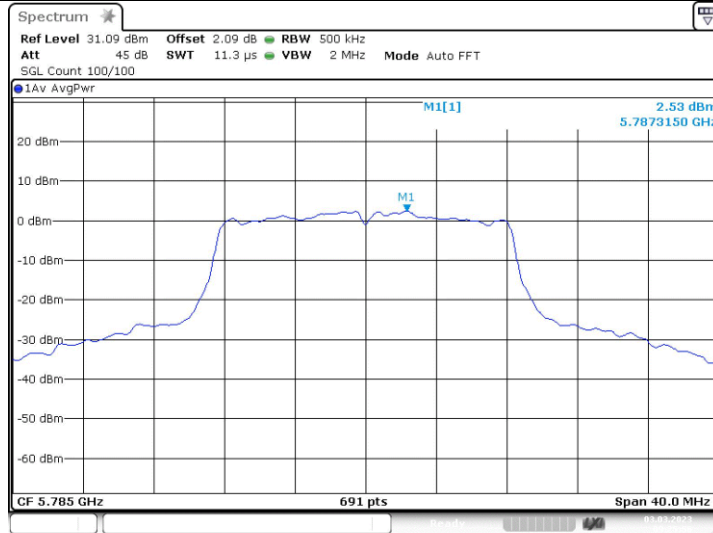


Date: 3.MAR.2023 09:25:56

11A_Ant1_5825

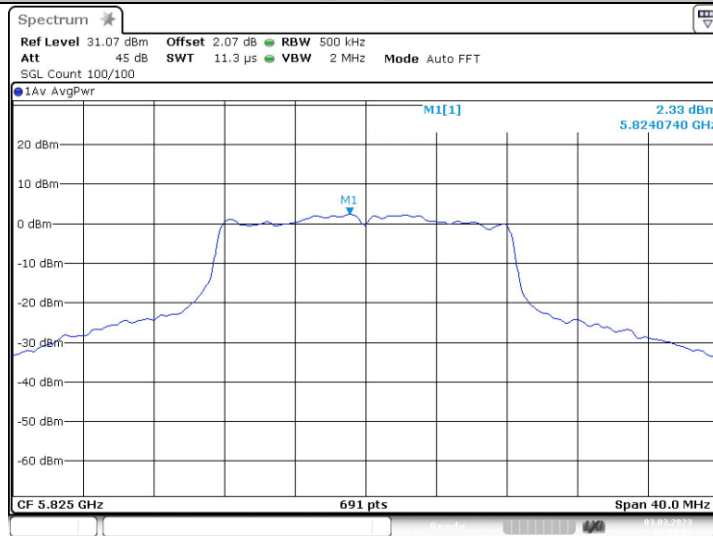

Date: 3.MAR.2023 09:39:31


11A_Ant2_5825

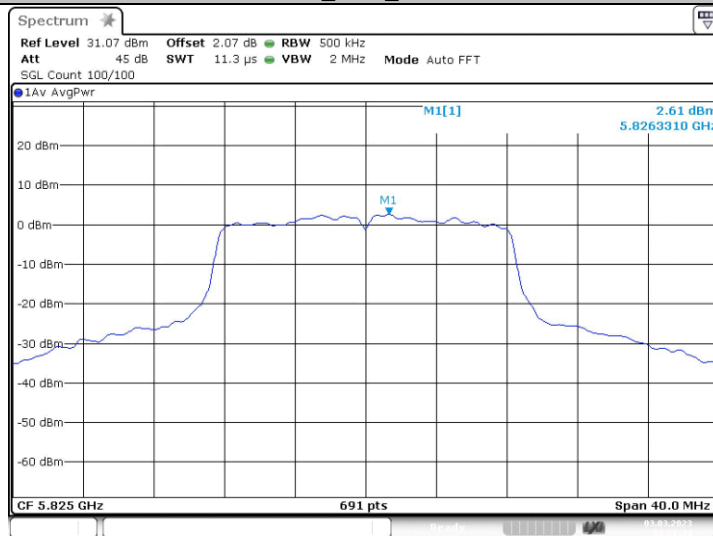

Date: 3.MAR.2023 09:27:34


11N20MIMO_Ant1_5180



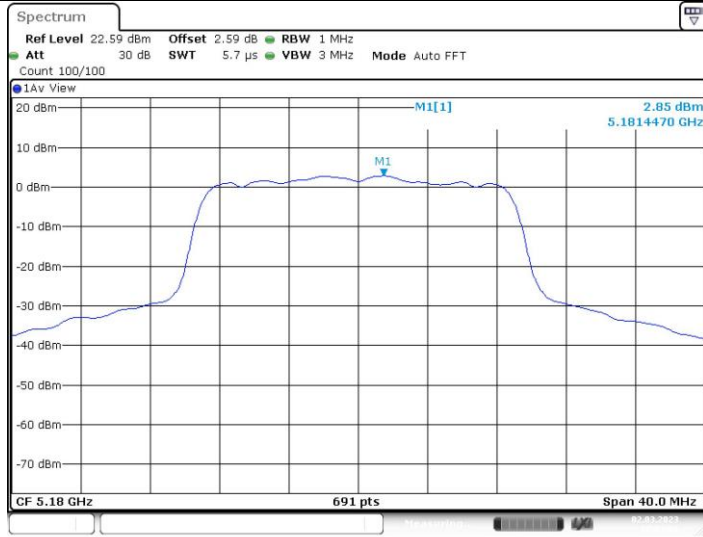


Date: 2.MAR.2023 17:03:08

11N20MIMO_Ant2_5180

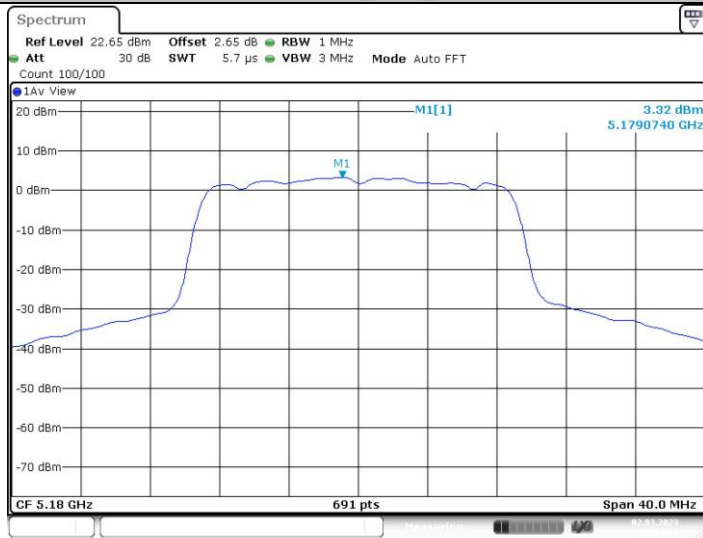

Date: 2.MAR.2023 17:04:37

11N20MIMO_Ant1_5200

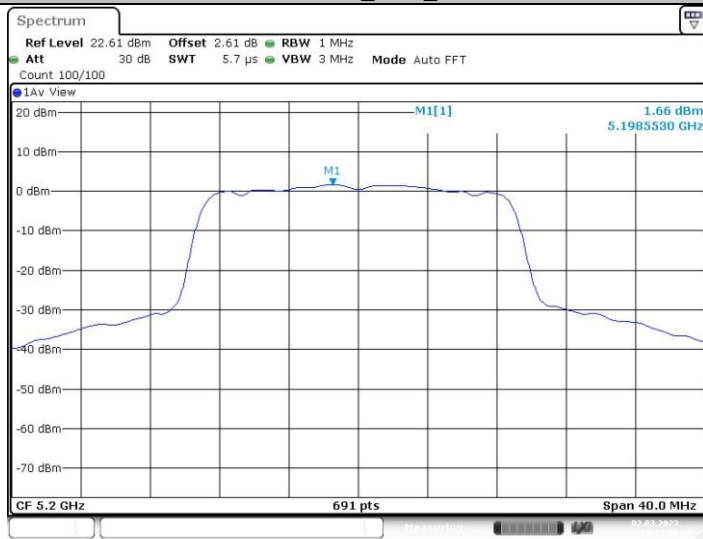

Date: 2.MAR.2023 17:17:26

11N20MIMO_Ant2_5200