



# CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhuhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-27521059 Fax: +86-755-27521011 Http://www.sz-ctc.org.cn

## TEST REPORT

**Report No.** .....: **CTC20231665E04**

**FCC ID**.....: **2AR24-AIBOX500**

**Applicant** .....: **Shenzhen Absen Optoelectronic Co.,Ltd**

Address.....: 18-20/F, Tower A, Building 3, Phase I, Tian An Cloud Park, N0.2018, Xuegang Rd, Bantian, Longgang District, Shenzhen, Guangdong, P.R. China

Manufacturer.....: Shenzhen Absen Optoelectronic Co.,Ltd

Address.....: 18-20/F, Tower A, Building 3, Phase I, Tian An Cloud Park, N0.2018, Xuegang Rd, Bantian, Longgang District, Shenzhen, Guangdong, P.R. China

**Product Name** .....: **LED Multimedia Processor**

Trade Mark .....: **Abjen**

Model/Type reference.....: AiBox 500

Listed Model(s) .....: /




**Standard** .....: **FCC CFR Title 47 Part 15 Subpart E Section 15.407**

Date of receipt of test sample.....: Aug. 18, 2023

Date of testing.....: Aug. 19, 2023 ~ Dec. 11, 2023

Date of issue.....: Jul. 3, 2024

**Result**.....: **PASS**

Compiled by: (Printed name+signature)	Lucy Lan	
Supervised by: (Printed name+signature)	Eric Zhang	
Approved by: (Printed name+signature)	Totti Zhao	

**Testing Laboratory Name** .....: **CTC Laboratories, Inc.**

Address.....: Room 101 Building B, No. 7, Lanqing 1st Road, Luhuhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample.



Table of Contents

Page

<b>1. TEST SUMMARY .....</b>	<b>3</b>
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION .....	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY .....	5
1.5. MEASUREMENT UNCERTAINTY .....	6
1.6. ENVIRONMENTAL CONDITIONS.....	6
<b>2. GENERAL INFORMATION .....</b>	<b>7</b>
2.1. CLIENT INFORMATION .....	7
2.2. GENERAL DESCRIPTION OF EUT .....	7
2.3. ACCESSORY EQUIPMENT INFORMATION .....	8
2.4. OPERATION STATE .....	9
2.5. MEASUREMENT INSTRUMENTS LIST .....	14
<b>3. TEST ITEM AND RESULTS .....</b>	<b>15</b>
3.1. CONDUCTED EMISSION.....	15
3.2. RADIATED EMISSION.....	18
3.3. BAND EDGE EMISSIONS.....	69
3.4. BANDWIDTH.....	239
3.5. PEAK OUTPUT POWER .....	317
3.6. POWER SPECTRAL DENSITY .....	322
3.7. FREQUENCY STABILITY .....	354
3.8. ANTENNA REQUIREMENT.....	359
3.9. DYNAMIC FREQUENCY SELECTION.....	360



# 1. TEST SUMMARY

## 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): for 802.11a/n/ac/ax, the test procedure follows the FCC KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

## 1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC20231665E04	Jul. 3, 2024	Original



### 1.3. Test Description

FCC Part 15 Subpart E (15.407)			
Test Item	Standard Section	Result	Test Engineer
Antenna Requirement	15.203	Pass	Lucy Lan
Conducted Emission	15.207	Pass	Lucy Lan
Band Edge Emissions	15.407(b)	Pass	Lucy Lan
26dB Bandwidth & 99% Bandwidth	15.407(a)	Pass	Lucy Lan
6dB Bandwidth (only for UNII-3)	15.407(e)	Pass	Lucy Lan
Peak Output Power	15.407(a)	Pass	Lucy Lan
Power Spectral Density	15.407(a)	Pass	Lucy Lan
Transmitter Radiated Spurious Emission	15.407(b) & 15.209	Pass	Lucy Lan
Frequency Stability	15.407(g)	Pass	Lucy Lan
Dynamic Frequency Selection (DFS)	15.407(h)	N/A	N/A
Automatically Discontinue Transmission	15.407(c)	Pass	Note 3

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.
3. During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



## 1.4. Test Facility

### Address of the report laboratory

#### CTC Laboratories, Inc.

Add: Room 101 Building B, Room 107, 108, 207, 208, 303 Building A, No. 7, Lanqing 1st Road, Luhuhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China (formerly 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, High-Tech Park, Guanlan Sub-District, Longhua New District, Shenzhen, Guangdong, China)

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

#### FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
Emission Bandwidth	±0.0196%	(1)
Maximum Conduct Output Power	±0.766dB	(1)
Power Spectral Density	±1.22dB	(1)
Band Edge Measurements	±1.328dB	(1)
Unwanted Emissions Measurement	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB	(1)
Frequency Stability	±2.76%	(1)
Conducted Emissions 9kHz~30MHz	±3.08 dB	(1)
Radiated Emissions 30~1000MHz	±4.51 dB	(1)
Radiated Emissions 1~18GHz	±5.84 dB	(1)
Radiated Emissions 18~40GHz	±6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.6. Environmental Conditions

<b>Normal Condition</b>	Temperature	15 °C to 35 °C
	Relative Humidity	20 % to 75 %
	Air Pressure	101 kPa
	Voltage	The normal test voltage for the equipment shall be the nominal voltage for which the equipment was designed.
<b>Extreme Condition</b>	Temperature	Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.
	Voltage	Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.

<b>Normal Condition</b>	T <sub>N</sub> =Normal Temperature	25 °C
<b>Extreme Condition</b>	T <sub>L</sub> =Lower Temperature	-10 °C
	T <sub>H</sub> =Higher Temperature	40 °C

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



## 2. GENERAL INFORMATION

### 2.1. Client Information

Applicant:	Shenzhen Absen Optoelectronic Co.,Ltd
Address:	18-20/F, Tower A, Building 3, Phase I, Tian An Cloud Park, N0.2018, Xuegang Rd, Bantian, Longgang District, Shenzhen, Guangdong, P.R. China
Manufacturer:	Shenzhen Absen Optoelectronic Co.,Ltd
Address:	18-20/F, Tower A, Building 3, Phase I, Tian An Cloud Park, N0.2018, Xuegang Rd, Bantian, Longgang District, Shenzhen, Guangdong, P.R. China
Factory:	Huizhou Absen Optoelectronic Limited.
Address:	No. 03, Donghua South road, Dongjiang Hi-tech Industry Park, Huizhou. Guangdong, China

### 2.2. General Description of EUT

Product Name:	LED Multimedia Processor				
Trade Mark:					
Model/Type reference:	AiBox 500				
Listed Model(s):	/				
Model Difference:	/				
Power Supply:	AC 100-240V~2.5A 50/60Hz				
RF Module Model:	AP6275S				
Hardware Version:	/				
Software Version:	/				
<b>5G Wi-Fi</b>					
Operation Band:	<input checked="" type="checkbox"/> U-NII-1	<input type="checkbox"/> U-NII-2A	<input type="checkbox"/> U-NII-2C	<input checked="" type="checkbox"/> U-NII-3	
Operation Frequency:	U-NII-1	5150MHz~5250MHz			
	U-NII-3	5725MHz~5850MHz			
Support Bandwidth:	802.11a	<input checked="" type="checkbox"/> 20MHz			
	802.11n	<input checked="" type="checkbox"/> 20MHz	<input checked="" type="checkbox"/> 40MHz		
	802.11ac	<input checked="" type="checkbox"/> 20MHz	<input checked="" type="checkbox"/> 40MHz	<input checked="" type="checkbox"/> 80MHz	<input type="checkbox"/> 160MHz
	802.11ax	<input checked="" type="checkbox"/> 20MHz	<input checked="" type="checkbox"/> 40MHz	<input checked="" type="checkbox"/> 80MHz	<input type="checkbox"/> 160MHz
Modulation:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)				
Antenna Type:	External Antenna				
Antenna Gain:	5.52dBi				



### 2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	/	Lenovo
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	150cm
Test Software Information			
Name	Version	/	/
adb.exe	/	/	/





## 2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting.

Operation Frequency List:

Operating Band	20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth		160MHz Bandwidth	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII-1	36	5180	38	5190	42	5210	50	5250
	40	5200						
	44	5220	46	5230				
	48	5240						
U-NII-2A	52	5260	54	5270	58	5290		
	56	5280						
	60	5300	62	5310				
	64	5320						
U-NII-2C	100	5500	102	5510	106	5530	114	5570
	104	5520						
	108	5540	110	5550				
	112	5560						
	116	5580						
	120	5600	118	5590	122	5610		
	124	5620	126	5630				
	128	5640						
	132	5660						
	136	5680	134	5670				
	140	5700						
U-NII-3	149	5745	151	5755	155	5775	/	
	153	5765						
	157	5785	159	5795				
	161	5805						
	165	5825						



Test channel is below:

Operating Band	Test Channel	20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth		160MHz Bandwidth	
		Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII-1	CH <sub>L</sub>	36	5180	38	5190	/	/	50	5250
	CH <sub>M</sub>	40	5200	/	/	42	5210		
	CH <sub>H</sub>	48	5240	46	5230	/	/		
U-NII-2A	CH <sub>L</sub>	52	5260	54	5270	/	/		
	CH <sub>M</sub>	56	5280	/	/	58	5290		
	CH <sub>H</sub>	64	5320	62	5310	/	/		
U-NII-2C	CH <sub>L</sub>	100	5500	102	5510	106	5530	/	/
	CH <sub>M</sub>	116	5580	110	5550	/	/	114	5570
	CH <sub>H</sub>	140	5700	134	5670	122	5610	/	/
U-NII-3	CH <sub>L</sub>	149	5745	151	5755	/	/	/	/
	CH <sub>M</sub>	157	5785	/	/	155	5775	/	/
	CH <sub>H</sub>	165	5825	159	5795	/	/	/	/

Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain(dBi)
0	NA	NA	External Antenna	IPEX	5.52
1	NA	NA	External Antenna	IPEX	5.52

Note: Antenna Gain=5.52dBi.

This EUT supports MIMO 2X2, any transmit signals are correlated with each other, so Directional Gain = $G_{Ant.}+10\log(N)$  dBi, that is Directional Gain=5+10log(2)dBi=8.53dBi. So, output power limit of UNII-1 and UNII-3 is 30-8.53+6=27.47dBm. The power spectral density limit of UNII-1 is 17-8+6=14.47dBm/MHz, and power spectral density limit of UNII-3 is 30-8+6=27.47dBm/500kHz.

Data Rated:

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is the worst case mode.

Test Mode	Data Rate (worst mode)
802.11a	6Mbps
802.11n(HT20)/ 802.11n(HT40)	HT-MCS0
802.11ac(VHT20)/ 802.11ac(VHT40)/ 802.11ac(VHT80)	VHT-MCS0
802.11ax(HE20)/ 802.11ax(HE40)/ 802.11ax(HE80)	HE-MCS0

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

RU Configuration:

Operating Mode	Resource Unit	26 Tone (2M)
802.11ax(HE20)	Specific Resource Unit	0
		⋮
		4
		⋮
	Resource Unit	8
		52 Tone (4M)
		37
		38
	Specific Resource Unit	39
		40
		106 Tone (8M)
		53
Resource Unit	54	
	242 Tone (20M)	
	61	
	Specific Resource Unit	61
Operating Mode	Resource Unit	26 Tone (2M)
802.11ax(HE40)	Specific Resource Unit	0
		⋮
		8
		⋮
	Resource Unit	17
		52 Tone (4M)
		37
		38
	Specific Resource Unit	39
		40
		41
		42
43		
44		
Resource Unit		106 Tone (8M)
Specific Resource Unit		53





		54
		55
		56
	Resource Unit	242 Tone (20M)
	Specific Resource Unit	61
		62
	Resource Unit	484 Tone (40M)
	Specific Resource Unit	65
Operating Mode	Resource Unit	26 Tone (2M)
802.11ax(HE80)	Specific Resource Unit	0
		⋮
		17
		⋮
	36	
	Resource Unit	52 Tone (4M)
	Specific Resource Unit	37
		⋮
		44
		⋮
	52	
	Resource Unit	106 Tone (8M)
	Specific Resource Unit	53
		⋮
		56
		⋮
	60	
	Resource Unit	242 Tone (20M)
	Specific Resource Unit	61
		62
		63
		64
	Resource Unit	484 Tone (40M)
	Specific Resource Unit	65
66		
Resource Unit	996 Tone (80M)	
Specific Resource Unit	67	
Operating Mode	Resource Unit	26 Tone (2M)
802.11ax(HE160)	Specific Resource Unit	0
		⋮
		36
		⋮
	S36	
	Resource Unit	52 Tone (4M)
	Specific Resource Unit	37
		⋮
52		



		∴
		S52
	Resource Unit	106 Tone (8M)
	Specific Resource Unit	53
		∴
		60
		∴
		S60
	Resource Unit	242 Tone (20M)
	Specific Resource Unit	61
		∴
		64
		∴
		S64
	Resource Unit	484 Tone (40M)
	Specific Resource Unit	65
		66
		S65
		S66
	Resource Unit	996 Tone (80M)
Specific Resource Unit	67	
	S67	
Resource Unit	996*2 Tone (80+80M)	
Specific Resource Unit	68	



## 2.5. Measurement Instruments List

RF Test System					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 16, 2023
2	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 24, 2024
3	Test Software	WCS	WCS-WCN	2023.08.04	/

Radiated Emission (3m chamber 3)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 18, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 01, 2024
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 16, 2023
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 16, 2023
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 16, 2023
6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026
7	Test Software	FARA	EZ-EMC	FA-03A2	/

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 16, 2023
2	LISN	R&S	ENV216	101113	Dec. 16, 2023
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 16, 2023
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 16, 2023
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 16, 2023
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

### 3. TEST ITEM AND RESULTS

#### 3.1. Conducted Emission


**Limit**

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\* Decreases with the logarithm of the frequency.

**Test Configuration**

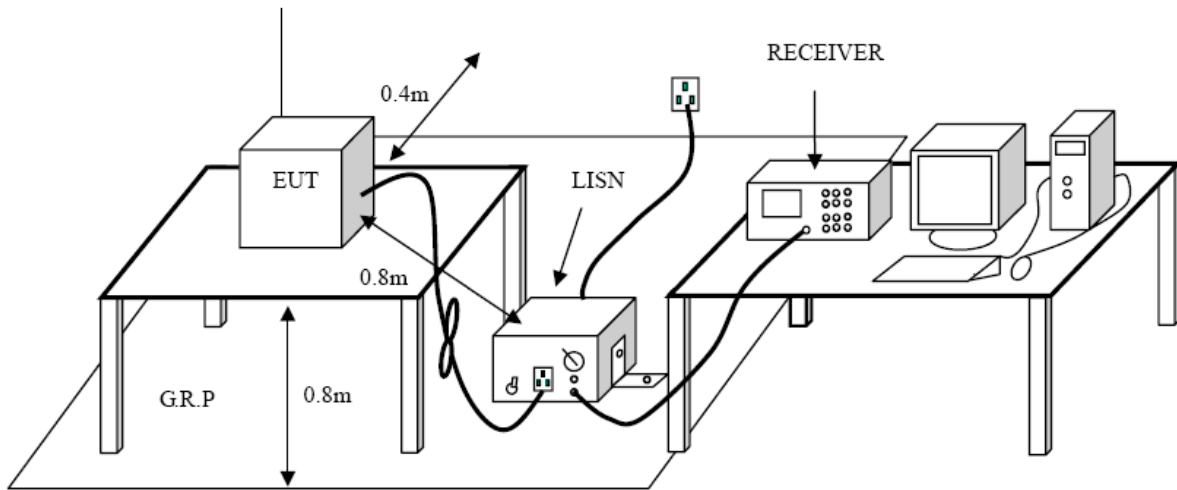

**Test Procedure**

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

**Test Mode**


Please refer to the clause 2.4.





**Test Result**

<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Line
<b>Remark:</b>	Only worse case is reported

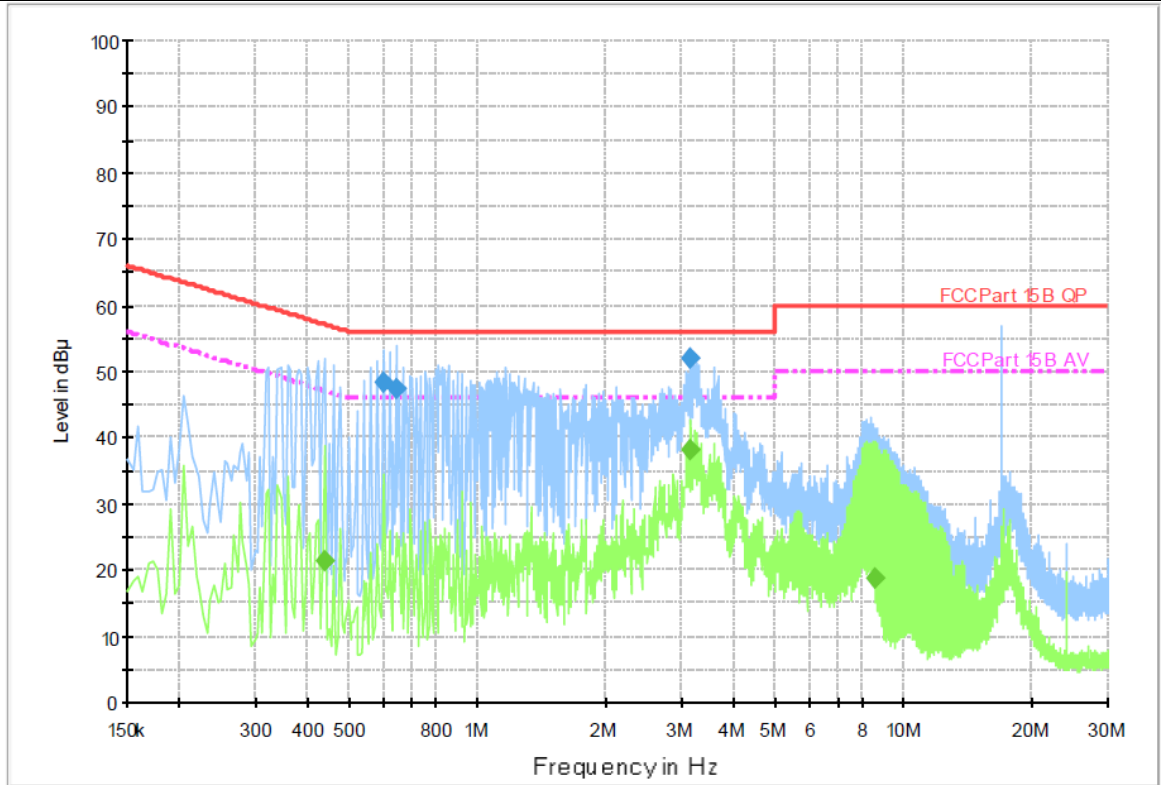

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dB μV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)	Comment
0.600000	48.4	1000.00	9.000	On	L1	9.5	7.6	56.0	
0.640500	47.4	1000.00	9.000	On	L1	9.5	8.6	56.0	
3.156000	51.8	1000.00	9.000	On	L1	9.5	4.2	56.0	

**Final Measurement Detector 2**


Frequency (MHz)	Average (dB μV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)	Comment
0.438000	21.3	1000.00	9.000	On	L1	9.5	25.8	47.1	
3.160500	38.3	1000.00	9.000	On	L1	9.5	7.7	46.0	
8.493000	18.9	1000.00	9.000	On	L1	9.6	31.1	50.0	

Emission Level = Read Level + Correct Factor





<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Neutral
<b>Remark:</b>	Only worse case is reported

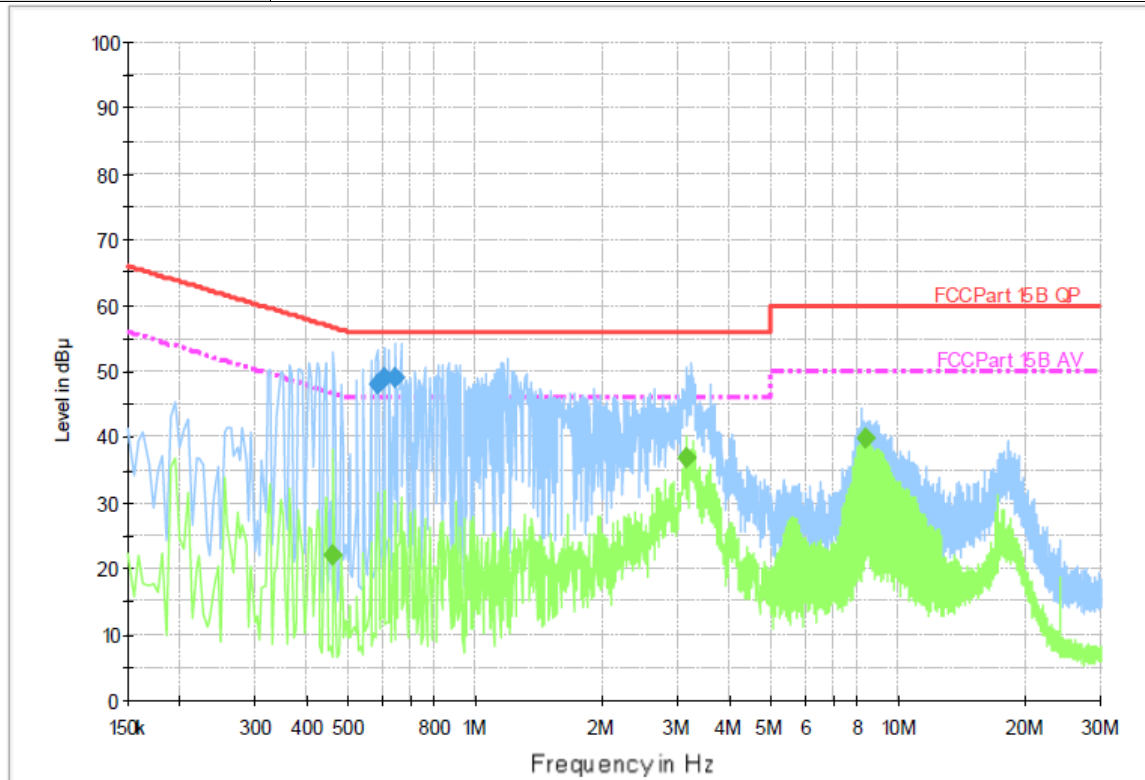

### Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dB µV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB µV)	Comment
0.586500	48.1	1000.00	9.000	On	N	9.4	7.9	56.0	
0.604500	48.9	1000.00	9.000	On	N	9.4	7.1	56.0	
0.645000	49.1	1000.00	9.000	On	N	9.4	6.9	56.0	

### Final Measurement Detector 2

Frequency (MHz)	Average (dB µV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB µV)	Comment
0.460500	22.2	1000.00	9.000	On	N	9.4	24.5	46.7	
3.156000	36.7	1000.00	9.000	On	N	9.4	9.3	46.0	
8.367000	39.7	1000.00	9.000	On	N	9.6	10.3	50.0	

Emission Level = Read Level + Correct Factor



### 3.2. Radiated Emission

#### Limit

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dB $\mu$ V/m (at 3 meters)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dB $\mu$ V/m)=20log Emission Level ( $\mu$ V/m).

#### Limits of unwanted emission out of the restricted bands

#### FCC CFR Title 47 Part 15 Subpart E Section 15.407(b)

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dB $\mu$ V/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27 (Note 2)	68.2
	10 (Note 2)	105.2
	15.6 (Note 2)	110.8
	27 (Note 2)	122.2

Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength:  $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$ , where P is the eirp (Watts).

2. According to FCC 16-24, all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn




For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>


**Test Configuration**

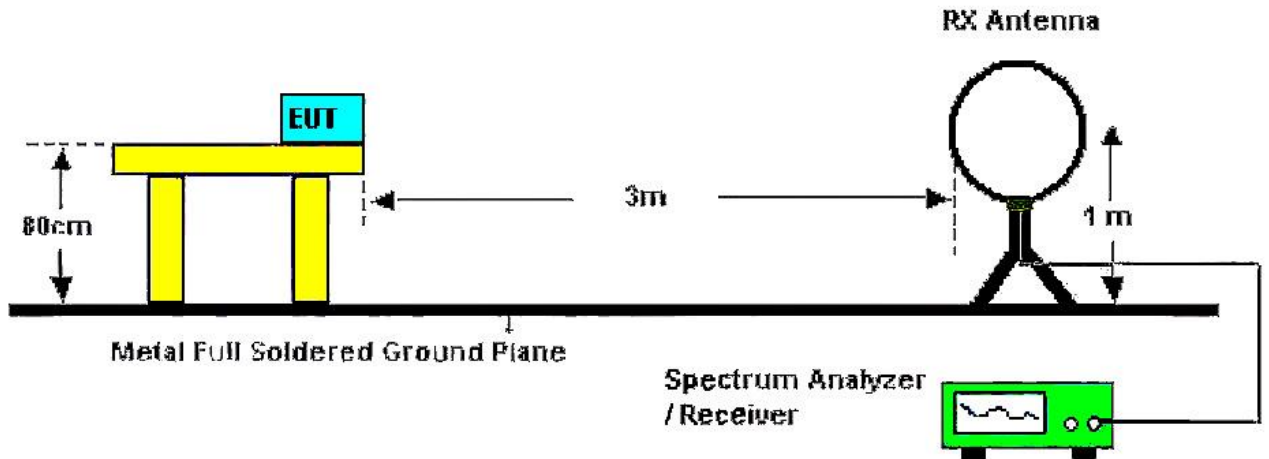

Below 30MHz Test Setup

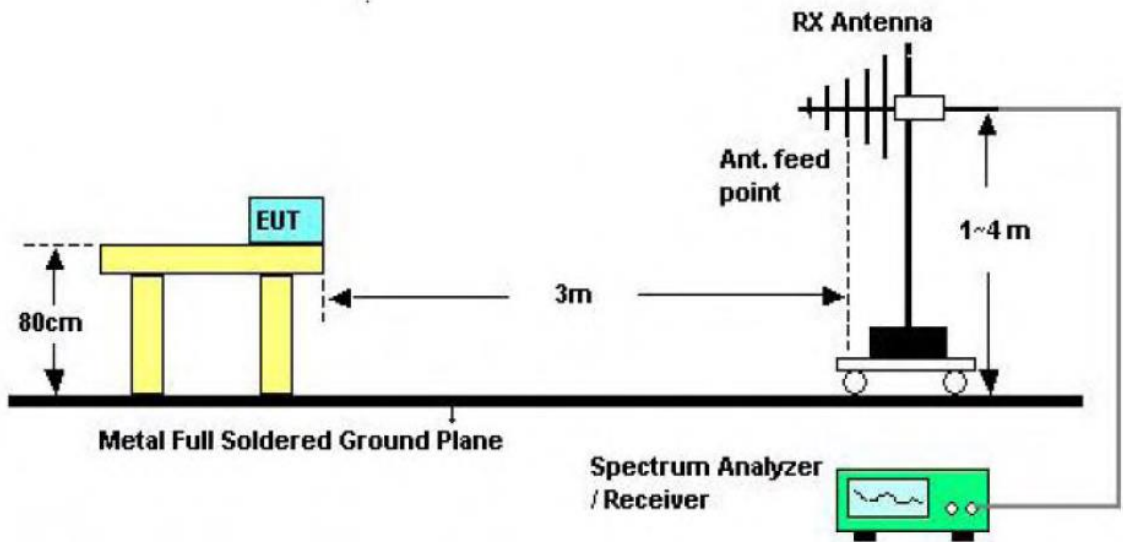

30-1000MHz Test Setup

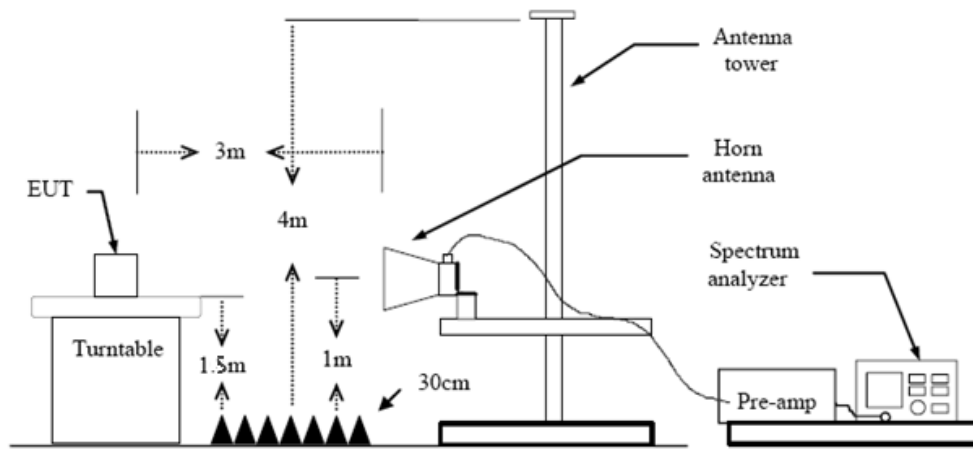

Above 1GHz Test Setup



## Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.

5. Set to the maximum power setting and enable the EUT transmit continuously.

6. Use the following spectrum analyzer settings

(1) Span shall wide enough to fully capture the emission being measured;

(2) 9k – 150kHz:

RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold

(3) 0.15M – 30MHz:

RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold

(4) 30M - 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10<sup>th</sup> harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause Duty Cycle.

## Test Mode

Please refer to the clause 2.4.

## Test Result

### **9 kHz~30 MHz**

From 9 kHz to 30 MHz: The conclusion is PASS.


Note: 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2. Pre-scan all antenna, only show the test data for worse case antenna on the test report.



30MHz-1GHz

Ant. No.	Ant 0
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	Only worse case is reported.

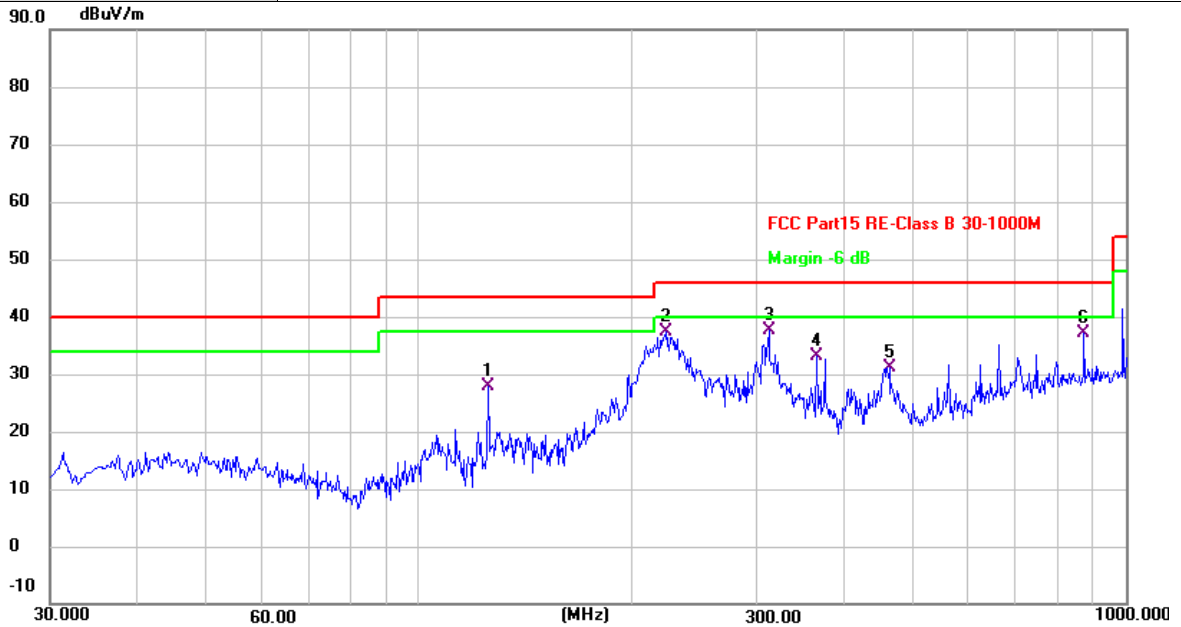

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	125.0600	46.78	-18.82	27.96	43.50	-15.54	QP
2	224.3233	52.64	-15.37	37.27	46.00	-8.73	QP
3 *	312.5933	50.97	-13.22	37.75	46.00	-8.25	QP
4	365.2967	44.94	-11.92	33.02	46.00	-12.98	QP
5	462.6200	41.05	-9.89	31.16	46.00	-14.84	QP
6	874.8700	40.19	-2.99	37.20	46.00	-8.80	QP


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11a Mode 5180MHz (U-NII-1)
<b>Remark:</b>	Only worse case is reported.

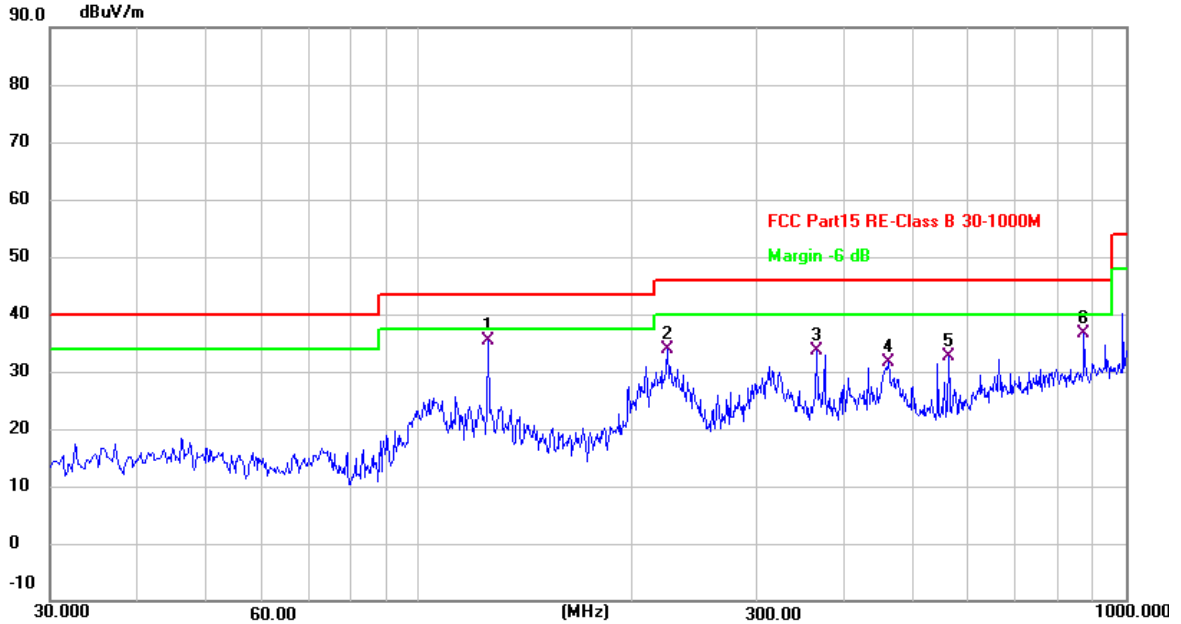

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	125.0600	54.11	-18.82	35.29	43.50	-8.21	QP
2	224.9700	49.30	-15.35	33.95	46.00	-12.05	QP
3	365.2967	45.64	-11.92	33.72	46.00	-12.28	QP
4	461.0033	41.42	-9.91	31.51	46.00	-14.49	QP
5	562.5300	40.20	-7.63	32.57	46.00	-13.43	QP
6	874.8700	39.56	-2.99	36.57	46.00	-9.43	QP

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



## Above 1GHz

<b>Ant. No.</b>	Ant 0																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11a Mode 5180MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.234</td> <td>36.18</td> <td>13.93</td> <td>50.11</td> <td>74.00</td> <td>-23.89</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10360.673</td> <td>24.34</td> <td>13.92</td> <td>38.26</td> <td>54.00</td> <td>-15.74</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10360.234	36.18	13.93	50.11	74.00	-23.89	peak	2 *	10360.673	24.34	13.92	38.26	54.00	-15.74	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10360.234	36.18	13.93	50.11	74.00	-23.89	peak																								
2 *	10360.673	24.34	13.92	38.26	54.00	-15.74	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11a Mode 5180MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10359.825</td> <td>24.77</td> <td>13.93</td> <td>38.70</td> <td>54.00</td> <td>-15.30</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10360.456</td> <td>38.30</td> <td>13.92</td> <td>52.22</td> <td>74.00</td> <td>-21.78</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10359.825	24.77	13.93	38.70	54.00	-15.30	AVG	2	10360.456	38.30	13.92	52.22	74.00	-21.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10359.825	24.77	13.93	38.70	54.00	-15.30	AVG																								
2	10360.456	38.30	13.92	52.22	74.00	-21.78	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11a Mode 5200MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10400.095</td> <td>23.64</td> <td>13.99</td> <td>37.63</td> <td>54.00</td> <td>-16.37</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10400.883</td> <td>35.74</td> <td>13.99</td> <td>49.73</td> <td>74.00</td> <td>-24.27</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10400.095	23.64	13.99	37.63	54.00	-16.37	AVG	2	10400.883	35.74	13.99	49.73	74.00	-24.27	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10400.095	23.64	13.99	37.63	54.00	-16.37	AVG																								
2	10400.883	35.74	13.99	49.73	74.00	-24.27	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11a Mode 5200MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10399.629</td> <td>25.08</td> <td>13.99</td> <td>39.07</td> <td>54.00</td> <td>-14.93</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10400.874</td> <td>38.85</td> <td>13.99</td> <td>52.84</td> <td>74.00</td> <td>-21.16</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10399.629	25.08	13.99	39.07	54.00	-14.93	AVG	2	10400.874	38.85	13.99	52.84	74.00	-21.16	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10399.629	25.08	13.99	39.07	54.00	-14.93	AVG																								
2	10400.874	38.85	13.99	52.84	74.00	-21.16	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															





<b>Ant. No.</b>	Ant 0																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11a Mode 5240MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10480.517</td> <td>23.85</td> <td>14.03</td> <td>37.88</td> <td>54.00</td> <td>-16.12</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10480.892</td> <td>36.23</td> <td>14.03</td> <td>50.26</td> <td>74.00</td> <td>-23.74</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10480.517	23.85	14.03	37.88	54.00	-16.12	AVG	2	10480.892	36.23	14.03	50.26	74.00	-23.74	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10480.517	23.85	14.03	37.88	54.00	-16.12	AVG																								
2	10480.892	36.23	14.03	50.26	74.00	-23.74	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11a Mode 5240MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10479.079</td> <td>37.99</td> <td>14.03</td> <td>52.02</td> <td>74.00</td> <td>-21.98</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10479.840</td> <td>24.63</td> <td>14.03</td> <td>38.66</td> <td>54.00</td> <td>-15.34</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10479.079	37.99	14.03	52.02	74.00	-21.98	peak	2 *	10479.840	24.63	14.03	38.66	54.00	-15.34	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10479.079	37.99	14.03	52.02	74.00	-21.98	peak																								
2 *	10479.840	24.63	14.03	38.66	54.00	-15.34	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11a Mode 5180MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.028</td> <td>38.60</td> <td>13.93</td> <td>52.53</td> <td>74.00</td> <td>-21.47</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10360.365</td> <td>26.04</td> <td>13.92</td> <td>39.96</td> <td>54.00</td> <td>-14.04</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10360.028	38.60	13.93	52.53	74.00	-21.47	peak	2 *	10360.365	26.04	13.92	39.96	54.00	-14.04	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10360.028	38.60	13.93	52.53	74.00	-21.47	peak																								
2 *	10360.365	26.04	13.92	39.96	54.00	-14.04	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11a Mode 5180MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10360.345</td> <td>24.78</td> <td>13.92</td> <td>38.70</td> <td>54.00</td> <td>-15.30</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10360.860</td> <td>40.01</td> <td>13.92</td> <td>53.93</td> <td>74.00</td> <td>-20.07</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10360.345	24.78	13.92	38.70	54.00	-15.30	AVG	2	10360.860	40.01	13.92	53.93	74.00	-20.07	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10360.345	24.78	13.92	38.70	54.00	-15.30	AVG																								
2	10360.860	40.01	13.92	53.93	74.00	-20.07	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11a Mode 5200MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.379</td> <td>39.28</td> <td>13.99</td> <td>53.27</td> <td>74.00</td> <td>-20.73</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10400.430</td> <td>25.88</td> <td>13.99</td> <td>39.87</td> <td>54.00</td> <td>-14.13</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10400.379	39.28	13.99	53.27	74.00	-20.73	peak	2 *	10400.430	25.88	13.99	39.87	54.00	-14.13	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10400.379	39.28	13.99	53.27	74.00	-20.73	peak																								
2 *	10400.430	25.88	13.99	39.87	54.00	-14.13	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11a Mode 5200MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10397.432</td> <td>38.16</td> <td>13.99</td> <td>52.15</td> <td>74.00</td> <td>-21.85</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10399.209</td> <td>24.90</td> <td>13.99</td> <td>38.89</td> <td>54.00</td> <td>-15.11</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10397.432	38.16	13.99	52.15	74.00	-21.85	peak	2 *	10399.209	24.90	13.99	38.89	54.00	-15.11	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10397.432	38.16	13.99	52.15	74.00	-21.85	peak																								
2 *	10399.209	24.90	13.99	38.89	54.00	-15.11	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11a Mode 5240MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10480.335</td> <td>26.11</td> <td>14.03</td> <td>40.14</td> <td>54.00</td> <td>-13.86</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10480.821</td> <td>39.56</td> <td>14.03</td> <td>53.59</td> <td>74.00</td> <td>-20.41</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10480.335	26.11	14.03	40.14	54.00	-13.86	AVG	2	10480.821	39.56	14.03	53.59	74.00	-20.41	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10480.335	26.11	14.03	40.14	54.00	-13.86	AVG																								
2	10480.821	39.56	14.03	53.59	74.00	-20.41	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11a Mode 5240MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10477.915</td> <td>24.82</td> <td>14.03</td> <td>38.85</td> <td>54.00</td> <td>-15.15</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10482.541</td> <td>38.90</td> <td>14.03</td> <td>52.93</td> <td>74.00</td> <td>-21.07</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10477.915	24.82	14.03	38.85	54.00	-15.15	AVG	2	10482.541	38.90	14.03	52.93	74.00	-21.07	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10477.915	24.82	14.03	38.85	54.00	-15.15	AVG																								
2	10482.541	38.90	14.03	52.93	74.00	-21.07	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10359.946</td> <td>39.52</td> <td>13.93</td> <td>53.45</td> <td>74.00</td> <td>-20.55</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10360.301</td> <td>25.99</td> <td>13.93</td> <td>39.92</td> <td>54.00</td> <td>-14.08</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10359.946	39.52	13.93	53.45	74.00	-20.55	peak	2 *	10360.301	25.99	13.93	39.92	54.00	-14.08	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10359.946	39.52	13.93	53.45	74.00	-20.55	peak																								
2 *	10360.301	25.99	13.93	39.92	54.00	-14.08	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10360.149</td> <td>24.84</td> <td>13.93</td> <td>38.77</td> <td>54.00</td> <td>-15.23</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10362.389</td> <td>38.65</td> <td>13.92</td> <td>52.57</td> <td>74.00</td> <td>-21.43</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10360.149	24.84	13.93	38.77	54.00	-15.23	AVG	2	10362.389	38.65	13.92	52.57	74.00	-21.43	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10360.149	24.84	13.93	38.77	54.00	-15.23	AVG																								
2	10362.389	38.65	13.92	52.57	74.00	-21.43	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.464</td> <td>39.49</td> <td>13.99</td> <td>53.48</td> <td>74.00</td> <td>-20.52</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10400.779</td> <td>26.14</td> <td>13.99</td> <td>40.13</td> <td>54.00</td> <td>-13.87</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10400.464	39.49	13.99	53.48	74.00	-20.52	peak	2 *	10400.779	26.14	13.99	40.13	54.00	-13.87	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10400.464	39.49	13.99	53.48	74.00	-20.52	peak																								
2 *	10400.779	26.14	13.99	40.13	54.00	-13.87	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10397.005</td> <td>25.21</td> <td>13.99</td> <td>39.20</td> <td>54.00</td> <td>-14.80</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10403.533</td> <td>38.31</td> <td>13.99</td> <td>52.30</td> <td>74.00</td> <td>-21.70</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10397.005	25.21	13.99	39.20	54.00	-14.80	AVG	2	10403.533	38.31	13.99	52.30	74.00	-21.70	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10397.005	25.21	13.99	39.20	54.00	-14.80	AVG																								
2	10403.533	38.31	13.99	52.30	74.00	-21.70	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10479.558</td> <td>25.84</td> <td>14.03</td> <td>39.87</td> <td>54.00</td> <td>-14.13</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10479.933</td> <td>38.78</td> <td>14.03</td> <td>52.81</td> <td>74.00</td> <td>-21.19</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1 *	10479.558	25.84	14.03	39.87	54.00	-14.13	AVG	2	10479.933	38.78	14.03	52.81	74.00	-21.19	peak
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1 *	10479.558	25.84	14.03	39.87	54.00	-14.13	AVG																								
2	10479.933	38.78	14.03	52.81	74.00	-21.19	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10476.016</td> <td>38.51</td> <td>14.03</td> <td>52.54</td> <td>74.00</td> <td>-21.46</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10476.787</td> <td>24.94</td> <td>14.03</td> <td>38.97</td> <td>54.00</td> <td>-15.03</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	10476.016	38.51	14.03	52.54	74.00	-21.46	peak	2 *	10476.787	24.94	14.03	38.97	54.00	-15.03	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	10476.016	38.51	14.03	52.54	74.00	-21.46	peak																								
2 *	10476.787	24.94	14.03	38.97	54.00	-15.03	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10359.617</td> <td>39.87</td> <td>13.93</td> <td>53.80</td> <td>74.00</td> <td>-20.20</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10359.886</td> <td>26.34</td> <td>13.93</td> <td>40.27</td> <td>54.00</td> <td>-13.73</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10359.617	39.87	13.93	53.80	74.00	-20.20	peak	2 *	10359.886	26.34	13.93	40.27	54.00	-13.73	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10359.617	39.87	13.93	53.80	74.00	-20.20	peak																								
2 *	10359.886	26.34	13.93	40.27	54.00	-13.73	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10357.240</td> <td>38.65</td> <td>13.93</td> <td>52.58</td> <td>74.00</td> <td>-21.42</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10358.984</td> <td>24.88</td> <td>13.93</td> <td>38.81</td> <td>54.00</td> <td>-15.19</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10357.240	38.65	13.93	52.58	74.00	-21.42	peak	2 *	10358.984	24.88	13.93	38.81	54.00	-15.19	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10357.240	38.65	13.93	52.58	74.00	-21.42	peak																								
2 *	10358.984	24.88	13.93	38.81	54.00	-15.19	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															





<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10399.500</td> <td>25.81</td> <td>13.99</td> <td>39.80</td> <td>54.00</td> <td>-14.20</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10399.545</td> <td>39.70</td> <td>13.99</td> <td>53.69</td> <td>74.00</td> <td>-20.31</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10399.500	25.81	13.99	39.80	54.00	-14.20	AVG	2	10399.545	39.70	13.99	53.69	74.00	-20.31	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10399.500	25.81	13.99	39.80	54.00	-14.20	AVG																								
2	10399.545	39.70	13.99	53.69	74.00	-20.31	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10402.115</td> <td>25.39</td> <td>13.99</td> <td>39.38</td> <td>54.00</td> <td>-14.62</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10402.203</td> <td>38.98</td> <td>13.99</td> <td>52.97</td> <td>74.00</td> <td>-21.03</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10402.115	25.39	13.99	39.38	54.00	-14.62	AVG	2	10402.203	38.98	13.99	52.97	74.00	-21.03	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10402.115	25.39	13.99	39.38	54.00	-14.62	AVG																								
2	10402.203	38.98	13.99	52.97	74.00	-21.03	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10479.013</td> <td>25.80</td> <td>14.03</td> <td>39.83</td> <td>54.00</td> <td>-14.17</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10480.332</td> <td>39.13</td> <td>14.03</td> <td>53.16</td> <td>74.00</td> <td>-20.84</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1 *	10479.013	25.80	14.03	39.83	54.00	-14.17	AVG	2	10480.332	39.13	14.03	53.16	74.00	-20.84	peak
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1 *	10479.013	25.80	14.03	39.83	54.00	-14.17	AVG																								
2	10480.332	39.13	14.03	53.16	74.00	-20.84	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10478.637</td> <td>38.26</td> <td>14.03</td> <td>52.29</td> <td>74.00</td> <td>-21.71</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10483.488</td> <td>24.63</td> <td>14.03</td> <td>38.66</td> <td>54.00</td> <td>-15.34</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	10478.637	38.26	14.03	52.29	74.00	-21.71	peak	2 *	10483.488	24.63	14.03	38.66	54.00	-15.34	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	10478.637	38.26	14.03	52.29	74.00	-21.71	peak																								
2 *	10483.488	24.63	14.03	38.66	54.00	-15.34	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5180MHz (U-NII-1) 242/61																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10360.409</td> <td>25.49</td> <td>13.92</td> <td>39.41</td> <td>54.00</td> <td>-14.59</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10360.621</td> <td>38.86</td> <td>13.92</td> <td>52.78</td> <td>74.00</td> <td>-21.22</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10360.409	25.49	13.92	39.41	54.00	-14.59	AVG	2	10360.621	38.86	13.92	52.78	74.00	-21.22	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10360.409	25.49	13.92	39.41	54.00	-14.59	AVG																								
2	10360.621	38.86	13.92	52.78	74.00	-21.22	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5180MHz (U-NII-1) 242/61																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10361.835</td> <td>25.45</td> <td>13.92</td> <td>39.37</td> <td>54.00</td> <td>-14.63</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10362.509</td> <td>38.40</td> <td>13.92</td> <td>52.32</td> <td>74.00</td> <td>-21.68</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10361.835	25.45	13.92	39.37	54.00	-14.63	AVG	2	10362.509	38.40	13.92	52.32	74.00	-21.68	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10361.835	25.45	13.92	39.37	54.00	-14.63	AVG																								
2	10362.509	38.40	13.92	52.32	74.00	-21.68	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5200MHz (U-NII-1) 242/61																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10399.037</td> <td>38.72</td> <td>13.99</td> <td>52.71</td> <td>74.00</td> <td>-21.29</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10400.350</td> <td>26.39</td> <td>13.99</td> <td>40.38</td> <td>54.00</td> <td>-13.62</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10399.037	38.72	13.99	52.71	74.00	-21.29	peak	2 *	10400.350	26.39	13.99	40.38	54.00	-13.62	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10399.037	38.72	13.99	52.71	74.00	-21.29	peak																								
2 *	10400.350	26.39	13.99	40.38	54.00	-13.62	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5200MHz (U-NII-1) 242/61																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10397.371</td> <td>25.11</td> <td>13.99</td> <td>39.10</td> <td>54.00</td> <td>-14.90</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10398.291</td> <td>38.28</td> <td>13.99</td> <td>52.27</td> <td>74.00</td> <td>-21.73</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10397.371	25.11	13.99	39.10	54.00	-14.90	AVG	2	10398.291	38.28	13.99	52.27	74.00	-21.73	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10397.371	25.11	13.99	39.10	54.00	-14.90	AVG																								
2	10398.291	38.28	13.99	52.27	74.00	-21.73	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5240MHz (U-NII-1) 242/61																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10479.499</td> <td>25.76</td> <td>14.03</td> <td>39.79</td> <td>54.00</td> <td>-14.21</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10480.467</td> <td>39.51</td> <td>14.03</td> <td>53.54</td> <td>74.00</td> <td>-20.46</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1 *	10479.499	25.76	14.03	39.79	54.00	-14.21	AVG	2	10480.467	39.51	14.03	53.54	74.00	-20.46	peak
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1 *	10479.499	25.76	14.03	39.79	54.00	-14.21	AVG																								
2	10480.467	39.51	14.03	53.54	74.00	-20.46	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5240MHz (U-NII-1) 242/61																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10476.944</td> <td>38.95</td> <td>14.03</td> <td>52.98</td> <td>74.00</td> <td>-21.02</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10478.315</td> <td>24.75</td> <td>14.03</td> <td>38.78</td> <td>54.00</td> <td>-15.22</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	10476.944	38.95	14.03	52.98	74.00	-21.02	peak	2 *	10478.315	24.75	14.03	38.78	54.00	-15.22	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	10476.944	38.95	14.03	52.98	74.00	-21.02	peak																								
2 *	10478.315	24.75	14.03	38.78	54.00	-15.22	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10379.598</td> <td>25.89</td> <td>13.96</td> <td>39.85</td> <td>54.00</td> <td>-14.15</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10380.657</td> <td>39.17</td> <td>13.96</td> <td>53.13</td> <td>74.00</td> <td>-20.87</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10379.598	25.89	13.96	39.85	54.00	-14.15	AVG	2	10380.657	39.17	13.96	53.13	74.00	-20.87	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10379.598	25.89	13.96	39.85	54.00	-14.15	AVG																								
2	10380.657	39.17	13.96	53.13	74.00	-20.87	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10378.232</td> <td>25.01</td> <td>13.96</td> <td>38.97</td> <td>54.00</td> <td>-15.03</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10382.736</td> <td>39.21</td> <td>13.96</td> <td>53.17</td> <td>74.00</td> <td>-20.83</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10378.232	25.01	13.96	38.97	54.00	-15.03	AVG	2	10382.736	39.21	13.96	53.17	74.00	-20.83	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10378.232	25.01	13.96	38.97	54.00	-15.03	AVG																								
2	10382.736	39.21	13.96	53.17	74.00	-20.83	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10459.117</td> <td>25.74</td> <td>14.02</td> <td>39.76</td> <td>54.00</td> <td>-14.24</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10460.930</td> <td>39.23</td> <td>14.02</td> <td>53.25</td> <td>74.00</td> <td>-20.75</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10459.117	25.74	14.02	39.76	54.00	-14.24	AVG	2	10460.930	39.23	14.02	53.25	74.00	-20.75	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10459.117	25.74	14.02	39.76	54.00	-14.24	AVG																								
2	10460.930	39.23	14.02	53.25	74.00	-20.75	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10458.629</td> <td>38.96</td> <td>14.02</td> <td>52.98</td> <td>74.00</td> <td>-21.02</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10459.005</td> <td>24.82</td> <td>14.02</td> <td>38.84</td> <td>54.00</td> <td>-15.16</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10458.629	38.96	14.02	52.98	74.00	-21.02	peak	2 *	10459.005	24.82	14.02	38.84	54.00	-15.16	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10458.629	38.96	14.02	52.98	74.00	-21.02	peak																								
2 *	10459.005	24.82	14.02	38.84	54.00	-15.16	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10379.340</td> <td>39.06</td> <td>13.96</td> <td>53.02</td> <td>74.00</td> <td>-20.98</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10380.257</td> <td>25.83</td> <td>13.96</td> <td>39.79</td> <td>54.00</td> <td>-14.21</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10379.340	39.06	13.96	53.02	74.00	-20.98	peak	2 *	10380.257	25.83	13.96	39.79	54.00	-14.21	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10379.340	39.06	13.96	53.02	74.00	-20.98	peak																								
2 *	10380.257	25.83	13.96	39.79	54.00	-14.21	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10378.827</td> <td>38.93</td> <td>13.96</td> <td>52.89</td> <td>74.00</td> <td>-21.11</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10381.437</td> <td>25.21</td> <td>13.96</td> <td>39.17</td> <td>54.00</td> <td>-14.83</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10378.827	38.93	13.96	52.89	74.00	-21.11	peak	2 *	10381.437	25.21	13.96	39.17	54.00	-14.83	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10378.827	38.93	13.96	52.89	74.00	-21.11	peak																								
2 *	10381.437	25.21	13.96	39.17	54.00	-14.83	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															





<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.172</td> <td>38.68</td> <td>14.02</td> <td>52.70</td> <td>74.00</td> <td>-21.30</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10460.477</td> <td>25.43</td> <td>14.02</td> <td>39.45</td> <td>54.00</td> <td>-14.55</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10460.172	38.68	14.02	52.70	74.00	-21.30	peak	2 *	10460.477	25.43	14.02	39.45	54.00	-14.55	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10460.172	38.68	14.02	52.70	74.00	-21.30	peak																								
2 *	10460.477	25.43	14.02	39.45	54.00	-14.55	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10457.965</td> <td>25.08</td> <td>14.02</td> <td>39.10</td> <td>54.00</td> <td>-14.90</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10458.165</td> <td>38.04</td> <td>14.02</td> <td>52.06</td> <td>74.00</td> <td>-21.94</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10457.965	25.08	14.02	39.10	54.00	-14.90	AVG	2	10458.165	38.04	14.02	52.06	74.00	-21.94	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10457.965	25.08	14.02	39.10	54.00	-14.90	AVG																								
2	10458.165	38.04	14.02	52.06	74.00	-21.94	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1) 484/65																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10379.785</td> <td>25.81</td> <td>13.96</td> <td>39.77</td> <td>54.00</td> <td>-14.23</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10379.853</td> <td>40.02</td> <td>13.96</td> <td>53.98</td> <td>74.00</td> <td>-20.02</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10379.785	25.81	13.96	39.77	54.00	-14.23	AVG	2	10379.853	40.02	13.96	53.98	74.00	-20.02	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10379.785	25.81	13.96	39.77	54.00	-14.23	AVG																								
2	10379.853	40.02	13.96	53.98	74.00	-20.02	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1) 484/65																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.757</td> <td>39.17</td> <td>13.96</td> <td>53.13</td> <td>74.00</td> <td>-20.87</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10381.019</td> <td>25.53</td> <td>13.96</td> <td>39.49</td> <td>54.00</td> <td>-14.51</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10380.757	39.17	13.96	53.13	74.00	-20.87	peak	2 *	10381.019	25.53	13.96	39.49	54.00	-14.51	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10380.757	39.17	13.96	53.13	74.00	-20.87	peak																								
2 *	10381.019	25.53	13.96	39.49	54.00	-14.51	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5230MHz (U-NII-1) 484/65																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10459.212</td> <td>39.14</td> <td>14.02</td> <td>53.16</td> <td>74.00</td> <td>-20.84</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10459.916</td> <td>25.47</td> <td>14.02</td> <td>39.49</td> <td>54.00</td> <td>-14.51</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10459.212	39.14	14.02	53.16	74.00	-20.84	peak	2 *	10459.916	25.47	14.02	39.49	54.00	-14.51	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10459.212	39.14	14.02	53.16	74.00	-20.84	peak																								
2 *	10459.916	25.47	14.02	39.49	54.00	-14.51	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5230MHz (U-NII-1) 484/65																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10459.329</td> <td>38.57</td> <td>14.02</td> <td>52.59</td> <td>74.00</td> <td>-21.41</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10460.637</td> <td>24.86</td> <td>14.02</td> <td>38.88</td> <td>54.00</td> <td>-15.12</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10459.329	38.57	14.02	52.59	74.00	-21.41	peak	2 *	10460.637	24.86	14.02	38.88	54.00	-15.12	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10459.329	38.57	14.02	52.59	74.00	-21.41	peak																								
2 *	10460.637	24.86	14.02	38.88	54.00	-15.12	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10419.238</td> <td>39.15</td> <td>13.99</td> <td>53.14</td> <td>74.00</td> <td>-20.86</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>10420.009</td> <td>26.01</td> <td>13.99</td> <td>40.00</td> <td>54.00</td> <td>-14.00</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	10419.238	39.15	13.99	53.14	74.00	-20.86	peak	2 *	10420.009	26.01	13.99	40.00	54.00	-14.00	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	10419.238	39.15	13.99	53.14	74.00	-20.86	peak																								
2 *	10420.009	26.01	13.99	40.00	54.00	-14.00	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10417.131</td> <td>25.53</td> <td>13.99</td> <td>39.52</td> <td>54.00</td> <td>-14.48</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10423.048</td> <td>38.43</td> <td>13.99</td> <td>52.42</td> <td>74.00</td> <td>-21.58</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10417.131	25.53	13.99	39.52	54.00	-14.48	AVG	2	10423.048	38.43	13.99	52.42	74.00	-21.58	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10417.131	25.53	13.99	39.52	54.00	-14.48	AVG																								
2	10423.048	38.43	13.99	52.42	74.00	-21.58	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 5210MHz (U-NII-1) 996/67																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10419.257</td> <td>25.95</td> <td>13.99</td> <td>39.94</td> <td>54.00</td> <td>-14.06</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10419.347</td> <td>39.36</td> <td>13.99</td> <td>53.35</td> <td>74.00</td> <td>-20.65</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10419.257	25.95	13.99	39.94	54.00	-14.06	AVG	2	10419.347	39.36	13.99	53.35	74.00	-20.65	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10419.257	25.95	13.99	39.94	54.00	-14.06	AVG																								
2	10419.347	39.36	13.99	53.35	74.00	-20.65	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 5210MHz (U-NII-1) 996/67																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>10419.221</td> <td>25.35</td> <td>13.99</td> <td>39.34</td> <td>54.00</td> <td>-14.66</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>10420.573</td> <td>38.53</td> <td>13.99</td> <td>52.52</td> <td>74.00</td> <td>-21.48</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	10419.221	25.35	13.99	39.34	54.00	-14.66	AVG	2	10420.573	38.53	13.99	52.52	74.00	-21.48	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	10419.221	25.35	13.99	39.34	54.00	-14.66	AVG																								
2	10420.573	38.53	13.99	52.52	74.00	-21.48	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11a Mode 5745MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11489.616</td> <td>25.53</td> <td>15.09</td> <td>40.62</td> <td>54.00</td> <td>-13.38</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11490.759</td> <td>39.28</td> <td>15.09</td> <td>54.37</td> <td>74.00</td> <td>-19.63</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11489.616	25.53	15.09	40.62	54.00	-13.38	AVG	2	11490.759	39.28	15.09	54.37	74.00	-19.63	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	11489.616	25.53	15.09	40.62	54.00	-13.38	AVG																								
2	11490.759	39.28	15.09	54.37	74.00	-19.63	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11a Mode 5745MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11489.025</td> <td>24.60</td> <td>15.08</td> <td>39.68</td> <td>54.00</td> <td>-14.32</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11489.466</td> <td>38.13</td> <td>15.09</td> <td>53.22</td> <td>74.00</td> <td>-20.78</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11489.025	24.60	15.08	39.68	54.00	-14.32	AVG	2	11489.466	38.13	15.09	53.22	74.00	-20.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	11489.025	24.60	15.08	39.68	54.00	-14.32	AVG																								
2	11489.466	38.13	15.09	53.22	74.00	-20.78	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11a Mode 5785MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.736</td> <td>39.06</td> <td>15.23</td> <td>54.29</td> <td>74.00</td> <td>-19.71</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11570.945</td> <td>26.07</td> <td>15.23</td> <td>41.30</td> <td>54.00</td> <td>-12.70</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	11570.736	39.06	15.23	54.29	74.00	-19.71	peak	2 *	11570.945	26.07	15.23	41.30	54.00	-12.70	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	11570.736	39.06	15.23	54.29	74.00	-19.71	peak																								
2 *	11570.945	26.07	15.23	41.30	54.00	-12.70	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11a Mode 5785MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11569.571</td> <td>24.76</td> <td>15.23</td> <td>39.99</td> <td>54.00</td> <td>-14.01</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11570.507</td> <td>38.77</td> <td>15.23</td> <td>54.00</td> <td>74.00</td> <td>-20.00</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1 *	11569.571	24.76	15.23	39.99	54.00	-14.01	AVG	2	11570.507	38.77	15.23	54.00	74.00	-20.00	peak
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1 *	11569.571	24.76	15.23	39.99	54.00	-14.01	AVG																								
2	11570.507	38.77	15.23	54.00	74.00	-20.00	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11a Mode 5825MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11649.961</td> <td>26.20</td> <td>15.28</td> <td>41.48</td> <td>54.00</td> <td>-12.52</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11650.493</td> <td>38.40</td> <td>15.29</td> <td>53.69</td> <td>74.00</td> <td>-20.31</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11649.961	26.20	15.28	41.48	54.00	-12.52	AVG	2	11650.493	38.40	15.29	53.69	74.00	-20.31	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	11649.961	26.20	15.28	41.48	54.00	-12.52	AVG																								
2	11650.493	38.40	15.29	53.69	74.00	-20.31	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11a Mode 5825MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11649.779</td> <td>39.14</td> <td>15.28</td> <td>54.42</td> <td>74.00</td> <td>-19.58</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11650.886</td> <td>24.84</td> <td>15.29</td> <td>40.13</td> <td>54.00</td> <td>-13.87</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11649.779	39.14	15.28	54.42	74.00	-19.58	peak	2 *	11650.886	24.84	15.29	40.13	54.00	-13.87	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11649.779	39.14	15.28	54.42	74.00	-19.58	peak																								
2 *	11650.886	24.84	15.29	40.13	54.00	-13.87	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															





<b>Ant. No.</b>	Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11a Mode 5745MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11489.649</td> <td>25.67</td> <td>15.09</td> <td>40.76</td> <td>54.00</td> <td>-13.24</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11489.678</td> <td>38.88</td> <td>15.09</td> <td>53.97</td> <td>74.00</td> <td>-20.03</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11489.649	25.67	15.09	40.76	54.00	-13.24	AVG	2	11489.678	38.88	15.09	53.97	74.00	-20.03	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	11489.649	25.67	15.09	40.76	54.00	-13.24	AVG																								
2	11489.678	38.88	15.09	53.97	74.00	-20.03	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11a Mode 5745MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11490.661</td> <td>24.62</td> <td>15.09</td> <td>39.71</td> <td>54.00</td> <td>-14.29</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11492.349</td> <td>39.39</td> <td>15.10</td> <td>54.49</td> <td>74.00</td> <td>-19.51</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11490.661	24.62	15.09	39.71	54.00	-14.29	AVG	2	11492.349	39.39	15.10	54.49	74.00	-19.51	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	11490.661	24.62	15.09	39.71	54.00	-14.29	AVG																								
2	11492.349	39.39	15.10	54.49	74.00	-19.51	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11a Mode 5785MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11569.494</td> <td>39.30</td> <td>15.23</td> <td>54.53</td> <td>74.00</td> <td>-19.47</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11570.536</td> <td>26.10</td> <td>15.23</td> <td>41.33</td> <td>54.00</td> <td>-12.67</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11569.494	39.30	15.23	54.53	74.00	-19.47	peak	2 *	11570.536	26.10	15.23	41.33	54.00	-12.67	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11569.494	39.30	15.23	54.53	74.00	-19.47	peak																								
2 *	11570.536	26.10	15.23	41.33	54.00	-12.67	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11a Mode 5785MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11566.165</td> <td>37.77</td> <td>15.23</td> <td>53.00</td> <td>74.00</td> <td>-21.00</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11572.600</td> <td>25.50</td> <td>15.23</td> <td>40.73</td> <td>54.00</td> <td>-13.27</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11566.165	37.77	15.23	53.00	74.00	-21.00	peak	2 *	11572.600	25.50	15.23	40.73	54.00	-13.27	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11566.165	37.77	15.23	53.00	74.00	-21.00	peak																								
2 *	11572.600	25.50	15.23	40.73	54.00	-13.27	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11a Mode 5825MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11649.667</td> <td>39.44</td> <td>15.28</td> <td>54.72</td> <td>74.00</td> <td>-19.28</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11649.822</td> <td>25.82</td> <td>15.28</td> <td>41.10</td> <td>54.00</td> <td>-12.90</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	11649.667	39.44	15.28	54.72	74.00	-19.28	peak	2 *	11649.822	25.82	15.28	41.10	54.00	-12.90	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	11649.667	39.44	15.28	54.72	74.00	-19.28	peak																								
2 *	11649.822	25.82	15.28	41.10	54.00	-12.90	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11a Mode 5825MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11651.861</td> <td>24.64</td> <td>15.29</td> <td>39.93</td> <td>54.00</td> <td>-14.07</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11653.491</td> <td>38.08</td> <td>15.28</td> <td>53.36</td> <td>74.00</td> <td>-20.64</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1 *	11651.861	24.64	15.29	39.93	54.00	-14.07	AVG	2	11653.491	38.08	15.28	53.36	74.00	-20.64	peak
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1 *	11651.861	24.64	15.29	39.93	54.00	-14.07	AVG																								
2	11653.491	38.08	15.28	53.36	74.00	-20.64	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11490.235</td> <td>25.92</td> <td>15.09</td> <td>41.01</td> <td>54.00</td> <td>-12.99</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11490.699</td> <td>39.00</td> <td>15.09</td> <td>54.09</td> <td>74.00</td> <td>-19.91</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11490.235	25.92	15.09	41.01	54.00	-12.99	AVG	2	11490.699	39.00	15.09	54.09	74.00	-19.91	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	11490.235	25.92	15.09	41.01	54.00	-12.99	AVG																								
2	11490.699	39.00	15.09	54.09	74.00	-19.91	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11492.288</td> <td>39.97</td> <td>15.10</td> <td>55.07</td> <td>74.00</td> <td>-18.93</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11493.597</td> <td>24.45</td> <td>15.10</td> <td>39.55</td> <td>54.00</td> <td>-14.45</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11492.288	39.97	15.10	55.07	74.00	-18.93	peak	2 *	11493.597	24.45	15.10	39.55	54.00	-14.45	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11492.288	39.97	15.10	55.07	74.00	-18.93	peak																								
2 *	11493.597	24.45	15.10	39.55	54.00	-14.45	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11569.321</td> <td>39.17</td> <td>15.23</td> <td>54.40</td> <td>74.00</td> <td>-19.60</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11570.431</td> <td>25.92</td> <td>15.23</td> <td>41.15</td> <td>54.00</td> <td>-12.85</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11569.321	39.17	15.23	54.40	74.00	-19.60	peak	2 *	11570.431	25.92	15.23	41.15	54.00	-12.85	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11569.321	39.17	15.23	54.40	74.00	-19.60	peak																								
2 *	11570.431	25.92	15.23	41.15	54.00	-12.85	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11569.403</td> <td>38.67</td> <td>15.23</td> <td>53.90</td> <td>74.00</td> <td>-20.10</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11570.272</td> <td>25.16</td> <td>15.23</td> <td>40.39</td> <td>54.00</td> <td>-13.61</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11569.403	38.67	15.23	53.90	74.00	-20.10	peak	2 *	11570.272	25.16	15.23	40.39	54.00	-13.61	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11569.403	38.67	15.23	53.90	74.00	-20.10	peak																								
2 *	11570.272	25.16	15.23	40.39	54.00	-13.61	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11649.583</td> <td>25.76</td> <td>15.28</td> <td>41.04</td> <td>54.00</td> <td>-12.96</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11649.648</td> <td>39.11</td> <td>15.28</td> <td>54.39</td> <td>74.00</td> <td>-19.61</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1 *	11649.583	25.76	15.28	41.04	54.00	-12.96	AVG	2	11649.648	39.11	15.28	54.39	74.00	-19.61	peak
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1 *	11649.583	25.76	15.28	41.04	54.00	-12.96	AVG																								
2	11649.648	39.11	15.28	54.39	74.00	-19.61	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11649.405</td> <td>24.99</td> <td>15.28</td> <td>40.27</td> <td>54.00</td> <td>-13.73</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11651.677</td> <td>39.22</td> <td>15.29</td> <td>54.51</td> <td>74.00</td> <td>-19.49</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1 *	11649.405	24.99	15.28	40.27	54.00	-13.73	AVG	2	11651.677	39.22	15.29	54.51	74.00	-19.49	peak
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1 *	11649.405	24.99	15.28	40.27	54.00	-13.73	AVG																								
2	11651.677	39.22	15.29	54.51	74.00	-19.49	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11489.156</td> <td>39.09</td> <td>15.09</td> <td>54.18</td> <td>74.00</td> <td>-19.82</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11490.291</td> <td>25.49</td> <td>15.09</td> <td>40.58</td> <td>54.00</td> <td>-13.42</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11489.156	39.09	15.09	54.18	74.00	-19.82	peak	2 *	11490.291	25.49	15.09	40.58	54.00	-13.42	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11489.156	39.09	15.09	54.18	74.00	-19.82	peak																								
2 *	11490.291	25.49	15.09	40.58	54.00	-13.42	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11487.469</td> <td>38.09</td> <td>15.08</td> <td>53.17</td> <td>74.00</td> <td>-20.83</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11488.568</td> <td>25.02</td> <td>15.08</td> <td>40.10</td> <td>54.00</td> <td>-13.90</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11487.469	38.09	15.08	53.17	74.00	-20.83	peak	2 *	11488.568	25.02	15.08	40.10	54.00	-13.90	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11487.469	38.09	15.08	53.17	74.00	-20.83	peak																								
2 *	11488.568	25.02	15.08	40.10	54.00	-13.90	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11569.401</td> <td>39.39</td> <td>15.23</td> <td>54.62</td> <td>74.00</td> <td>-19.38</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11570.584</td> <td>26.16</td> <td>15.23</td> <td>41.39</td> <td>54.00</td> <td>-12.61</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11569.401	39.39	15.23	54.62	74.00	-19.38	peak	2 *	11570.584	26.16	15.23	41.39	54.00	-12.61	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11569.401	39.39	15.23	54.62	74.00	-19.38	peak																								
2 *	11570.584	26.16	15.23	41.39	54.00	-12.61	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11567.211</td> <td>25.04</td> <td>15.23</td> <td>40.27</td> <td>54.00</td> <td>-13.73</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11569.107</td> <td>38.24</td> <td>15.23</td> <td>53.47</td> <td>74.00</td> <td>-20.53</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11567.211	25.04	15.23	40.27	54.00	-13.73	AVG	2	11569.107	38.24	15.23	53.47	74.00	-20.53	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	11567.211	25.04	15.23	40.27	54.00	-13.73	AVG																								
2	11569.107	38.24	15.23	53.47	74.00	-20.53	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															





<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11649.509</td> <td>25.77</td> <td>15.28</td> <td>41.05</td> <td>54.00</td> <td>-12.95</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11650.591</td> <td>38.86</td> <td>15.29</td> <td>54.15</td> <td>74.00</td> <td>-19.85</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1 *	11649.509	25.77	15.28	41.05	54.00	-12.95	AVG	2	11650.591	38.86	15.29	54.15	74.00	-19.85	peak
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1 *	11649.509	25.77	15.28	41.05	54.00	-12.95	AVG																								
2	11650.591	38.86	15.29	54.15	74.00	-19.85	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11646.581</td> <td>24.71</td> <td>15.29</td> <td>40.00</td> <td>54.00</td> <td>-14.00</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11651.344</td> <td>38.54</td> <td>15.29</td> <td>53.83</td> <td>74.00</td> <td>-20.17</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1 *	11646.581	24.71	15.29	40.00	54.00	-14.00	AVG	2	11651.344	38.54	15.29	53.83	74.00	-20.17	peak
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1 *	11646.581	24.71	15.29	40.00	54.00	-14.00	AVG																								
2	11651.344	38.54	15.29	53.83	74.00	-20.17	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) 242/61																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11489.654</td> <td>38.29</td> <td>15.09</td> <td>53.38</td> <td>74.00</td> <td>-20.62</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11489.918</td> <td>25.37</td> <td>15.09</td> <td>40.46</td> <td>54.00</td> <td>-13.54</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11489.654	38.29	15.09	53.38	74.00	-20.62	peak	2 *	11489.918	25.37	15.09	40.46	54.00	-13.54	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11489.654	38.29	15.09	53.38	74.00	-20.62	peak																								
2 *	11489.918	25.37	15.09	40.46	54.00	-13.54	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) 242/61																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11487.635</td> <td>38.49</td> <td>15.08</td> <td>53.57</td> <td>74.00</td> <td>-20.43</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11490.208</td> <td>25.12</td> <td>15.09</td> <td>40.21</td> <td>54.00</td> <td>-13.79</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11487.635	38.49	15.08	53.57	74.00	-20.43	peak	2 *	11490.208	25.12	15.09	40.21	54.00	-13.79	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11487.635	38.49	15.08	53.57	74.00	-20.43	peak																								
2 *	11490.208	25.12	15.09	40.21	54.00	-13.79	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5785MHz (U-NII-3) 242/61																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11569.929</td> <td>26.10</td> <td>15.23</td> <td>41.33</td> <td>54.00</td> <td>-12.67</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11570.531</td> <td>39.22</td> <td>15.23</td> <td>54.45</td> <td>74.00</td> <td>-19.55</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11569.929	26.10	15.23	41.33	54.00	-12.67	AVG	2	11570.531	39.22	15.23	54.45	74.00	-19.55	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	11569.929	26.10	15.23	41.33	54.00	-12.67	AVG																								
2	11570.531	39.22	15.23	54.45	74.00	-19.55	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5785MHz (U-NII-3) 242/61																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11567.589</td> <td>39.42</td> <td>15.23</td> <td>54.65</td> <td>74.00</td> <td>-19.35</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11568.939</td> <td>25.33</td> <td>15.23</td> <td>40.56</td> <td>54.00</td> <td>-13.44</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11567.589	39.42	15.23	54.65	74.00	-19.35	peak	2 *	11568.939	25.33	15.23	40.56	54.00	-13.44	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11567.589	39.42	15.23	54.65	74.00	-19.35	peak																								
2 *	11568.939	25.33	15.23	40.56	54.00	-13.44	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) 242/61																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11649.411</td> <td>38.85</td> <td>15.28</td> <td>54.13</td> <td>74.00</td> <td>-19.87</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11650.213</td> <td>25.90</td> <td>15.29</td> <td>41.19</td> <td>54.00</td> <td>-12.81</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11649.411	38.85	15.28	54.13	74.00	-19.87	peak	2 *	11650.213	25.90	15.29	41.19	54.00	-12.81	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11649.411	38.85	15.28	54.13	74.00	-19.87	peak																								
2 *	11650.213	25.90	15.29	41.19	54.00	-12.81	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) 242/61																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11648.528</td> <td>38.29</td> <td>15.28</td> <td>53.57</td> <td>74.00</td> <td>-20.43</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11651.315</td> <td>24.91</td> <td>15.29</td> <td>40.20</td> <td>54.00</td> <td>-13.80</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11648.528	38.29	15.28	53.57	74.00	-20.43	peak	2 *	11651.315	24.91	15.29	40.20	54.00	-13.80	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11648.528	38.29	15.28	53.57	74.00	-20.43	peak																								
2 *	11651.315	24.91	15.29	40.20	54.00	-13.80	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11509.813</td> <td>39.45</td> <td>15.12</td> <td>54.57</td> <td>74.00</td> <td>-19.43</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11510.793</td> <td>25.42</td> <td>15.12</td> <td>40.54</td> <td>54.00</td> <td>-13.46</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	11509.813	39.45	15.12	54.57	74.00	-19.43	peak	2 *	11510.793	25.42	15.12	40.54	54.00	-13.46	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	11509.813	39.45	15.12	54.57	74.00	-19.43	peak																								
2 *	11510.793	25.42	15.12	40.54	54.00	-13.46	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11513.752</td> <td>39.02</td> <td>15.13</td> <td>54.15</td> <td>74.00</td> <td>-19.85</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11513.952</td> <td>24.66</td> <td>15.13</td> <td>39.79</td> <td>54.00</td> <td>-14.21</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	11513.752	39.02	15.13	54.15	74.00	-19.85	peak	2 *	11513.952	24.66	15.13	39.79	54.00	-14.21	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	11513.752	39.02	15.13	54.15	74.00	-19.85	peak																								
2 *	11513.952	24.66	15.13	39.79	54.00	-14.21	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11589.791</td> <td>39.69</td> <td>15.27</td> <td>54.96</td> <td>74.00</td> <td>-19.04</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11590.714</td> <td>25.68</td> <td>15.27</td> <td>40.95</td> <td>54.00</td> <td>-13.05</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	11589.791	39.69	15.27	54.96	74.00	-19.04	peak	2 *	11590.714	25.68	15.27	40.95	54.00	-13.05	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	11589.791	39.69	15.27	54.96	74.00	-19.04	peak																								
2 *	11590.714	25.68	15.27	40.95	54.00	-13.05	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11586.259</td> <td>24.93</td> <td>15.26</td> <td>40.19</td> <td>54.00</td> <td>-13.81</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11587.941</td> <td>38.68</td> <td>15.26</td> <td>53.94</td> <td>74.00</td> <td>-20.06</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1 *	11586.259	24.93	15.26	40.19	54.00	-13.81	AVG	2	11587.941	38.68	15.26	53.94	74.00	-20.06	peak
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1 *	11586.259	24.93	15.26	40.19	54.00	-13.81	AVG																								
2	11587.941	38.68	15.26	53.94	74.00	-20.06	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11509.944</td> <td>38.26</td> <td>15.12</td> <td>53.38</td> <td>74.00</td> <td>-20.62</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11510.055</td> <td>25.15</td> <td>15.12</td> <td>40.27</td> <td>54.00</td> <td>-13.73</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11509.944	38.26	15.12	53.38	74.00	-20.62	peak	2 *	11510.055	25.15	15.12	40.27	54.00	-13.73	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11509.944	38.26	15.12	53.38	74.00	-20.62	peak																								
2 *	11510.055	25.15	15.12	40.27	54.00	-13.73	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11507.688</td> <td>24.67</td> <td>15.11</td> <td>39.78</td> <td>54.00</td> <td>-14.22</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11512.864</td> <td>37.68</td> <td>15.13</td> <td>52.81</td> <td>74.00</td> <td>-21.19</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11507.688	24.67	15.11	39.78	54.00	-14.22	AVG	2	11512.864	37.68	15.13	52.81	74.00	-21.19	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	11507.688	24.67	15.11	39.78	54.00	-14.22	AVG																								
2	11512.864	37.68	15.13	52.81	74.00	-21.19	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11589.656</td> <td>25.54</td> <td>15.27</td> <td>40.81</td> <td>54.00</td> <td>-13.19</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11590.874</td> <td>38.61</td> <td>15.27</td> <td>53.88</td> <td>74.00</td> <td>-20.12</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11589.656	25.54	15.27	40.81	54.00	-13.19	AVG	2	11590.874	38.61	15.27	53.88	74.00	-20.12	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	11589.656	25.54	15.27	40.81	54.00	-13.19	AVG																								
2	11590.874	38.61	15.27	53.88	74.00	-20.12	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11586.749</td> <td>24.87</td> <td>15.26</td> <td>40.13</td> <td>54.00</td> <td>-13.87</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11586.829</td> <td>40.21</td> <td>15.26</td> <td>55.47</td> <td>74.00</td> <td>-18.53</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	11586.749	24.87	15.26	40.13	54.00	-13.87	AVG	2	11586.829	40.21	15.26	55.47	74.00	-18.53	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	11586.749	24.87	15.26	40.13	54.00	-13.87	AVG																								
2	11586.829	40.21	15.26	55.47	74.00	-18.53	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															





<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 484/65																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.719</td> <td>38.78</td> <td>15.12</td> <td>53.90</td> <td>74.00</td> <td>-20.10</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11510.940</td> <td>25.01</td> <td>15.12</td> <td>40.13</td> <td>54.00</td> <td>-13.87</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11510.719	38.78	15.12	53.90	74.00	-20.10	peak	2 *	11510.940	25.01	15.12	40.13	54.00	-13.87	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11510.719	38.78	15.12	53.90	74.00	-20.10	peak																								
2 *	11510.940	25.01	15.12	40.13	54.00	-13.87	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 484/65																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11509.839</td> <td>38.40</td> <td>15.12</td> <td>53.52</td> <td>74.00</td> <td>-20.48</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11510.054</td> <td>24.30</td> <td>15.12</td> <td>39.42</td> <td>54.00</td> <td>-14.58</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11509.839	38.40	15.12	53.52	74.00	-20.48	peak	2 *	11510.054	24.30	15.12	39.42	54.00	-14.58	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11509.839	38.40	15.12	53.52	74.00	-20.48	peak																								
2 *	11510.054	24.30	15.12	39.42	54.00	-14.58	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 484/65																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11589.421</td> <td>38.93</td> <td>15.27</td> <td>54.20</td> <td>74.00</td> <td>-19.80</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11590.359</td> <td>25.75</td> <td>15.27</td> <td>41.02</td> <td>54.00</td> <td>-12.98</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11589.421	38.93	15.27	54.20	74.00	-19.80	peak	2 *	11590.359	25.75	15.27	41.02	54.00	-12.98	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11589.421	38.93	15.27	54.20	74.00	-19.80	peak																								
2 *	11590.359	25.75	15.27	41.02	54.00	-12.98	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 484/65																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11589.384</td> <td>38.50</td> <td>15.27</td> <td>53.77</td> <td>74.00</td> <td>-20.23</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11589.481</td> <td>24.90</td> <td>15.27</td> <td>40.17</td> <td>54.00</td> <td>-13.83</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11589.384	38.50	15.27	53.77	74.00	-20.23	peak	2 *	11589.481	24.90	15.27	40.17	54.00	-13.83	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11589.384	38.50	15.27	53.77	74.00	-20.23	peak																								
2 *	11589.481	24.90	15.27	40.17	54.00	-13.83	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>11549.102</td> <td>25.76</td> <td>15.19</td> <td>40.95</td> <td>54.00</td> <td>-13.05</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>11550.828</td> <td>39.45</td> <td>15.20</td> <td>54.65</td> <td>74.00</td> <td>-19.35</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1 *	11549.102	25.76	15.19	40.95	54.00	-13.05	AVG	2	11550.828	39.45	15.20	54.65	74.00	-19.35	peak
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1 *	11549.102	25.76	15.19	40.95	54.00	-13.05	AVG																								
2	11550.828	39.45	15.20	54.65	74.00	-19.35	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBUV)</th> <th>Factor (dB/m)</th> <th>Level (dBUV/m)</th> <th>Limit (dBUV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11553.061</td> <td>38.03</td> <td>15.20</td> <td>53.23</td> <td>74.00</td> <td>-20.77</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11553.376</td> <td>25.21</td> <td>15.20</td> <td>40.41</td> <td>54.00</td> <td>-13.59</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	11553.061	38.03	15.20	53.23	74.00	-20.77	peak	2 *	11553.376	25.21	15.20	40.41	54.00	-13.59	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	11553.061	38.03	15.20	53.23	74.00	-20.77	peak																								
2 *	11553.376	25.21	15.20	40.41	54.00	-13.59	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 996/67																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11549.672</td> <td>38.82</td> <td>15.19</td> <td>54.01</td> <td>74.00</td> <td>-19.99</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11549.980</td> <td>25.74</td> <td>15.19</td> <td>40.93</td> <td>54.00</td> <td>-13.07</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11549.672	38.82	15.19	54.01	74.00	-19.99	peak	2 *	11549.980	25.74	15.19	40.93	54.00	-13.07	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11549.672	38.82	15.19	54.01	74.00	-19.99	peak																								
2 *	11549.980	25.74	15.19	40.93	54.00	-13.07	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. No.</b>	Ant 0 + Ant 1																														
<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 996/67																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11549.248</td> <td>38.77</td> <td>15.19</td> <td>53.96</td> <td>74.00</td> <td>-20.04</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>11550.048</td> <td>25.08</td> <td>15.20</td> <td>40.28</td> <td>54.00</td> <td>-13.72</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	11549.248	38.77	15.19	53.96	74.00	-20.04	peak	2 *	11550.048	25.08	15.20	40.28	54.00	-13.72	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	11549.248	38.77	15.19	53.96	74.00	-20.04	peak																								
2 *	11550.048	25.08	15.20	40.28	54.00	-13.72	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

### 3.3. Band Edge Emissions

#### Limit

Limits of unwanted emission out of the restricted bands

FCC CFR Title 47 Part 15 Subpart E Section 15. 407(b)

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27 (Note 2)	68.2
	10 (Note 2)	105.2
	15.6 (Note 2)	110.8
	27 (Note 2)	122.2


Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

2. According to FCC 16-24, all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

#### Test Configuration

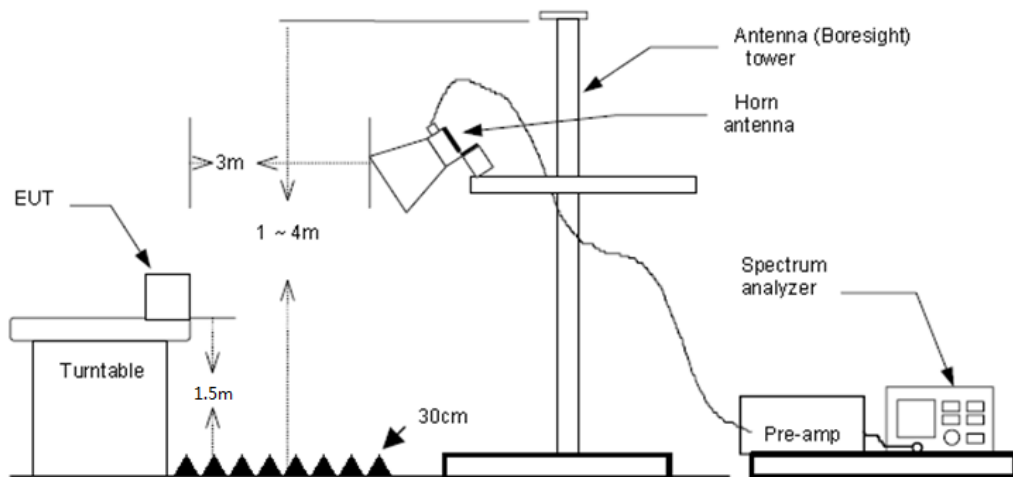



### **Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause Duty Cycle.


### **Test Mode**

Please refer to the clause 2.4.




**Test Result**

Note: 1. Pre-scan both 4500-5150MHz, 5350-5460MHz were investigated, report only shows the test data for worst case.

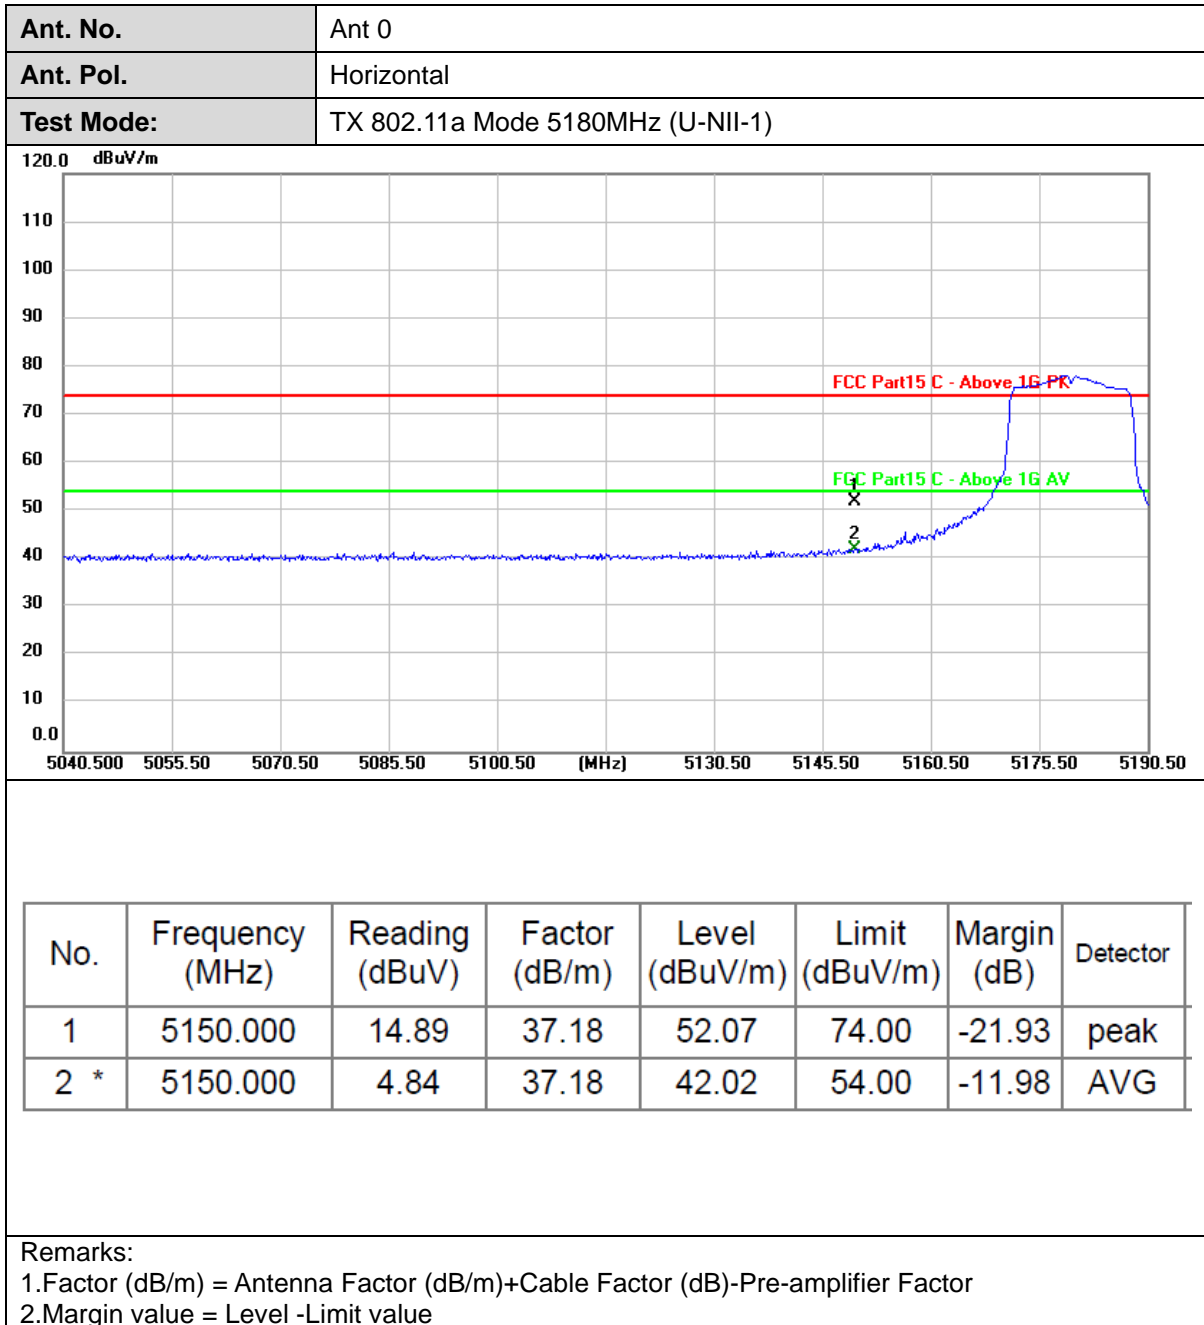



<b>Ant. No.</b>	Ant 0
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11a Mode 5180MHz (U-NII-1)

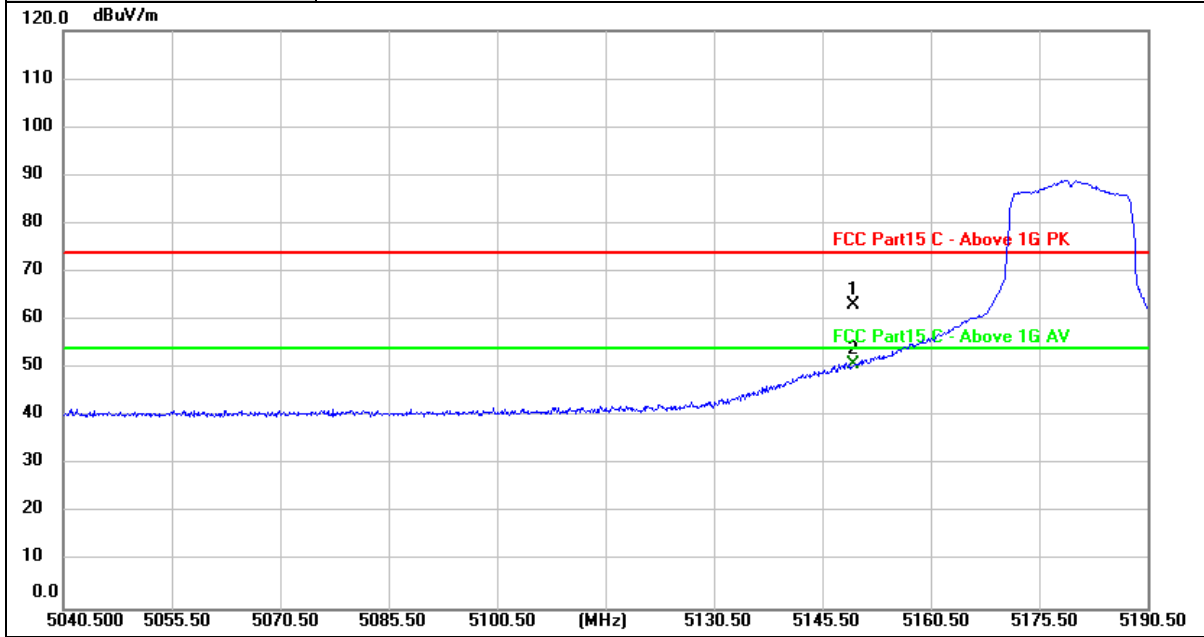

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	25.85	37.18	63.03	74.00	-10.97	peak
2 *	5150.000	13.72	37.18	50.90	54.00	-3.10	AVG

Remarks:


- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value







Ant. No.	Ant 0
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-2A)

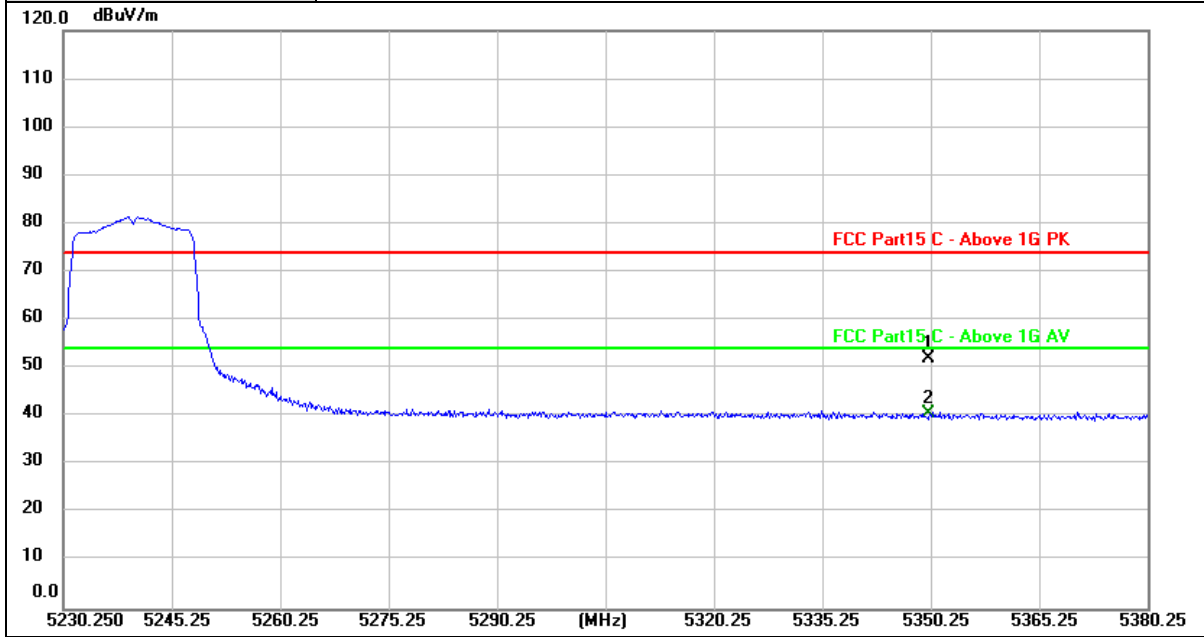

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	14.63	37.40	52.03	74.00	-21.97	peak
2 *	5350.000	3.27	37.40	40.67	54.00	-13.33	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. No.	Ant 0
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-2A)

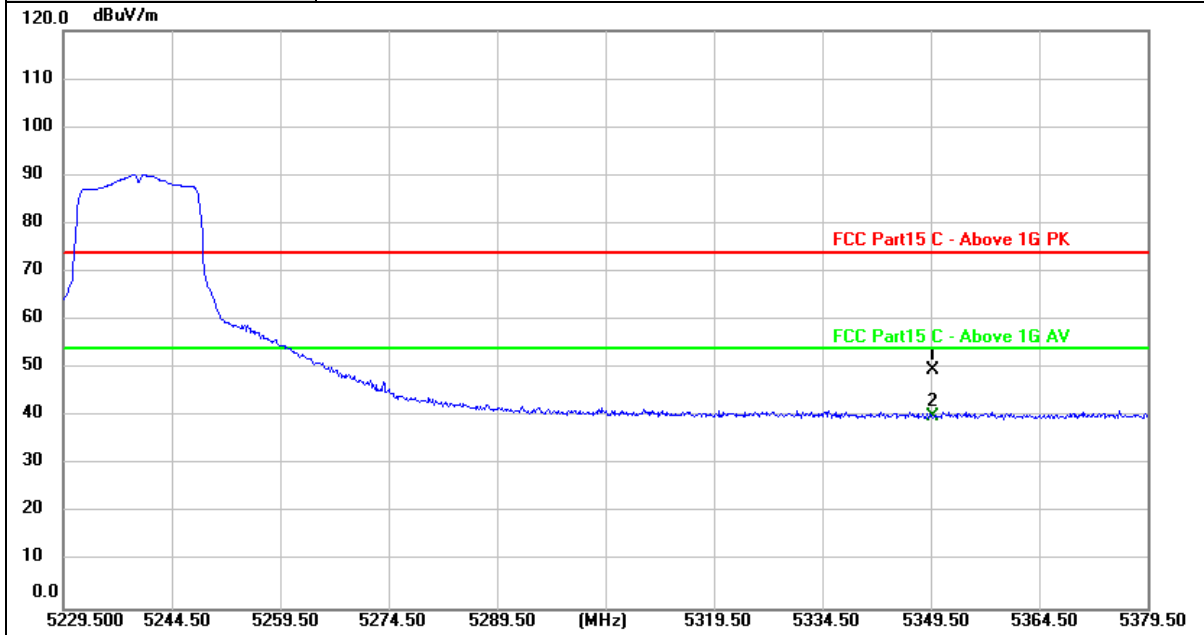

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	12.32	37.40	49.72	74.00	-24.28	peak
2 *	5350.000	2.60	37.40	40.00	54.00	-14.00	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)

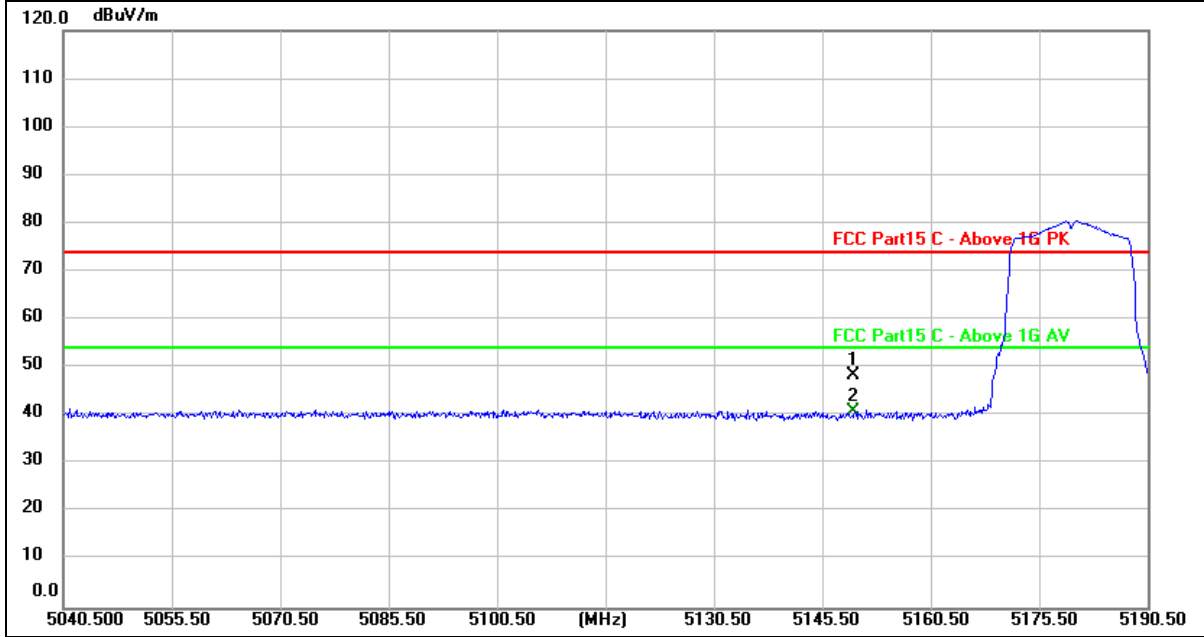

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	11.30	37.18	48.48	74.00	-25.52	peak
2 *	5150.000	3.67	37.18	40.85	54.00	-13.15	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11a Mode 5180MHz (U-NII-1)

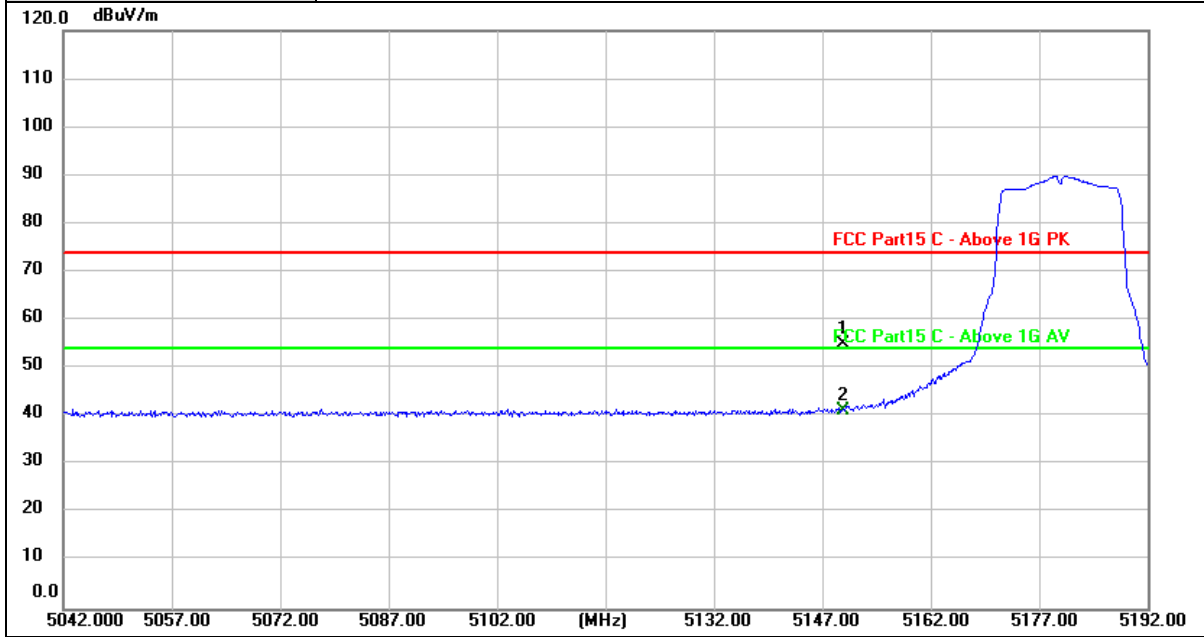

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	17.83	37.18	55.01	74.00	-18.99	peak
2 *	5150.000	4.17	37.18	41.35	54.00	-12.65	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-2A)

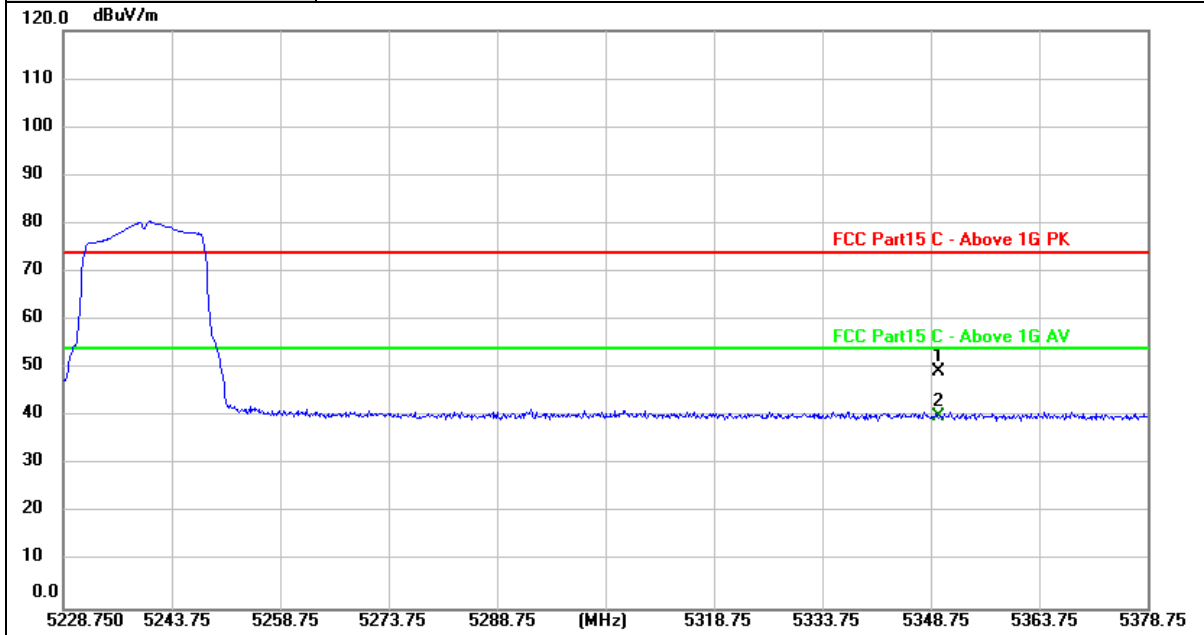

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	11.93	37.40	49.33	74.00	-24.67	peak
2 *	5350.000	2.58	37.40	39.98	54.00	-14.02	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value





Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-2A)

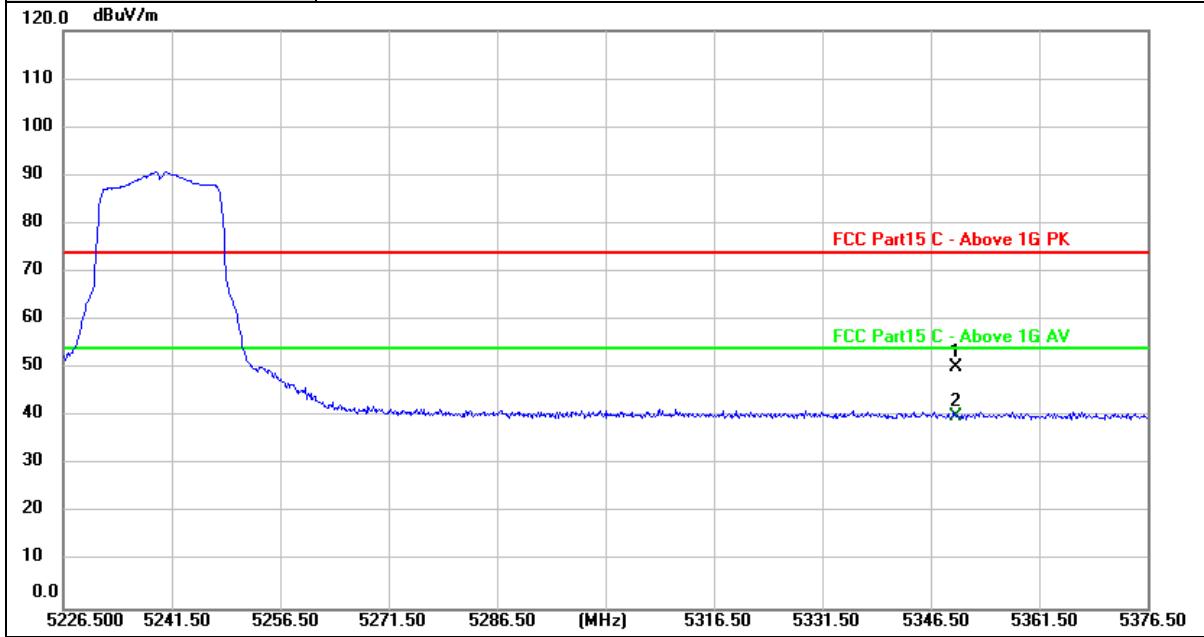

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	12.77	37.40	50.17	74.00	-23.83	peak
2 *	5350.000	2.61	37.40	40.01	54.00	-13.99	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)

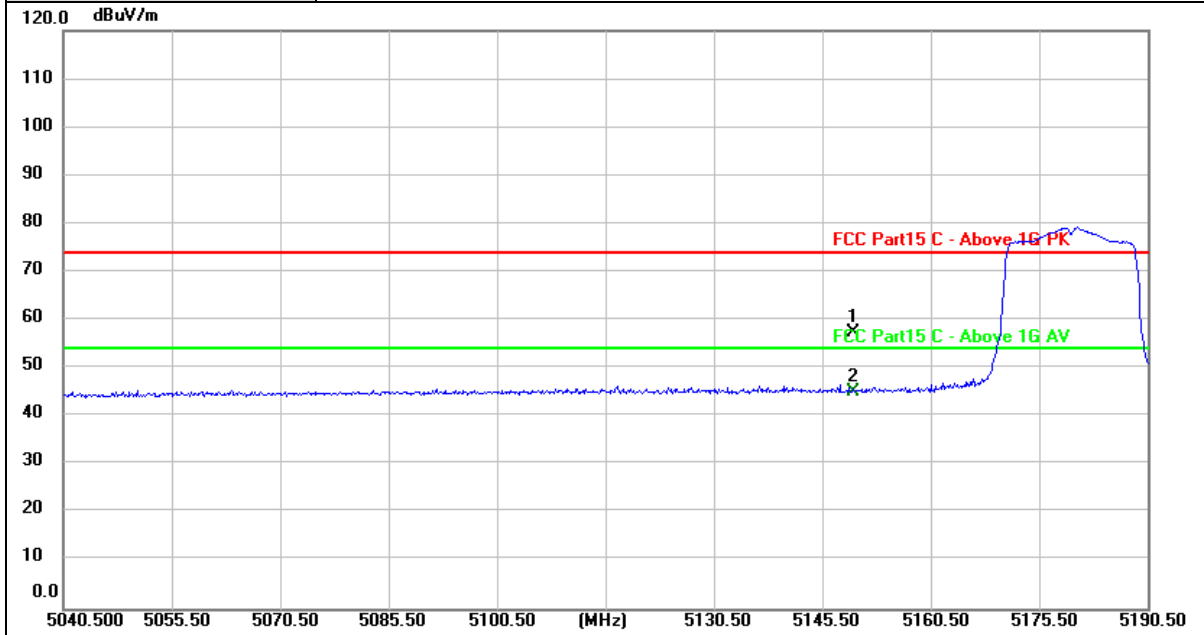

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	20.14	37.18	57.32	74.00	-16.68	peak
2 *	5150.000	8.06	37.18	45.24	54.00	-8.76	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)

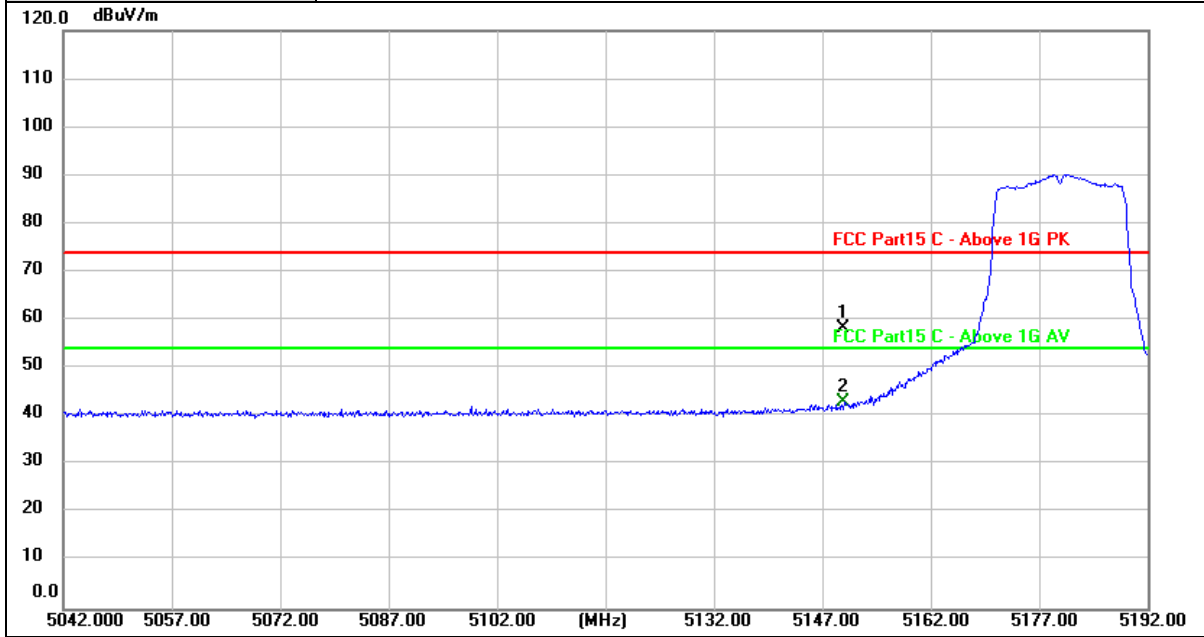

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	21.19	37.18	58.37	74.00	-15.63	peak
2 *	5150.000	5.89	37.18	43.07	54.00	-10.93	AVG

Remarks:


- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value







Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-2A)

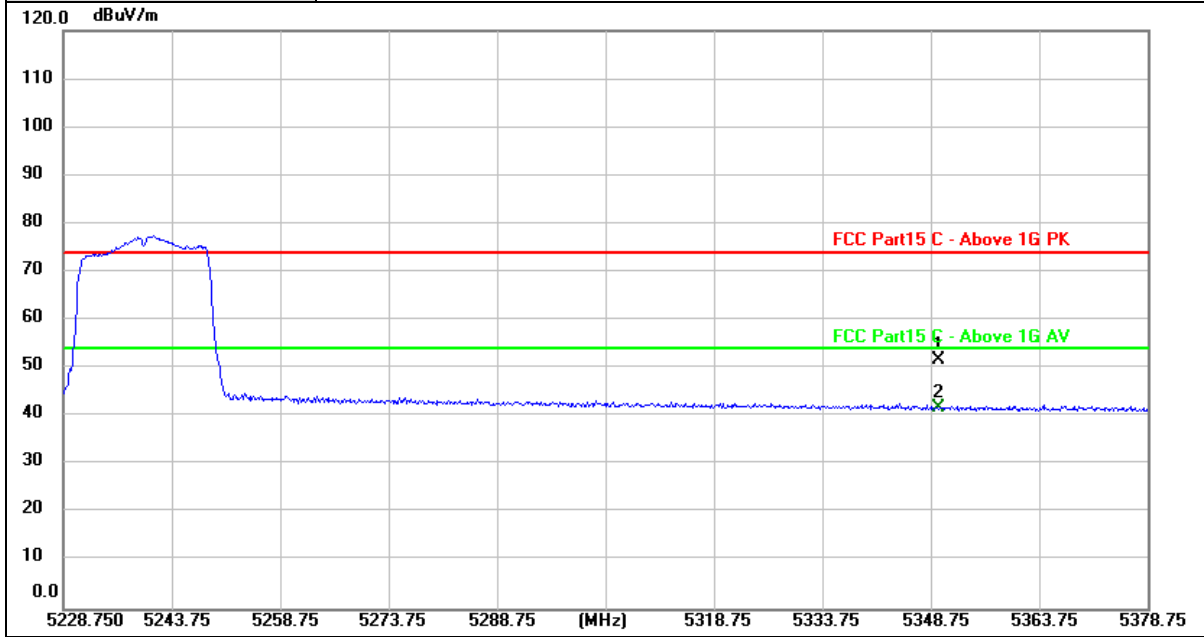

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	14.23	37.40	51.63	74.00	-22.37	peak
2 *	5350.000	4.37	37.40	41.77	54.00	-12.23	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-2A)

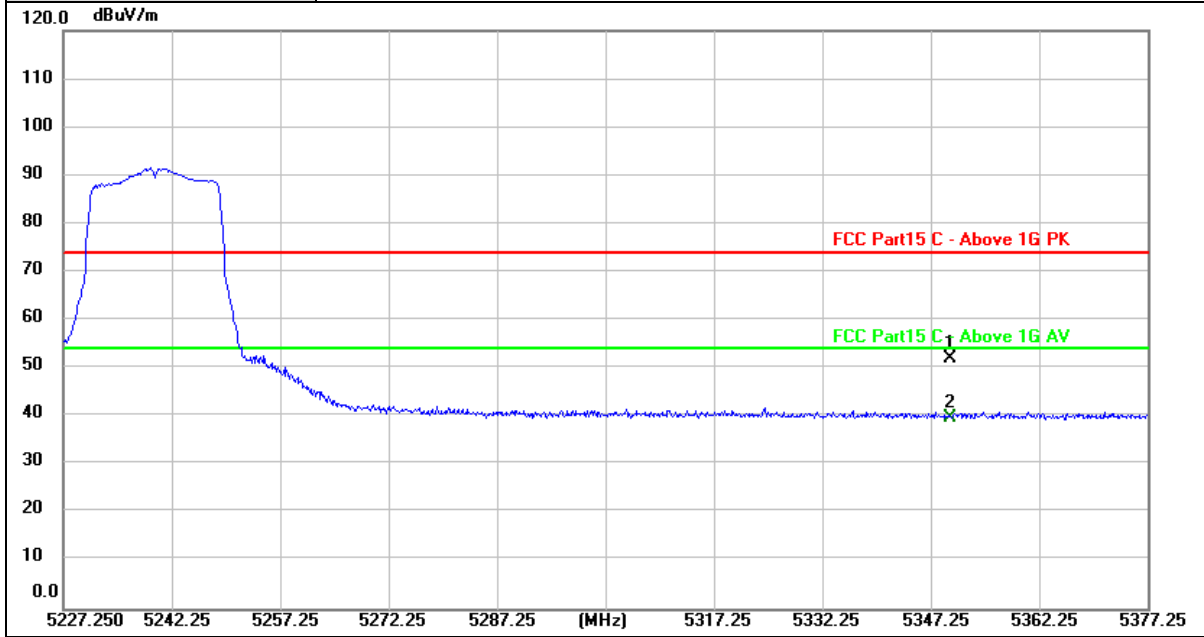

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	14.76	37.40	52.16	74.00	-21.84	peak
2 *	5350.000	2.40	37.40	39.80	54.00	-14.20	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)

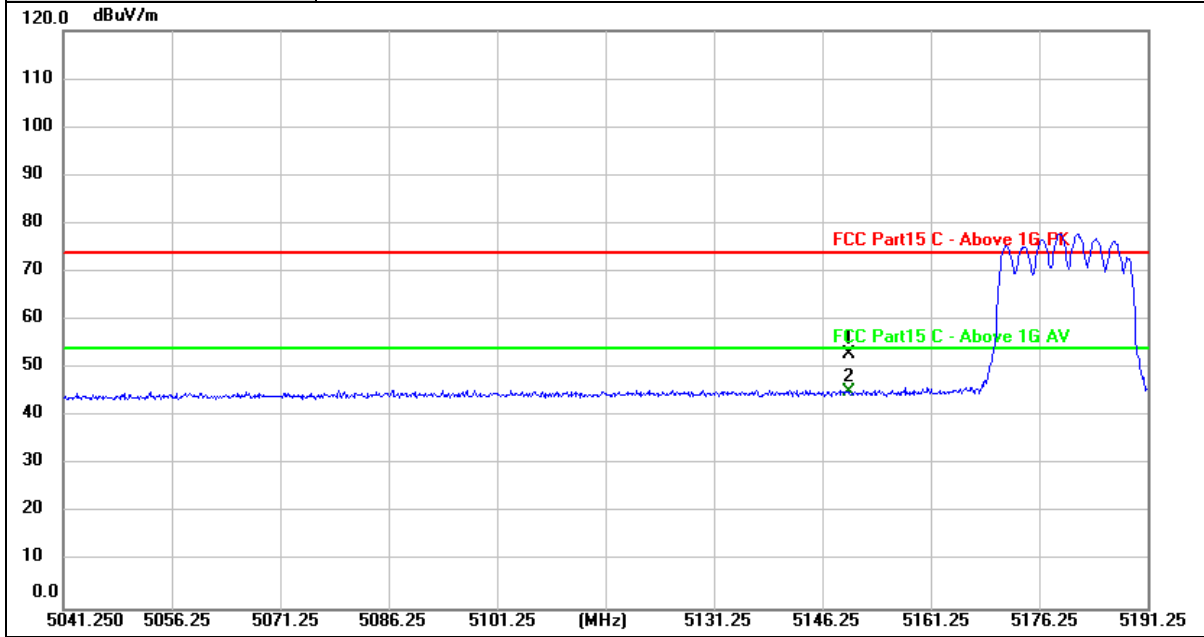

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	15.71	37.18	52.89	74.00	-21.11	peak
2 *	5150.000	7.89	37.18	45.07	54.00	-8.93	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)

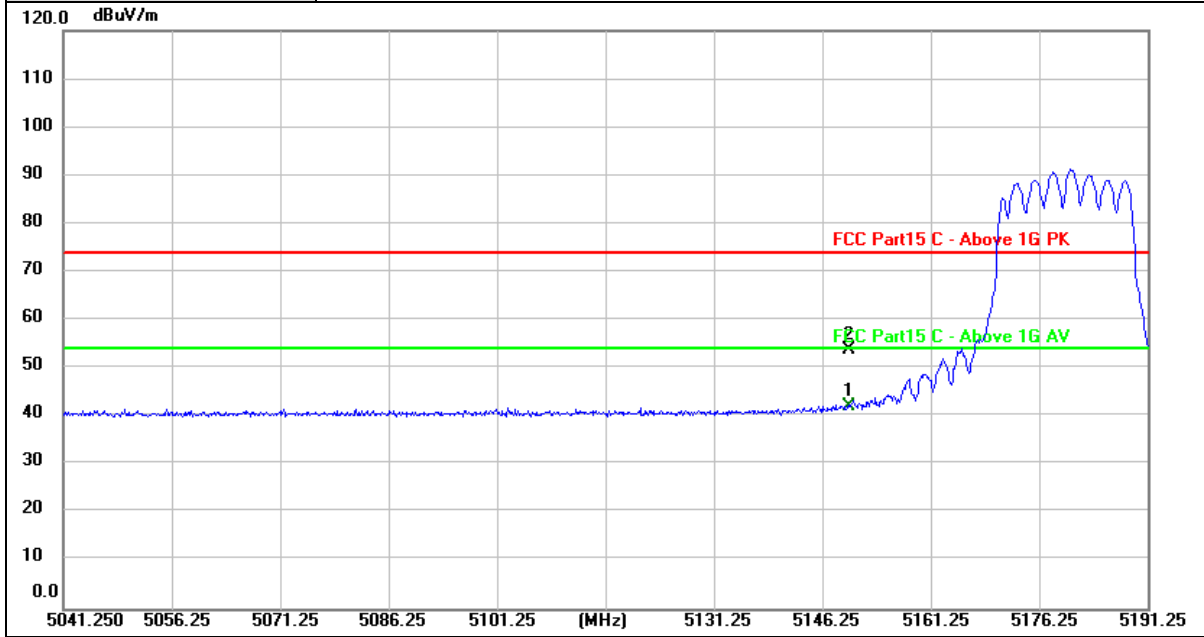


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5150.000	5.09	37.18	42.27	54.00	-11.73	AVG
2	5150.100	16.53	37.18	53.71	74.00	-20.29	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-2A)

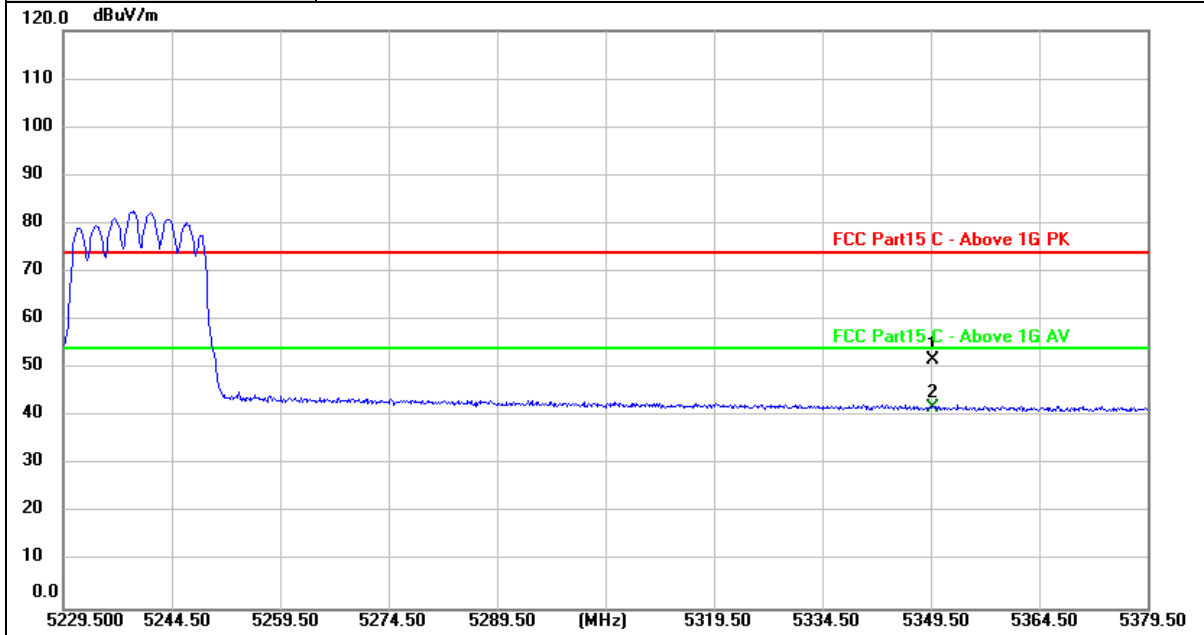

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	14.40	37.40	51.80	74.00	-22.20	peak
2 *	5350.000	4.50	37.40	41.90	54.00	-12.10	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-2A)

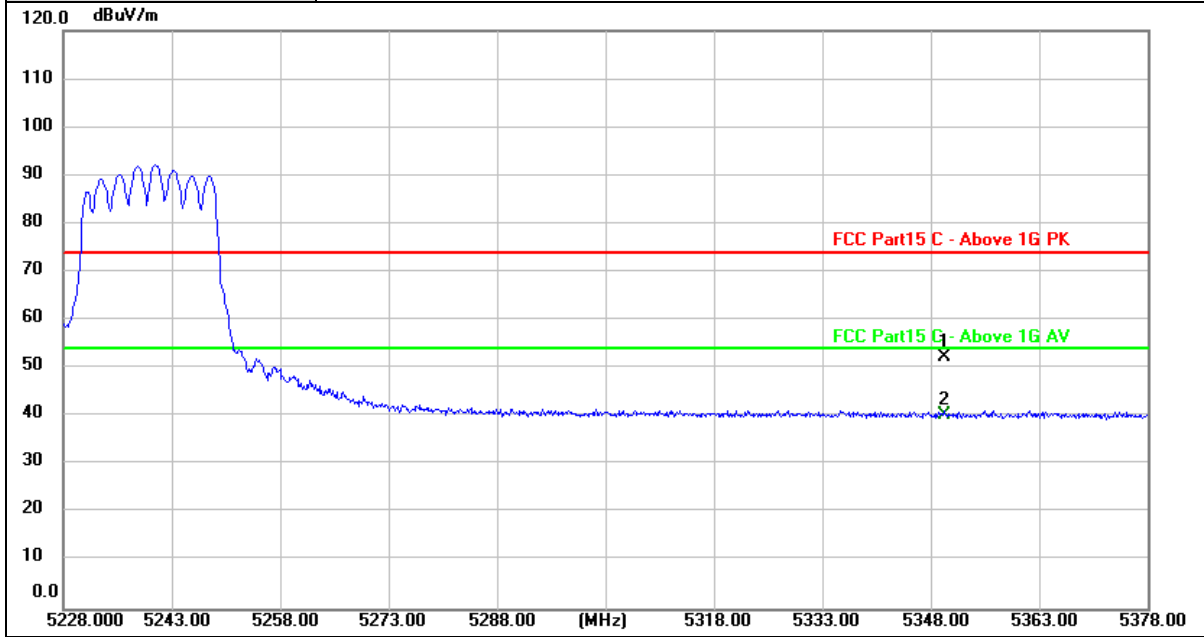

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	14.96	37.40	52.36	74.00	-21.64	peak
2 *	5350.000	3.00	37.40	40.40	54.00	-13.60	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5180MHz (U-NII-1) 26/0

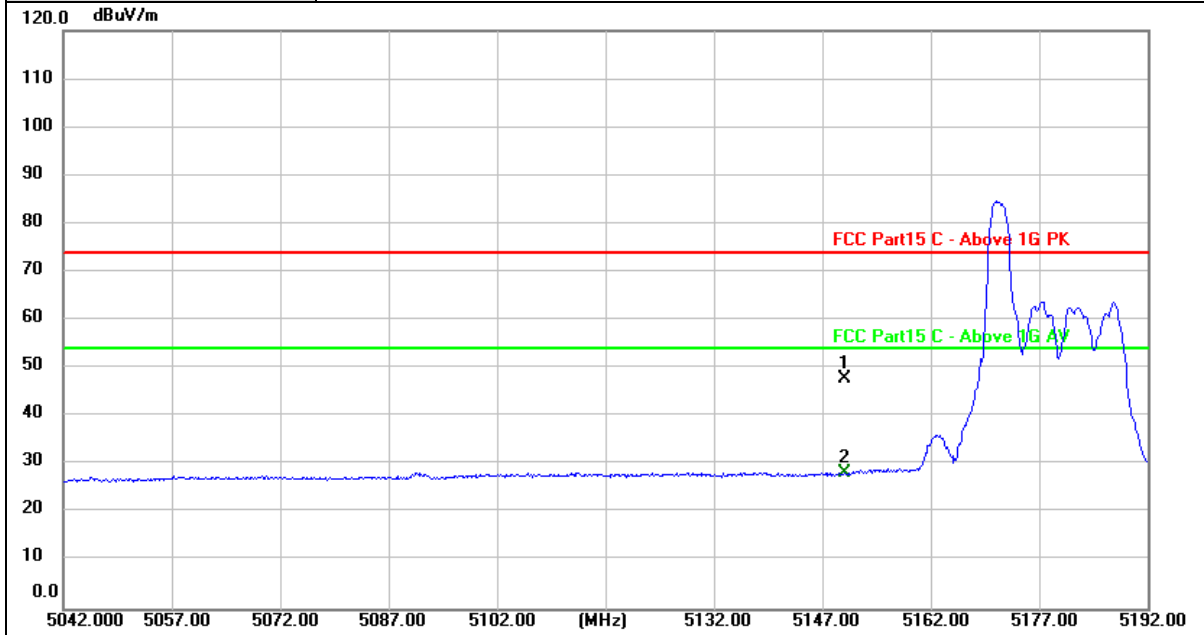

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	45.17	2.78	47.95	74.00	-26.05	peak
2 *	5150.000	25.65	2.78	28.43	54.00	-25.57	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5180MHz (U-NII-1) 26/0

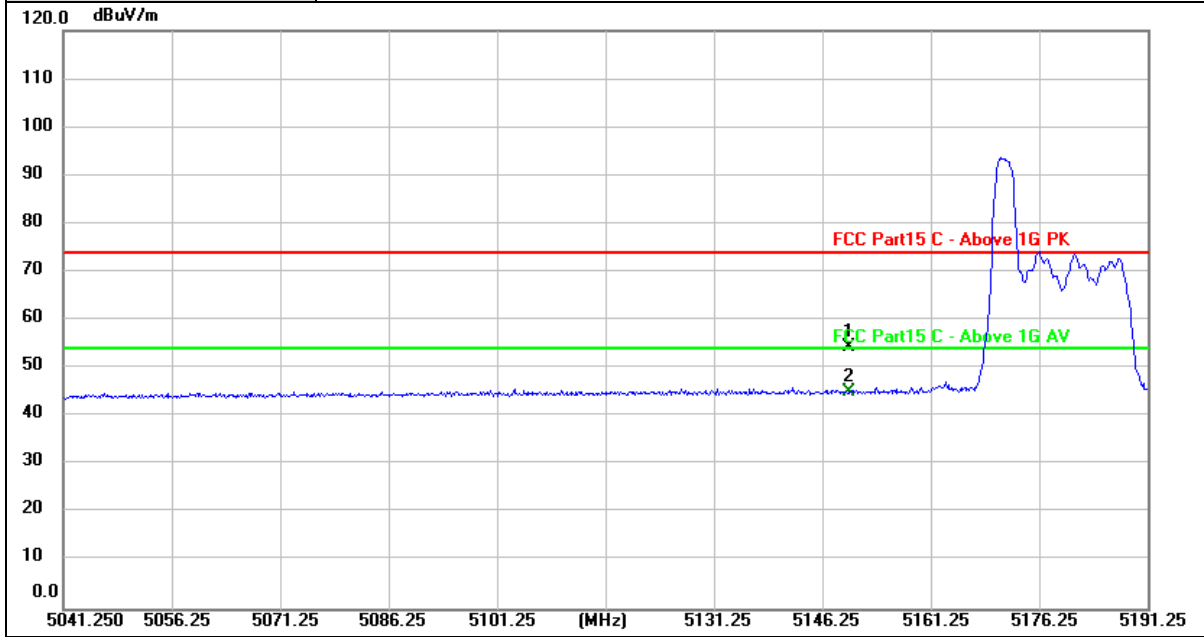

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	17.34	37.18	54.52	74.00	-19.48	peak
2 *	5150.000	7.89	37.18	45.07	54.00	-8.93	AVG

Remarks:


- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value







<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5180MHz (U-NII-1) 52/37

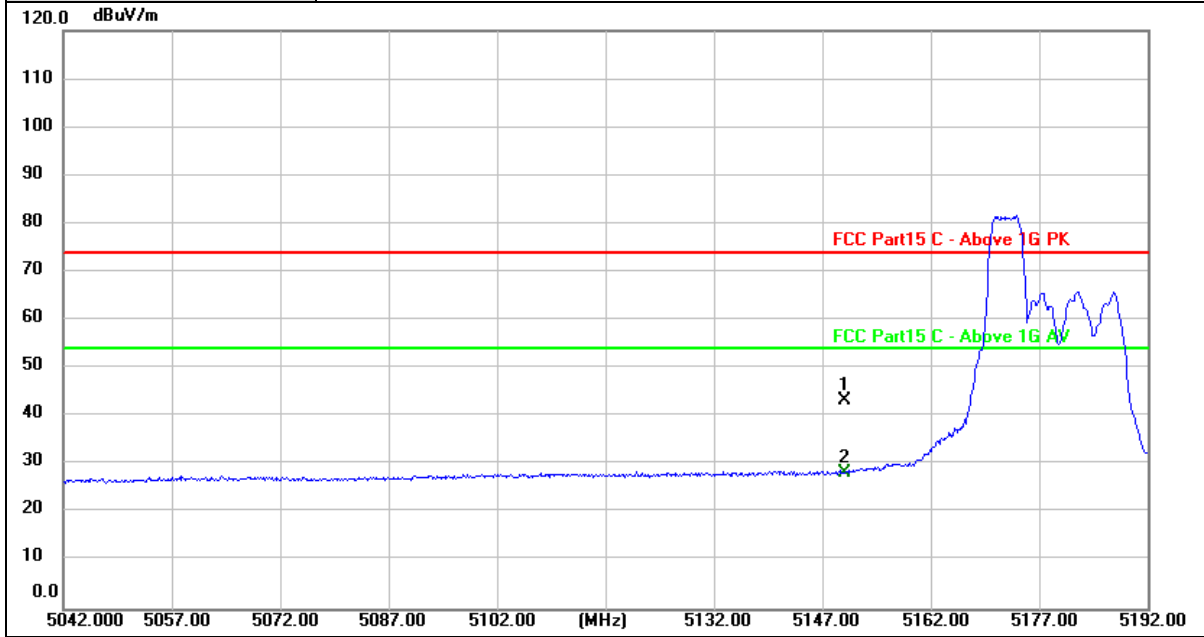

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	40.67	2.78	43.45	74.00	-30.55	peak
2 *	5150.000	25.56	2.78	28.34	54.00	-25.66	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 5180MHz (U-NII-1) 52/37

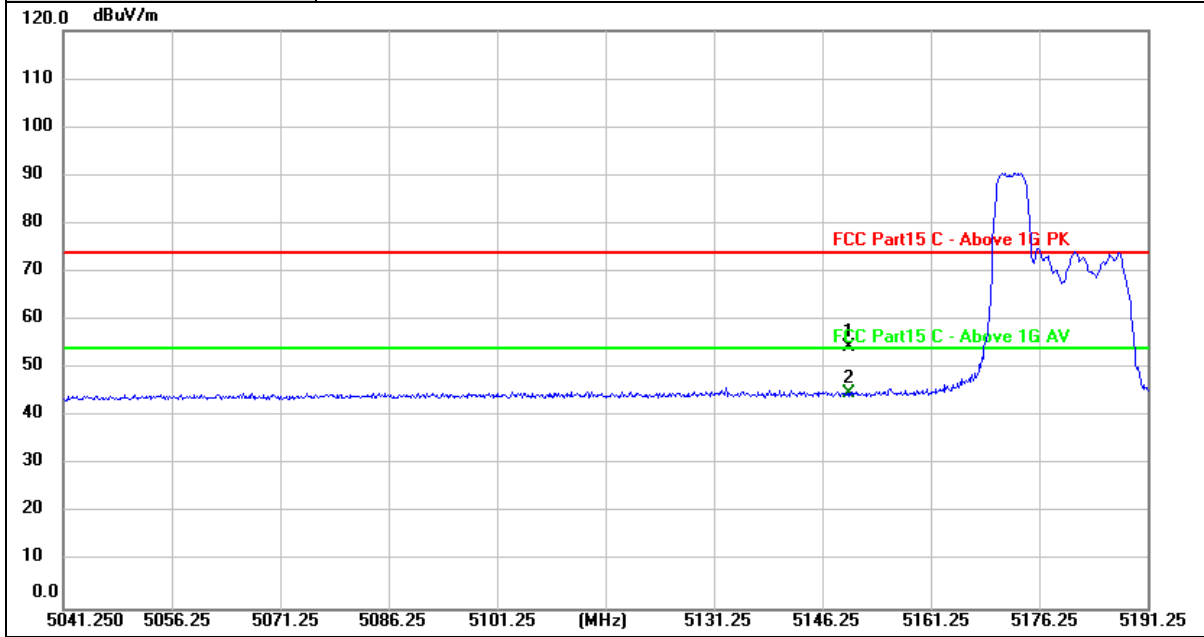

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	17.15	37.18	54.33	74.00	-19.67	peak
2 *	5150.000	7.69	37.18	44.87	54.00	-9.13	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5180MHz (U-NII-1) 106/53

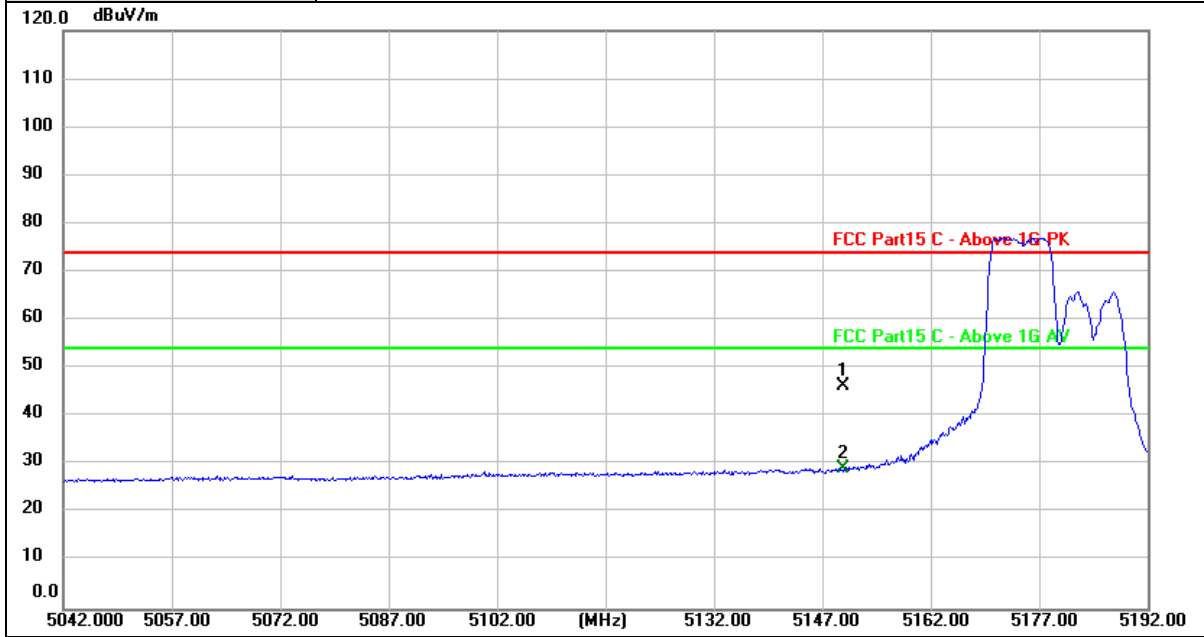

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	43.51	2.78	46.29	74.00	-27.71	peak
2 *	5150.000	26.32	2.78	29.10	54.00	-24.90	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5180MHz (U-NII-1) 106/53

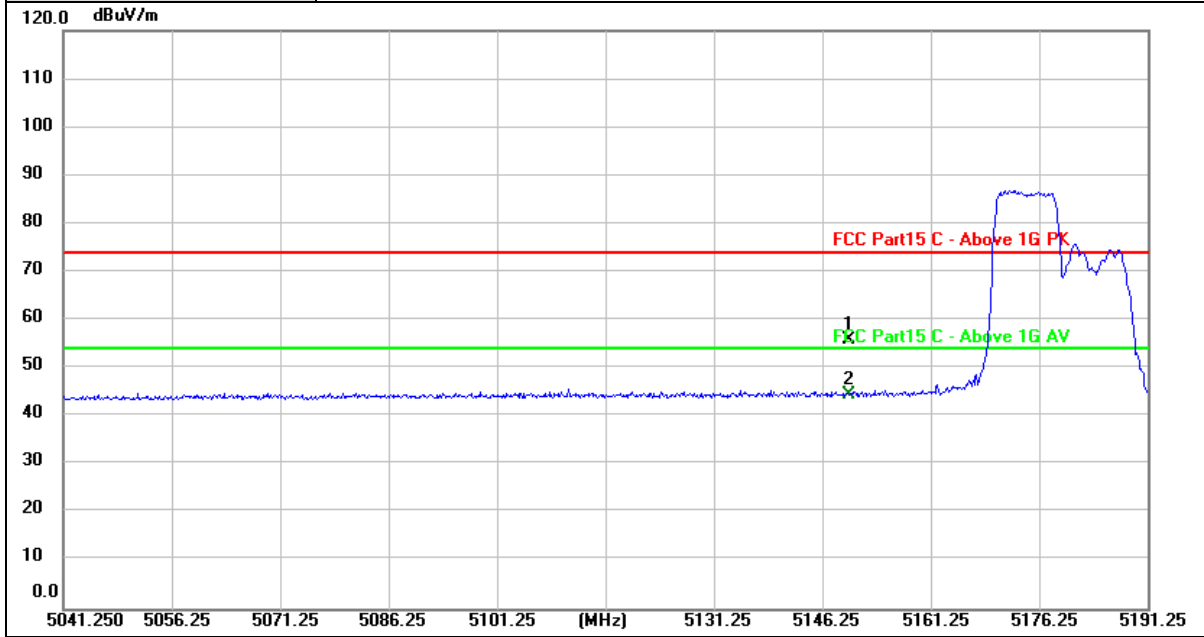

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	18.91	37.18	56.09	74.00	-17.91	peak
2 *	5150.000	7.42	37.18	44.60	54.00	-9.40	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5180MHz (U-NII-1) 242/61

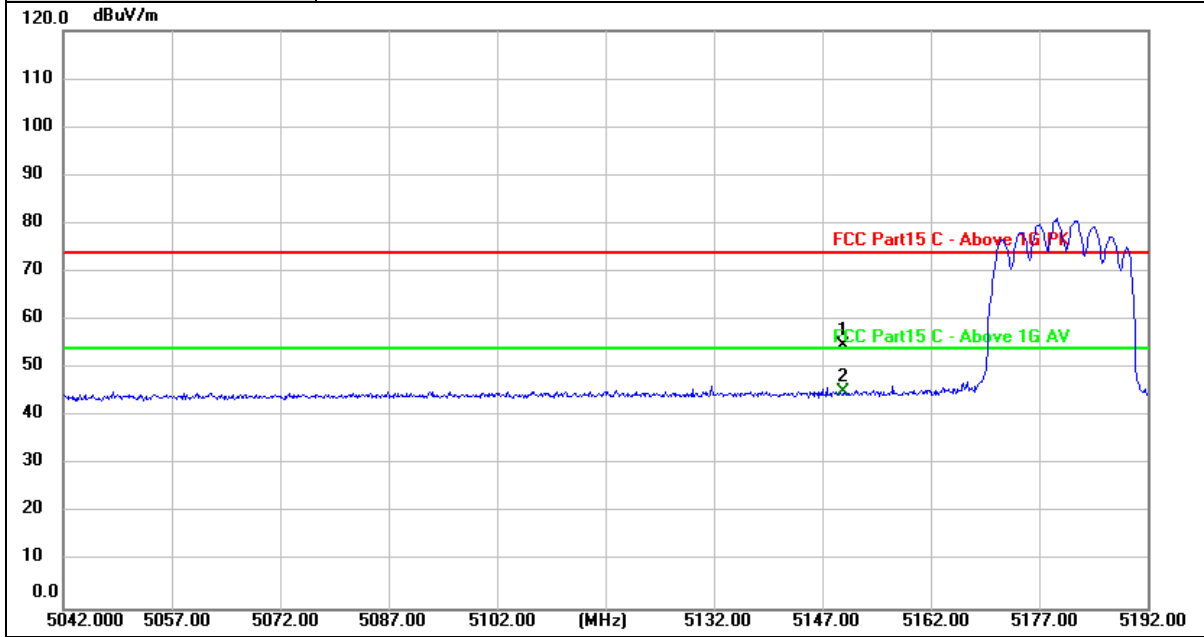

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	17.72	37.18	54.90	74.00	-19.10	peak
2 *	5150.000	7.94	37.18	45.12	54.00	-8.88	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5180MHz (U-NII-1) 242/61

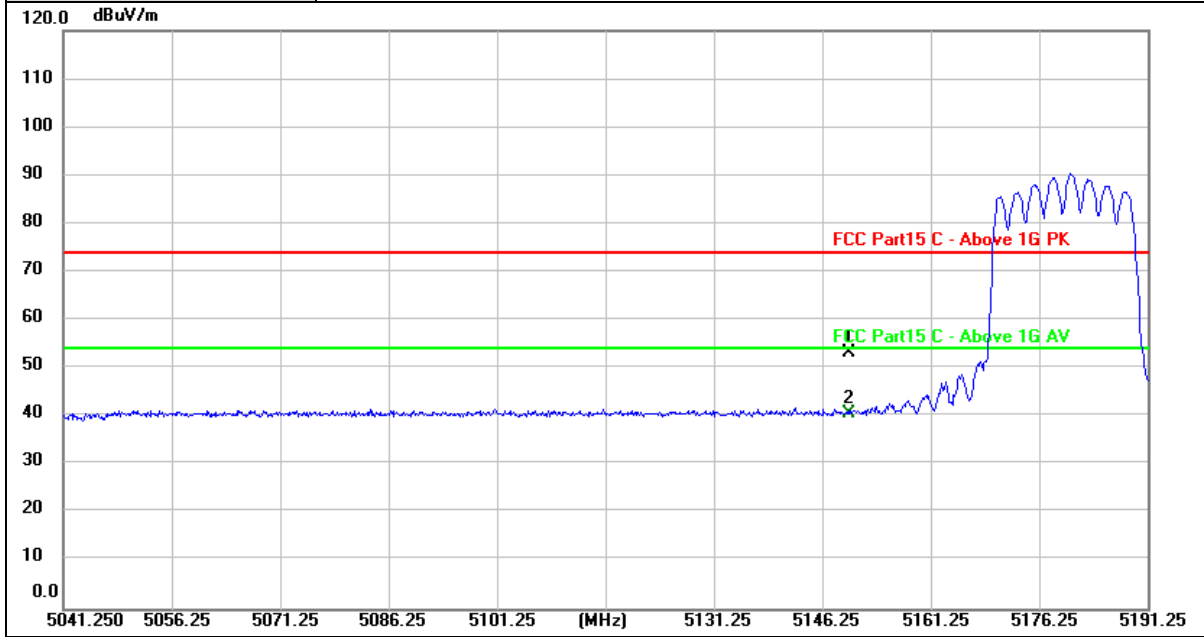

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	15.95	37.18	53.13	74.00	-20.87	peak
2 *	5150.000	3.56	37.18	40.74	54.00	-13.26	AVG


Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5240MHz (U-NII-2A) 26/8

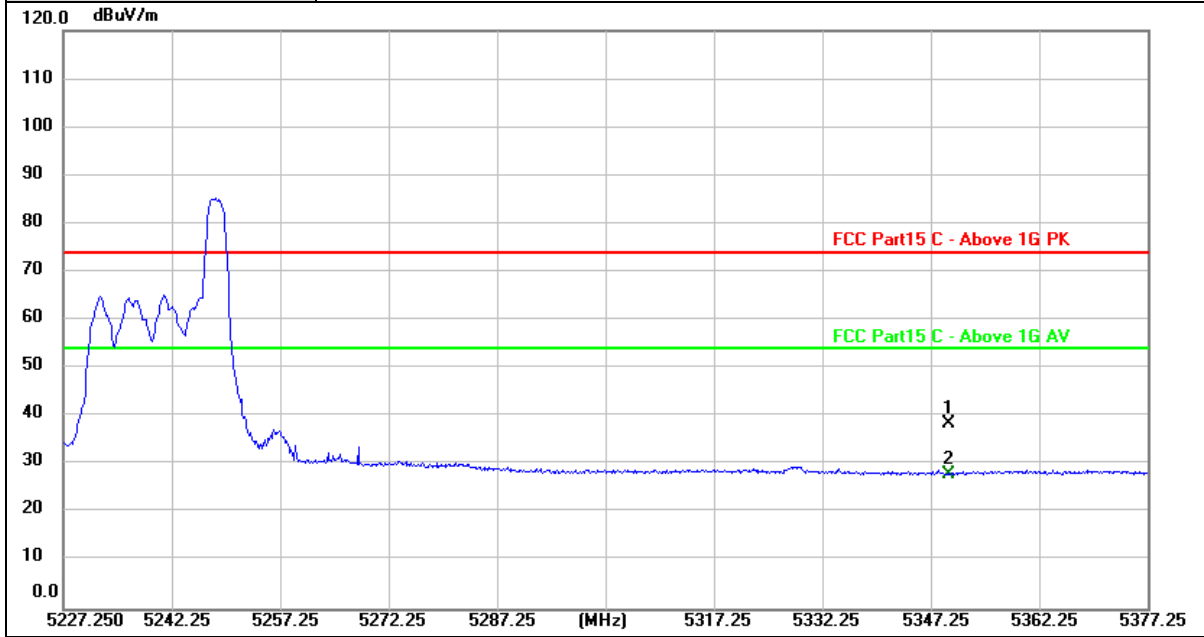

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	35.16	3.26	38.42	74.00	-35.58	peak
2 *	5350.000	24.87	3.26	28.13	54.00	-25.87	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5240MHz (U-NII-2A) 26/8

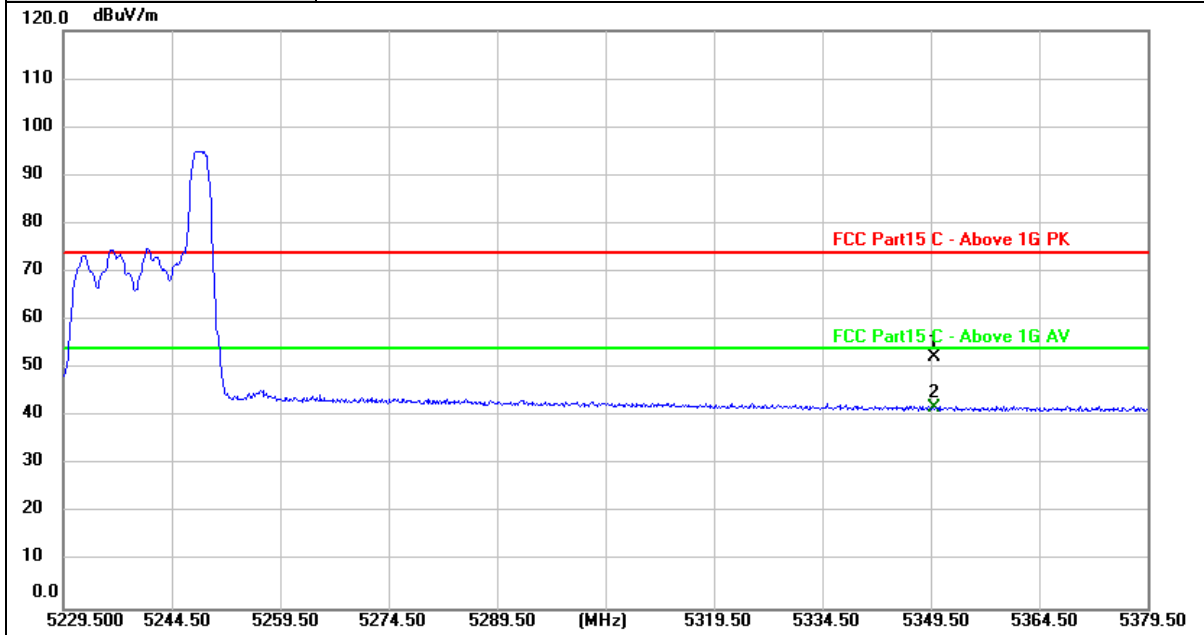

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	14.87	37.40	52.27	74.00	-21.73	peak
2 *	5350.000	4.59	37.40	41.99	54.00	-12.01	AVG


Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5240MHz (U-NII-2A) 52/40

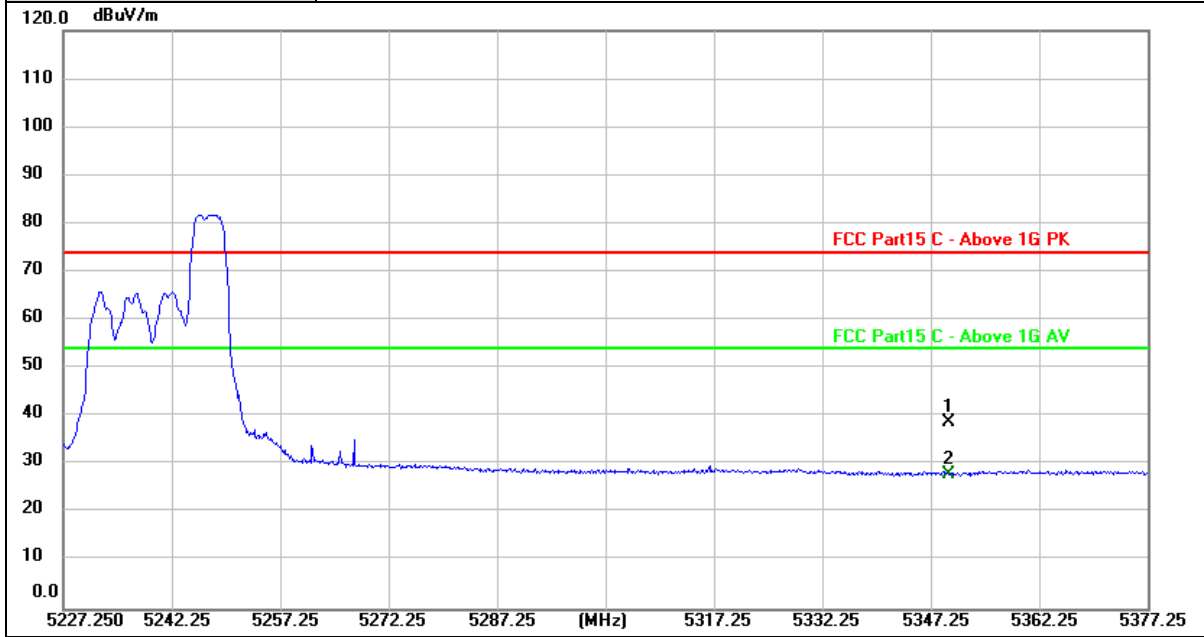

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	35.67	3.26	38.93	74.00	-35.07	peak
2 *	5350.000	24.90	3.26	28.16	54.00	-25.84	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5240MHz (U-NII-2A) 52/40

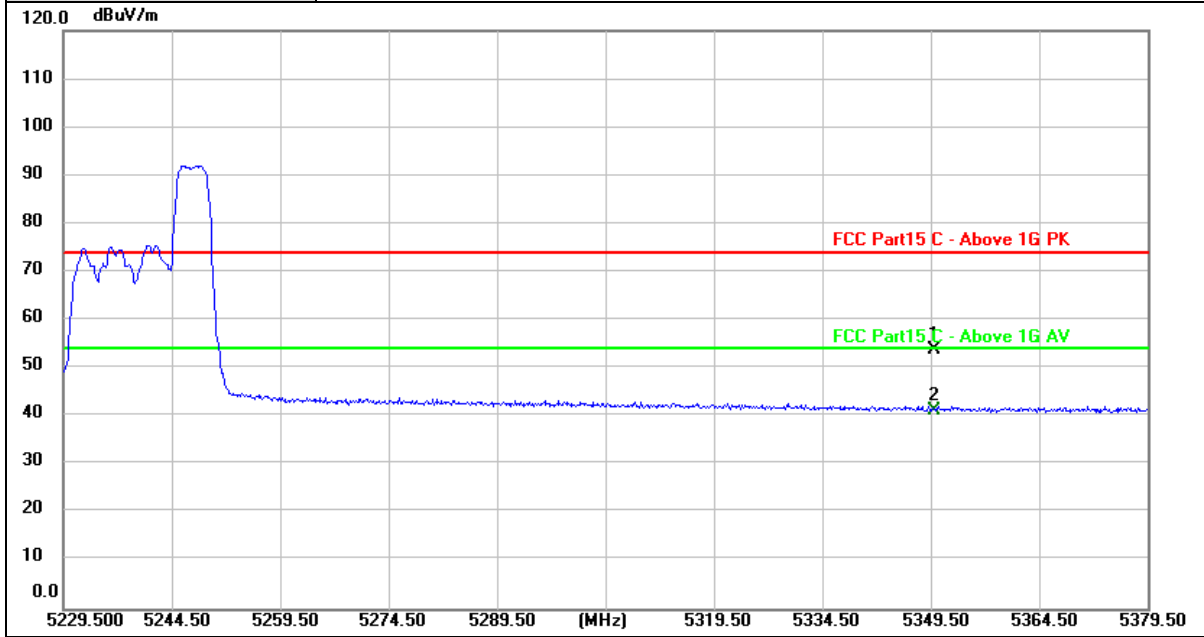

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	16.45	37.40	53.85	74.00	-20.15	peak
2 *	5350.000	3.88	37.40	41.28	54.00	-12.72	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5240MHz (U-NII-2A) 106/54

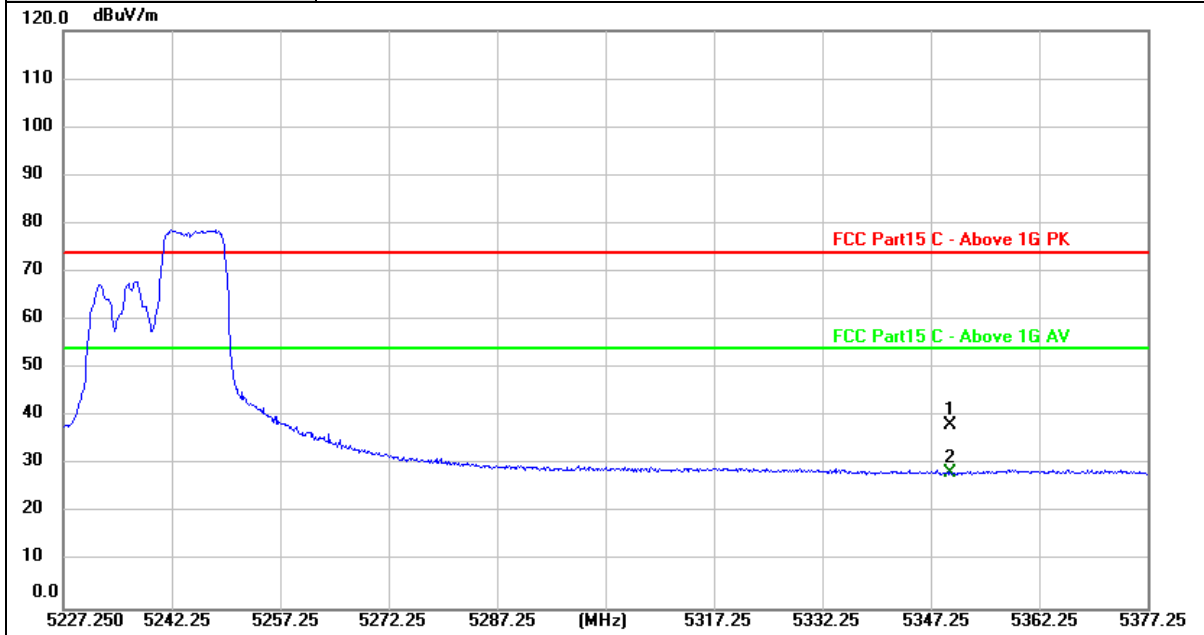

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	34.99	3.26	38.25	74.00	-35.75	peak
2 *	5350.000	25.17	3.26	28.43	54.00	-25.57	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5240MHz (U-NII-2A) 106/54

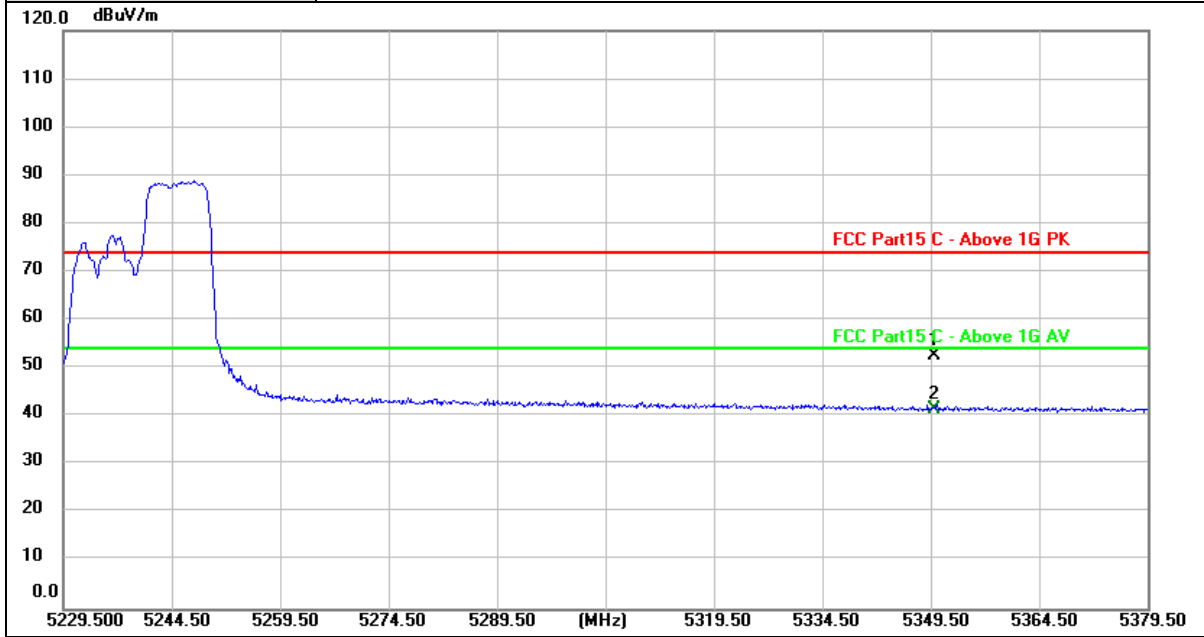

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	15.40	37.40	52.80	74.00	-21.20	peak
2 *	5350.000	4.24	37.40	41.64	54.00	-12.36	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5240MHz (U-NII-2A) 242/61

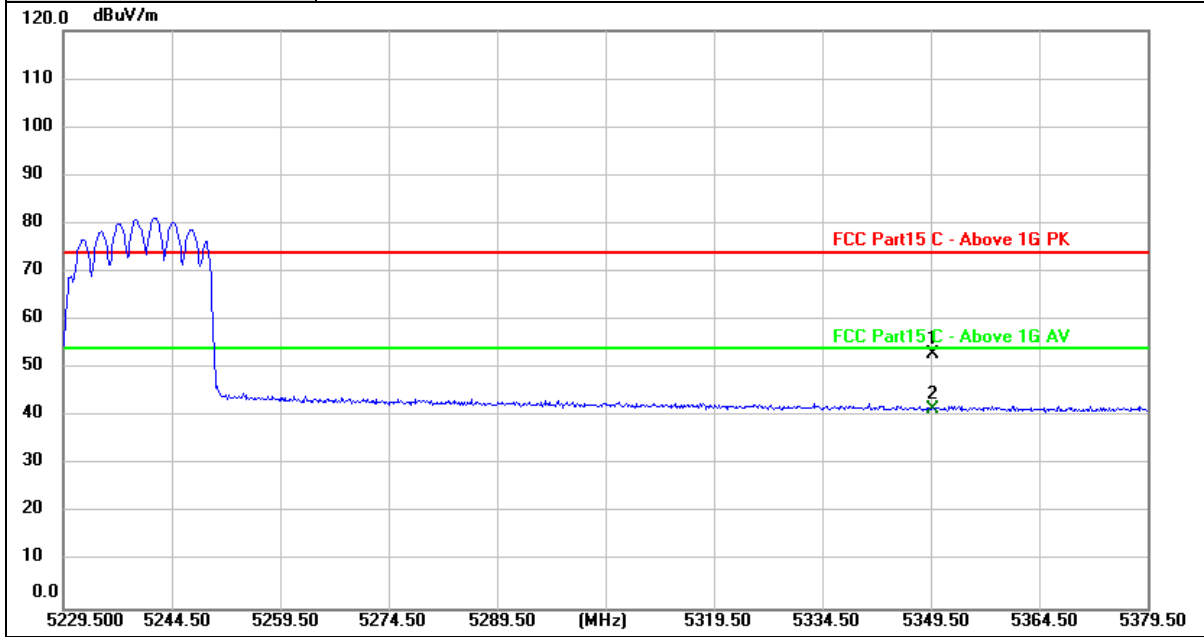

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5349.950	15.65	37.40	53.05	74.00	-20.95	peak
2 *	5350.000	4.23	37.40	41.63	54.00	-12.37	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ax(HE20) Mode 5240MHz (U-NII-2A) 242/61

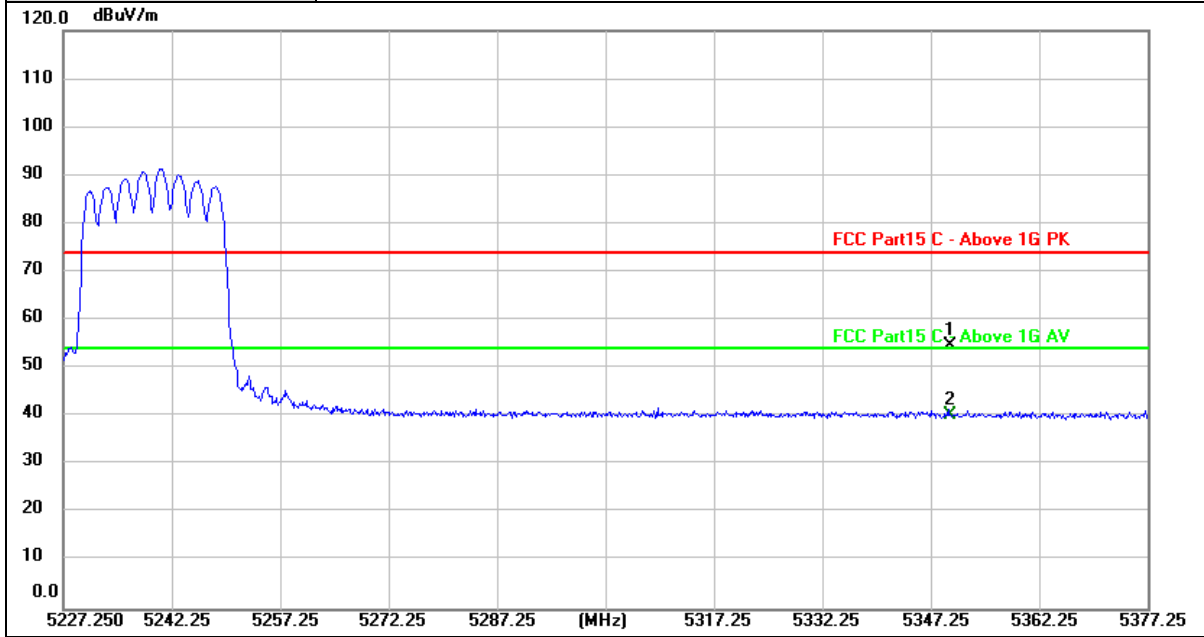

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	17.21	37.40	54.61	74.00	-19.39	peak
2 *	5350.000	2.89	37.40	40.29	54.00	-13.71	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)

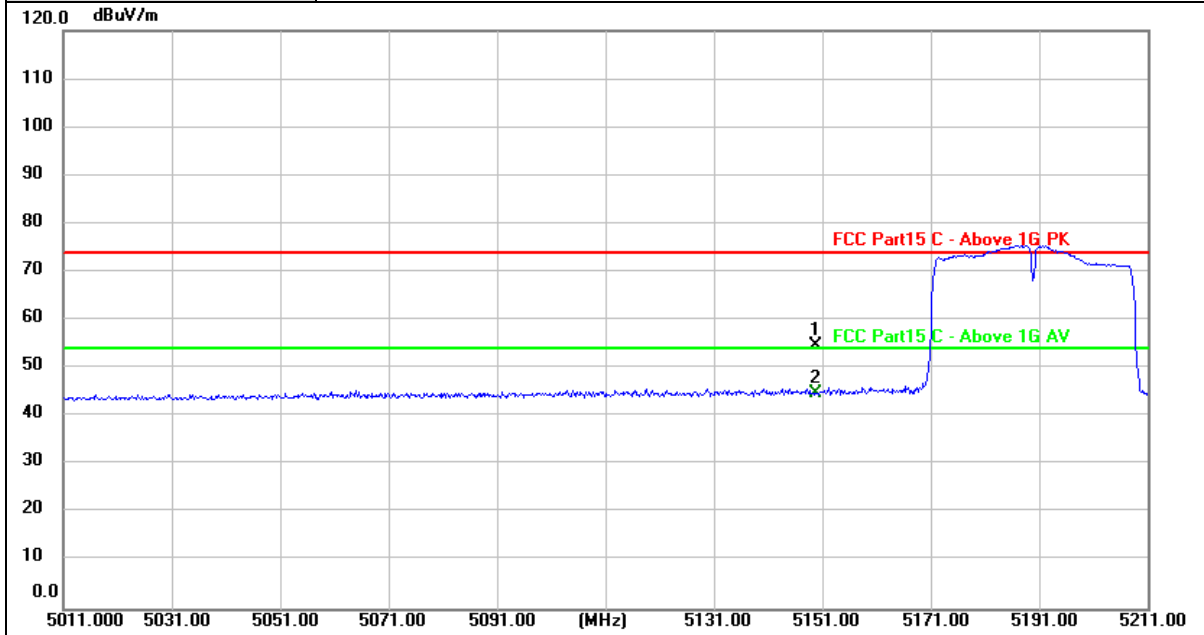

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	17.72	37.18	54.90	74.00	-19.10	peak
2 *	5150.000	7.61	37.18	44.79	54.00	-9.21	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)

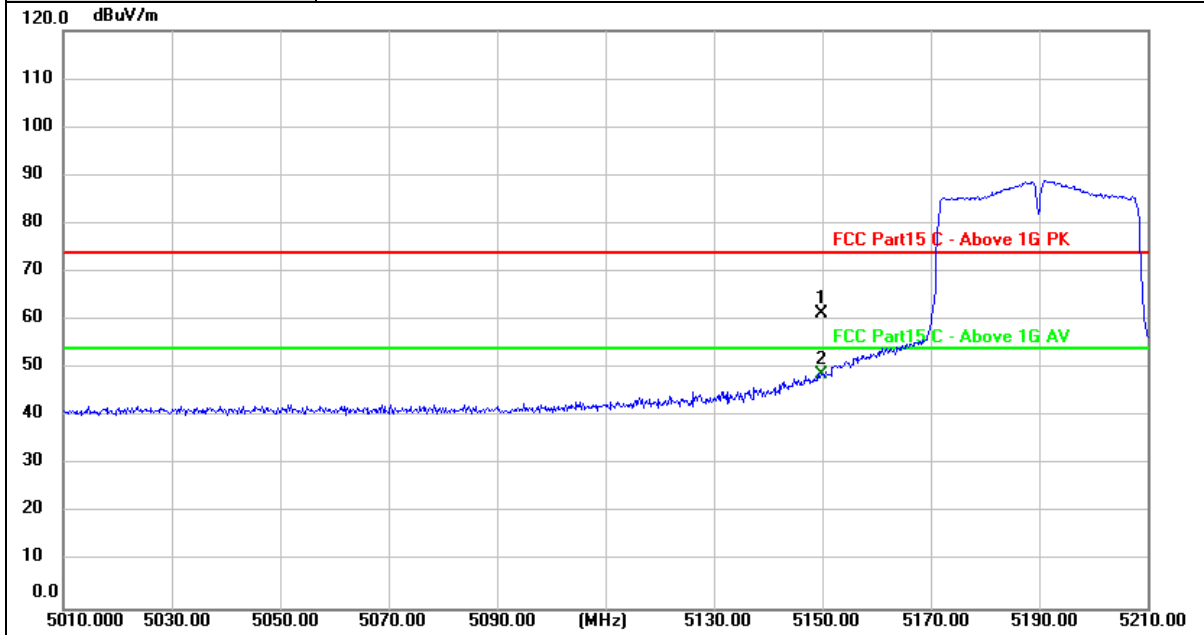

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	24.08	37.18	61.26	74.00	-12.74	peak
2 *	5150.000	11.50	37.18	48.68	54.00	-5.32	AVG

Remarks:


- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value







Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-2A)

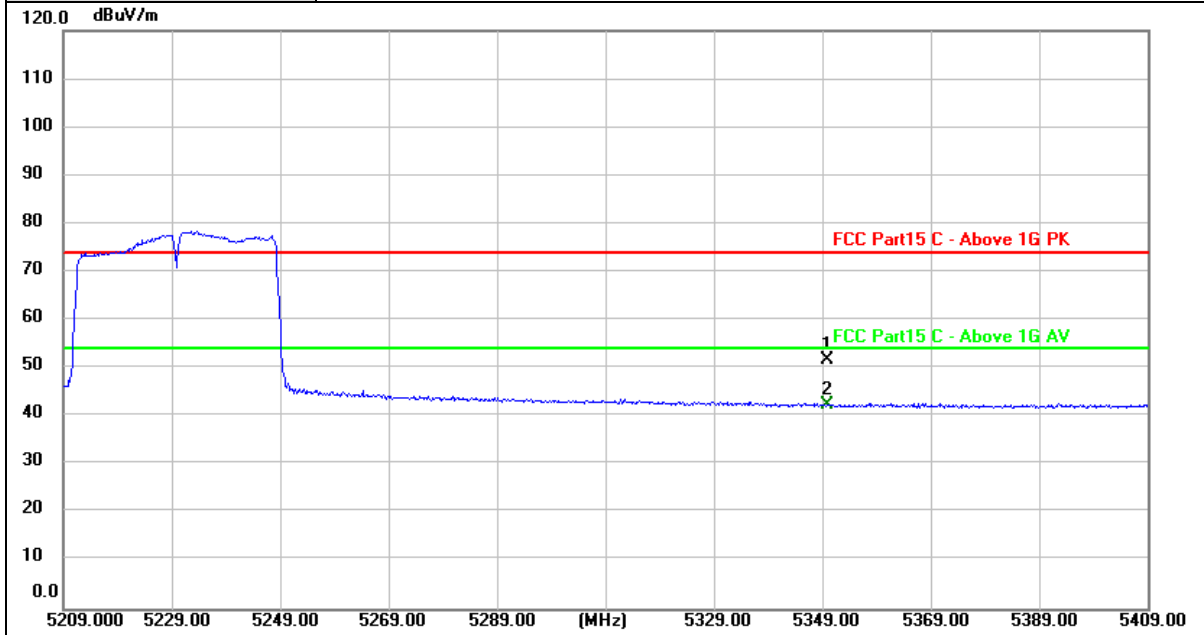

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	14.44	37.40	51.84	74.00	-22.16	peak
2 *	5350.000	5.09	37.40	42.49	54.00	-11.51	AVG


Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-2A)

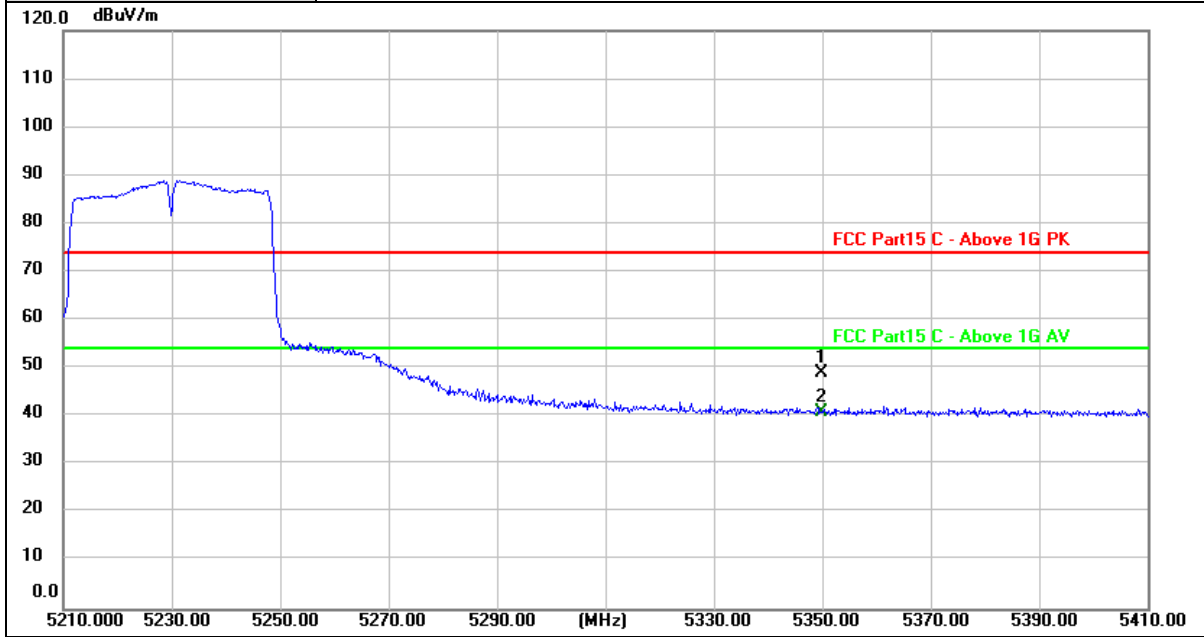

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	11.55	37.40	48.95	74.00	-25.05	peak
2 *	5350.000	3.68	37.40	41.08	54.00	-12.92	AVG


Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)

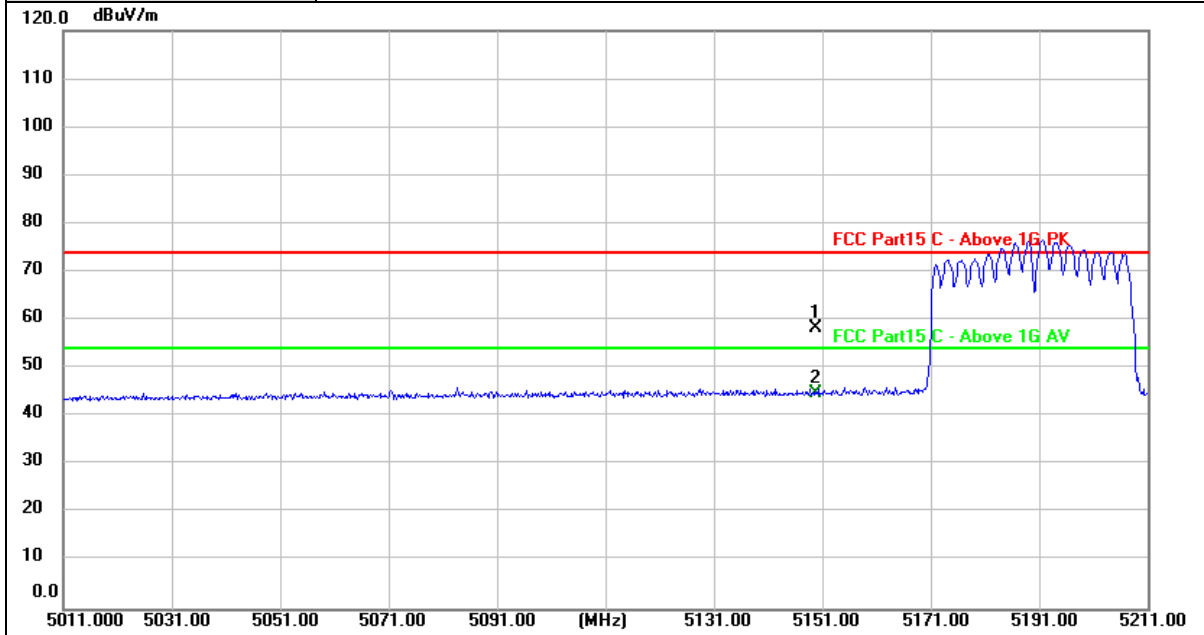

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	21.05	37.18	58.23	74.00	-15.77	peak
2 *	5150.000	7.66	37.18	44.84	54.00	-9.16	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)

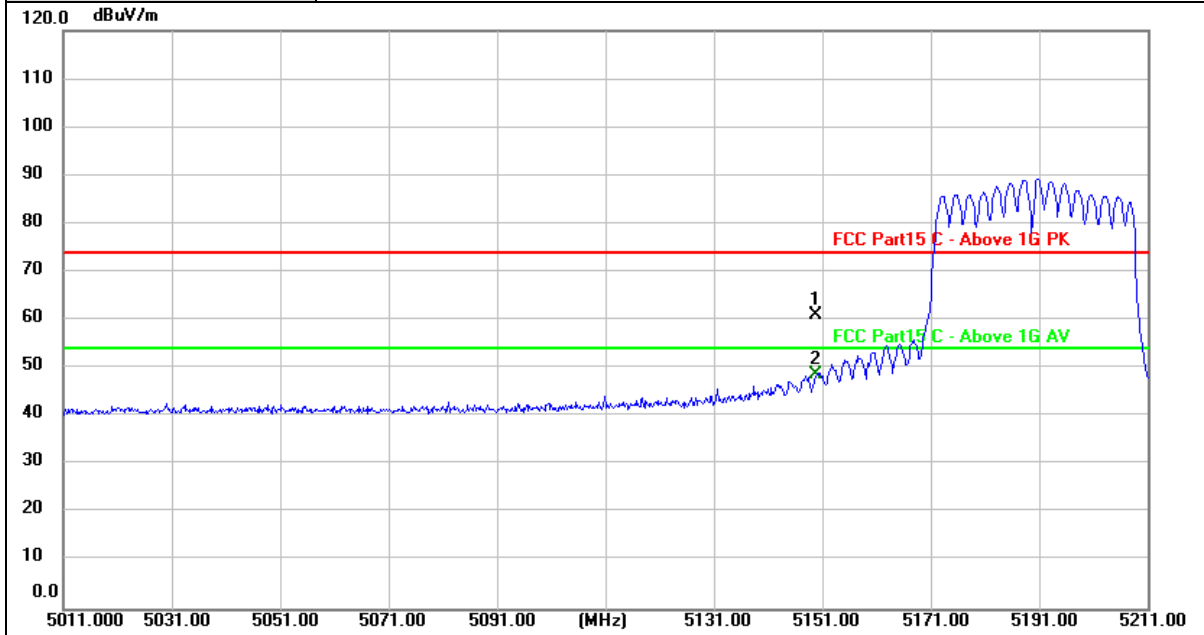

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	23.95	37.18	61.13	74.00	-12.87	peak
2 *	5150.000	11.54	37.18	48.72	54.00	-5.28	AVG


Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-2A)

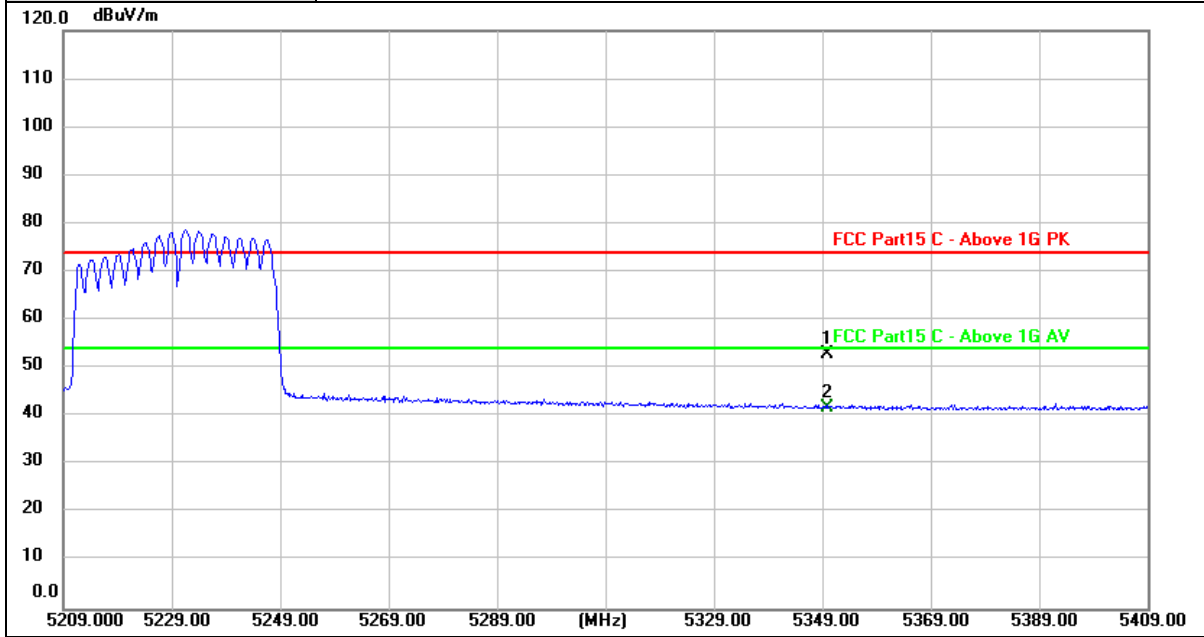

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	15.58	37.40	52.98	74.00	-21.02	peak
2 *	5350.000	4.39	37.40	41.79	54.00	-12.21	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-2A)

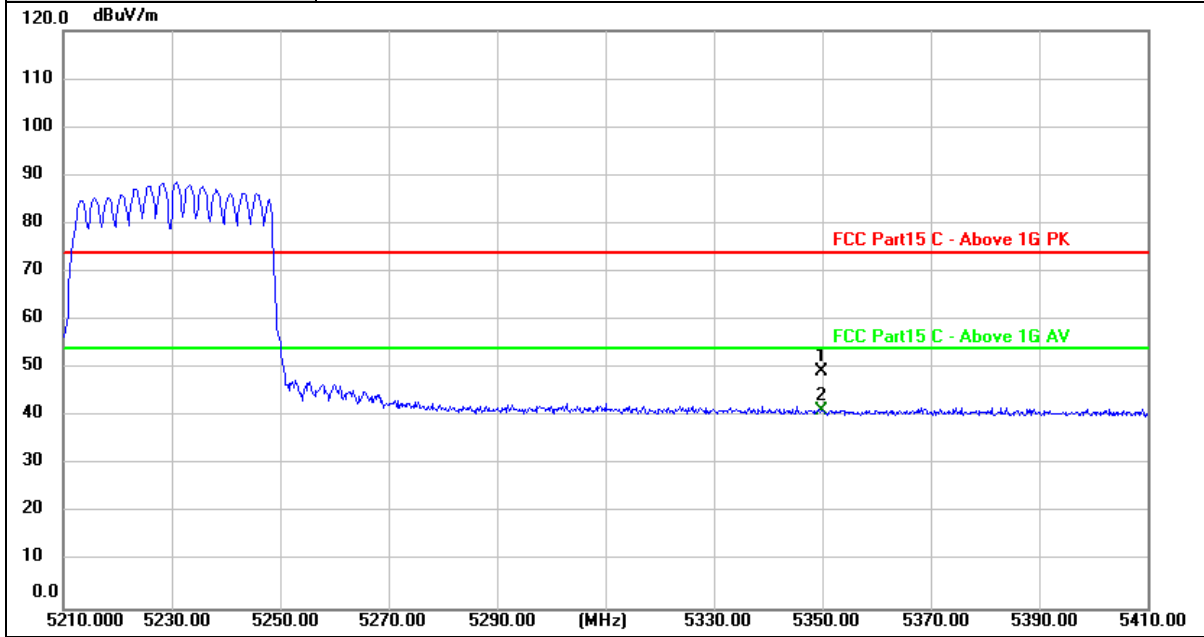

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	11.97	37.40	49.37	74.00	-24.63	peak
2 *	5350.000	3.85	37.40	41.25	54.00	-12.75	AVG


Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1) 26/0

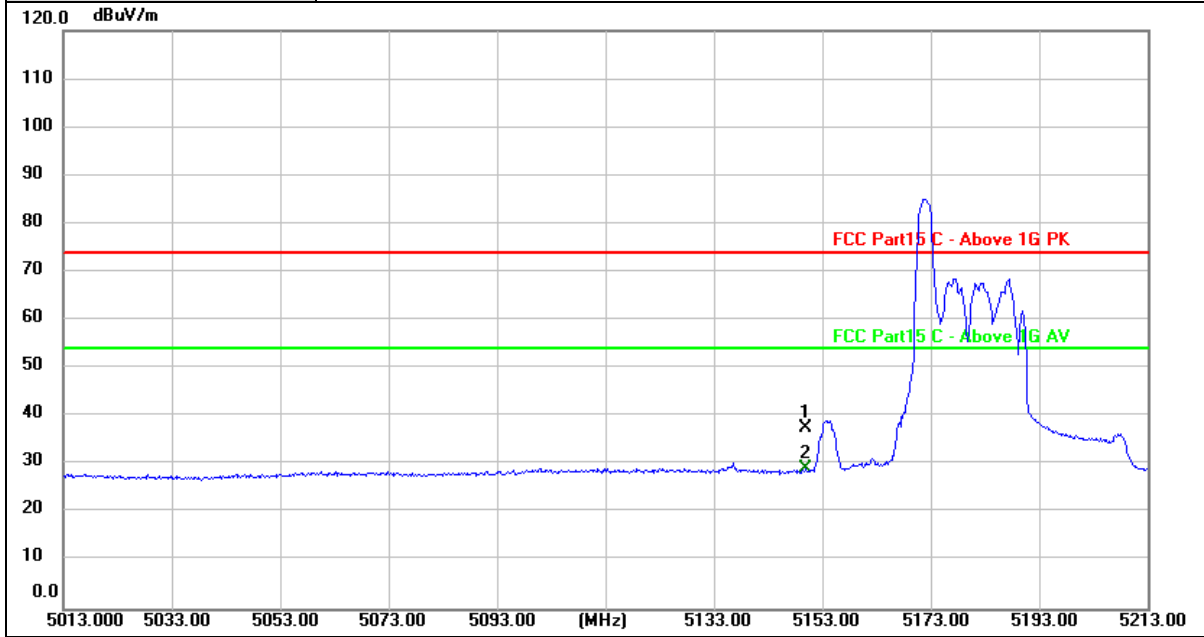


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	35.02	2.78	37.80	74.00	-36.20	peak
2 *	5150.000	26.51	2.78	29.29	54.00	-24.71	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1) 26/0

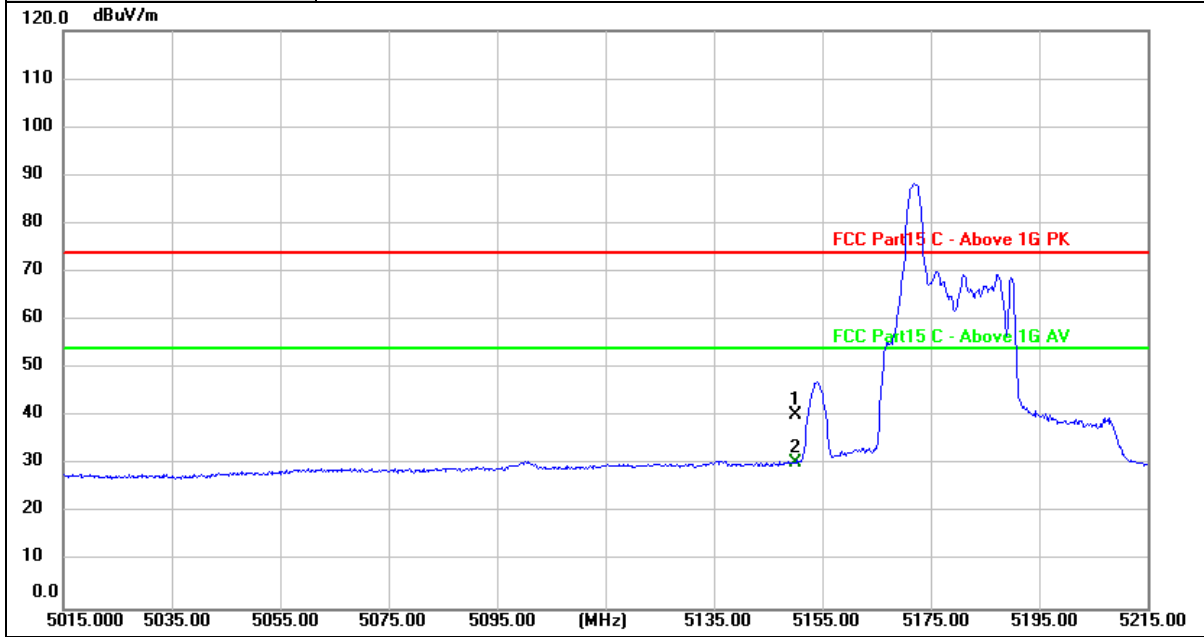

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	37.48	2.78	40.26	74.00	-33.74	peak
2 *	5150.000	27.72	2.78	30.50	54.00	-23.50	AVG

Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value







<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1) 52/37

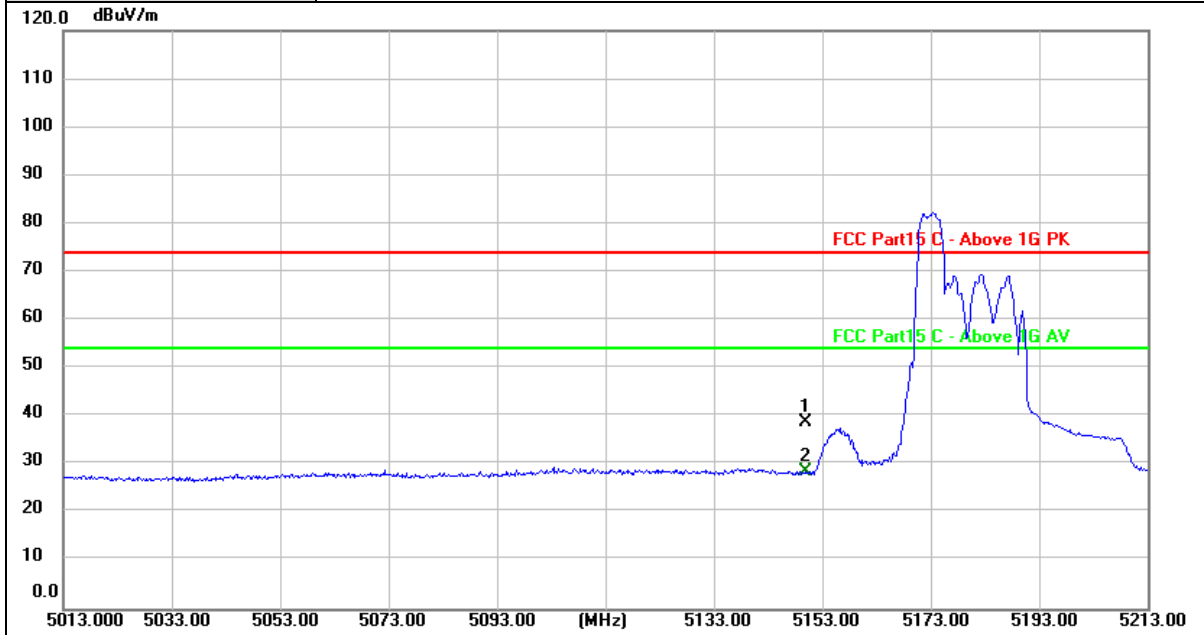

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	35.94	2.78	38.72	74.00	-35.28	peak
2 *	5150.000	25.75	2.78	28.53	54.00	-25.47	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1) 52/37

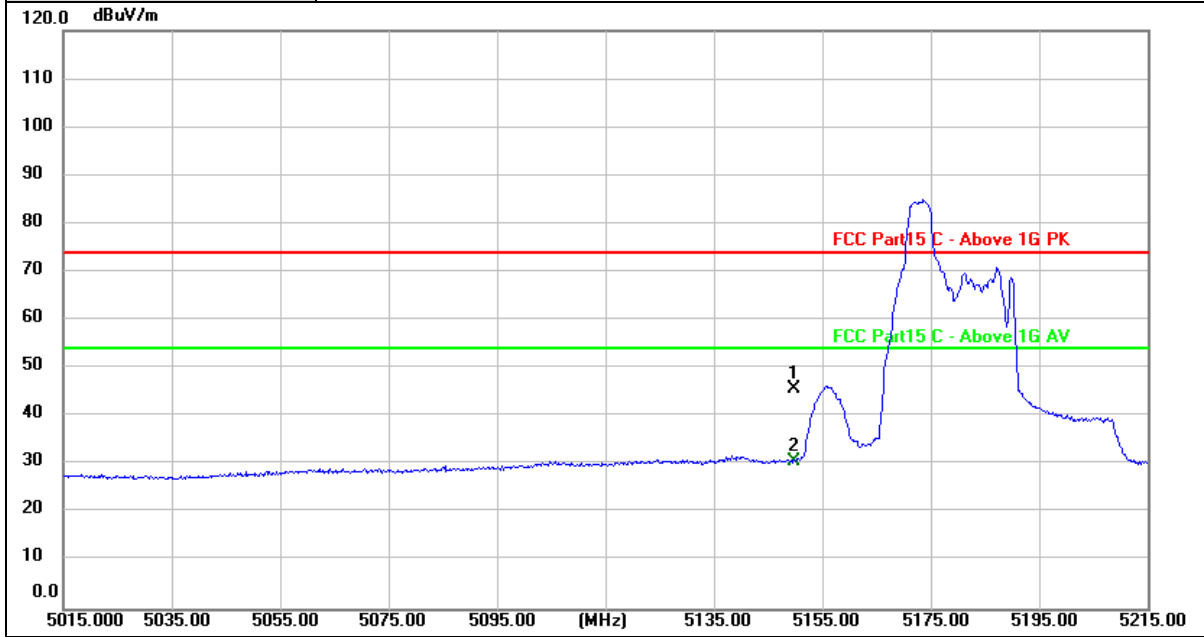

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	43.12	2.78	45.90	74.00	-28.10	peak
2 *	5150.000	28.06	2.78	30.84	54.00	-23.16	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1) 106/53

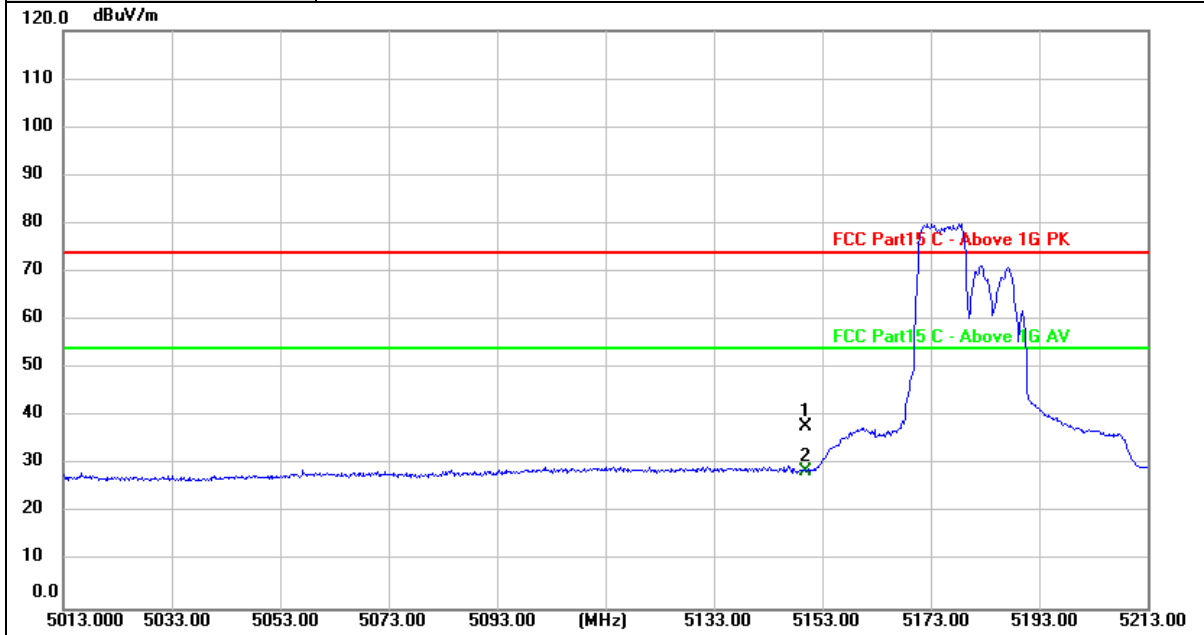

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	35.17	2.78	37.95	74.00	-36.05	peak
2 *	5150.000	25.85	2.78	28.63	54.00	-25.37	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1) 106/53

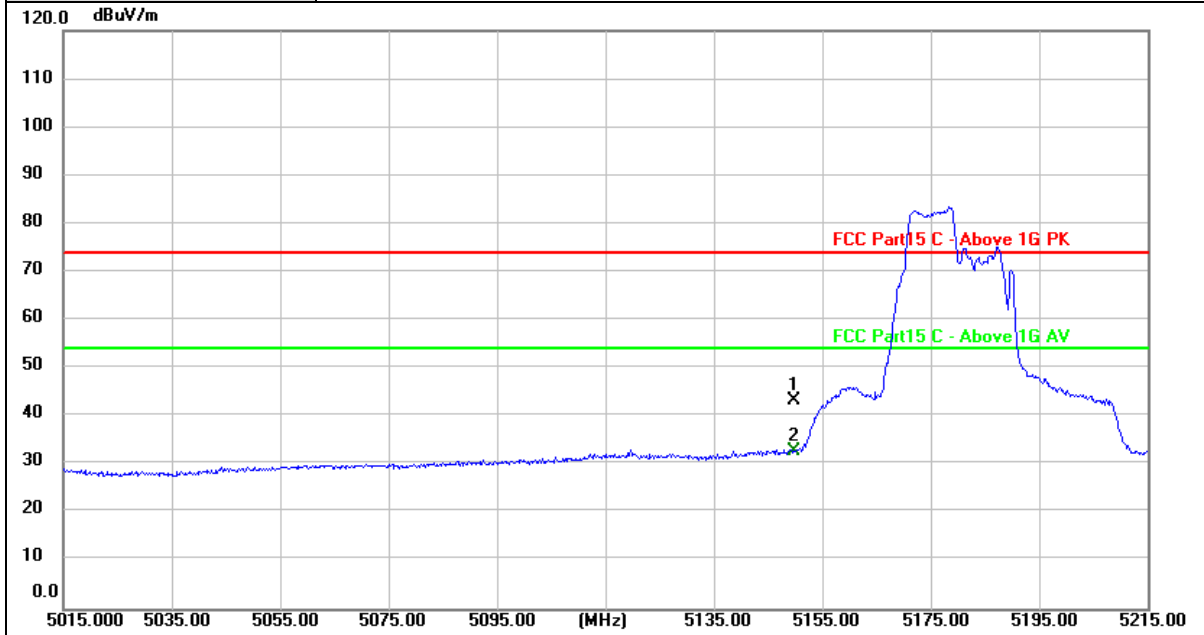

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	40.45	2.78	43.23	74.00	-30.77	peak
2 *	5150.000	30.06	2.78	32.84	54.00	-21.16	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1) 242/61

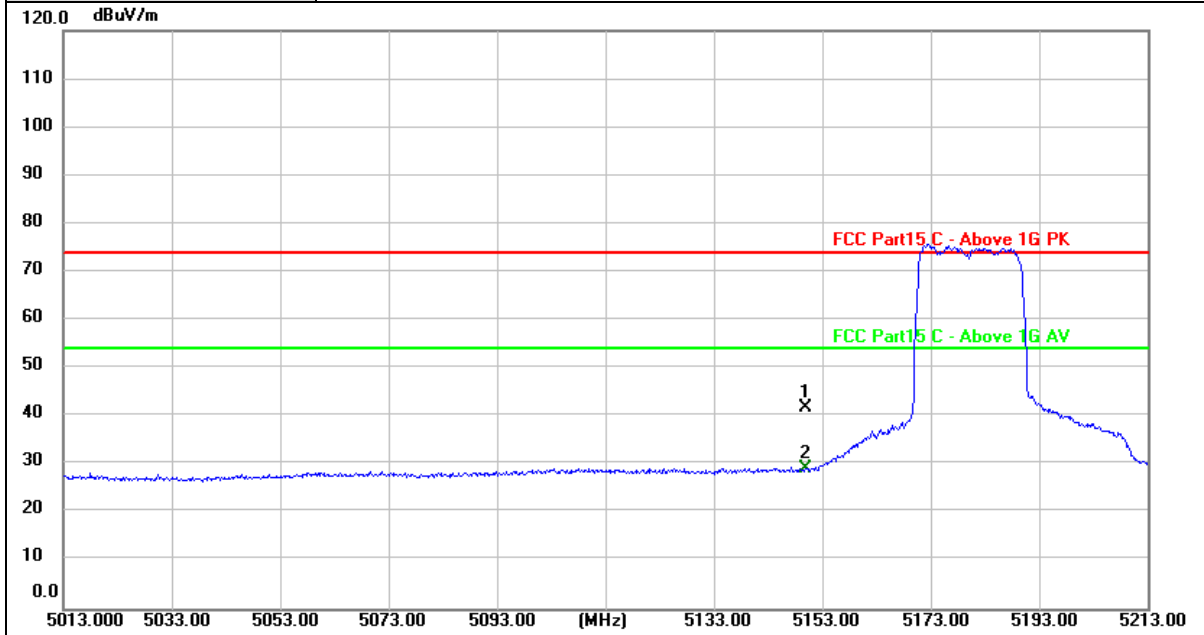

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	39.04	2.78	41.82	74.00	-32.18	peak
2 *	5150.000	26.43	2.78	29.21	54.00	-24.79	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1) 242/61

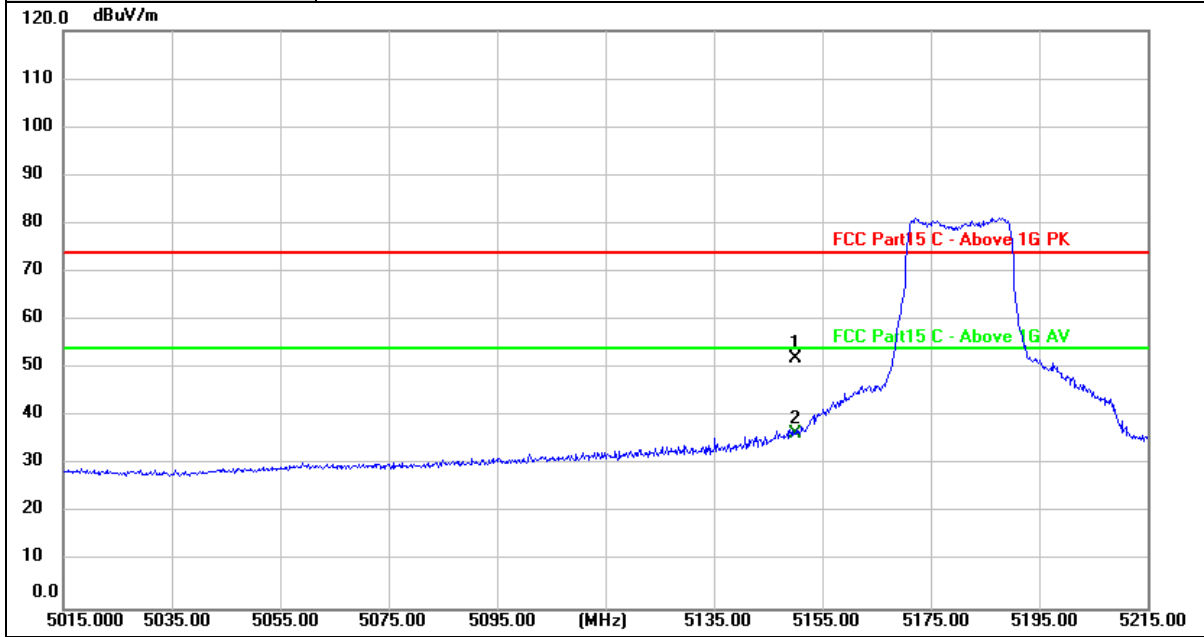

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	49.27	2.78	52.05	74.00	-21.95	peak
2 *	5150.000	33.66	2.78	36.44	54.00	-17.56	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1) 484/65

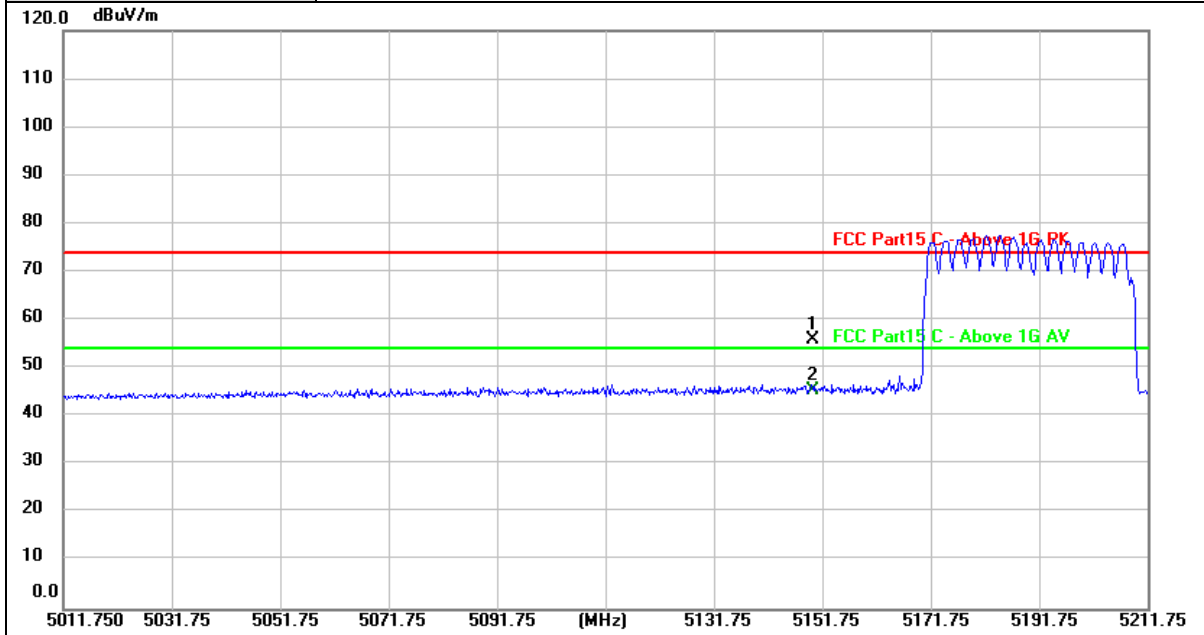

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	18.70	37.18	55.88	74.00	-18.12	peak
2 *	5150.000	8.29	37.18	45.47	54.00	-8.53	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. No.	Ant 0 + Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1) 484/65

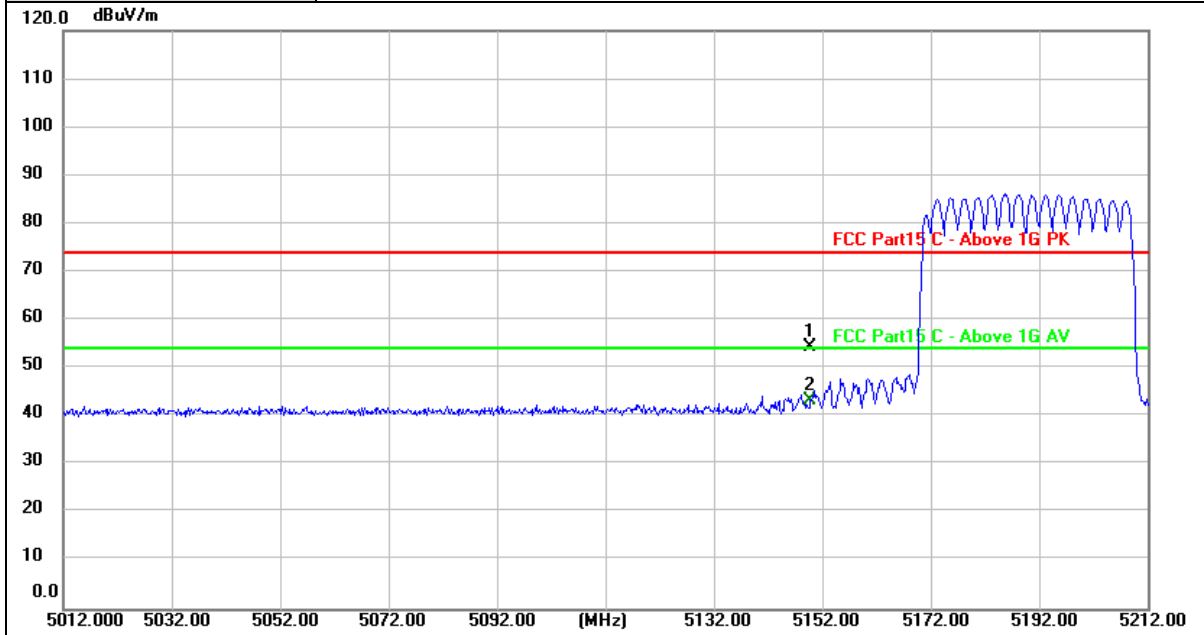

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	17.29	37.18	54.47	74.00	-19.53	peak
2 *	5150.000	6.24	37.18	43.42	54.00	-10.58	AVG

Remarks:


- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value







<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5230MHz (U-NII-2A) 26/17

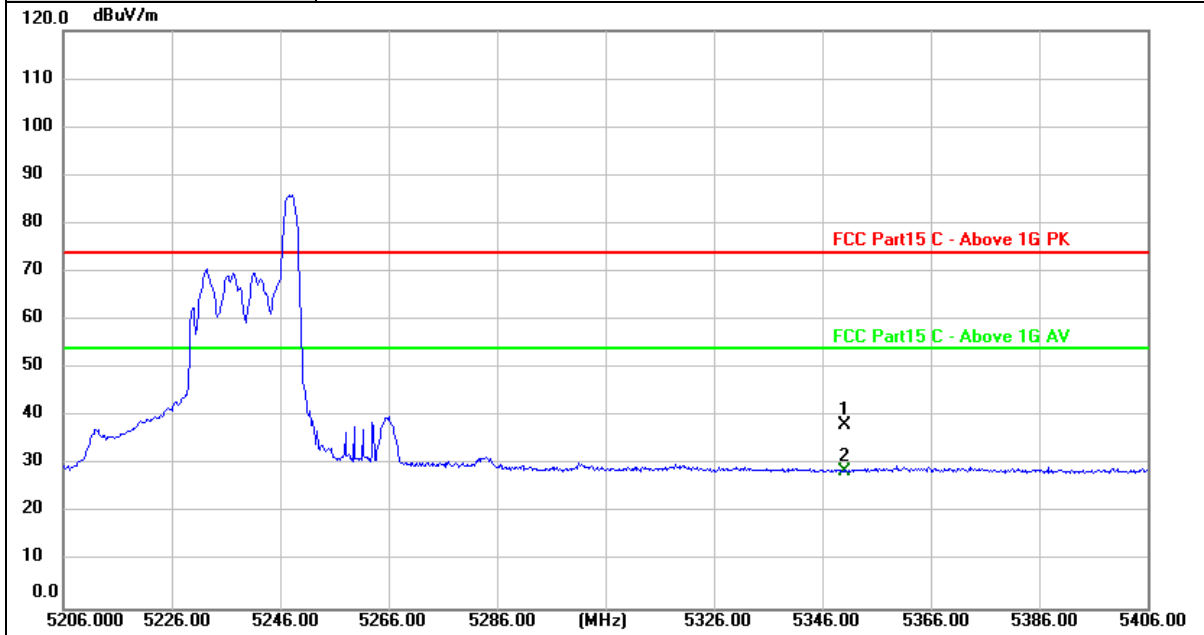

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	34.95	3.26	38.21	74.00	-35.79	peak
2 *	5350.000	25.33	3.26	28.59	54.00	-25.41	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5230MHz (U-NII-2A) 26/17

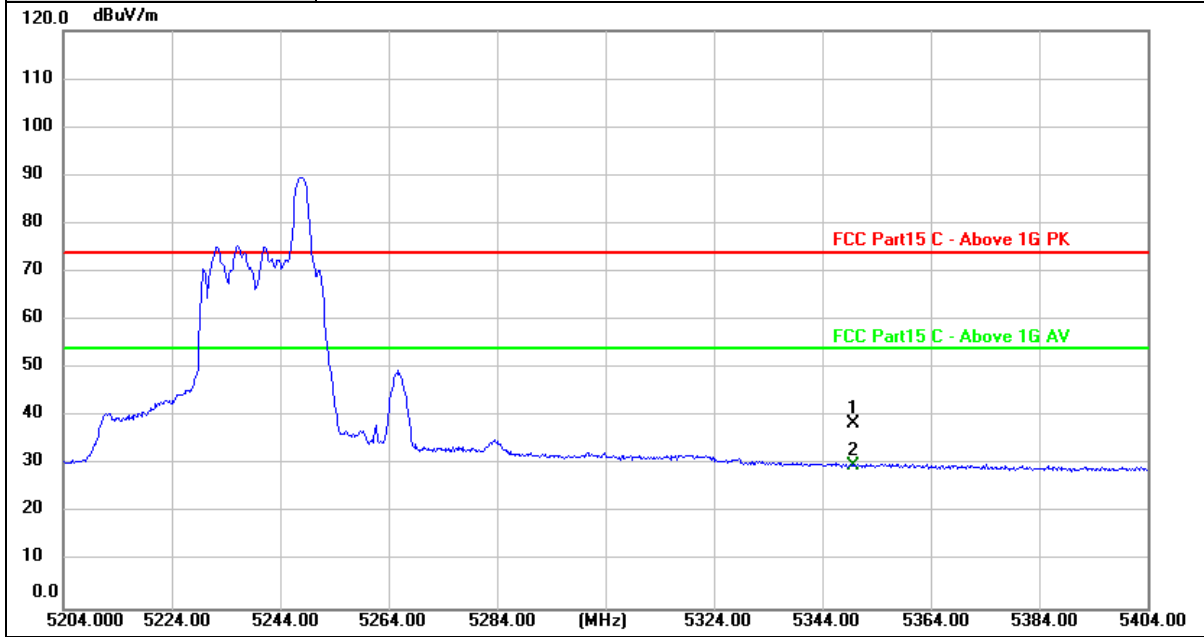


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	35.19	3.26	38.45	74.00	-35.55	peak
2 *	5350.000	26.68	3.26	29.94	54.00	-24.06	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



<b>Ant. No.</b>	Ant 0 + Ant 1
<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 802.11ax(HE40) Mode 5230MHz (U-NII-2A) 52/44

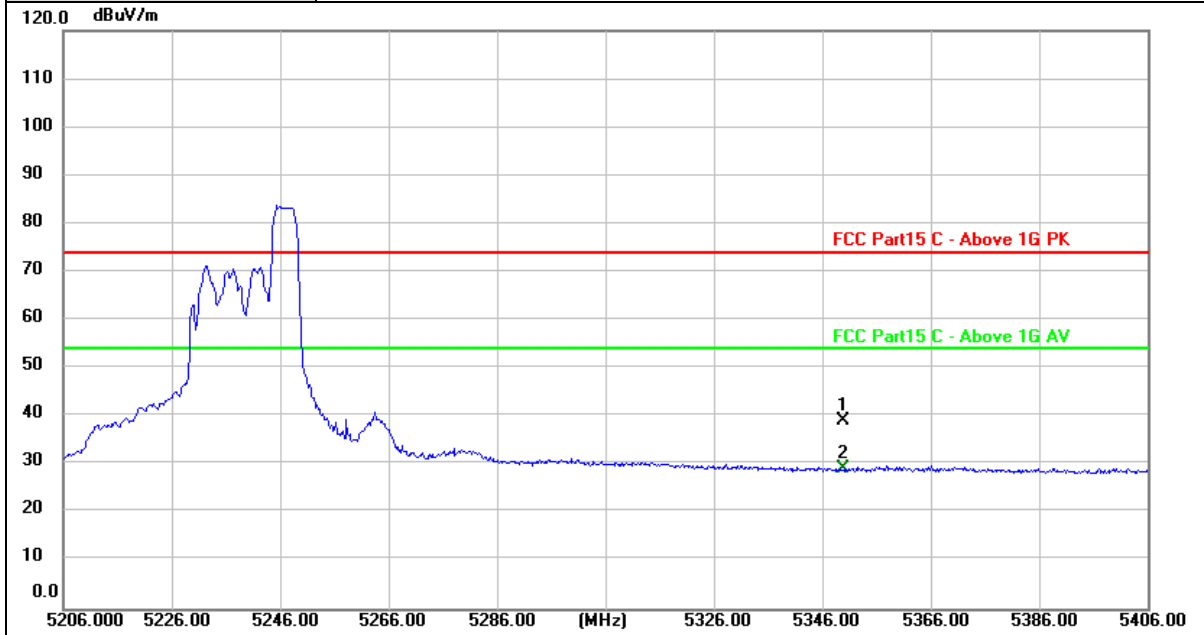

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	35.85	3.26	39.11	74.00	-34.89	peak
2 *	5350.000	25.92	3.26	29.18	54.00	-24.82	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value

