

TEST REPORT

Product Name Model Number		 Philips Soundbar Speaker TAB4208/12, TAB4208/37, TAB4208/61, TAB4208/77, TAB4268/37, TAB4268/yy, TAB4208/yy(yy=00-99 or Nil, for country code) 				
FCC ID		: 2AR2STAB4208				
Prepared for Address		MMD Hong Kong Holding Limited Units 1208-11,12th Floor,C-Bons International Center,108 Wai Yip Street, Kwun Tong,Kowloon, Hong Kong				
Prepared by Address		EMTEK (SHENZHEN) CO., LTD. Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China				
		Tel: (0755) 26954280 Fax: (0755) 26954282				

Report Number	:	ENS2401030176W00601R
Date(s) of Tests	:	October 17, 2023 to January 04, 2024
Date of issue	:	January 04, 2024

深圳信潤标准技术服务股份有限公司 地址:广东省深圳市街山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shepzhen) Co. Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Report No. ENS2401030176W00601R Page 1 of 57 Ver.1.0



Table of Contents

TEST REPORT	
1 TEST RESULT CERTIFICATION	
2 EUT TECHNICAL DESCRIPTION	5
3 SUMMARY OF TEST RESULT	6
4 TEST METHODOLOGY	7
 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS 4.2 MEASUREMENT EQUIPMENT USED 4.3 DESCRIPTION OF TEST MODES 	7
5 FACILITIES AND ACCREDITATIONS	9
5.1 FACILITIES 5.2 LABORATORY ACCREDITATIONS AND LISTINGS	
6 TEST SYSTEM UNCERTAINTY	10
7 SETUP OF EQUIPMENT UNDER TEST	
 7.1 RADIO FREQUENCY TEST SETUP 1 7.2 RADIO FREQUENCY TEST SETUP 2 7.3 CONDUCTED EMISSION TEST SETUP 7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM 7.5 SUPPORT EQUIPMENT 	
8 FREQUENCY HOPPING SYSTEM REQUIREMENTS	
 8.1 Standard Applicable 8.2 EUT Pseudorandom Frequency Hopping Sequence 8.3 Equal Hopping Frequency Use 8.4 Frequency Hopping System	
9 TEST REQUIREMENTS	17
 9.1 20DB BANDWIDTH 9.2 CARRIER FREQUENCY SEPARATION 9.3 NUMBER OF HOPPING FREQUENCIES	
 9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME) 9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER	
9.7 RADIATED SPURIOUS EMISSION 9.8 CONDUCTED EMISSION TEST 9.9 ANTENNA APPLICATION	

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shepzhen) Co. Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Report No. ENS2401030176W00601R Page 2 of 57 Ver.1.0



1 TEST RESULT CERTIFICATION

Applicant	:	MMD Hong Kong Holding Limited
Manufacturer	:	MMD Hong Kong Holding Limited
Factory	:	Soundlab Technology Company Limited.
EUT	:	Philips Soundbar Speaker
Model Name	:	TAB4208/12, TAB4208/37, TAB4208/61, TAB4208/77, TAB4268/37, TAB4268/yy, TAB4208/yy(yy=00-99 or Nil, for country code)
Trademark	:	PHILIPS,

Measurement Procedure Used:

APPLICABLE STANDARDS					
STANDARD TEST RESULT					
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS				

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report

Date of Test :

Prepared by :

October 17, 2023 to January 04, 2024

Seventrus

Reviewer :

Approve & Authorized Signer :

Sewen Guo /Editor

SHENZHEN

ESTING

للہ *

Joe Xia/Supervisor

Lisa Wang/Manager

源圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co. Ltd. Add: Building 69 Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



dified Information

Rev.	Summary	Date of Rev.	Report No.	
	Original Report	2023-11-07	ENS2110170002W00401R	
			A.	



深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shepzhen) Co. Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Report No. ENS2401030176W00601R Ver.1.0



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description			
Product:	Philips Soundbar Speaker			
Model Number:	TAB4208/12, TAB4208/37, TAB4208/61, TAB4208/77, TAB4268/37, TAB4268/yy, TAB4208/yy(yy=00-99 or Nil, for country code) Note: Only the model of TAB4208/37 was tested, since the electrical circuit design, layout, components used and internal wiring are identical, only the color of appearance, model name and country code diferent.			
Device Type:	Bluetooth V5.3			
Data Rate:	1Mbps for BT V5.3 GFSK modulation 2Mbps for BT V5.3 pi/4-DQPSK modulation			
Modulation:	GFSK modulation for BT V5.3 (1Mbps) pi/4-DQPSK modulation for BT V5.3 (2Mbps)			
Operating Frequency Range(s):	2402-2480MHz			
Number of Channels:	79 channels			
Transmit Power Max:	1.29 dBm (0.001346 W)			
Antenna Type:	PCB Antenna			
Antenna Gain:	2.26 dBi			
Input Rating:	AC 100-240V 50/60Hz			
Temperature Range:	0°C ~ +45°C			

Note: for more details, please refer to the User's manual of the EUT.

深圳信测标准技术服务股份有限公司 地址;广东省深圳市南山区马家龙工业区69栋 网址;Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., 11d, Add: Building 69, Malialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Wer.1.0



FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(1)	20 dB Bandwidth	PASS	
15.247(a)(1)	Carrier Frequency Separation	PASS	
15.247(a)(1)	Number of Hopping Frequencies	PASS	
15.247(a)(1)	Average Time of Occupancy (Dwell Time)	PASS	
15.247(b)(1)	Maximum Peak Conducted Output Power	PASS	
15.247(c)	Conducted Spurious Emissions	PASS	
15.247(d) 15.209	Radiated Spurious Emissions	PASS	
15.207	Conducted Emission	PASS	
15.203	Antenna Application	PASS	
NOTE1: N/A (Not	Applicable)	L L	
	лфріїсарісу		

3 SUMMARY OF TEST RESULT

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AR2STAB4208 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards: FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C FCC KDB 558074 D01 15.247 Meas Guidance v05

4.2 MEASUREMENT EQUIPMENT USED

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	chwarz ESCI 101415		2023/5/11	1Year
Power Amplifier	HP	8447F	OPTH64	2023/5/11	1Year
Bilog Antenna	Schwarzbeck	VULB9163	141	2023/5/11	1Year
Horn antenna	Schwarzbeck	BBHA9120D	1272	2023/5/11	1Year
Power Amplifier	LUNAR EM	LNA1G18-40 J1010000081		2023/5/11	1Year
Loop Antenna	Schwarzbeck	FMZB1513	1513-60	2023/5/11	2 Year
Signal Analyzer	R&S	FSV30	103039	2023/5/11	1Year
Bilog Antenna	Schwarzbeck	VULB9163	141	2023/5/11	1Year
Band reject Filter(50dB)	WI/DE	WRCGV-2400(2400- 2485MHz)	2	2023/5/11	1 Year

For other test items:

Equipment	Manufacturer	Model No. Serial No.		Last Cal.	Cal. Interval
Wireless Connectivity Tester	R&S	CMW270	102543	2023/5/11	1Year
Automatic Control Unit	Tonscend	JS0806-2	2118060480	2023/5/11	1Year
Signal Analyzer	KEYSIGHT	N9010B	MY60242456	2023/5/11	1Year
Analog Signal Generator	KEYSIGHT	N5173B	MY61252625	2023/5/11	1Year
UP/DOWN-Converter	R&S	CMW-Z800A	100274	2023/5/11	1Year
Vector Signal Generator	KEYSIGHT	N5182B	MY61252674	2023/5/11	1Year
Frequency Extender	KEYSIGHT	N5182BX07	MY59362541	2023/5/11	1Year
Temperature&Humidity test chamber	ESPEC	EL-02KA	12107166	2023/5/11	1 Year

Remark: Each piece of equipment is scheduled for calibration once a year.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Malialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Report No. ENS2401030176W00601R Page 7 of 57



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for Bluetooth V5.3 GFSK modulation; 2Mbps for Bluetooth V5.3 pi/4-DQPSK modulation) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	
0	2402	39	2441			
1	2403	40	2442	76	2478	
2	2404	41	2443	77	2479	
				78	2480	
Note: fc=2402MHz+k×1MHz_k=0 to 78						

Frequency and Channel list for Bluetooth V5.3

Note: fc=2402MHz+k×1MHz k=0 to 78

Test Frequency and channel for Bluetooth V5.3

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	78	2480

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co. Ltd. Add: Building 69. Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description	
EMC Lab.	 Accredited by CNAS, 2018.11.30 The certificate is valid until 2022.10.28 The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005) The Certificate Registration Number is L2291. Accredited by TUV Rheinland Shenzhen 2016.5.19 The Laboratory has been assessed according to the requirements ISO/IEC 17025.
	Accredited by FCC Designation Number: CN1204 Test Firm Registration Number: 882943
	Accredited by Industry Canada, November 09, 2018 The Certificate Registration Number is 4480A.
	Accredited by A2LA,August 08, 2018 The Certificate Number is 4321.01.
Name of Firm Site Location	 EMTEK (SHENZHEN) CO., LTD. Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Malialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	±1x10^-5
Maximum Peak Output Power Test	±1.0dB
Conducted Emissions Test	±2.0dB
Radiated Emission Test	±2.0dB
Occupied Bandwidth Test	±1.0dB
Band Edge Test	±3dB
All emission, radiated	±3dB
Antenna Port Emission	±3dB
Temperature	±0.5°C
Humidity	±3%

Measurement Uncertainty for a level of Confidence of 95%

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn


EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalang Industry Zone, Nanshan District, Shenzhen, Guangdong, China, Http://www.emtek.com.cn, E-mail: cs.rep@emtek.com.cn Report No. ENS2401030176W00601R Ver.1.0



7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth V5.3 component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


Above 30MHz:


The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

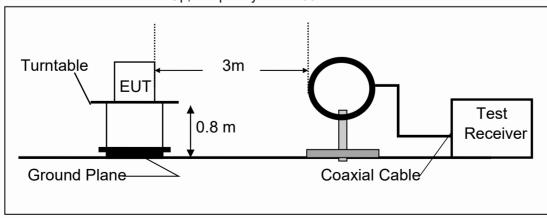





深圳信测标准技术服务股份有限公司地址;广东省深圳市南山区马家龙工业区69栋 网址;Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn


EMTEK (Shenzhen) Co. Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guanodong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



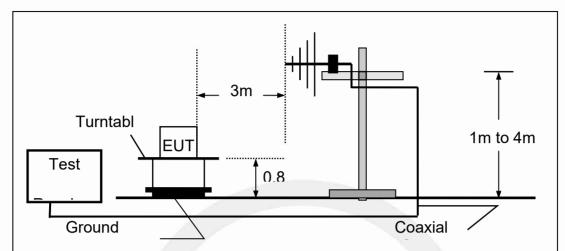

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz



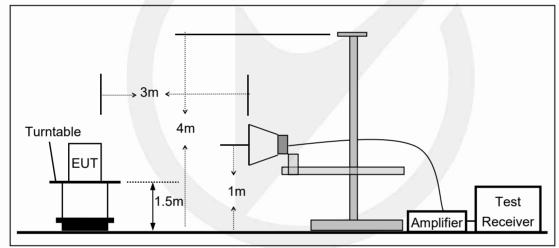

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co. Ltd. Add: Building 69. Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0




7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Perfect Share Mini) must be connected to LISN. The LISN shall be placed 0.8m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8m.


According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

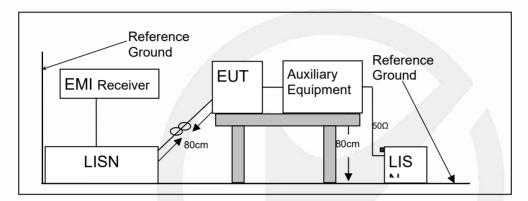

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

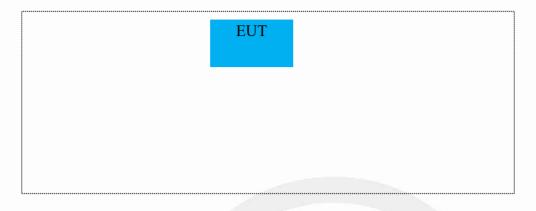

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details				
Cable Description Length (m) Shielded/Unshielded With / Without Ferrite				

Auxiliary Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	
/	/	1	1	

Auxiliary Equipment List and Details					
Description	Manufacturer	Model	Serial Number		
Notebook	acer	ZR1	LXTECOCO76643158 372500		
	/	1	/		

Notes:

- *1*. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Malialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Page 14 of 57



8 FREQUENCY HOPPING SYSTEM REQUIREMENTS

8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

8.2 EUT Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divide into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: 29-1 = 511 bits Longest sequence of zeros: 8 (non-inverted signal)


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Page 15 of 57





Linear Feedback Shift Register for Generation of the PRBS sequence

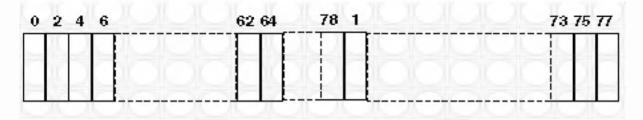

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode:

35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53

Each Frequency used equally on the average by each transmitter

8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Page 16 of 57



9 TEST REQUIREMENTS

9.1 20DB BANDWIDTH

9.1.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE V05

9.1.2 Conformance Limit

No limit requirement.

9.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.1.4 Test Procedure

The EUT was operating in Bluetooth V5.3 mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) =100 kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Page 17 of 57



TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.951	2401.583	2402.534		
DH5	Ant1	2441	0.954	2440.583	2441.537		
DH5	Ant1	2480	0.951	2479.586	2480.537		
2DH5	Ant1	2402	1.329	2401.385	2402.714		
2DH5	Ant1	2441	1.323	2440.391	2441.714		
2DH5	Ant1	2480	1.329	2479.388	2480.717		



深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shepzhen) Co. Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangrong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Report No. ENS2401030176W00601R Page 18 of 57 Ver.1.0





深圳信潤标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn
EMTEK (Shepzhen) Co., Ltd., Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn
Report No. ENS2401030176W00601R
Page 19 of 57
Ver.1.0





深圳信潤标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shepzhen) Co. Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangtong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Report No. ENS2401030176W00601R Page 20 of 57 Ver.1.0





深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Malialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



9.2 CARRIER FREQUENCY SEPARATION

9.2.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE V05

9.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

9.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.2.4 Test Procedure

According to FCC Part15.247(a)(1)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Set the RBW =100kHz. Set VBW =300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Нор	1.166	≥0.954	PASS
2DH5	Ant1	Нор	1.272	≥0.886	PASS

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Page 22 of 57





深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn
EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guanadong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn
Report No. ENS2401030176W00601R
Page 23 of 57
Ver.1.0



9.3 NUMBER OF HOPPING FREQUENCIES

9.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii)and KDB 558074 D01 15.247 MEAS GUIDANCE V05

9.3.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

9.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.3.4 Test Procedure

According to FCC Part15.247(a)(1)(iii)
 The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
 Span = the frequency band of operation (2400-2483.5MHz)
 RBW ≥ 100KHz
 VBW ≥ RBW
 Sweep = auto
 Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

Test Results


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Нор	79	≥15	PASS
2DH5	Ant1	Нор	79	≥15	PASS

源圳值测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



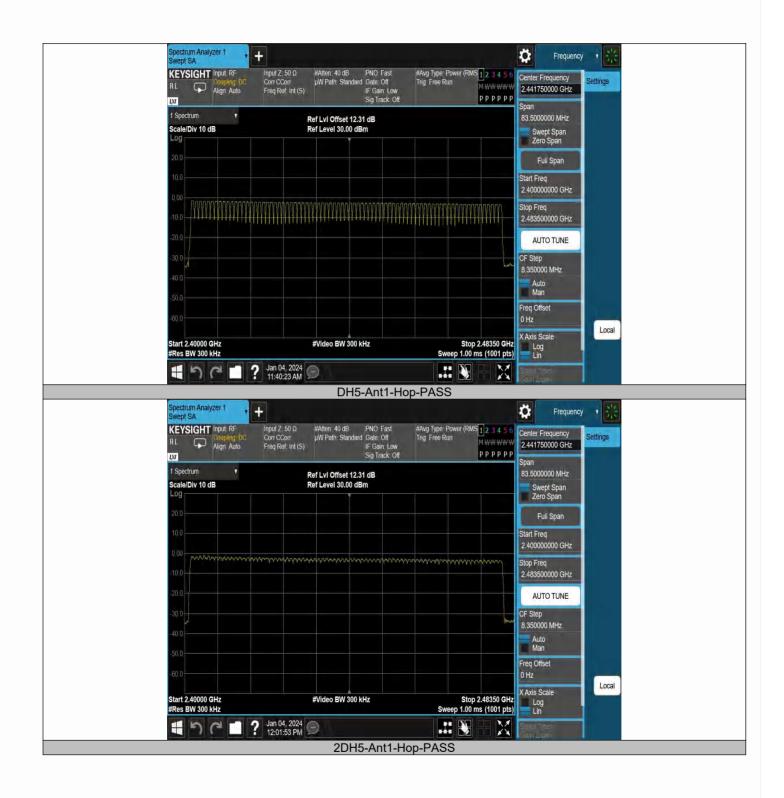

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn
EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn
Report No. ENS2401030176W00601R
Page 25 of 57
Ver.1.0



9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

9.4.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and KDB 558074 D01 15.247 MEAS GUIDANCE V05

9.4.2 Conformance Limit

For frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

9.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.4.4 Test Procedure

■ According to FCC Part15.247(a)(1)(iii)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

 $VBW \ge RBW$

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value

varies with different modes of operation (e.g., data rate, modulation format, etc.),

repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section.

9.4.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Note: DwellTime(DH1)=PW*(1600/2/79)*31.6 DwellTime(DH3)=PW*(1600/4/79)*31.6


DwellTime(DH5)=PW*(1600/6/79)*31.6

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Нор	0.386	320	0.124	≤0.4	PASS
DH3	Ant1	Нор	1.643	160	0.263	≤0.4	PASS
DH5	Ant1	Нор	2.891	106.67	0.308	≤0.4	PASS
2DH1	Ant1	Нор	0.395	320	0.126	≤0.4	PASS
2DH3	Ant1	Нор	1.647	160	0.264	≤0.4	PASS
2DH5	Ant1	Нор	2.894	106.67	0.309	≤0.4	PASS

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Page 26 of 57




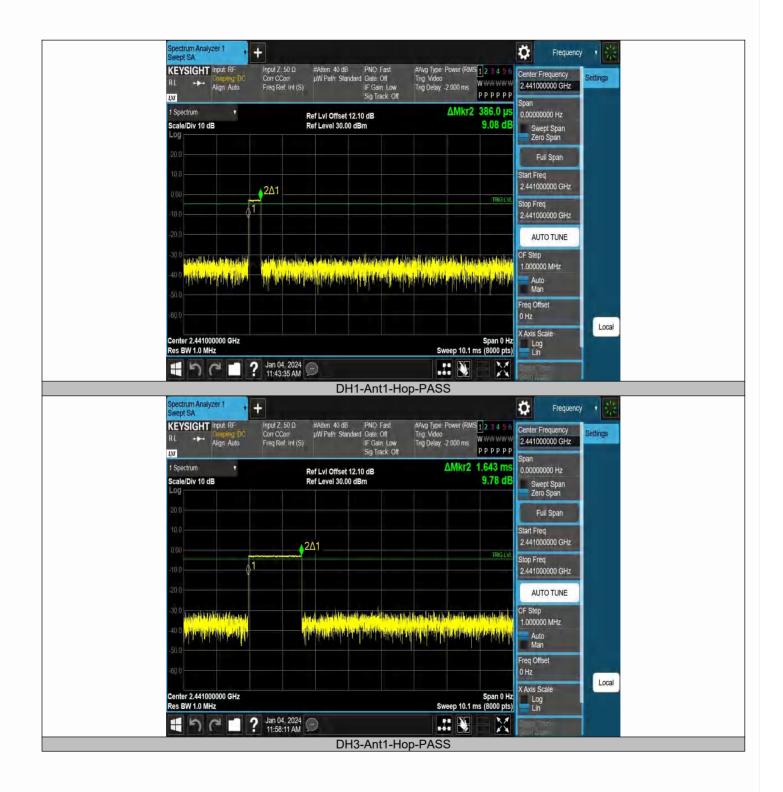

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn


EMTEK (Shenzhen) Co. Ltd. Add: Building 69. Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@entek.com.cn Ver.1.0



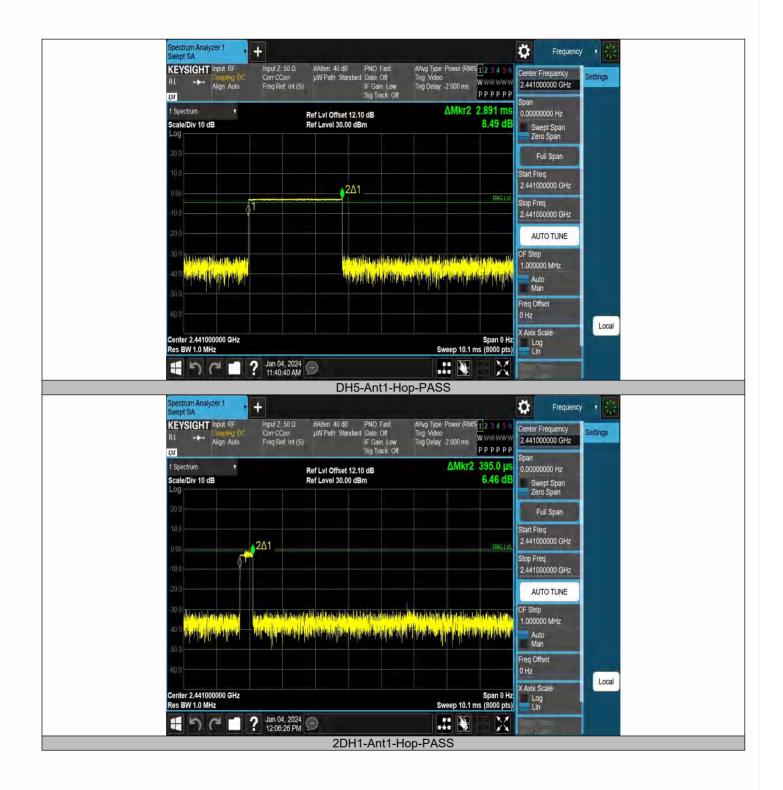

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn
EMTEK (Shenzhen) Co. Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn
Report No. ENS2401030176W00601R
Page 28 of 57



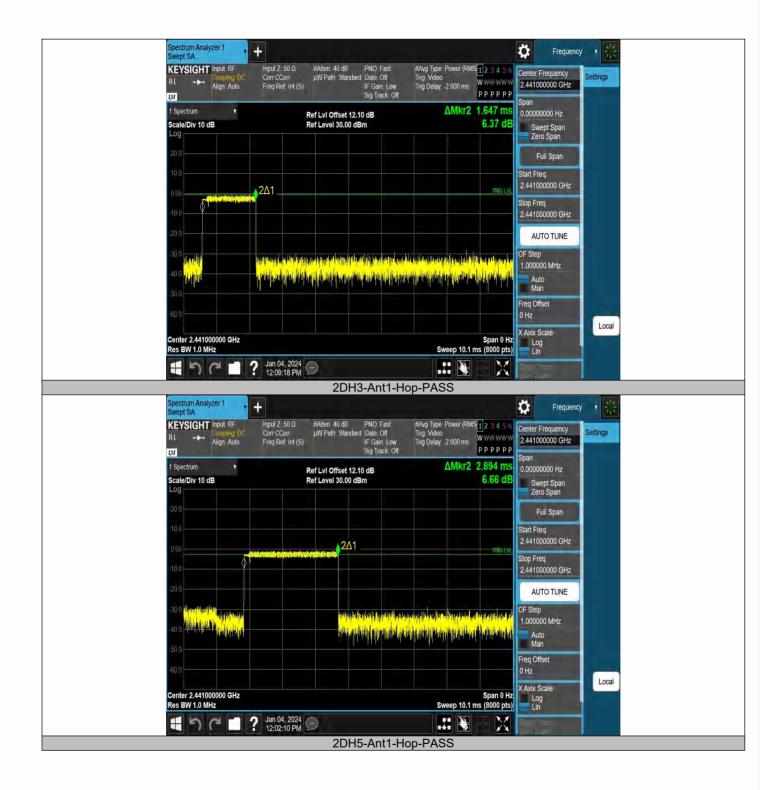

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Malialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China. Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE V05

9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.5.4 Test Procedure

According to FCC Part15.247(b)(1)

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 10MHz)

Set RBW > the 20 dB bandwidth of the emission being measured (about 3MHz)

Set VBW \geq RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

Test Results


Temperature:	26° C		
Relative Humidity:	54%		
ATM Pressure:	1011 mbar		

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Powert[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	-0.90	≤20.97	PASS
DH5	Ant1	2441	-2.22	≤20.97	PASS
DH5	Ant1	2480	-2.72	≤20.97	PASS
2DH5	Ant1	2402	1.29	≤20.97	PASS
2DH5	Ant1	2441	0.09	≤20.97	PASS
2DH5	Ant1	2480	-0.75	≤20.97	PASS

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn


EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Page 30 of 57
Ver.1.0



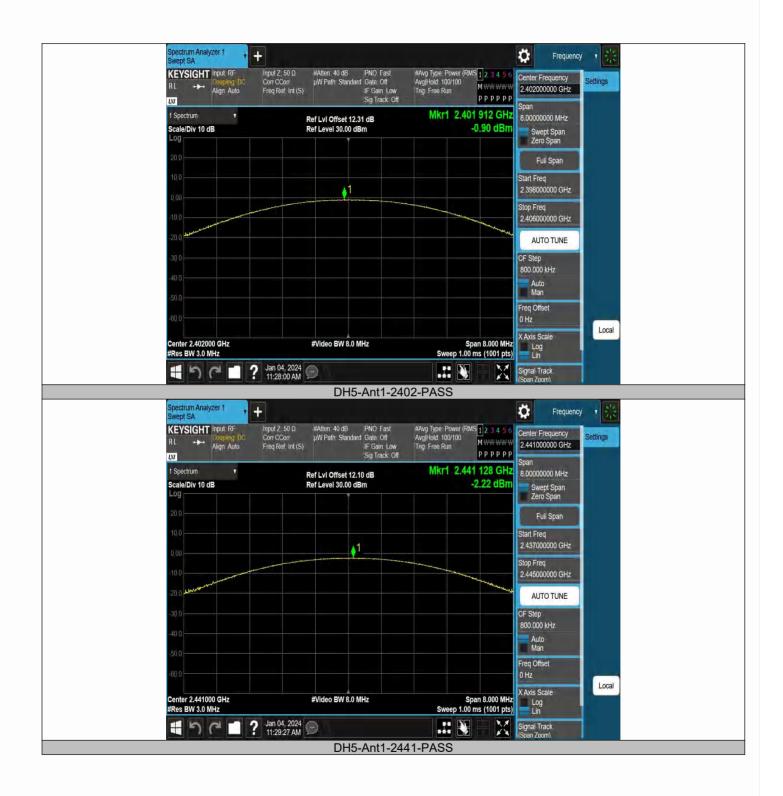


深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn
EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guanadong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn
Report No. ENS2401030176W00601R
Page 31 of 57
Ver.1.0



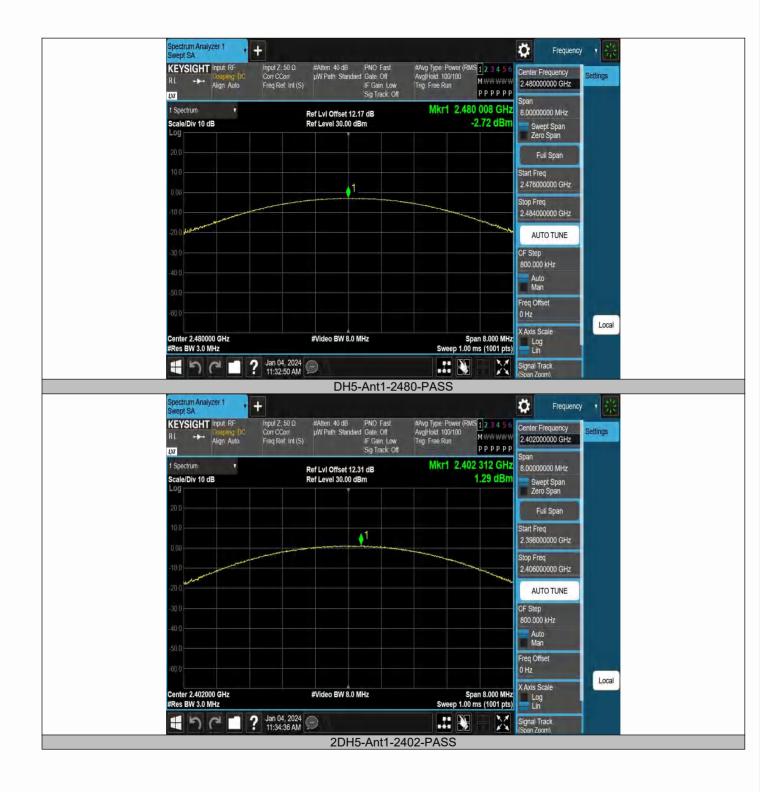

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn
EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guanadong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn
Report No. ENS2401030176W00601R
Page 32 of 57
Ver.1.0



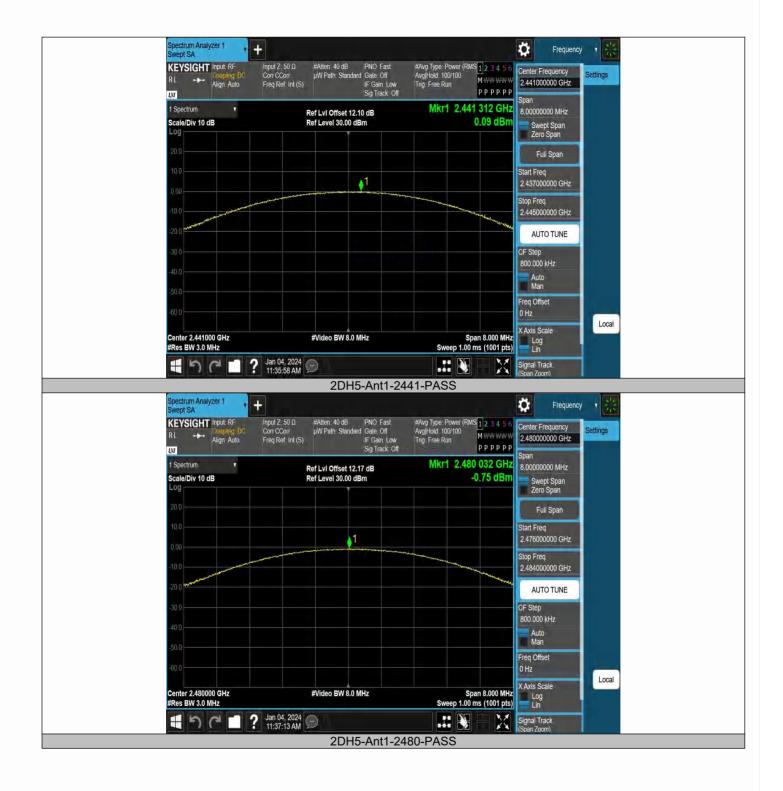

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn
EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guanadong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn
Report No. ENS2401030176W00601R
Page 33 of 57
Ver.1.0



9.6 CONDUCTED SUPRIOUS EMISSION

9.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 MEAS GUIDANCE V05

9.6.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

9.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW \ge 3 x RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conduceted level.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW \geq 1% of the span=100kHz Set VBW \geq RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

Conduceted Spurious RF Conducted Emission

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz). Set RBW = 100 kHz Set VBW \ge RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.


EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Page 34 of 57



9.6.5 Test Results

Bluetooth (GFSK, pi/4-DQPSK)	mode have been tested, and the worst result(GFSK) was report as below:
	mode have been teeted, and the welet recall of only had report as below.

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-2.02	-37.65	≤-22.02	PASS
DH5	Ant1	High	2480	-4.03	-47.52	≤-24.03	PASS
DH5	Ant1	Low	Hop_2402	-2.35	-47.77	≤-22.35	PASS
DH5	Ant1	High	Hop_2480	-3.24	-33.91	≤-23.24	PASS

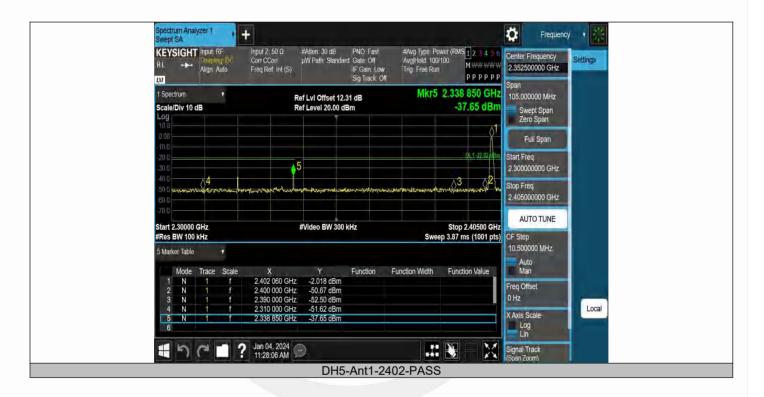

源圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0






深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co. Ltd. Add: Building 69. Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



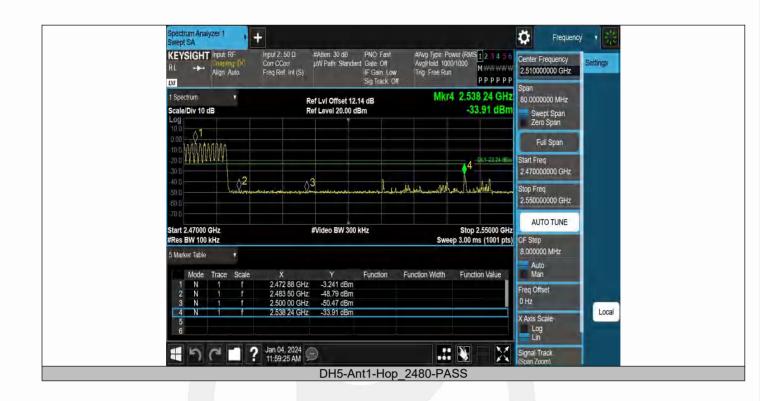


Bluetooth (GFSK, pi/4-DQPSK) mode have been tested, and the worst result(GFSK) was report as below:

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	-2.19	-2.19		PASS
DH5	Ant1	2402	30~1000	-2.19	-60.89	≤-22.19	PASS
DH5	Ant1	2402	1000~26500	-2.19	-46.61	≤-22.19	PASS
DH5	Ant1	2441	0~Reference	-3.28	-3.28		PASS
DH5	Ant1	2441	30~1000	-3.28	-59.72	≤-23.28	PASS
DH5	Ant1	2441	1000~26500	-3.28	-46.16	≤-23.28	PASS
DH5	Ant1	2480	0~Reference	-4.06	-4.06		PASS
DH5	Ant1	2480	30~1000	-4.06	-59.77	≤-24.06	PASS
DH5	Ant1	2480	1000~26500	-4.06	-48	≤-24.06	PASS

源圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Malialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Wer.1.0



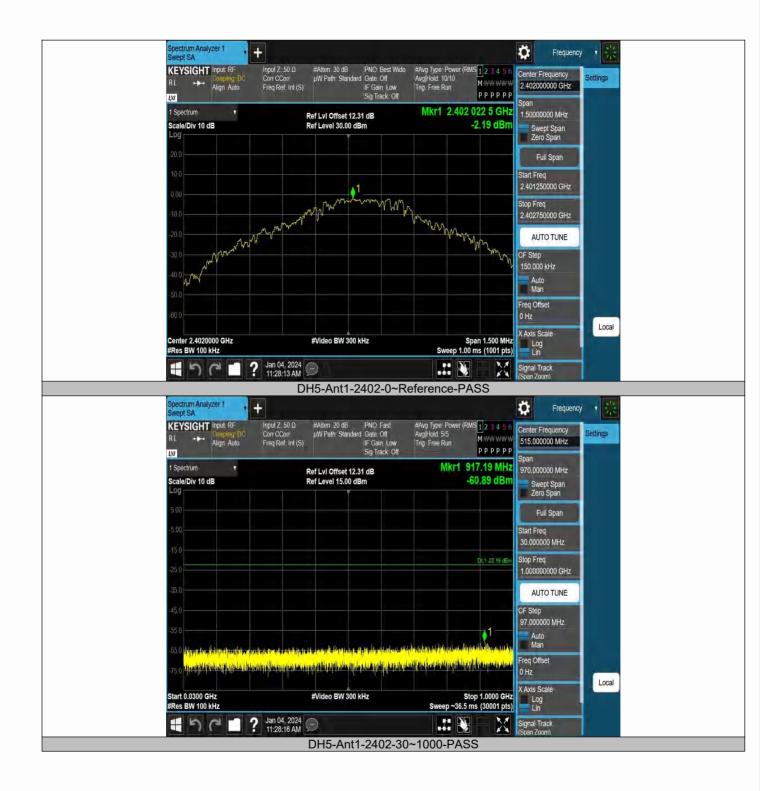

深圳信测标准技术服务股份有限公司 地址:广东省深圳市街山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn


EMTEK (Shenzhen) Co. Ltd. Add: Building 69, Malialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@entek.com.cn Ver.1.0





深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn
EMTEK (Shenzhen) Co. Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn
Report No. ENS2401030176W00601R
Page 39 of 57




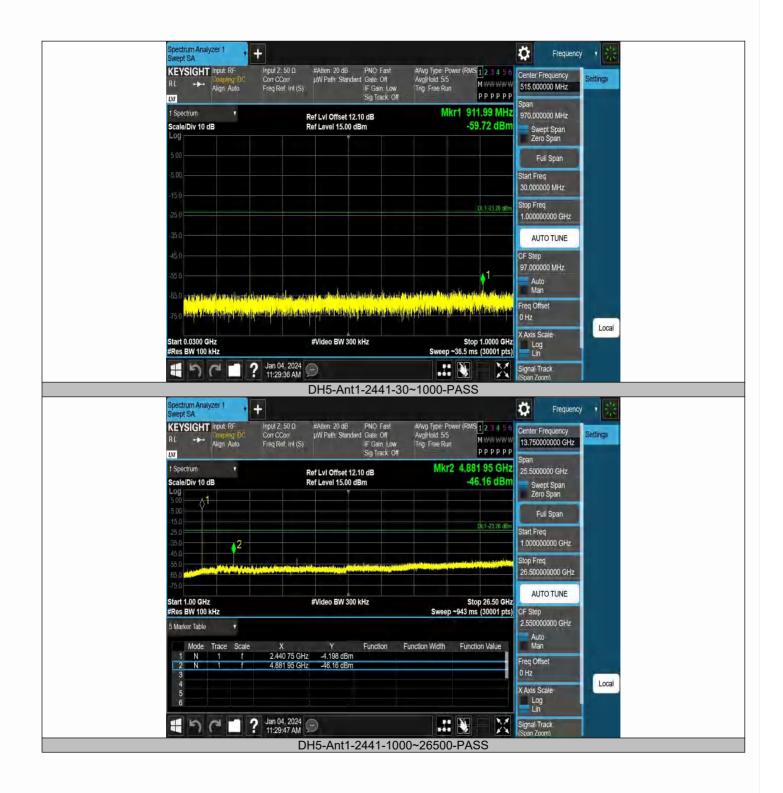

深圳值测标准技术服务股份有限公司地址:广东省深圳市商山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co. Ltd. Add: Building 69. Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@entek.com.cn Ver.1.0




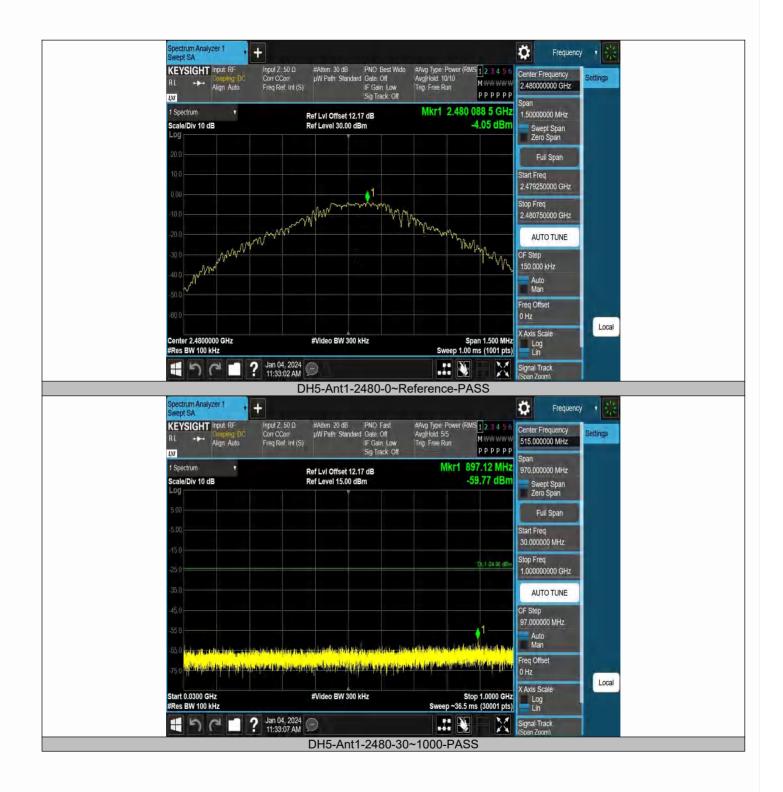

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Malialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Report No. ENS2401030176W00601R Ver.1.0



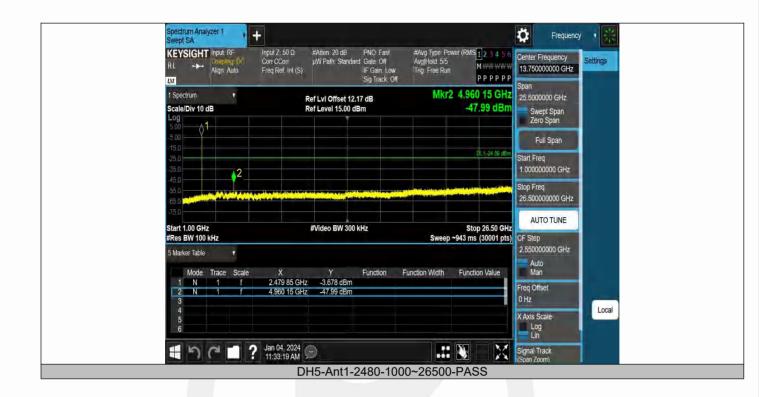

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co. Ltd. Add. Building 69. Maijalong Industry Zone, Nanshan District. Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



9.7 RADIATED SPURIOUS EMISSION

9.7.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE V05

9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). According to FCC Part15.205. Restricted bands

According to FUU Part 15.	205, Resincled bands		
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960 200		46	3
Above 960	500	54	3

9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured

opan – while chough to fully capture the christion being measured

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co. Ltd. Add: Building 69. Maijalong Industry Zone, Nanshan District, Shenzhen, Guanodong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Page 43 of 57



RBW = 1 MHz $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max holdFor Below 1GHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 100 kHz for $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold For Below 30MHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 9kHzVBW > RBW Sweep = auto Detector function = peak Trace = max hold For Below 150KHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 200Hz $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring

the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the EUT, measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log(dwell time/100 ms), in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

9.7.5 Test Results

Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cr Page 44 of 57



Freq.	Ant.Pol.	Emis Level(d	ssion BuV/m)	Limit 3m	(dBuV/m)	Over(dB)	
(MHz)	H/V	PK È	ÁV	PK	AV	PK	AV

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

Spurious Emission Above 1GHz (1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Test mode:	GFS	K	Frequency:			l 0: 2402MHz	Ζ		
Freq. (MHz)	Ant.Pol.		ssion BuV/m)	Limit 3m((dBuV/m)	Ove	er(dB)		
	H/V	PK	AV	PK	AV	PK	AV		
7964.53	V	58.83	44.65	74.00	54.00	-15.17	-9.35		
10948.77	V	58.78	44.66	74.00	54.00	-15.22	-9.34		
13989.84	V	58.08	43.95	74.00	54.00	-15.92	-10.05		
7923.20	Н	58.34	44.19	74.00	54.00	-15.66	-9.81		
10819.79	Н	59.04	44.86	74.00	54.00	-14.96	-9.14		
12868.72	Н	59.11	44.98	74.00	54.00	-14.89	-9.02		

Test mode:

GFSK

GFSK

Frequency: Channel 39:

Channel 39: 2441MHz

Freq.	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m	(dBuV/m)	Over(dB)		
(MHz)	H/V	PK	AV	PK	AV	PK	AV	
8001.45	V	58.70	44.57	74.00	54.00	-15.30	-9.43	
10936.12	V	58.83	44.70	74.00	54.00	-15.17	-9.30	
13977.71	V	58.17	44.02	74.00	54.00	-15.83	-9.98	
4882.50	Н	50.73	42.68	74.00	54.00	-23.27	-11.32	
8761.61	Н	58.71	44.55	74.00	54.00	-15.29	-9.45	
12643.81	Н	58.97	44.79	74.00	54.00	-15.03	-9.21	

Test mode:

Channel 78: 2480MHz

Freq.				Limit 3m	(dBuV/m)	Ove	er(dB)		
(MHz)	H/V	PK È	i8.7444.5974.0054.00i9.4545.2074.0054.00i8.9344.7974.0054.00i8.0843.9474.0054.00	AV	PK	AV			
7784.73	V	58.74	44.59	74.00	54.00	-15.26	-9.41		
10898.26	V	59.45	45.20	74.00	54.00	-14.55	-8.80		
12440.81	V	58.93	44.79	74.00	54.00	-15.07	-9.21		
7775.73	Н	58.08	43.94	74.00	54.00	-15.92	-10.06		
10797.92	Н	59.26	45.11	74.00	54.00	-14.74	-8.89		
14095.36	Н	58.56	44.40	74.00	54.00	-15.44	-9.60		

Frequency:

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co. Ltd. Add: Building 69. Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz Bluetooth (GFSK, pi/4-DQPSK, Hopping) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

Test mode: GFSK		Frequence	cy: Ch	annel 0: 2402MHz			
Frequency (MHz)			Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz) (dBuV/m)			
2387.87	Н	42.21	74.00	28.68	54.00		
2390.00	V	42.13	74.00	28.55	54.00		

Test mode:	GFSK	Frequency: Channel 78: 2480MHz				
Frequency (MHz)			Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz) (dBuV/m)		
2484.70	Н	46.90	74.00	33.07	54.00	
2483.50	2483.50 V		74.00	30.64	54.00	

Test mode:	GFSK	Frequence			
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2400.00	н	49.23	74.00	32.50	54.00
2483.50	Н	40.01	74.00	26.22	54.00
2492.97	Н	41.99	74.00	28.18	54.00
2393.43	V	42.33	74.00	28.20	54.00
2400.00	V	44.60	74.00	30.45	54.00
2483.50	V	41.30	74.00	27.17	54.00

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).


(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

源圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Malialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0




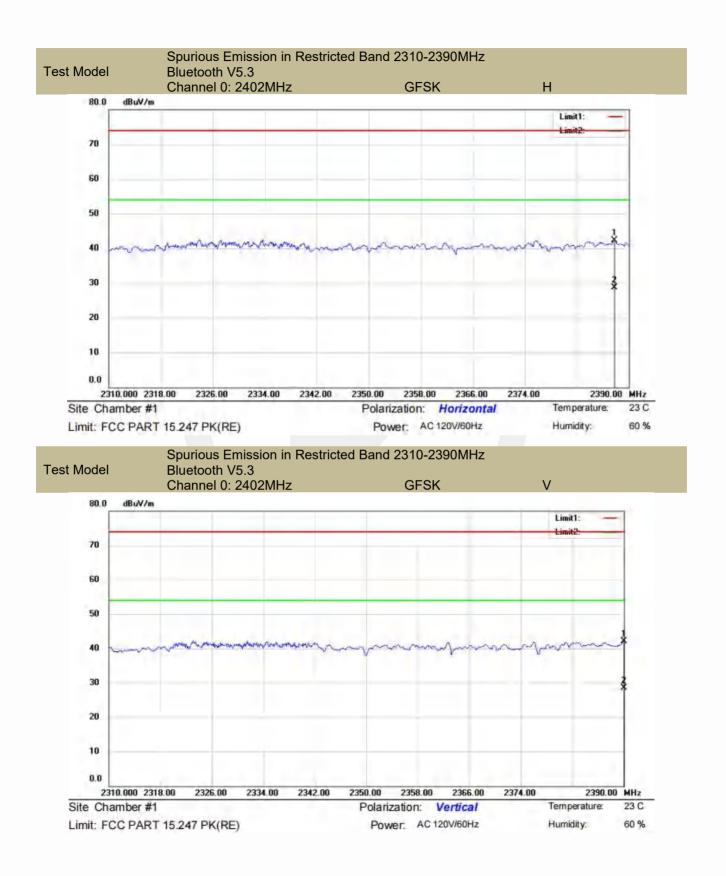


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Malialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China, Http://www.emtek.com.cn, E-mail: cs.rep@emtek.com.cn Report No. ENS2401030176W00601R Page 47 of 57



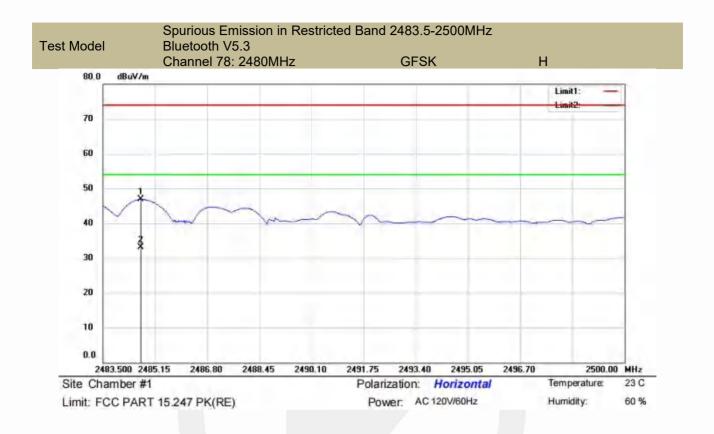


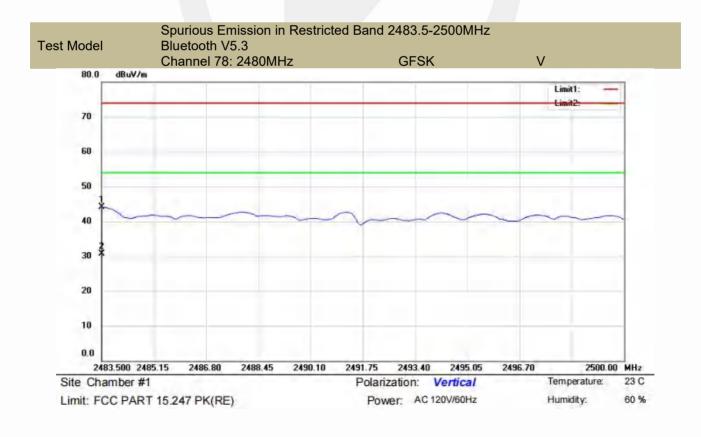

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co. Ltd. Add: Building 69. Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0




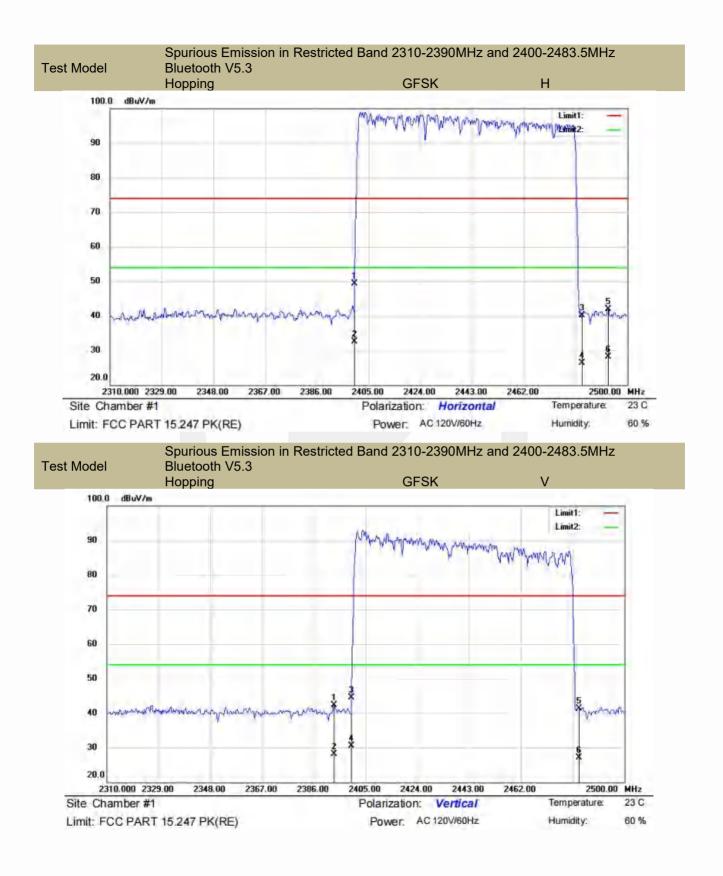

深圳信测标准技术服务股份有限公司地址;广东省深圳市南山区马家龙工业区69栋网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co. Ltd. Add: Building 69. Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@entek.com.cn Ver.1.0



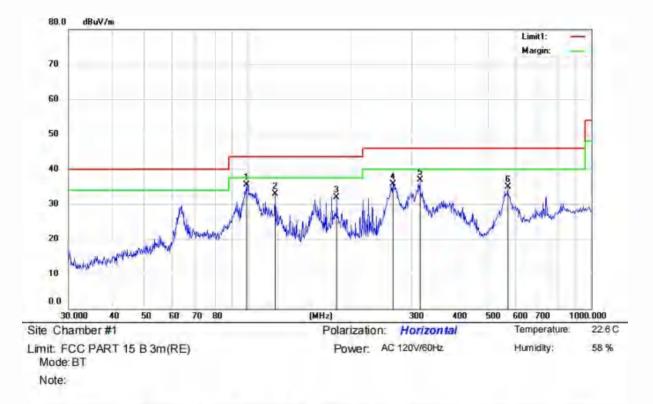

Spurious Emission below 1GHz (30MHz to 1GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Mk.	Freq.	Reading Level	Ant. Factor	Pre Amp Gain	Cable loss	Measure- ment	Limit	Over		н	Degree	
	MHz	dBu∨	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	cm	deg.	Comment
*	98.8326	53.86	11.41	30.87	1.08	35.48	43.50	-8.02	QP			
	119.8555	52.64	9.82	30.78	1.22	32.90	43.50	-10.60	QP			
-	181.2834	51.01	9.85	30.46	1.6	32.00	43.50	-11.50	QP			
-	263.8190	50.35	13.25	30.02	2.14	35.72	46.00	-10.28	QP			
2	316.5890	50.19	14.26	29.83	2.23	36.85	46.00	-9.15	QP			
	570.6100	42.31	19.35	29.91	3.1	34.85	46.00	-11.15	QP			
	•	MHz * 98.8326	Mk. Freq. Level MHz dBuV 98.8326 53.86 119.8555 52.64 181.2834 51.01 263.8190 50.35 316.5890 50.19	Mk. Freq. Level Factor MHz dBuV dB/m * 98.8326 53.86 11.41 119.8555 52.64 9.82 181.2834 51.01 9.85 263.8190 50.35 13.25 316.5890 50.19 14.26	Mk. Freq. Level Factor Gain MHz dBuV dB/m dB * 98.8326 53.86 11.41 30.87 119.8555 52.64 9.82 30.78 181.2834 51.01 9.85 30.46 263.8190 50.35 13.25 30.02 316.5890 50.19 14.26 29.83	Mk. Freq. Level Factor Gain loss MHz dBuv dB/m dB dB 98.8326 53.86 11.41 30.87 1.08 119.8555 52.64 9.82 30.78 1.22 181.2834 51.01 9.85 30.46 1.6 263.8190 50.35 13.25 30.02 2.14 316.5890 50.19 14.26 29.83 2.23	Mk. Freq. Level Factor Gain loss ment MHz dBuV dB/m dB dB dBuV/m * 98.8326 53.86 11.41 30.87 1.08 35.48 119.8555 52.64 9.82 30.78 1.22 32.90 181.2834 51.01 9.85 30.46 1.6 32.00 263.8190 50.35 13.25 30.02 2.14 35.72 316.5890 50.19 14.26 29.83 2.23 36.85	Mk. Freq. Level Factor Gain loss ment Limit MHz dBuV dB/m dB dB dBuV/m dBuV/m dBuV/m * 98.8326 53.86 11.41 30.87 1.08 35.48 43.50 119.8555 52.64 9.82 30.78 1.22 32.90 43.50 181.2834 51.01 9.85 30.46 1.6 32.00 43.50 263.8190 50.35 13.25 30.02 2.14 35.72 46.00 316.5890 50.19 14.26 29.83 2.23 36.85 46.00	Mk. Freq. Level Factor Gain loss ment Limit Over MHz dBuV dBuV dB/m dB dB dBuV/m dBuV/m dB dB dBuV/m dBuV/m dB * 98.8326 53.86 11.41 30.87 1.08 35.48 43.50 -8.02 119.8555 52.64 9.82 30.78 1.22 32.90 43.50 -10.60 181.2834 51.01 9.85 30.46 1.6 32.00 43.50 -11.50 263.8190 50.35 13.25 30.02 2.14 35.72 46.00 -10.28 316.5890 50.19 14.26 29.83 2.23 36.85 46.00 -9.15	Mk. Freq. Level Factor Gain loss ment Limit Over MHz dBuV dB/m dB dB dBuV/m dBuV/m dB Detector * 98.8326 53.86 11.41 30.87 1.08 35.48 43.50 -8.02 QP 119.8555 52.64 9.82 30.78 1.22 32.90 43.50 -10.60 QP 181.2834 51.01 9.85 30.46 1.6 32.00 43.50 -11.50 QP 263.8190 50.35 13.25 30.02 2.14 35.72 46.00 -10.28 QP 316.5890 50.19 14.26 29.83 2.23 36.85 46.00 -9.15 QP	Mk. Freq. Level Factor Gain loss ment Limit Over HI MHz dBuV dB/m dB dB dBuV/m dBuV/m dB Detector cm * 98.8326 53.86 11.41 30.87 1.08 35.48 43.50 -8.02 QP - 119.8555 52.64 9.82 30.78 1.22 32.90 43.50 -10.60 QP - 181.2834 51.01 9.85 30.46 1.6 32.00 43.50 -11.50 QP - 263.8190 50.35 13.25 30.02 2.14 35.72 46.00 -10.28 QP - 316.5890 50.19 14.26 29.83 2.23 36.85 46.00 -9.15 QP	Mk. Freq. Level Factor Gain loss ment Limit Over HI Degree MHz dBuv dBv dB/m dB dB dBuv/m dBuV/m dB Detector cm degree * 98.8326 53.86 11.41 30.87 1.08 35.48 43.50 -8.02 QP - - - degree 119.8555 52.64 9.82 30.78 1.22 32.90 43.50 -10.60 QP -


*:Maximum data x:Over limit 1:over margin

Operator: Ccyf

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co. Ltd. Add: Building 69 Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@entek.com.cn Ver.1.0



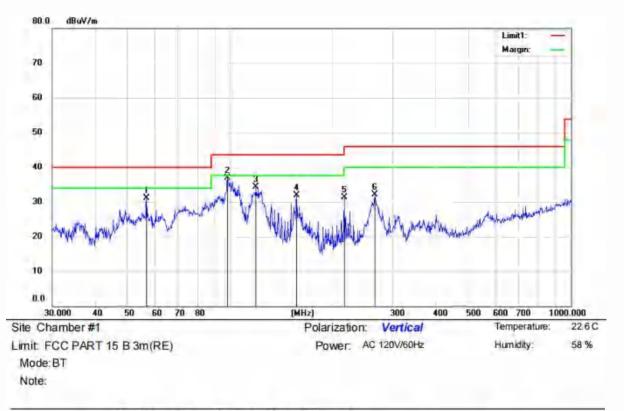

No.	Mk.	Freq.	Reading Level	Ant. Factor	Pre Amp Gain	Cable loss	Measure- ment	Limit	Over		н	Degree	1
	-	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	cm	deg.	Comment
1		56.7916	47.65	13.07	30.5	0.96	31.18	40.00	-8.82	QP			
2	*	98.1418	55.31	11.3	30.86	1.08	36.83	43.50	-6.67	QP			
3		119.0180	53.88	9.96	30.79	1.22	34.27	43.50	-9.23	QP			
4	-	156.4576	52.25	8.73	30.59	1.47	31.86	43.50	-11.64	QP			
5		216.0240	47.71	12.05	30.28	1.84	31.32	46.00	-14.68	QP			
6	1	265.6757	46.76	13.28	30.01	2.14	32.17	46.00	-13.83	QP			
	_												

*:Maximum data x:Over limit !:over margin

Operator: Ccyf

Remark:

1. Measurement $(dB\mu V) = AMN$ Factor $(dB) + Cable Loss (dB) + Reading (dB\mu V)$

2. Over $(dB) = Measurement (dB\mu V) - Limit (dB\mu V)$

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shepzhen) Co. Ltd. Add: Building 69, Malialong Industry Zone, Nanshan District, Shenzhen, Guandong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Page 51 of 57



9.8 CONDUCTED EMISSION TEST

9.8.1 Applicable Standard

According to FCC Part 15.207(a)

9.8.2 Conformance Limit

Conducted Emission Limit								
Frequency(MHz)	Quasi-peak	Average						
0.15-0.5	66-56	56-46						
0.5-5.0	56	46						
5.0-30.0	60	50						
Note: 1. The lower limit shall apply at the transition frequencies								
 The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz. 								

9.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

9.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Repeat above procedures until all frequency measured were complete.


9.8.5 Test Results

PASS.

源圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



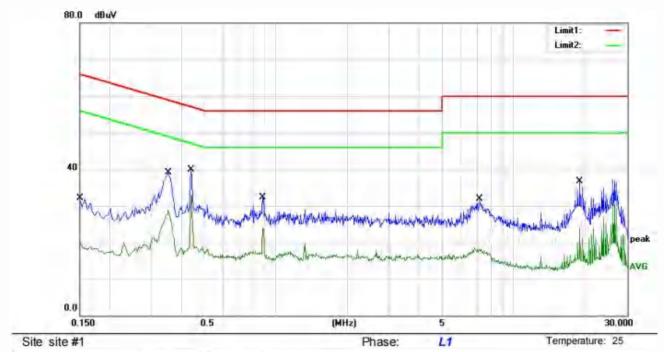

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuy	dB	dBuV	dBuV	dB	Detector	Comment
1	_	0.1500	15.07	17.06	32.13	66.00	-33.87	OP	
2		0.1500	3.20	17.06	20.26	56.00	-35.74	AVG	
3		0.3540	22.03	17.07	39.10	58.87	-19.77	QP	
4		0.3540	11.66	17.07	28.73	48.87	-20.14	AVG	
5		0.4420	22.76	17.06	39.82	57.02	-17.20	QP	
6	•	0.4420	15.79	17.06	32.85	47.02	-14.17	AVG	
7		0.8820	15.28	17.02	32.30	56.00	-23.70	QP	
8		0.8820	6.89	17.02	23.91	46.00	-22.09	AVG	
9	_	7,2100	14.75	17,05	31.80	60.00	-28.20	QP	
10		7.2100	1.49	17.05	18.54	50.00	-31.46	AVG	
11		18.9980	19.91	16.85	36.76	60.00	-23.24	QP	
12		18.9980	7.06	16.85	23.91	50.00	-26.09	AVG	

*:Maximum data

x:Over limit. Lover margin


Comment: Factor build in receiver.

Operator: Jayce

深圳信潤标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co. 1 td. Add: Building 69. Maijalong Industry Zone, Nanshan District, Shenzhen, Guandong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Page 53 of 57 Ver.1.0



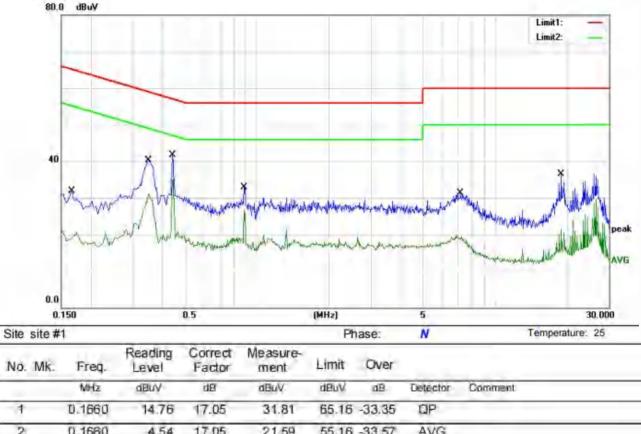

2	0.1660	4.54	17.05	21.59	55.16 -33.57	AVG
3	0.3500	23.19	17.07	40.26	58.96 -18.70	QP
4	0.3500	13.96	17.07	31.03	48.96 -17.93	AVG
Б	0.4420	24.58	17.06	41.64	57.02 -15.38	QP
6 '	0.4420	18.06	17.06	35.12	47.02 -11.90	AVG
7	0.8820	15.96	17.02	32.98	56.00 -23.02	QP
8	0.8820	9.58	17.02	26.60	46.00 -19.40	AVG
Ð	7.1740	14.33	17.06	31.39	60.00 -28.61	QP
10	7:1740	2.70	17.06	19.76	50.00 -30.24	AVG
11	18.9980	19.66	16.85	36.51	60.00 -23.49	QP
12	18.9980	4.49	16.85	21.34	50.00 -28.66	AVG
				_		

*Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Jayce Remark:

1. Measurement ($dB\mu V/m$) = Antenna Factor(dB) -Amp Factor(dB) +Cable Loss(dB) + Reading($dB\mu V/m$) 2. Over (dB) = Measurement ($dB\mu V/m$) - Limit ($dB\mu V/m$)

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China, Http://www.emtek.com.cn, E-mail: cs.rep@emtek.com.cn Report No. ENS2401030176W00601R
Page 54 of 57
Ver.1.0



9.9 ANTENNA APPLICATION

9.9.1 **Antenna Requirement**

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.9.2 Result

PASS.

The EUT has 1 antenna: a Integral Antenna for BT V5.3 with classic model, the gain is -2 dBi; Note:

- \square Antenna use a permanently attached antenna which is not replaceable.
- Not using a standard antenna jack or electrical connector for antenna replacement
- \square The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	١	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

Detail of factor for radiated emission

*** End of Report ***

深圳信潤标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guandong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0



声明 Statement

1. 本报告无授权批准人签字及"检验报告专用章"无效;

This report will be void without authorized signature or special seal for testing report.

2. 未经许可本报告不得部分复制;

This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效,委托方对样品的代表性和资料的真实性负责;

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内,仅作为客户委托、科研、教学或内部质量 控制等目的使用;

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定,未考虑不确定度所带来的风险,本实验室不承担相关责任,特别约定、标 准或规范中有明确规定的除外;

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检测报告若有异议,请于收到报告之日起 20 日内提出;

Objections shall be raised within 20 days from the date receiving the report.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Maijalong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn Ver.1.0