



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: ZHENGZHOU YSAIR TECHNOLOGY CO.,LTD

Address: ROOM 709,SANJIANG BUILDING,NO.170 NANYANG
ROAD,HUIJI DISTRICT,ZHENGZHOU HENAN China 450053

FCC ID: 2A3NOTT117

Product Name: Wireless Transmission System

Standard(s): 47 CFR Part 15, Subpart C(15.237)
ANSI C63.10-2013

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230846168-00

Date Of Issue: 2023/9/13

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	7
1.3 MEASUREMENT UNCERTAINTY	8
2. SUMMARY OF TEST RESULTS	9
3. REQUIREMENTS AND TEST PROCEDURES	10
3.1 AC LINE CONDUCTED EMISSIONS.....	10
3.1.1 Applicable Standard.....	10
3.1.2 EUT Setup.....	11
3.1.3 EMI Test Receiver Setup	11
3.1.4 Test Procedure	12
3.1.5 Corrected Amplitude & Margin Calculation.....	12
3.2 RADIATED EMISSIONS	13
3.2.1 Applicable Standard.....	13
3.2.2 EUT Setup.....	13
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	13
3.2.4 Test Procedure	14
3.2.5 Corrected Amplitude & Margin Calculation.....	14
3.3 20 dB EMISSION BANDWIDTH	15
3.3.1 Applicable Standard.....	15
3.3.2 EUT Setup.....	15
3.3.3 Test Procedure	15
3.4 ANTENNA REQUIREMENT.....	16
3.4.1 Applicable Standard.....	16
3.4.2 Judgment.....	16
4. Test DATA AND RESULTS	17
4.1 AC LINE CONDUCTED EMISSIONS.....	17
4.2 RADIATED EMISSIONS	18
4.3 20 dB EMISSION BANDWIDTH:.....	26
5. RF EXPOSURE EVALUATION	29
5.1.1 APPLICABLE STANDARD.....	29
5.1.2 PROCEDURE.....	29
5.1.3 MEASUREMENT RESULT.....	29

6. EUT PHOTOGRAPHS 30
7. TEST SETUP PHOTOGRAPHS 31

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230846168-00	Original Report	2023/9/13

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Wireless Transmission System
EUT Model:	TT117
Operation Frequency Range:	72-76 MHz
Maximum Field Strength@3m:	65.32 dB μ V/m
Rated Input Voltage:	DC 3V from battery
Serial Number:	29NF-2
EUT Received Date:	2023/8/14
EUT Received Status:	Good

Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	72.1	10	72.2
2	72.3	11	72.4
3	72.6	12	72.7
4	72.8	13	72.9
5	74.7	14	75.3
6	75.4	15	75.6
7	75.7	16	75.8
8	75.9	17	75.5
9	72.5	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
9	72.5
5	74.7
15	75.6

Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Wire	Unknown	72-76 MHz	Unknown

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.
- Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Accessory Information:

Accessory Description	Manufacturer	Model
Microphone	Unknown	Unknown

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
Equipment Modifications:	No
EUT Exercise Software:	No
The engineering mode was provided by manufacturer ▲. The maximum power was configured default setting.	

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
CLC	Earphone	Whiteview5.0	EP21107125

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Earphone Cable	No	No	1.2	EUT	Earphone
Microphone Cable	No	No	1.2	EUT	Microphone

1.2.4 Block Diagram of Test Setup

Spurious emissions:

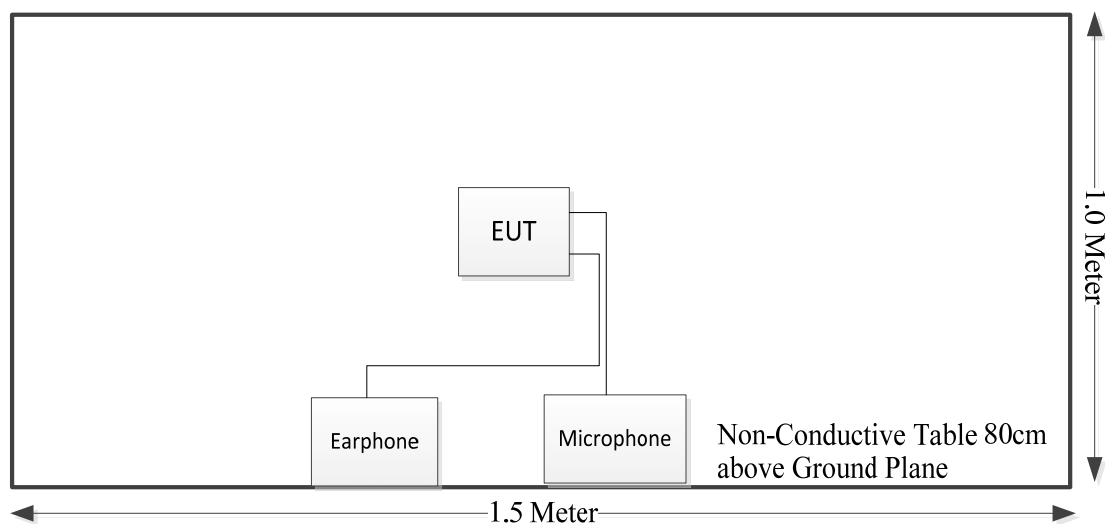

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s)/Rule(s)	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	Not Applicable
§15.237(b) & 15.209	Radiated Emissions	Compliant
§15.215 (c) & 15.237(c)	20 dB Bandwidth	Compliant
§1.1307	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

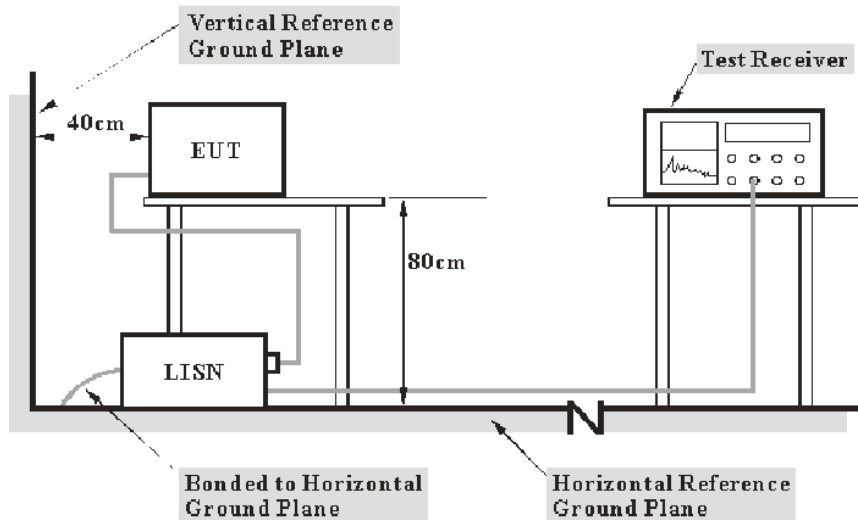

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

During the conducted emission test, the EUT was connected to the outlet of the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiated Emissions


3.2.1 Applicable Standard

FCC 15.237(c)

The field strength within the permitted 200 kHz band shall not exceed 80 millivolts/meter at 3 meters. The field strength of any emissions radiated on any frequency outside of the specified 200 kHz band shall not exceed the general radiated emissions limits specified in § 15.209. The emission limits in this paragraph are based on measurement instrumentation employing an average detector. The provisions in § 15.35 for limiting peak emissions apply.

3.2.2 EUT Setup

Below 1GHz:

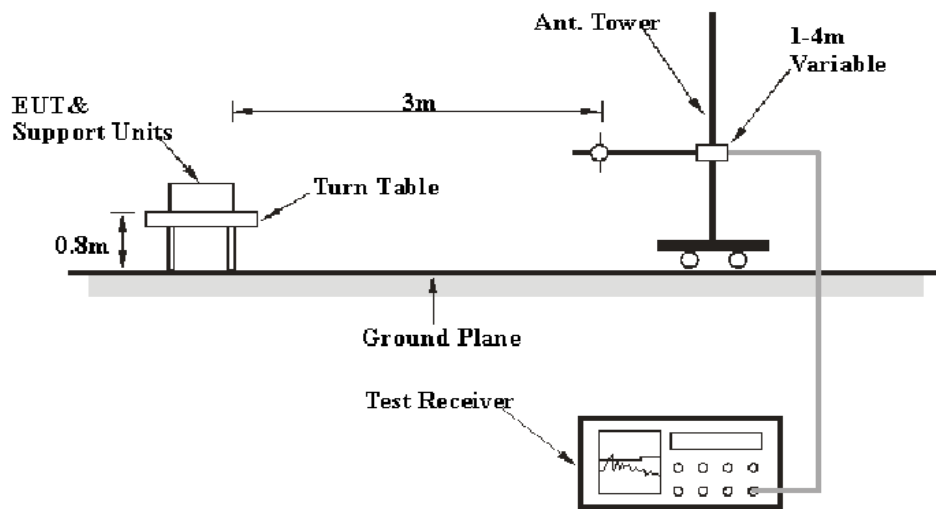

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC Part 15.237(b) & 15.237 (c) limits.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 1000MHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss - Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 20 dB Emission Bandwidth

3.3.1 Applicable Standard


FCC §15.215

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

FCC 15.237(b)

Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the above specified frequency ranges.

3.3.2 EUT Setup

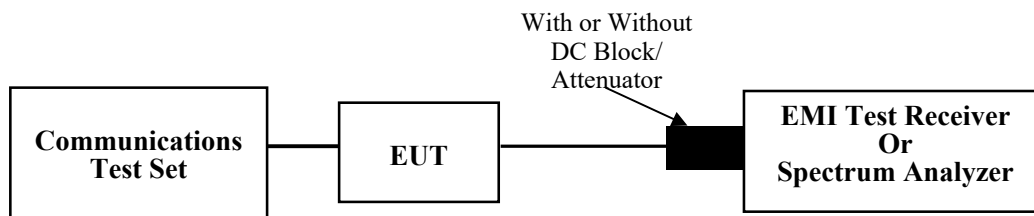

3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 6.9.2

- a) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, unless otherwise specified by the applicable requirement.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

3.4 Antenna Requirement

3.4.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

3.4.2 Judgment

Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Not Applicable, the device was powered by battery only.

4.2 Radiated Emissions

Serial Number:	29NF-1	Test Date:	2023/9/12
Test Site:	966-2	Test Mode:	Transmitting
Tester:	Hugo Huo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.6	Relative Humidity: (%)	64	ATM Pressure: (kPa)	100
----------------------	------	------------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:


Fundamental:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Test Frequency:				72.5	MHz		
72.50	49.20	PK	H	14.52	63.72	118.06	54.34
72.50	49.05	AV	H	14.52	63.57	98.06	34.49
72.50	45.30	PK	V	14.52	59.82	118.06	58.24
72.50	45.12	AV	V	14.52	59.64	98.06	38.42
Test Frequency:				74.7	MHz		
74.70	50.10	PK	H	14.30	64.40	118.06	53.66
74.70	50.00	AV	H	14.30	64.30	98.06	33.76
74.70	46.00	PK	V	14.30	60.30	118.06	57.76
74.70	45.85	AV	V	14.30	60.15	98.06	37.91
Test Frequency:				75.6	MHz		
75.60	51.10	PK	H	14.22	65.32	118.06	52.74
75.60	50.95	AV	H	14.22	65.17	98.06	32.89
75.60	47.50	PK	V	14.22	61.72	118.06	56.34
75.60	47.33	AV	V	14.22	61.55	98.06	36.51

72.5MHz:

Project No.: CR230846168-RF
 Tester: Vic Du
 Polarization: horizontal
 Note:


Date: 2023-09-12

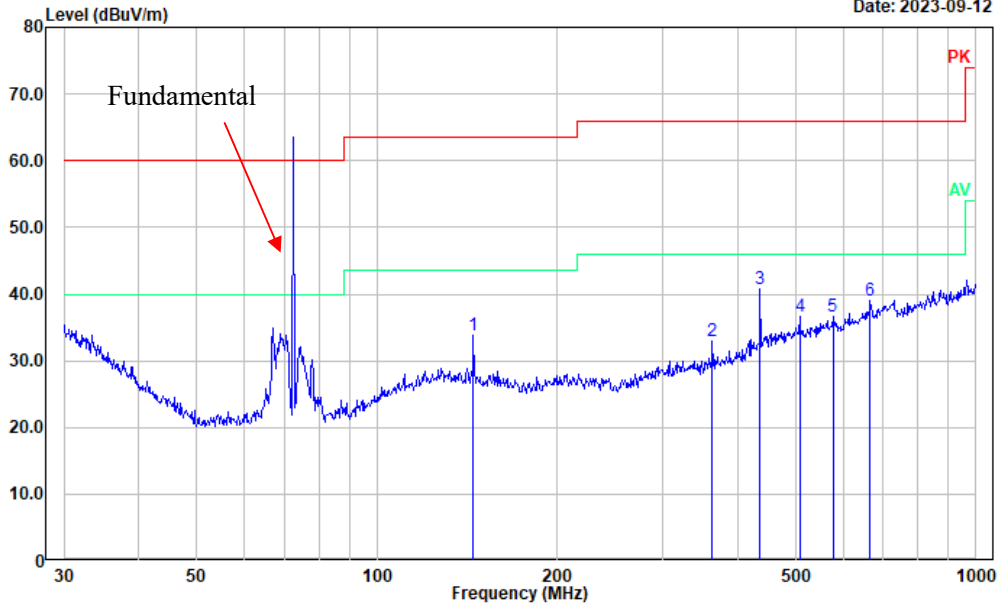

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	144.842	14.22	19.53	33.75	63.50	29.75	Peak
2	362.985	11.20	21.65	32.85	66.00	33.15	Peak
3	435.590	16.89	23.90	40.79	66.00	25.21	Peak
4	508.258	11.28	25.35	36.63	66.00	29.37	Peak
5	576.644	10.79	25.85	36.64	66.00	29.36	Peak
6	665.804	11.82	27.28	39.10	66.00	26.90	Peak

Project No.: CR230846168-RF
 Tester: Vic Du
 Polarization: vertical
 Note:

Date: 2023-09-12

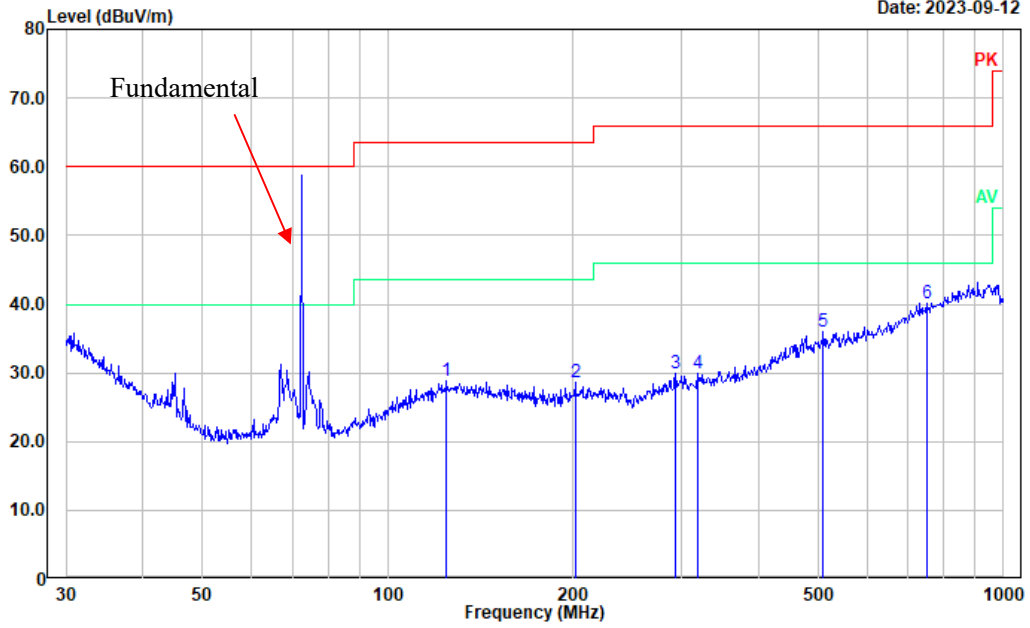


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	124.569	8.81	20.09	28.90	63.50	34.60	Peak
2	201.393	9.48	19.12	28.60	63.50	34.90	Peak
3	293.084	9.47	20.41	29.88	66.00	36.12	Peak
4	318.817	9.00	20.89	29.89	66.00	36.11	Peak
5	510.044	10.64	25.37	36.01	66.00	29.99	Peak
6	750.108	11.92	28.27	40.19	66.00	25.81	Peak

74.7MHz:

Project No.: CR230846168-RF
 Tester: Vic Du
 Polarization: horizontal
 Note:


Date: 2023-09-12

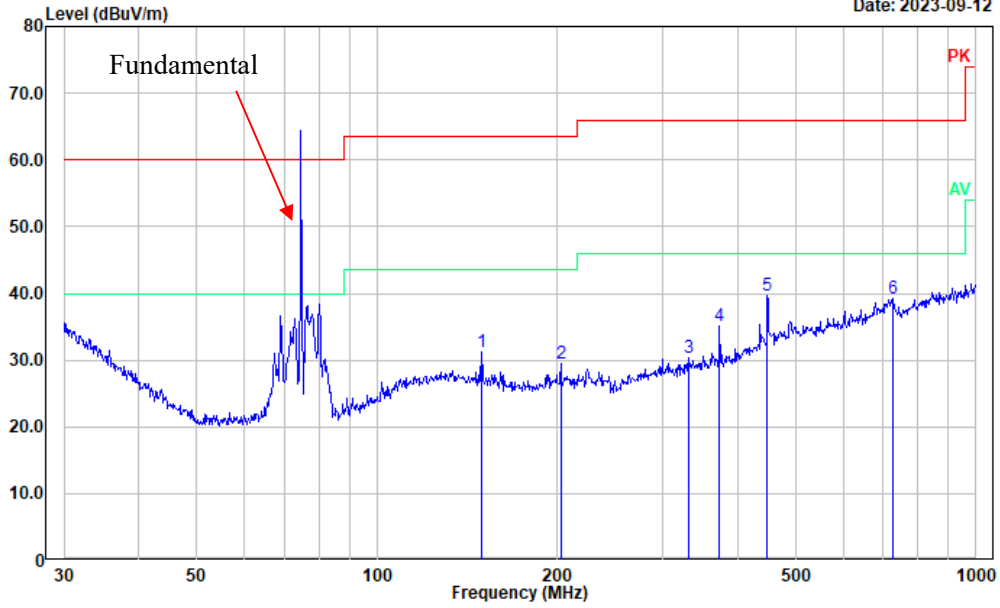

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	149.486	11.81	19.44	31.25	63.50	32.25	Peak
2	202.810	10.47	19.07	29.54	63.50	33.96	Peak
3	331.355	9.28	21.13	30.41	66.00	35.59	Peak
4	373.311	13.20	21.91	35.11	66.00	30.89	Peak
5	447.982	15.39	24.34	39.73	66.00	26.27	Peak
6	726.805	11.12	28.13	39.25	66.00	26.75	Peak

Project No.: CR230846168-RF
 Tester: Vic Du
 Polarization: vertical
 Note:

Date: 2023-09-12

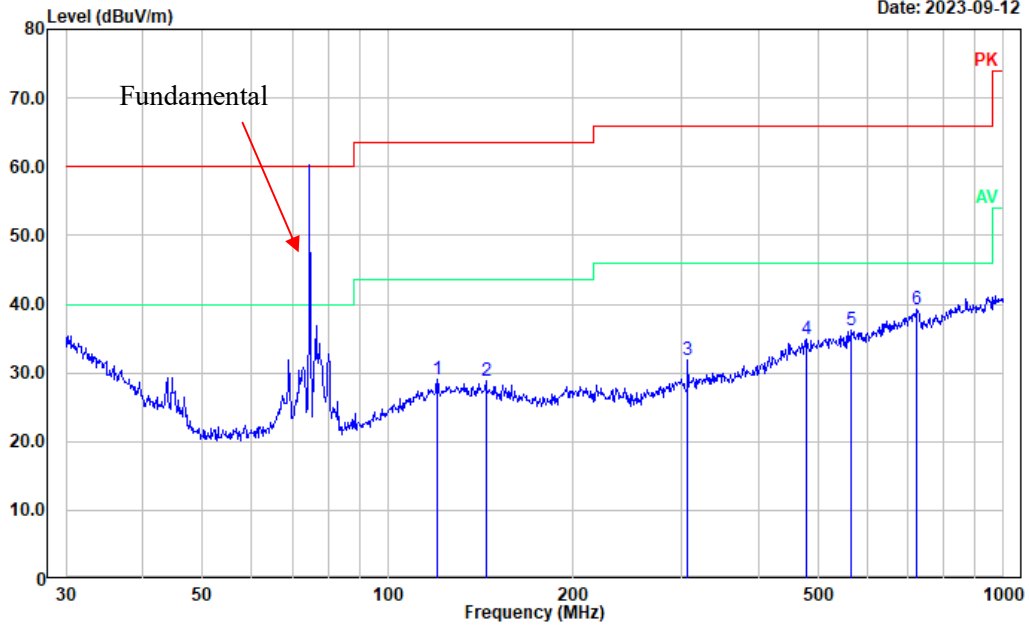


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	120.277	9.12	19.99	29.11	63.50	34.39	Peak
2	144.335	9.29	19.52	28.81	63.50	34.69	Peak
3	306.754	10.99	20.78	31.77	66.00	34.23	Peak
4	478.846	9.87	24.97	34.84	66.00	31.16	Peak
5	564.639	10.47	25.70	36.17	66.00	29.83	Peak
6	724.261	11.11	28.10	39.21	66.00	26.79	Peak

75.6MHz:

Project No.: CR230846168-RF
 Tester: Vic Du
 Polarization: horizontal
 Note:


Date: 2023-09-12

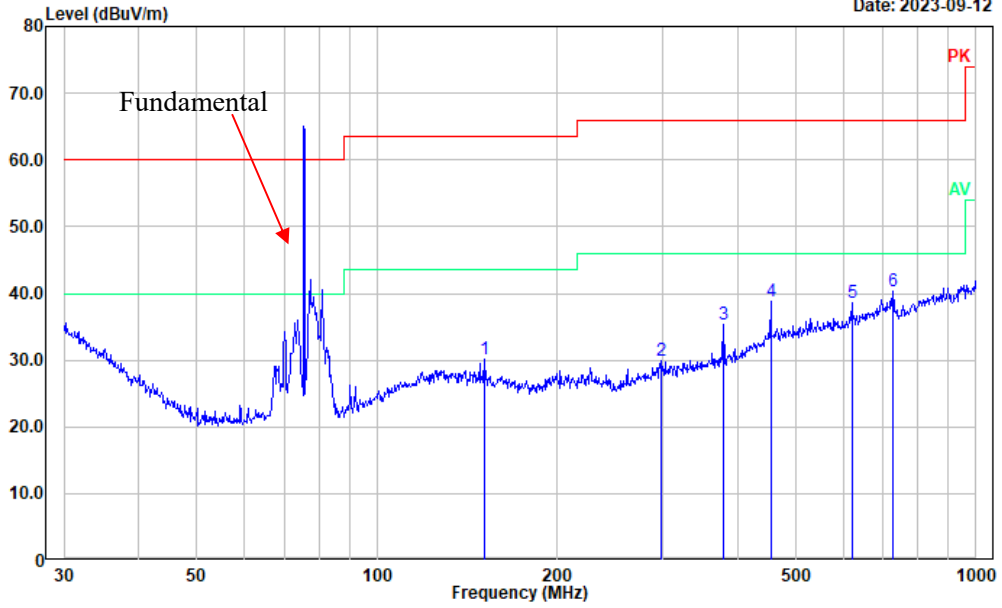

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	151.067	10.65	19.38	30.03	63.50	33.47	Peak
2	298.268	9.26	20.61	29.87	66.00	36.13	Peak
3	378.584	13.26	22.06	35.32	66.00	30.68	Peak
4	454.310	14.20	24.53	38.73	66.00	27.27	Peak
5	620.710	11.74	26.75	38.49	66.00	27.51	Peak
6	726.805	12.30	28.13	40.43	66.00	25.57	Peak

Project No.: CR230846168-RF
 Tester: Vic Du
 Polarization: vertical
 Note:

Date: 2023-09-12

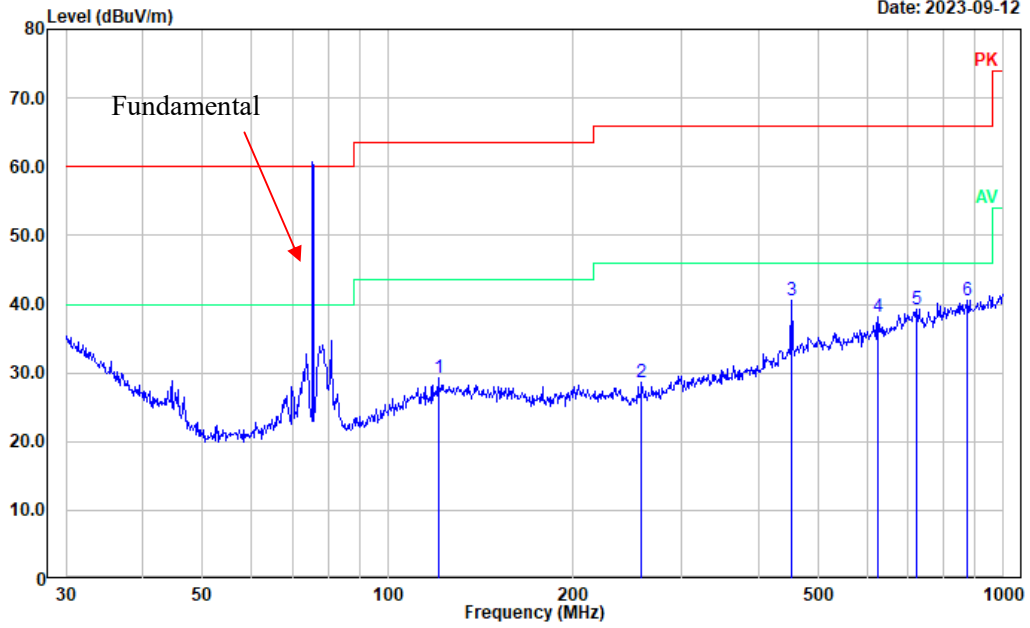

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	120.699	9.36	19.99	29.35	63.50	34.15	Peak
2	258.326	9.87	18.76	28.63	66.00	37.37	Peak
3	452.720	15.96	24.49	40.45	66.00	25.55	Peak
4	625.078	11.31	26.85	38.16	66.00	27.84	Peak
5	721.726	11.21	28.04	39.25	66.00	26.75	Peak
6	872.183	11.08	29.57	40.65	66.00	25.35	Peak

4.3 20 dB Emission Bandwidth:

Serial Number:	29NF-2	Test Date:	2023/8/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.1	Relative Humidity: (%)	64	ATM Pressure: (kPa)	100.1
----------------------	------	---------------------------	----	---------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2023/3/31	2024/3/30


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
72.5	0.087	≥200
74.7	0.081	≥200
75.6	0.084	≥200

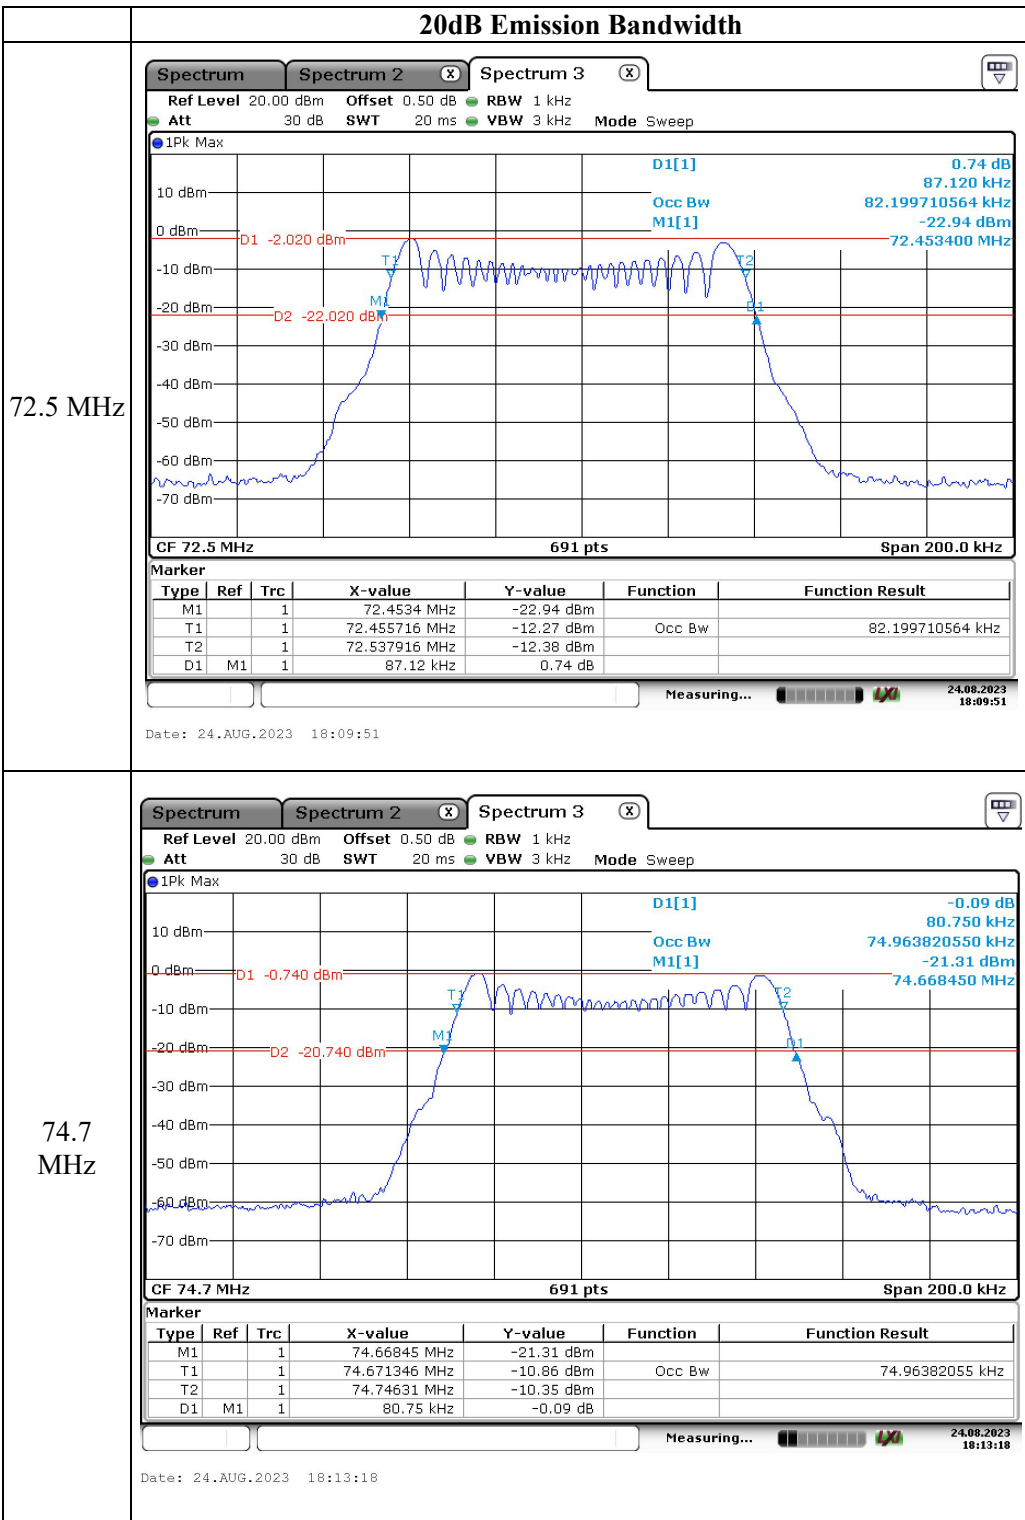

75.6
MHz

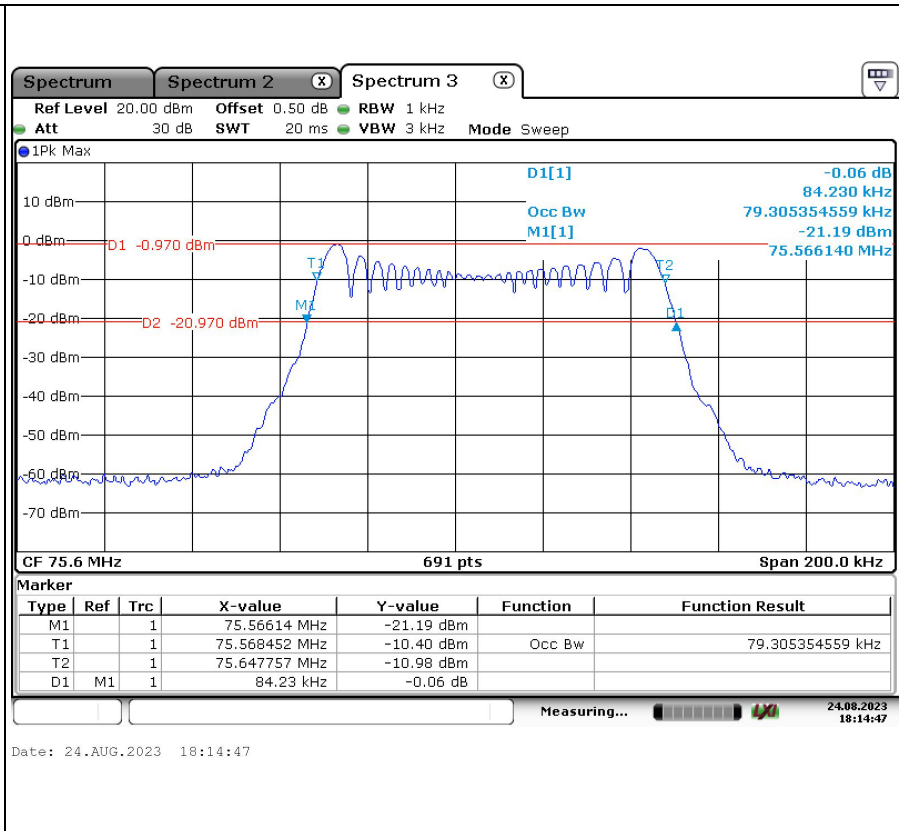

5. RF EXPOSURE EVALUATION

5.1.1 Applicable Standard

FCC §1.1307(b)(3)(i)(A)

a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance.

5.1.2 Procedure

According to 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.2- 1-mW Test Exemption:

Per §1.1307(b)(3)(i)(A), a single RF source is *exempt RF device* (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance.

This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

5.1.3 Measurement Result

Frequency (MHz)	Maximum EIRP (dBm)	Maximum ERP		1-mW Test Exemption
		dBm	mW	
72-76	-29.88	-32.03	0.0006	Compliant

Note:

1. Chose the maximum power to do MPE analysis.
2. This device maximum E-Field level is 65.32dB μ V/m at 3m, so the EIRP power is -29.88 dBm.
3. Pout EIRP(dBm)=Field Strength of Fundamental(dBuV/m)-95.2
4. ERP(dBm) = EIRP(dBm)-2.15

Result: Compliant. RF Exposure is exemption.

6. EUT PHOTOGRAPHS

Please refer to the attachment CR230846168-EXP EUT EXTERNAL PHOTOGRAPHS and CR230846168-INP EUT INTERNAL PHOTOGRAPHS

7. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR230846168-00-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====