

FCC TEST REPORT

Test report On Behalf of Wan You Innovation Technology HeBei Co., Ltd. For Wireless video transmitter Model No.: FWT-200, FWT-150, FWT-XXX

FCC ID: 2AR7K-FWT-200

Prepared for : Wan You Innovation Technology HeBei Co., Ltd. FangDa Science Park, Ningjin County, XingTai City, HeBei Province, China

Prepared By :Shenzhen HUAK Testing Technology Co., Ltd.1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

 Date of Test:
 Dec. 06, 2018 ~ Dec. 13, 2018

 Date of Report:
 Dec. 13, 2018

 Report Number:
 HK1812061880-E



TEST RESULT CERTIFICATION

Applicant's name	Wan You Innovation Technology HeBei Co., Ltd.
Address	FangDa Science Park, Ningjin County, XingTai City, HeBei Province, China
Manufacture's Name	Wan You Innovation Technology HeBei Co., Ltd.
Address	FangDa Science Park, Ningjin County, XingTai City, HeBei Province, China
Product description	
Trade Mark:	N/A
Product name:	Wireless video transmitter
Model and/or type reference .:	FWT-200, FWT-150, FWT-XXX
Standards	FCC Rules and Regulations Part 15 Subpart C Section 15.407 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test	
Date (s) of performance of tests:	Dec. 06, 2018 ~ Dec. 13, 2018
Date of Issue	Dec. 13, 2018
Test Result	Pass

2

2

Testing Engineer

Goof Gim (Gary Qian) Edan Mu (Eden Hu)

Technical Manager

Authorized Signatory:

Jason Zhou

(Jason Zhou)



TABLE OF CONTENTS

1.	Test Result Summary	. 4
	1.1. TEST PROCEDURES AND RESULTS	4
	1.2. TEST FACILITY	4
	1.3. MEASUREMENT UNCERTAINTY	5
2.	EUT Description	. 6
	2.1. GENERAL DESCRIPTION OF EUT	6
	2.2. OPERATION FREQUENCY EACH OF CHANNEL	7
	2.3. OPERATION OF EUT DURING TESTING	7
	2.4. DESCRIPTION OF TEST SETUP	8
3.	Genera Information	. 9
	3.1. TEST ENVIRONMENT AND MODE	9
	3.2. DESCRIPTION OF SUPPORT UNITS	10
4.	Test Results and Measurement Data	11
	4.1. CONDUCTED EMISSION	11
	4.2. MAXIMUM CONDUCTED OUTPUT POWER	15
	4.3. 6DB EMISSION BANDWIDTH	18
	4.4. 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	24
	4.5. Power Spectral Density	25
	4.6. BAND EDGE	. 31
	4.7. SPURIOUS EMISSION	. 38
	4.8. FREQUENCY STABILITY MEASUREMENT.	45
	4.9. ANTENNA REQUIREMENT	47
	4.10. Photographs of Test Setup	48



1. Test Result Summary

1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a) §2.1046	PASS
6dB Emission Bandwidth	§15.407(e)	PASS
26dB Emission Bandwidth& 99% Occupied Bandwidth	§15.407(a) §2.1049	N/A
Power Spectral Density	§15.407(a)	PASS
Band edge	§15.407(a)	PASS
Radiated Emission	§15.407(a) §2.1053	PASS
Frequency Stability	§15.407(g) §2.1055	PASS

Note:

1. PASS: Test item meets the requirement.

2. Fail: Test item does not meet the requirement.

3. N/A: Test case does not apply to the test object.

4. The test result judgment is decided by the limit of test standard.

1.2. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China



1.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	±2.56dB
2	RF power, conducted	±0.12dB
3	Spurious emissions, conducted	±0.11dB
4	All emissions, radiated(<1G)	±3.92dB
5	All emissions, radiated(>1G)	±4.28dB
6	Temperature	±0.1°C
7	Humidity	±1.0%



2. EUT Description

2.1. GENERAL DESCRIPTION OF EUT

Equipment	Wireless video transmitter
Model Name	FWT-200
Serial No.	FWT-150, FWT-XXX
Trade Mark	N/A
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: FWT-200.
FCC ID	2AR7K-FWT-200
Operation Frequency:	802.11a: 5745~5825 MHz
Channel Bandwidth:	802.11a:20MHz
Modulation Technology:	IEEE 802.11a
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Antenna Type	Reverse SMA Antenna
Antenna Gain	Antenna 1:1dBi Antenna 2:1dBi
Power Source	DC5V From Micro USB or DC 7-25V By AC Adapter; DC Power by F550/F750/F970 Battery
Power Supply:	DC5V From Micro USB or DC 7-25V By AC Adapter; DC Power by F550/F750/F970 Battery
Note: The transmitter signal from	two antennas is completely uncorrelated , 802.11a is not

supports MIMO.



2.2. Operation Frequency each of channel

20MHz			
Channel	Frequency		
149	5745		
153	5765		
157	5785		
161	5805		
165	5825		

Note:

In section 15.31(*m*), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. Operation of EUT during testing


For 802.11a

Band IV (5725 - 5850 MHz)			
Channel Number	Channel	Frequency (MHz)	
149	Low	5745	
157	Mid	5785	
165	High	5825	



2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted and during Radiation testing and Above1GHz Radiation testing:



 Adapter information Model: HW-059200CHQ Input: 100-240V~, 50/60Hz, 0.5A Output: 5VDC, 2A



3. Genera Information

3.1. Test environment and mode

Operating Environment:		
Temperature:	25.0 °C	
Humidity:	56 % RH	
Atmospheric Pressure:	1010 mbar	
Test Mode:		
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)	
The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously		

During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6 Mbps
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation



3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
- 3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious

Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



4. Test Results and Measurement Data

4.1. Conducted Emission

4.1.1. Test Specification

Test Requirement:	FCC Part15 C Section	15.207		
Test Method:	ANSI C63.10:2013			
Frequency Range:	150 kHz to 30 MHz			
Receiver setup:	RBW=9 kHz, VBW=30	kHz, Sweep time	=auto	
Limits:	Frequency range (MHz) Limit (dBuV) 0.15-0.5 66 to 56* 56 to 46* 0.5-5 56 46 5-30 60 50			
Test Setup:	Reference Plane 40cm 80cm Filter AC power Filter AC power E.U.T AC power EMI Receiver Remark: E.U.T: Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m			
Test Mode:	Tx Mode			
Test Procedure:	 The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 			
Test Result:	PASS			



4.1.2. Test Instruments


Cond	ducted Emissio	n Shielding R	oom Test Site (8	43)
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2018
LISN	R&S	ENV216	HKE-002	Dec. 27, 2018
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Dec. 27, 2018
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.1.3. Test data

Remark: We tested three Channels in AC 120V/60Hz and AC 230V/50Hz, the worst case was recorded. Please refer to following diagram for individual Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

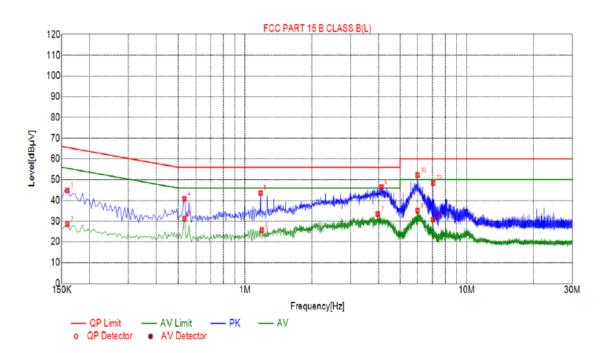


Susp	pected List					
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector
1	0.1590	44.83	10.01	65.52	20.69	РК
2	0.1590	28.48	10.01	55.52	27.04	AV
3	0.5325	31.17	10.05	46.00	14.83	AV
4	0.5325	40.72	10.05	56.00	15.28	PK
5	1.1760	43.58	10.09	56.00	12.42	РК
6	1.1895	25.75	10.09	46.00	20.25	AV
7	3.9660	33.46	10.25	46.00	12.54	AV
8	4.1235	46.43	10.25	56.00	9.57	РК
9	6.0090	35.16	10.23	50.00	14.84	AV
10	6.0090	52.26	10.23	60.00	7.74	РК
11	7.0575	30.75	10.20	50.00	19.25	AV
12	7.0620	48.45	10.19	60.00	11.55	РК

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



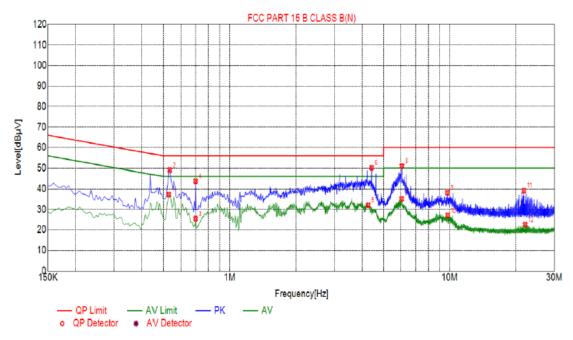

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

Susp	pected List					
	Freq.	Level	Factor	Limit	Margin	
NO.	[MHz]	[dBµV]	[dB]	[dBµV]	[dB]	Detector
1	0.5280	37.21	10.04	46.00	8.79	AV
2	0.5325	49.09	10.05	56.00	6.91	PK
3	0.6990	25.48	10.05	46.00	20.52	AV
4	0.6990	43.75	10.05	56.00	12.25	PK
5	4.2675	32.02	10.25	46.00	13.98	AV
6	4.4205	50.22	10.25	56.00	5.78	PK
7	6.0540	35.17	10.23	50.00	14.83	AV
8	6.0720	51.01	10.23	60.00	8.99	РК
9	9.7755	38.07	10.07	60.00	21.93	PK
10	9.8070	27.08	10.07	50.00	22.92	AV
11	21.8040	39.06	10.15	60.00	20.94	PK
12	22.0605	22.61	10.16	50.00	27.39	AV

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss.
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



4.2. Maximum Conducted Output Power

4.2.1. Test Specification

Test Requirement:	FCC Part15 E Section 2.1046	on 15.407(a)& Part 2 J Section
Test Method:	KDB789033 D02 Ge Rules v02.r01 Sectio	neral UNII Test Procedures New on E
	Frequency Band (MHz)	Limit
Limit:	5150-5250	250mW for client devices
	5725-5850	1 W
Test Setup:	Power meter	EUT
Test Mode:	Transmitting mode w	vith modulation
Test Procedure:	KDB789033 D02 Rules v02r01 Sec 2. The RF output of I meter by RF cabl compensated to t 3. Set to the maximu EUT transmit con	EUT was connected to the power e and attenuator. The path loss was the results for each measurement. Im power setting and enable the atinuously. ucted output power and record the
Test Result:	PASS	
Remark:	+10log(1/x) X is duty	ower= measurement power cycle=1, so 10log(1/1)=0 ower= measurement power



4.2.2. Test Instruments

	RI	F Test Room		
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018
Power meter	Agilent	E4419B	HKE-085	Dec. 27, 2018
Power Sensor	Agilent	E9300A	HKE-086	Dec. 27, 2018
RF cable	Times	1-40G	HKE-034	Dec. 27, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.2.3. Test Data

		ANT 1				
Configuration Ba	Configuration Band IV (5725 - 5850 MHz)					
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result		
11a	CH149	15.77	30	PASS		
11a	CH157	15.08	30	PASS		
11a	CH165	15.55	30	PASS		

		ANT 2		
Configuration Ba	and IV (5725 -	5850 MHz)		
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11a	CH149	15.46	30	PASS
11a	CH157	15.64	30	PASS
11a	CH165	15.32	30	PASS



4.3. 6dB Emission Bandwidth

4.3.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	>500kHz
Test Setup:	
	Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C Set to the maximum power setting and enable the EUT transmit continuously. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. Measure and record the results in the test report.
Test Result:	PASS

4.3.2. Test Instruments

	RI	F Test Room		
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018
RF cable	Times	1-40G	HKE-034	Dec. 27, 2018
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.3.3. Test data

ANT 1


Band IV (5725	- 5850 MHz)				
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11a	CH149	5745	16.75	0.5	PASS
11a	CH157	5785	16.78	0.5	PASS
11a	CH161	5825	16.62	0.5	PASS

ANT 2

Band IV (5725	- 5850 MHz)				
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11a	CH149	5745	16.75	0.5	PASS
11a	CH157	5785	17.14	0.5	PASS
11a	CH161	5825	16.82	0.5	PASS

Test plots as follows:




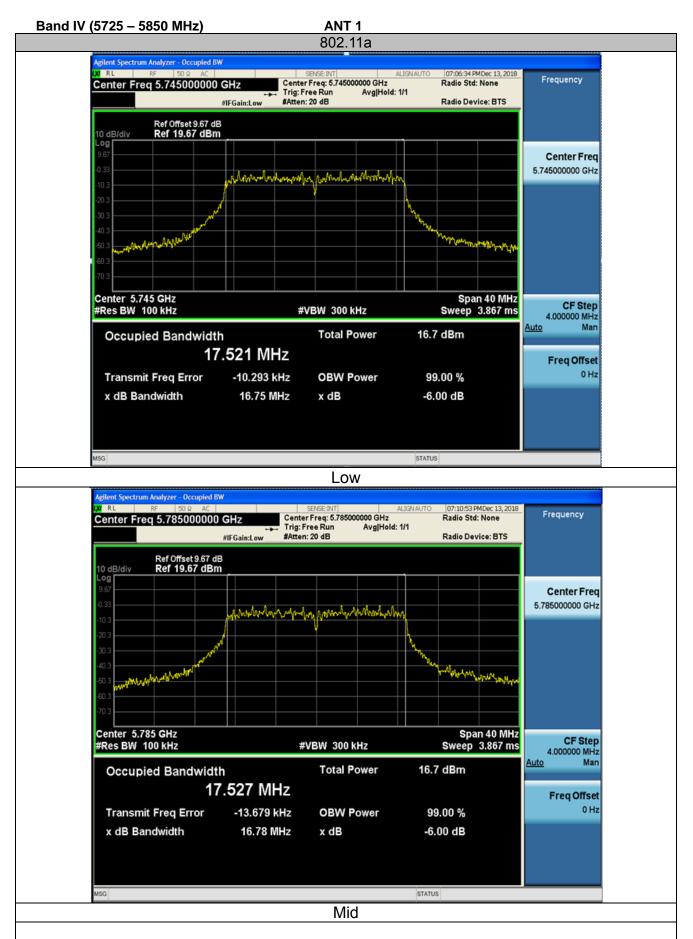



Center Freq 5.825000000	GHz Cente	r Freq: 5.825000000 GHz	ALIGNAUTO 07:15:07 PMDe Radio Std: No : 1/1	
		n: 20 dB	Radio Device	BTS
Ref Offset 10 dB 10 dB/div Ref 20.00 dBm			_	
Log 10.0				Center Fred
0.00	a ha hada la an l	A freehand a freehand a		5.825000000 GH
-10.0	Manage and have Madara	hypotentiallinetalli		
-20.0				
-30.0 -40.0			A A A A A A A A A A A A A A A A A A A	
-50.0 - Manuferfordes en and			Magnashaw	Marin
-60.0				
-70.0				
Center 5.825 GHz #Res BW 100 kHz	#	VBW 300 kHz	Span 4 Sweep 3.3	40 MHz CF Step
Occupied Bandwidth		Total Power	16.5 dBm	Auto Mar
	.517 MHz			Freq Offse
Transmit Freq Error	-11.050 kHz	OBW Power	99.00 %	0 H;
x dB Bandwidth	16.62 MHz	x dB	-6.00 dB	



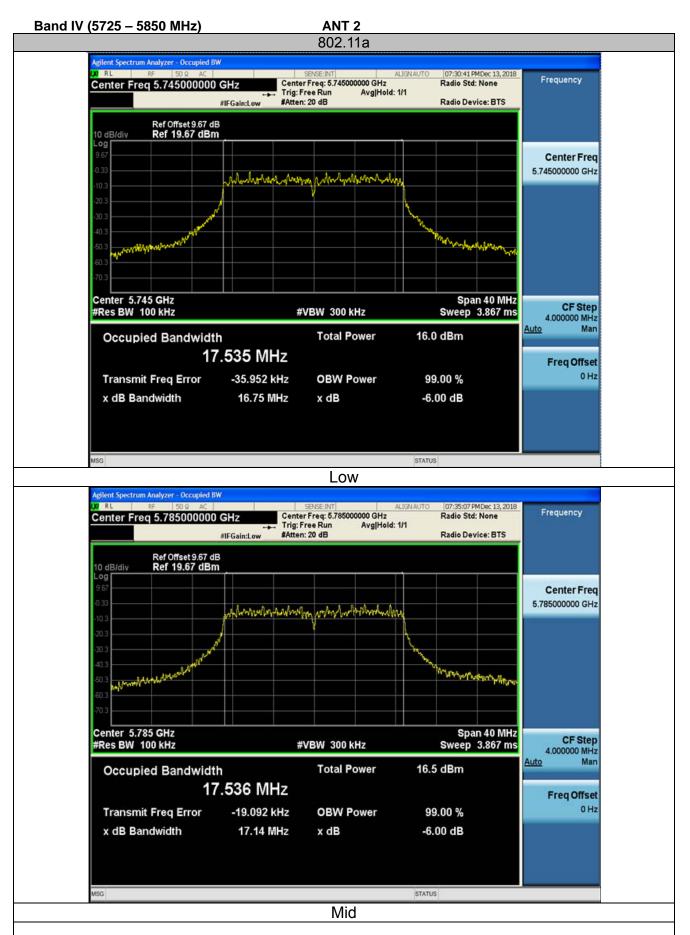



RL RF 50 Ω AC Center Freq 5.82500000	0 GHz Cente	SENSE:INT er Freq: 5.825000000 GHz	Radio St	PMDec 13, 2018 d: None	Frequency
	#IFGain:Low #Atte	FreeRun Avg Holo n:20 dB		vice: BTS	
Ref Offset 10 d 10 dB/div Ref 20.00 dE					
Log					
10.0					Center Freq 5.825000000 GHz
-10.0	Marty Contractory	way who have a way and	him		5.825000000 GH2
-20.0			\		
-30.0			anthe and an		
40.0 wet have been and a free from			when here	www.www.www.www.	
-50.0					
-70.0					
				40.8411-	
Center 5.825 GHz #Res BW 100 kHz	#	≠VBW 300 kHz		an 40 MHz 3.867 ms	CF Step 4.000000 MHz
Occupied Bandwid	lth	Total Power	19.6 dBm		<u>Auto</u> Man
1	7.542 MHz				Freq Offset
Transmit Freq Error	-13.963 kHz	OBW Power	99.00 %		0 Hz
x dB Bandwidth	16.82 MHz	x dB	-6.00 dB		
MSG			STATUS		



4.4. 26dB Bandwidth and 99% Occupied Bandwidth

4.4.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)& Part 2 J Section 2.1049
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	No restriction limits
Test Setup:	Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C Set to the maximum power setting and enable the EUT transmit continuously. Make the measurement with the spectrum analyzer's resolution bandwidth RBW = 1% EBW, VBW≥3RBW, In order to make an accurate measurement. Measure and record the results in the test report.
Test Result:	PASS

4.4.2. Test Instruments

RF Test Room							
Equipment	Serial Number	Calibration Due					
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018			
RF cable	Times	1-40G	HKE-034	Dec. 27, 2018			
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2018			

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4.4.3. Test Result

N/A



4.5. Power Spectral Density

4.5.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407 (a)				
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F				
Limit:	≤11.00dBm/MHz for Band I 5150MHz-5250MHz ≤30.00dBm/500KHz for Band IV 5725MHz-5850MHz The e.i,r,p spectral density for Band I 5150MHz – 5250 MHz should not exceed 10dBm/MHz				
Test Setup:	Spectrum Analyzer EUT				
Test Mode:	Transmitting mode with modulation				
Test Procedure:	 Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. Set RBW = 510 kHz/1 MHz, VBW ≥ 3*RBW, Sweep time = Auto, Detector = RMS. Allow the sweeps to continue until the trace stabilizes. Use the peak marker function to determine the maximum amplitude level. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment. 				
Test Result:	PASS				

4.5.2. Test Instruments

RF Test Room							
Equipment	Manufacturer	Model	Serial Number	Calibration Due			
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018			
RF cable	Times	1-40G	HKE-034	Dec. 27, 2018			
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2018			

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.5.3. Test data

ANT 1

Configuration Band IV (5725 - 5850 MHz)							
Mode	Test channel	Level [dBm/500kHz]	10log(1/x) Factor[dB]	Power Spectral Density	Limit (dBm/500kH z)	Result	
11a	CH149	2.23	0	2.23	30	PASS	
11a	CH157	2.73	0	2.73	30	PASS	
11a	CH161	2.46	0	2.46	30	PASS	

ANT 2


Configuration Band IV (5725 - 5850 MHz)							
Mode	Test channel	Level [dBm/500kHz]	10log(1/x) Factor[dB]	Power Spectral Density	Limit (dBm/500kH z)	Result	
11a	CH149	1.92	0	1.92	30	PASS	
11a	CH157	1.54	0	1.54	30	PASS	
11a	CH161	5.53	0	5.53	30	PASS	

Test plots as follows:









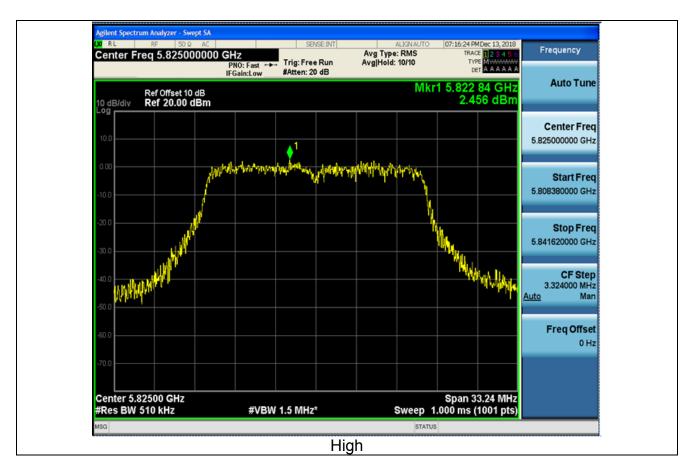



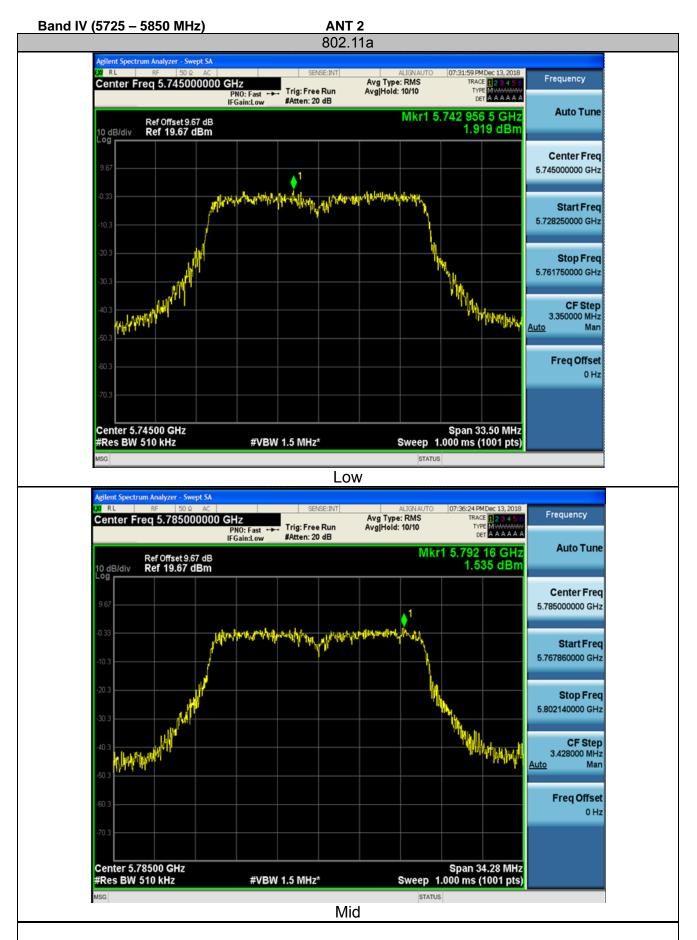



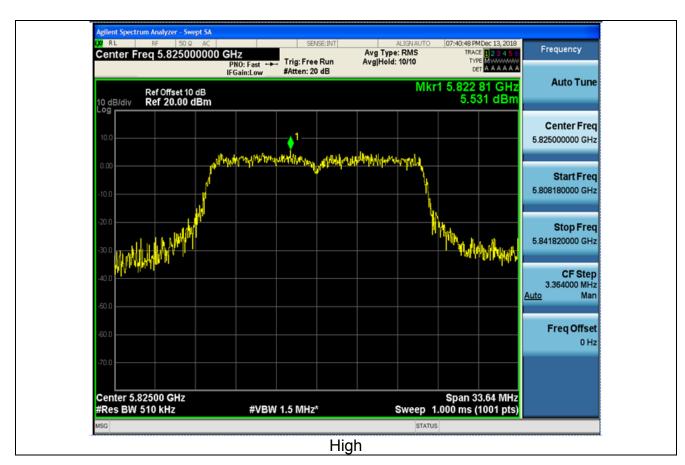



4.6. Band edge

4.6.1. Test Specification

Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10 2013
	For band I&II&III: E[dBµV/m] = EIRP[dBm] + 95.2=68.2 dBµV/m, for EIRP(dBm)= -27dBm
	For transmitters operating in the 5.725-5.85 GHz band:
Limit:	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
	For band IV(5715-5725MHz&5850-5860MHz): E[dBµV/m] = EIRP[dBm] + 95.2=78.2 dBµV/m, for EIRP(dBm)= -27dBm ;
	For band IV(other un-restricted band):E[dBµV/m] = EIRP[dBm] + 95.2=68.2 dBµV/m, for EIRP(dBm)= -27dBm
Test Setup:	Ant. feed point point 1.4 m Ground Plane Receiver Amp.
Test Mode:	Transmitting mode with modulation
Test Procedure:	 The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was



	 turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.
Test Result:	PASS



4.6.2. Test Instruments

	Radiated Emission Test Site (966)							
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due				
Receiver	R&S	ESRP3	HKE-005	Dec. 27, 2018				
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018				
Preamplifier	EMCI	EMC051845S E	HKE-015	Dec. 27, 2018				
Preamplifier	Agilent	83051A	HKE-016	Dec. 27, 2018				
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Sep. 26, 2019				
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Sep. 26, 2019				
Horn antenna	Schwarzbeck	9120D	HKE-013	Sep. 26, 2019				
Antenna Mast	Keleto	CC-A-4M	N/A	N/A				
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 27, 2018				
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A				
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A				
Hf antenna	Schwarzbeck	LB-180400-KF	HKE-031	Sep. 27, 2019				
RF cable	Tonscend	1-18G	HKE-099	Dec. 27, 2018				
RF cable	Times	1-40G	HKE-034	Dec. 27, 2018				

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.6.3. Test Data

ANT 1

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Delector Type	
5650	55.34	-2.06	53.28	68.2	-14.92	peak	
5650	1	-2.06	1	48.2	1	AVG	
5700	90.82	-1.96	88.86	105.2	-16.34	peak	
5700	1	-1.96	/	85.2	1	AVG	
5720	92.36	-2.87	89.49	110.8	-21.31	peak	
5720	1	-2.87	/	90.8	1	AVG	
5725	111.42	-2.14	109.28	122.2	-12.92	peak	
5725	1	-2.14	/	102.2	/	AVG	
Remark: Factor	Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Delector Type	
5650	54.34	-2.06	52.28	68.2	-15.92	peak	
5650	/	-2.06	/	48.2	1	AVG	
5700	91.36	-1.96	89.4	105.2	-15.8	peak	
5700	1	-1.96	1	85.2	1	AVG	
5720	92.05	-2.87	89.18	110.8	-21.62	peak	
5720	/	-2.87	/	90.8	1	AVG	
5725	111.49	-2.14	109.35	122.2	-12.85	peak	
5725	/	-2.14	/	102.2	/	AVG	
Remark: Factor	Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Delector Type
5850	114.26	-1.97	112.29	122.2	-9.91	peak
5850	1	-1.97	1	102.2	1	AVG
5855	94.33	-2.13	92.2	110.8	-18.6	peak
5855	1	-2.13	1	90.8	1	AVG
5875	88.26	-2.65	85.61	105.2	-19.59	peak
5875	1	-2.65	1	85.2	1	AVG
5925	55.88	-2.28	53.6	68.2	-14.6	peak
5925	1	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Delector Type
5850	114.43	-1.97	112.46	122.2	-9.74	peak
5850	/	-1.97	1	102.2	1	AVG
5855	93.57	-2.13	91.44	110.8	-19.36	peak
5855	/	-2.13	1	90.8	1	AVG
5875	88.74	-2.65	86.09	105.2	-19.11	peak
5875	/	-2.65	1	85.2	1	AVG
5925	56.16	-2.28	53.88	68.2	-14.32	peak
5925	/	-2.28	/	48.2	1	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

ANT 2

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Delector Type
5650	56.16	-2.06	54.1	68.2	-14.1	peak
5650	1	-2.06	1	48.2	1	AVG
5700	91.53	-1.96	89.57	105.2	-15.63	peak
5700	1	-1.96	1	85.2	1	AVG
5720	91.39	-2.87	88.52	110.8	-22.28	peak
5720	1	-2.87	1	90.8	1	AVG
5725	111.7	-2.14	109.56	122.2	-12.64	peak
5725	1	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Ture
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type
5650	54.96	-2.06	52.9	68.2	-15.3	peak
5650	/	-2.06	1	48.2	1	AVG
5700	91.22	-1.96	89.26	105.2	-15.94	peak
5700	/	-1.96	1	85.2	/	AVG
5720	91.29	-2.87	88.42	110.8	-22.38	peak
5720	/	-2.87	/	90.8	1	AVG
5725	111.14	-2.14	109	122.2	-13.2	peak
5725	/	-2.14	/	102.2	1	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Delector Type		
5850	114.45	-1.97	112.48	122.2	-9.72	peak		
5850	1	-1.97	1	102.2	1	AVG		
5855	95.19	-2.13	93.06	110.8	-17.74	peak		
5855	1	-2.13	1	90.8	1	AVG		
5875	87.98	-2.65	85.33	105.2	-19.87	peak		
5875	1	-2.65	1	85.2	1	AVG		
5925	56.65	-2.28	54.37	68.2	-13.83	peak		
5925	1	-2.28	1	48.2	1	AVG		
Remark: Factor	Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Delector Type		
5850	113.97	-1.97	112	122.2	-10.2	peak		
5850	1	-1.97	/	102.2	1	AVG		
5855	93.92	-2.13	91.79	110.8	-19.01	peak		
5855	1	-2.13	1	90.8	/	AVG		
5875	89.26	-2.65	86.61	105.2	-18.59	peak		
5875	1	-2.65	/	85.2	1	AVG		
5925	56.71	-2.28	54.43	68.2	-13.77	peak		
5925	/	-2.28	/	48.2	1	AVG		
Remark: Factor	Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



4.7. Spurious Emission

4.7.1.1. Test Specification

Test Requirement:	FCC CFR47	Part 15	Se	ction 15.	407 & 1	5.209 & 15.205
Test Method:	KDB 789033	D02 v02	2r0	1		
Frequency Range:	9kHz to 40G	Hz				
Measurement Distance:	3 m					
Antenna Polarization:	Horizontal &	Vertical				
Operation mode:	Transmitting	mode w	ith	modulat	ion	
Receiver Setup:	30MHz			VBW 1kHz 30kHz 300KHz 3MHz 10Hz	Remark Quasi-peak Value Quasi-peak Value Quasi-peak Value Peak Value Average Value	
Limit:	PeakUnwanted spurious eper FCC Part15.205 sgeneral field strengthbelow table,Frequency0.009-0.4900.490-1.7051.705-3030-8888-216216-960Above 960FrequencyAbove 1G			all compl	y with th t forth i eter)	estricted bands
Test setup:	For radiated emissions below 30MHz					



T

EUT Turn 0.8m Im RF Test Receiver Ground Plane Above 1GHz	
Above 1GHz	
Ant. feed point	
Receiver Amp.	
 1. The EUT was placed on the top of a rotating table of meters above the groundat a 3 meter camber. The tal was rotated 360 degrees todetermine the position of thighest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, whichwas mounted of the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to fou meters above the ground to determine the maximum value of the field strength. Both horizontal and vertica polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arrang to its worst case and thenthe antenna was tuned to heights from 1 meter to 4 meters and the rotatablewar turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and SpecifiedBandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limitspecified, then testing could stopped and the peak values of the EUT wouldbe reported. Otherwise the emissions that did not have 	ible the on ur al ged as d
10dB margin would bere-tested one by one using pea quasi-peak or average method as specified andthen reported in a data sheet.	art,
PASS PASS	



4.7.2. Test Data

Remark: We tested all Channels, the worst case was recorded. Please refer to following diagram for individual

Below 1GHz

FCC PART 15 B CLASS B 100 90 80 70 60 Level[dBµV/m] 50 40 L.L. 30 1100 Jul. Manuf **×** 20 10 о 30М 100M 1G QP Limit QP Detector - Horizontal PK Frequency[Hz]


Susp	Suspected List										
NO	Freq.	Level	Factor	Limit	Margin	Height	Angle	Delerity			
NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity			
1	57.1600	21.96	-14.73	40.00	18.04	100	19	Horizontal			
2	141.550	23.65	-19.14	43.50	19.85	100	237	Horizontal			
3	236.610	38.60	-14.01	46.00	7.40	100	70	Horizontal			
4	275.410	39.12	-13.44	46.00	6.88	100	156	Horizontal			
5	350.100	33.74	-11.69	46.00	12.26	100	282	Horizontal			
6	549.920	34.28	-6.96	46.00	11.72	100	153	Horizontal			

Horizontal





Vertical

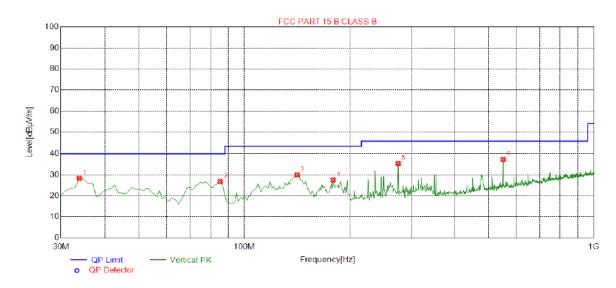

Susp	ected List							
NO	Freq.	Level	Factor	Limit	Margin	Height	Angle	Delerity
NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity
1	33.8800	28.30	-16.19	40.00	11.70	100	179	Vertical
2	85.2900	26.82	-18.20	40.00	13.18	100	16	Vertical
3	141.550	29.95	-19.14	43.50	13.55	100	162	Vertical
4	179.380	27.58	-16.88	43.50	15.92	100	294	Vertical
5	275.410	35.39	-13.44	46.00	10.61	100	327	Vertical
6	549.920	37.29	-6.96	46.00	8.71	100	350	Vertical

Above 1GHz

LOW CH 149 (802.11 a Mode with 5.8G)/5745

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type			
3647	62.35	-4.59	57.76	74	-16.24	peak			
3647	45.96	-4.59	41.37	54	-12.63	AVG			
11570	52.05	4.21	56.26	74	-17.74	peak			
11570	38.69	4.21	42.9	54	-11.1	AVG			
Remark: Factor	Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type			
3647	63.23	-4.59	58.64	74	-15.36	peak			
3647	47.38	-4.59	42.79	54	-11.21	AVG			
11570	52.86	4.21	57.07	74	-16.93	peak			
11570	37.43	4.21	41.64	54	-12.36	AVG			
Remark: Factor	Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								



MID CH157 (802.11 a Mode with 5.8G)/5785

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type		
3647	62.21	-4.59	57.62	74	-16.38	peak		
3647	47.01	-4.59	42.42	54	-11.58	AVG		
11570	52.79	4.21	57	74	-17	peak		
11570	41.16	4.21	45.37	54	-8.63	AVG		
Remark: Factor	Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Deleciol Type			
3647	60.66	-4.59	56.07	74	-17.93	peak			
3647	46.53	-4.59	41.94	54	-12.06	AVG			
11570	53.16	4.21	57.37	74	-16.63	peak			
11570	38.28	4.21	42.49	54	-11.51	AVG			
Remark: Factor	Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Page 43 of 49



HIGH CH 165 (802.11a Mode with 5.8G)/5825

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type			
3647	62.12	-4.59	57.53	74	-16.47	peak			
3647	47.35	-4.59	42.76	54	-11.24	AVG			
11650	53.41	4.84	58.25	74	-15.75	peak			
11650	38.98	4.84	43.82	54	-10.18	AVG			
Remark: Factor	Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type	
3647	60.35	-4.59	55.76	74	-18.24	peak	
3647	46.85	-4.59	42.26	54	-11.74	AVG	
11650	52.44	4.84	57.28	74	-16.72	peak	
11650	38.88	4.84	43.72	54	-10.28	AVG	

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of

15.205, then the general radiated emission limits in 15.209 apply. (4) Data of measurement within this frequency range shown "--- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



4.8. Frequency Stability Measurement

4.8.1. Test Specification

Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055				
Test Method:	ANSI C63.10: 2013				
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.				
Test Setup:	Spectrum Analyzer EUT AC/DC Power supply				
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.				
Test Result:	PASS				
Remark:	N/A				



Test Result as follows:

Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	132 V	5744.979	21	5824.982	18
	120 V	5744.982	18	5824.978	22
	108 V	5744.985	15	5824.985	15

Mode	Temperature (℃)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	-30	5744.971	29	5824.969	31
	-20	5744.977	23	5824.975	25
	-10	5744.974	26	5824.973	27
	0	5744.969	31	5824.981	19
	10	5744.973	27	5824.977	23
	20	5744.979	21	5824.984	16
	30	5744.967	33	5824.976	24
	40	5744.974	26	5824.980	20
	50	5744.981	19	5824.978	22



4.9. ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a Reverse SMA Antenna, and the best case gain of the antenna is Antenna port 1:1dBi and Antenna port 2:1dBi.

WIFI ANTENNA

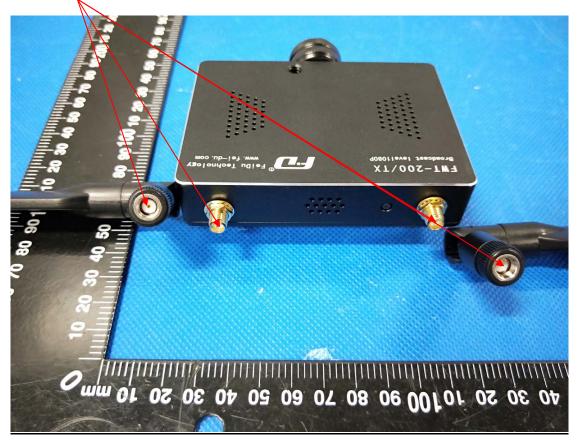



4.10. Photographs of Test Setup

