

FCC RADIO TEST REPORT

FCC ID: 2ARCP-CUBE-BABY

Product Name : Combined Effect Pedal

Trade Mark : CUVAVE

Main Model : CUBE BABY

Additional Model : GE-CB3

Report No. : UNIA20112707ER-04

Prepared for

Sinco Intelligent Technology Co., Ltd.

Workshop D-2, Assembly Workshop, North Airport Road, Hongqi Town, Jinwan
District, Zhuhai, China

Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang
Community, Xixiang Str, Bao'an District, Shenzhen, China

TEST RESULT CERTIFICATION

Applicant.....: Sinco Intelligent Technology Co., Ltd.
Address: Workshop D-2,Assembly Workshop,North Airport Road,Hongqi
Town,Jinwan District,Zhuhai,China
Manufacturer.....: Sinco Intelligent Technology Co., Ltd.
Address: Workshop D-2,Assembly Workshop,North Airport Road,Hongqi
Town,Jinwan District,Zhuhai,China

Product description

Product Name.....: Combined Effect Pedal
Trade Mark: CUVAVE
Model Name: CUBE BABY, GE-CB3

Test Methods.....: FCC Rules and Regulations Part 15 Subpart C Section 15.249,
ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test.....:

Date (s) of performance of tests.....: Nov. 27, 2020 ~ Dec. 14, 2020
Date of Issue: Dec. 28, 2020
Test Result.....: Pass

Prepared by:

Bob Liao

Bob Liao/Editor

Reviewer:

Kahn Yang

Kahn Yang/Supervisor

Approved & Authorized Signer:

Liuze

Liuze/Manager

Table of Contents

Page

1 TEST SUMMARY	4
2 GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 CARRIER FREQUENCY OF CHANNELS	7
2.3 TEST MODE	7
2.4 TEST SETUP	8
2.5 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	8
2.6 MEASUREMENT INSTRUMENTS LIST	9
3 CONDUCTED EMISSION	10
3.1 TEST LIMIT	10
3.2 TEST SETUP	10
3.3 TEST PROCEDURE	11
3.4 TEST RESULT	11
4 RADIATED EMISSION	14
4.1 TEST LIMIT	14
4.2 TEST SETUP	15
4.3 TEST PROCEDURE	16
4.4 TEST RESULT	16
5 BAND EDGE	22
5.1 TEST LIMIT	22
5.2 TEST PROCEDURE	22
5.3 TEST RESULT	22
6 OCCUPIED BANDWIDTH	25
6.1 TEST SETUP	25
6.2 TEST PROCEDURE	25
6.4 TEST RESULT	25
7 ANTENNA REQUIREMENT	31
8 PHOTO OF TEST	32
8.1 RADIATED EMISSION	32
8.2 CONDUCTED EMISSION	33

1 TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

ITEM	STANGARD	RESULT
CONDUCTED EMISSION	FCC Part 15.207	COMPLIANT
RADIATED EMISSION	FCC Part 15.209/15.249	COMPLIANT
BAND EDGE	FCC Part 15.249/15.205	COMPLIANT
OCCUPIED BANDWIDTH	FCC Part 15.215	COMPLIANT
ANTENNA REQUIREMENT	FCC Part 15.203	COMPLIANT

1.2 TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.
 Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 21947

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
UNI	ANSI	9kHz ~ 150kHz	2.96	
		150kHz ~ 30MHz	2.44	

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
UNI	ANSI	9kHz ~ 30MHz	2.50	
		30MHz ~ 1000MHz	4.80	
		1000MHz ~ 6000MHz	4.13	

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Combined Effect Pedal
Trade Mark:	CUVAVE
Main Model:	CUBE BABY
Additional Model:	GE-CB3
Model Difference:	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: CUBE BABY.
FCC ID:	2ARCP-CUBE-BABY
Operation Frequency:	2402MHz~2480MHz
Number of Channels:	79CH
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi
Battery:	DC 3.7V, 780mAh
Adapter:	N/A
Power Source:	DC 3.7V from Li-battery or DC 5.0V from adapter with AC 120(240)V/60Hz

2.2 CARRIER FREQUENCY OF CHANNELS

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	21	2423	42	2444	63	2465
01	2403	22	2424	43	2445	64	2466
02	2404	23	2425	44	2446	65	2467
03	2405	24	2426	45	2447	66	2468
04	2406	25	2427	46	2448	67	2469
05	2407	26	2428	47	2449	68	2470
06	2408	27	2429	48	2450	69	2471
07	2409	28	2430	49	2451	70	2472
08	2410	29	2431	50	2452	71	2473
09	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460		
17	2419	38	2440	59	2461		
18	2420	39	2441	60	2462		
19	2421	40	2442	61	2463		
20	2422	41	2443	62	2464		


2.3 TEST MODE

The EUT was programmed to be in continuously transmitting mode.

Channel List		
Test Channel	EUT Channel	Test Frequency (MHz)
Low	CH00	2402
Middle	CH39	2441
High	CH78	2480

2.4 TEST SETUP

Operation of EUT during Conducted testing:

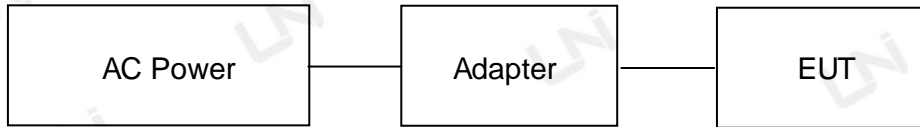

Operation of EUT during Radiation and Above1GHz Radiation testing:



2.5 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	Combined Effect Pedal	CUVAVE	CUBE BABY	EUT
E-2	Adapter	XIAOMI	MDY-08-EF	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

1. The support equipment was authorized by Declaration of Confirmation.
2. For detachable type I/O cable should be specified the length in cm in 『Length』 column.
3. “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.6 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
Conduction Emissions Measurement					
1	Conducted Emission Test Software	EZ-EMC	Ver.CCS-3A1-CE	N/A	N/A
2	AMN	Schwarzbeck	NNLK8121	8121370	2021.10.12
3	AAN	TESEQ	T8-Cat6	38888	2021.10.12
4	Pulse Limiter	CYBRTEK	EM5010	E115010056	2021.06.04
5	EMI Test Receiver	Rohde&Schwarz	ESCI	101210	2021.10.12
Radiated Emissions Measurement					
1	Radiated Emission Test Software	EZ-EMC	Ver.CCS-03A1	N/A	N/A
2	Horn Antenna	Sunol	DRH-118	A101415	2021.10.18
3	Broadband Hybrid Antenna	Sunol	JB1	A090215	2022.03.01
4	PREAMP	HP	8449B	3008A00160	2021.10.18
5	PREAMP	HP	8447D	2944A07999	2021.06.04
6	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2021.10.12
7	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2021.10.12
8	Signal Generator	Agilent	E4421B	MY4335105	2021.11.11
9	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2021.10.12
10	MXA Signal Analyzer	Keysight	N9020A	MY51110104	2021.10.12
11	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2021.06.04
12	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2021.06.04
13	RF power divider	Anritsu	K241B	992289	2021.10.12
14	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2021.10.12
15	Active Loop Antenna	Com-Power	AL-130R	10160009	2021.05.31
16	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2021.05.31
17	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2021.05.31
18	Horn Antenna	A-INFOMW	LB-180400-KF	J211060660	2021.11.04
19	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2021.05.31
20	Signal Generator	Agilent	N5183A	MY47420153	2021.05.31
21	Spectrum Analyzer	Rohde&Schwarz	FSP 40	100501	2021.05.31
22	Power Meter	KEYSIGHT	N1911A	MY50520168	2021.05.31
23	Frequency Meter	VICTOR	VC2000	997406086	2021.05.31
24	DC Power Source	HYELEC	HY5020E	055161818	2021.05.31

3 CONDUCTED EMISSION

3.1 TEST LIMIT


For unintentional device, according to § 15.207(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 TEST SETUP

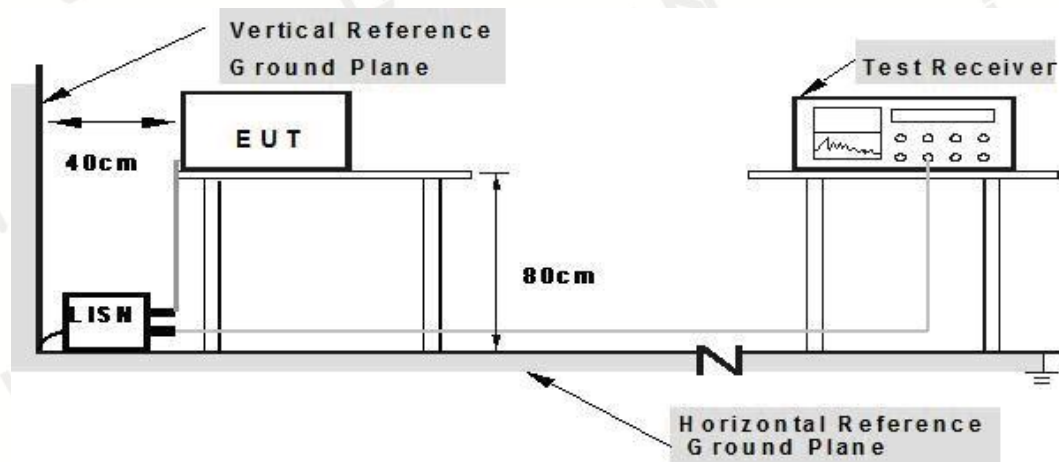

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.3 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is placed on a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSIC63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.


3.4 TEST RESULT

PASS

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.
2. All modes were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported.


Temperature:	24°C	Relative Humidity:	48%
Test Date:	Dec. 08, 2020	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Line
Test Mode:	Transmitting mode of GFSK 2402MHz		

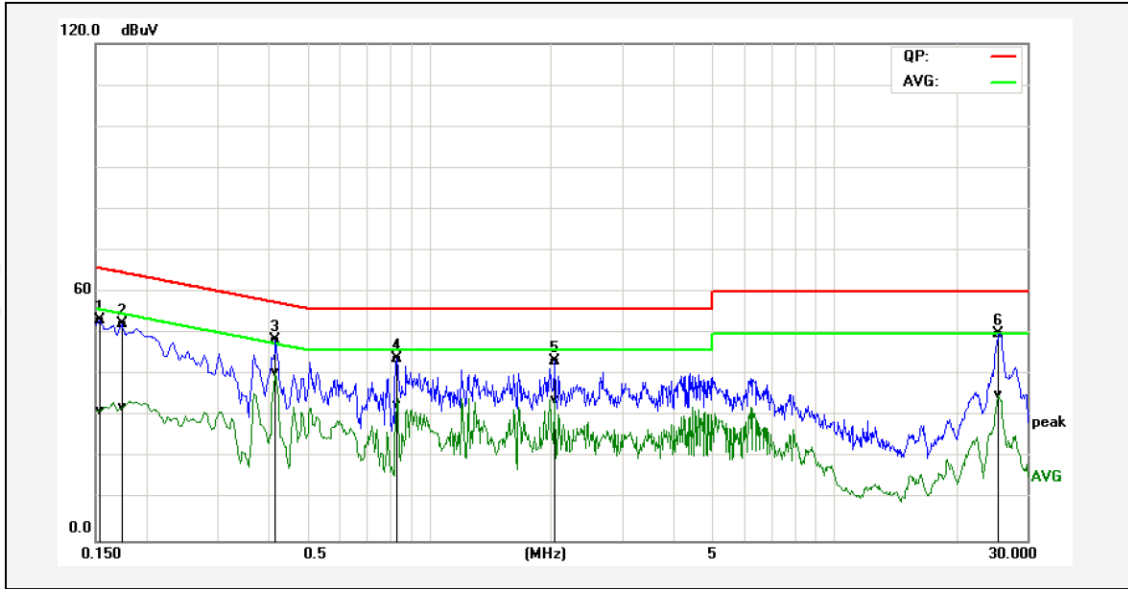

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.1539	43.68	21.81	9.54	53.22	31.35	65.78	55.79	-12.56	-24.44	Pass
2P	0.1740	42.69	22.63	9.57	52.26	32.20	64.76	54.77	-12.50	-22.57	Pass
3*	0.4180	38.71	30.87	9.70	48.41	40.57	57.49	47.49	-9.08	-6.92	Pass
4P	0.8340	34.14	22.99	9.75	43.89	32.74	56.00	46.00	-12.11	-13.26	Pass
5P	2.0460	33.47	24.39	9.80	43.27	34.19	56.00	46.00	-12.73	-11.81	Pass
6P	25.5180	49.31	34.50	0.67	49.98	35.17	60.00	50.00	-10.02	-14.83	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

Temperature:	24°C	Relative Humidity:	48%
Test Date:	Dec. 08, 2020	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Neutral
Test Mode:	Transmitting mode of GFSK 2402MHz		

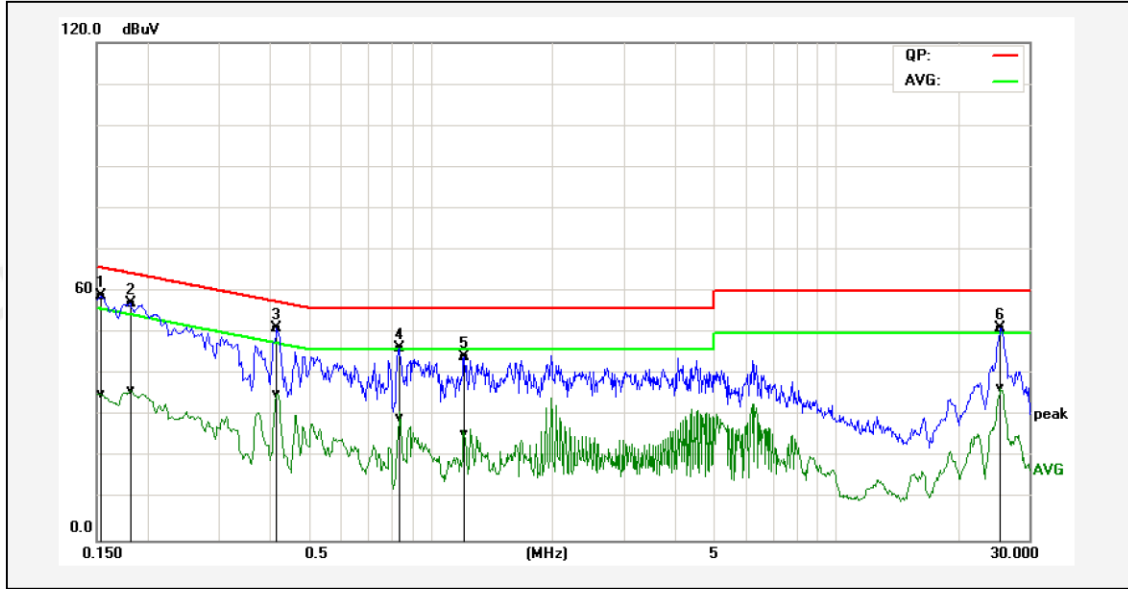

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.1539	49.38	25.66	9.54	58.92	35.20	65.78	55.79	-6.86	-20.59	Pass
2P	0.1819	47.53	26.62	9.58	57.11	36.20	64.39	54.40	-7.28	-18.20	Pass
3*	0.4180	41.53	25.65	9.70	51.23	35.35	57.49	47.49	-6.26	-12.14	Pass
4P	0.8380	36.74	19.86	9.75	46.49	29.61	56.00	46.00	-9.51	-16.39	Pass
5P	1.2100	34.48	15.96	9.74	44.22	25.70	56.00	46.00	-11.78	-20.30	Pass
6P	25.5740	50.60	35.95	0.67	51.27	36.62	60.00	50.00	-8.73	-13.38	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

4 RADIATED EMISSION

4.1 TEST LIMIT

For unintentional device, according to § 15.209(a), except for Class B digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	Quasi-peak	300
0.490MHz-1.705MHz	24000/F (kHz)	-	Quasi-peak	30
1.705MHz-30MHz	30	-	Quasi-peak	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3
		74.0	Peak	3


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

Limit: (Field strength of the fundamental signal)


Frequency	Limit (dBuV/m @3m)	Remark
2400MHz-2483.5MHz	94.0	Average Value
	114.0	Peak Value

4.2 TEST SETUP


1. Radiated Emission Test-Up Frequency Below 30MHz

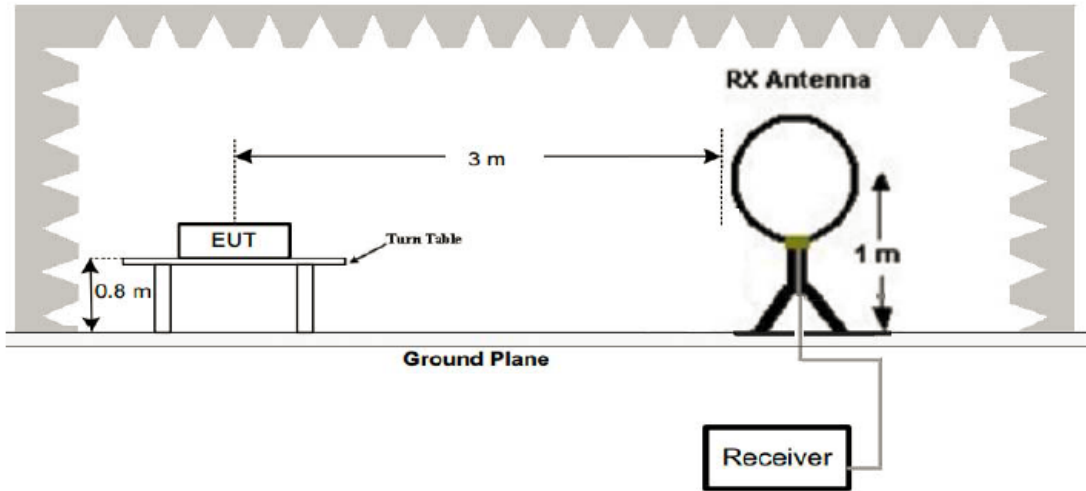

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

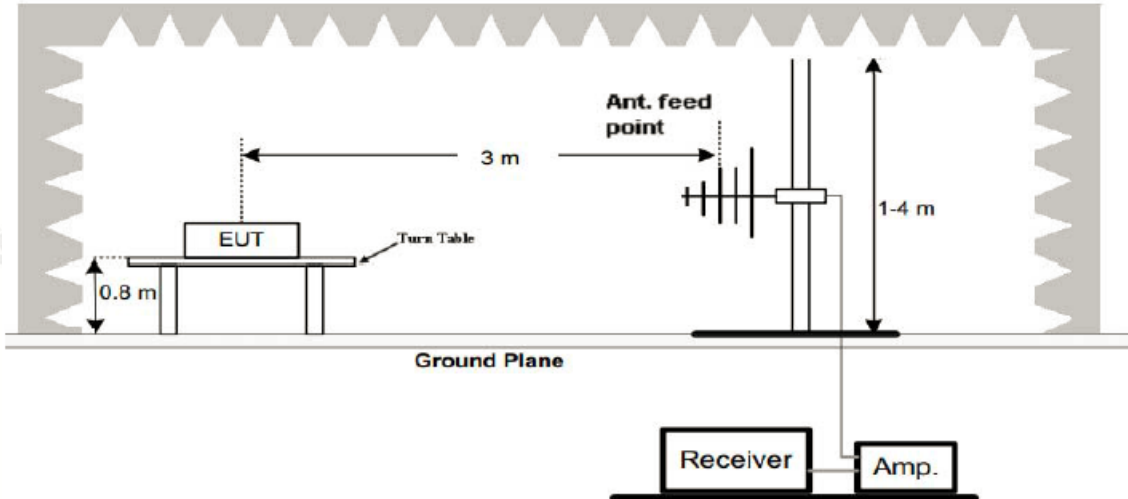

3. Radiated Emission Test-Up Frequency Above 1GHz

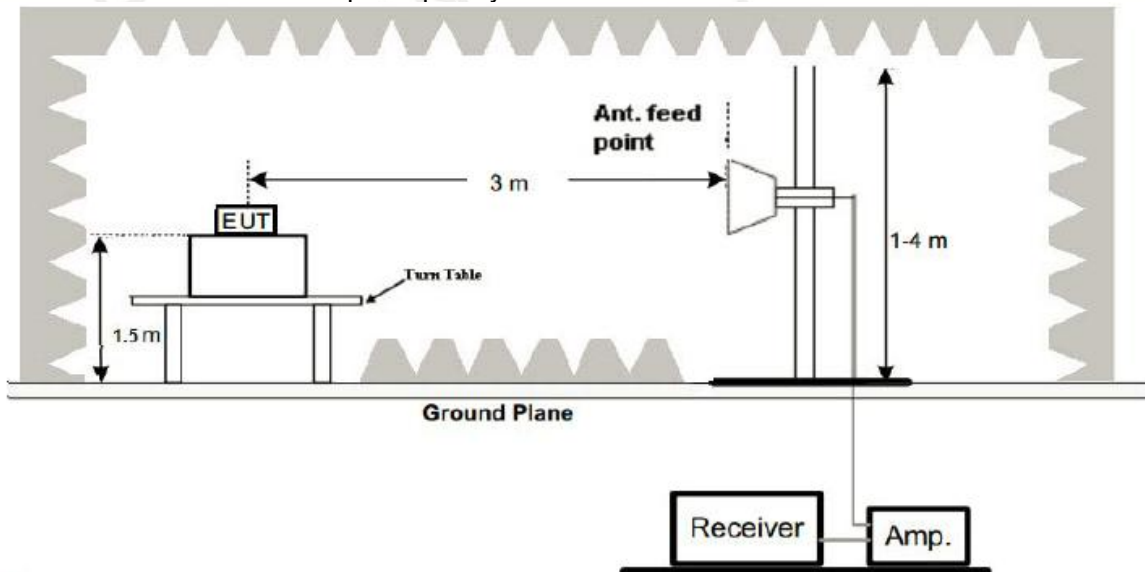

4.3 TEST PROCEDURE

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane.
And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9kHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4 TEST RESULT


PASS

Remark:

1. All modes were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported for below 1GHz test.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, and test data recorded in this report.
3. Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

Below 1GHz Test Results:


Temperature:	24°C	Relative Humidity:	48%
Test Date:	Dec. 08, 2020	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Horizontal
Test Mode:	Transmitting mode of GFSK 2402MHz		

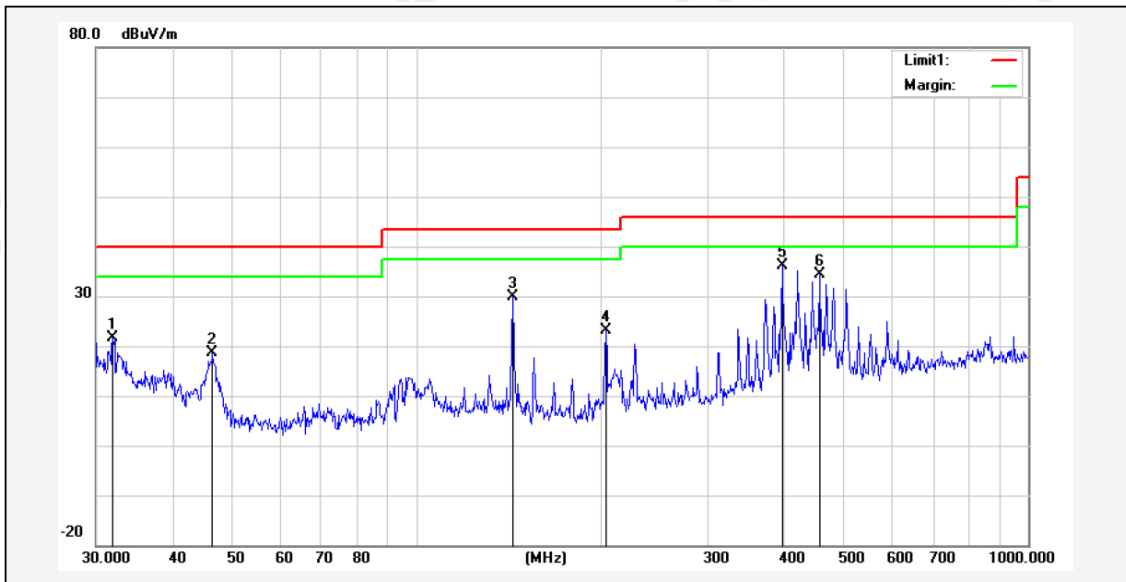

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	31.9546	30.28	-8.67	21.61	40.00	-18.39	60	100	peak
2	46.5030	37.66	-19.05	18.61	40.00	-21.39	70	100	peak
3	143.8295	46.77	-16.84	29.93	43.50	-13.57	100	100	peak
4	204.2377	40.40	-17.32	23.08	43.50	-20.42	150	100	peak
5*	396.2415	49.21	-13.02	36.19	46.00	-9.81	120	100	peak
6	455.9058	46.40	-12.12	34.28	46.00	-11.72	200	100	peak

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	24°C	Relative Humidity:	48%
Test Date:	Dec. 08, 2020	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Vertical
Test Mode:	Transmitting mode of GFSK 2402MHz		

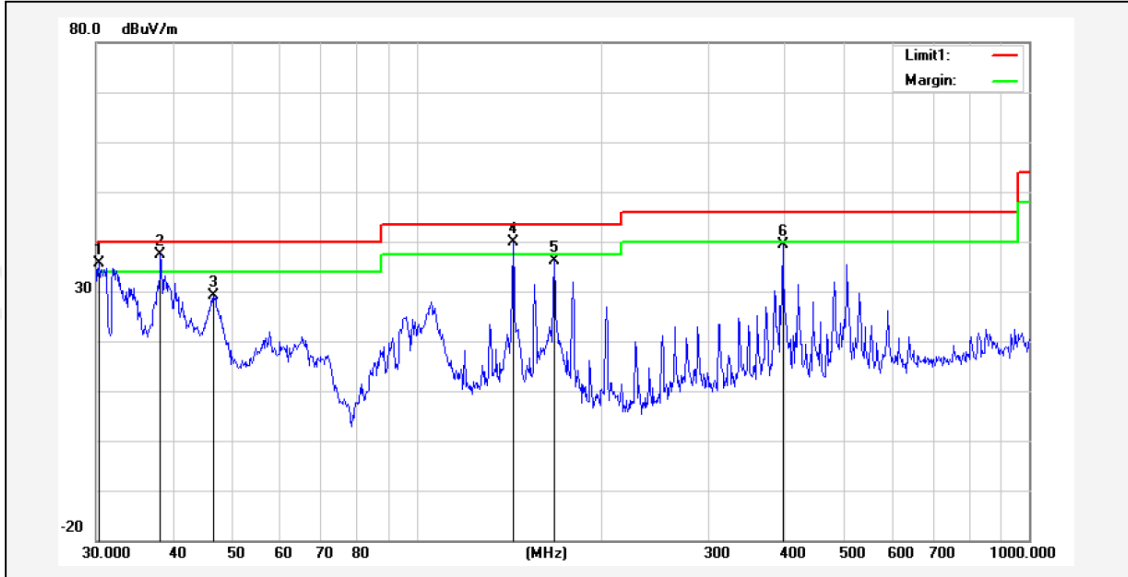

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1!	30.3173	42.94	-7.40	35.54	40.00	-4.46	100	100	peak
2*	38.2120	50.80	-13.45	37.35	40.00	-2.65	120	100	peak
3	46.6664	48.21	-19.12	29.09	40.00	-10.91	80	100	peak
4!	143.8295	56.69	-16.84	39.85	43.50	-3.65	150	100	peak
5	167.8243	53.30	-17.24	36.06	43.50	-7.44	200	100	peak
6	396.2415	52.33	-13.02	39.31	46.00	-6.69	220	100	peak

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

Remark:

1. Measuring frequencies from 9 kHz to the 1 GHz, Radiated emission test from 9kHz to 30MHz was verified, and no any emission was found except system noise floor.
2. * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
3. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10kHz.

Above 1 GHz Test Results:
CH00 (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2402	112.70	-5.84	106.86	114	-7.14	PK
2402	82.96	-5.84	77.12	94	-16.88	AV
4804	62.85	-3.64	59.21	74	-14.79	PK
4804	51.05	-3.64	47.41	54	-6.59	AV
7206	58.11	-0.95	57.16	74	-16.84	PK
7206	47.96	-0.95	47.01	54	-6.99	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2402	112.69	-5.84	106.85	114	-7.15	PK
2402	83.10	-5.84	77.26	94	-16.74	AV
4804	63.05	-3.64	59.41	74	-14.59	PK
4804	50.89	-3.64	47.25	54	-6.75	AV
7206	58.60	-0.95	57.65	74	-16.35	PK
7206	47.78	-0.95	46.83	54	-7.17	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH39 (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	111.12	-5.71	105.41	114	-8.59	PK
2441	81.09	-5.71	75.38	94	-18.62	AV
4882	60.90	-3.51	57.39	74	-16.61	PK
4882	49.27	-3.51	45.76	54	-8.24	AV
7323	47.96	-0.82	47.14	74	-26.86	PK
7323	46.03	-0.82	45.21	54	-8.79	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2441	111.05	-5.71	105.34	114	-8.66	PK
2441	80.87	-5.71	75.16	94	-18.84	AV
4882	61.44	-3.51	57.93	74	-16.07	PK
4882	50.04	-3.51	46.53	54	-7.47	AV
7323	58.08	-0.82	57.26	74	-16.74	PK
7323	45.90	-0.82	45.08	54	-8.92	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH78 (2480MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2480	111.11	-5.65	105.46	114	-8.54	PK
2480	79.96	-5.65	74.31	94	-19.69	AV
4960	59.89	-3.43	56.46	74	-17.54	PK
4960	48.82	-3.43	45.39	54	-8.61	AV
7440	56.77	-0.75	56.02	74	-17.98	PK
7440	46.06	-0.75	45.31	54	-8.69	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2480	110.97	-5.65	105.32	114	-8.68	PK
2480	80.66	-5.65	75.01	94	-18.99	AV
4960	60.25	-3.43	56.82	74	-17.18	PK
4960	48.81	-3.43	45.38	54	-8.62	AV
7440	57.11	-0.75	56.36	74	-17.64	PK
7440	45.82	-0.75	45.07	54	-8.93	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Remark:

1. Measuring frequencies from 1 GHz to the 25 GHz.
2. “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
3. * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10kHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
6. When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
7. All modes of operation were investigated and the worst-case emissions of $\pi/4$ DQPSK are reported.
8. For fundamental frequency ,RBW>20dB BW ,VBW>=RBW ,PK detector for PK value, RMS detector for AV value.

5 BAND EDGE

5.1 TEST LIMIT

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 TEST PROCEDURE

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. Peak detector is for both.

5.3 TEST RESULT

PASS

Remark: All modes of were tested, only the worst result of GFSK was reported.

Operation Mode: TX CH00 (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	56.1	-5.81	50.29	74	-23.71	PK
2310	/	-5.81	/	54	/	AV
2390	56.28	-5.84	50.44	74	-23.56	PK
2390	/	-5.84	/	54	/	AV
2400	57.07	-5.84	51.23	74	-22.77	PK
2400	/	-5.84	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	56.25	-5.81	50.44	74	-23.56	PK
2310	/	-5.81	/	54	/	AV
2390	57.05	-5.84	51.21	74	-22.79	PK
2390	/	-5.84	/	54	/	AV
2400	56.79	-5.84	50.95	74	-23.05	PK
2400	/	-5.84	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH78 (2480MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.5	56.89	-5.65	51.24	74	-22.76	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.02	-5.72	51.3	74	-22.7	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.5	56.05	-5.65	50.4	74	-23.6	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.17	-5.72	51.45	74	-22.55	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

6 OCCUPIED BANDWIDTH

6.1 TEST SETUP

Same as Radiated Emission Measurement.

6.2 TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW=30kHz, VBW=100kHz, Span=3MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.


6.4 TEST RESULT

PASS


GFSK Modulation:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
CH00	2402	1.037	PASS
CH39	2441	1.037	PASS
CH78	2480	1.037	PASS


CH00: 2402MHz

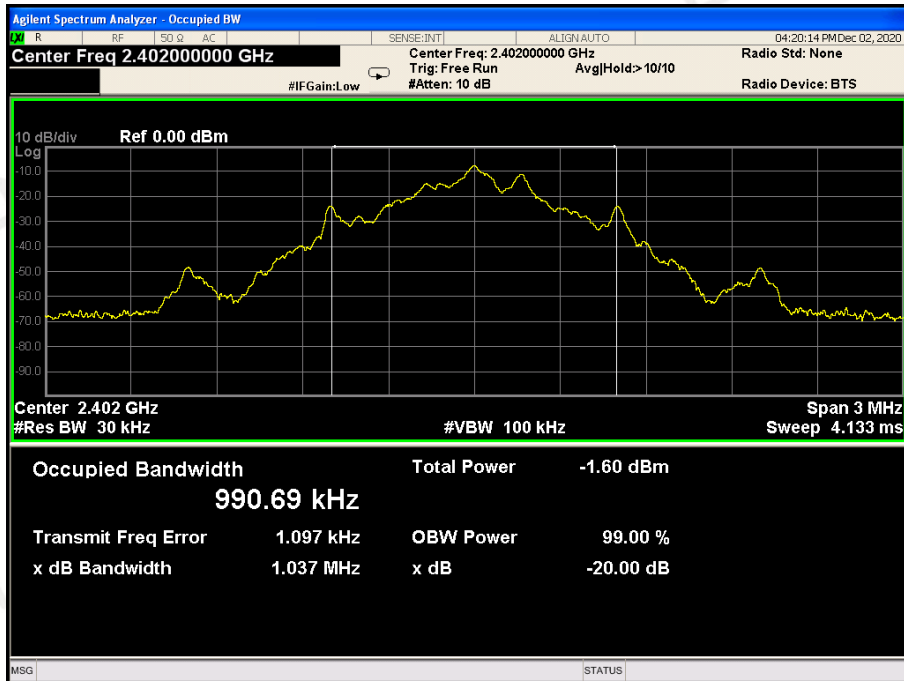

CH39: 2441MHz

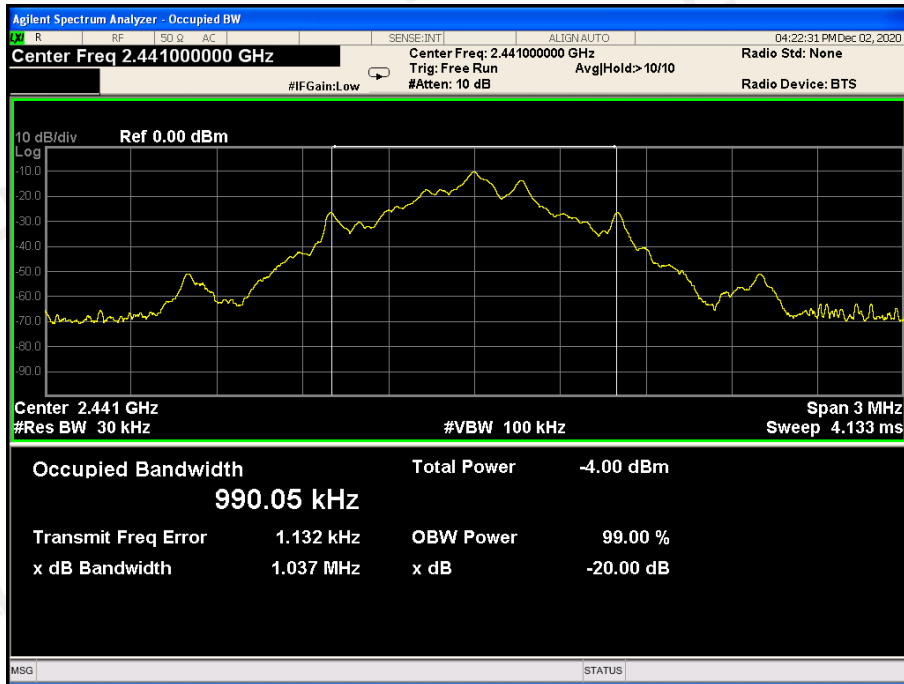

CH78: 2480MHz

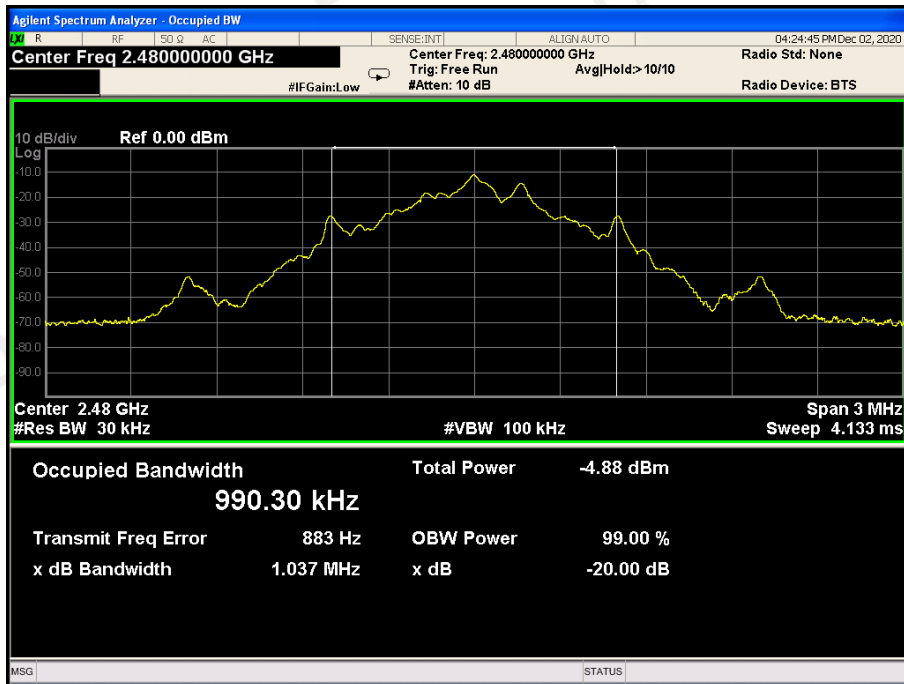


$\pi/4$ DQPSK Modulation:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
CH00	2402	1.114	PASS
CH39	2441	1.123	PASS
CH78	2480	1.126	PASS


CH00: 2402MHz



CH39: 2441MHz

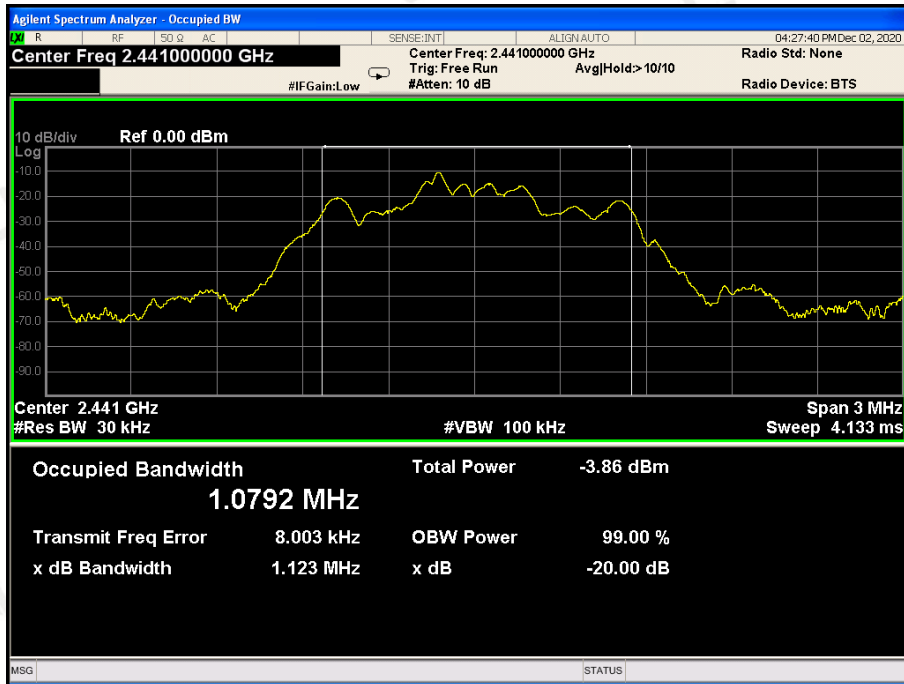


CH78: 2480MHz

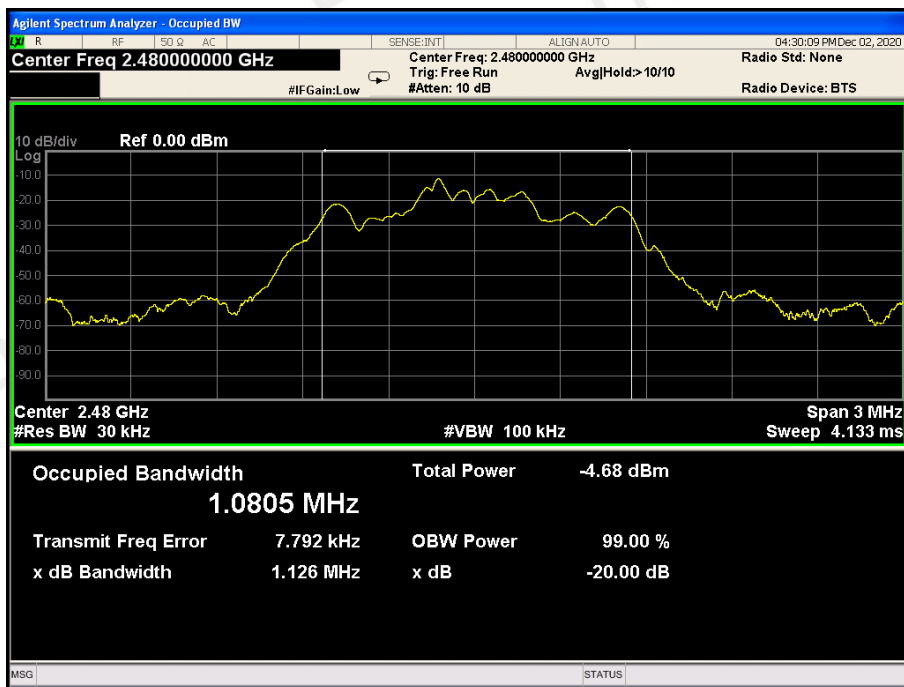


8DPSK Modulation:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
CH00	2402	1.224	PASS
CH39	2441	1.227	PASS
CH78	2480	1.227	PASS


CH00: 2402MHz

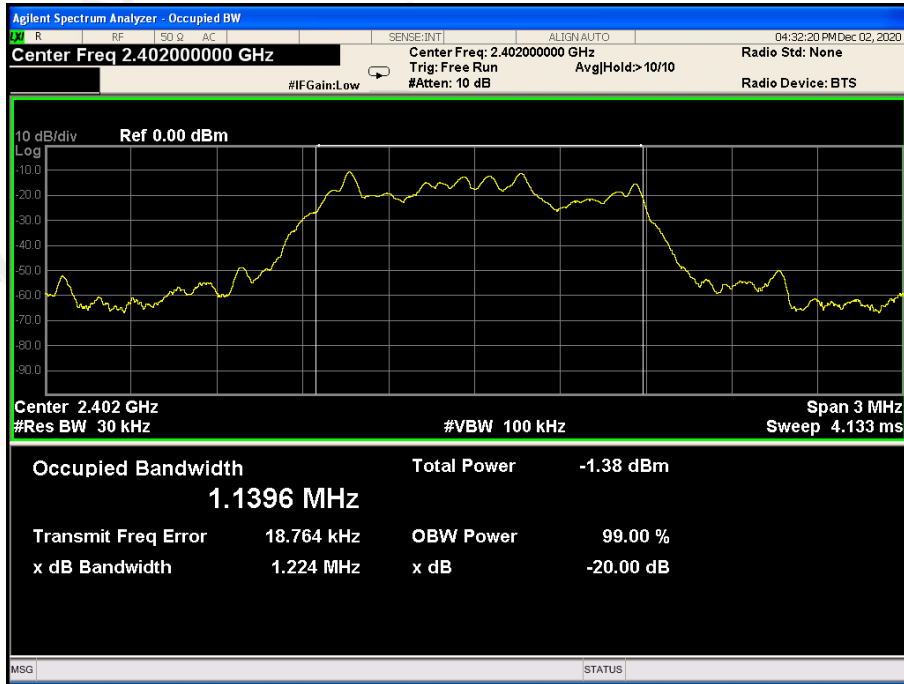

CH39: 2441MHz

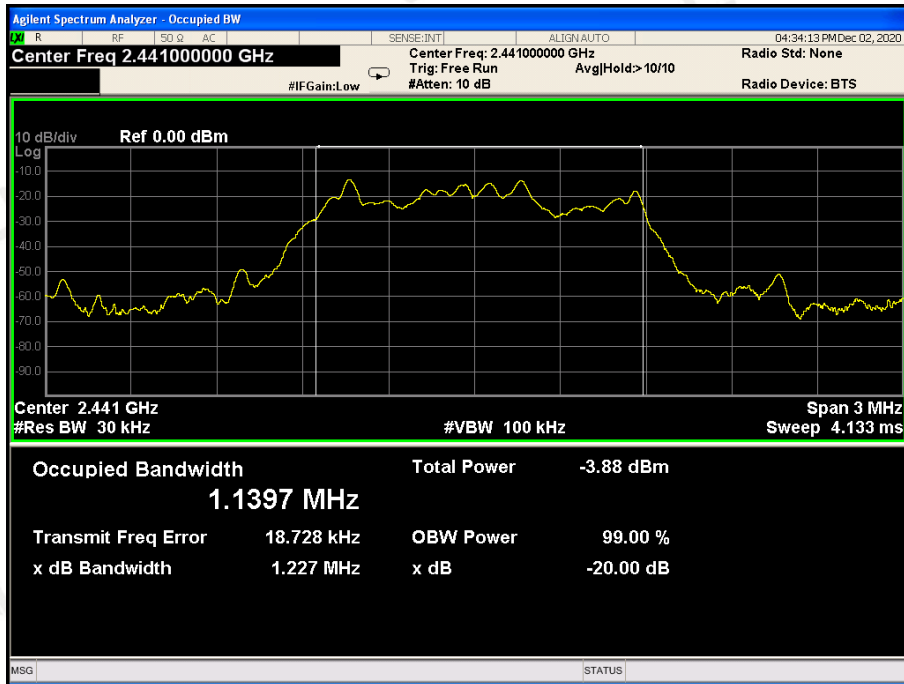

CH78: 2480MHz

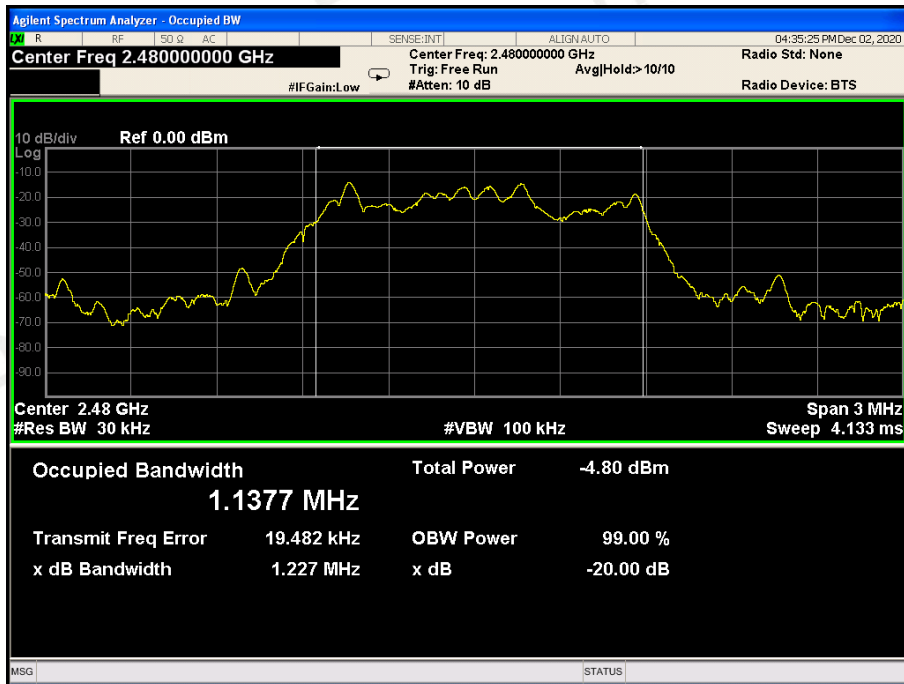

7 ANTENNA REQUIREMENT


Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction


The antenna used in this product is a PCB Antenna, The directional gains of antenna used for transmitting is 0dBi.

ANTENNA:

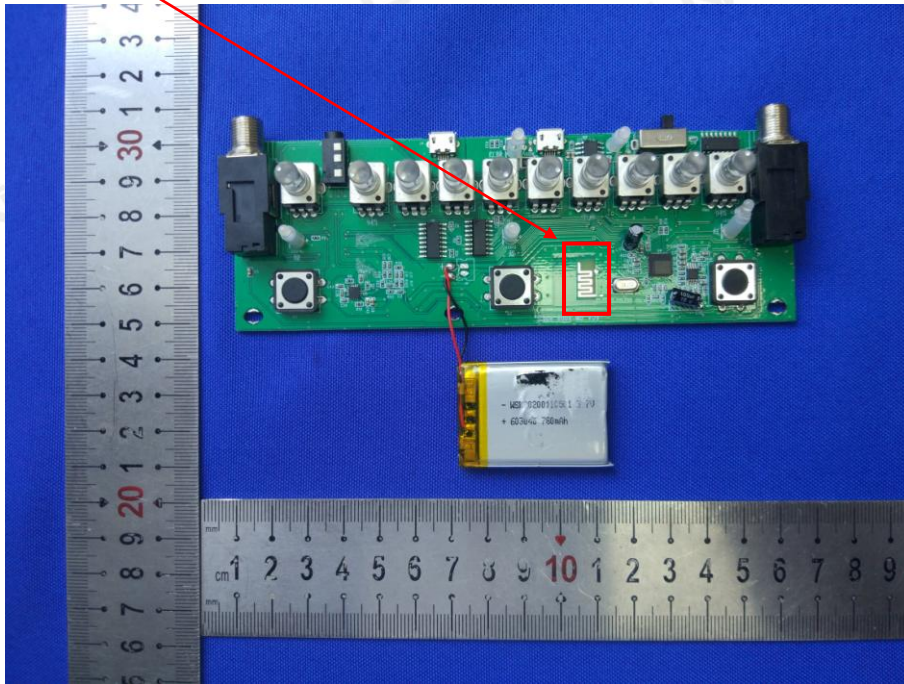

8 PHOTO OF TEST

8.1 RADIATED EMISSION

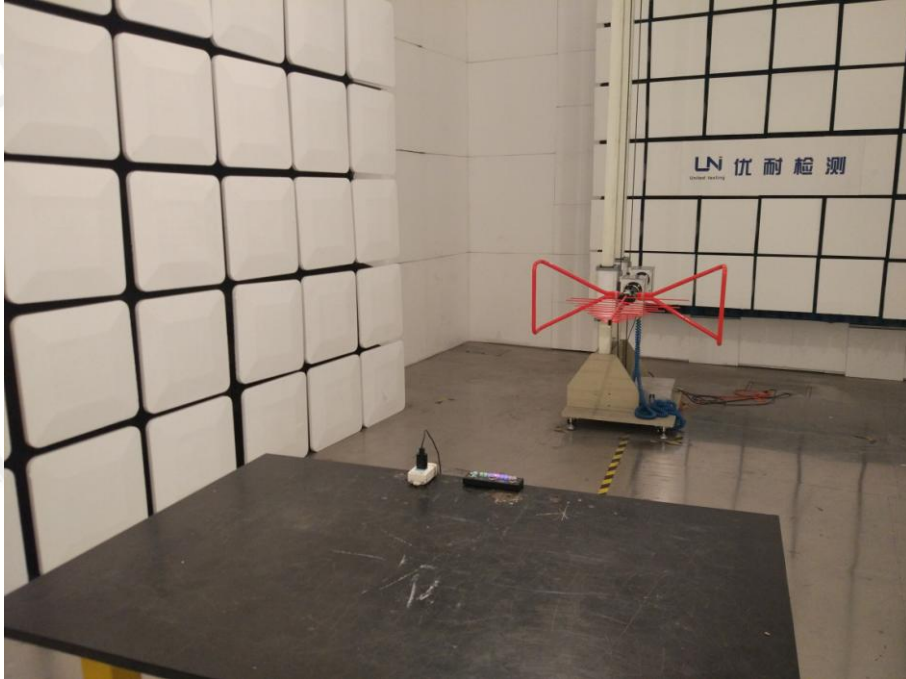

8.2 CONDUCTED EMISSION



End of Report