








# fixed wireless telephone

## – User Manual

**FCC ID: 2AREV-LWXDP05**

Thank you for using our fixed wireless telephone. In order to keep your phone in the best condition, please read this manual carefully, please keep it after reading.

## 一、 Interface icon description

icon	Description	icon	Description
	Indicates the strength of the network signal.		Indicates that the power adapter is plugged in.
	Indicates that new information has not been reviewed.		Indicates the battery capacity. The more the number of cells, the more the battery is.
	Indicates that the SMS storage space is full.		Indicates that the alarm is turned on.
	Indicates that unconditional call forwarding is turned on.		

## 二、 device installation

1. Install the (U)SIM card. Make sure that the phone is turned off and disconnected from the power adapter. Open the back (U) SIM card cover of the phone. When installing, place the (U)SIM card with the chamfered side outward and the side with the gold contacts facing Next, and confirm that the (U)SIM card is fully inserted.
2. Install the battery. Make sure the phone is off and disconnected from the power adapter. Insert the battery cable into the battery interface of the phone. Pay attention to the direction of the battery socket during installation to avoid reverse insertion.
3. Install an external power adapter. Plug one end of the power adapter connection cord into the power jack on the back of the unit base and the other end into a power outlet. Make sure the phone is charging when it is turned on.

## 三、 Function introduction

### 3.1 basic voice call function

This feature is available only when the network name appears on the display.

#### ◆ dial number

Pick up the handset or press the handsfree button. When you hear a dial tone, enter the phone number (you can select a number from the contacts, or press the dial button to call up the recent call list and select a record), then press the dial button to call.

#### ◆ Answer/reject call

When the call comes in, you can directly lift the handle call, or press the speakerphone or OK button to enter the hands-free call; press the exit button to reject the call.

Note: The record and statistics of the specific call duration are subject to the operator's billing statement.

### 3.2 SMS function

#### ◆ Receiving/sending text messages

- 1) After entering the SMS editing interface, you can manually input the sent content (see the input method for input method). After editing, press OK to enter the number or enter the address book to select the number to be sent, then press OK or left function key to send.
- 2) When receiving a short message, the screen will prompt to receive new information, and there is a new short message prompt tone, press the left function key to read the information, or directly into the short message inbox to read the short message.

### 3.3 Introduction to other functions

#### ◆ Set up speed dial


- 1) In the address book, press the left function key to enter the option.

- 2) Press the up/down direction key to select the Fast Dial setting and select 2 to 9. You can set the number keys 2 to 9 speed dial corresponding numbers.
- 3) Press the left function key, select Edit, and enter the phone number.
- 4) Press the left function key to save the setting result.

◆ **Set up one-touch dialing**

- 1) In the settings, press the arrow keys to select one-touch dial settings.
- 2) Press the up/down direction keys to select one-touch dial 1 to 4 to set the M2 to M4 corresponding numbers.
- 3) Press the left function key, select Edit, enter your name and phone number.
- 4) Press the left function key to save the setting result.

◆ **Label**

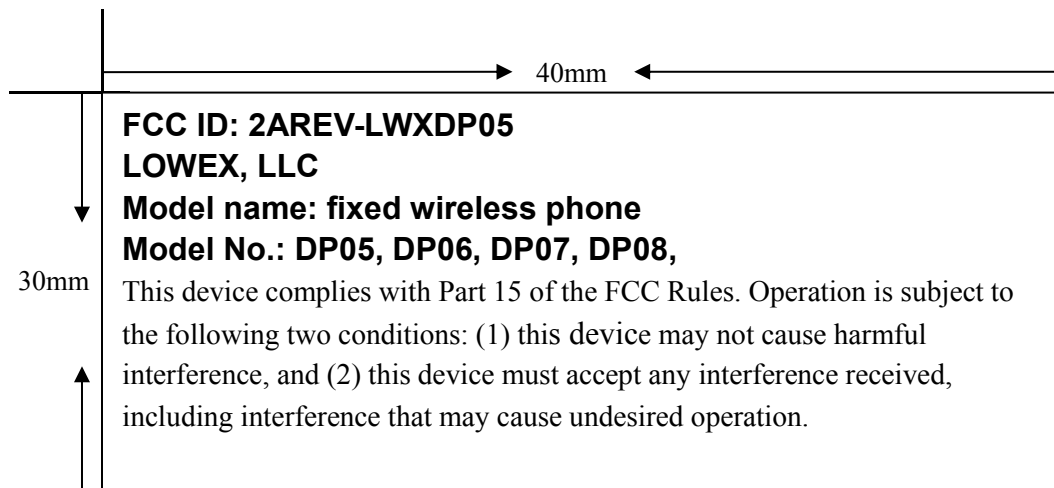

#### 四、 Introduction to input method

FEATURES	OPERATING
<b>Input Chinese characters</b>	Pinyin input method(拼音), press the number key corresponding to the pinyin letter in turn until the pinyin letter you want appears on the display screen. The input pinyin should conform to the Pinyin rule, otherwise you cannot enter it. Press OK and the arrow keys to select the word you want to enter. Stroke input method(笔画), press the corresponding number key of the stroke in turn until the desired stroke combination appears on the display. Press OK and the arrow keys to select the word you want to enter. Both the Pinyin input method and the stroke input method have the function of associative input.
<b>Enter letters</b>	In the letter input method (abc/ABC), press the corresponding number key until the letter you want is displayed on the screen.
<b>type in data</b>	At the digital input (123) Press the number key once.
<b>Input symbol</b>	Press the * key or the number key 1 to call up the common symbol, press the direction key to select, press the OK key to confirm.
<b>Enter a space</b>	Press the 0 key (except for the digital input method).
<b>Delete character</b>	Press the right function software once to delete the previous character where the cursor is located; press and hold the right function soft key to delete all the characters that have been entered.
<b>Moving the cursor</b>	Press the arrow keys.
<b>Change input method</b>	Press the # key to switch the input method.

## 五、 Safety warnings and precautions

In order to ensure the correct, effective and safe use of the telephone to avoid human damage, please pay attention to the following matters:

- Please do not use this device in a location that says "No wireless devices are allowed."
- Turn off the equipment at gas stations, oil depots, chemical plants, or inflammable and explosive materials.
- In an emergency, an emergency call can be made using the telephone, but there is no guarantee that the connection will be successful under all conditions, so you should not rely solely on the telephone for important communications.
- To prevent the risk of explosion, use the same type of battery.
- Do not place the battery at high temperatures or throw it into a fire to avoid an explosion.
- If you need to replace the battery, please look for the equipment supplier. Do not discard the used batteries.

## 六、 Toxic and hazardous substance declaration

部件名称	有毒有害物质或元素						环保 使用 年限
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr <sup>6+</sup> )	多溴联苯 (PBB)	多溴二苯醚 (PBDE)	
电路板组件	×	○	○	○	○	○	20
机壳组件	○	○	○	○	○	○	20
配件组件	×	○	○	○	○	○	20
旅行充电器	×	○	○	○	○	○	20
电池组件	×	○	○	○	○	○	05
附属件组件	×	○	○	○	○	○	20

○: Indicates that the content of this toxic and hazardous substance in all homogeneous materials of this part is below the limit requirement stipulated in GB/T26572-2011 "Limited Requirements for Toxic and Hazardous Substances in Electronic Information Products".

×: Indicates that the content of the toxic and hazardous substance in at least one of the homogeneous materials of the part exceeds the limit requirement specified in GB/T26572-2011.

Note: The reason why this product is marked with "×" is that at this stage, the replacement of toxic and hazardous substances or elements cannot be achieved due to the limitation of global technological development level.

warranty card			
Host model		Place of origin	
IMEI number		Incoming network sign number	
charger model		Serial number	
battery model		Serial number	
Sales unit		contact number	
address		Zip code	
Sales date		Invoice number	
username		contact number	
address		Zip code	
After-sales service center address:			
Service Hotline:			

**Warranty:**

1. The warranty service is limited to the quality problems that occur under normal use.
- 2, man-made damage and force majeure damage does not enjoy warranty services, such as: private disassembly, drop damage, water, etc.
3. Do not tear up the label on the main unit and accessories, otherwise you will not enjoy the warranty service.
- 4, the warranty period starts from the date of invoicing, the host and charger are guaranteed for one year, and the battery is guaranteed for half a year.
5. The warranty is only available for Ruiheng products and accessories sold through regular channels.

**Warranty notes:**

1. This warranty card should be kept by the user. This card and related invoices must be issued at the same time.
2. Please fill in the warranty card carefully, please do not change it, otherwise it will be invalid.
3. This warranty card can only take effect after being stamped by the authorized sales unit of Fujian Ruiheng.
4. Please bring the equipment and the warranty card and relevant invoice to the designated after-sales service center for maintenance.

(sales unit stamp)



Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### RF Exposure Information (SAR)

This device meets the government's requirements for exposure to radio waves. This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.

The exposure standard employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg. Tests for SAR are conducted using standard operating positions accepted by the FCC with the EUT transmitting at the specified power level in different channels. The FCC has granted an Equipment Authorization for this device with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this device is on file with the FCC and can be found under the Display Grant section of [www.fcc.gov/oet/ea/fccid](http://www.fcc.gov/oet/ea/fccid).

To ensure that RF exposure levels remain at or below the tested levels, use a beltclip, holster, or similar accessory that have no metallic component in the assembly and must maintains a minimum separation distance of 10mm between your body and the device.

## Packing List

Packing List							
Part Name	Quantity	unit	Remarks	Part Name	Quantity	unit	Remarks
Host	1	station		handle	1	One	
Handle cable	1	Article		Power Adapter	1	One	
User manual	1	this	Included warranty card, certificate	Rechargeable Battery	1	group	Installed into the host