



Smart Motion Sensor SMS2-OD
User Manual



Tips

1. The CONNECTED hub is required to be a Thread HomeKit Hub.

iOS Home APP→ Home Settings→ Home Hubs & Bridges→ choose the hub


✓ Apple TV 4K A2843(3rd Gen), A2169(2nd Gen)

✓ Apple HomePod (2nd Gen)

✓ Apple HomePod mini

✗ Apple TV 4K A2737(3rd Gen), A1842(1st Gen)

✗ Apple HomePod (1st Gen)

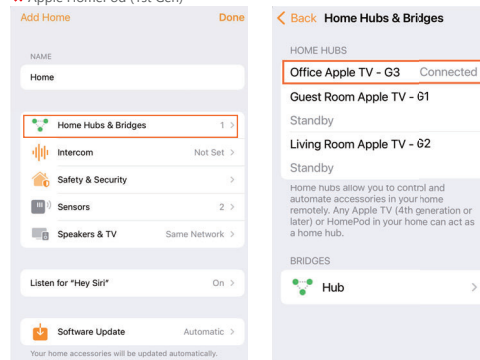

Contact support@onvitech.com for assistance.



QUICK START GUIDE

1. Insert the included 2 AA alkaline batteries and close the cover.
2. Make sure the Bluetooth of your iOS device is on.
3. Use the Home app, or download the free Onvis Home App and open it.
4. Tap "+" in the top right corner and scan the QR code on the SMS2-OD to add the accessory to your Apple Home system.
5. Set up a Thread Apple Home hub as the CONNECTED hub to enable BLE+Thread connection, remote control and notification.
6. For troubleshooting visit: <https://www.onvistech.com/Support/9.html>

Note:

- When QR code scanning is NOT applicable, you may manually input the SETUP code printed on the QR code label.
- If the app prompts "Couldn't add Onvis-XXXXXX", please reset and re-add the device. Please keep the QR code for future use.
- The use of a HomeKit-enabled accessory needs the follow permissions:
 - a. Settings>iCloud>iCloud Drive>Turn On
 - b. Settings>iCloud>Keychain>Turn On
 - c. Settings>Privacy>HomeKit>Onvis Home>Turn On

Thread and Apple Home Hub Setting

Controlling this HomeKit-enabled accessory automatically and away from home requires a HomePod, HomePod mini, or Apple TV set up as a home hub. It is recommended that you update to the latest software and operating system.

To build an Apple Thread network, a Thread enabled Apple Home hub device is required to be the CONNECTED hub (seen in the Home app) in the Apple Home system. If you have multiple hubs, please turn off the Non-Thread hubs temporarily, then one Thread hub will automatically be assigned as the CONNECTED hub.

You may find the instruction here: <https://support.apple.com/en-us/HT207057>

Product Introduction

Onvis Smart Motion Sensor SMS2-OD is an Apple ecosystem compatible, Thread + BLE5.0 enabled, battery powered multi-sensor: Motion, Bright/Dark, Temperature and Humidity. It keeps you updated of your home conditions, and offers sensor status for Apple Home automations. It is designed with an IP66 waterproof rating to easily adapt to outdoor use scenarios.



Restore Factory Settings

Unscrew the battery compartment, press and hold the reset button for 5 seconds, Onvis SMS2-OD will be reset to factory settings after the LED flashing green-red-green-red lights.

Specifications

Model: SMS2-OD	Dimension: 3.3*3.3*1.7inch/84*84*43mm
Wireless connection: Thread+Bluetooth Low Energy 5.0	Water Resistance: IP66
Motion detection: 5~10 meters, 100 ° (16~33 ft, 100 °)	Usage: Indoor & outdoor
Operating temperature: -10 C ~ 45 C (14 F ~ 113 F)	Power: 2×AA Replaceable Alkaline Batteries
Operating humidity: 5%-95% RH	Battery standby time: 4 years
Accuracy: Typical±0.3 C, Typical±5% RH	

Installation Instructions

- **Direct Use**


Place the SMS2-OD on a flat surface like a shelf, table or desk.

- **Installation with Stickers**


Clean and dry the target surface, peel off the sticker cover and stick the device on the surface.

- **Installation with Holder**

1. Screw the holder pedestal into the device.



2. Loosen the knob to adjust detection direction. Tighten the knob to fix the direction.

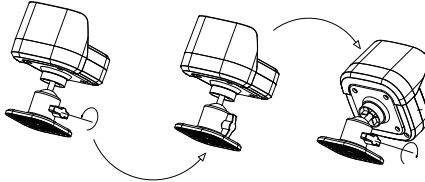

FAQ

1. Why does the response slow down to 4-8 seconds?

The connection with the hub might have been switched to bluetooth. A reboot of the home hub and device will restore the Thread connection.

2. Why did I fail to set up my Onvis Smart Motion Sensor SMS2-OD to Onvis Home app?

- (1) Make sure Bluetooth is enabled in your iOS device.
- (2) Make sure your SMS2-OD is within connecting range of your iOS device.
- (3) Before setting up, reset the device by long pressing the reset button for about 5 seconds until the LED flashing green-red-green-red lights.
- (4) Scan the setup code on the device or instruction manual.
- (5) If the app prompts "couldn't add the device" after scanning the setup code:
 - a. remove this SMS2-OD that was added before and close the app;
 - b. restore the accessory to factory settings;
 - c. add the accessory again;
 - d. update the device firmware to the latest version.

3. No Response

- (1) Please check the battery level. Make sure the battery level is not lower than 5%.
- (2) If SMS2-OD is under BLE5.0 connection, the range is limited to BLE range only. So if BLE connection is poor, please consider setting up a Thread network for SMS2-OD for better connection.
- (3) If the connection of SMS2-OD and the Thread network is too weak, try putting a Thread router to improve the Thread connection.

4. Firmware Update

- (1) A red dot on the SMS2-OD icon in the Onvis Home app means a newer firmware is available.
- (2) Tap the SMS2-OD icon to enter main page, and then tap the upper right to enter details.
- (3) Follow the app prompting to complete firmware update. Do not quit the app during firmware update. Wait about 20 seconds for SMS2-OD to reboot and reconnect.

DE **SNELLSTARTANLEITUNG**

1. Legen Sie die mitgelieferten 2 AA-Alkalibatterien ein und schließen Sie die Abdeckung.
2. Vergewissern Sie sich, dass die Bluetooth-Funktion Ihres iOS-Geräts eingeschaltet ist.
3. Verwenden Sie die Home-App oder laden Sie die kostenlose Onvis Home-App herunter.
4. Tippen Sie oben rechts auf „+“ und scannen Sie den QR-Code auf dem SMS2-OD, um das Zubehör zu Ihrem Apple Home-System hinzuzufügen.
5. Richten Sie einen Thread HomeKit-Hub als CONNECTED-Hub ein, um BLE+Thread-Verbindung, Fernsteuerung und Benachrichtigung zu ermöglichen.
6. Für die Fehlersuche besuchen Sie: <https://www.onvistech.com/Support/9.html>

Hinweis:

- Wenn der QR-Code-Scan NICHT anwendbar ist, können Sie den auf dem Deckblatt aufgedruckten SETUP-Code manuell eingeben.
- Wenn die App die Meldung "Onvis-XXXXX konnte nicht hinzugefügt werden" anzeigt, setzen Sie das Gerät bitte zurück und fügen es erneut hinzu. Bitte bewahren Sie den QR-Code zur späteren Verwendung auf.
- Die Verwendung eines HomeKit-fähigen Zubehörs erfordert die folgenden Berechtigungen:
 - a. Einstellungen>iCloud>iCloud Drive>Einschalten
 - b. Einstellungen>iCloud>Schlüsselbund>Einschalten
 - c. Einstellungen>Datenschutz>HomeKit>Onvis Home>Einschalten

Thread und Apple Home Hub Einstellung

Um dieses HomeKit-fähige Zubehör automatisch und unterwegs steuern zu können, ist ein HomePod, HomePod mini oder Apple TV als Home-Hub erforderlich. Es wird empfohlen, auf die neueste Software und das neueste Betriebssystem zu aktualisieren.

Um ein Apple-Thread-Netzwerk aufzubauen, muss ein Thread-fähiges Apple Home-Hub- Gerät der CONNECTED-Hub (in der Home-App zu sehen) im Apple Home-System sein. Wenn Sie mehrere Hubs haben, schalten Sie bitte die Nicht-Thread-Hubs vorübergehend aus, dann wird ein Thread-Hub automatisch als CONNECTED-Hub zugewiesen.

Die Anleitung dazu finden Sie hier: <https://support.apple.com/en-us/HT207057>

Produkt-Einführung

Der Onvis Smart Motion Sensor SMS2-OD ist ein Apple-Ökosystem-kompatibler, Thread + BLE5.0-fähiger, batteriebetriebener Multi-Sensor: Bewegung, Hell/Dunkel, Temperatur und Luftfeuchtigkeit. Er hält Sie über die Bedingungen in Ihrem Zuhause auf dem Laufenden und bietet den Sensor status für Apple Home-Automatisierungen. Es verfügt über die Schutzart IP66 und ist wasserdicht, sodass es sich problemlos an den Einsatz im Freien anpassen lässt.



Werkseinstellungen wiederherstellen

Schrauben Sie das Batteriefach ab, drücken und halten Sie die Reset-Taste 5 Sekunden lang. Onvis SMS2-OD wird auf die Werkseinstellungen zurückgesetzt, nachdem die LED grün-rot-grün-rot blinkt.

Spezifikationen

Modell: SMS2-OD	Abmessungen: 84*84*43mm
Drahtlose Verbindung: Thread+Bluetooth Low Energy 5.0	Wasserdichtigkeit: IP66
Bewegungserkennung: 5 ~ 10 Meter, 100 °	Verwendung: Innen und Außen
Betriebstemperatur: -10 °C ~ 45 °C	Stromversorgung: 2x AA-Alkalibatterien
Luftfeuchtigkeit bei Betrieb: 5%-95% RH	Batterie-Standby-Zeit: 4 Jahre
Messgenauigkeit: Typisch±0,3 °C, Typisch±5% RH	

Installationsanleitung

- **Direkte Verwendung**


Stellen Sie das SMS2-OD auf eine flache Oberfläche wie ein Regal, einen Tisch oder einen Schreibtisch.

- **Installation mit Aufklebern**


Reinigen und trocknen Sie die Zieloberfläche, ziehen Sie die Aufkleberabdeckung ab und kleben Sie das Gerät auf die Oberfläche.

- **Installation mit Halterungssockel**

1. Schrauben Sie den Halterungssockel in das Gerät.



2. Lösen Sie den Knopf, um die Erkennungsrichtung einzustellen. Ziehen Sie den Knopf fest, um die Richtung zu fixieren.

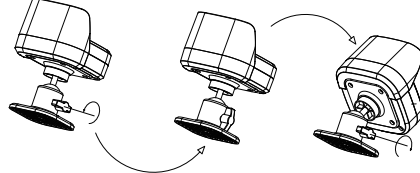

FAQ

1. Warum verlangsamt sich die Reaktionszeit auf 4-8 Sekunden?

Die Verbindung mit dem Hub wurde möglicherweise auf Bluetooth umgestellt. Durch einen Neustart des Home Hubs und des Geräts wird die Thread-Verbindung wiederhergestellt.

2. Warum konnte ich meinen Onvis Motion Sensor SMS2-OD nicht mit der Onvis Home App einrichten?

- (1) Stellen Sie sicher, dass Bluetooth auf Ihrem iOS-Gerät aktiviert ist.
- (2) Vergewissern Sie sich, dass sich Ihr SMS2-OD in der Verbindungsreichweite Ihres iOS-Geräts befindet.
- (3) Setzen Sie das Gerät vor dem Einrichten zurück, indem Sie die Reset-Taste etwa 5 Sekunden lang gedrückt halten, bis die LED grün-rot-grün-rot blinkt.
- (4) Scannen Sie den Setup-Code auf dem Gerät oder der Bedienungsanleitung.
- (5) Wenn die App nach dem Scannen des Einrichtungscodes die Meldung "Das Gerät konnte nicht hinzugefügt werden" ausgibt:
 - a. Entfernen Sie dieses SMS2-OD, das zuvor hinzugefügt wurde, und schließen Sie die App;
 - b. Setzen Sie das Zubehör auf die Werkseinstellungen zurück;
 - c. Fügen Sie das Zubehör erneut hinzu;
 - d. Aktualisieren Sie die Gerätefirmware auf die neueste Version.

3. Keine Reaktion

- (1) Bitte überprüfen Sie den Batteriestand. Vergewissern Sie sich, dass der Batteriestand nicht weniger als 5% beträgt.
- (2) Wenn SMS2-OD mit BLE5.0 verbunden ist, ist die Reichweite nur auf den BLE-Bereich beschränkt. Wenn also die BLE-Verbindung schlecht ist, sollten Sie für eine bessere Verbindung ein Thread-Netzwerk für SMS2-OD einrichten.
- (3) Wenn die Verbindung zwischen SMS2-OD und dem Thread-Netzwerk zu schwach ist, versuchen Sie, einen Thread-Router einzusetzen, um die Thread-Verbindung zu verbessern.

4. Firmware-Aktualisierung

- (1) Ein roter Punkt auf dem SMS2-OD-Symbol in der Onvis Home App bedeutet, dass eine neuere Firmware verfügbar ist.
- (2) Tippen Sie auf das SMS2-OD-Symbol, um die Hauptseite aufzurufen, und tippen Sie dann oben rechts, um Details einzugeben.
- (3) Befolgen Sie die Anweisungen der App, um das Firmware-Update abzuschließen. Beenden Sie die App während des Firmware-Updates nicht. Warten Sie etwa 20 Sekunden, bis das SMS2-OD neu startet und die Verbindung wiederherstellt.

FR

GUIDE DE DÉMARRAGE RAPIDE

1. Insérez les 2 piles alcalines AA fournies et fermez le couvercle.
2. Assurez-vous que la fonction Bluetooth de votre appareil iOS est activée.
3. Utilisez l'application Home, ou téléchargez l'application gratuite Onvis Home App et ouvrez-la.
4. Appuyez sur «+» dans le coin supérieur droit et scannez le code QR sur le SMS2-OD pour ajouter l'accessoire à votre système Apple Home.
5. Configurer un hub Thread HomeKit en tant que hub CONNECTED pour activer la connexion BLE+ Thread, le contrôle à distance et la notification.
6. Pour le dépannage, visitez : <https://www.onvistech.com/Support/9.html>

Remarque :

- Lorsque la lecture du code QR n'est PAS applicable, vous pouvez saisir manuellement le code SETUP imprimé sur la page de couverture.
- Si l'application vous indique "Couldn't add Onvis-XXXXXX", veuillez réinitialiser et réinscrire l'appareil. Veuillez conserver le code QR pour une utilisation ultérieure.
- L'utilisation d'un accessoire compatible HomeKit nécessite les autorisations suivantes :
 - a. Paramètres>iCloud>iCloud Drive>Mettre en marche
 - b. Paramètres>iCloud>Keychain>Activer
 - c. Paramètres>Privacy>HomeKit>Onvis Home>Turn On

Paramétrage de Thread et du Home Hub d'Apple

Le contrôle de cet accessoire compatible HomeKit de manière automatique et en dehors de la maison nécessite un HomePod, un HomePod mini ou une Apple TV configurée comme un hub domestique. Il est recommandé d'effectuer une mise à jour vers les derniers logiciels et systèmes d'exploitation. Pour construire un réseau Apple Thread, un appareil Apple Home hub compatible Thread est nécessaire pour être le hub CONNECTED (vu dans l'application Home) dans le système Apple Home. Si vous avez plusieurs concentrateurs, veuillez éteindre temporairement les concentrateurs non Thread, puis un concentrateur Thread sera automatiquement assigné en tant que concentrateur CONNECTED. Vous pouvez trouver l'instruction ici: <https://support.apple.com/en-us/HT207057>

Introduction du produit

Le capteur de mouvement intelligent SMS2-OD d'Onvis est un multi-capteur alimenté par batterie, compatible avec l'écosystème Apple, compatible avec Thread + BLE5.0 : Mouvement, luminosité/obscurité, température et humidité. Il vous tient au courant des conditions de votre maison et offre le statut du capteur pour les automatismes Apple Home. Il est conçu avec un indice d'étanchéité IP66 pour s'adapter facilement aux scénarios d'utilisation en extérieur.



Restaurer les paramètres d'usine

Dévissez le compartiment à piles, appuyez et maintenez enfoncé le bouton de réinitialisation pendant 5 secondes, Onvis SMS2-OD sera réinitialisé aux paramètres d'usine après que la LED clignote en vert -rouge-vert-rouge.

Spécifications

Modèle : SMS2-OD	Dimension : 84*84*43mm
Connexion sans fil : Thread + Bluetooth Low Energy 5.0	Résistance à l'eau : IP66
Détection de mouvement : 5~10 mètres, 100 °	Utilisation : Intérieur et extérieur
Température de fonctionnement : -10 °C ~ 45 °C	Alimentation : 2 x AA piles alcalines
Humidité de fonctionnement : 5%-95% RH	Autonomie des piles : 4 ans
Précision : Typique±0.3 °C, Typique±5% RH	

Instructions d'installation

• Utilisation directe


Placez le SMS2-OD sur une surface plane comme une étagère, une table ou un bureau.

• Installation avec des autocollants


Nettoyez et séchez la surface cible, décollez le cache autocollant et collez l'appareil sur la surface.

• Installation avec socle Holder

1. Vissez le socle de support dans l'appareil.



2. Desserrez le bouton pour régler la direction de détection. Serrez le bouton pour fixer la direction.

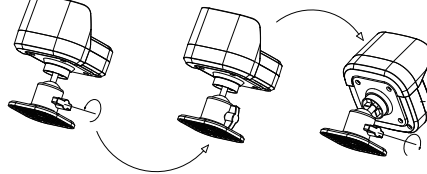

FAQ

1. Pourquoi le temps de réponse ralentit-il à 4-8 secondes ?

La connexion avec le hub a peut-être été commutée sur Bluetooth. Un redémarrage du hub domestique et de l'appareil restaurera la connexion Thread.

2. Pourquoi n'ai-je pas réussi à configurer mon Onvis SMS2 vers l'application Onvis Home ?

- (1) Assurez-vous que la fonction Bluetooth est activée sur votre appareil iOS.
- (2) Assurez-vous que votre SMS2-OD est à portée de connexion de votre appareil iOS.
- (3) Avant la configuration, réinitialisez l'appareil en appuyant longuement sur le bouton de réinitialisation pendant environ 5 secondes jusqu'à ce que la LED clignotant vert-rouge-vert-rouge s'allume.
- (4) Scannez le code de configuration sur l'appareil ou le manuel d'instructions.
- (5) Si l'application vous demande "impossible d'ajouter l'appareil" après avoir scanné le code d'installation:
 - a. supprimez ce SMS2-OD qui a été ajouté auparavant et fermez l'application ;
 - b. rétablissez les paramètres d'usine de l'accessoire ;
 - c. ajoutez à nouveau l'accessoire ;
 - d. mettez à jour le micrologiciel de l'appareil avec la dernière version.

3. Pas de réponse

- (1) Veuillez vérifier le niveau de la batterie. Assurez-vous que le niveau de la batterie n'est pas inférieur à 5%.
- (2) Si le SMS2-OD est sous connexion BLE5.0, la portée est limitée à la portée BLE uniquement. Donc, si la connexion BLE est mauvaise, veuillez envisager de mettre en place un réseau Thread pour le SMS2-OD pour une meilleure connexion.
- (3) Si la connexion du SMS2-OD et du réseau Thread est trop faible, essayez de mettre un routeur Thread pour améliorer la connexion Thread.

4. Mise à jour du micrologiciel


- (1) Un point rouge sur l'icône SMS2-OD dans l'application Onvis Home signifie qu'un nouveau firmware est disponible.
- (2) Appuyez sur l'icône SMS2-OD pour accéder à la page principale, puis appuyez en haut à droite pour entrer les détails.
- (3) Suivez les instructions de l'application pour terminer la mise à jour du micrologiciel. Ne quittez pas l'application pendant la mise à jour du micrologiciel. Attendez environ 20 secondes pour que le SMS2-OD redémarre et se reconnecte.

Tips

1. This product is not a toy, please keep children away from this product.
2. Do not clean with liquid.
3. Do not attempt to repair the product.
4. Be sure the product is adequately ventilated, is positioned securely, and do not place it near other sources of heat (e.g. direct sunlight, radiators, or similar).

Battery Replacement

- Keep the water-proof rubber gasket in position during batteries replacement.
- Make sure the water-proof rubber gasket on screws are in position when they are screwed back.



Warnings and Cautions of Batteries

- Use only Alkaline AA batteries.
- Keep battery out of reach of children.
- If you notice any liquid coming out of any of the battery, be sure not to let it come into contact with your skin or clothing as this liquid is acidic and can be poisonous.
- Do not dispose of battery together with household waste.
- Please recycle/dispose of them in accordance with local regulations.
- Remove the battery if they run out of power or if you do not intend to use the device for a while.

Legal

- Use of the Works with Apple badge means that an accessory has been designed to work specifically with the technology identified in the badge and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.
- Apple, Apple Home, Apple Watch, HomeKit, HomePod, HomePod mini, iPad, iPad Air, iPhone, and tvOS are trademarks of Apple Inc., registered in the U.S. and other countries and regions. The trade-mark "iPhone" is used with a license from Alphone K.K.

EU Declaration of Conformity

Shenzhen Champion Technology Co., Ltd here by declares that this product meets basic requirements and other relevant obligation as set forth in the following guidelines:

2014/35/EU low voltage Directive (replace 2006/95/EC)

2014/30/EU EMC Directive

2014/53/EU Radio Equipment Directive [RED]

2011/65/EU (EU) 2015/863 RoHS 2 Directive

For a copy of the Conformity Declaration, visit: www.onvistech.com

This product is approved for use in European Union.

Manufacturer: Shenzhen ChampOn Technology Co., Ltd.

Address: 1A-1004, International Innovation Valley, Dashi 1st Road, Xili, Nanshan, Shenzhen, China 518055

IC: 29830-SMS20D

-English: This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

(1) This device may not cause interference, and

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

To maintain compliance with RSS-102 RF Exposure guidelines, this equipment should be installed and operated with minimum 20cm distance between the radiator and your body. Use only the supplied antenna.

-French: Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Pour être conforme aux lignes directrices d'exposition RF RSS-102, cet équipement doit être installé et exploité à une distance minimale de 20cm entre le radiateur et votre corps: n'utilisez que l'antenne fournie.

FCC ID: 2ARJH-SMS2-OD

Federal Communications Commission (FCC) compliance statement:
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.
Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.
If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.
To maintain compliance with FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum 20cm distance between the radiator and your body. Use only the supplied antenna.

WEEE Directive Compliance

This symbol indicates that it is unlawful to dispose of this product together with other household waste. Please take it to a local recycling center for used equipment.



EC

REP

eVatmaster Consulting GmbH
Bettinastr. 30
60325 Frankfurt am Main, Germany
contact@evatmaster.com

We hereby declare that the product is in conformity with the requirements of the EMC Directive (2014/53/EU) and the Low Voltage Directive (2014/35/EU) and that the product is in conformity with the requirements of the RoHS Directive (2011/65/EU) and the REACH Regulation (EC/1831/2003). We warrant that the product is in conformity with the requirements of the EMC Directive (2014/53/EU) and the Low Voltage Directive (2014/35/EU) and that the product is in conformity with the requirements of the RoHS Directive (2011/65/EU) and the REACH Regulation (EC/1831/2003). We warrant that the product is in conformity with the requirements of the EMC Directive (2014/53/EU) and the Low Voltage Directive (2014/35/EU) and that the product is in conformity with the requirements of the RoHS Directive (2011/65/EU) and the REACH Regulation (EC/1831/2003).

UK

REP

EVATOST CONSULTING LTD
Office 101 101 Fincham Road, London, E12 9AY
contact@evatost.com

We hereby declare that the product is in conformity with the requirements of the EMC Directive (2014/53/EU) and the Low Voltage Directive (2014/35/EU) and that the product is in conformity with the requirements of the RoHS Directive (2011/65/EU) and the REACH Regulation (EC/1831/2003). We warrant that the product is in conformity with the requirements of the EMC Directive (2014/53/EU) and the Low Voltage Directive (2014/35/EU) and that the product is in conformity with the requirements of the RoHS Directive (2011/65/EU) and the REACH Regulation (EC/1831/2003).



www.onvistech.com

support@onvistech.com



Facebook



Instagram

 12-month warranty

 Lifetime technical support