

Long Distance Wireless Charger

User manual



QI30

— Wireless makes simple life —

Thanks for choosing product.

Please read this user manual

carefully before using this product.

WHAT'S IN THE BOX:



Wireless Charger Antenna stickers

Note: The adapter must be 9V/2A or greater than the voltage and current adapter for wireless using data lines

Options: adapter and data line alternatives


INSTALLATION PROCESS:

1. Fix the wireless charger under any non-metallic furniture (wood, plastic, ceramic, glass,...) by You can fix the product also with the M3*16. Please ensure that the distance between the edge of the wireless charger and the surrounding area is at least 20cm.



NOTE: Furniture thickness should be between 6 to 18 mm.

2. Stick the antenna sticker exactly aligned with the center of the wireless charger. Antenna sticker must be placed on center

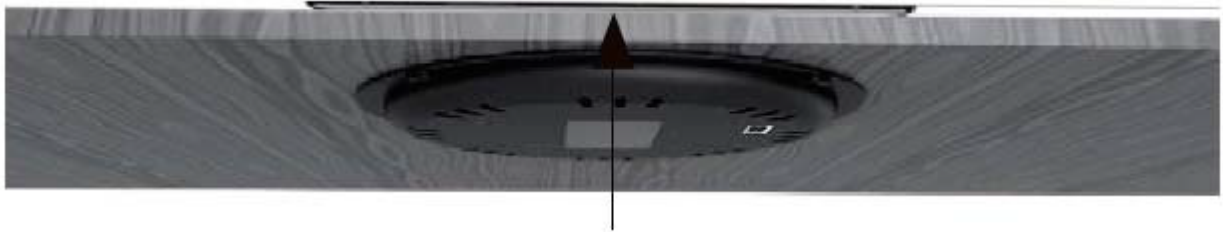

NOTE: Furniture thickness should be between 6 to 18 mm.

3. Place your phone on the center of the antenna sticker to start charging.

IMPORTANT ATTENTION:

The thickness of the furniture must be between 6 to 18 mm



The vertical distance should not be less than 15 mm. Equipment below 6 mm. enters in protection status and does not work




The center of the antenna sticker fixed on the top of the furniture has to be exactly the same as the center for the (WPC) wireless charger installed on the bottom



Do not place any metal object or credit card, magnetic storage media near the product, because information stored on may be erased



Details:

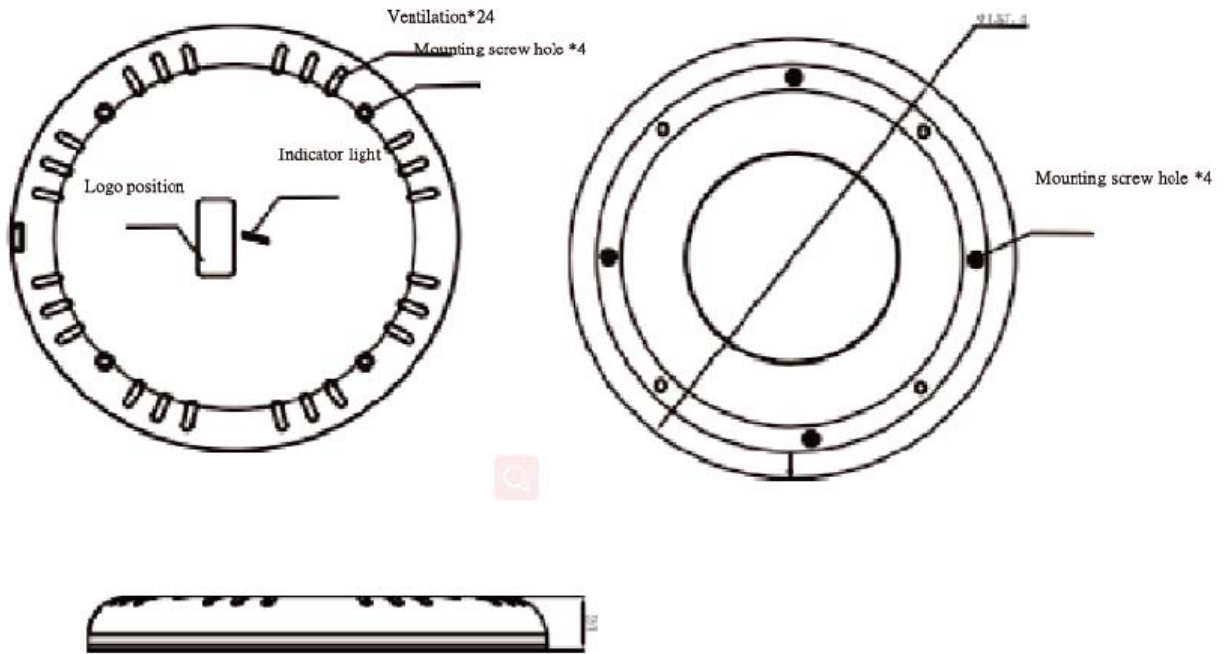

Charging Specification:

Product Model	QI30
Standard	QI
Input	DC 2.4 - 3.6V/1.8A
Output	5V/1A, 9V/1.1A
Charging Distance	6mm-18mm
Efficiency	72%
Frequency Band(S) In Which The Radio Equipment Operates	110 kHz to 175 kHz
Maximum Radio-Frequency Power Transmitted In The Frequency Band	- 6.69 dBuA/m
In Which The Radio Equipment Operates	Residential Environment

Notice:

1. Please keep this transmitter in dry and clean environment. Any liquid will cause damage to the transmitter.
2. Please choose the adapter which has the safety certification. Use improper or incompatible.
3. Please do not try to charge the battery with broken cover or charge the equipment which is incompatible with Qi.
4. Please do not use the transmitter in neither too hot nor too cold place. High temperature and low temperature will cause damage to the transmitter.
5. Please do not vigorously shake, beat or hit the product or try to open the transmitter.
6. Do not vigorously shake, beat or hit the product.
7. Do not try to modify the transmitter.
8. Please use clean, dry and soft cloth to clean the surface of the transmitter.
9. Please do not put any metal item and magnetic card on the transmitter before charging.
10. This wireless charger is only applicable for charging mobile phones.

Warranty:

1 year from purchasing date

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC warning:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

IC warning

- English:

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

- French:

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.