


[Test mode: TX middle channel]; [Polarity: Vertical]

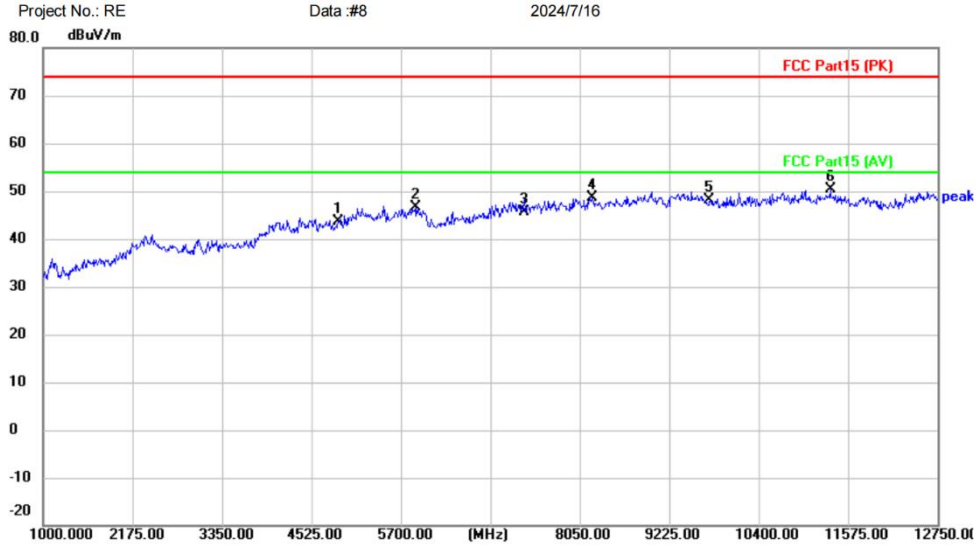

Project No.: RE Data :#8 2024/7/16


Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: MOTOROLA true wireless headphones
 M/N: MOTO BUDS I40 ANC
 Mode: BT TX 2441 L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4882.000	37.79	5.73	43.52	74.00	-30.48	peak	
2		5888.000	38.05	8.60	46.65	74.00	-27.35	peak	
3		7323.000	36.19	9.43	45.62	74.00	-28.38	peak	
4		8214.500	38.84	9.87	48.71	74.00	-25.29	peak	
5		9764.000	35.92	12.21	48.13	74.00	-25.87	peak	
6	*	11340.00	37.71	12.67	50.38	74.00	-23.62	peak	

*:Maximum data x:Over limit !:over margin <Reference Only
 Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

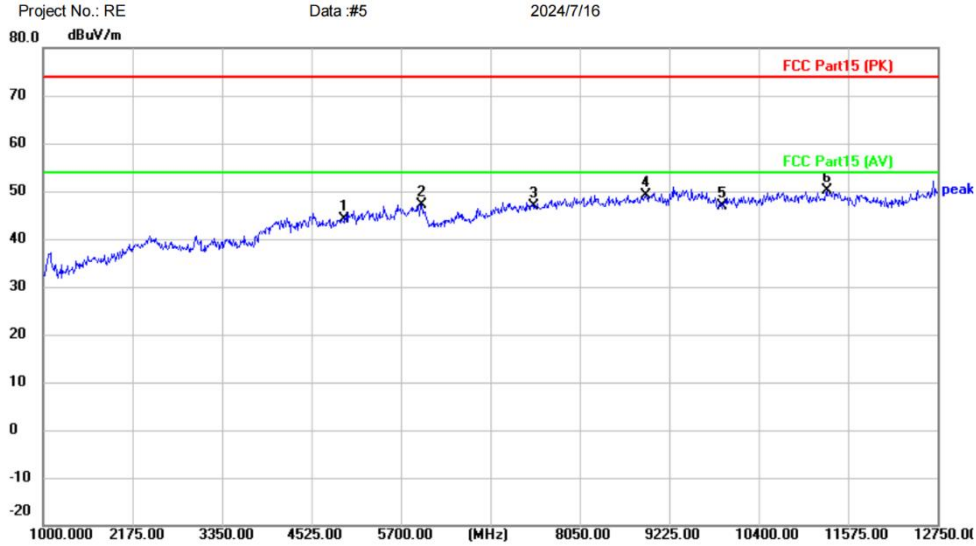

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: MOTOROLA true wireless headphones
 M/N: MOTO BUDS I40 ANC
 Mode: BT TX 2480 L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	37.60	6.60	44.20	74.00	-29.80	peak	
2		5970.250	38.37	8.72	47.09	74.00	-26.91	peak	
3		7440.000	37.22	9.64	46.86	74.00	-27.14	peak	
4		8919.500	37.02	12.14	49.16	74.00	-24.84	peak	
5		9920.000	34.65	12.14	46.79	74.00	-27.21	peak	
6	*	11293.00	37.40	12.70	50.10	74.00	-23.90	peak	

*:Maximum data x:Over limit !:over margin <Reference Only
 Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Vertical]



Project No.: RE Data :#6 2024/7/16

Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: MOTOROLA true wireless headphones
 M/N: MOTO BUDS I40 ANC
 Mode: BT TX 2480 L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	36.98	6.60	43.58	74.00	-30.42	peak	
2		5993.750	38.48	8.75	47.23	74.00	-26.77	peak	
3		7440.000	36.43	9.64	46.07	74.00	-27.93	peak	
4		8473.000	38.98	10.77	49.75	74.00	-24.25	peak	
5		9920.000	35.49	12.14	47.63	74.00	-26.37	peak	
6	*	10952.25	37.34	13.30	50.64	74.00	-23.36	peak	

*:Maximum data x:Over limit !:over margin <Reference Only

Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

6.11 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.11.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.11.2 Test setup


Below 1GHz:

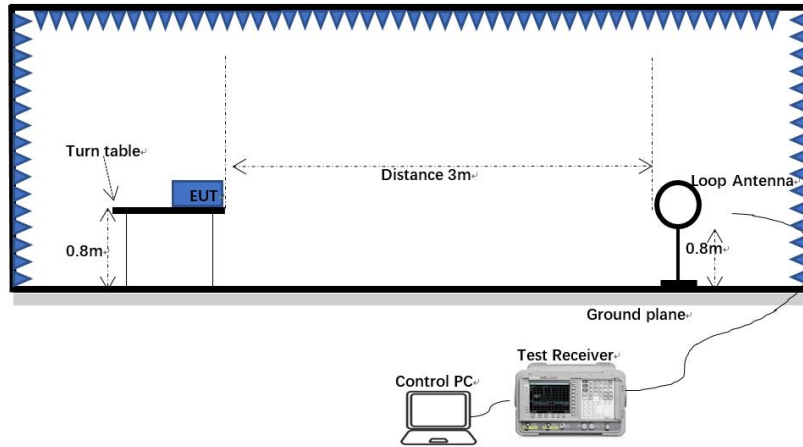

30MHz-1GHz:

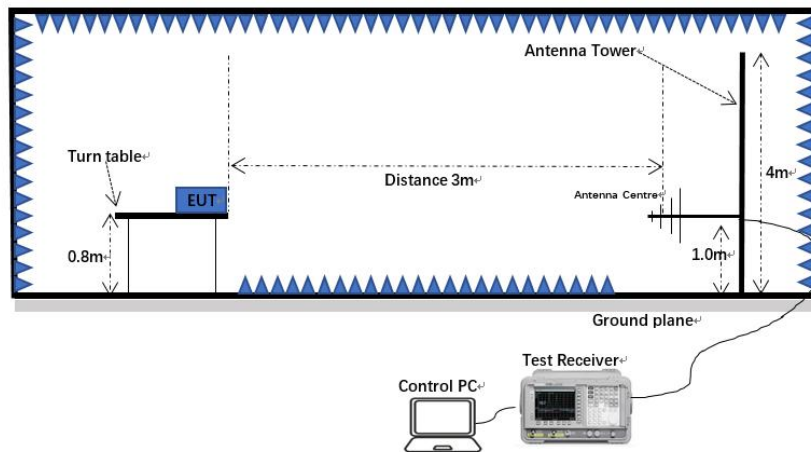

Above 1GHz:

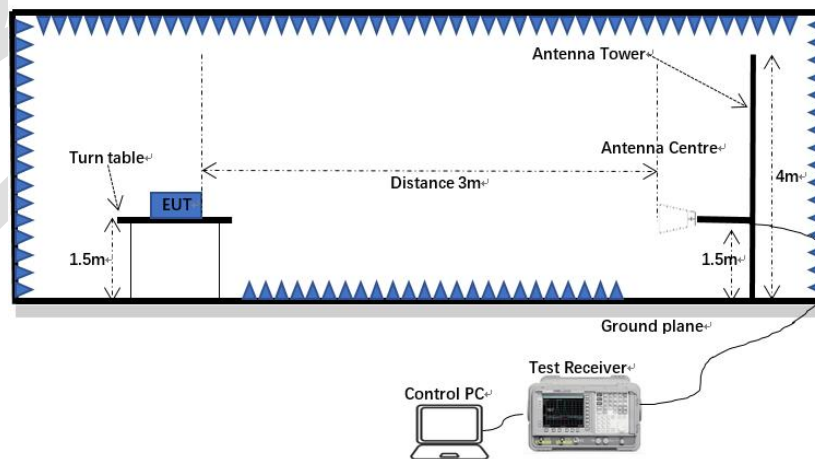

6.11.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.


Note 1: $Level (dBuV) = Reading (dBuV) + Factor (dB/m)$

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. all modes have been tested, and only the worst mode is showed in the report.

6.11.4 Test data

Remark: During the test, pre-scan the GFSK, pi/4QPSK mode, and found the GFSK mode which it is worse case.

[Test mode: TX low channel]; [Polarity: Horizontal]

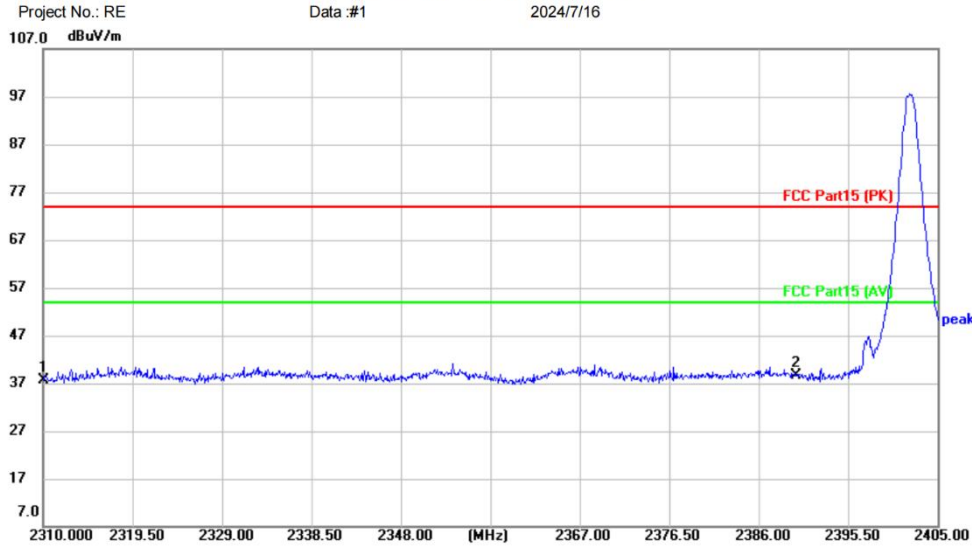


Project No.: RE Data :#1 2024/7/16
 107.0 dBuV/m
 Site Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: MOTOROLA true wireless headphones
 M/N: MOTO BUDS I40 ANC
 Mode: BT TX 2402 L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2310.000	40.63	-2.89	37.74	74.00	-36.26	peak	
2	*	2390.000	41.32	-2.70	38.62	74.00	-35.38	peak	

*:Maximum data x:Over limit !:over margin (Reference Only)
 Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode:TX low channel]; [Polarity: Vertical]

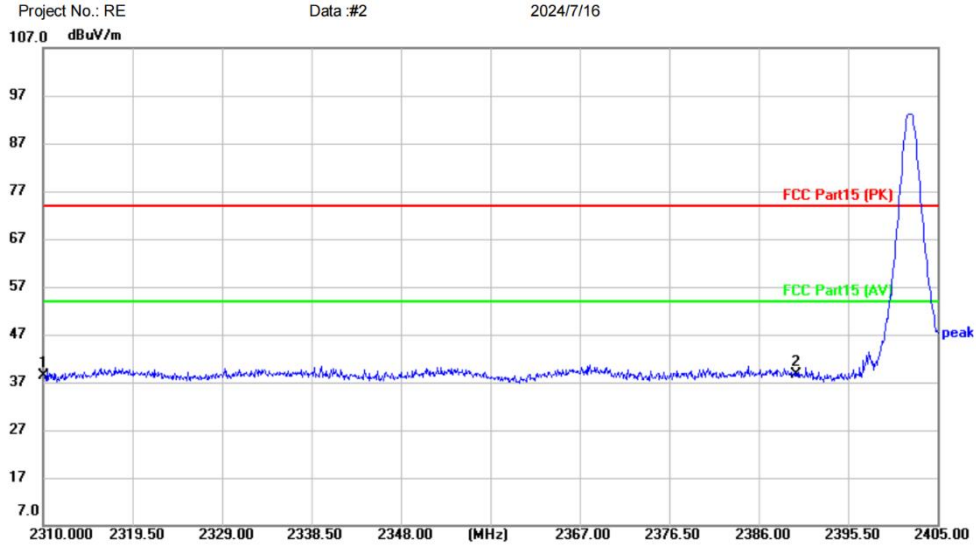

Project No.: RE Data :#2 2024/7/16
 107.0 dBuV/m


Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: MOTOROLA true wireless headphones
 M/N: MOTO BUDS I40 ANC
 Mode: BT TX 2402 L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2310.000	41.21	-2.89	38.32	74.00	-35.68	peak	
2	*	2390.000	41.37	-2.70	38.67	74.00	-35.33	peak	

*:Maximum data x:Over limit !:over margin <Reference Only
 Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

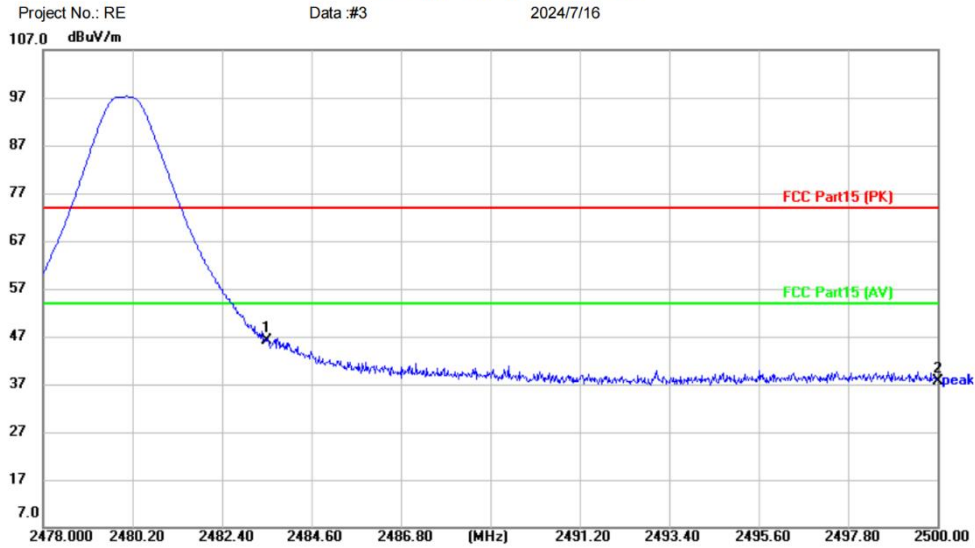


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: MOTOROLA true wireless headphones
 M/N: MOTO BUDS I40 ANC
 Mode: BT TX 2480 L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2483.500	49.04	-2.91	46.13	74.00	-27.87	peak	
2		2500.000	40.70	-3.00	37.70	74.00	-36.30	peak	

*:Maximum data x:Over limit !:over margin <Reference Only
 Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode:TX High channel]; [Polarity: Vertical]

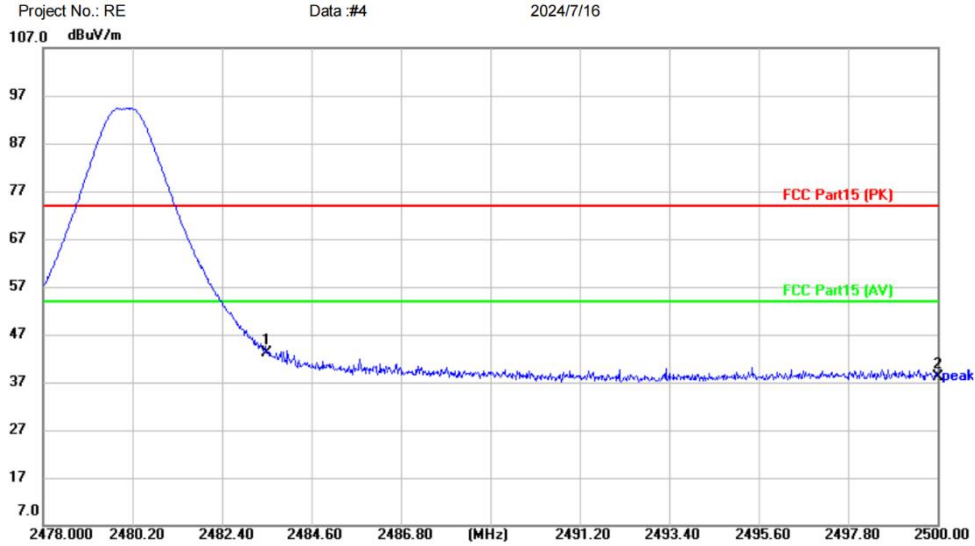

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: MOTOROLA true wireless headphones
 M/N: MOTO BUDS I40 ANC
 Mode: BT TX 2480 L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2483.500	45.92	-2.91	43.01	74.00	-30.99	peak	
2		2500.000	41.05	-3.00	38.05	74.00	-35.95	peak	

*:Maximum data x:Over limit !:over margin <Reference Only
 Receiver: ESR_1 Spectrum Analyzer: FSP40


Test Result: Pass

7 Appendix A


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-0.981	21	Pass
NVNT	1-DH1	2441	Ant1	0.111	21	Pass
NVNT	1-DH1	2480	Ant1	0.482	21	Pass
NVNT	2-DH1	2402	Ant1	1.437	21	Pass
NVNT	2-DH1	2441	Ant1	2.295	21	Pass
NVNT	2-DH1	2480	Ant1	2.962	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

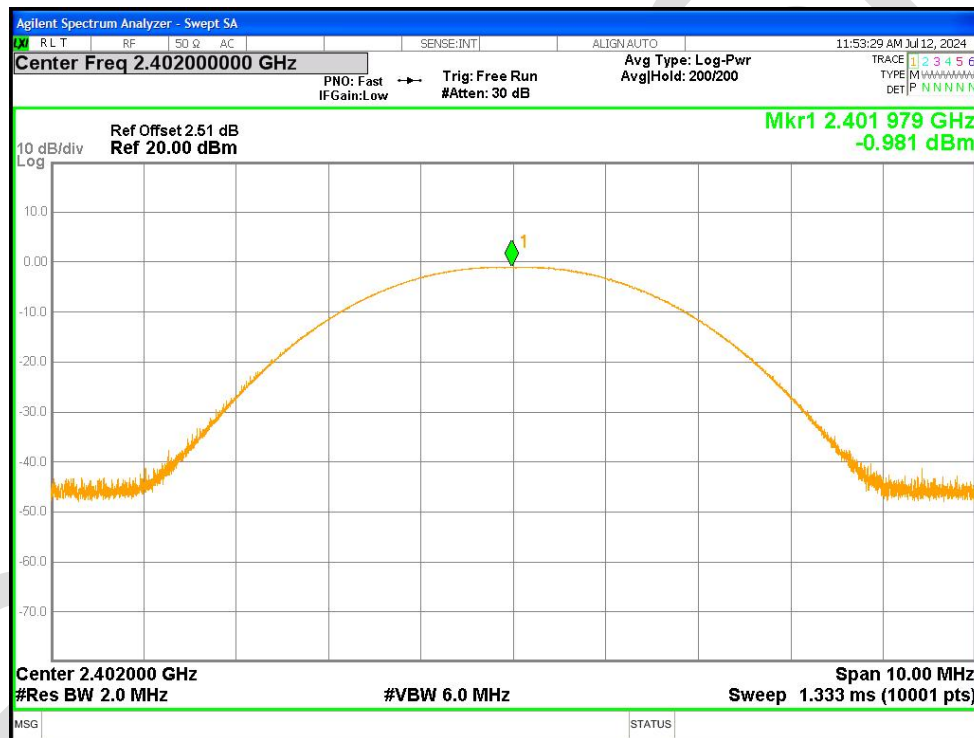


Power NVNT 1-DH1 2441MHz Ant1

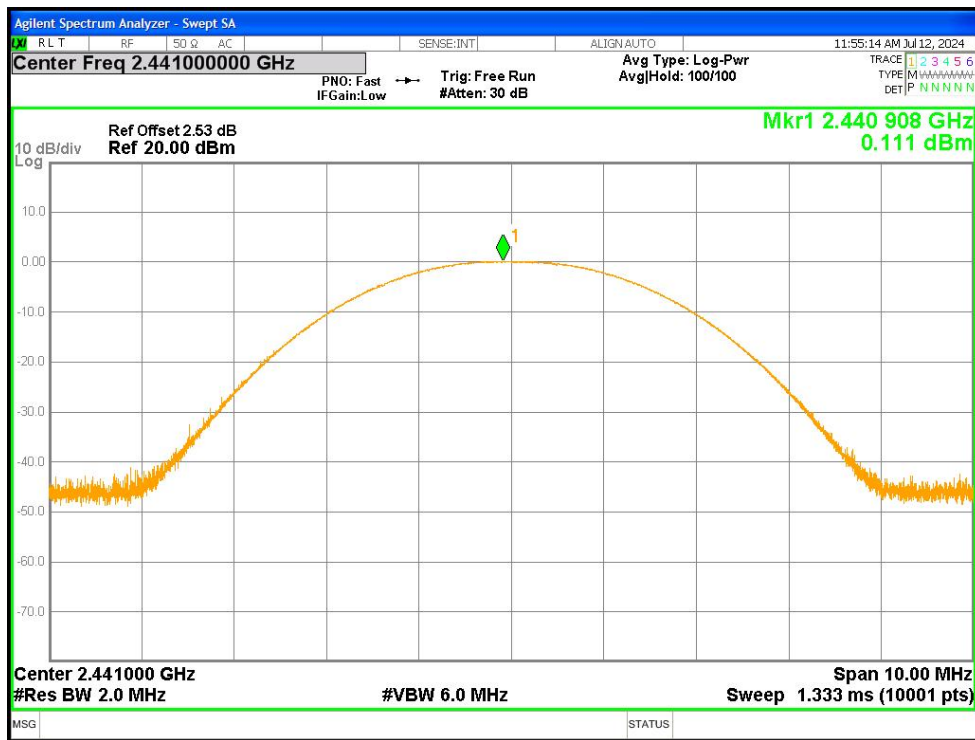


Power NVNT 1-DH1 2480MHz Ant1

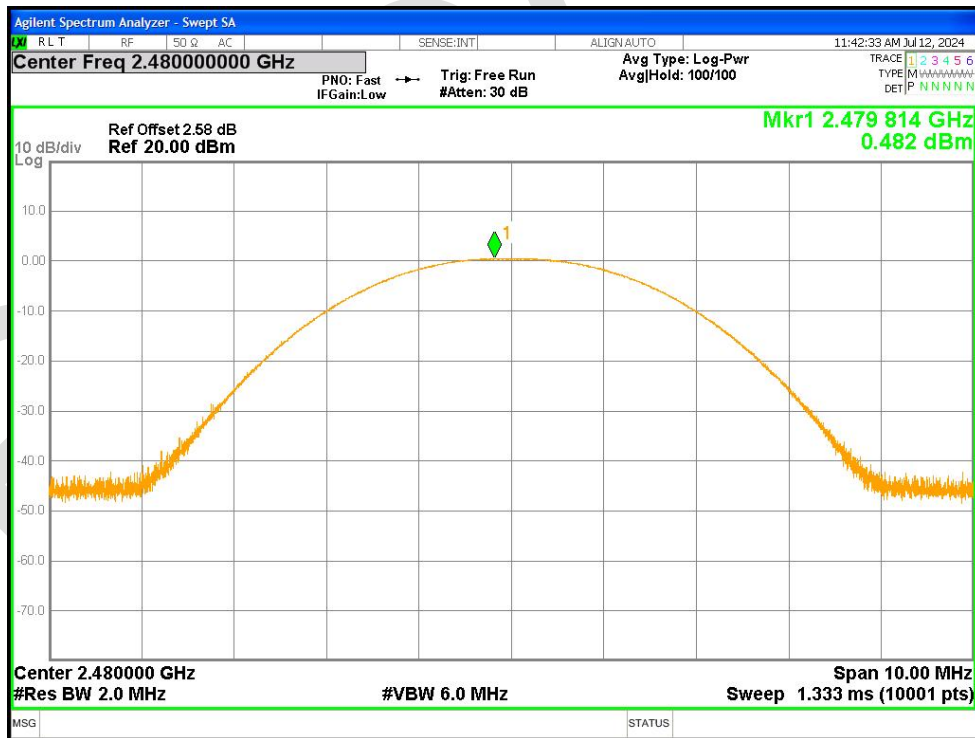


Power NVNT 2-DH1 2402MHz Ant1

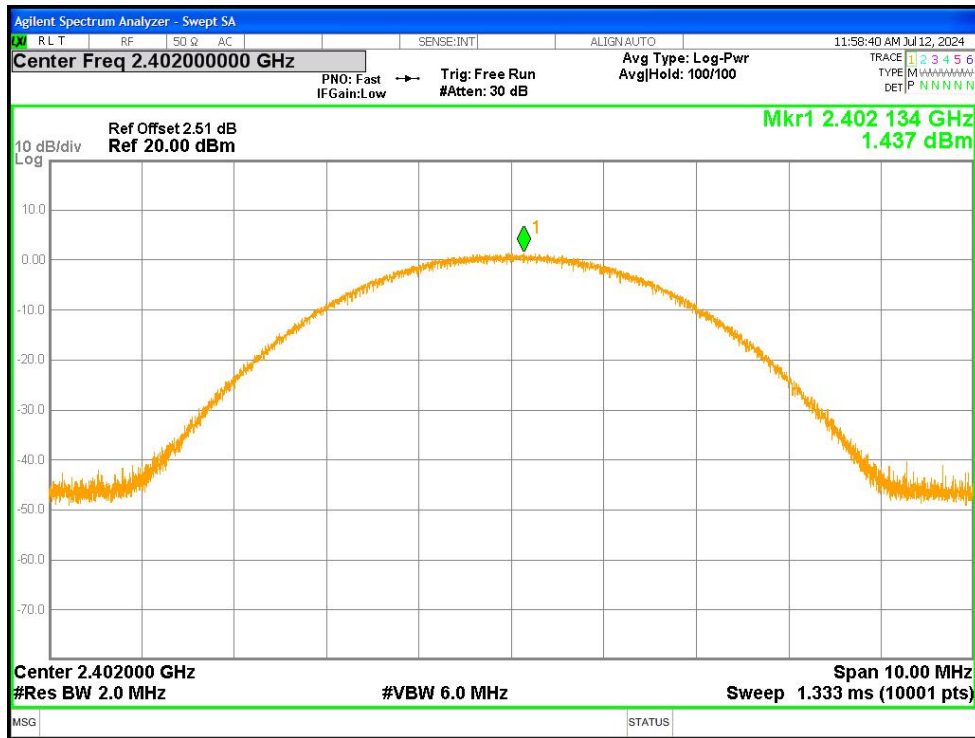

Power NVNT 2-DH1 2441MHz Ant1

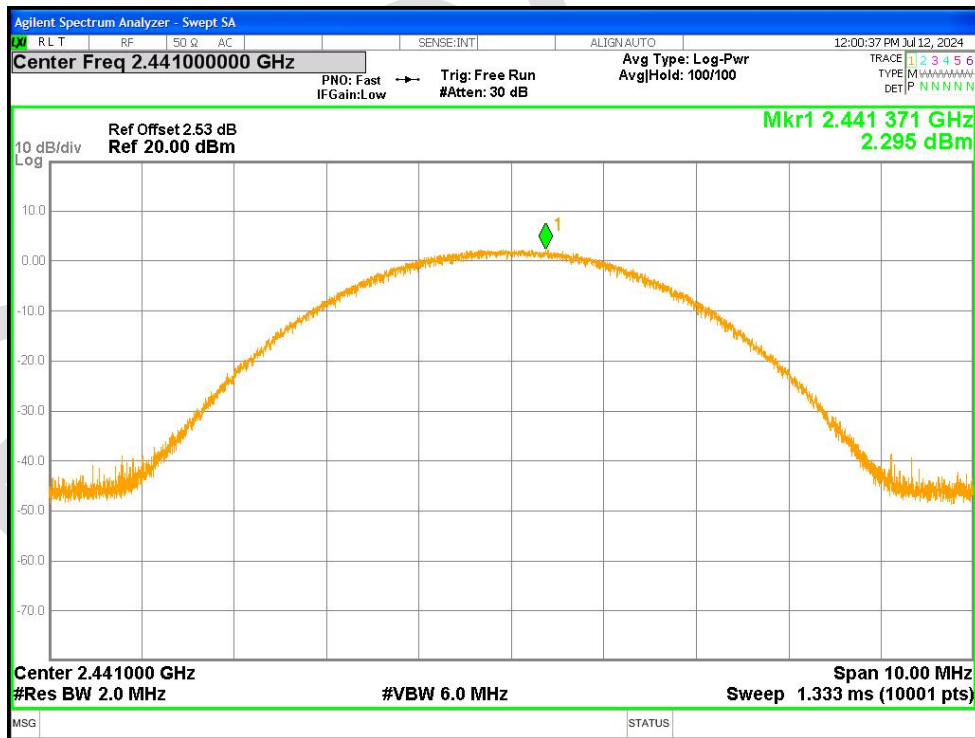



Power NVNT 2-DH1 2480MHz Ant1

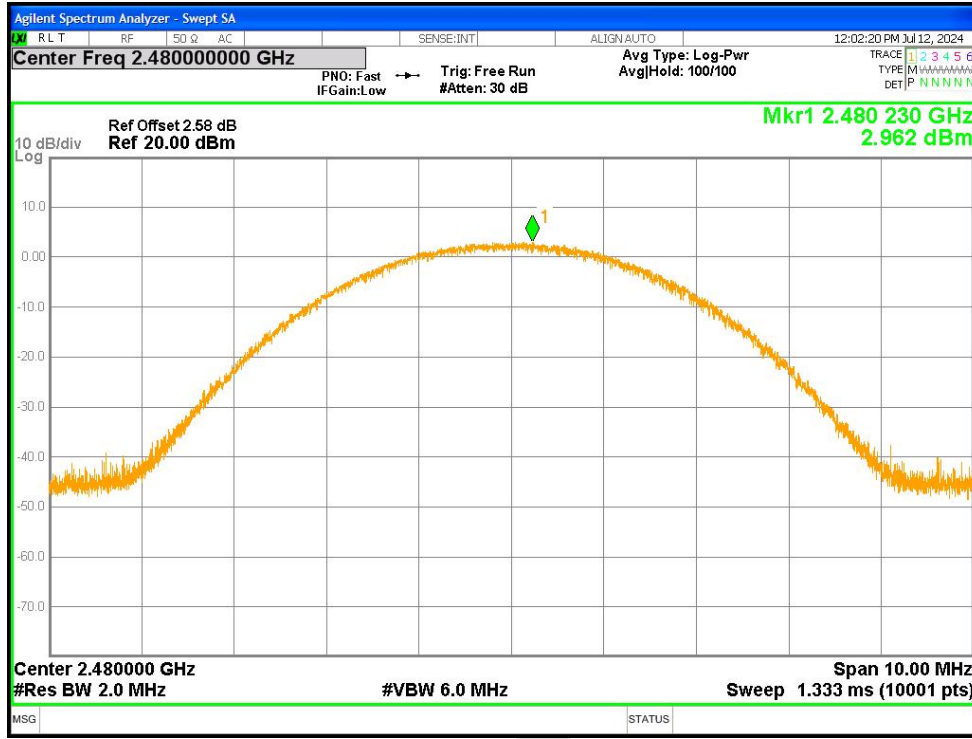


-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.917	N/A	Pass
NVNT	1-DH1	2441	Ant1	0.876	N/A	Pass
NVNT	1-DH1	2480	Ant1	0.871	N/A	Pass
NVNT	2-DH1	2402	Ant1	1.26	N/A	Pass
NVNT	2-DH1	2441	Ant1	1.257	N/A	Pass
NVNT	2-DH1	2480	Ant1	1.259	N/A </tr	

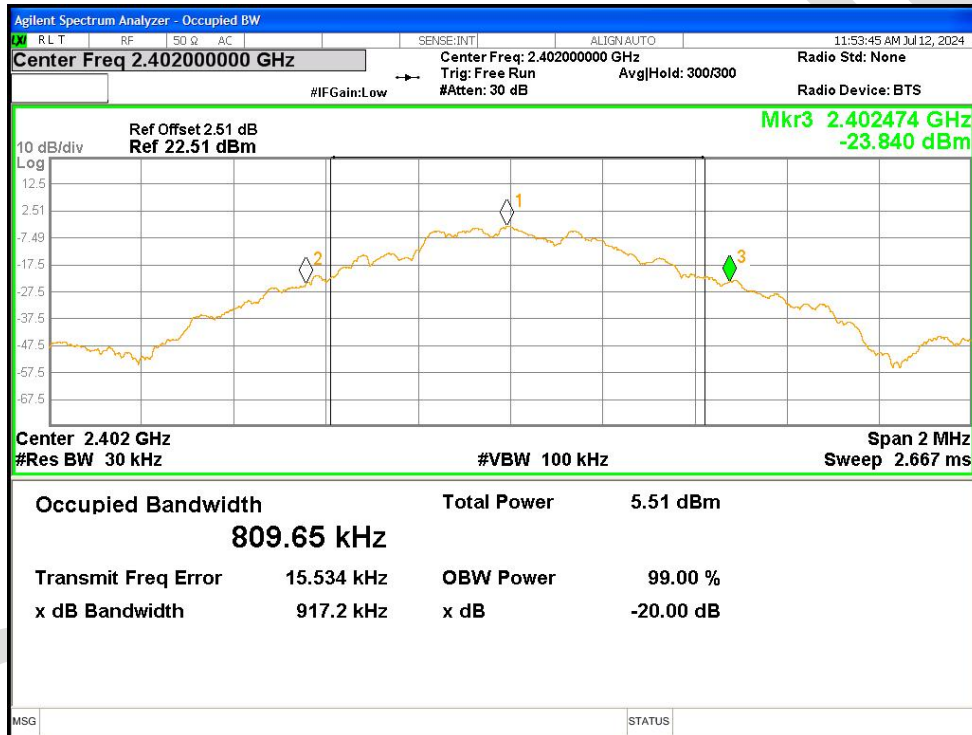
-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

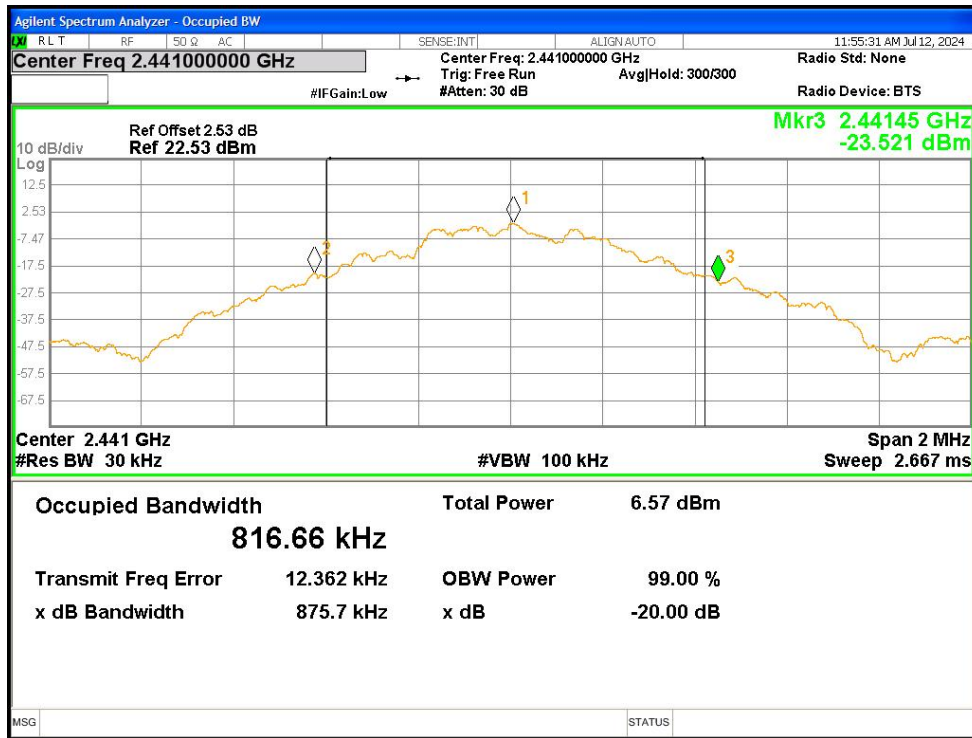-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

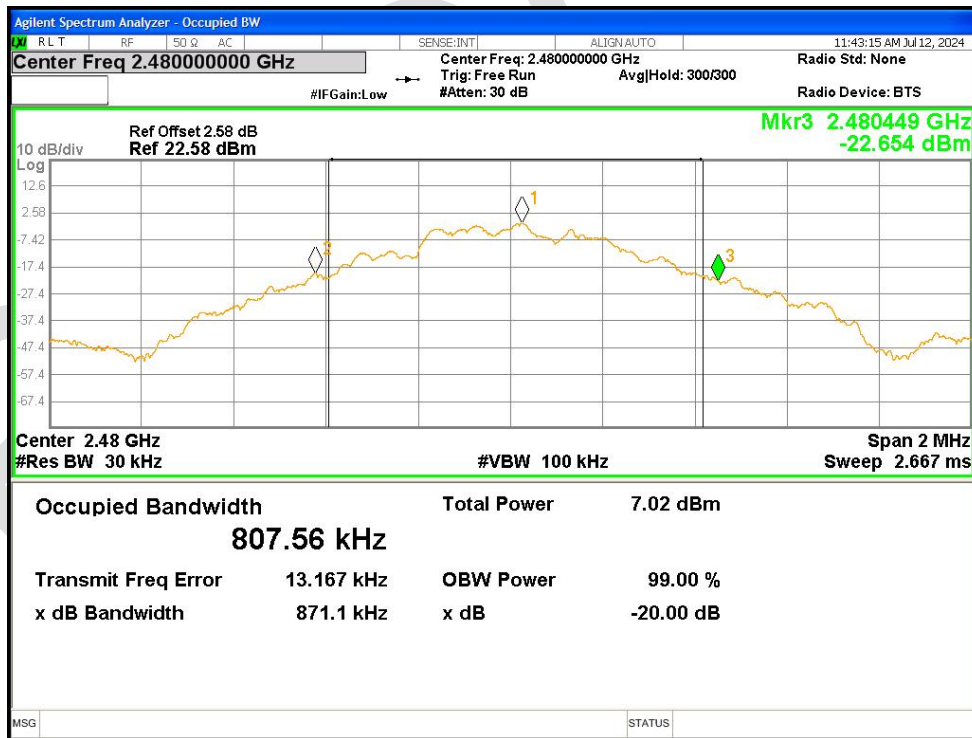


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

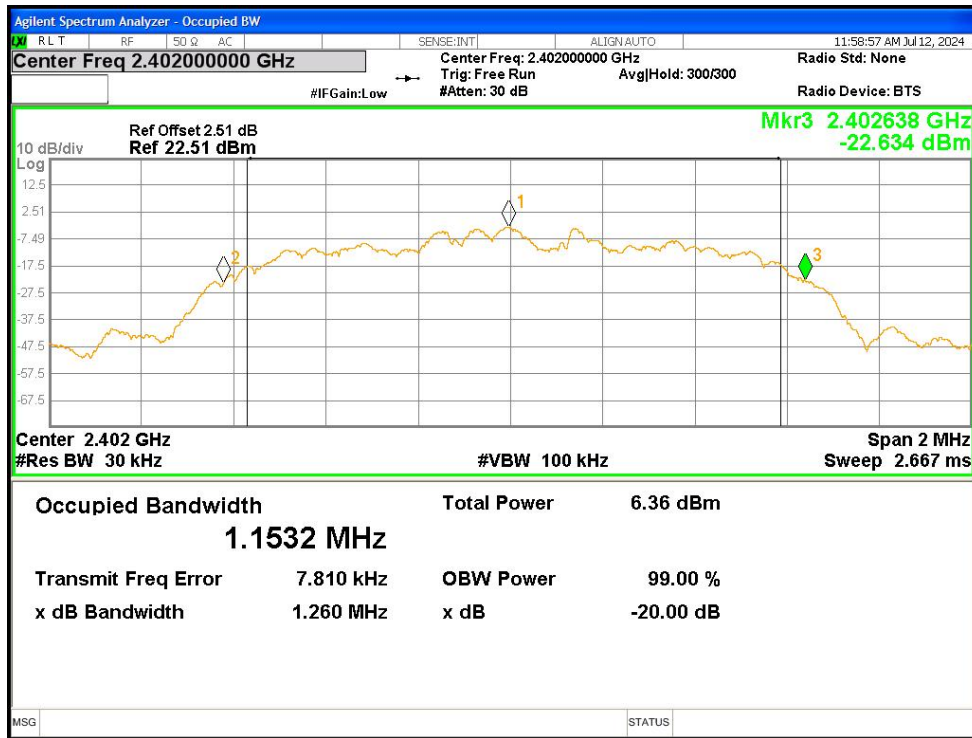


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1



-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

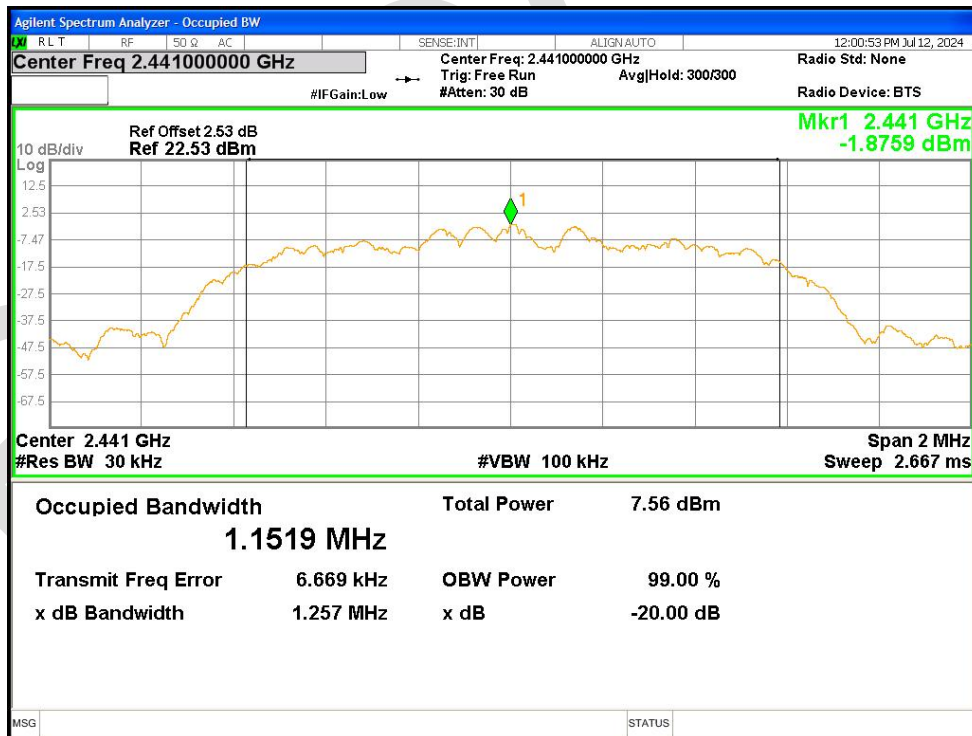



-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

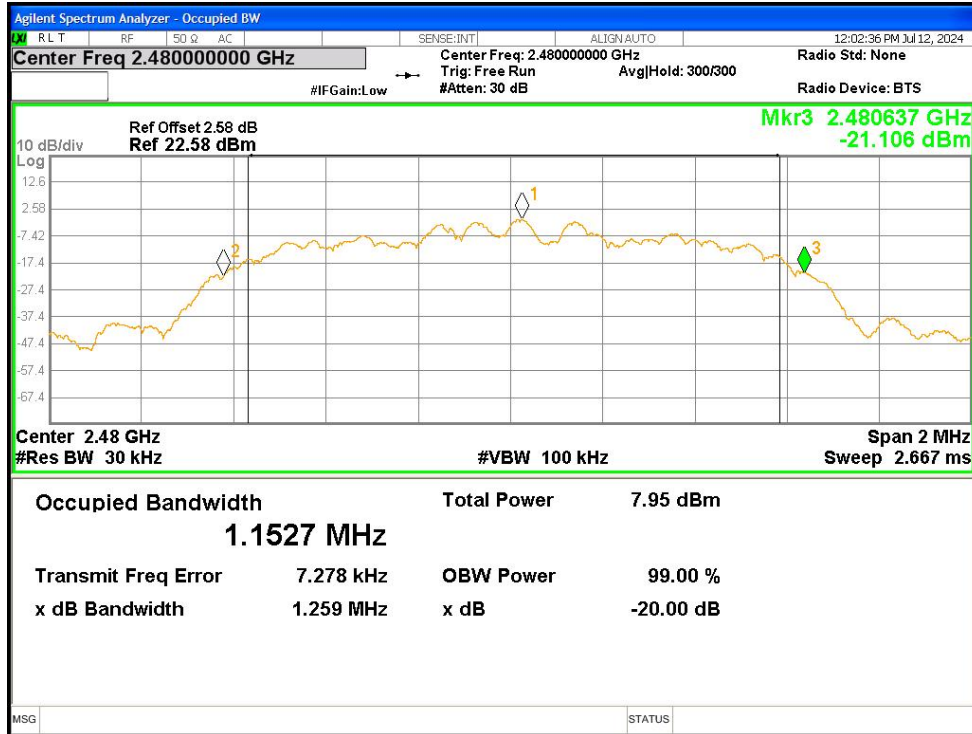


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.80978
NVNT	1-DH1	2441	Ant1	0.81327
NVNT	1-DH1	2480	Ant1	0.80635
NVNT	2-DH1	2402	Ant1	1.1522
NVNT	2-DH1	2441	Ant1	1.1544
NVNT	2-DH1	2480	Ant1	1.1537

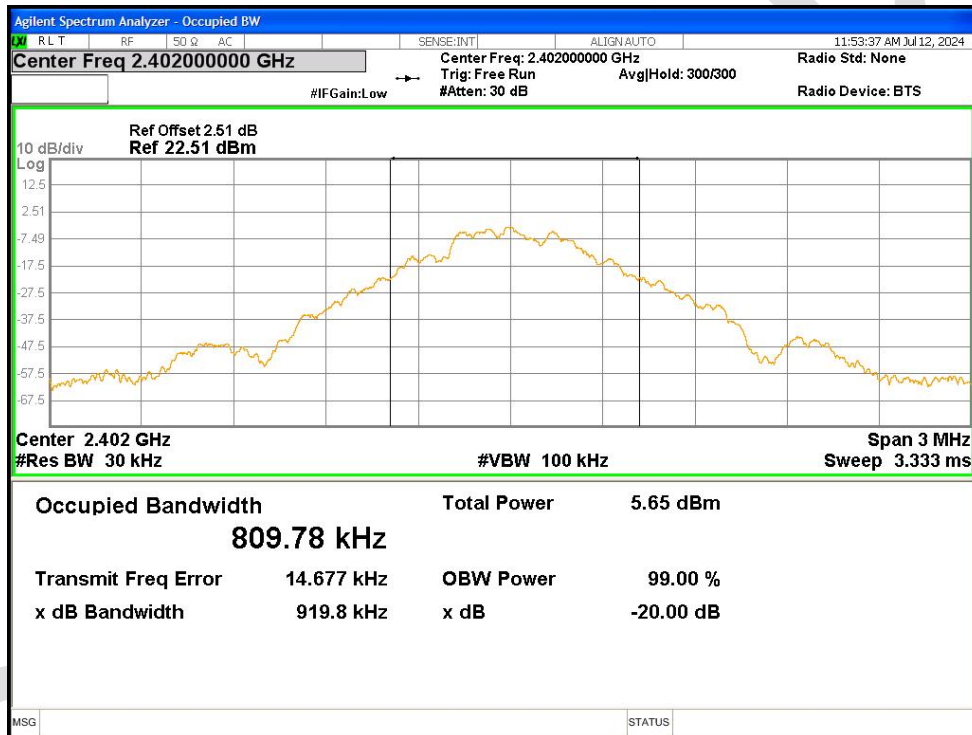
OBW NVNT 1-DH1 2402MHz Ant1

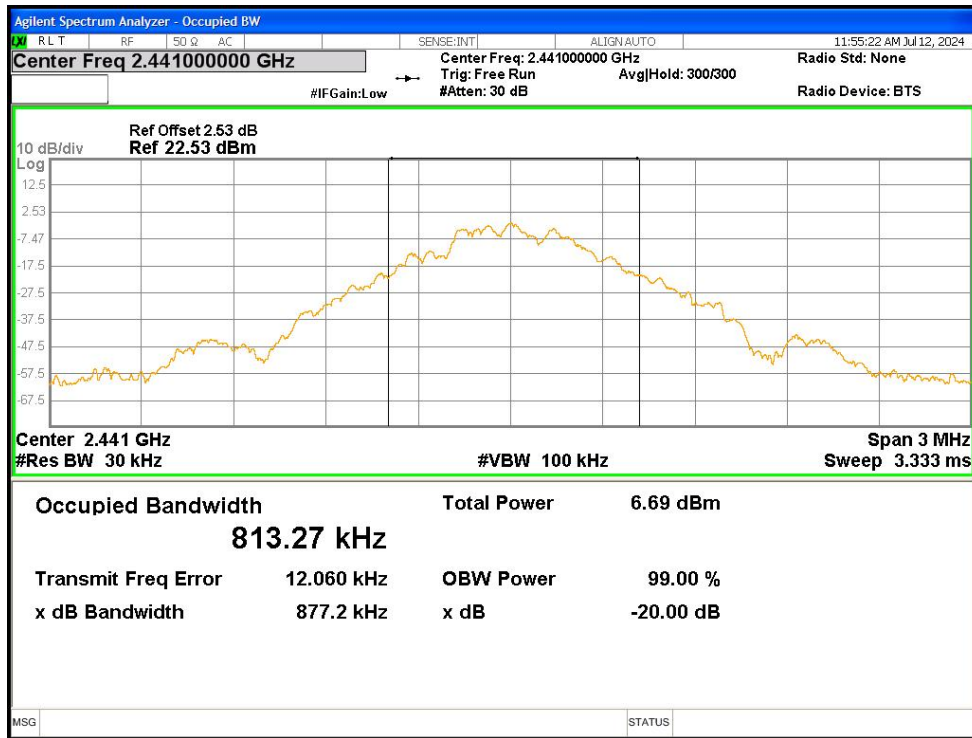OBW NVNT 1-DH1 2441MHz Ant1

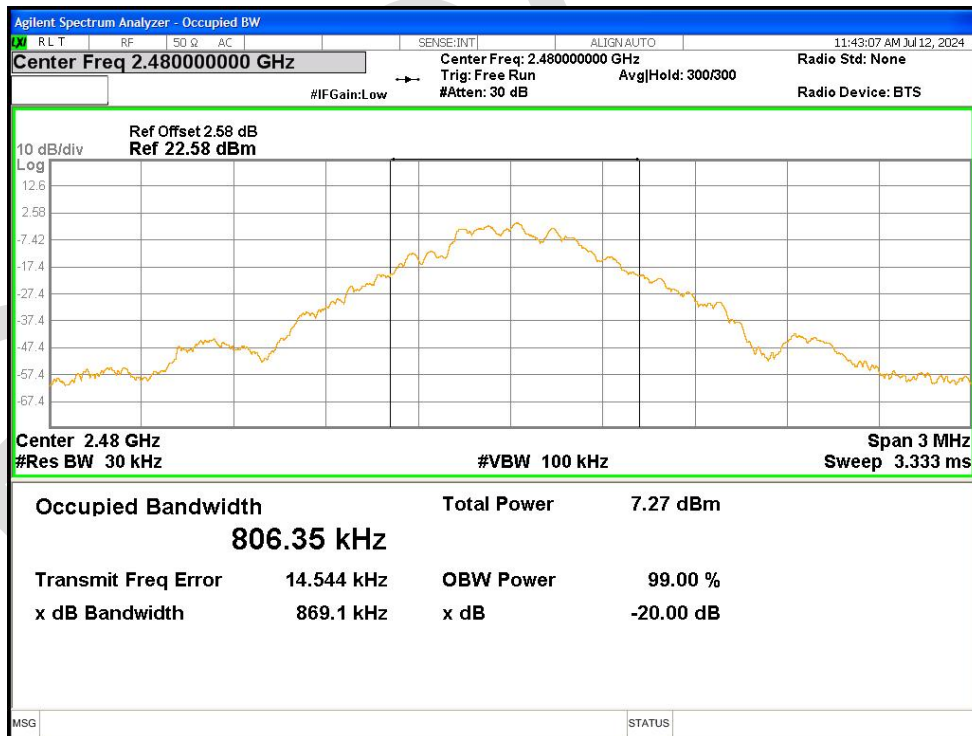


OBW NVNT 1-DH1 2480MHz Ant1

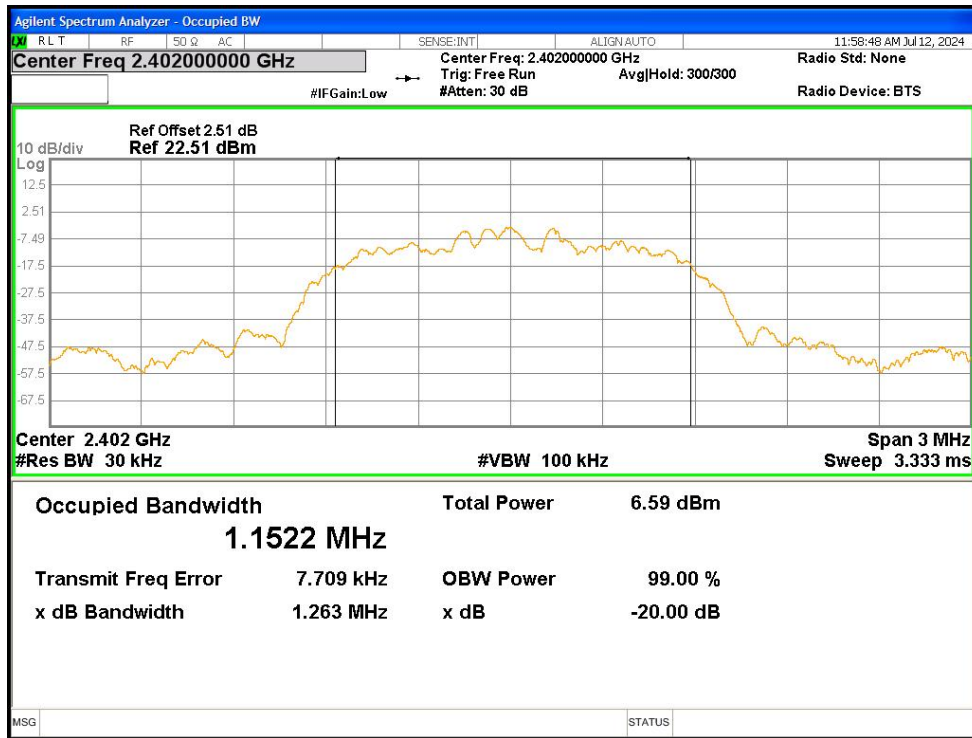


OBW NVNT 2-DH1 2402MHz Ant1



OBW NVNT 2-DH1 2441MHz Ant1

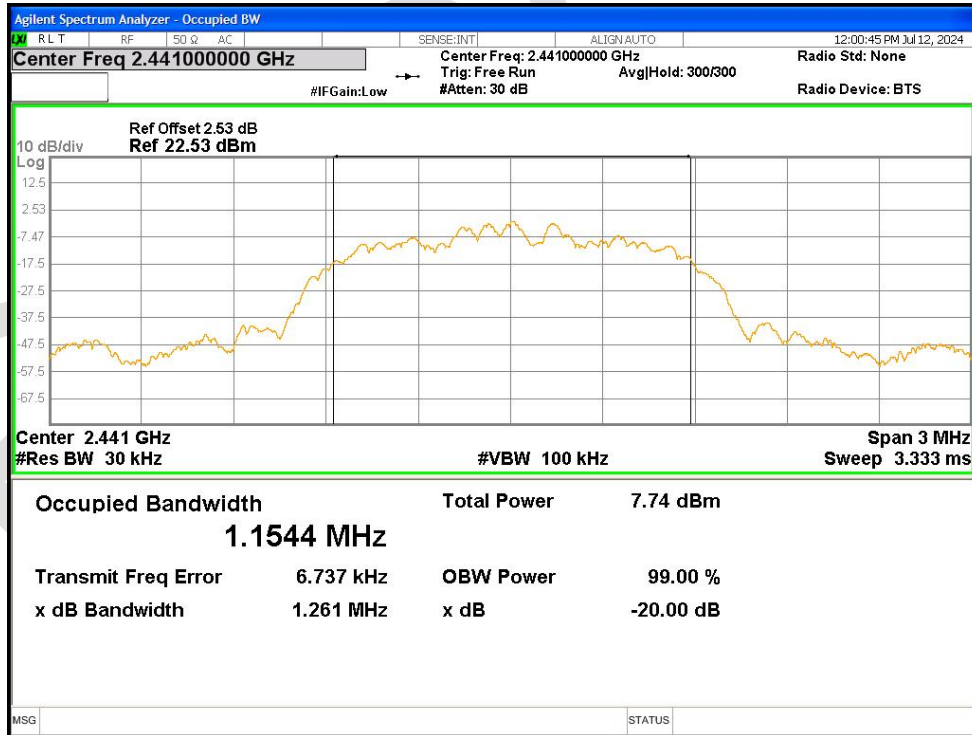



OBW NVNT 2-DH1 2480MHz Ant1

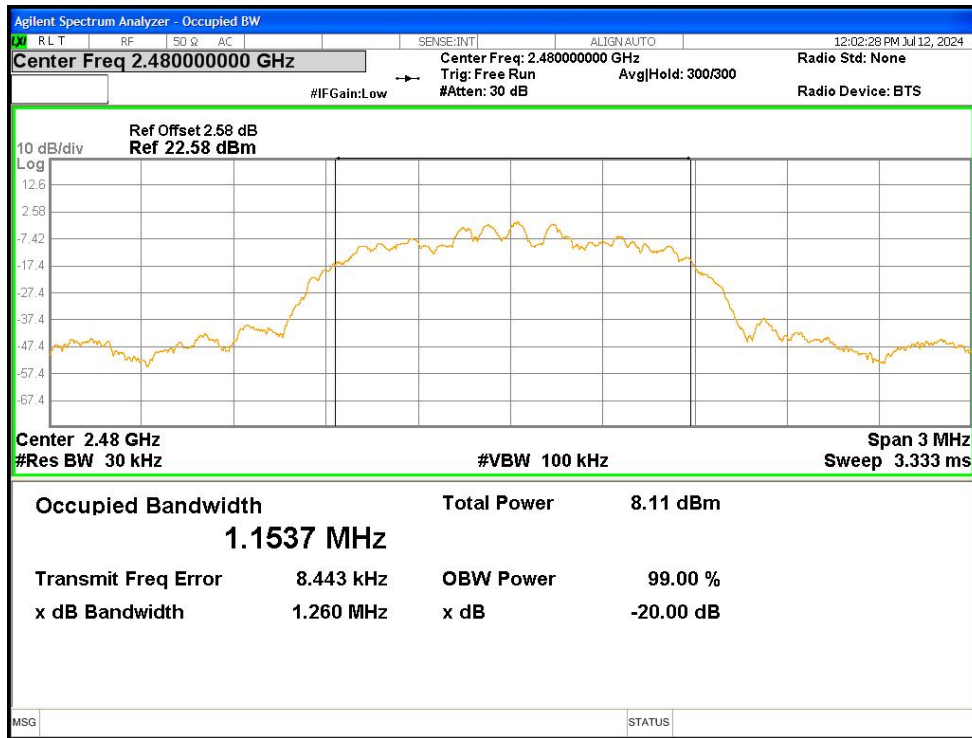

Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-54.15	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-55.45	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-54	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-55.26	-20	Pass

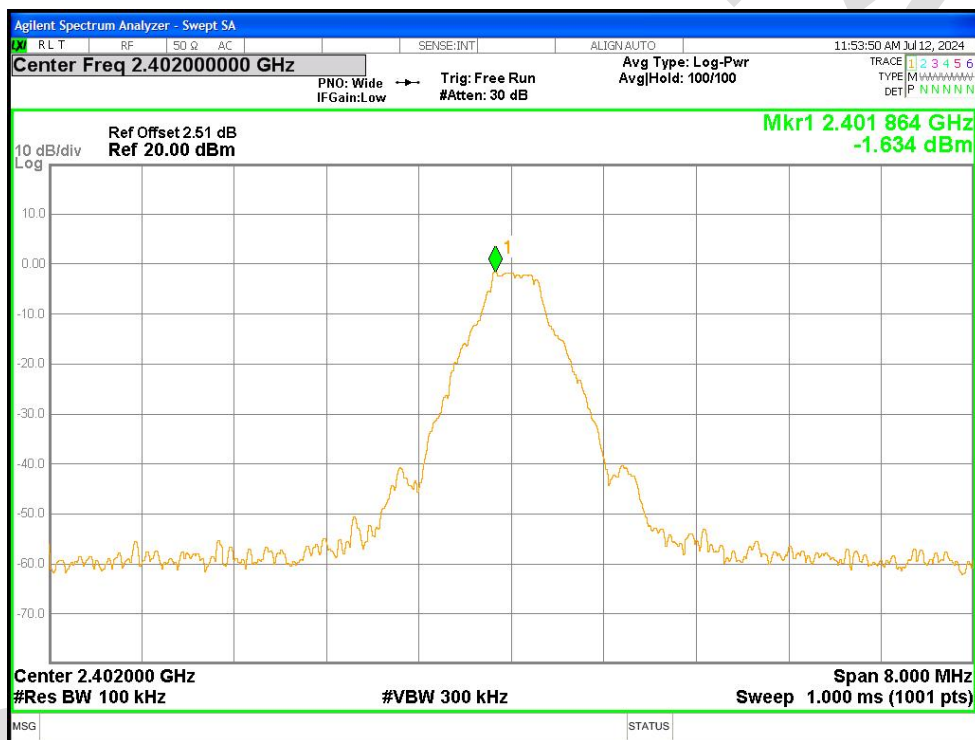
Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref

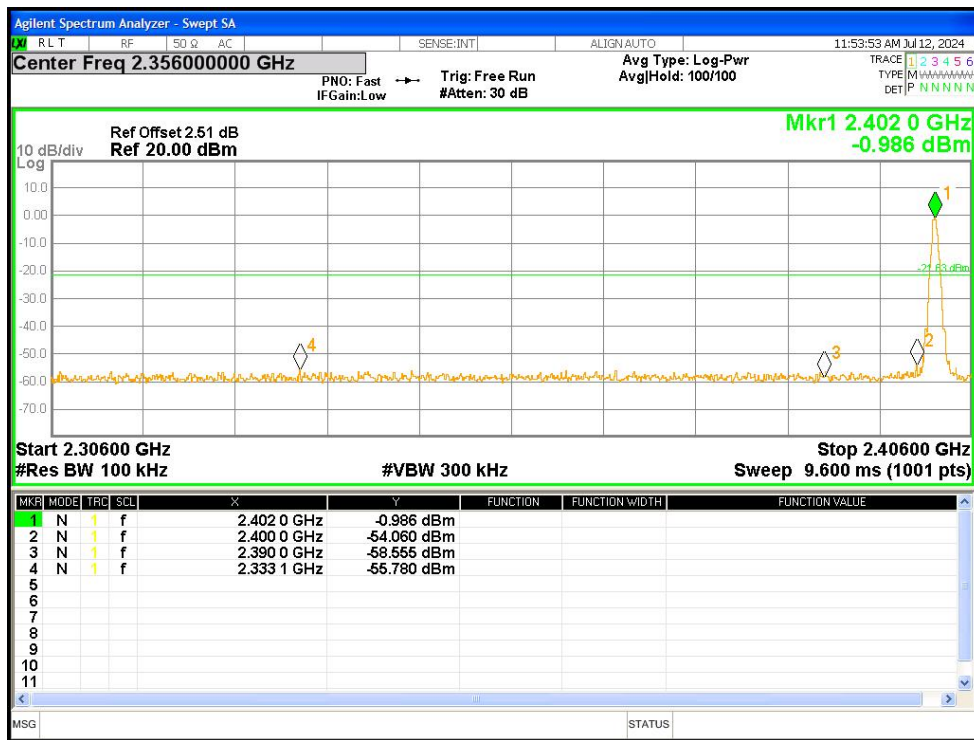Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission




Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref

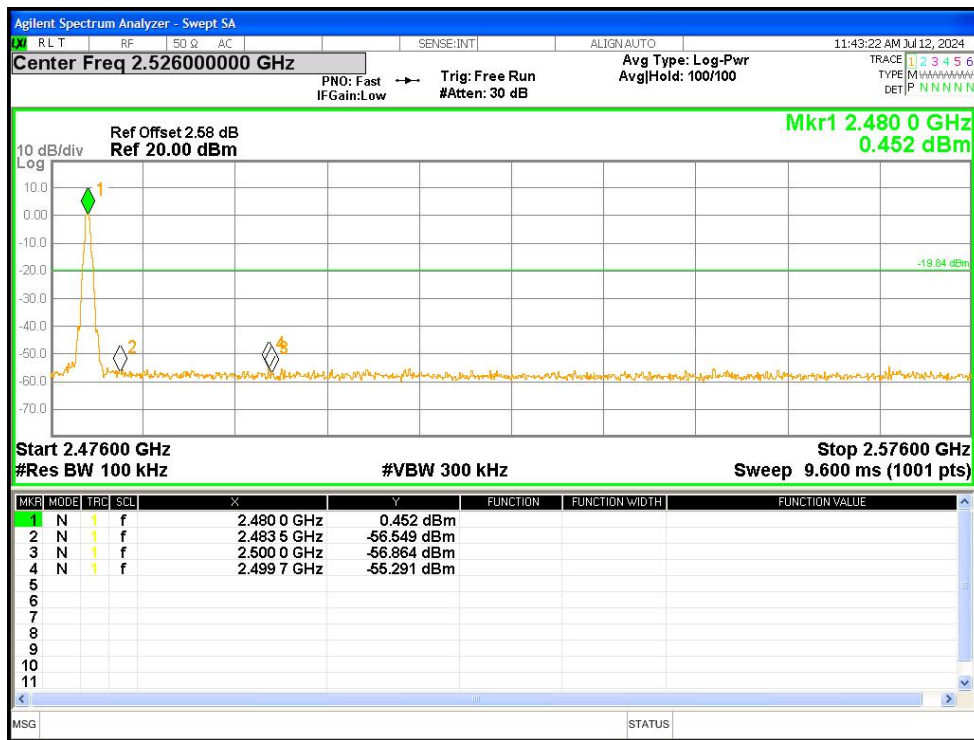


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission



Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref

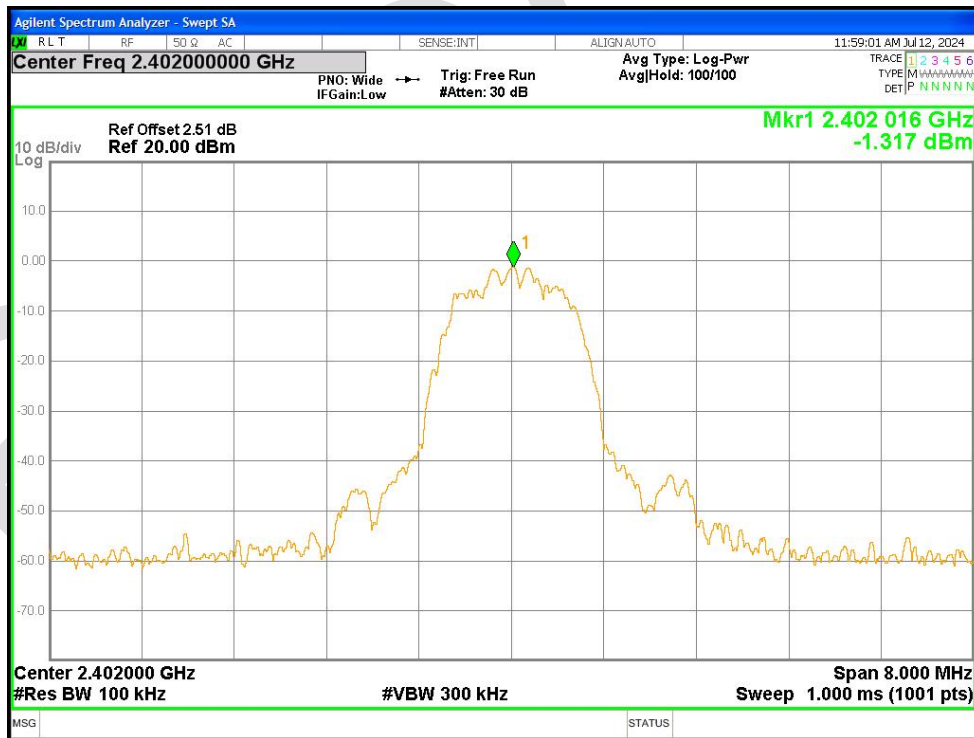


Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

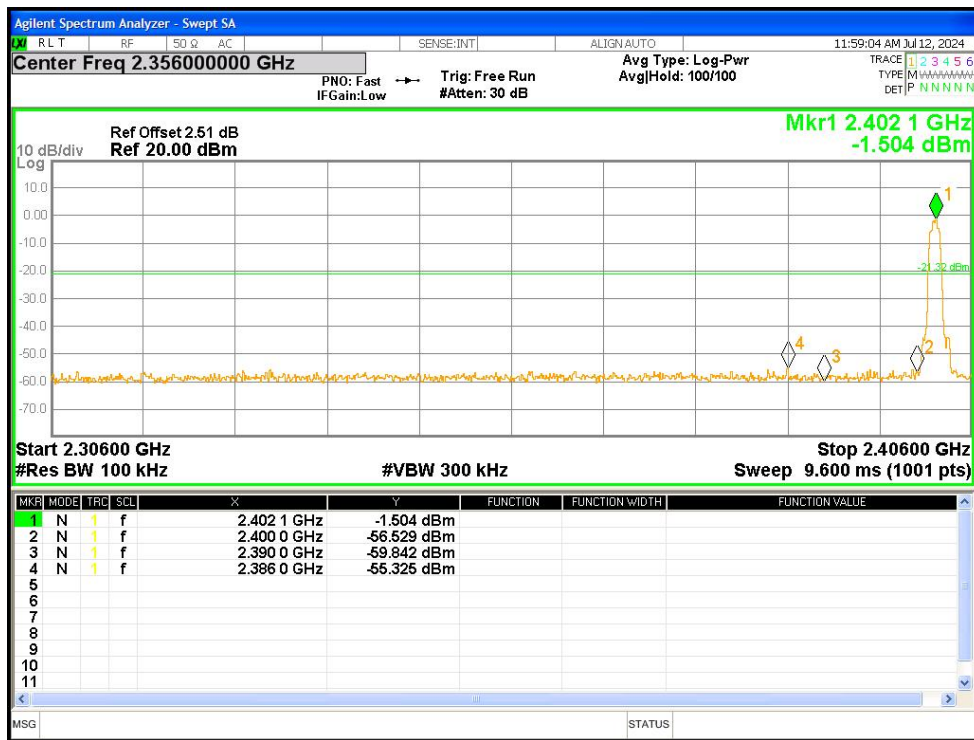

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref





Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

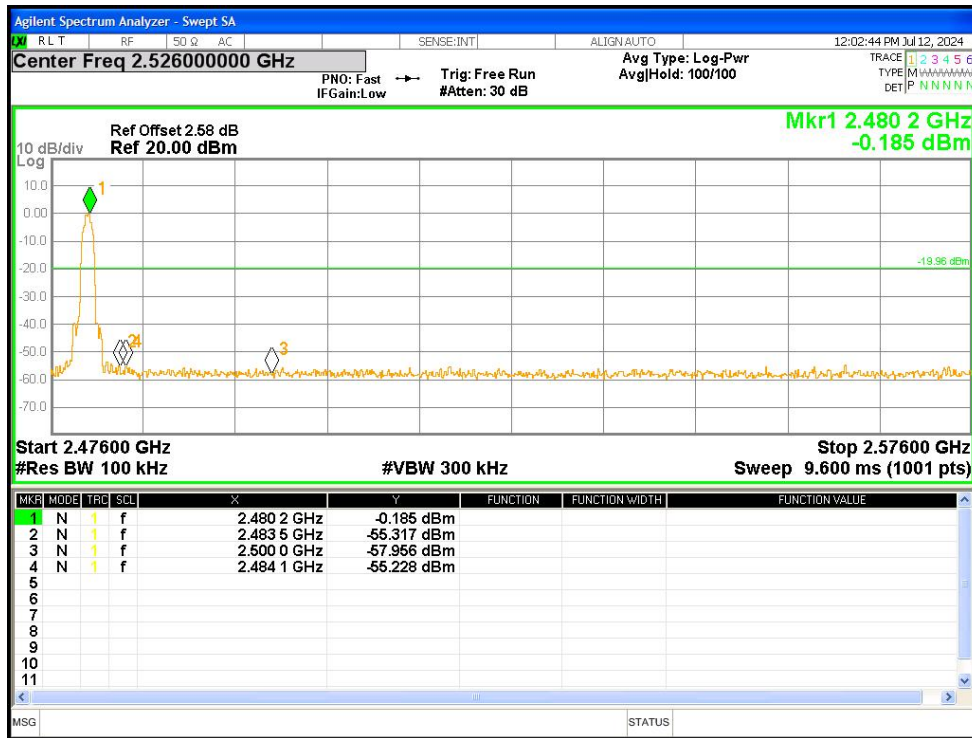

Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	Hopping	-53.76	-20	Pass
NVNT	1-DH1	2480	Ant1	Hopping	-54.8	-20	Pass
NVNT	2-DH1	2402	Ant1	Hopping	-52.98	-20	Pass
NVNT	2-DH1	2480	Ant1	Hopping	-54.72	-20	Pass

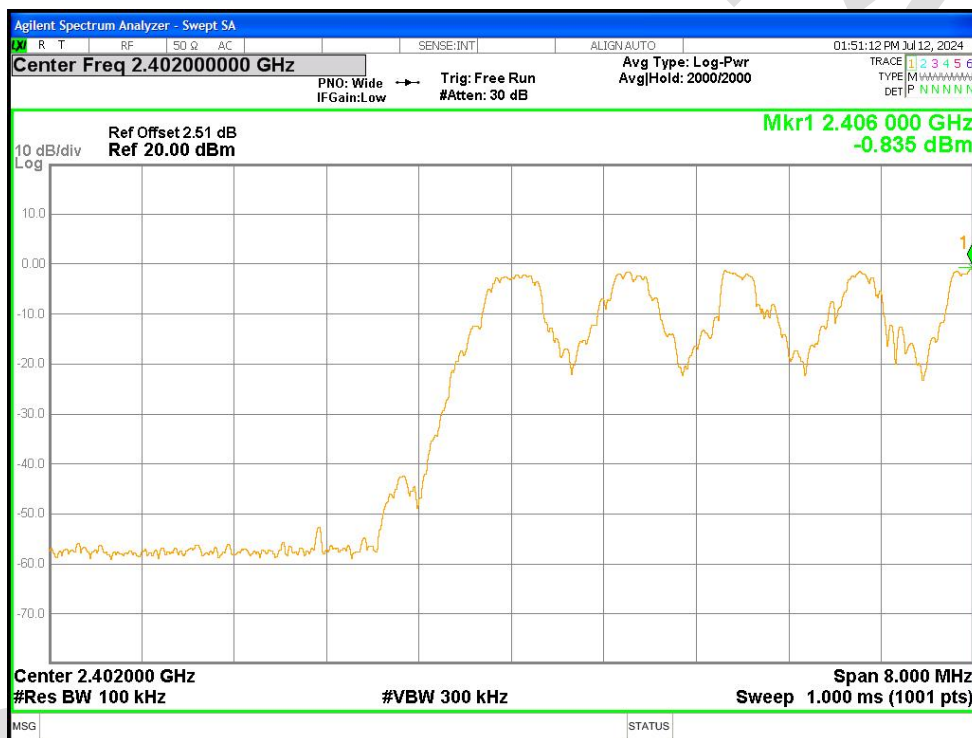
Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref

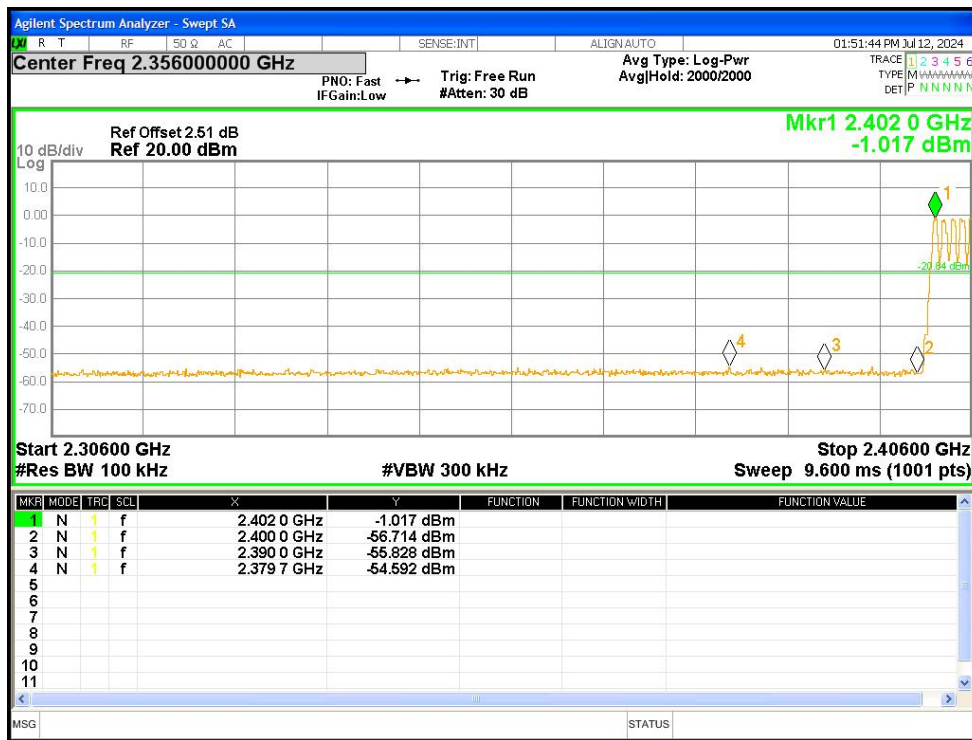Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission




Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Ref

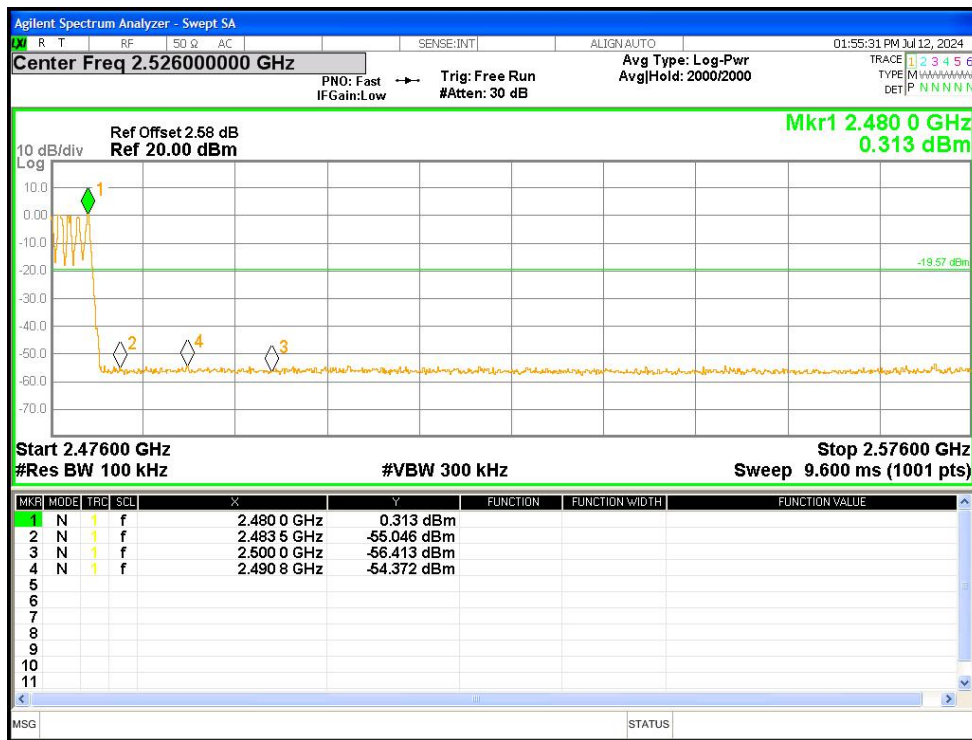

Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Emission



Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Ref

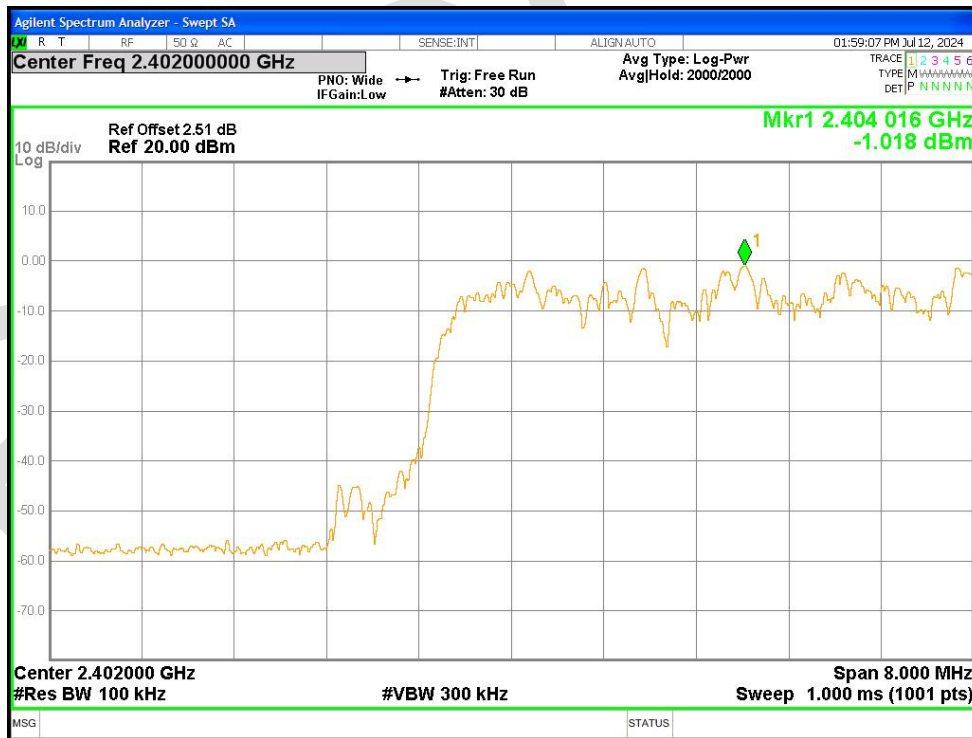

Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Emission