



FCC RF Test Report

APPLICANT : Veea Inc.
EQUIPMENT : Wireless Edge Server
BRAND NAME : VeeaHub
MODEL NAME : VHC25,VHC20
FCC ID : 2ARXK-VHC25
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jul. 29, 2024 ~ Jul. 31, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Test Software..... 6

 1.8 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 EUT Operation Test Setup 9

3 TEST RESULT 10

 3.1 Output Power Measurement..... 10

 3.2 Radiated Band Edges and Spurious Emission Measurement 13

 3.3 Antenna Requirements 17

4 LIST OF MEASURING EQUIPMENT 19

5 MEASUREMENT UNCERTAINTY 20

APPENDIX A. RADIATED SPURIOUS EMISSION

APPENDIX B. DUTY CYCLE PLOTS

APPENDIX C. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 9.31 dB at 2484.93 MHz
3.3	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Remark: This is a variant report, the change note could be referred to the Class II Permissive Change letter which is exhibit separately. According to the differences, only the related test cases were verified from original test report (Sporton Report Number FR172726AA).

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Veea Inc.
164 E 83rd Street, NEW YORK, United States 10028

1.2 Manufacturer

Veea Inc.
164 E 83rd Street, NEW YORK, United States 10028

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Edge Server
Brand Name	VeeaHub
Model Name	VHC25,VHC20
FCC ID	2ARXK-VHC25
SN Code	Conducted: C25DCW00000000006194 Radiation: C25DCW00000000006195
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The different model name is different for market purpose. We choice model name VHC25 for testing.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	<MIMO Ant.2+4> 802.11b : 24.20 dBm (0.2630 W) 802.11g : 29.88 dBm (0.9727 W) 802.11ax HE20 : 29.82 dBm (0.9594 W) 802.11ax HE40 : 29.85 dBm (0.9661 W)
Antenna Type / Gain	<Ant.2> : PIFA Antenna type with gain 2.2 dBi <Ant.4> : PIFA Antenna type with gain 1.8 dBi TX-Beamforming gain : 5.01 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to



- the higher normal output power.
- 2. 802.11b/g do not support TXBF mode.
- 3. 802.11ax mode only supports full RU for this device, so only the full RU is evaluated.
- 4. For 802.11n/11ac/11ax mode, the whole testing have assessed only 802.11ax HE20/HE40 by referring to the higher output power.
- 5. For CDD and Beamforming modes, the CDD mode is the worst case, thus only CDD mode was verified in this report by referring to the higher conducted power. The beamforming mode only evaluates the output power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-


2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0

2.3 Connection Diagram of Test System

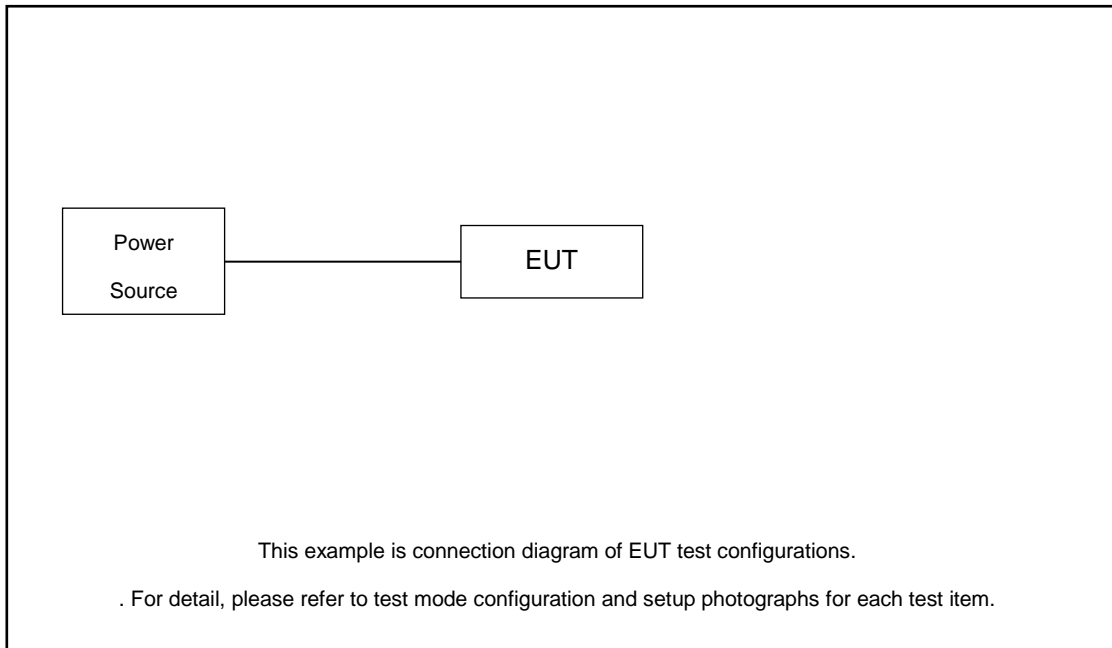

2.4 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.1.4 Test Setup

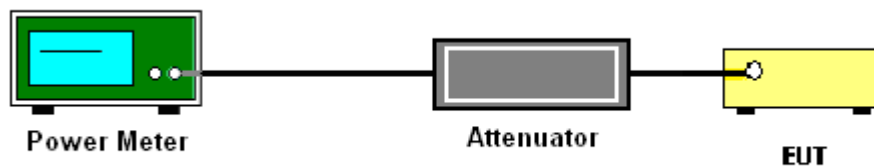



3.1.5 Test Result of Peak Output Power

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant2	Ant4	SUM	Ant2	Ant4	Ant2	Ant4	Ant2	Ant4	Ant2	Ant4	
11b	1Mbps	2	1	2412	20.79	20.68	23.75	30.00		2.20		25.95		36.00		Pass
11b	1Mbps	2	6	2437	21.34	21.04	24.20	30.00		2.20		26.40		36.00		Pass
11b	1Mbps	2	11	2462	21.07	20.60	23.85	30.00		2.20		26.05		36.00		Pass
11g	6Mbps	2	1	2412	26.82	26.92	29.88	30.00		2.20		32.08		36.00		Pass
11g	6Mbps	2	6	2437	27.10	26.63	29.88	30.00		2.20		32.08		36.00		Pass
11g	6Mbps	2	11	2462	26.80	26.32	29.58	30.00		2.20		31.78		36.00		Pass

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant2	Ant4	SUM	Ant2	Ant4	Ant2	Ant4	Ant2	Ant4	Ant2	Ant4	
HE20	MCS0	2	1	2412	Full	26.83	26.68	29.77	30.00		2.20		31.97		36.00		Pass
HE20	MCS0	2	6	2437	Full	26.80	26.75	29.79	30.00		2.20		31.99		36.00		Pass
HE20	MCS0	2	11	2462	Full	26.92	26.69	29.82	30.00		2.20		32.02		36.00		Pass
HE40	MCS0	2	3	2422	Full	26.85	26.53	29.70	30.00		2.20		31.90		36.00		Pass
HE40	MCS0	2	6	2437	Full	26.88	26.57	29.74	30.00		2.20		31.94		36.00		Pass
HE40	MCS0	2	9	2452	Full	26.89	26.78	29.85	30.00		2.20		32.05		36.00		Pass

For TX-Beamforming mode:

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant2	Ant4	SUM	Ant2	Ant4	Ant2	Ant4	Ant2	Ant4	Ant2	Ant4	
HE20	MCS0	2	1	2412	Full	21.80	21.67	24.75	30.00		5.01		29.76		36.00		Pass
HE20	MCS0	2	6	2437	Full	21.78	21.73	24.77	30.00		5.01		29.78		36.00		Pass
HE20	MCS0	2	11	2462	Full	21.90	21.66	24.79	30.00		5.01		29.80		36.00		Pass
HE40	MCS0	2	3	2422	Full	21.83	21.50	24.68	30.00		5.01		29.69		36.00		Pass
HE40	MCS0	2	6	2437	Full	21.85	21.55	24.71	30.00		5.01		29.73		36.00		Pass
HE40	MCS0	2	9	2452	Full	21.88	21.75	24.83	30.00		5.01		29.84		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.



3.1.6 Test Result of Average Output Power (Reporting Only)

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant2	Ant4	SUM	Ant2	Ant4	Ant2	Ant4	Ant2	Ant4	Ant2	Ant4	
11b	1Mbps	2	1	2412	19.20	19.10	22.16	30.00		2.20		24.36		36.00		Pass
11b	1Mbps	2	6	2437	19.70	19.40	22.56	30.00		2.20		24.76		36.00		Pass
11b	1Mbps	2	11	2462	19.40	19.00	22.21	30.00		2.20		24.41		36.00		Pass
11g	6Mbps	2	1	2412	19.70	19.60	22.66	30.00		2.20		24.86		36.00		Pass
11g	6Mbps	2	6	2437	19.60	19.50	22.56	30.00		2.20		24.76		36.00		Pass
11g	6Mbps	2	11	2462	19.50	19.10	22.31	30.00		2.20		24.51		36.00		Pass

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant2	Ant4	SUM	Ant2	Ant4	Ant2	Ant4	Ant2	Ant4	Ant2	Ant4	
HE20	MCS0	2	1	2412	Full	18.80	18.70	21.76	30.00		2.20		23.96		36.00		Pass
HE20	MCS0	2	6	2437	Full	18.70	18.50	21.61	30.00		2.20		23.81		36.00		Pass
HE20	MCS0	2	11	2462	Full	19.10	18.60	21.87	30.00		2.20		24.07		36.00		Pass
HE40	MCS0	2	3	2422	Full	18.90	18.70	21.81	30.00		2.20		24.01		36.00		Pass
HE40	MCS0	2	6	2437	Full	19.00	18.70	21.86	30.00		2.20		24.06		36.00		Pass
HE40	MCS0	2	9	2452	Full	19.10	18.80	21.96	30.00		2.20		24.16		36.00		Pass

For TX-Beamforming mode:

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant2	Ant4	SUM	Ant2	Ant4	Ant2	Ant4	Ant2	Ant4	Ant2	Ant4	
HE20	MCS0	2	1	2412	Full	15.70	15.60	18.66	30.00		5.01		23.67		36.00		Pass
HE20	MCS0	2	6	2437	Full	15.60	15.40	18.51	30.00		5.01		23.52		36.00		Pass
HE20	MCS0	2	11	2462	Full	16.00	15.50	18.77	30.00		5.01		23.78		36.00		Pass
HE40	MCS0	2	3	2422	Full	15.80	15.60	18.71	30.00		5.01		23.72		36.00		Pass
HE40	MCS0	2	6	2437	Full	15.90	15.60	18.76	30.00		5.01		23.78		36.00		Pass
HE40	MCS0	2	9	2452	Full	16.00	15.70	18.86	30.00		5.01		23.88		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup


For radiated emissions below 30MHz

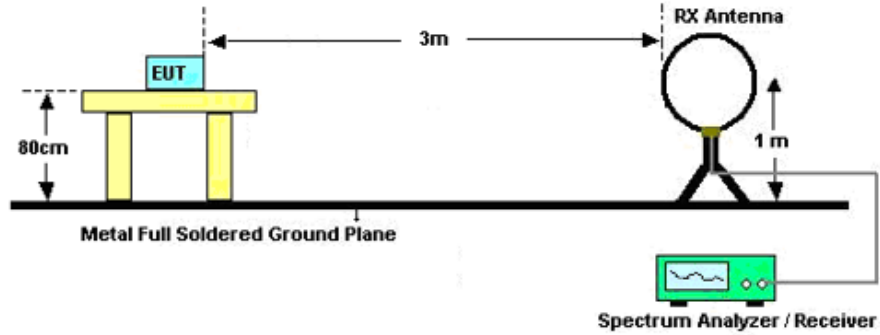

For radiated emissions from 30MHz to 1GHz

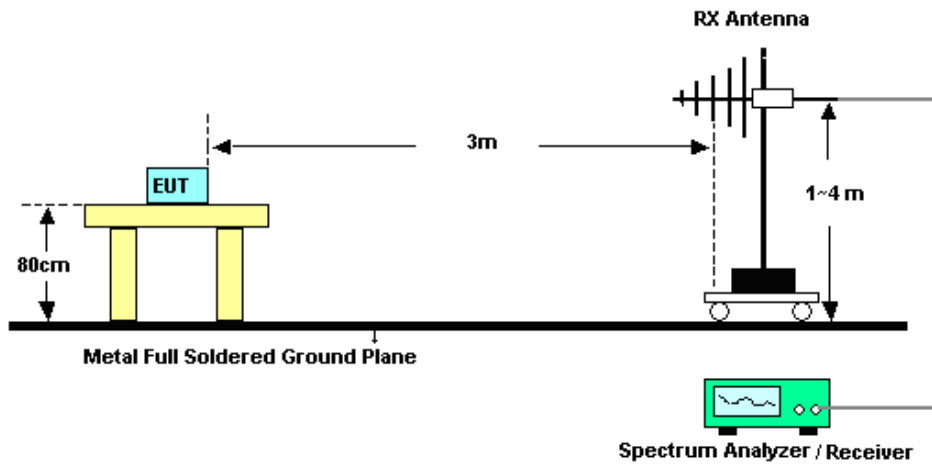

For radiated emissions above 1GHz

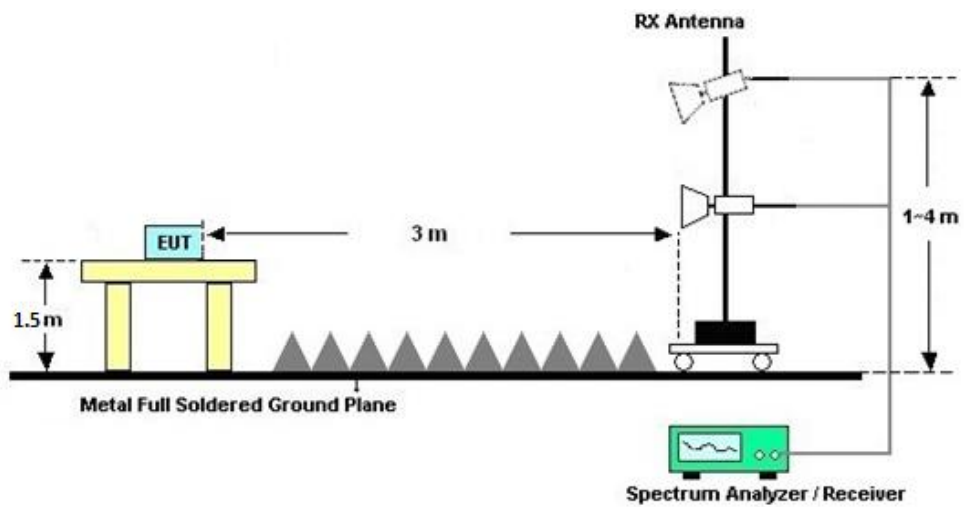



3.2.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.2.7 Duty Cycle

Please refer to Appendix B.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix A.



3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with

G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Ant. 2 (dBi)	Ant. 4 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
2.4 GHz	2.20	1.80	2.20	5.01	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$

TXBF modes

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The EUT supports beamforming for 802.11n/ac/ax modes.

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant 2	Ant 4	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4 GHz	2.20	1.80	5.01	5.01	0.00	0.00

$$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$$

$$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jul. 31, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Jul. 31, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Aug. 21, 2023	Jul. 31, 2024	Aug. 20, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Jul. 29, 2024~Jul. 30, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Jul. 29, 2024~Jul. 30, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 27, 2023	Jul. 29, 2024~Jul. 30, 2024	Jul. 26, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Jul. 29, 2024~Jul. 30, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Jul. 29, 2024~Jul. 30, 2024	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 09, 2024	Jul. 29, 2024~Jul. 30, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Jul. 29, 2024~Jul. 30, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Jul. 29, 2024~Jul. 30, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 18, 2023	Jul. 29, 2024~Jul. 30, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Jul. 29, 2024~Jul. 30, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 18, 2023	Jul. 29, 2024~Jul. 30, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jul. 29, 2024~Jul. 30, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jul. 29, 2024~Jul. 30, 2024	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required.



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---	-------

----- THE END -----



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Kuang Jia	Relative Humidity :	50%
		Temperature :	20-22°C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	CDD2+4	802.11ax HE40	09	2452	MCS0	-	-
Mode 2	2400-2483.5	CDD2+4	802.11ax HE40-LF	09	2452	MCS0	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11ax HE40	09	2484.93	44.69	54.00	-9.31	H	AVERAGE	Pass	Band Edge
	802.11ax HE40	09	7356.00	46.95	74.00	-27.05	H	Peak	Pass	Harmonic
2	802.11ax HE40-LF	09	127.00	32.99	43.50	-10.51	V	Peak	Pass	LF

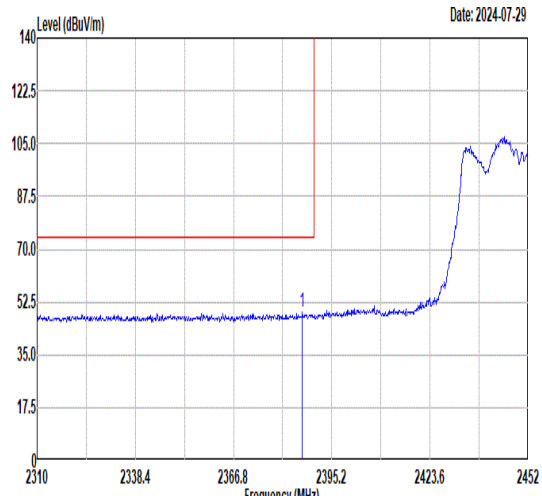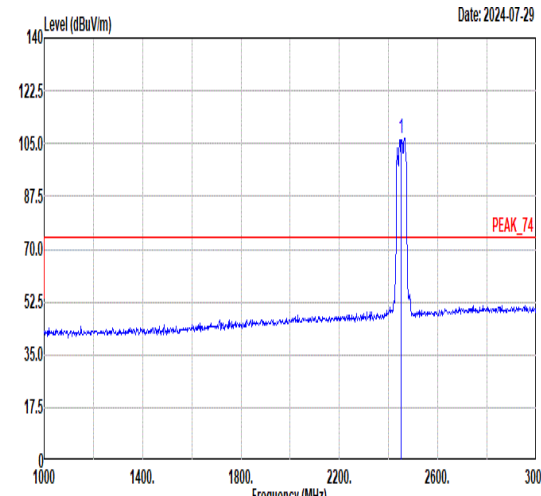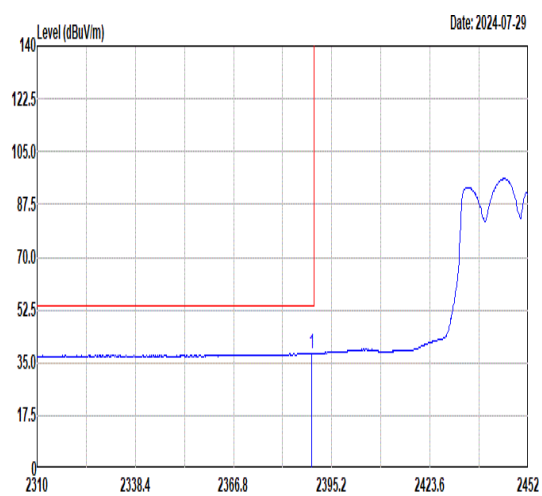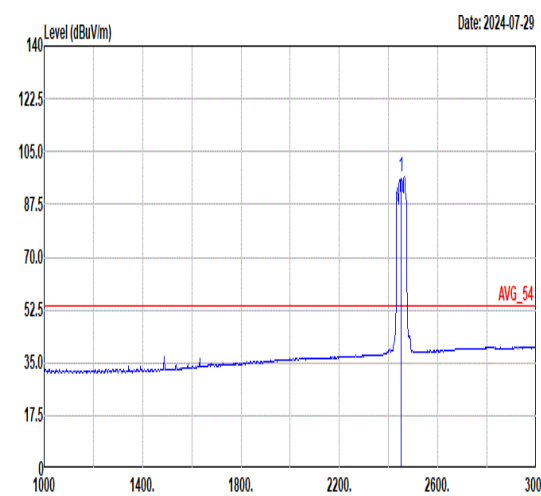

	1																																																																									
Mode	Band Edge - L																																																																									
	2400-2483.5_802.11ax HE40_CH09_2452MHz																																																																									
ANT	CDD2+4																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Date: 2024-07-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2386.68</td> <td>48.89</td> <td>74.00</td> <td>-25.11</td> <td>40.97</td> <td>32.25</td> <td>7.75</td> <td>32.08</td> <td>358</td> <td>159</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 2386.68	48.89	74.00	-25.11	40.97	32.25	7.75	32.08	358	159	PEAK	 <p>Date: 2024-07-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2452.00</td> <td>106.94</td> <td>-----</td> <td>-----</td> <td>98.74</td> <td>32.43</td> <td>7.86</td> <td>32.09</td> <td>358</td> <td>159</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 2452.00	106.94	-----	-----	98.74	32.43	7.86	32.09	358	159	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
1 2386.68	48.89	74.00	-25.11	40.97	32.25	7.75	32.08	358	159	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
1 2452.00	106.94	-----	-----	98.74	32.43	7.86	32.09	358	159	PEAK																																																																
Avg	 <p>Date: 2024-07-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.38</td> <td>38.21</td> <td>54.00</td> <td>-15.79</td> <td>30.27</td> <td>32.26</td> <td>7.76</td> <td>32.08</td> <td>358</td> <td>159</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 2389.38	38.21	54.00	-15.79	30.27	32.26	7.76	32.08	358	159	AVERAGE	 <p>Date: 2024-07-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2452.00</td> <td>96.70</td> <td>-----</td> <td>-----</td> <td>88.51</td> <td>32.42</td> <td>7.86</td> <td>32.09</td> <td>358</td> <td>159</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 2452.00	96.70	-----	-----	88.51	32.42	7.86	32.09	358	159	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
1 2389.38	38.21	54.00	-15.79	30.27	32.26	7.76	32.08	358	159	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
1 2452.00	96.70	-----	-----	88.51	32.42	7.86	32.09	358	159	AVERAGE																																																																



	1																																																				
Mode	Band Edge - R																																																				
	2400-2483.5_802.11ax HE40_CH09_2452MHz																																																				
ANT	CDD2+4																																																				
Pol.	Horizontal	Fundamental																																																			
Peak	<p style="text-align: right;">Date: 2024-07-29</p> <p style="text-align: right; color: red;">PEAK_BE_74</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.30</td> <td>57.90</td> <td>74.00</td> <td>-16.10</td> <td>49.65</td> <td>32.47</td> <td>7.88</td> <td>32.10</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>358</td> <td>159</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.30	57.90	74.00	-16.10	49.65	32.47	7.88	32.10								358	159									PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																														
1	2484.30	57.90	74.00	-16.10	49.65	32.47	7.88	32.10																																													
							358	159																																													
								PEAK																																													
Avg	<p style="text-align: right;">Date: 2024-07-29</p> <p style="text-align: right; color: red;">AVG_BE_54</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.93</td> <td>44.69</td> <td>54.00</td> <td>-9.31</td> <td>36.44</td> <td>32.47</td> <td>7.88</td> <td>32.10</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>358</td> <td>159</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.93	44.69	54.00	-9.31	36.44	32.47	7.88	32.10								358	159									AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																														
1	2484.93	44.69	54.00	-9.31	36.44	32.47	7.88	32.10																																													
							358	159																																													
								AVERAGE																																													



		1																																																																										
Mode	Band Edge - L																																																																											
	2400-2483.5_802.11ax HE40_CH09_2452MHz																																																																											
ANT	CDD2+4																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2369.78</td> <td>49.25</td> <td>74.00</td> <td>-24.75</td> <td>41.41</td> <td>32.21</td> <td>7.70</td> <td>32.07</td> <td>400</td> <td>246</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2369.78	49.25	74.00	-24.75	41.41	32.21	7.70	32.07	400	246	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>106.17</td> <td>-----</td> <td>-----</td> <td>98.01</td> <td>32.40</td> <td>7.85</td> <td>32.09</td> <td>400</td> <td>246</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2452.00	106.17	-----	-----	98.01	32.40	7.85	32.09	400	246	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2369.78	49.25	74.00	-24.75	41.41	32.21	7.70	32.07	400	246	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2452.00	106.17	-----	-----	98.01	32.40	7.85	32.09	400	246	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.80</td> <td>38.78</td> <td>54.00</td> <td>-15.22</td> <td>30.84</td> <td>32.26</td> <td>7.76</td> <td>32.08</td> <td>400</td> <td>246</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.80	38.78	54.00	-15.22	30.84	32.26	7.76	32.08	400	246	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>96.11</td> <td>-----</td> <td>-----</td> <td>87.94</td> <td>32.41</td> <td>7.85</td> <td>32.09</td> <td>400</td> <td>246</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2452.00	96.11	-----	-----	87.94	32.41	7.85	32.09	400	246	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2389.80	38.78	54.00	-15.22	30.84	32.26	7.76	32.08	400	246	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2452.00	96.11	-----	-----	87.94	32.41	7.85	32.09	400	246	AVERAGE																																																																	



	1																																												
Mode	Band Edge - R																																												
	2400-2483.5_802.11ax HE40_CH09_2452MHz																																												
ANT	CDD2+4																																												
Pol.	Vertical	Fundamental																																											
Peak																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.06</td> <td>55.80</td> <td>74.00</td> <td>-18.20</td> <td>47.56</td> <td>32.46</td> <td>7.88</td> <td>32.10</td> <td>400</td> <td>246</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	2484.06	55.80	74.00	-18.20	47.56	32.46	7.88	32.10	400	246
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	2484.06	55.80	74.00	-18.20	47.56	32.46	7.88	32.10	400	246	PEAK																																		
Avg																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.54</td> <td>43.94</td> <td>54.00</td> <td>-10.06</td> <td>35.70</td> <td>32.46</td> <td>7.88</td> <td>32.10</td> <td>400</td> <td>246</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	2483.54	43.94	54.00	-10.06	35.70	32.46	7.88	32.10	400	246
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	2483.54	43.94	54.00	-10.06	35.70	32.46	7.88	32.10	400	246	AVERAGE																																		



Mode	1																																																																																															
	Harmonic																																																																																															
	2400-2483.5_802.11ax HE40_CH09_2452MHz																																																																																															
ANT	CDD2+4																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<p style="text-align: right;">Date: 2024-07-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.00</td> <td>45.27</td> <td>74.00</td> <td>-28.73</td> <td>50.84</td> <td>34.86</td> <td>11.11</td> <td>51.54</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7356.00</td> <td>46.95</td> <td>74.00</td> <td>-27.05</td> <td>48.67</td> <td>36.34</td> <td>13.11</td> <td>51.17</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4904.00	45.27	74.00	-28.73	50.84	34.86	11.11	51.54	--	Peak	2	7356.00	46.95	74.00	-27.05	48.67	36.34	13.11	51.17	--	Peak	<p style="text-align: right;">Date: 2024-07-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4904.00</td> <td>45.52</td> <td>74.00</td> <td>-28.48</td> <td>51.09</td> <td>34.86</td> <td>11.11</td> <td>51.54</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7356.00</td> <td>46.39</td> <td>74.00</td> <td>-27.61</td> <td>48.11</td> <td>36.34</td> <td>13.11</td> <td>51.17</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4904.00	45.52	74.00	-28.48	51.09	34.86	11.11	51.54	--	Peak	2	7356.00	46.39	74.00	-27.61	48.11	36.34	13.11	51.17	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	4904.00	45.27	74.00	-28.73	50.84	34.86	11.11	51.54	--	Peak																																																																																						
2	7356.00	46.95	74.00	-27.05	48.67	36.34	13.11	51.17	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	4904.00	45.52	74.00	-28.48	51.09	34.86	11.11	51.54	--	Peak																																																																																						
2	7356.00	46.39	74.00	-27.61	48.11	36.34	13.11	51.17	--	Peak																																																																																						



Mode	2																																																																																																																																																																																																	
	LF																																																																																																																																																																																																	
	2400-2483.5_802.11ax HE40-LF_CH09_2452MHz																																																																																																																																																																																																	
ANT	CDD2+4																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
QP/ Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.97</td> <td>23.38</td> <td>40.00</td> <td>-16.62</td> <td>28.93</td> <td>24.62</td> <td>1.03</td> <td>31.20</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>122.15</td> <td>24.51</td> <td>43.50</td> <td>-18.99</td> <td>35.50</td> <td>18.16</td> <td>2.01</td> <td>31.16</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>191.99</td> <td>26.46</td> <td>43.50</td> <td>-17.04</td> <td>39.61</td> <td>15.26</td> <td>2.52</td> <td>30.93</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>431.58</td> <td>32.83</td> <td>46.00</td> <td>-13.17</td> <td>37.19</td> <td>22.60</td> <td>3.74</td> <td>30.70</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>527.61</td> <td>34.64</td> <td>46.00</td> <td>-11.36</td> <td>36.97</td> <td>24.41</td> <td>4.13</td> <td>30.87</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>815.70</td> <td>34.06</td> <td>46.00</td> <td>-11.94</td> <td>33.78</td> <td>26.23</td> <td>5.13</td> <td>31.08</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.97	23.38	40.00	-16.62	28.93	24.62	1.03	31.20	--	Peak	2	122.15	24.51	43.50	-18.99	35.50	18.16	2.01	31.16	--	Peak	3	191.99	26.46	43.50	-17.04	39.61	15.26	2.52	30.93	--	Peak	4	431.58	32.83	46.00	-13.17	37.19	22.60	3.74	30.70	--	Peak	5	527.61	34.64	46.00	-11.36	36.97	24.41	4.13	30.87	--	Peak	6	815.70	34.06	46.00	-11.94	33.78	26.23	5.13	31.08	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>43.58</td> <td>26.68</td> <td>40.00</td> <td>-13.32</td> <td>39.62</td> <td>17.04</td> <td>1.22</td> <td>31.20</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>127.00</td> <td>32.99</td> <td>43.50</td> <td>-10.51</td> <td>44.04</td> <td>18.06</td> <td>2.04</td> <td>31.15</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>527.61</td> <td>33.87</td> <td>46.00</td> <td>-12.13</td> <td>36.20</td> <td>24.41</td> <td>4.13</td> <td>30.87</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>623.64</td> <td>30.25</td> <td>46.00</td> <td>-15.75</td> <td>31.65</td> <td>25.04</td> <td>4.51</td> <td>30.95</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>815.70</td> <td>31.59</td> <td>46.00</td> <td>-14.41</td> <td>31.31</td> <td>26.23</td> <td>5.13</td> <td>31.08</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>949.56</td> <td>31.77</td> <td>46.00</td> <td>-14.23</td> <td>30.10</td> <td>27.10</td> <td>5.57</td> <td>31.00</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	43.58	26.68	40.00	-13.32	39.62	17.04	1.22	31.20	--	Peak	2	127.00	32.99	43.50	-10.51	44.04	18.06	2.04	31.15	--	Peak	3	527.61	33.87	46.00	-12.13	36.20	24.41	4.13	30.87	--	Peak	4	623.64	30.25	46.00	-15.75	31.65	25.04	4.51	30.95	--	Peak	5	815.70	31.59	46.00	-14.41	31.31	26.23	5.13	31.08	--	Peak	6	949.56	31.77	46.00	-14.23	30.10	27.10	5.57	31.00	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor			cm	deg																																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																									
1	30.97	23.38	40.00	-16.62	28.93	24.62	1.03	31.20	--	Peak																																																																																																																																																																																								
2	122.15	24.51	43.50	-18.99	35.50	18.16	2.01	31.16	--	Peak																																																																																																																																																																																								
3	191.99	26.46	43.50	-17.04	39.61	15.26	2.52	30.93	--	Peak																																																																																																																																																																																								
4	431.58	32.83	46.00	-13.17	37.19	22.60	3.74	30.70	--	Peak																																																																																																																																																																																								
5	527.61	34.64	46.00	-11.36	36.97	24.41	4.13	30.87	--	Peak																																																																																																																																																																																								
6	815.70	34.06	46.00	-11.94	33.78	26.23	5.13	31.08	--	Peak																																																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor			cm	deg																																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																									
1	43.58	26.68	40.00	-13.32	39.62	17.04	1.22	31.20	--	Peak																																																																																																																																																																																								
2	127.00	32.99	43.50	-10.51	44.04	18.06	2.04	31.15	--	Peak																																																																																																																																																																																								
3	527.61	33.87	46.00	-12.13	36.20	24.41	4.13	30.87	--	Peak																																																																																																																																																																																								
4	623.64	30.25	46.00	-15.75	31.65	25.04	4.51	30.95	--	Peak																																																																																																																																																																																								
5	815.70	31.59	46.00	-14.41	31.31	26.23	5.13	31.08	--	Peak																																																																																																																																																																																								
6	949.56	31.77	46.00	-14.23	30.10	27.10	5.57	31.00	--	Peak																																																																																																																																																																																								



Appendix B. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
2+4	802.11ax HE40	95.28	5.45	0.183	300Hz

802.11ax HE40

