



# FCC PART 24 TEST REPORT

## Part 24 Subpart E

**Report Reference No.:** HK1904300913-1E

**FCC ID:** 2AS92-GT-100

Compiled by  
( position+printed name+signature).. File administrators Gary Qian

Supervised by  
( position+printed name+signature).. Technique principal Eden Hu

Approved by  
( position+printed name+signature).. Manager Jason Zhou

Date of issue..... Apr. 30, 2019

**Testing Laboratory Name** ..... Shenzhen HUAKE Testing Technology Co., Ltd.

Address..... 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,Heping Community, Fuhai Street, Bao 'an District, Shenzhen, China

**Applicant's name** ..... Ablegrid Corp

Address..... 240 Goddard,Irvine CA 92618

**Test specification** .....

Standard ..... **FCC CFR Title 47 Part 2, Part 24E**  
**ASNI/TIA-603-E-2016**  
**KDB 971168 D01**

**Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd.takess no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** ..... gps tracker

Trade Mark ..... ablegrid

**Manufacturer** ..... Ablegrid Corp

Model/Type reference..... GT-100

Listed Models ..... GT-200, GT-300

Modulation Type ..... QPSK, 16QAM

LTE Band 2..... 1850-1910MHz

ANT Gain..... 3.20dBi

Rating ..... DC 3.8V From Battery and DC 5V from USB

Hardware version ..... HL321-V03

Software version ..... V1.0

**Result**.....: **PASS**

**TEST REPORT**

<b>Test Report No. :</b>	<b>HK1904300913-1E</b>	Apr. 30, 2019
		Date of issue

Equipment under Test : gps tracker

Model /Type : GT-100

Listed Models : GT-200, GT-300

Difference description : The EUT of GT-100,GT-200 and GT-300 have the same mainboard and antenna, Only appearance and battery capacity are different

**Applicant** : **Ablegrid Corp**

Address : 240 Goddard,Irvine CA 92618

**Manufacturer** : **Ablegrid Corp**

Address : 240 Goddard,Irvine CA 92618

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified page 4.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b><u>1</u></b>	<b><u>SUMMARY</u></b>	<b><u>4</u></b>
1.1	TEST STANDARDS	4
1.2	Test Description	4
1.3	Test Facility	5
1.3.1	Address of the test laboratory	5
1.4	Statement of the measurement uncertainty	5
<b><u>2</u></b>	<b><u>GENERAL INFORMATION</u></b>	<b><u>6</u></b>
2.1	General Remarks	6
2.2	Environmental conditions	6
2.3	Description of Test Modes	6
2.4	Equipments Used during the Test	7
2.5	Related Submittal(s) / Grant (s)	7
2.6	Modifications	7
<b><u>3</u></b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b><u>8</u></b>
3.1	Output Power	8
3.2	Peak-to-Average Ratio (PAR)	14
3.3	Occupied Bandwidth and Emission Bandwidth	21
3.4	Band Edge compliance	28
3.5	Spurious Emission	35
3.6	Frequency Stability under Temperature & Voltage Variations	58
<b><u>4</u></b>	<b><u>TEST SETUP PHOTOS OF THE EUT</u></b>	<b><u>60</u></b>
<b><u>5</u></b>	<b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u></b>	<b><u>61</u></b>

# 1 SUMMARY

## 1.1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 24](#) :PUBLIC MOBILE SERVICES

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

47 CFR FCC Part 15 Subpart B: - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[KDB971168 D01: v02r02](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

[ANSI C63.26-2015](#): IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

## 1.2 Test Description

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 24.232 (c)	Pass
Peak-to-Average Ratio	Part 24.232 (d)	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 24.238	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 24.238 (a)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 24.238 (a)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a)	Pass
Frequency stability	Part 2.1055 Part 24.235	Pass

### 1.3 Test Facility

#### 1.3.1 Address of the test laboratory

**Shenzhen HUAK Testing Technology Co., Ltd.**

1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street,  
Bao'an District, Shenzhen, China

#### 1.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen HUAK Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen HUAK Testing Technology Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## **2 GENERAL INFORMATION**

### **2.1 General Remarks**

Date of receipt of test sample	:	Apr.01, 2019
Testing commenced on	:	Apr.01, 2019
Testing concluded on	:	Apr.30, 2019

### **2.2 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25℃
Relative Humidity:	55 %
Air Pressure:	101 kPa

### **2.3 Description of Test Modes**

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note:

1. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst resulton this report.
2. Test method and refer to 3GPP TS136521.

## 2.4 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	ENV216	R&S	HKE-059	2018/12/27	2019/12/26
LISN	R&S	ENV216	HKE-002	2018/12/27	2019/12/26
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	2018/12/27	2019/12/26
Broadband antenna	Schwarzbeck	VULB 9163	HKE-097	2018/12/27	2019/12/26
Receiver	R&S	ESCI 7	HKE-010	2018/12/27	2019/12/26
Spectrum analyzer	Agilent	N9020A	HKE-048	2018/12/27	2019/12/26
RF automatic control unit	Tonscend	JS0806-2	HKE-060	2018/12/27	2019/12/26
Horn antenna	Schwarzbeck	9120D	HKE-013	2018/12/27	2019/12/26
Horn antenna	Schwarzbeck	9120D	HKE-098	2018/12/27	2019/12/26
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	2018/12/27	2019/12/26
Preamplifier	EMCI	EMC051845SE	HKE-015	2018/12/27	2019/12/26
Preamplifier	Agilent	83051A	HKE-016	2018/12/27	2019/12/26
Temperature and humidity meter	Boyang	HTC-1	HKE-075	2018/12/27	2019/12/26
High pass filter unit	Tonscend	JS0806-F	HKE-055	2018/12/27	2019/12/26
RF cable	Times	1-40G	HKE-034	2018/12/27	2019/12/26
Power meter	Agilent	E4419B	HKE-085	2018/12/27	2019/12/26
Power Sensor	Agilent	E9300A	HKE-086	2018/12/27	2019/12/26
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	HKE-094	2016/03/01	2020/02/28
Horn Ant (18G-40GHz)	ETS	QWH_SL_18_40_K _SG	HKE-092	2016/03/01	2020/02/28
Wireless Communication Test Set	R&S	CMU200	HKE-026	2018/12/28	2019/12/27
Wireless communication test CMW500	R&S	120909	/	2018/07/12	2019/07/11

## 2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AS92-GT-100 filing to comply with of the FCC Part 24 Rules.

## 2.6 Modifications

No modifications were implemented to meet testing criteria.



### 3 TEST CONDITIONS AND RESULTS

#### 3.1 Output Power

##### LIMIT

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p.

##### TEST CONFIGURATION

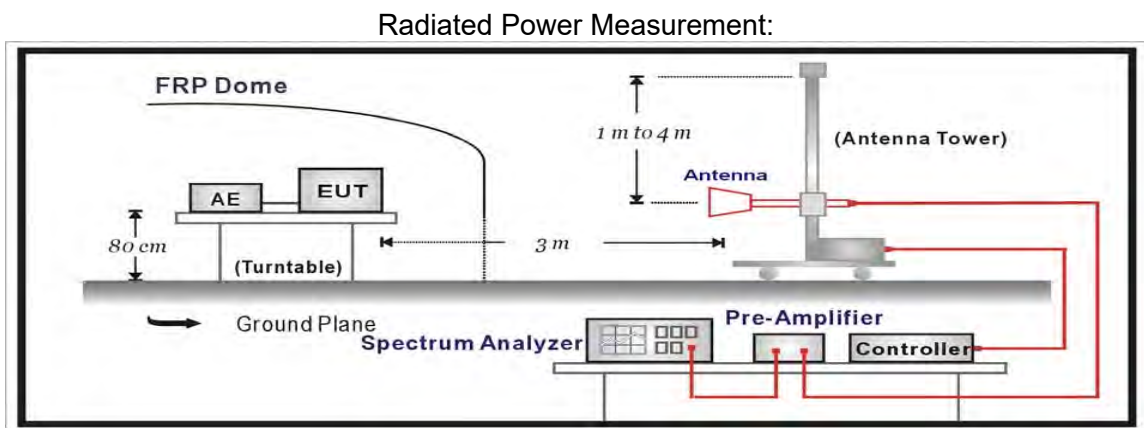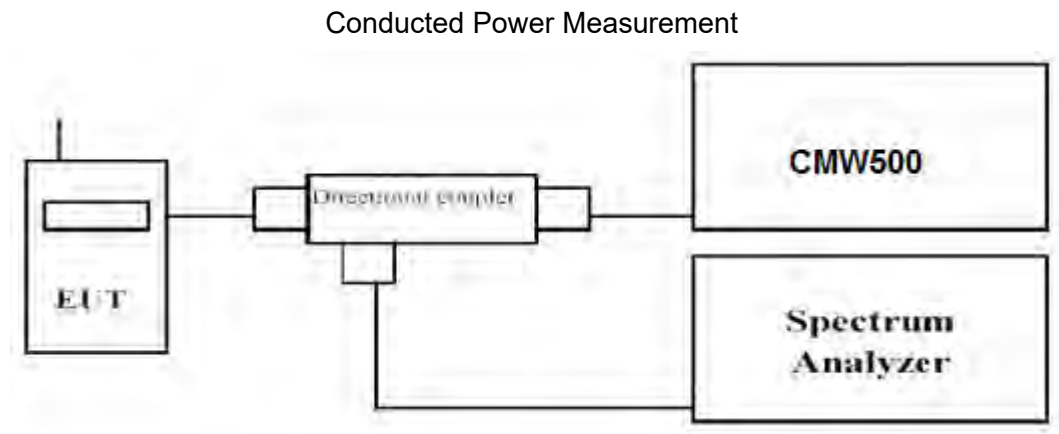

##### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

##### **Conducted Power Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

##### **Radiated Power Measurement:**

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.



- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4.

## TEST RESULTS

### Conducted Measurement:

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1850.7	1 RB low	23.33	22.54
		1 RB Mid	23.39	22.28
		1 RB high	23.23	22.31
		50% RB Low	23.2	22.3
		50% RB mid	23.1	22.13
		50% RB high	23.13	22.14
		100% RB	22.14	21.12
	1880.0	1 RB low	23.46	22.5
		1 RB Mid	23.53	22.57
		1 RB high	23.43	22.53
		50% RB Low	23.38	22.33
		50% RB mid	23.34	22.33
		50% RB high	23.49	22.37
		100% RB	22.39	21.34
	1909.3	1 RB low	23.26	22.16
		1 RB Mid	23.31	22.31
		1 RB high	23.25	22.1
		50% RB Low	23.13	22.12
		50% RB mid	23.11	22.01
		50% RB high	23.02	22.09
		100% RB	22.06	21.01
3 MHz	1851.5	1 RB low	23.23	22.1
		1 RB Mid	23.91	22.19
		1 RB high	23.97	22.11
		50% RB Low	23.23	22.14
		50% RB mid	23.14	22.13
		50% RB high	22.8	22.79
		100% RB	22.14	21.18
	1880.0	1 RB low	23.42	22.14
		1 RB Mid	23.41	22.37
		1 RB high	23.3	22.06
		50% RB Low	23.12	22.12
		50% RB mid	23.19	22.36
		50% RB high	23.19	22.09
		100% RB	22.32	21.4
1908.5	1 RB low	23.19	22.92	
	1 RB Mid	23.17	22.06	

		1 RB high	23.1	22.01
		50% RB Low	22.88	22.9
		50% RB mid	22.98	22.14
		50% RB high	22.95	22.03
		100% RB	22.15	20.72
5 MHz	1852.5	1 RB low	23.21	22.45
		1 RB Mid	23.95	22.07
		1 RB high	23.91	22.41
		50% RB Low	23.07	22.06
		50% RB mid	23.05	22.04
		50% RB high	23	22
	1880.0	100% RB	22.01	21.02
		1 RB low	23.22	22.43
		1 RB Mid	23.43	22.66
		1 RB high	23.26	22.6
		50% RB Low	23.26	22.26
		50% RB mid	23.26	22.26
	1907.5	50% RB high	23.35	22.35
		100% RB	22.29	21.35
		1 RB low	23.23	22.78
		1 RB Mid	23.11	22.86
		1 RB high	23.06	22.84
		50% RB Low	23.03	22.01
10 MHz	1855.0	50% RB mid	23	22.1
		50% RB high	23.15	22.15
		100% RB	22.08	21.22
		1 RB low	23.47	22.35
		1 RB Mid	23.43	22.2
		1 RB high	23.22	22.19
	1880.0	50% RB Low	22.16	22.13
		50% RB mid	22.1	22.17
		50% RB high	21.96	21.94
		100% RB	22.05	21.14
		1 RB low	23.75	22.95
		1 RB Mid	23.81	22.96
	1905.0	1 RB high	23.56	22.8
		50% RB Low	22.89	22.86
		50% RB mid	22.84	22.88
		50% RB high	22.63	22.63
		100% RB	22.75	21.77
		1 RB low	23.75	22.96
15 MHz	1857.5	1 RB Mid	23.97	22.18
		1 RB high	23.94	22.58
		50% RB Low	22.8	22.91
		50% RB mid	22.76	22.66
		50% RB high	22.38	22.43
		100% RB	22.49	21.44
	1880.0	1 RB low	23.62	22.85
		1 RB Mid	23.71	22.83
		1 RB high	23.45	22.67
		50% RB Low	22.87	22.87
		50% RB mid	22.88	22.88
		50% RB high	22.66	22.67
	1902.5	100% RB	22.81	21.76
		1 RB low	23.39	22.31
		1 RB Mid	23.32	22.16
		1 RB high	23.12	21.95
		50% RB Low	22.27	22.25
		50% RB mid	22.18	22.18
		50% RB high	21.99	21.99
		100% RB	22.41	21.34
		1 RB low	23.21	22.37
		1 RB Mid	23.44	22.56

		1 RB high	23.45	22.52
		50% RB Low	22.35	22.37
		50% RB mid	22.6	22.59
		50% RB high	22.53	22.57
		100% RB	22.55	21.42
20 MHz	1860.0	1 RB low	23.56	22.62
		1 RB Mid	23.83	22.86
		1 RB high	23.32	22.42
		50% RB Low	22.68	22.65
		50% RB mid	22.65	22.69
		50% RB high	22.67	22.64
		100% RB	22.69	21.61
	1880.0	1 RB low	23.18	22.26
		1 RB Mid	23.31	22.37
		1 RB high	22.85	21.9
		50% RB Low	22.53	22.52
		50% RB mid	22.56	22.54
		50% RB high	22.15	22.17
		100% RB	22.38	21.37
	1900.0	1 RB low	23.13	22.14
		1 RB Mid	23.55	22.64
		1 RB high	23.42	22.35
		50% RB Low	22.33	22.32
		50% RB mid	22.36	22.35
		50% RB high	22.29	22.31
		100% RB	22.3	21.22

**Radiated Measurement:****Remark:**

1. We were tested all RB Configuration for the model GT-100 and GT-200 and GT-300, the Mode refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2 at the H Polarization for GT-100
2.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$

**LTE FDD Band 2\_Channel Bandwidth 1.4MHz\_QPSK 100%RB#0**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-20.87	3.41	10.24	33.60	19.56	33.01	13.45	H
1880.0	-19.94	3.49	10.24	33.60	20.41	33.01	12.60	H
1909.3	-19.79	3.55	10.23	33.60	20.49	33.01	12.52	H

**LTE FDD Band 2\_Channel Bandwidth 3MHz\_QPSK 100%RB#0**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-20.65	3.41	10.24	33.60	19.78	33.01	13.23	H
1880.0	-19.59	3.49	10.24	33.60	20.76	33.01	12.25	H
1908.5	-19.24	3.55	10.23	33.60	21.04	33.01	11.97	H

**LTE FDD Band 2\_Channel Bandwidth 5MHz\_QPSK 100%RB#0**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-20.45	3.41	10.24	33.60	19.98	33.01	13.03	H
1880.0	-19.08	3.49	10.24	33.60	21.27	33.01	11.74	H
1907.5	-18.9	3.55	10.23	33.60	21.38	33.01	11.63	H

**LTE FDD Band 2\_Channel Bandwidth 10MHz\_QPSK 100%RB#0**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-20.62	3.41	10.24	33.60	19.81	33.01	13.20	H
1880.0	-19.45	3.49	10.24	33.60	20.9	33.01	12.11	H
1905.0	-19.16	3.55	10.23	33.60	21.12	33.01	11.89	H

**LTE FDD Band 2\_Channel Bandwidth 15MHz\_QPSK 100%RB#0**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-21.05	3.41	10.24	33.60	19.38	33.01	13.63	H
1880.0	-20.30	3.49	10.24	33.60	20.05	33.01	12.96	H
1902.5	-19.69	3.55	10.23	33.60	20.59	33.01	12.42	H

**LTE FDD Band 2\_Channel Bandwidth 20MHz\_QPSK 100%RB#0**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-21.24	3.41	10.24	33.60	19.19	33.01	13.82	H
1880.0	-20.67	3.49	10.24	33.60	19.68	33.01	13.33	H
1900.0	-20.10	3.55	10.23	33.60	20.18	33.01	12.83	H

**LTE FDD Band 2\_Channel Bandwidth 1.4MHz\_16QAM 100%RB#0**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-22.48	3.41	10.24	33.60	17.95	33.01	15.06	H
1880.0	-21.78	3.49	10.24	33.60	18.57	33.01	14.44	H
1909.3	-21.13	3.55	10.23	33.60	19.15	33.01	13.86	H

*LTE FDD Band 2\_Channel Bandwidth 3MHz\_16QAM 100%RB#0*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-22.96	3.41	10.24	33.60	17.47	33.01	15.54	H
1880.0	-21.70	3.49	10.24	33.60	18.65	33.01	14.36	H
1908.5	-21.44	3.55	10.23	33.60	18.84	33.01	14.17	H

*LTE FDD Band 2\_Channel Bandwidth 5MHz\_16QAM 100%RB#0*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-22.75	3.41	10.24	33.60	17.68	33.01	15.33	H
1880.0	-21.49	3.49	10.24	33.60	18.86	33.01	14.15	H
1907.5	-21.19	3.55	10.23	33.60	19.09	33.01	13.92	H

*LTE FDD Band 2\_Channel Bandwidth 10MHz\_16QAM 100%RB#0*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-22.81	3.41	10.24	33.60	17.62	33.01	15.39	H
1880.0	-21.68	3.49	10.24	33.60	18.67	33.01	14.34	H
1905.0	-21.26	3.55	10.23	33.60	19.02	33.01	13.99	H

*LTE FDD Band 2\_Channel Bandwidth 15MHz\_16QAM 100%RB#0*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-22.97	3.41	10.24	33.60	17.46	33.01	15.55	H
1880.0	-21.99	3.49	10.24	33.60	18.36	33.01	14.65	H
1902.5	-21.48	3.55	10.23	33.60	18.80	33.01	14.21	H

*LTE FDD Band 2\_Channel Bandwidth 20MHz\_16QAM 100%RB#0*


Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-23.38	3.41	10.24	33.60	17.05	33.01	15.96	H
1880.0	-22.58	3.49	10.24	33.60	17.77	33.01	15.24	H
1900.0	-22.21	3.55	10.23	33.60	18.07	33.01	14.94	H

## 3.2 Peak-to-Average Ratio (PAR)

### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

### TEST CONFIGURATION

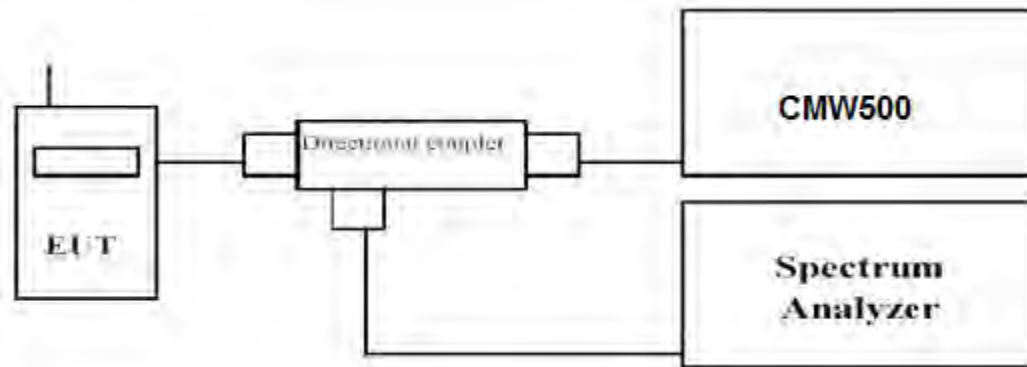

### TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms,
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

### TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2 at 1RB#0 for GT-100

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
1.4 MHz	1850.7	1RB#0	4.23	5.16
	1880.0		4.26	5.20
	1909.3		4.71	5.00
3 MHz	1851.5	1RB#0	4.27	5.18
	1880.0		4.27	5.19
	1908.5		4.32	5.13
5 MHz	1852.5	1RB#0	4.26	5.19
	1880.0		4.31	5.11
	1907.5		4.34	5.20
10 MHz	1855.0	1RB#0	4.45	5.28
	1880.0		4.27	5.08
	1905.0		3.88	4.86
15 MHz	1857.5	1RB#0	4.40	5.33
	1880.0		4.22	4.96
	1902.5		3.86	4.82
20 MHz	1860.0	1RB#0	4.42	5.12
	1880.0		4.21	5.32
	1900.0		4.44	5.16

LTE FDD Band 2-1.4MHz Channel Bandwidth PAPR

QPSK

16QAM

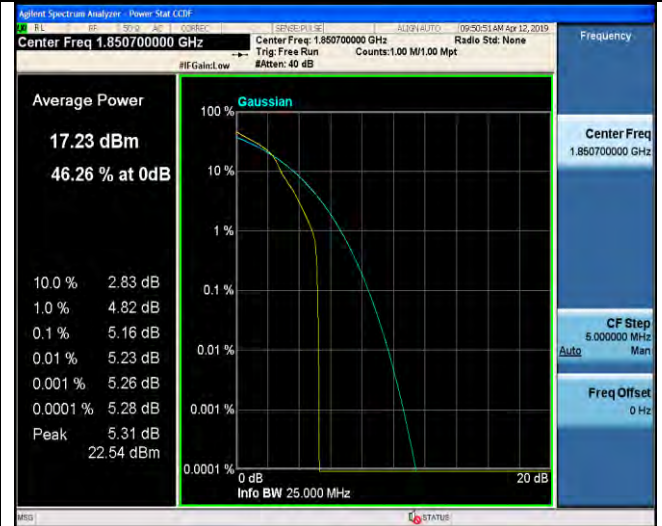

1RB#0

1RB#0


Low Channel



1RB#0

1RB#0

Middle Channel

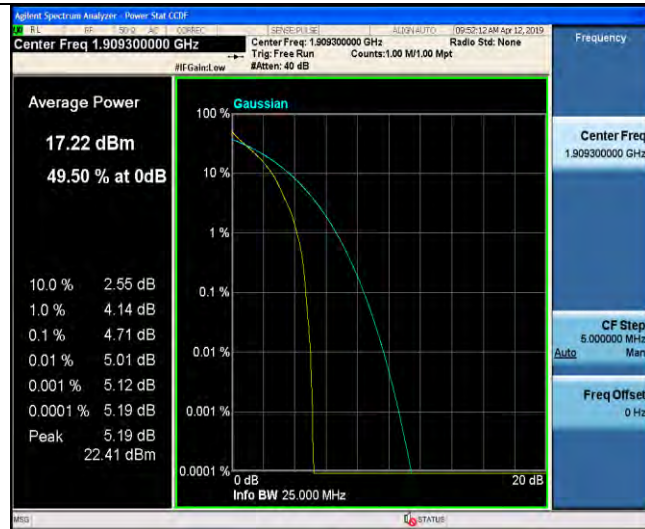

1RB#0


1RB#0

High Channel

LTE FDD Band 2-3MHz Channel Bandwidth PAPR

QPSK

16QAM

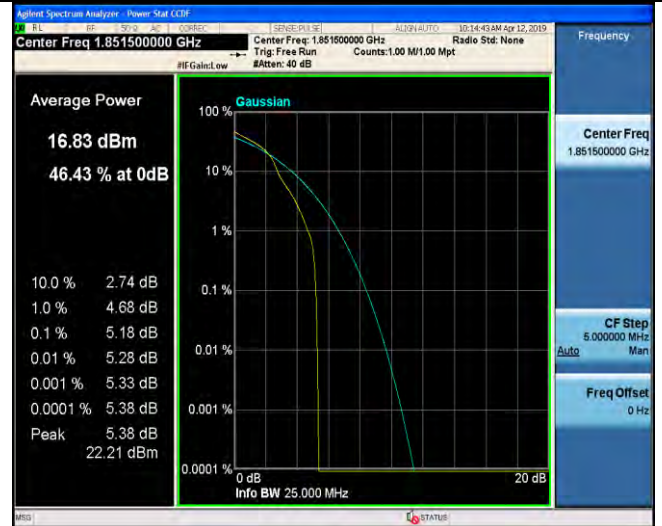

1RB#0

1RB#0

Low Channel



1RB#0

1RB#0

Middle Channel



1RB#0

1RB#0


High Channel



LTE FDD Band 2-5MHz Channel Bandwidth PAPR

QPSK

16QAM

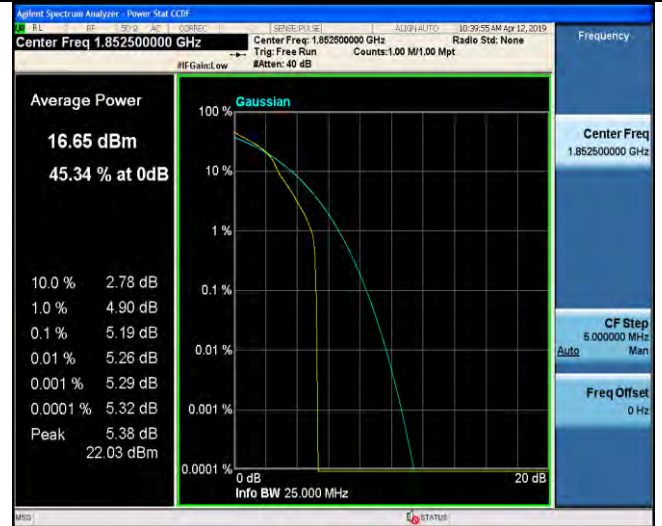

1RB#0

1RB#0

Low Channel



1RB#0

1RB#0

Middle Channel



1RB#0


1RB#0

High Channel

LTE FDD Band 2-10MHz Channel Bandwidth PAPR

QPSK

16QAM

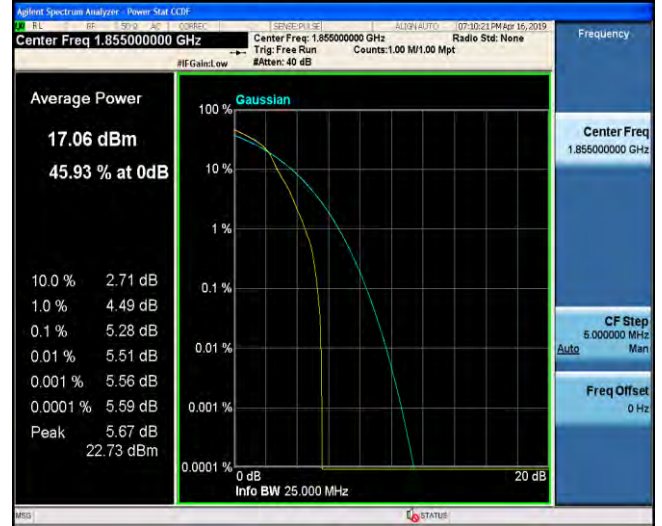

1RB#0

1RB#0


Low Channel



1RB#0

1RB#0

Middle Channel

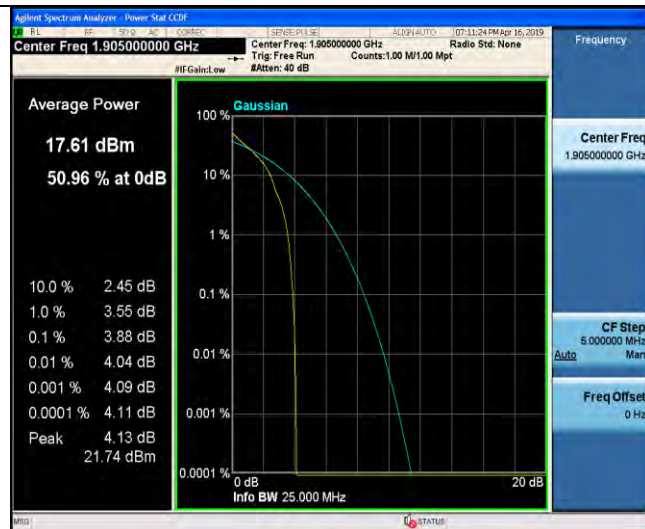

1RB#0



1RB#0

High Channel

LTE FDD Band 2-15MHz Channel Bandwidth PAPR

QPSK

16QAM

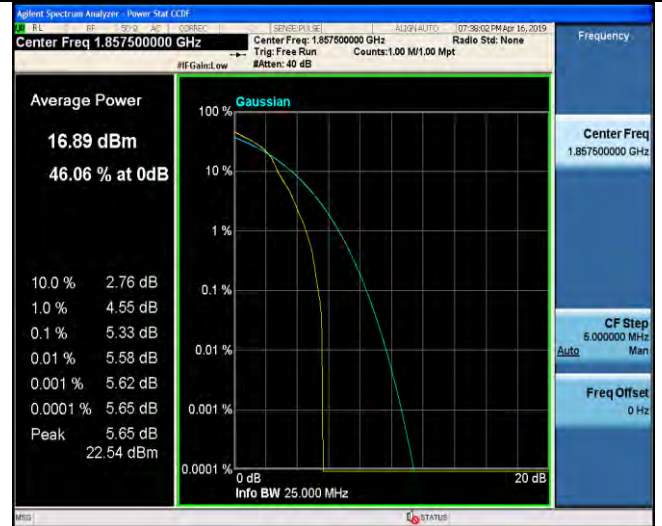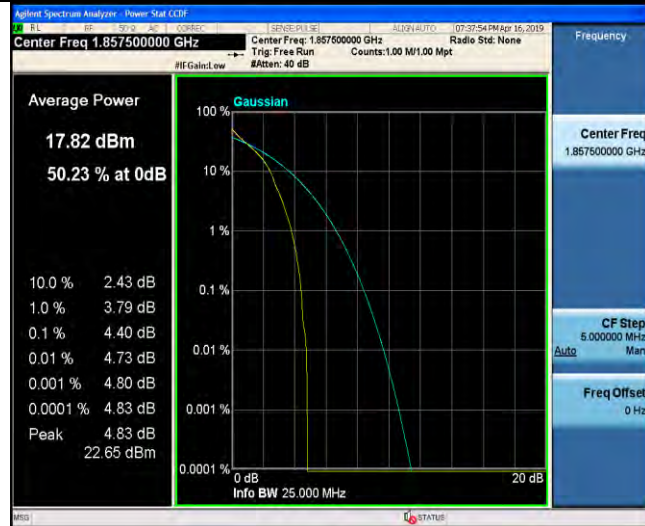

1RB#0

1RB#0

Low Channel



1RB#0

1RB#0

Middle Channel



1RB#0



1RB#0

High Channel

LTE FDD Band 2-20MHz Channel Bandwidth PAPR

QPSK

16QAM

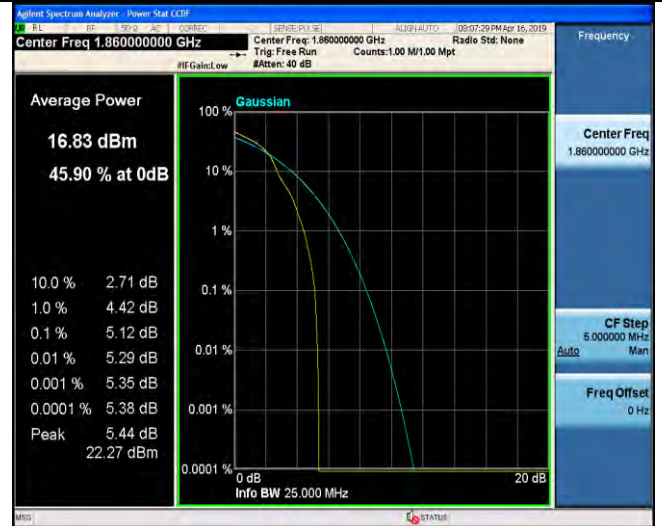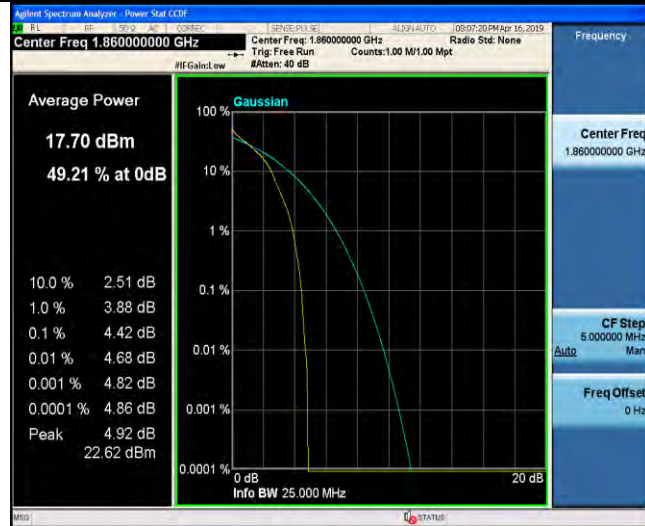

1RB#0

1RB#0

Low Channel



1RB#0

1RB#0

Middle Channel



1RB#0

1RB#0


High Channel

### 3.3 Occupied Bandwidth and Emission Bandwidth

#### LIMIT

N/A

#### TEST CONFIGURATION

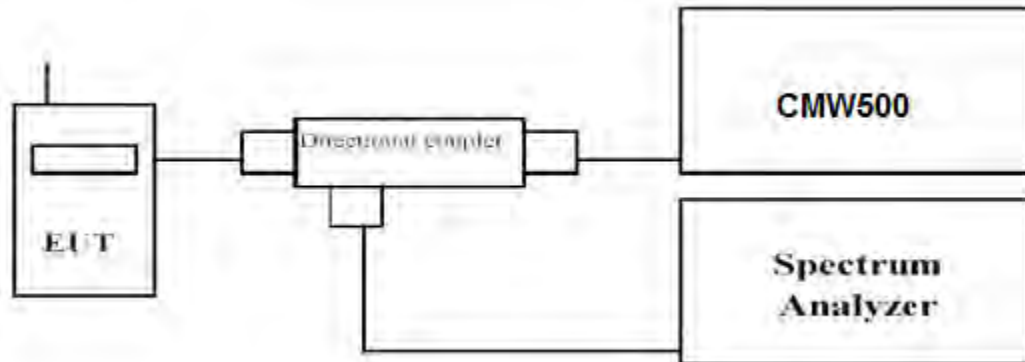

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

#### TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.

LTE FDD Band 2						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	1850.7	1.257	1.260	1.0910	1.0867
		1880.0	1.254	1.274	1.0906	1.0894
		1909.3	1.250	1.276	1.0919	1.0924
3 MHz	15RB#0	1851.5	2.919	2.926	2.6944	2.6978
		1880.0	2.918	2.927	2.6930	2.6939
		1908.5	2.914	2.906	2.7009	2.6958
5 MHz	25RB#0	1852.5	4.907	4.877	4.4999	4.5070
		1880.0	4.896	4.915	4.4977	4.5048
		1907.5	4.862	4.868	4.5009	4.5043
10 MHz	50RB#0	1855.0	9.606	9.575	8.9882	8.9728
		1880.0	9.541	9.561	8.9856	8.9878
		1905.0	9.574	9.561	8.9740	8.9718
15 MHz	75RB#0	1857.5	14.34	14.29	13.491	13.484
		1880.0	14.31	14.33	13.473	13.469
		1902.5	14.30	14.30	13.467	13.450
20 MHz	100RB#0	1860.0	18.99	19.00	17.964	17.962
		1880.0	18.97	19.03	17.952	17.966
		1900.0	18.95	18.96	17.892	17.894

LTE FDD Band 2-1.4MHz Channel Bandwidth

QPSK



16QAM

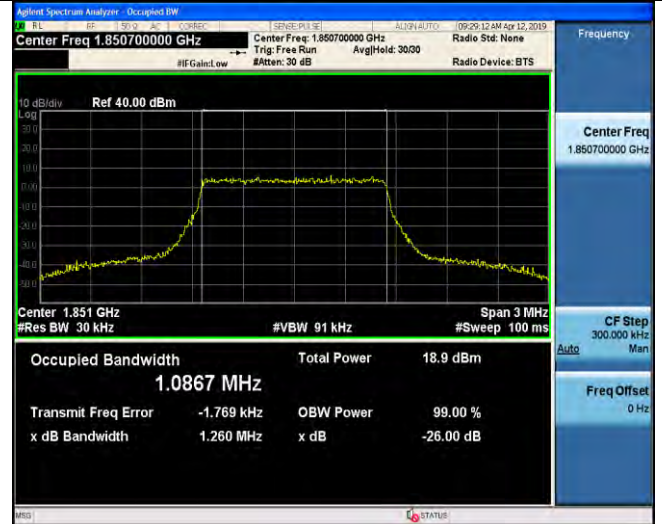

6RB#0

6RB#0


Low Channel

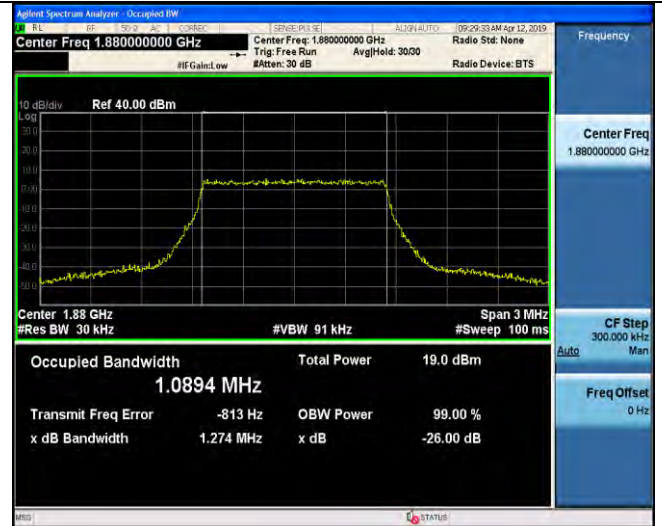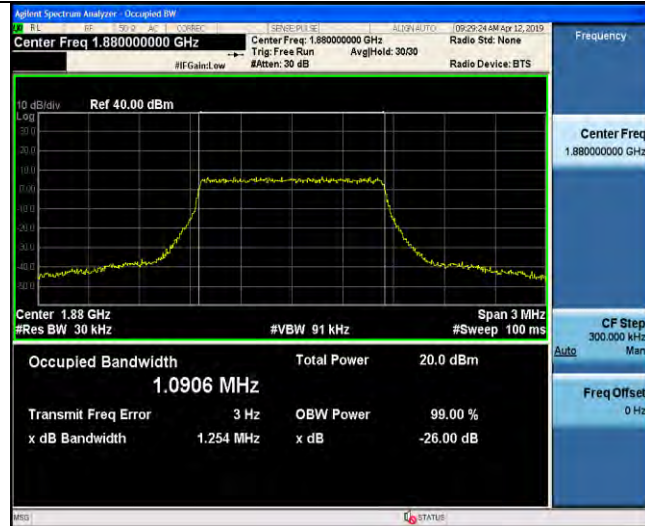

6RB#0

6RB#0

Middle Channel

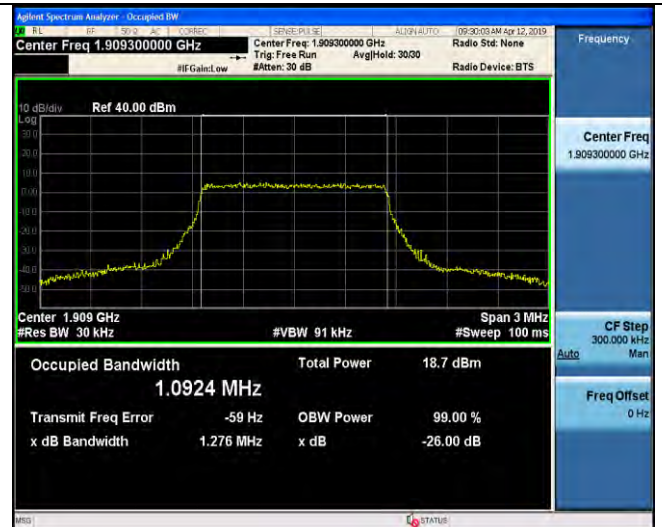

6RB#0


6RB#0

High Channel

LTE FDD Band 2-3MHz Channel Bandwidth

QPSK



16QAM

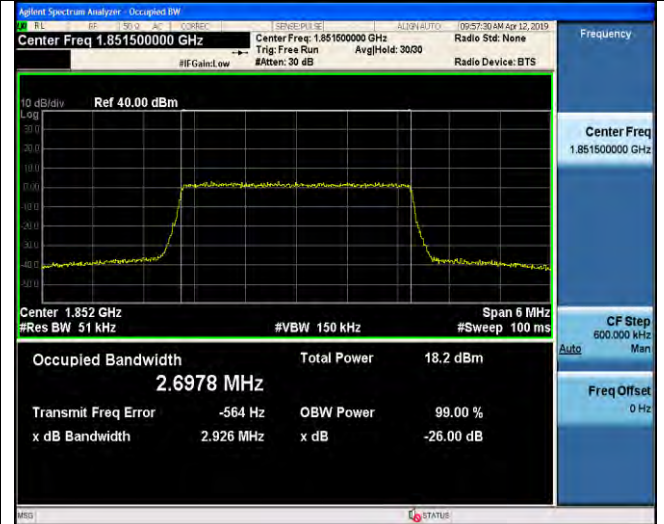

15RB#0

15RB#0

Low Channel

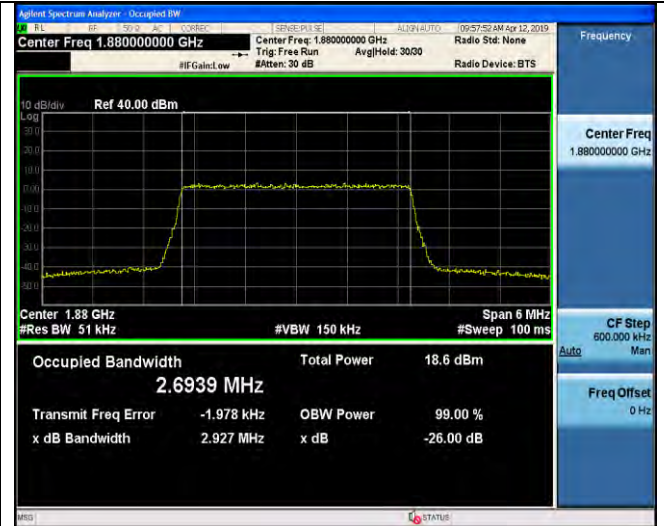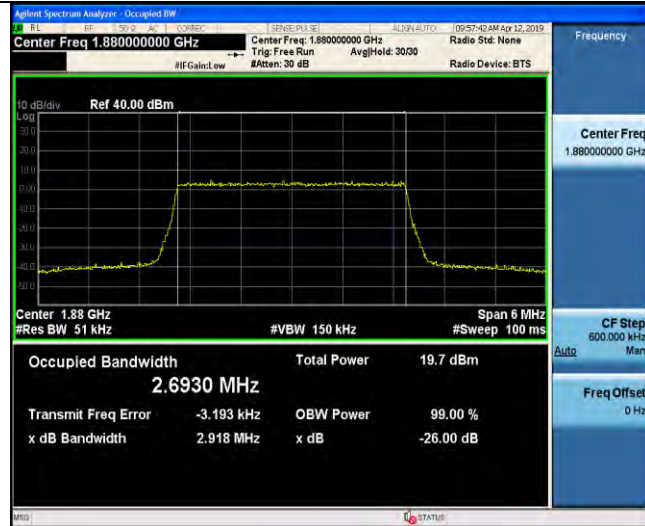

15RB#0

15RB#0

Middle Channel



15RB#0


15RB#0

High Channel

LTE FDD Band 2-5MHz Channel Bandwidth

QPSK



16QAM

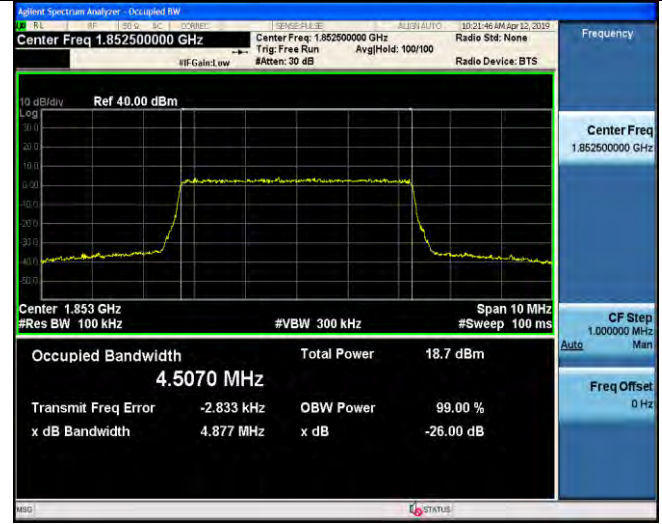

25RB#0

25RB#0

Low Channel

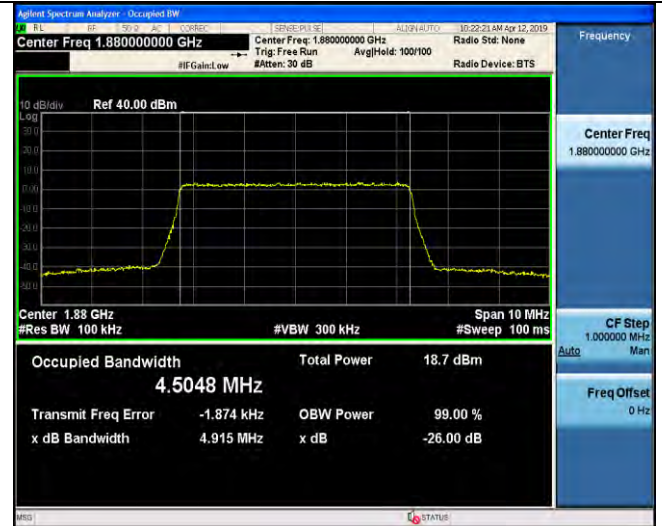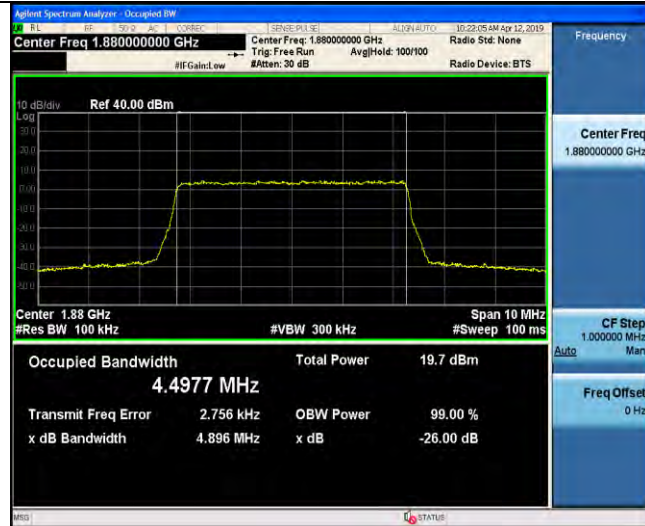

25RB#0

25RB#0

Middle Channel



25RB#0

25RB#0



High Channel



LTE FDD Band 2-10MHz Channel Bandwidth

QPSK


16QAM

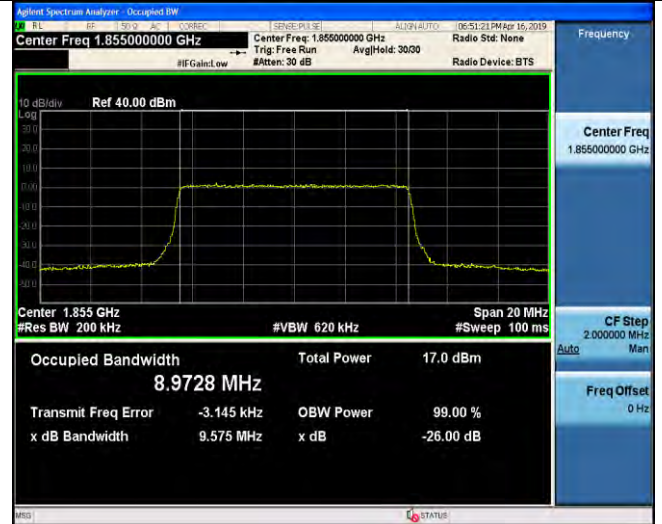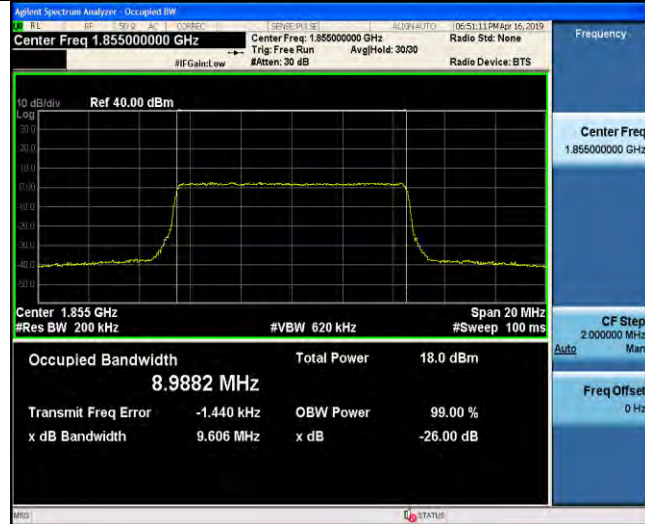

50RB#0

50RB#0

Low Channel

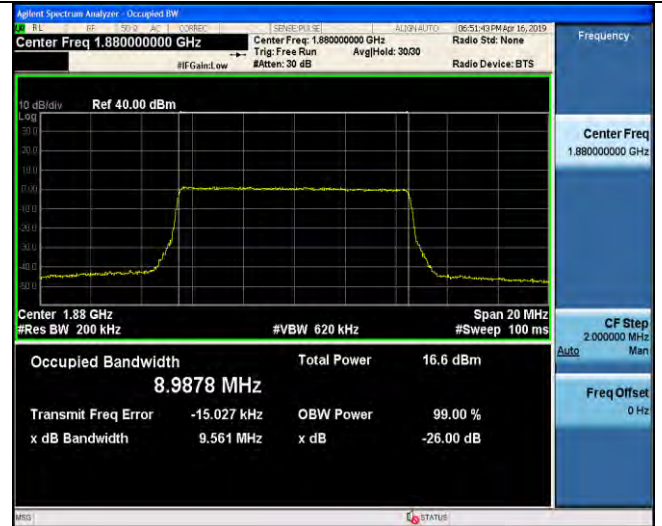

50RB#0

50RB#0

Middle Channel



50RB#0



50RB#0

High Channel

LTE FDD Band 2-15MHz Channel Bandwidth

QPSK



16QAM

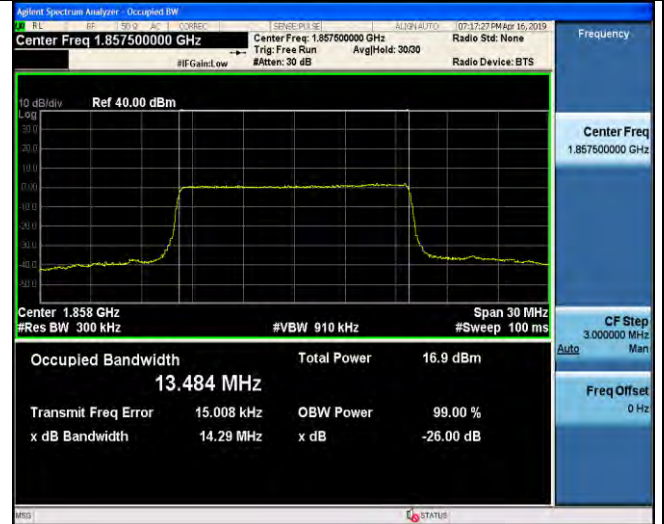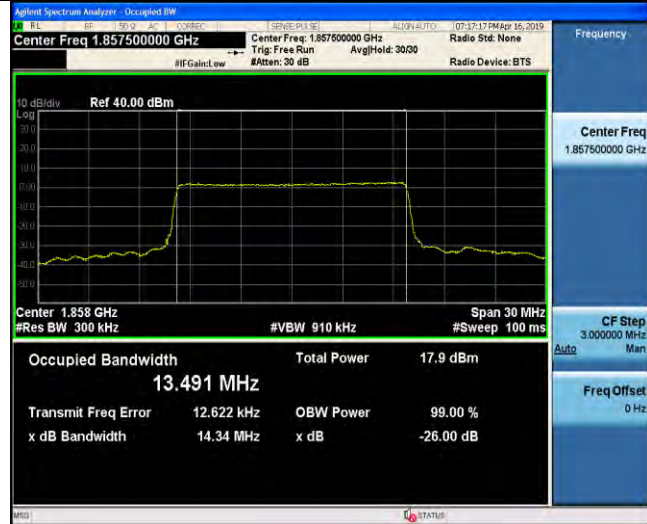

75RB#0

75RB#0


Low Channel

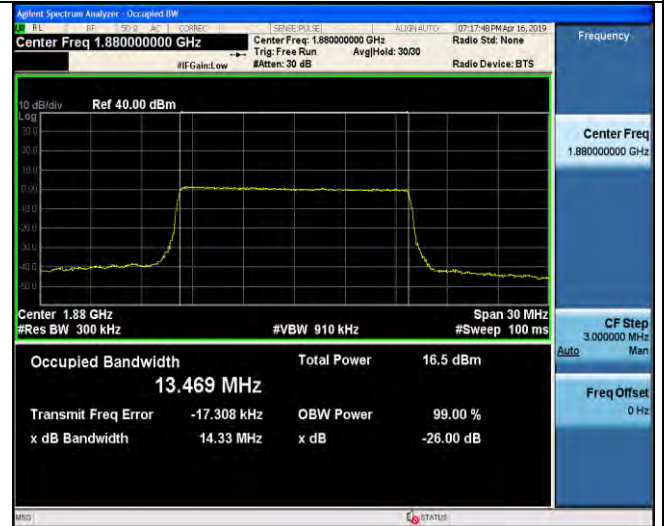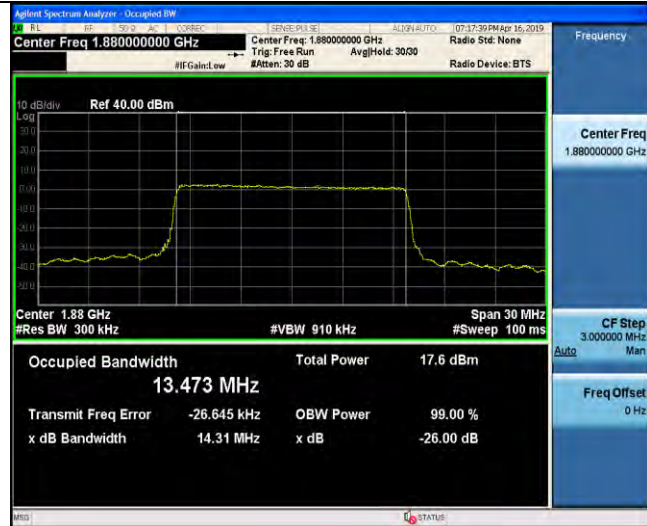

75RB#0

75RB#0

Middle Channel

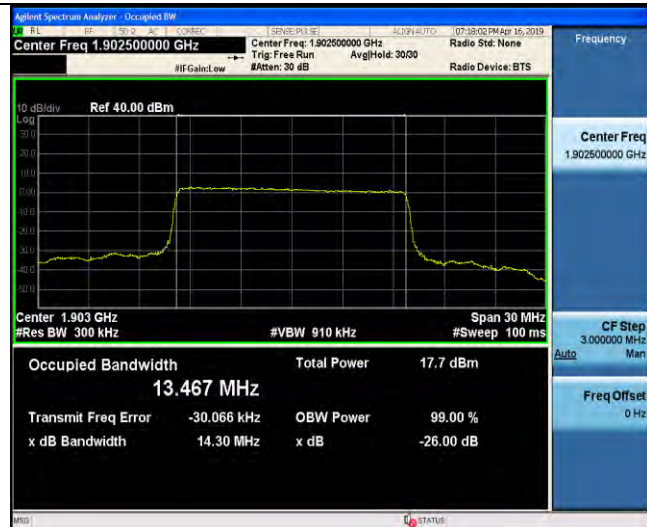

75RB#0


75RB#0

High Channel

LTE FDD Band 2-20MHz Channel Bandwidth

QPSK


16QAM

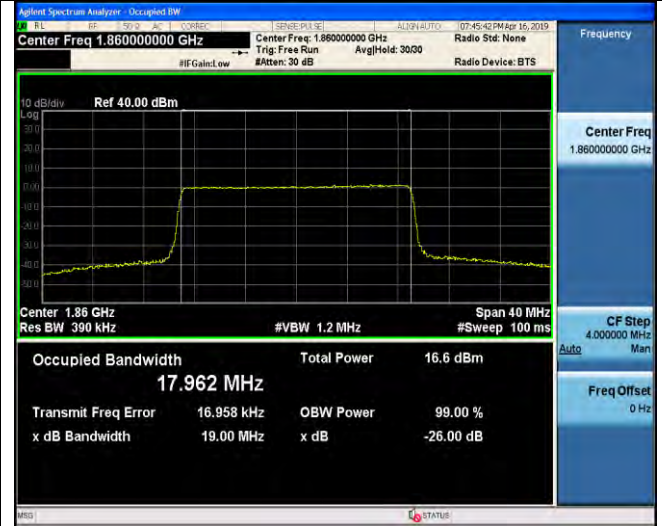

100RB#0

100RB#0


Low Channel

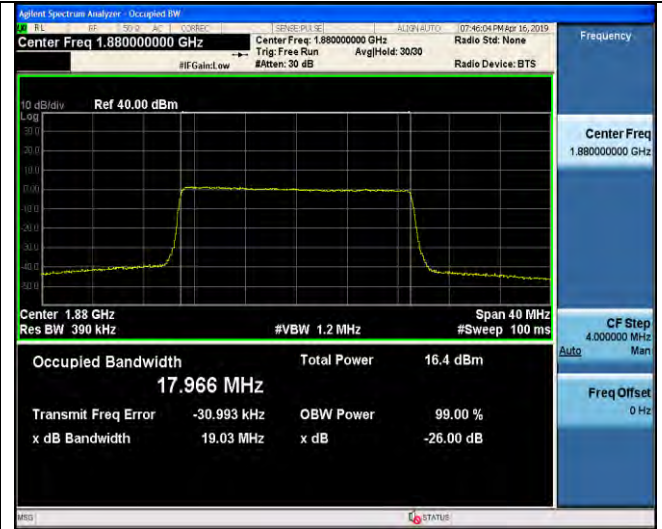

100RB#0

100RB#0

Middle Channel

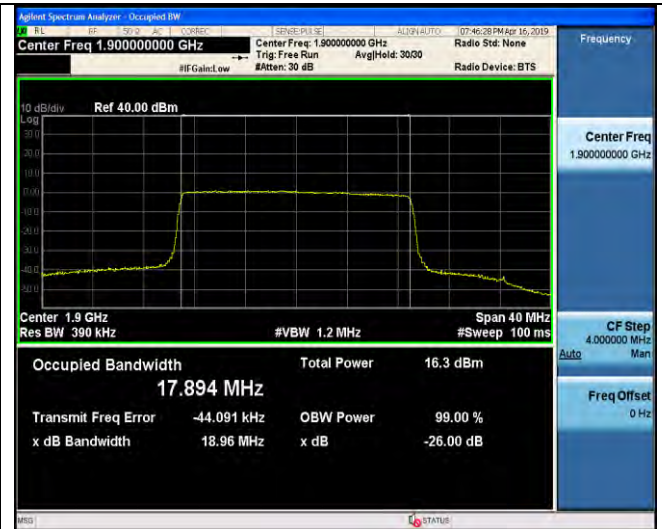

100RB#0

100RB#0


High Channel

### 3.4 Band Edge compliance

#### LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

#### TEST CONFIGURATION

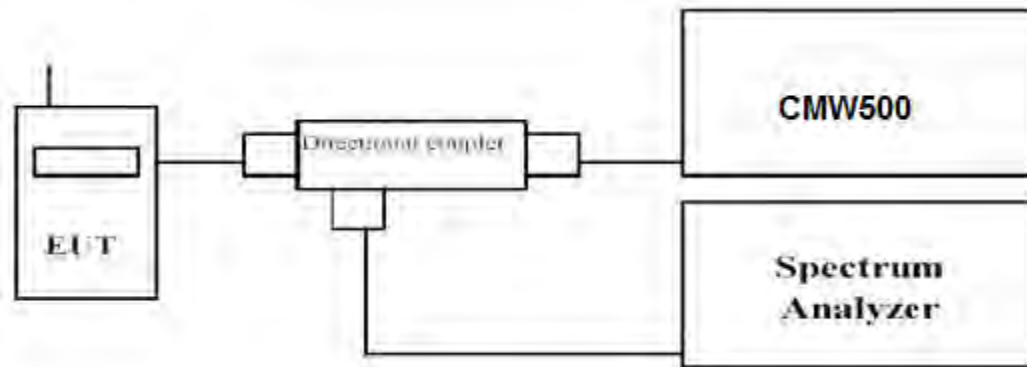

#### TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

#### TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2

LTE FDD Band 2-1.4MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM



6RB#0

6RB#0

Low Channel



6RB#0

6RB#0

High Channel

LTE FDD Band 2-3MHz Channel Bandwidth Band Edge Compliance

QPSK


16QAM



15RB#0

15RB#0

Low Channel

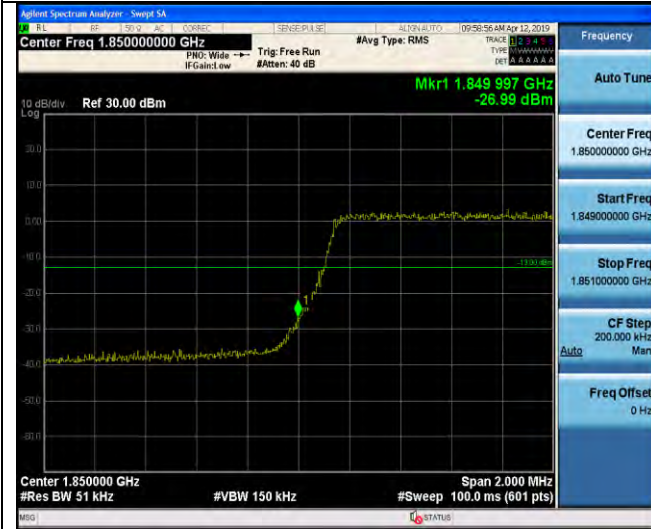

15RB#0

15RB#0

High Channel

LTE FDD Band 2-5MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM



25RB#0

25RB#0

Low Channel



25RB#0

25RB#0

High Channel

LTE FDD Band 2-10MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM



50RB#0

50RB#0

Low Channel



50RB#0

50RB#0

High Channel



LTE FDD Band 2-15MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM



75RB#0

75RB#0

Low Channel



75RB#0

75RB#0

High Channel

LTE FDD Band 2-20MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM



100RB#0

100RB#0

Low Channel



100RB#0

100RB#0

High Channel