

Appendix A

RF Test Data for BT V5.0(DTS) (Conducted Measurement)

Product Name: Smart Brightness Thermometer

Trade Mark: **SWE SWE**®, 


Test Model: XZ-WSD02

Environmental Conditions

Temperature:	24.6 ° C
Relative Humidity:	54.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Ben Jin
Supervised by:	Li Huan


A.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

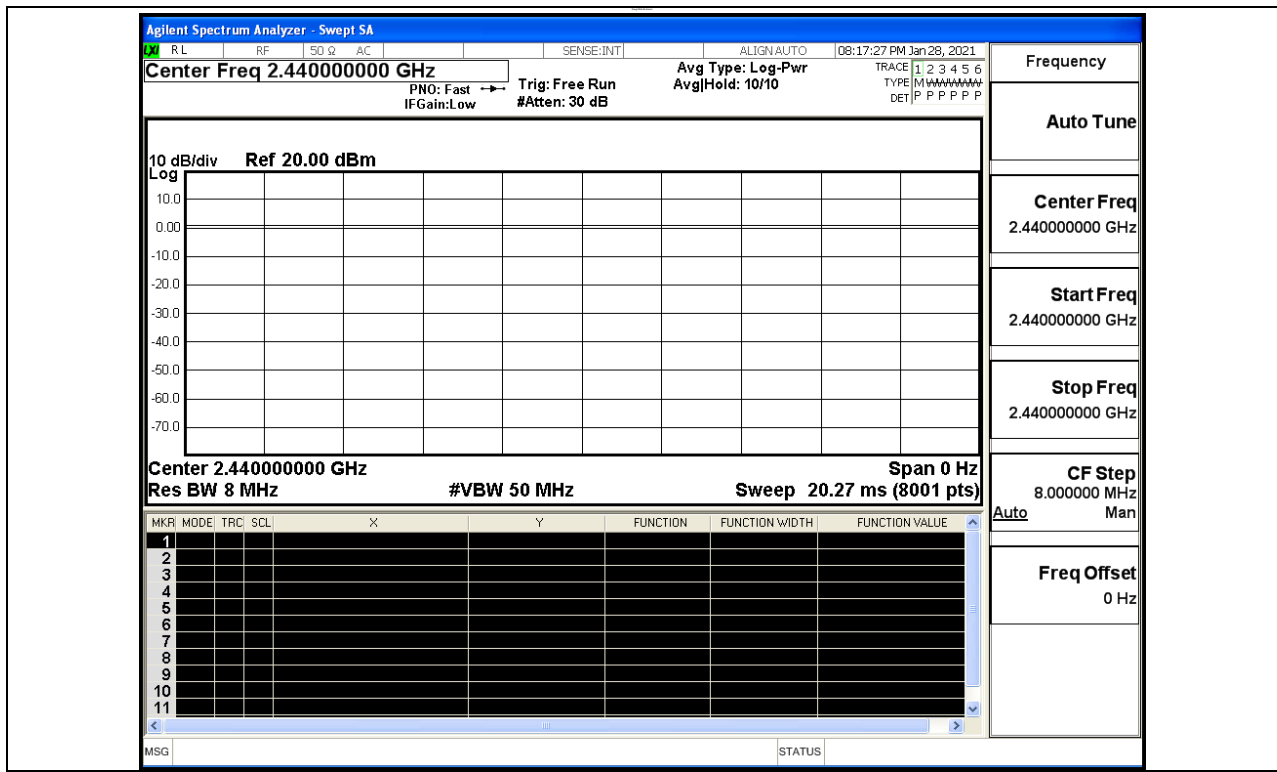


A.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	7.51	30	PASS
BT LE	MCH	7.69	30	PASS
BT LE	HCH	7.419	30	PASS

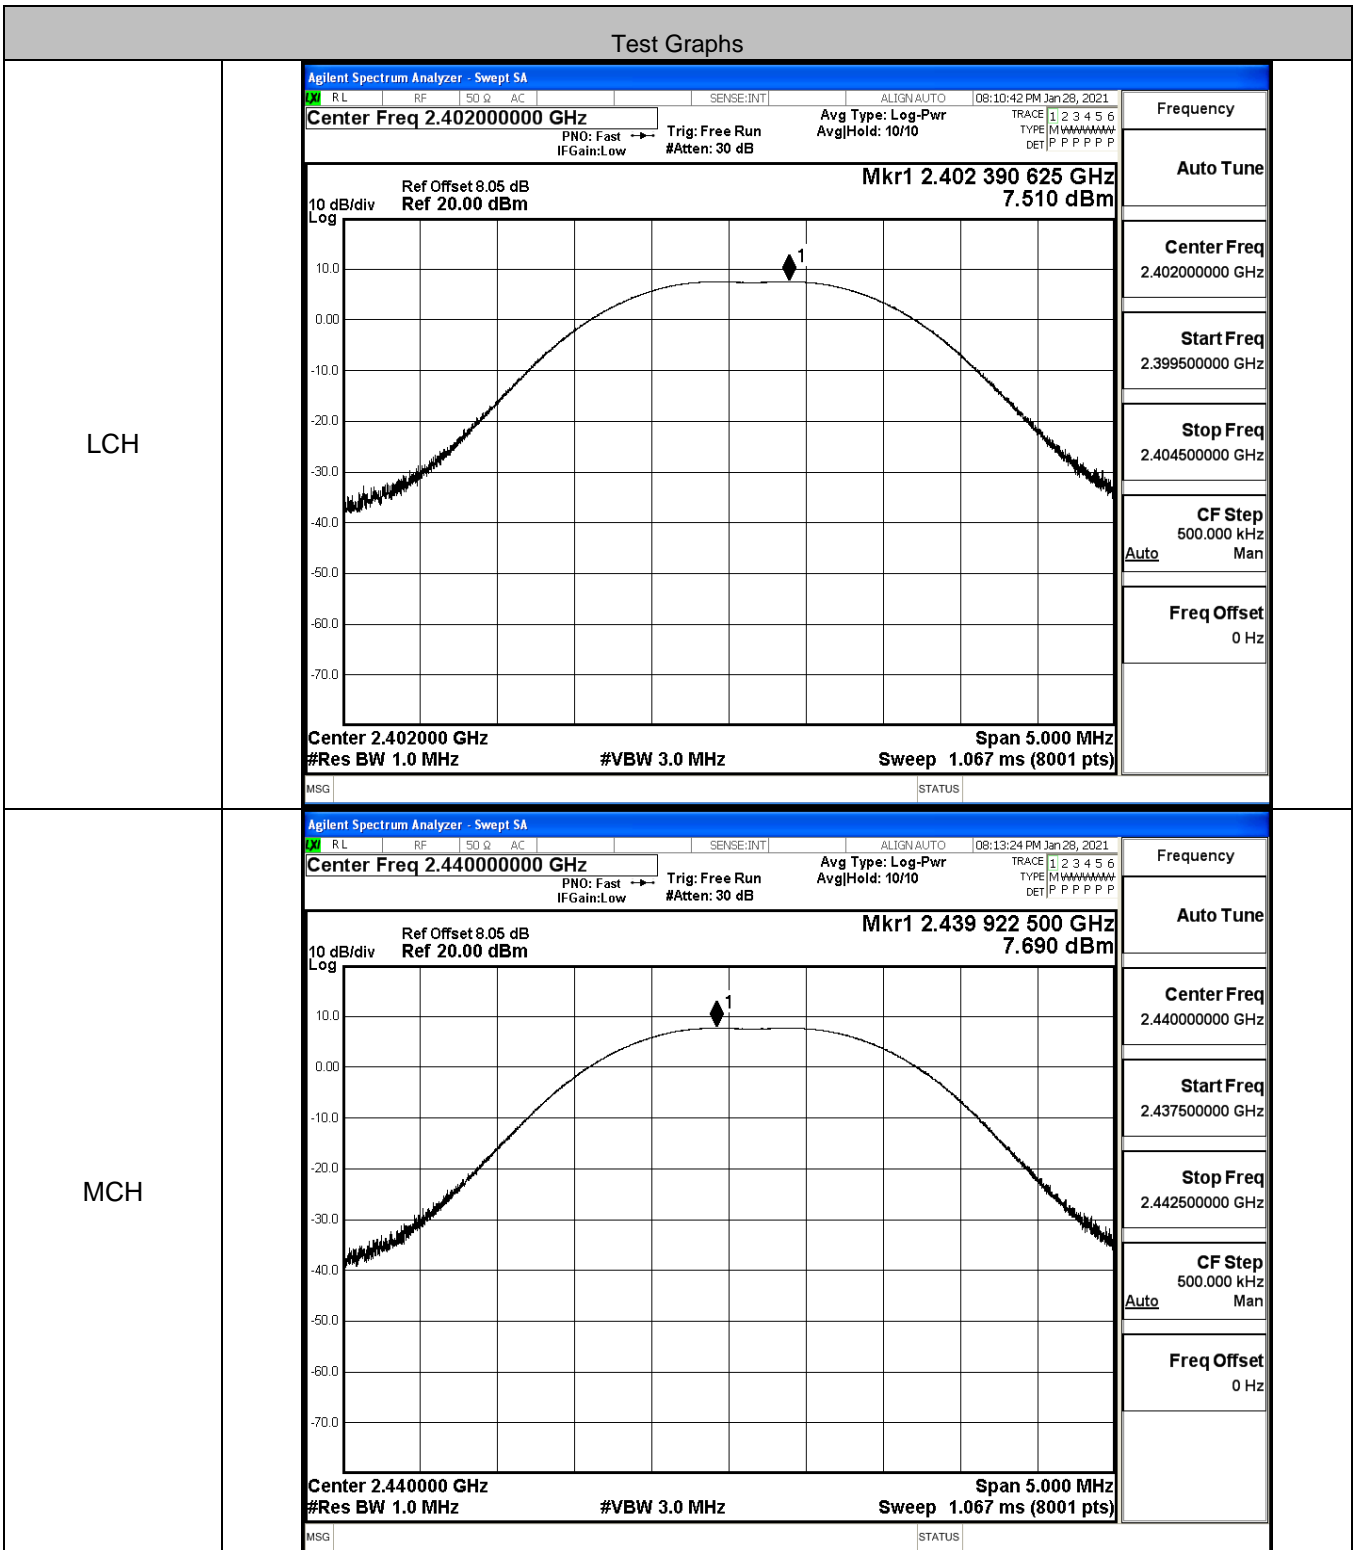

HCH

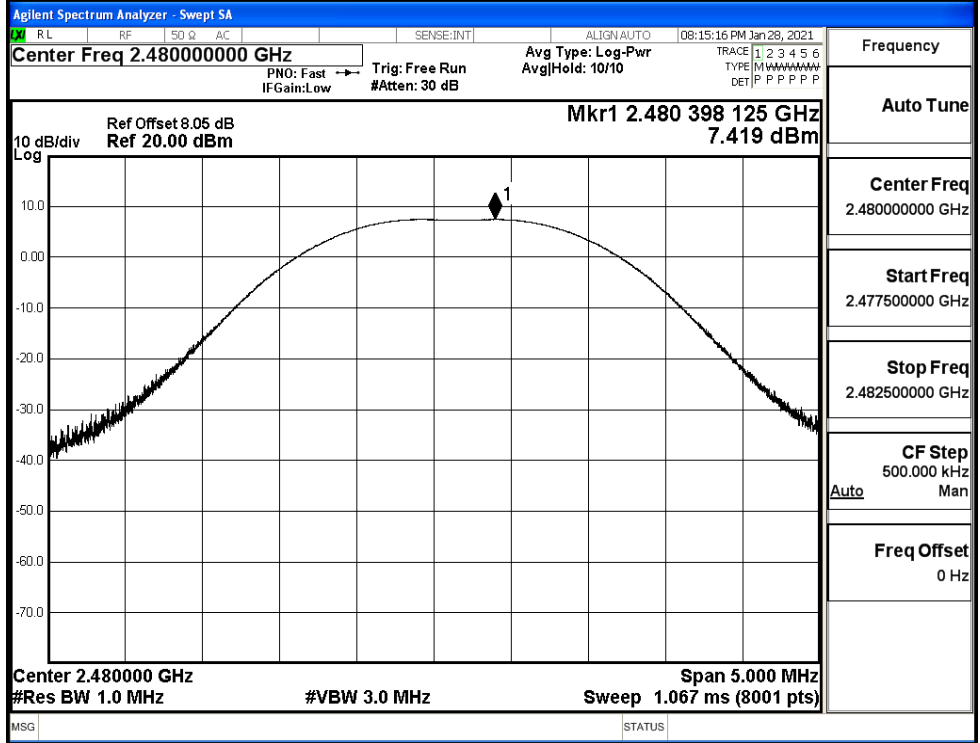


A.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-5.167	8	PASS
BT LE	MCH	-4.501	8	PASS
BT LE	HCH	-5.600	8	PASS

Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz PNO: Wide IFGain:Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 8.05 dB Ref 20.00 dBm Mkr1 2.4019805 GHz -5.820 dBm 10 dB/div Log Center 2.4020000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 1.500 MHz Sweep 158.2 ms (1001 pts)</p>	Frequency Auto Tune Center Freq 2.40200000 GHz Start Freq 2.401250000 GHz Stop Freq 2.402750000 GHz CF Step 150.000 kHz Auto Man Freq Offset 0 Hz
	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44000000 GHz PNO: Wide IFGain:Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 8.05 dB Ref 20.00 dBm Mkr1 2.4399820 GHz -4.286 dBm 10 dB/div Log Center 2.4400000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 1.500 MHz Sweep 158.2 ms (1001 pts)</p>	Frequency Auto Tune Center Freq 2.440000000 GHz Start Freq 2.439250000 GHz Stop Freq 2.440750000 GHz CF Step 150.000 kHz Auto Man Freq Offset 0 Hz

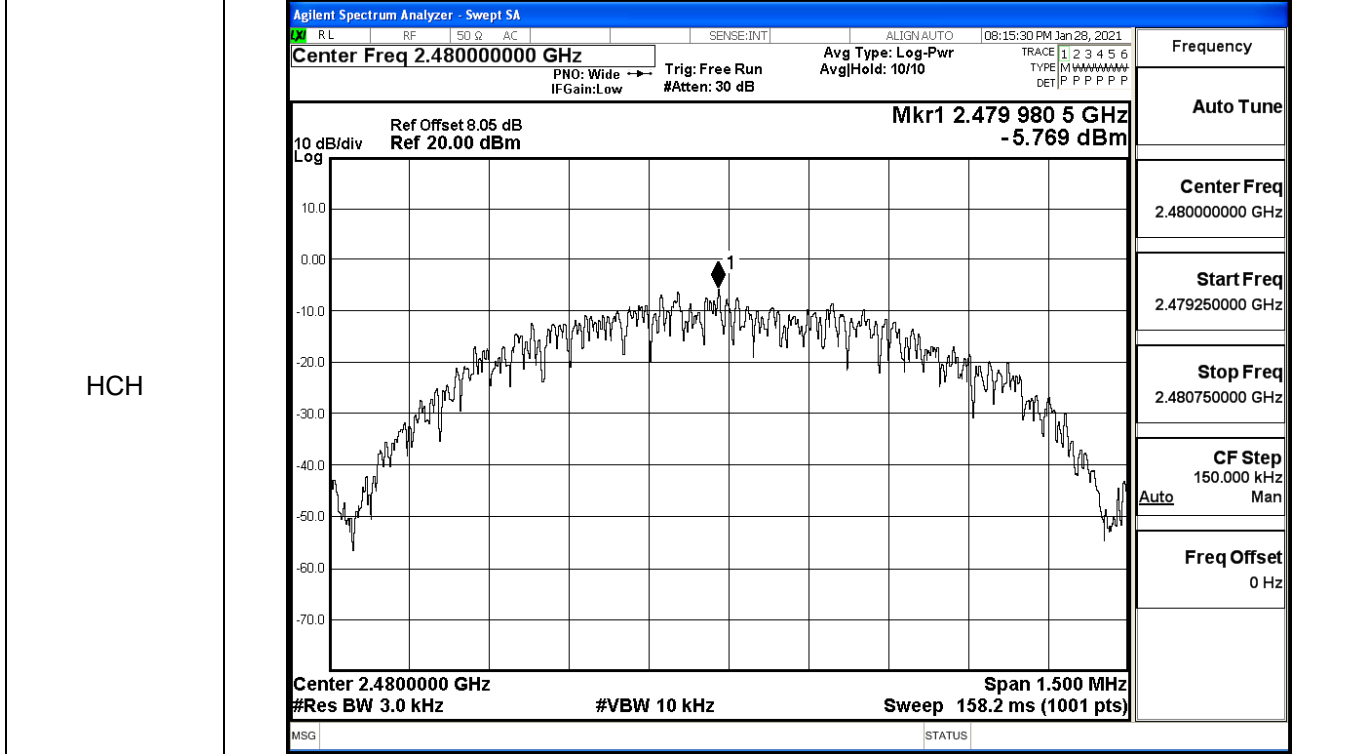


A.4 6dB Bandwidth

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6714	≥0.5	PASS
BT LE	MCH	0.6952	≥0.5	PASS
BT LE	HCH	0.6809	≥0.5	PASS

Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Mkr1 2.401916 GHz 7.1741 dBm</p> <p>Occupied Bandwidth 1.0687 MHz</p> <p>Total Power 13.9 dBm</p> <p>Transmit Freq Error 156.88 kHz</p> <p>x dB Bandwidth 671.4 kHz</p>	<p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p>
	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44000000 GHz</p> <p>Center Freq: 2.44000000 GHz</p> <p>Mkr1 2.4404061 GHz 7.4798 dBm</p> <p>Occupied Bandwidth 1.0666 MHz</p> <p>Total Power 14.1 dBm</p> <p>Transmit Freq Error 156.57 kHz</p> <p>x dB Bandwidth 695.2 kHz</p>	<p>Frequency</p> <p>Center Freq 2.44000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p>

HCH

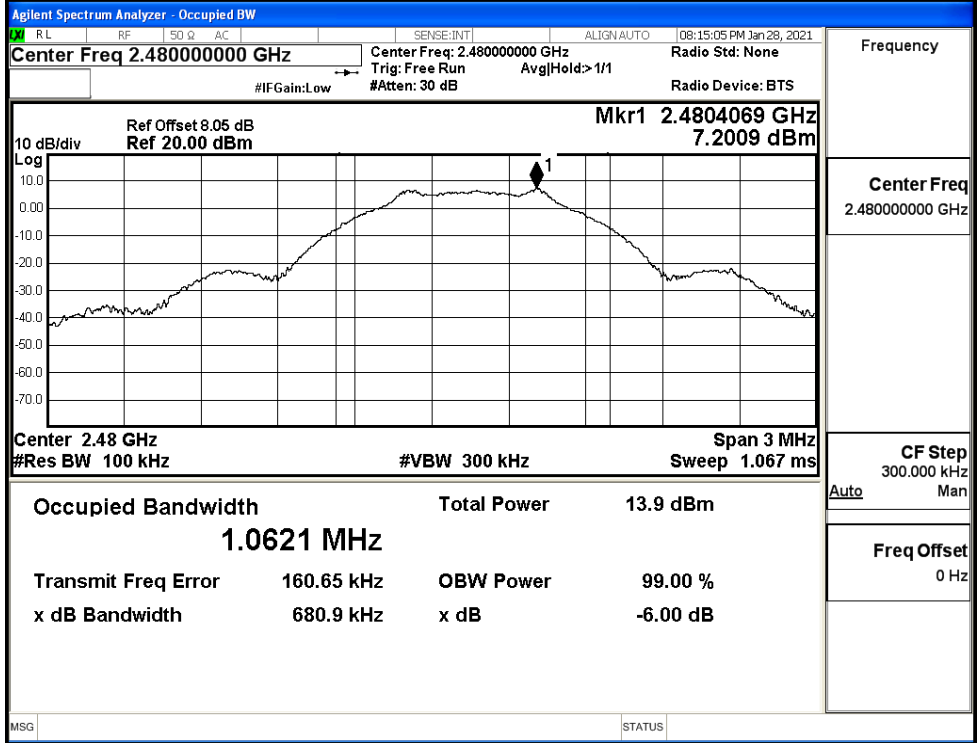

A.5 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	7.211	-37.365	-12.789	PASS
BT LE	MCH	7.159	-37.418	-12.841	PASS
BT LE	HCH	7.136	-37.352	-12.864	PASS

BT LE_LCH_Graphs


Pref/BT LE/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz #Avg Type: RMS AvgHold: 10/10 Ref Offset 8.05 dB Ref 20.00 dBm Mkr1 2.402 415 5 GHz 7.211 dBm 10 dB/div Log Center 2.402000 GHz Span 4.000 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (8001 pts)</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Frequency</td></tr> <tr><td>Auto Tune</td></tr> <tr><td>Center Freq 2.402000000 GHz</td></tr> <tr><td>Start Freq 2.400000000 GHz</td></tr> <tr><td>Stop Freq 2.404000000 GHz</td></tr> <tr><td>CF Step 400.000 kHz Auto Man</td></tr> <tr><td>Freq Offset 0 Hz</td></tr> </table>	Frequency	Auto Tune	Center Freq 2.402000000 GHz	Start Freq 2.400000000 GHz	Stop Freq 2.404000000 GHz	CF Step 400.000 kHz Auto Man	Freq Offset 0 Hz
Frequency									
Auto Tune									
Center Freq 2.402000000 GHz									
Start Freq 2.400000000 GHz									
Stop Freq 2.404000000 GHz									
CF Step 400.000 kHz Auto Man									
Freq Offset 0 Hz									
Puw/BT LE/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 12.51500000 GHz #Avg Type: RMS AvgHold: 9/10 Ref Offset 8.05 dB Ref 20.00 dBm Mkr2 24.750 GHz -37.365 dBm 10 dB/div Log Start 30 MHz Stop 25.00 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.387 s (8001 pts)</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Frequency</td></tr> <tr><td>Auto Tune</td></tr> <tr><td>Center Freq 12.515000000 GHz</td></tr> <tr><td>Start Freq 30.000000 MHz</td></tr> <tr><td>Stop Freq 25.000000000 GHz</td></tr> <tr><td>CF Step 2.497000000 GHz Auto Man</td></tr> <tr><td>Freq Offset 0 Hz</td></tr> </table>	Frequency	Auto Tune	Center Freq 12.515000000 GHz	Start Freq 30.000000 MHz	Stop Freq 25.000000000 GHz	CF Step 2.497000000 GHz Auto Man	Freq Offset 0 Hz
Frequency									
Auto Tune									
Center Freq 12.515000000 GHz									
Start Freq 30.000000 MHz									
Stop Freq 25.000000000 GHz									
CF Step 2.497000000 GHz Auto Man									
Freq Offset 0 Hz									

BT LE_MCH_Graphs

Pref/BT LE/MCH

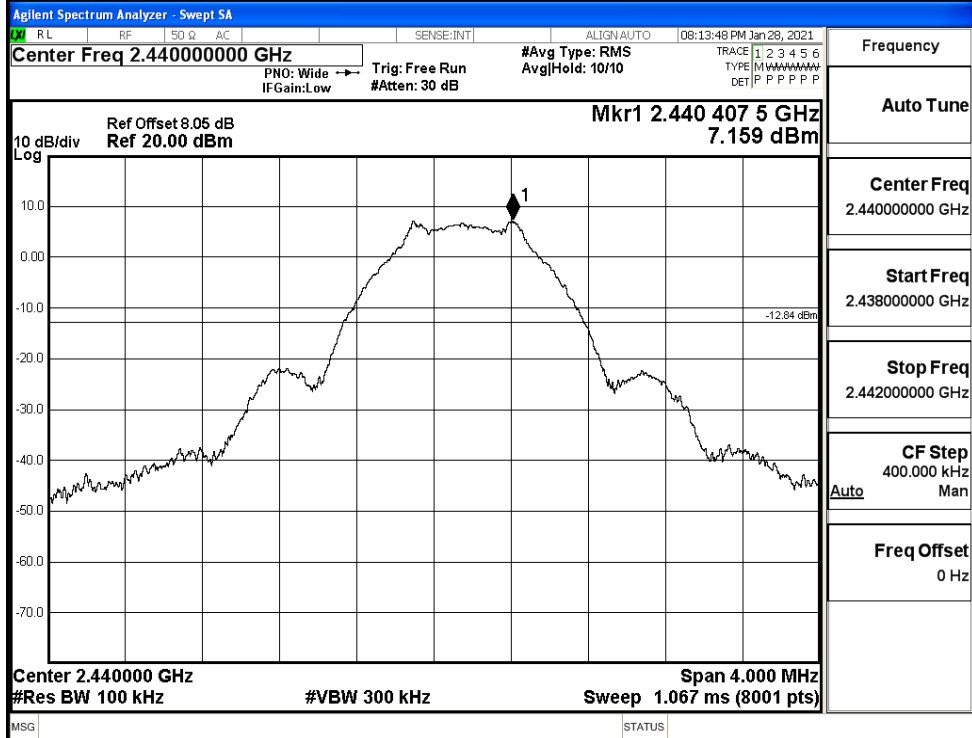


Puw/BT LE/MCH

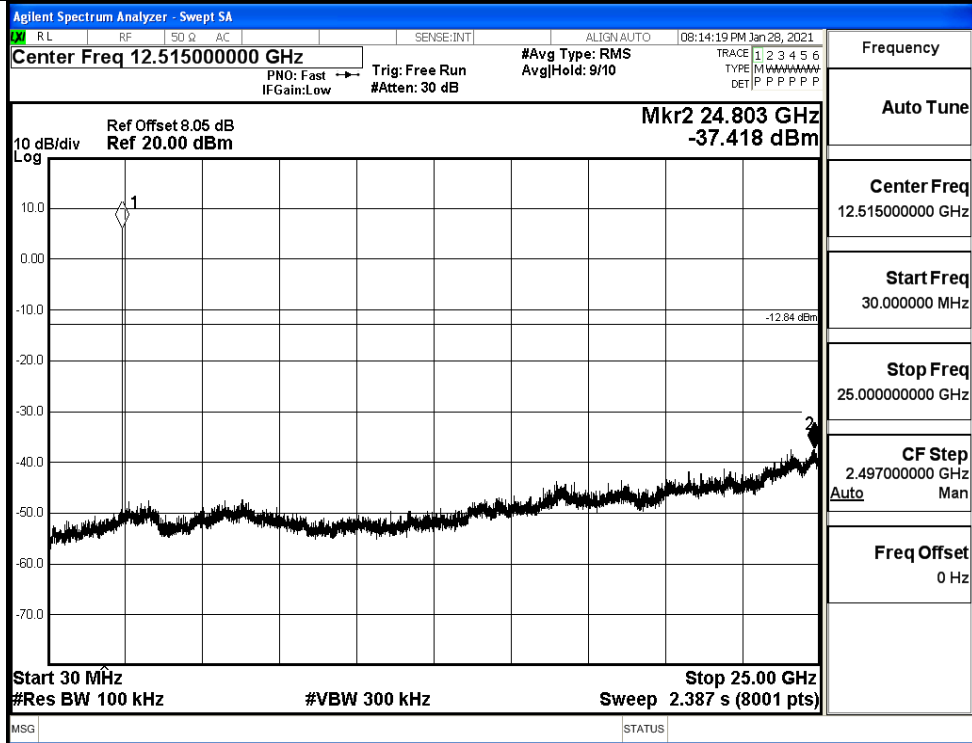


BT LE_HCH_Graphs

Pref/BT LE/HCH

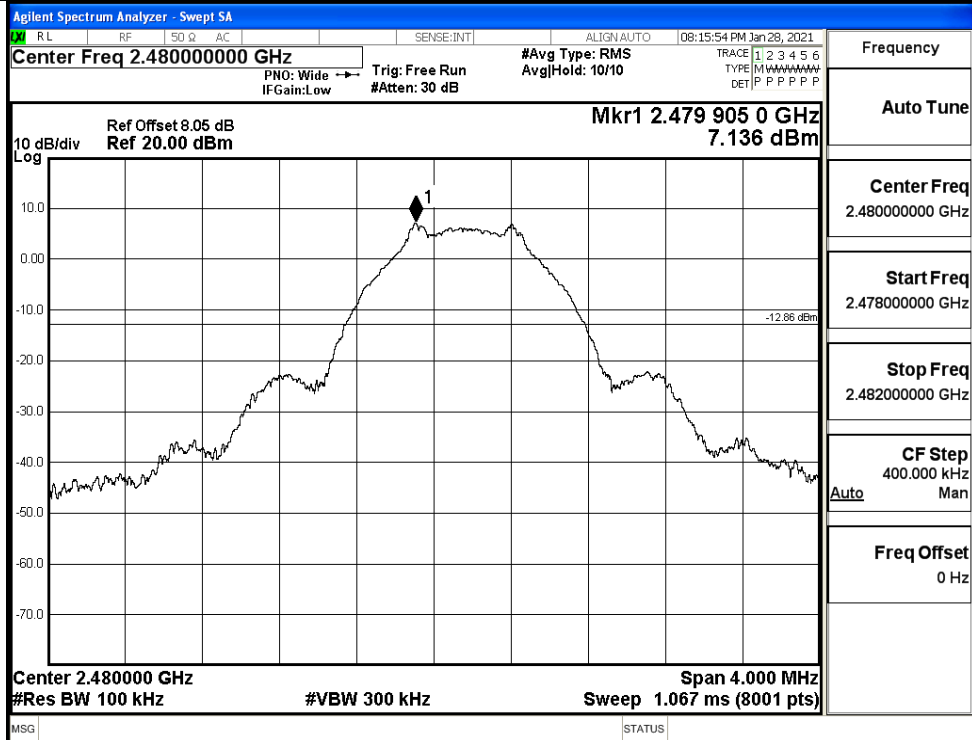

Puw/BT LE/HCH

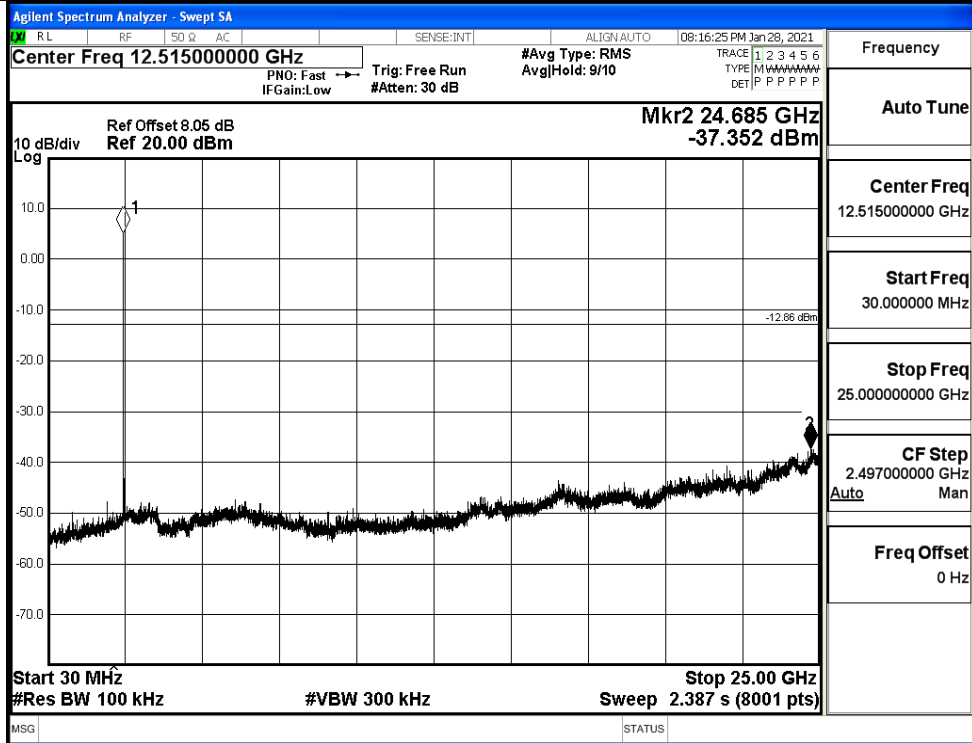


A.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	6.381	-49.734	-13.62	PASS
BT LE	HCH	6.844	-48.680	-13.16	PASS

Test Graphs

LCH

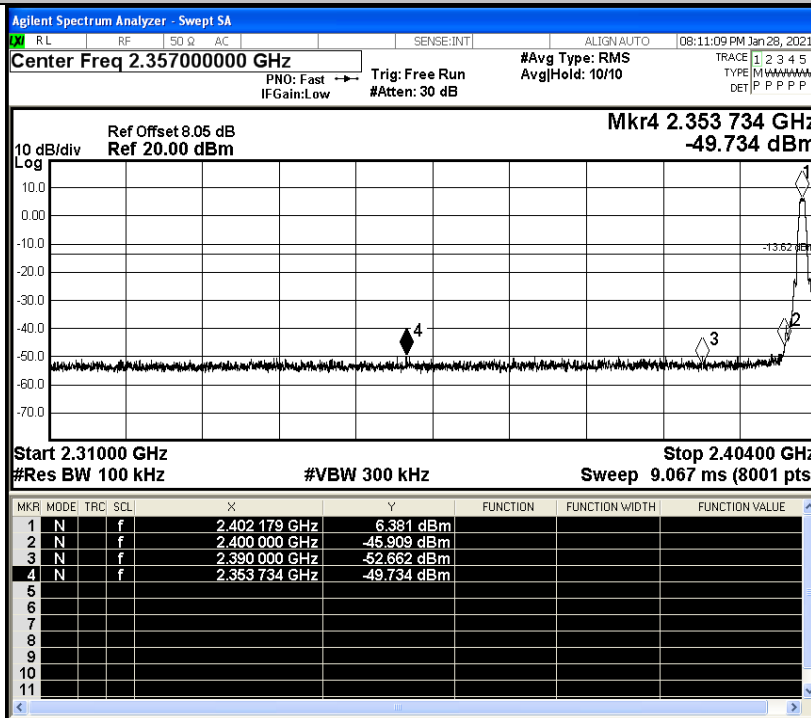

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f		2.402179 GHz	6.381 dBm			
2	N	f		2.400000 GHz	-45.909 dBm			
3	N	f		2.390000 GHz	-52.662 dBm			
4	N	f		2.353734 GHz	-49.734 dBm			
5								
6								
7								
8								
9								
10								
11								

Frequency

Auto Tune

Center Freq
2.357000000 GHz


Start Freq
2.310000000 GHz

Stop Freq
2.404000000 GHz

CF Step
9.400000 MHz

Freq Offset
0 Hz

HCH

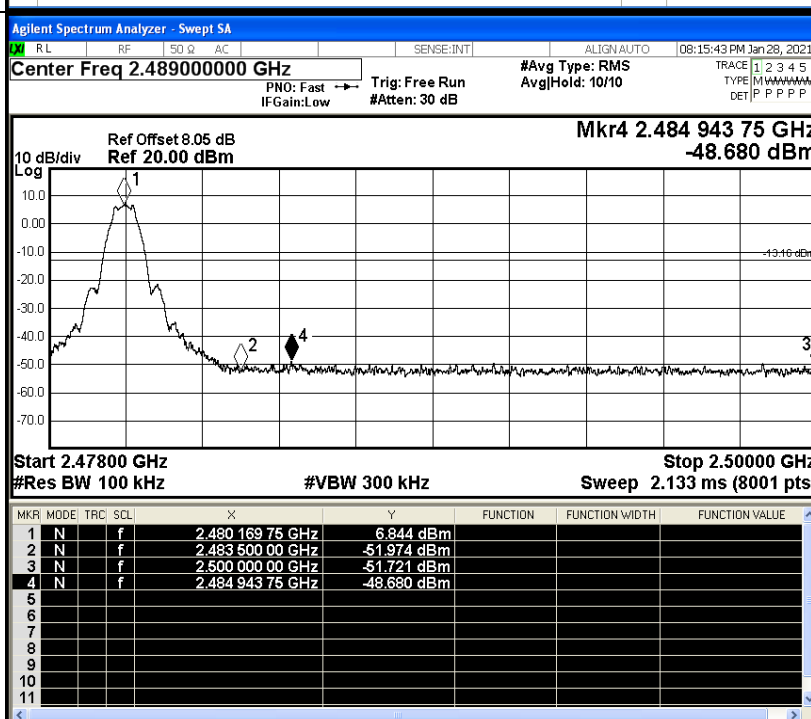

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f		2.48016975 GHz	6.844 dBm			
2	N	f		2.48350000 GHz	-51.974 dBm			
3	N	f		2.50000000 GHz	-51.721 dBm			
4	N	f		2.48494375 GHz	-48.680 dBm			
5								
6								
7								
8								
9								
10								
11								

Frequency

Auto Tune

Center Freq
2.489000000 GHz

Start Freq
2.478000000 GHz

Stop Freq
2.500000000 GHz


CF Step
2.200000 MHz

Freq Offset
0 Hz


A.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-44.05	2.0	0	51.21	PEAK	74	PASS
		Ant1	2310.0	-53.38	2.0	0	41.88	AV	54	PASS
		Ant1	2390.0	-42.42	2.0	0	52.83	PEAK	74	PASS
		Ant1	2390.0	-53.03	2.0	0	42.23	AV	54	PASS
	2480	Ant1	2483.5	-40.13	2.0	0	55.13	PEAK	74	PASS
		Ant1	2483.5	-50.83	2.0	0	44.43	AV	54	PASS
		Ant1	2500.0	-42.61	2.0	0	52.65	PEAK	74	PASS
		Ant1	2500.0	-52.30	2.0	0	42.96	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

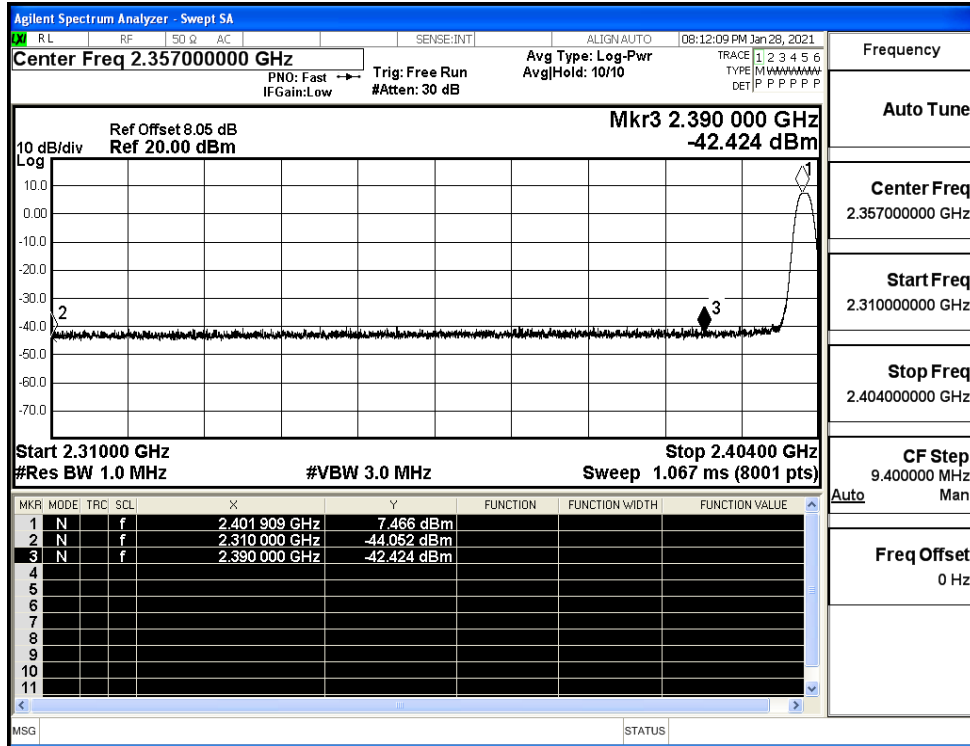

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

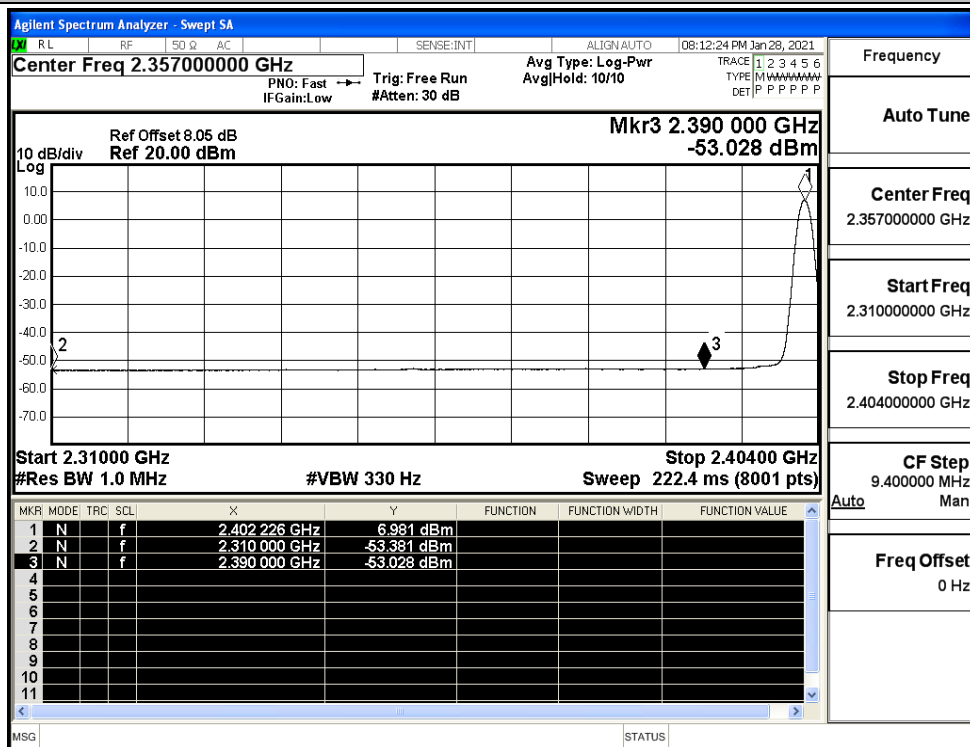

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

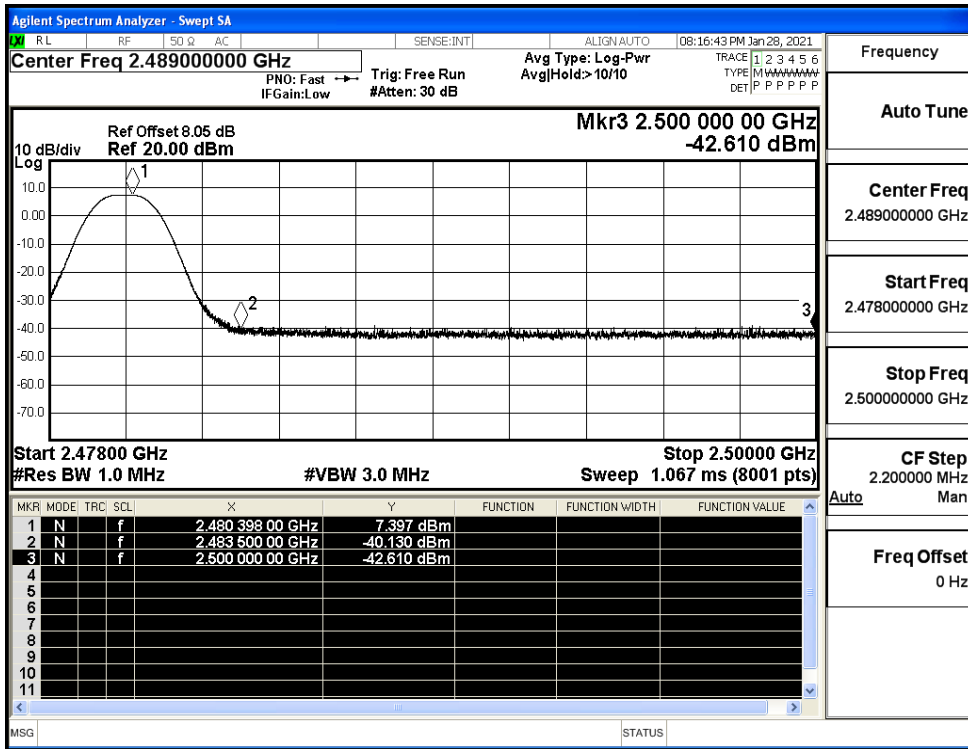

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

