

TEST REPORT

Product Name: Digital LED Poster 2.5mm
FCC ID: 2ASCB-DW060VB
Trademark: N/A
Model Number: DW060VB, SCNS
Prepared For: D2G Group LLC
Address: 81 Commerce Drive, Fall River, Massachusetts 02720, United States
Manufacturer: GUANGZHOU YOUGUANG OPTOELECTRONICS CO., LTD
Address: No.75, Pacific Ind. Zone, Xingtang Town, Zengcheng, Guangzhou, 511340 China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jul. 13, 2023
Sample tested Date: Jul. 13, 2023 to Aug. 03, 2023
Issue Date: Aug. 03, 2023
Report No.: CTB230717005RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List	6
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	10
6.1 Block Diagram Of Test Setup.....	10
6.2 Limit.....	10
6.3 Test procedure	10
6.4 Test Result	12
7. RADIATED SPURIOUS EMISSION	14
7.1 Block Diagram Of Test Setup.....	14
7.2 Limit.....	14
7.3 Test procedure	15
7.4 Test Result	16
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	38
8.1 Block Diagram Of Test Setup.....	38
8.2 Limit.....	38
8.3 Test procedure	38
9. CONDUCTED OUTPUT POWER.....	55
9.1 Block Diagram Of Test Setup.....	55
9.2 Limit.....	55
9.3 Test procedure	55
9.4 Test Result	56
10. 6DB OCCUPIED BANDWIDTH.....	57
10.1 Block Diagram Of Test Setup.....	57
10.2 Limit.....	57
10.3 Test procedure	57
10.4 Test Result	58
11. POWER SPECTRAL DENSITY.....	68
11.1 Block Diagram Of Test Setup.....	68
11.2 Limit.....	68
11.3 Test procedure	68
11.4 Test Result	69
12. ANTENNA REQUIREMENT	78
13. EUT TEST SETUP PHOTOGRAPHS.....	79

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB230717005RFX	Aug. 03, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): DW060VB, SCNS

Model Description: All the model are the same circuit and RF module, only for model name. Test sample model: DW060VB

Wi-Fi Specification: IEEE 802.11b/g/n

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel
IEEE 802.11n 40: 2422-2452MHz/ 7 channel

Max. RF output power: WiFi (2.4G) : 16.905dBm

Type of Modulation: WiFi: DSSS, OFDM, CCK

Antenna installation: WiFi: Rod antenna

Antenna Gain: WiFi (2.4G) : Ant1: 2.05dBi
Ant2: 2.05dBi

Ratings: AC 120V/60Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Rod antenna with Max Antenna Gain 2.05dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 5.06dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 2.05dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08


21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2023.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2023.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

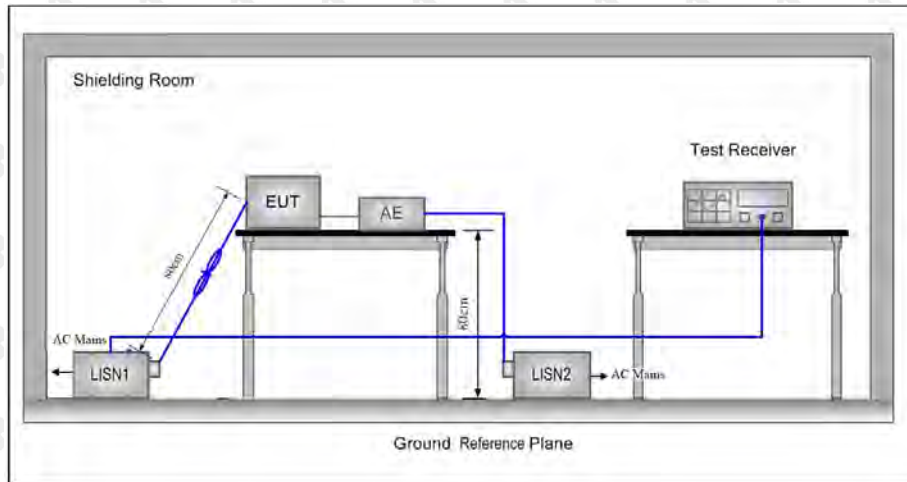

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

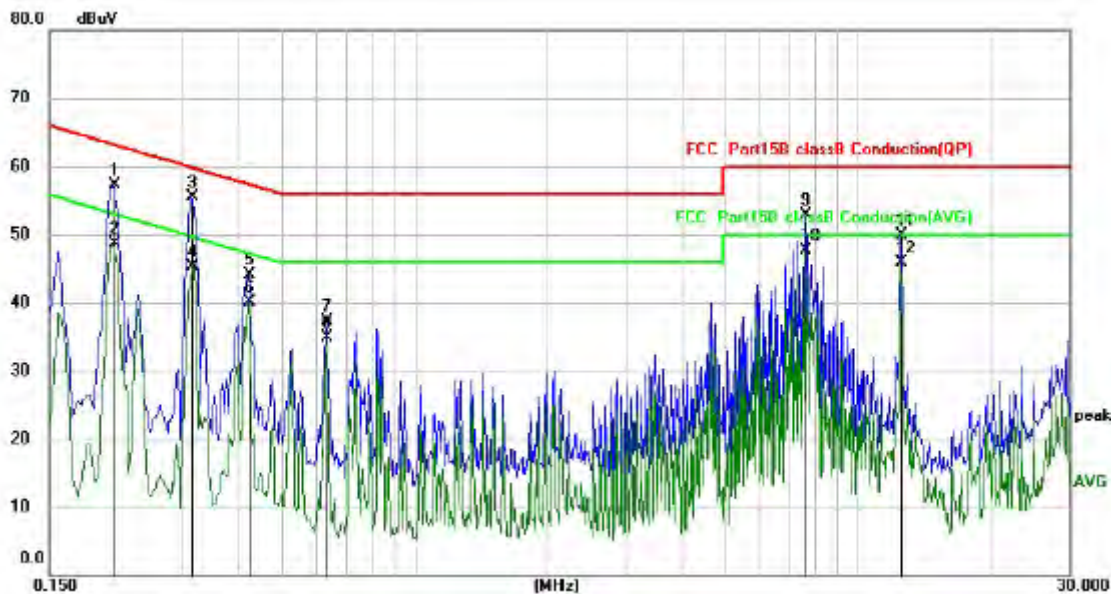

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.2100	47.29	10.00	57.29	63.21	-5.92	QP
2		0.2100	38.78	10.00	48.78	53.21	-4.43	AVG
3		0.3140	45.50	9.99	55.49	59.86	-4.37	QP
4		0.3140	35.41	9.99	45.40	49.86	-4.46	AVG
5		0.4218	34.18	9.98	44.16	57.41	-13.25	QP
6		0.4218	30.05	9.98	40.03	47.41	-7.38	AVG
7		0.6340	27.31	9.97	37.28	56.00	-18.72	QP
8		0.6340	24.87	9.97	34.84	46.00	-11.16	AVG
9		7.6139	42.68	10.26	52.94	60.00	-7.06	QP
10	*	7.6139	37.42	10.26	47.68	50.00	-2.32	AVG
11		12.5100	39.48	10.41	49.89	60.00	-10.11	QP
12		12.5100	35.52	10.41	45.93	50.00	-4.07	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

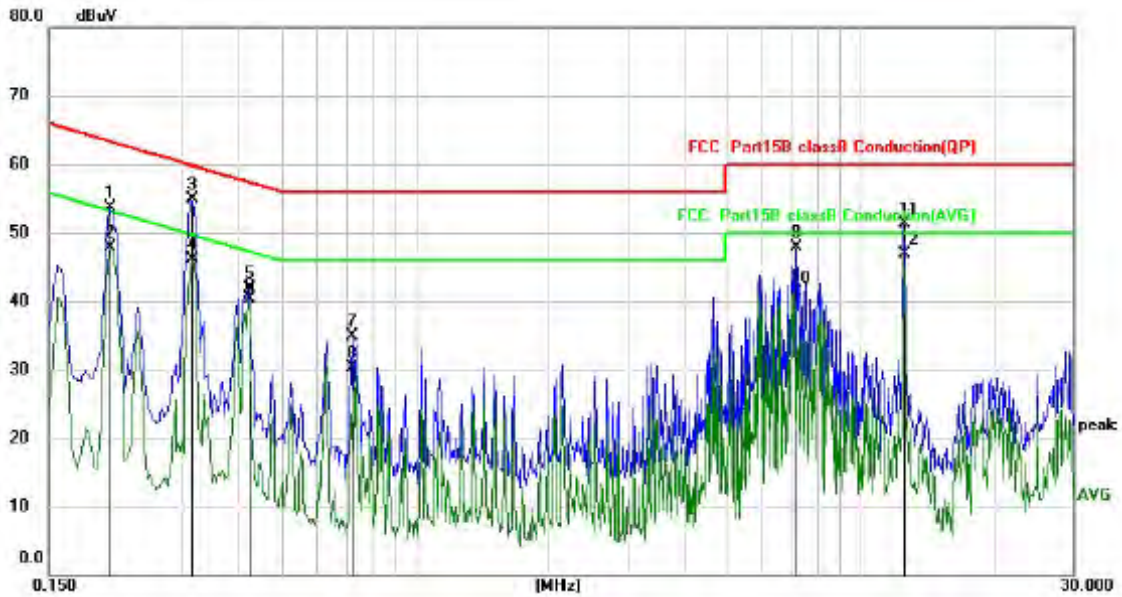

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2058	43.66	10.00	53.66	63.37	-9.71	QP
2		0.2058	37.84	10.00	47.84	53.37	-5.53	AVG
3		0.3140	44.83	9.99	54.82	59.86	-5.04	QP
4		0.3140	36.14	9.99	46.13	49.86	-3.73	AVG
5		0.4218	31.85	9.98	41.83	57.41	-15.58	QP
6		0.4218	30.33	9.98	40.31	47.41	-7.10	AVG
7		0.7217	24.86	9.97	34.83	56.00	-21.17	QP
8		0.7217	20.39	9.97	30.36	46.00	-15.64	AVG
9		7.1459	37.59	10.25	47.84	60.00	-12.16	QP
10		7.1459	31.00	10.25	41.25	50.00	-8.75	AVG
11		12.4700	40.97	10.40	51.37	60.00	-8.63	QP
12	*	12.4700	36.41	10.40	46.81	50.00	-3.19	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

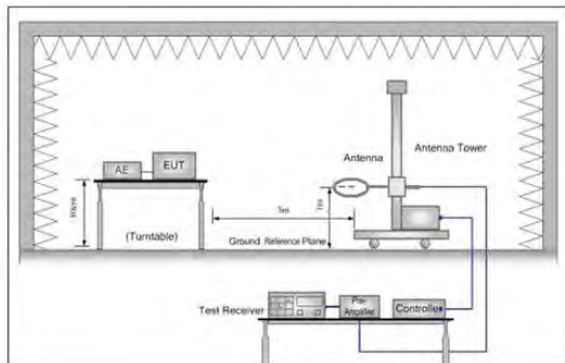


Figure 1. Below 30MHz

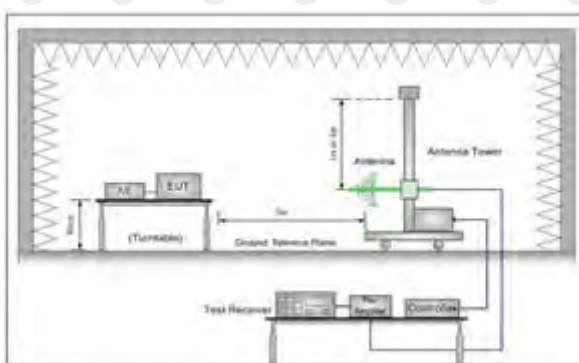


Figure 2. 30MHz to 1GHz

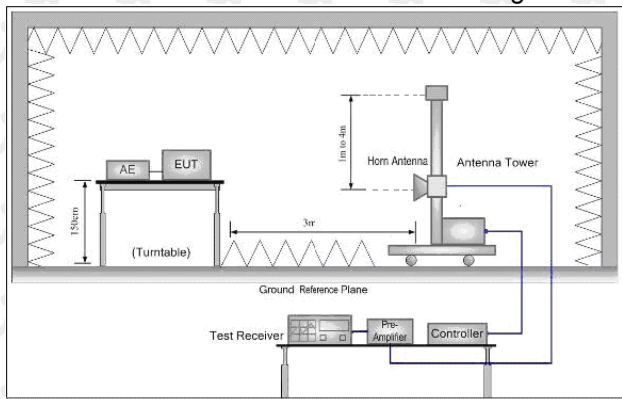


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:


Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case


Below 1GHz Test Results:
Antenna polarity: H

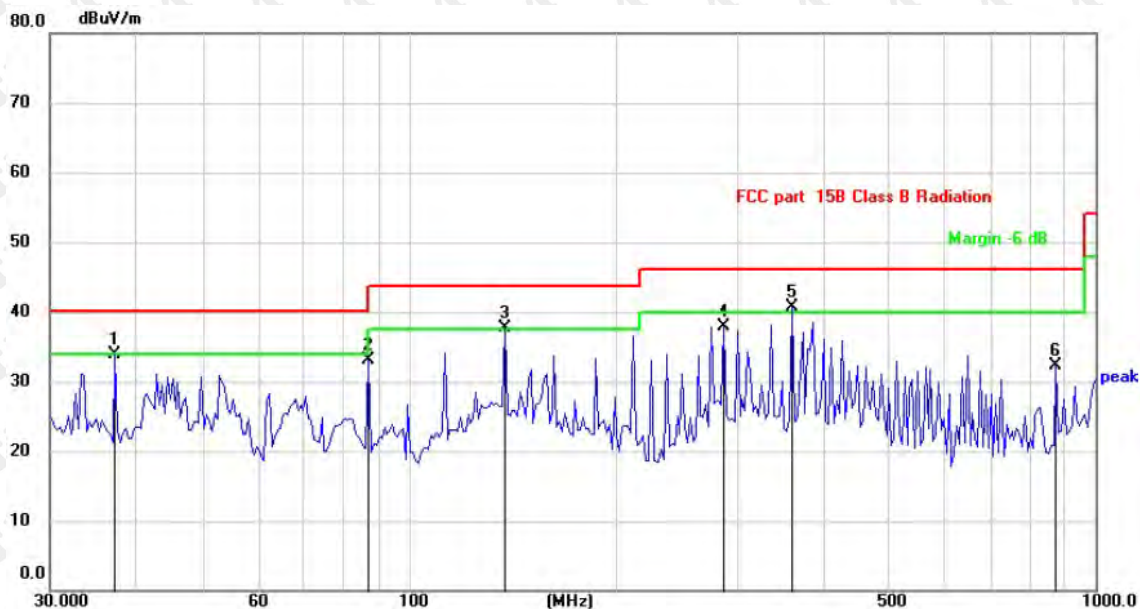

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		37.3509	40.42	-6.55	33.87	40.00	-6.13	QP
2		87.4175	43.42	-10.28	33.14	40.00	-6.86	QP
3	!	137.9028	43.44	-5.68	37.76	43.50	-5.74	QP
4		287.9904	44.00	-6.03	37.97	46.00	-8.03	QP
5	*	361.7137	44.33	-3.72	40.61	46.00	-5.39	QP
6		876.7826	25.64	6.76	32.40	46.00	-13.60	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

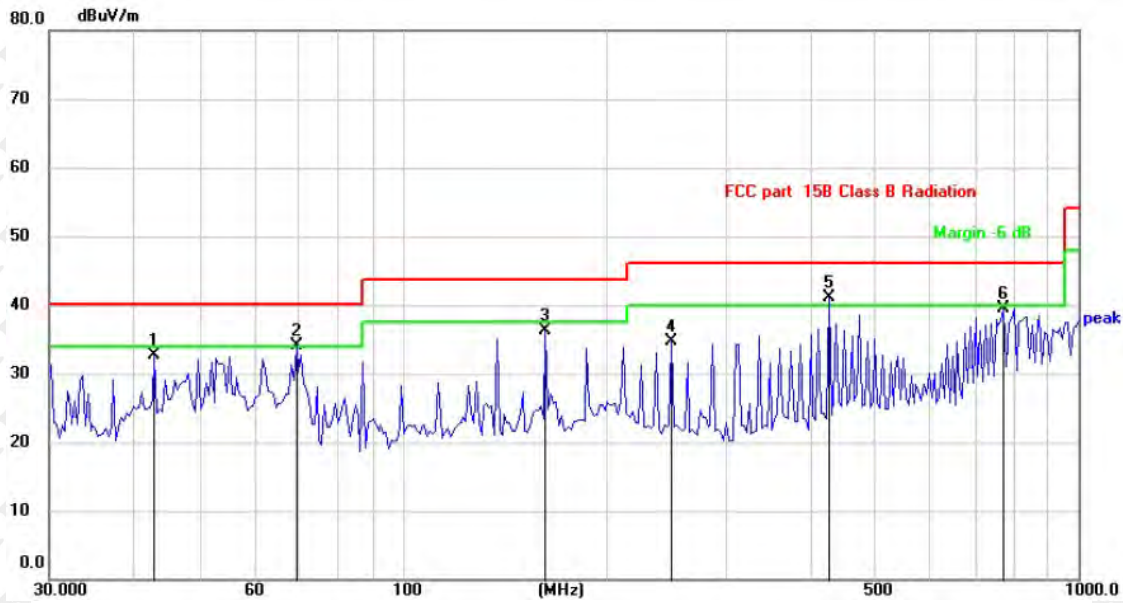

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		42.9750	39.30	-6.51	32.79	40.00	-7.21	QP
2	!	69.6003	43.14	-9.02	34.12	40.00	-5.88	QP
3		162.8959	42.19	-5.82	36.37	43.50	-7.13	QP
4		250.3009	42.51	-7.80	34.71	46.00	-11.29	QP
5	*	427.2694	42.93	-1.91	41.02	46.00	-4.98	QP
6		775.5167	34.25	5.31	39.56	46.00	-6.44	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	65.80	-3.64	62.16	74	-11.84	peak
4824	50.66	-3.64	47.02	54	-6.98	AVG
7236	59.09	-0.95	58.14	74	-15.86	peak
7236	45.19	-0.95	44.24	54	-9.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	66.43	-3.64	62.79	74	-11.21	peak
4824	48.71	-3.64	45.07	54	-8.93	AVG
7236	57.10	-0.95	56.15	74	-17.85	peak
7236	43.29	-0.95	42.34	54	-11.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.87	-3.51	61.36	74	-12.64	peak
4874	49.59	-3.51	46.08	54	-7.92	AVG
7311	57.57	-0.82	56.75	74	-17.25	peak
7311	44.88	-0.82	44.06	54	-9.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.09	-3.51	60.58	74	-13.42	peak
4874	48.92	-3.51	45.41	54	-8.59	AVG
7311	59.51	-0.82	58.69	74	-15.31	peak
7311	42.89	-0.82	42.07	54	-11.93	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.54	-3.43	59.11	74	-14.89	peak
4924	47.38	-3.43	43.95	54	-10.05	AVG
7386	59.84	-0.75	59.09	74	-14.91	peak
7386	44.42	-0.75	43.67	54	-10.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.39	-3.43	59.96	74	-14.04	peak
4924	46.91	-3.43	43.48	54	-10.52	AVG
7386	58.00	-0.75	57.25	74	-16.75	peak
7386	42.88	-0.75	42.13	54	-11.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.99	-3.64	62.35	74	-11.65	peak
4824	48.73	-3.64	45.09	54	-8.91	AVG
7236	56.70	-0.95	55.75	74	-18.25	peak
7236	44.51	-0.95	43.56	54	-10.44	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.86	-3.64	61.22	74	-12.78	peak
4824	47.69	-3.64	44.05	54	-9.95	AVG
7236	57.54	-0.95	56.59	74	-17.41	peak
7236	44.48	-0.95	43.53	54	-10.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.84	-3.51	62.33	74	-11.67	peak
4874	50.37	-3.51	46.86	54	-7.14	AVG
7311	59.10	-0.82	58.28	74	-15.72	peak
7311	45.47	-0.82	44.65	54	-9.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.07	-3.51	60.56	74	-13.44	peak
4874	47.10	-3.51	43.59	54	-10.41	AVG
7311	59.38	-0.82	58.56	74	-15.44	peak
7311	43.06	-0.82	42.24	54	-11.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.91	-3.43	61.48	74	-12.52	peak
4924	47.01	-3.43	43.58	54	-10.42	AVG
7386	59.41	-0.75	58.66	74	-15.34	peak
7386	44.07	-0.75	43.32	54	-10.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.89	-3.43	60.46	74	-13.54	peak
4924	46.89	-3.43	43.46	54	-10.54	AVG
7386	57.99	-0.75	57.24	74	-16.76	peak
7386	43.37	-0.75	42.62	54	-11.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	63.83	-3.64	60.19	74	-13.81	peak
4824	48.93	-3.64	45.29	54	-8.71	AVG
7236	57.01	-0.95	56.06	74	-17.94	peak
7236	46.09	-0.95	45.14	54	-8.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	64.59	-3.64	60.95	74	-13.05	peak
4824	48.92	-3.64	45.28	54	-8.72	AVG
7236	58.55	-0.95	57.60	74	-16.40	peak
7236	44.56	-0.95	43.61	54	-10.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	64.67	-3.51	61.16	74	-12.84	peak
4874	49.91	-3.51	46.40	54	-7.60	AVG
7311	57.85	-0.82	57.03	74	-16.97	peak
7311	45.85	-0.82	45.03	54	-8.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	63.24	-3.51	59.73	74	-14.27	peak
4874	49.04	-3.51	45.53	54	-8.47	AVG
7311	59.49	-0.82	58.67	74	-15.33	peak
7311	42.82	-0.82	42.00	54	-12.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.43	-3.43	61.00	74	-13.00	peak
4924	47.31	-3.43	43.88	54	-10.12	AVG
7386	58.44	-0.75	57.69	74	-16.31	peak
7386	44.27	-0.75	43.52	54	-10.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.70	-3.43	59.27	74	-14.73	peak
4924	47.84	-3.43	44.41	54	-9.59	AVG
7386	59.23	-0.75	58.48	74	-15.52	peak
7386	44.08	-0.75	43.33	54	-10.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	63.42	-3.63	59.79	74	-14.21	peak
4844	48.02	-3.63	44.39	54	-9.61	AVG
7266	60.14	-0.94	59.20	74	-14.80	peak
7266	46.73	-0.94	45.79	54	-8.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.53	-3.63	61.90	74	-12.10	peak
4844	47.90	-3.63	44.27	54	-9.73	AVG
7266	58.15	-0.94	57.21	74	-16.79	peak
7266	45.60	-0.94	44.66	54	-9.34	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.42	-3.51	60.91	74	-13.09	peak
4874	47.91	-3.51	44.40	54	-9.60	AVG
7311	60.00	-0.82	59.18	74	-14.82	peak
7311	46.19	-0.82	45.37	54	-8.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.29	-3.51	58.78	74	-15.22	peak
4874	46.47	-3.51	42.96	54	-11.04	AVG
7311	56.66	-0.82	55.84	74	-18.16	peak
7311	43.30	-0.82	42.48	54	-11.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.90	-3.43	59.47	74	-14.53	peak
4904	48.79	-3.43	45.36	54	-8.64	AVG
7356	56.45	-0.75	55.70	74	-18.30	peak
7356	42.33	-0.75	41.58	54	-12.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.39	-3.43	58.96	74	-15.04	peak
4904	47.68	-3.43	44.25	54	-9.75	AVG
7356	58.05	-0.75	57.30	74	-16.70	peak
7356	43.41	-0.75	42.66	54	-11.34	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.20	-5.81	51.39	74	-22.61	peak
2390	/	-5.81	/	54	/	AVG
2399	65.00	-5.84	59.16	74	-14.84	peak
2399	48.39	-5.84	42.55	54	-11.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.57	-5.81	50.76	74	-23.24	peak
2390	/	-5.81	/	54	/	AVG
2399	62.54	-5.84	56.70	74	-17.30	peak
2399	46.74	-5.84	40.90	54	-13.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.77	-5.65	51.12	74	-22.88	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.85	-5.65	51.20	74	-22.80	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.08	-5.81	52.27	74	-21.73	peak
2390	/	-5.81	/	54	/	AVG
2399	61.78	-5.84	55.94	74	-18.06	peak
2399	46.32	-5.84	40.48	54	-13.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.76	-5.81	51.95	74	-22.05	peak
2390	/	-5.81	/	54	/	AVG
2399	61.94	-5.84	56.10	74	-17.90	peak
2399	46.28	-5.84	40.44	54	-13.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.46	-5.65	50.81	74	-23.19	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.17	-5.65	52.52	74	-21.48	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.23	-5.81	50.42	74	-23.58	peak
2390	/	-5.81	/	54	/	AVG
2399	63.06	-5.84	57.22	74	-16.78	peak
2399	47.08	-5.84	41.24	54	-12.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.88	-5.81	51.07	74	-22.93	peak
2390	/	-5.81	/	54	/	AVG
2399	60.66	-5.84	54.82	74	-19.18	peak
2399	47.58	-5.84	41.74	54	-12.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.86	-5.65	51.21	74	-22.79	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.56	-5.65	50.91	74	-23.09	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.85	-5.81	52.04	74	-21.96	peak
2390	/	-5.81	/	54	/	AVG
2399	63.10	-5.84	57.26	74	-16.74	peak
2399	47.30	-5.84	41.46	54	-12.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.65	-5.81	51.84	74	-22.16	peak
2390	/	-5.81	/	54	/	AVG
2399	60.32	-5.84	54.48	74	-19.52	peak
2399	45.11	-5.84	39.27	54	-14.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.62	-5.65	50.97	74	-23.03	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.62	-5.65	51.97	74	-22.03	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

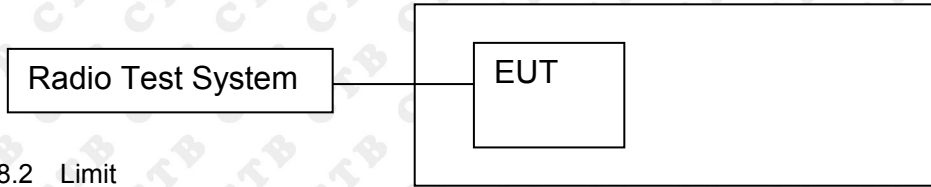

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold


8.4 Test Result
ANT1:

BAND EDGE Graphs

802.11b/LCH

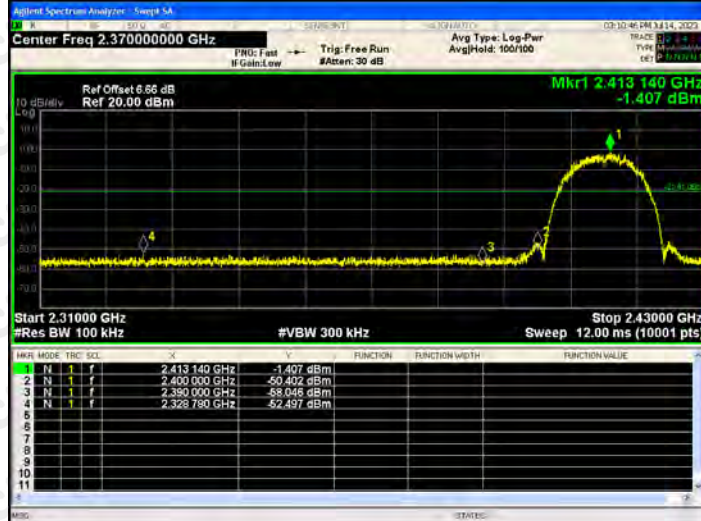


802.11b/HCH

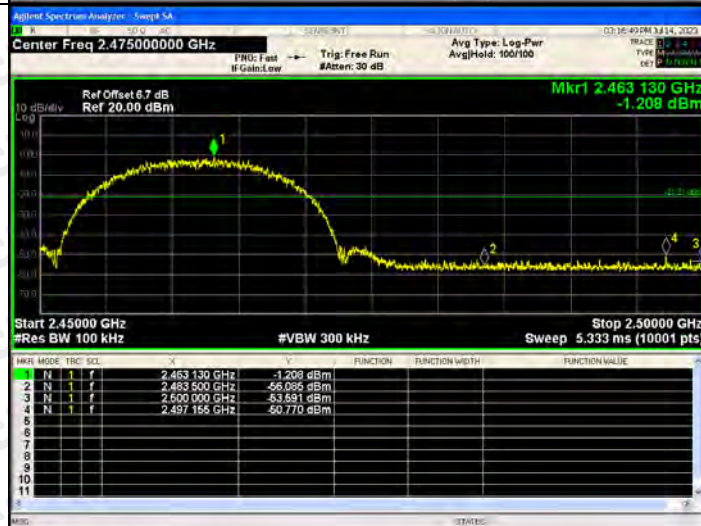


BAND EDGE Graphs

802.11g/LCH

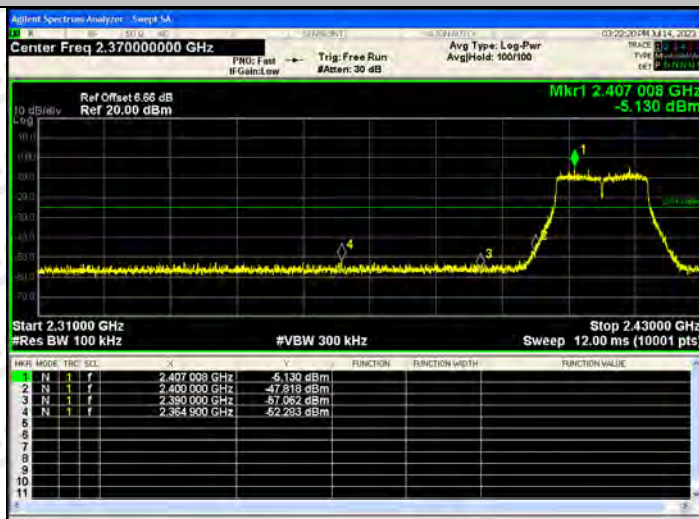


802.11g/HCH

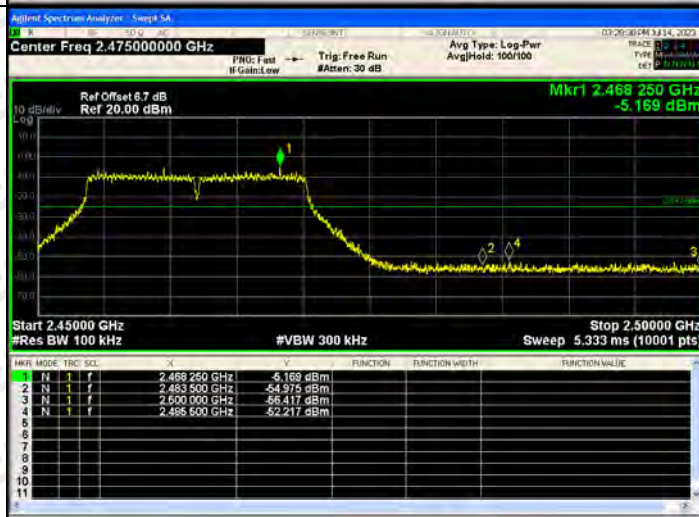


BAND EDGE Graphs

802.11n(HT20)/L
CH

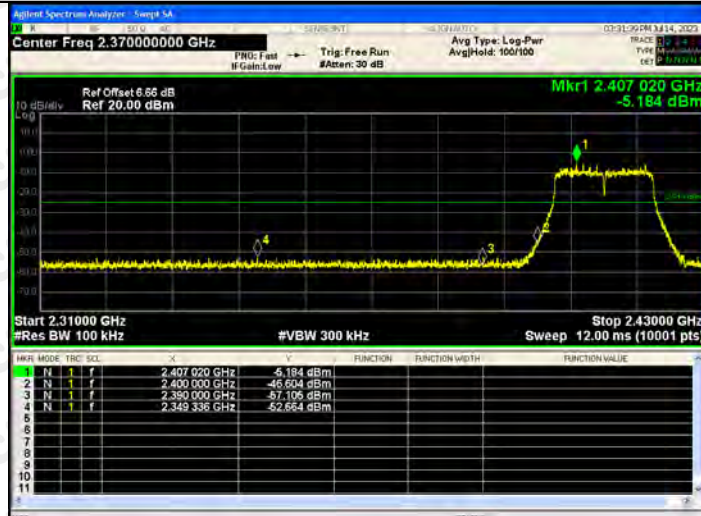


802.11n(HT20)/H
CH

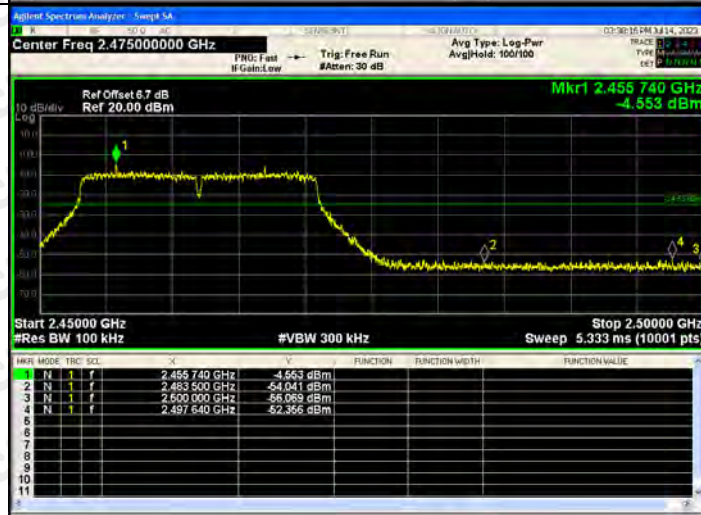

BAND EDGE Graphs

802.11n(HT40)/L
CH

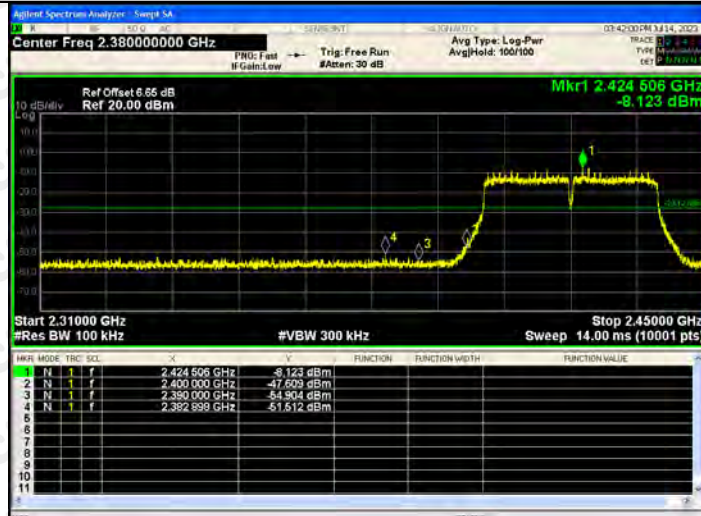

802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs






RF Conducted Spurious Emissions Graphs



RF Conducted Spurious Emissions Graphs

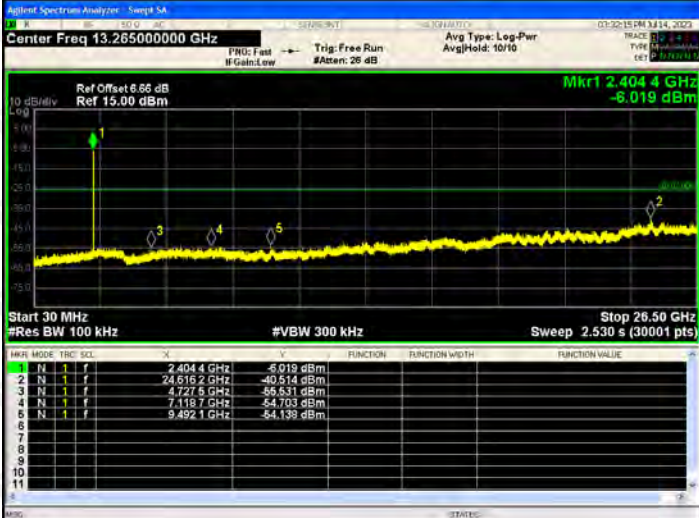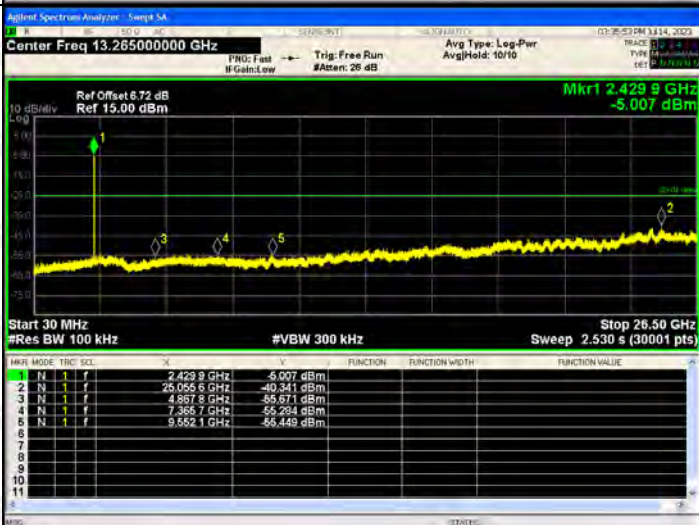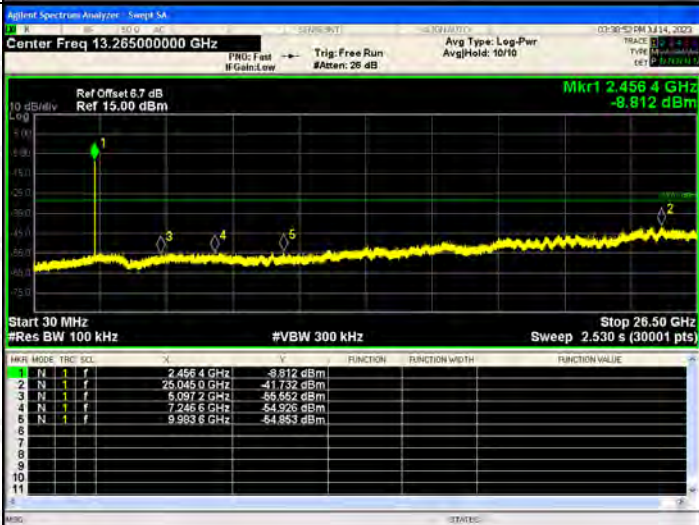
<p>802.11n (HT20)/ LCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.26500000 GHz Ref Offset 6.66 dB Ref 15.00 dBm Mkr1 2.404 GHz -6.019 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRG</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.404 GHz</td> <td></td> <td>-6.019 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.616 GHz</td> <td></td> <td>-40.514 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.727 GHz</td> <td></td> <td>-55.631 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.118 GHz</td> <td></td> <td>-54.783 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.492 GHz</td> <td></td> <td>-54.139 dBm</td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRG	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.404 GHz		-6.019 dBm	2	N	1	f	24.616 GHz		-40.514 dBm	3	N	1	f	4.727 GHz		-55.631 dBm	4	N	1	f	7.118 GHz		-54.783 dBm	5	N	1	f	9.492 GHz		-54.139 dBm	6							7							8							9							10							11						
MKR MODE	TRG	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																															
1	N	1	f	2.404 GHz		-6.019 dBm																																																																															
2	N	1	f	24.616 GHz		-40.514 dBm																																																																															
3	N	1	f	4.727 GHz		-55.631 dBm																																																																															
4	N	1	f	7.118 GHz		-54.783 dBm																																																																															
5	N	1	f	9.492 GHz		-54.139 dBm																																																																															
6																																																																																					
7																																																																																					
8																																																																																					
9																																																																																					
10																																																																																					
11																																																																																					
<p>802.11n(HT20)/MCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.26500000 GHz Ref Offset 6.72 dB Ref 15.00 dBm Mkr1 2.429 GHz -5.007 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRG</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.429 GHz</td> <td></td> <td>-5.007 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.056 GHz</td> <td></td> <td>-40.341 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.887 GHz</td> <td></td> <td>-55.671 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.386 GHz</td> <td></td> <td>-55.294 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.652 GHz</td> <td></td> <td>-55.449 dBm</td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRG	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.429 GHz		-5.007 dBm	2	N	1	f	25.056 GHz		-40.341 dBm	3	N	1	f	4.887 GHz		-55.671 dBm	4	N	1	f	7.386 GHz		-55.294 dBm	5	N	1	f	9.652 GHz		-55.449 dBm	6							7							8							9							10							11						
MKR MODE	TRG	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																															
1	N	1	f	2.429 GHz		-5.007 dBm																																																																															
2	N	1	f	25.056 GHz		-40.341 dBm																																																																															
3	N	1	f	4.887 GHz		-55.671 dBm																																																																															
4	N	1	f	7.386 GHz		-55.294 dBm																																																																															
5	N	1	f	9.652 GHz		-55.449 dBm																																																																															
6																																																																																					
7																																																																																					
8																																																																																					
9																																																																																					
10																																																																																					
11																																																																																					
<p>802.11n(HT20)/HCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.26500000 GHz Ref Offset 6.7 dB Ref 15.00 dBm Mkr1 2.456 GHz -8.812 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRG</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.456 GHz</td> <td></td> <td>-8.812 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.045 GHz</td> <td></td> <td>-41.732 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.097 GHz</td> <td></td> <td>-55.552 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.246 GHz</td> <td></td> <td>-54.326 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.593 GHz</td> <td></td> <td>-54.593 dBm</td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRG	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.456 GHz		-8.812 dBm	2	N	1	f	25.045 GHz		-41.732 dBm	3	N	1	f	5.097 GHz		-55.552 dBm	4	N	1	f	7.246 GHz		-54.326 dBm	5	N	1	f	9.593 GHz		-54.593 dBm	6							7							8							9							10							11						
MKR MODE	TRG	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																															
1	N	1	f	2.456 GHz		-8.812 dBm																																																																															
2	N	1	f	25.045 GHz		-41.732 dBm																																																																															
3	N	1	f	5.097 GHz		-55.552 dBm																																																																															
4	N	1	f	7.246 GHz		-54.326 dBm																																																																															
5	N	1	f	9.593 GHz		-54.593 dBm																																																																															
6																																																																																					
7																																																																																					
8																																																																																					
9																																																																																					
10																																																																																					
11																																																																																					
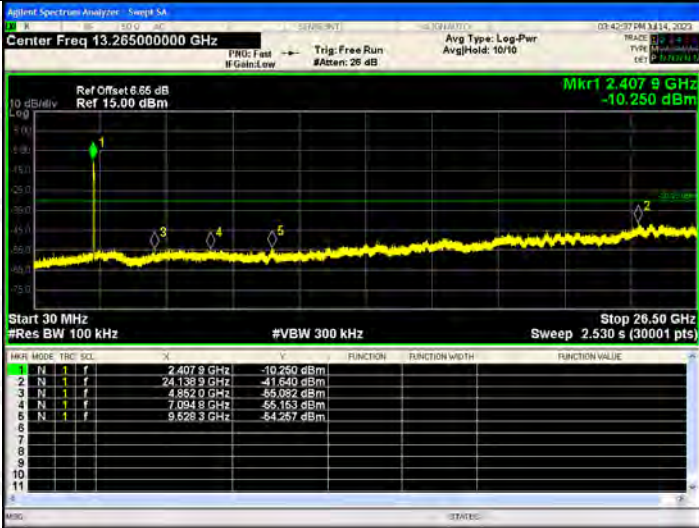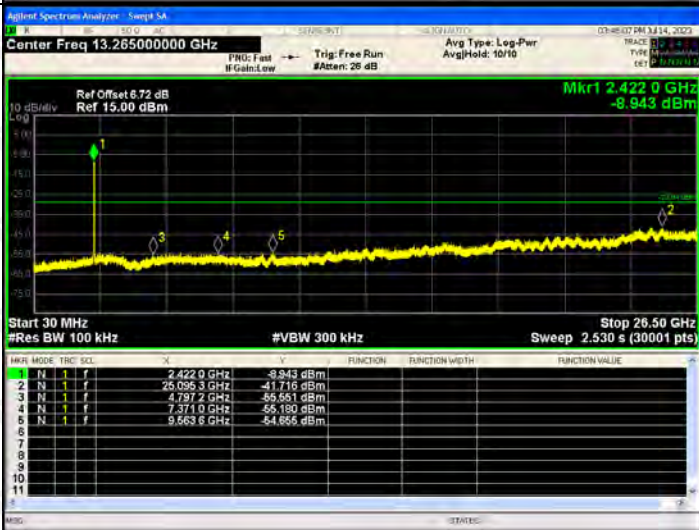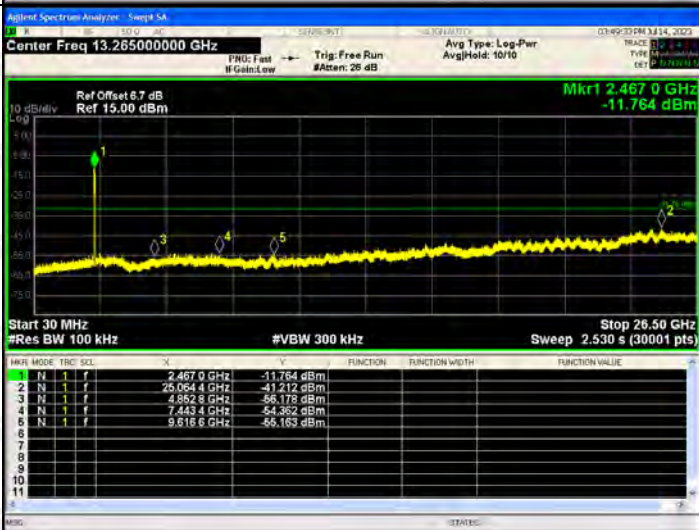
<p>802.11n (HT40)/ LCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TBC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4079 GHz</td> <td>-10.250 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.1389 GHz</td> <td>-41.540 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8520 GHz</td> <td>-55.052 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.0948 GHz</td> <td>-55.153 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6283 GHz</td> <td>-54.257 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TBC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4079 GHz	-10.250 dBm				2	N	1	f	24.1389 GHz	-41.540 dBm				3	N	1	f	4.8520 GHz	-55.052 dBm				4	N	1	f	7.0948 GHz	-55.153 dBm				5	N	1	f	9.6283 GHz	-54.257 dBm				
MKR	MODE	TBC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4079 GHz	-10.250 dBm																																																			
2	N	1	f	24.1389 GHz	-41.540 dBm																																																			
3	N	1	f	4.8520 GHz	-55.052 dBm																																																			
4	N	1	f	7.0948 GHz	-55.153 dBm																																																			
5	N	1	f	9.6283 GHz	-54.257 dBm																																																			
<p>802.11n (HT40)/ MCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TBC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4220 GHz</td> <td>-9.943 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.0953 GHz</td> <td>-41.716 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8972 GHz</td> <td>-55.551 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3710 GHz</td> <td>-55.150 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5656 GHz</td> <td>-54.555 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TBC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4220 GHz	-9.943 dBm				2	N	1	f	25.0953 GHz	-41.716 dBm				3	N	1	f	4.8972 GHz	-55.551 dBm				4	N	1	f	7.3710 GHz	-55.150 dBm				5	N	1	f	9.5656 GHz	-54.555 dBm				
MKR	MODE	TBC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4220 GHz	-9.943 dBm																																																			
2	N	1	f	25.0953 GHz	-41.716 dBm																																																			
3	N	1	f	4.8972 GHz	-55.551 dBm																																																			
4	N	1	f	7.3710 GHz	-55.150 dBm																																																			
5	N	1	f	9.5656 GHz	-54.555 dBm																																																			
<p>802.11n (HT40)/ HCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TBC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4670 GHz</td> <td>-11.764 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.0644 GHz</td> <td>-41.212 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8528 GHz</td> <td>-55.178 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4434 GHz</td> <td>-54.352 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6156 GHz</td> <td>-55.153 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TBC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4670 GHz	-11.764 dBm				2	N	1	f	25.0644 GHz	-41.212 dBm				3	N	1	f	4.8528 GHz	-55.178 dBm				4	N	1	f	7.4434 GHz	-54.352 dBm				5	N	1	f	9.6156 GHz	-55.153 dBm				
MKR	MODE	TBC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4670 GHz	-11.764 dBm																																																			
2	N	1	f	25.0644 GHz	-41.212 dBm																																																			
3	N	1	f	4.8528 GHz	-55.178 dBm																																																			
4	N	1	f	7.4434 GHz	-54.352 dBm																																																			
5	N	1	f	9.6156 GHz	-55.153 dBm																																																			


ANT2:

BAND EDGE Graphs

802.11b/LCH

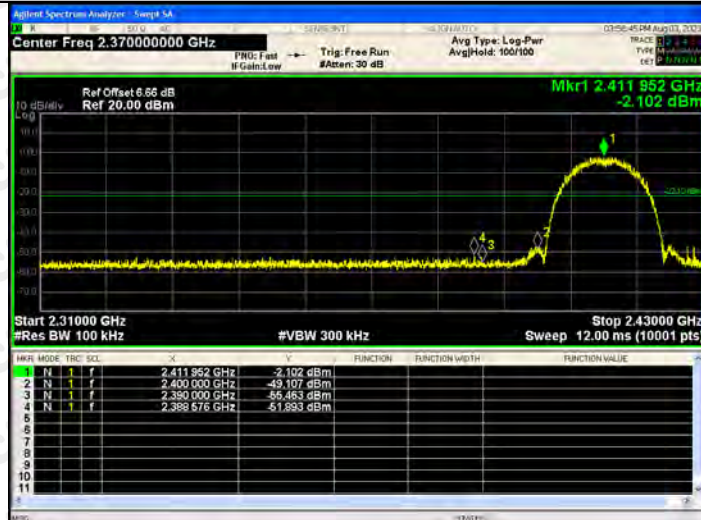


802.11b/HCH

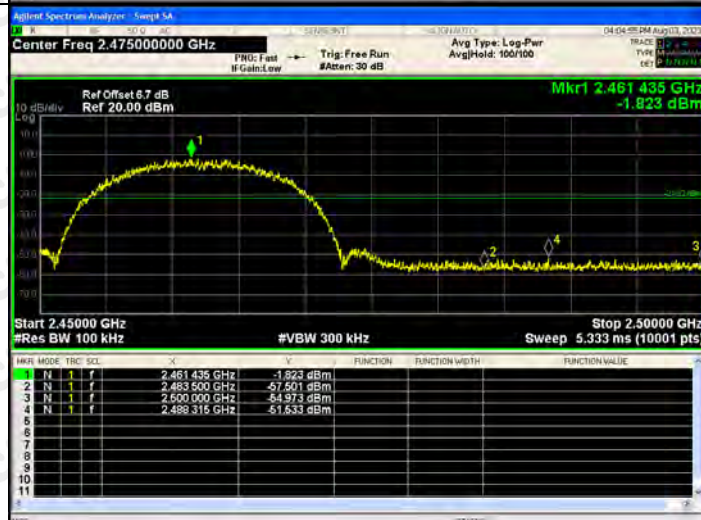


BAND EDGE Graphs

802.11g/LCH

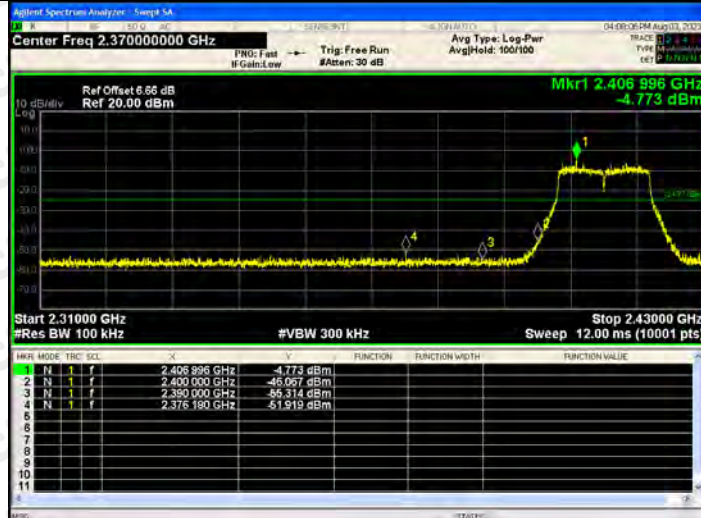


802.11g/HCH

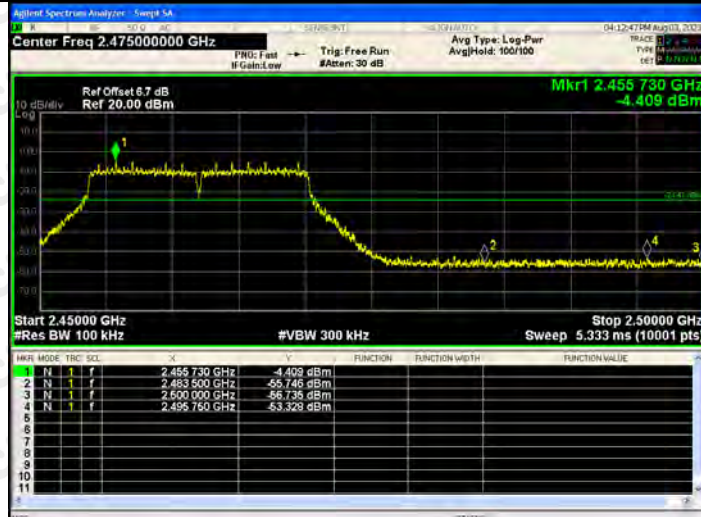


BAND EDGE Graphs

802.11n(HT20)/L
CH

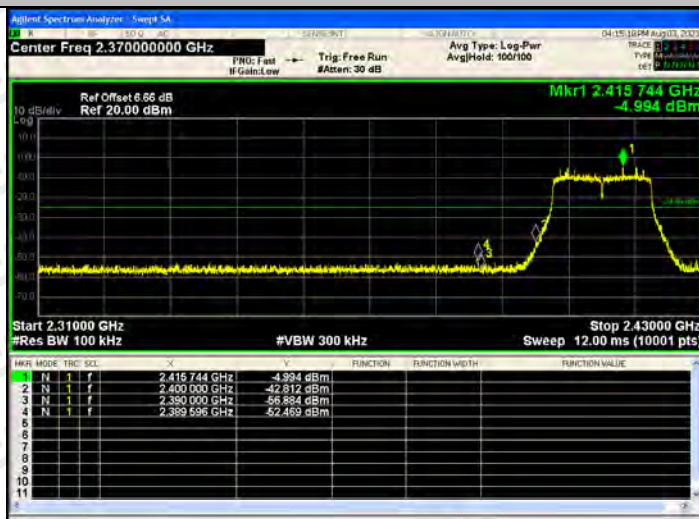


802.11n(HT20)/H
CH

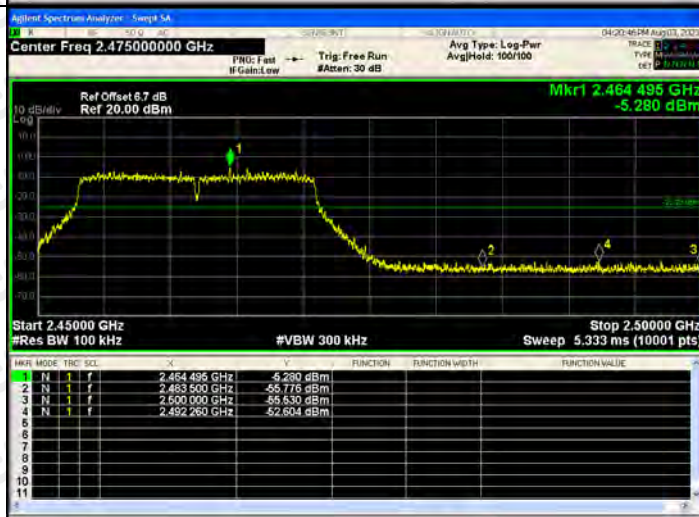

BAND EDGE Graphs



802.11n(HT40)/L
CH

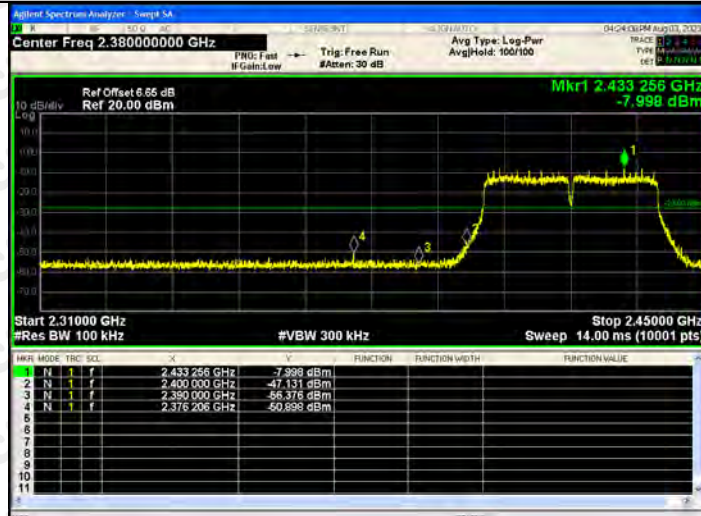

802.11n(HT40)/H
CH




RF Conducted Spurious Emissions Graphs
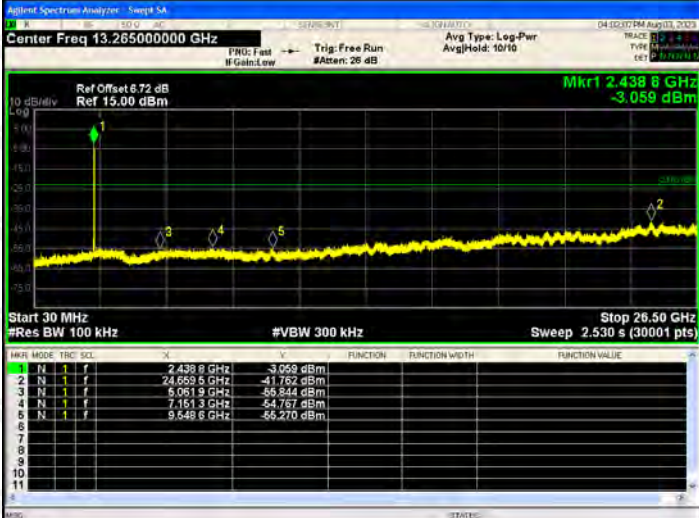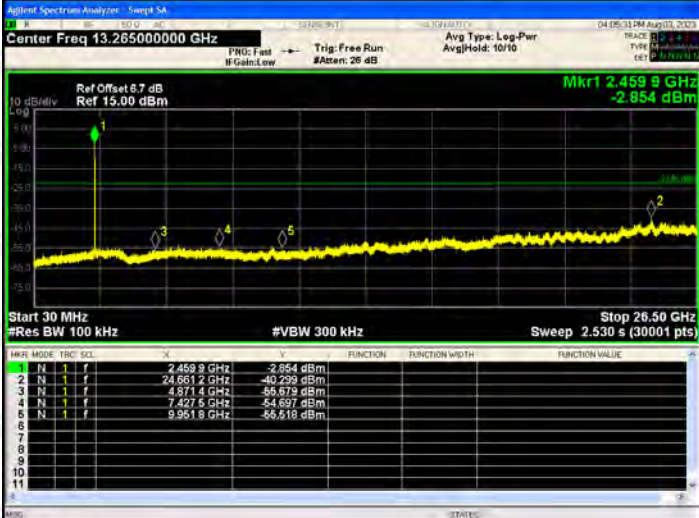
<p>802.11b /LCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.66 dB Ref 15.00 dBm Mkr1 2.411 4 GHz -2.238 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Freq</th> <th>Power</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.411 4 GHz</td> <td>-2.238 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>25.036 2 GHz</td> <td>-41.595 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>4.948 4 GHz</td> <td>-58.019 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.061 3 GHz</td> <td>-54.665 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.669 4 GHz</td> <td>-54.364 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Freq	Power	Function	Function Width	Function Value	1	N	2.411 4 GHz	-2.238 dBm				2	N	25.036 2 GHz	-41.595 dBm				3	N	4.948 4 GHz	-58.019 dBm				4	N	7.061 3 GHz	-54.665 dBm				5	N	9.669 4 GHz	-54.364 dBm			
Mkr	Mode	Freq	Power	Function	Function Width	Function Value																																					
1	N	2.411 4 GHz	-2.238 dBm																																								
2	N	25.036 2 GHz	-41.595 dBm																																								
3	N	4.948 4 GHz	-58.019 dBm																																								
4	N	7.061 3 GHz	-54.665 dBm																																								
5	N	9.669 4 GHz	-54.364 dBm																																								
<p>802.11b /MCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.72 dB Ref 15.00 dBm Mkr1 2.438 8 GHz -3.059 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Freq</th> <th>Power</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.438 8 GHz</td> <td>-3.059 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.669 5 GHz</td> <td>-41.762 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>5.061 9 GHz</td> <td>-58.844 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.151 3 GHz</td> <td>-54.767 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.549 5 GHz</td> <td>-55.270 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Freq	Power	Function	Function Width	Function Value	1	N	2.438 8 GHz	-3.059 dBm				2	N	24.669 5 GHz	-41.762 dBm				3	N	5.061 9 GHz	-58.844 dBm				4	N	7.151 3 GHz	-54.767 dBm				5	N	9.549 5 GHz	-55.270 dBm			
Mkr	Mode	Freq	Power	Function	Function Width	Function Value																																					
1	N	2.438 8 GHz	-3.059 dBm																																								
2	N	24.669 5 GHz	-41.762 dBm																																								
3	N	5.061 9 GHz	-58.844 dBm																																								
4	N	7.151 3 GHz	-54.767 dBm																																								
5	N	9.549 5 GHz	-55.270 dBm																																								
<p>802.11b /HCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.7 dB Ref 15.00 dBm Mkr1 2.459 9 GHz -2.854 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Freq</th> <th>Power</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.459 9 GHz</td> <td>-2.854 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.661 2 GHz</td> <td>-40.259 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>4.871 4 GHz</td> <td>-58.679 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.427 5 GHz</td> <td>-54.697 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.951 9 GHz</td> <td>-56.519 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Freq	Power	Function	Function Width	Function Value	1	N	2.459 9 GHz	-2.854 dBm				2	N	24.661 2 GHz	-40.259 dBm				3	N	4.871 4 GHz	-58.679 dBm				4	N	7.427 5 GHz	-54.697 dBm				5	N	9.951 9 GHz	-56.519 dBm			
Mkr	Mode	Freq	Power	Function	Function Width	Function Value																																					
1	N	2.459 9 GHz	-2.854 dBm																																								
2	N	24.661 2 GHz	-40.259 dBm																																								
3	N	4.871 4 GHz	-58.679 dBm																																								
4	N	7.427 5 GHz	-54.697 dBm																																								
5	N	9.951 9 GHz	-56.519 dBm																																								

RF Conducted Spurious Emissions Graphs




RF Conducted Spurious Emissions Graphs

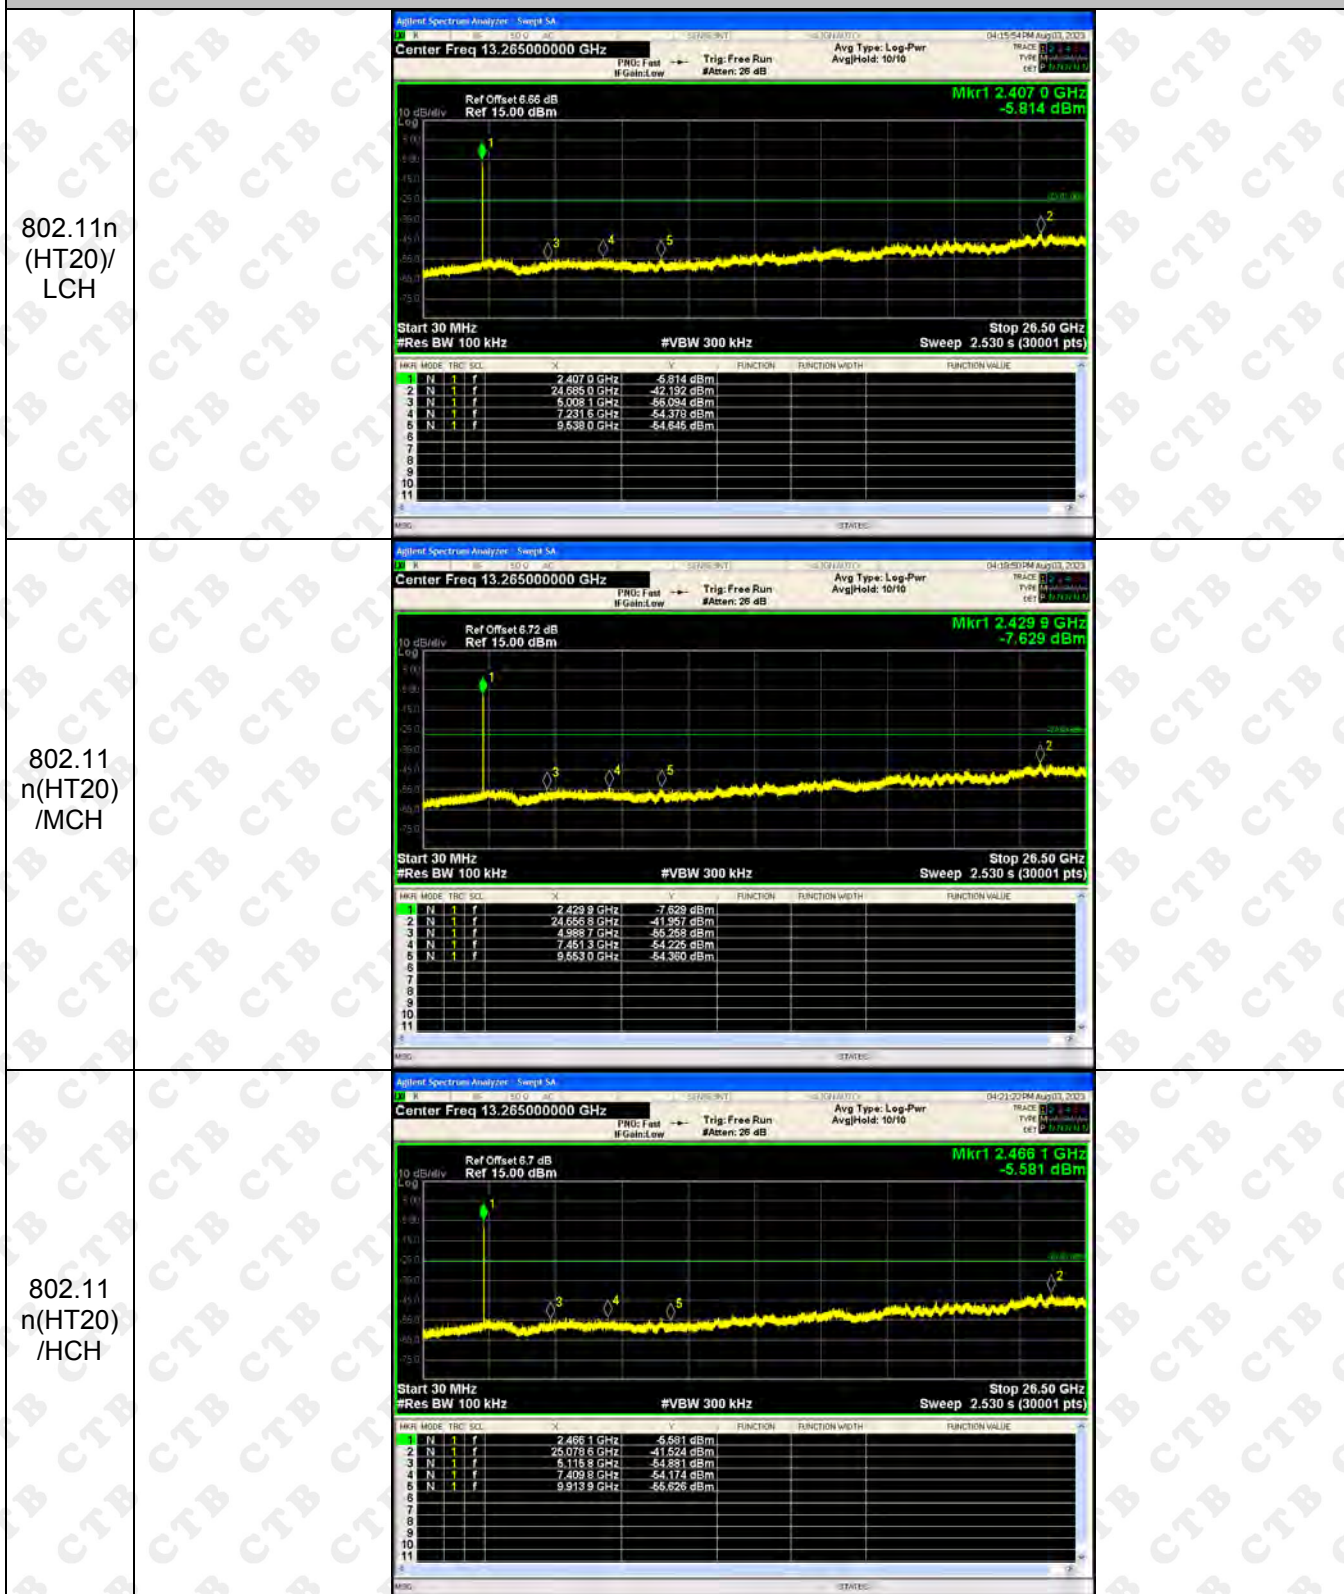


RF Conducted Spurious Emissions Graphs


802.11
n(HT40)
/LCH

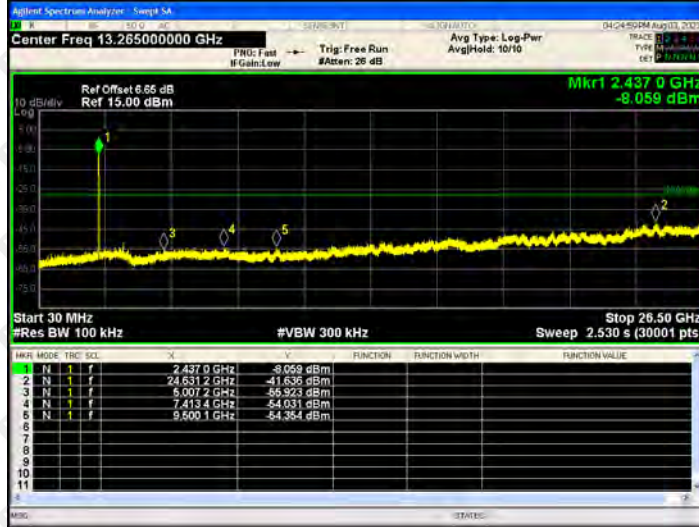

802.11
n(HT40)
/MCH

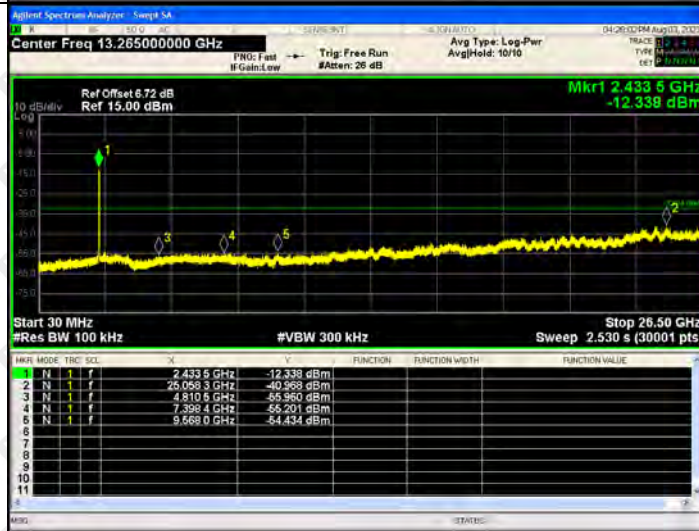


802.11
n(HT40)
/HCH

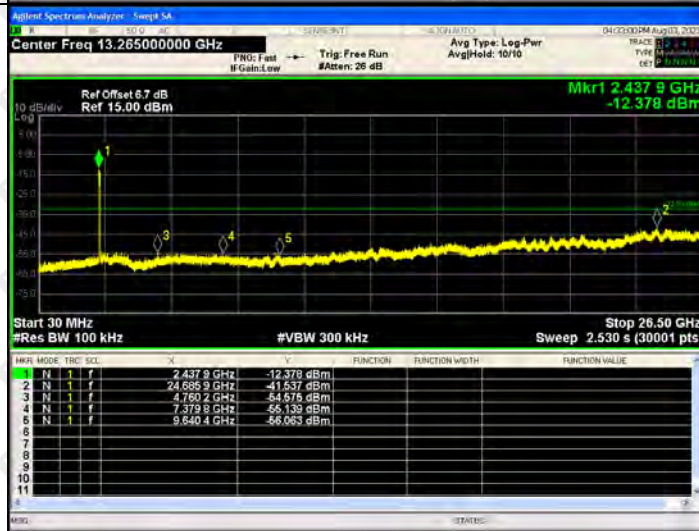

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

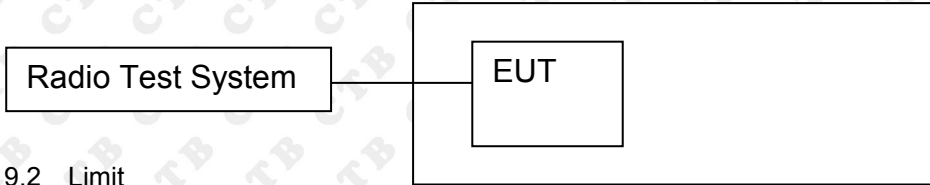

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	14.181	14.423	/	30
	MCH	14.552	14.409	/	30
	HCH	14.244	14.199	/	30
802.11g	LCH	13.314	13.344	/	30
	MCH	13.848	13.831	/	30
	HCH	13.26	13.456	/	30
802.11n(HT20)	LCH	13.605	13.339	16.484	30
	MCH	13.981	13.807	16.905	30
	HCH	13.241	13.4	16.332	30
802.11n(HT40)	LCH	12.562	12.903	15.746	30
	MCH	12.596	12.734	15.676	30
	HCH	12.802	12.392	15.612	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

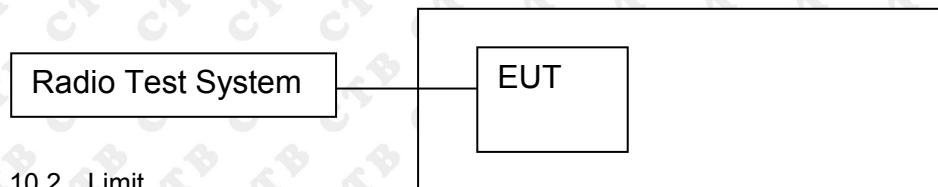

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.709	500	PASS
	MCH	10.503	500	PASS
	HCH	11.093	500	PASS
802.11g	LCH	16.395	500	PASS
	MCH	16.406	500	PASS
	HCH	16.34	500	PASS
802.11n(HT20)	LCH	17.087	500	PASS
	MCH	17.543	500	PASS
	HCH	16.914	500	PASS
802.11n(HT40)	LCH	35.404	500	PASS
	MCH	35.451	500	PASS
	HCH	35.979	500	PASS


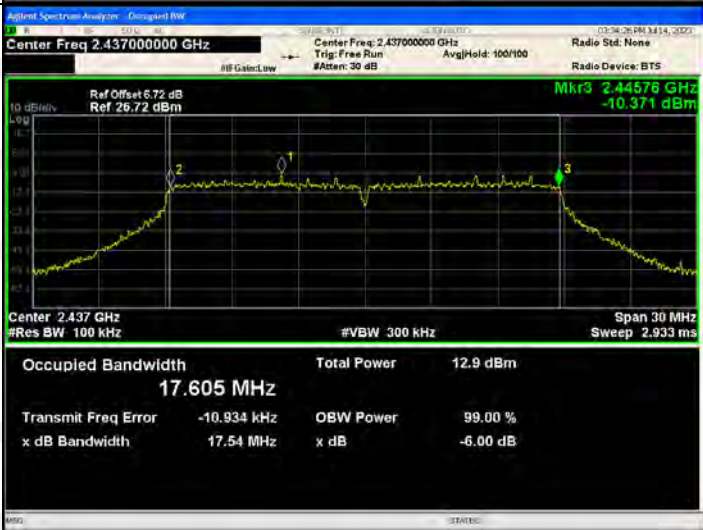

ANT2:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.128	500	PASS
	MCH	10.597	500	PASS
	HCH	10.22	500	PASS
802.11g	LCH	16.428	500	PASS
	MCH	16.079	500	PASS
	HCH	16.316	500	PASS
802.11n(HT20)	LCH	17.32	500	PASS
	MCH	17.298	500	PASS
	HCH	17.388	500	PASS
802.11n(HT40)	LCH	35.802	500	PASS
	MCH	36.462	500	PASS
	HCH	36.467	500	PASS

ANT1:
Test Graph:

Graphs																			
<p>802.11b /LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3: 2.417356 GHz -9.9280 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.4 dBm</td> </tr> <tr> <td>14.944 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>929 Hz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>10.71 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	15.4 dBm	14.944 MHz			Transmit Freq Error	OBW Power	99.00 %	929 Hz			x dB Bandwidth	x dB	-6.00 dB	10.71 MHz		
Occupied Bandwidth	Total Power	15.4 dBm																	
14.944 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
929 Hz																			
x dB Bandwidth	x dB	-6.00 dB																	
10.71 MHz																			
<p>802.11b /MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.442207 GHz -9.4395 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>16.1 dBm</td> </tr> <tr> <td>14.783 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-44.314 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>10.50 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	16.1 dBm	14.783 MHz			Transmit Freq Error	OBW Power	99.00 %	-44.314 kHz			x dB Bandwidth	x dB	-6.00 dB	10.50 MHz		
Occupied Bandwidth	Total Power	16.1 dBm																	
14.783 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-44.314 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
10.50 MHz																			
<p>802.11b/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.46752 GHz -10.043 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.7 dBm</td> </tr> <tr> <td>14.811 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-26.008 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>11.09 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	15.7 dBm	14.811 MHz			Transmit Freq Error	OBW Power	99.00 %	-26.008 kHz			x dB Bandwidth	x dB	-6.00 dB	11.09 MHz		
Occupied Bandwidth	Total Power	15.7 dBm																	
14.811 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-26.008 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
11.09 MHz																			

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 6.66 dB Ref 26.66 dBm</p> <p>Mkr3 2.420185 GHz -11.747 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.453 MHz</p> <p>Total Power 12.1 dBm</p> <p>Transmit Freq Error -12.649 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.40 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm</p> <p>Mkr3 2.445186 GHz -11.444 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.443 MHz</p> <p>Total Power 12.7 dBm</p> <p>Transmit Freq Error -16.829 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.41 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 6.7 dB Ref 26.70 dBm</p> <p>Mkr3 2.470156 GHz -10.621 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.433 MHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error -14.403 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.34 MHz</p> <p>x dB -6.00 dB</p>

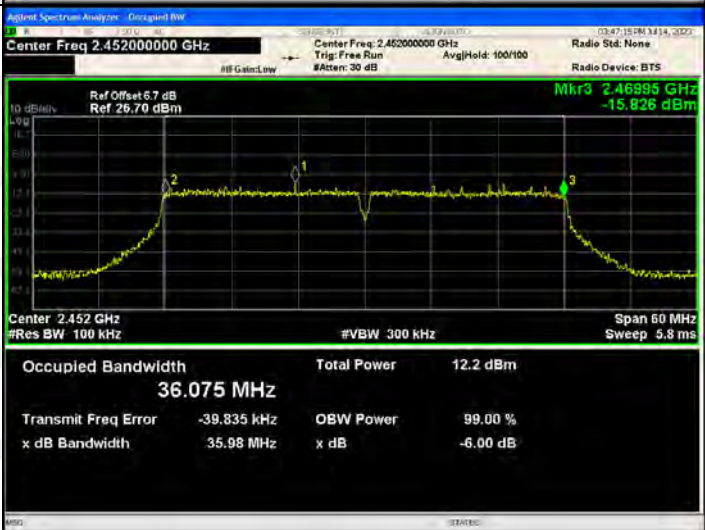

<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3: 2.420542 GHz -10.984 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">17.598 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	17.598 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.6 dBm											
17.598 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.44576 GHz -10.371 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.9 dBm</td> </tr> <tr> <td colspan="3">17.605 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.9 dBm	17.605 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.9 dBm											
17.605 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.470441 GHz -11.369 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.2 dBm</td> </tr> <tr> <td colspan="3">17.630 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.2 dBm	17.630 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.2 dBm											
17.630 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

<p>802.11n(HT40)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.42200000 GHz</p> <p>Ref Offset: 6.65 dB Ref: 26.65 dBm</p> <p>Mkr3: 2.439726 GHz -13.785 dBm</p> <p>Center: 2.422 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td colspan="3">36.022 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.1 dBm	36.022 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.1 dBm											
36.022 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT40)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.454892 GHz -14.690 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td colspan="3">36.036 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.1 dBm	36.036 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.1 dBm											
36.036 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT40)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.45200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.46895 GHz -15.826 dBm</p> <p>Center: 2.452 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.2 dBm</td> </tr> <tr> <td colspan="3">36.075 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.2 dBm	36.075 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.2 dBm											
36.075 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

ANT2:
Test Graph:

Graphs	
<p>802.11b /LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.66 dB</p> <p>Ref: 26.66 dBm</p> <p>Mkr3: 2.417029 GHz</p> <p>-8.5023 dBm</p> <p>Center: 2.412 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 14.992 MHz</p> <p>Total Power: 15.4 dBm</p> <p>Transmit Freq Error: -35.083 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 10.13 MHz</p> <p>x dB: -6.00 dB</p>
<p>802.11b /MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3: 2.442256 GHz</p> <p>-8.9707 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 14.822 MHz</p> <p>Total Power: 15.8 dBm</p> <p>Transmit Freq Error: -42.230 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 10.60 MHz</p> <p>x dB: -6.00 dB</p>
<p>802.11b/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB</p> <p>Ref: 26.70 dBm</p> <p>Mkr3: 2.467112 GHz</p> <p>-8.2045 dBm</p> <p>Center: 2.462 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 14.818 MHz</p> <p>Total Power: 15.5 dBm</p> <p>Transmit Freq Error: 1.673 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 10.22 MHz</p> <p>x dB: -6.00 dB</p>


<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3 2.42022 GHz -12.502 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td colspan="3">16.459 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.1 dBm	16.459 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	
Occupied Bandwidth	Total Power	12.1 dBm												
16.459 MHz														
Transmit Freq Error	OBW Power	99.00 %												
x dB Bandwidth	x dB	-6.00 dB												
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3 2.44503 GHz -11.178 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.7 dBm</td> </tr> <tr> <td colspan="3">16.436 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.7 dBm	16.436 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	
Occupied Bandwidth	Total Power	12.7 dBm												
16.436 MHz														
Transmit Freq Error	OBW Power	99.00 %												
x dB Bandwidth	x dB	-6.00 dB												
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3 2.470149 GHz -10.910 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.5 dBm</td> </tr> <tr> <td colspan="3">16.467 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.5 dBm	16.467 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	
Occupied Bandwidth	Total Power	12.5 dBm												
16.467 MHz														
Transmit Freq Error	OBW Power	99.00 %												
x dB Bandwidth	x dB	-6.00 dB												

<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3: 2.420856 GHz -12.251 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.3 dBm</td> </tr> <tr> <td colspan="3">17.599 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.3 dBm	17.599 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.3 dBm											
17.599 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.445636 GHz -12.589 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.7 dBm</td> </tr> <tr> <td colspan="3">17.598 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.7 dBm	17.598 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.7 dBm											
17.598 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.470685 GHz -11.124 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.5 dBm</td> </tr> <tr> <td colspan="3">17.589 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.5 dBm	17.589 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.5 dBm											
17.589 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.42200000 GHz</p> <p>Ref Offset: 6.65 dB Ref: 26.65 dBm</p> <p>Mkr3: 2.439892 GHz -13.917 dBm</p> <p>Center: 2.422 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.4 dBm</td> </tr> <tr> <td colspan="3">36.011 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.4 dBm	36.011 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.4 dBm											
36.011 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.455211 GHz -18.296 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.4 dBm</td> </tr> <tr> <td colspan="3">36.041 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	11.4 dBm	36.041 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	11.4 dBm											
36.041 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.45200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.470187 GHz -17.023 dBm</p> <p>Center: 2.452 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.3 dBm</td> </tr> <tr> <td colspan="3">36.073 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	11.3 dBm	36.073 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	11.3 dBm											
36.073 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

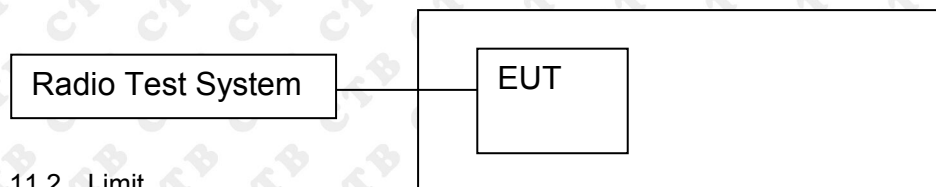

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




11.4 Test Result

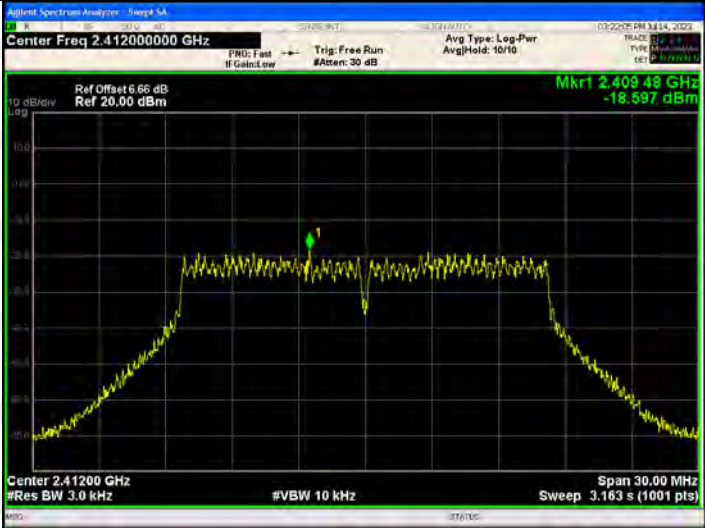


Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	-15.229	-15.724	/	8
	MCH	-14.866	-15.225	/	8
	HCH	-15.431	-15.84	/	8
802.11g	LCH	-18.597	-19.179	/	8
	MCH	-18.718	-18.261	/	8
	HCH	-18.809	-19.502	/	8
802.11n(H T20)	LCH	-17.794	-18.186	-14.975	8
	MCH	-18.176	-18.329	-15.242	8
	HCH	-19.689	-19.17	-16.411	8
802.11n(H T40)	LCH	-22.521	-22.087	-19.288	8
	MCH	-22.607	-23.673	-20.097	8
	HCH	-22.726	-24.685	-20.586	8

ANT1:
Test Graph

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.413 77 GHz -15.228 dBm Center 2.412000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.438 74 GHz -14.886 dBm Center 2.437000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.462000000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.461 95 GHz -15.431 dBm Center 2.462000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

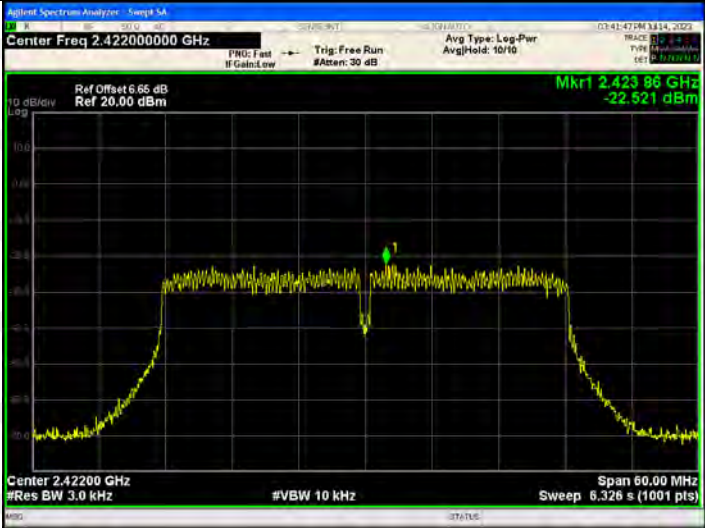


<p>802.11g/LCH</p>	
<p>802.11g/MCH</p>	
<p>802.11g/HCH</p>	




<p>802.11n(HT20)/LC H</p>	
<p>802.11n(HT20)/MC H</p>	
<p>802.11n(HT20)/HC H</p>	




<p>802.11n(HT40)/LC H</p>	
<p>802.11n(HT40)/MC H</p>	
<p>802.11n(HT40)/HC H</p>	

**ANT 2:
Test Graph**

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.410 20 GHz -15.724 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.436 91 GHz -15.226 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.460 20 GHz -15.840 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
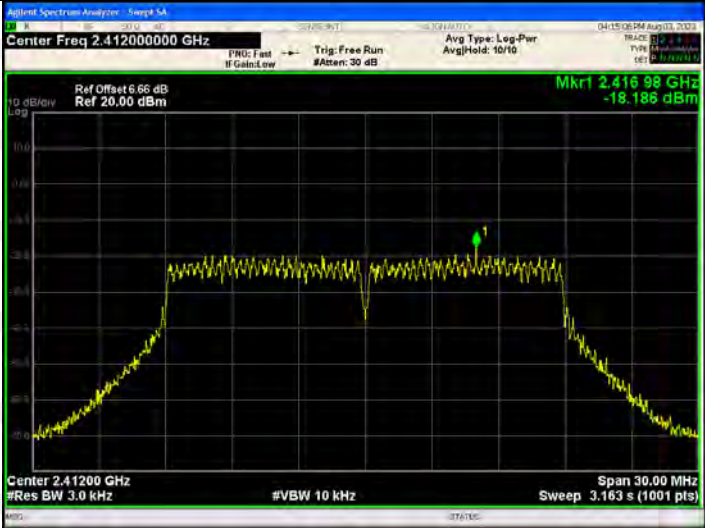
<p>802.11g/LCH</p>	
<p>802.11g/MCH</p>	
<p>802.11g/HCH</p>	

<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.86 dB Ref 20.00 dBm Mkr1 2.416 98 GHz -18.186 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.441 98 GHz -18.329 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.468 27 GHz -18.170 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
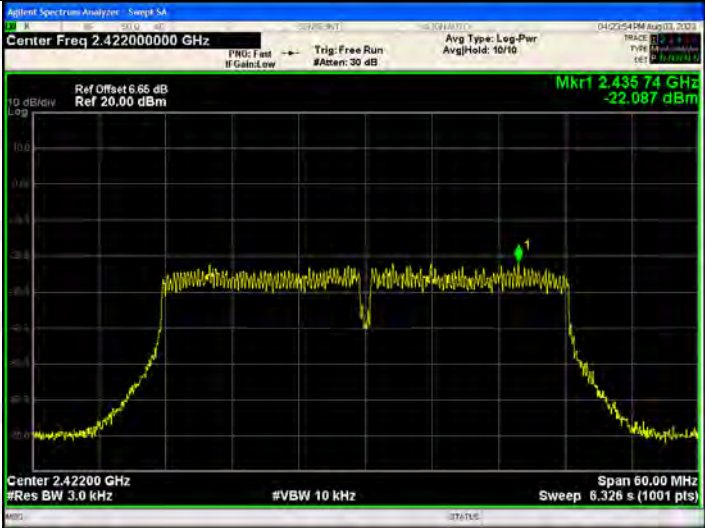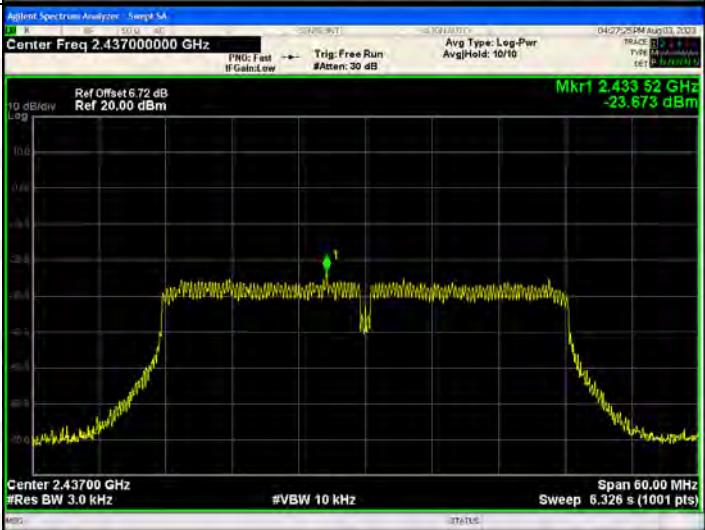
<p>802.11n(HT40)/LC H</p>		
<p>802.11n(HT40)/MC H</p>		
<p>802.11n(HT40)/HC H</p>		

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Rod antenna and no consideration of replacement. The best case gain of the antenna is 2.05dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G



Above 1G



Conducted Emission

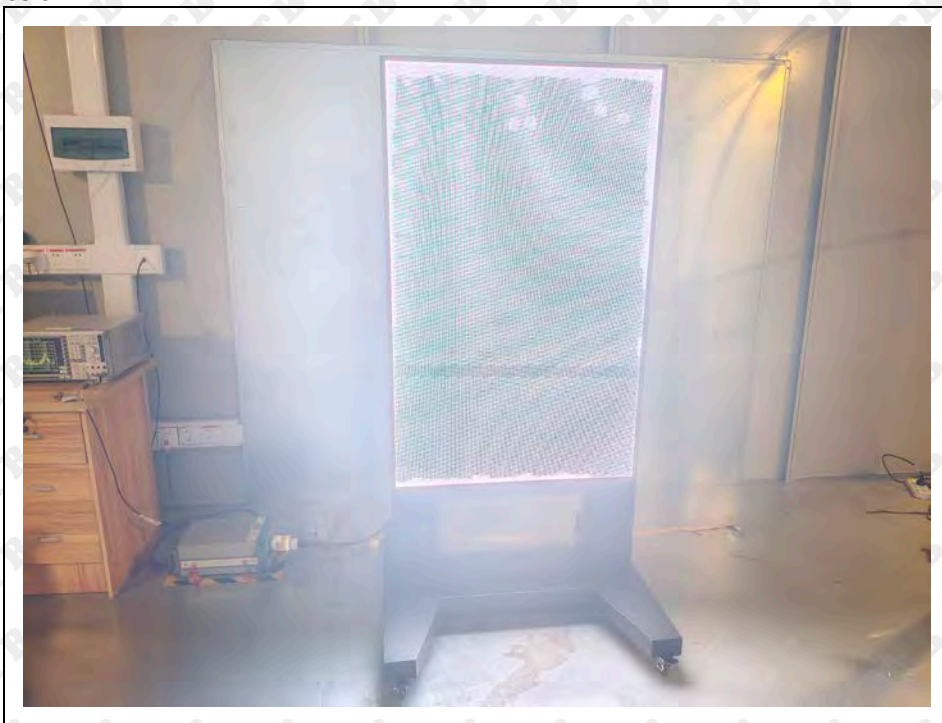

※※※※ END OF REPORT ※※※※