


LED Table Lamp User Manual

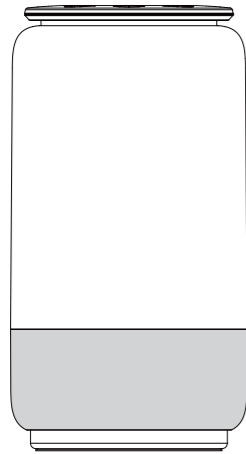

Thank you for purchasing BELL series LED Table Lamp. Please read this user manual carefully and keep it for future reference. If you need any assistance, please contact our service team with your product model.


Package Includes

- LED Table Lamp
- AC Adapter
- User Manual


Specification

Model	KT-B01A
Wattage	5W
Adapter Input	100-240V/AC 50/60Hz
Adapter Output	5V/1A
Current Ripple	Flicker Free ±3%
Network	WiFi IEEE802.11b/g/n(2.4GHz)
Luminous Flux / Intensity	450lm@4000K, Red:7.2cd, Green:12cd, Blue:6.6cd
CCT / Color	2000K-4000K / 16 Million Colors
CRI	Ra:>80, Ra:>90@2000K/3000K
IP Protection	IP20
Operation Temperature	-20°C~40°C/-4°F~104°F
Lifetime	30,000hrs
Dimensions	4.3" X 4.3" X 8.3" (110mm X 110mm X 210mm)

Product Diagram

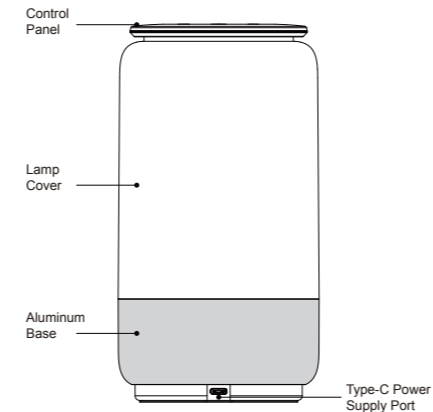

Control Panel

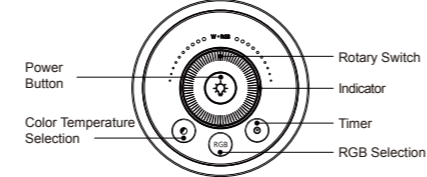

Control Panel Operation

- ON/OFF
- Place the lamp on a flat surface. Attach the power adapter to the

Type-C port on the lamp and insert the power adapter into a household outlet. Short press the Power Button to turn on and off the lamp.

- Select Color Temperature and Adjust Brightness
- Short press the Color Temperature Selection button repeatedly to cycle through 2000K->3000K->4000K. Through the Rotary Switch to precisely adjust brightness.

- Select Color-changing Mode and Color
- Short press the RGB Selection button enter scene mode. Through the Rotary Switch to select the fixed color.

- Set the Timer
- Short press the Timer button, the lamp will turn off automatically after 30 minutes.

NOTE: Changing any setting (brightness, color temperature, color) while the lamp is on will reset the timer.

- Indicator
- The green light flashing indicates connecting status, the red light flashing indicates the network disconnection.

Installation Instruction

Smart lamps are designed to be easily used to control your home improvements and appliances in smart way just follow steps below:

Step one

Download "Tuya Smart" App and register an account.



1. Search the latest version of "Tuya Smart" App from Apple App Store or Google Play Store and also can scan the QR code.
2. Open the App and click register.
3. Select your country code, enter the cellphone number and get a message containing a verification code.
4. Enter code in the "Verification Code" field, set your password and tap "Login".

NOTE: More information about App can be found on the website: <https://smartapp.tuya.com>

Step two

1. Connect lamp to power supply and turn on the power.
2. Confirm whether the green indicator of the device is flashing, if it is already flashing, it means that the device is in the connecting status, if there is no flashing, please long press the timer button for more than 5 seconds until the green indicator flashing and going into connecting status.

Step three

1. Tap "+" or "Add device" button of the window. Select the lighting devices.
2. Make sure the lamp indicator quickly flashes and then tap "Confirm light blinks rapidly". If the indicator is not flashing quickly, tap the "AP Mode" on the top right corner, and then tap "Confirm light slowly blink".
3. Enter your home WiFi network password.
4. The progress bar shows your lamp is trying to connect, the "Add successfully" message appears once connected.
5. If the device needs to be unbound after the configuration is completed, please long press the timer button for more than 5 seconds until the green indicator flashes, the device return to the initial connecting status, then you can reinstall it by following the installation instruction.

NOTE: Ensure that the user can control the device normally, if you have trouble or concerns with this step, please refer to the "help center" in the column "me".

How to use smart home AI devices control smart lamps

1. Enter to the control interface after open the "Tuya Smart" App, then click on the upper right corner of the lamp control interface to enter the lamp details.
 2. Rename your lamp to be recognized by third-party smart control devices.
 3. Choose the logo which you have installed in the supported Third-party control bar and follow the instruction until install completed. The instruction includes video, operation steps and example.
- Third-party platform compatibility



Cautions

1. Do not repair disassemble or modify under any circumstances.
2. Do not place near any heat source or in direct sunlight.
3. Unplug th adapter when the lamp is not used long time.
4. Power off before cleaning.
5. Never overload electrical circuits as it may cause electrical shock or fire.

Federal Communication Commission (FCC) Statement for Users

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RF Radiation Exposure Statement Caution: To maintain compliance with the FCC's RF exposure guidelines, place the product at least 20cm from nearby persons.

