

Appendix B

RF Test Data for BT 4.0 (Conducted Measurement)

Product Name: **TPMS Receiver**

Trade Mark: **Michelin**


Test Model: **WHRTB(W)-1**

Environmental Conditions

Temperature:	22.4 ° C
Relative Humidity:	53.7%
ATM Pressure:	100.0 kPa
Test Engineer:	WANGCHUANG
Supervised by:	Jayden.Zhuo


B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

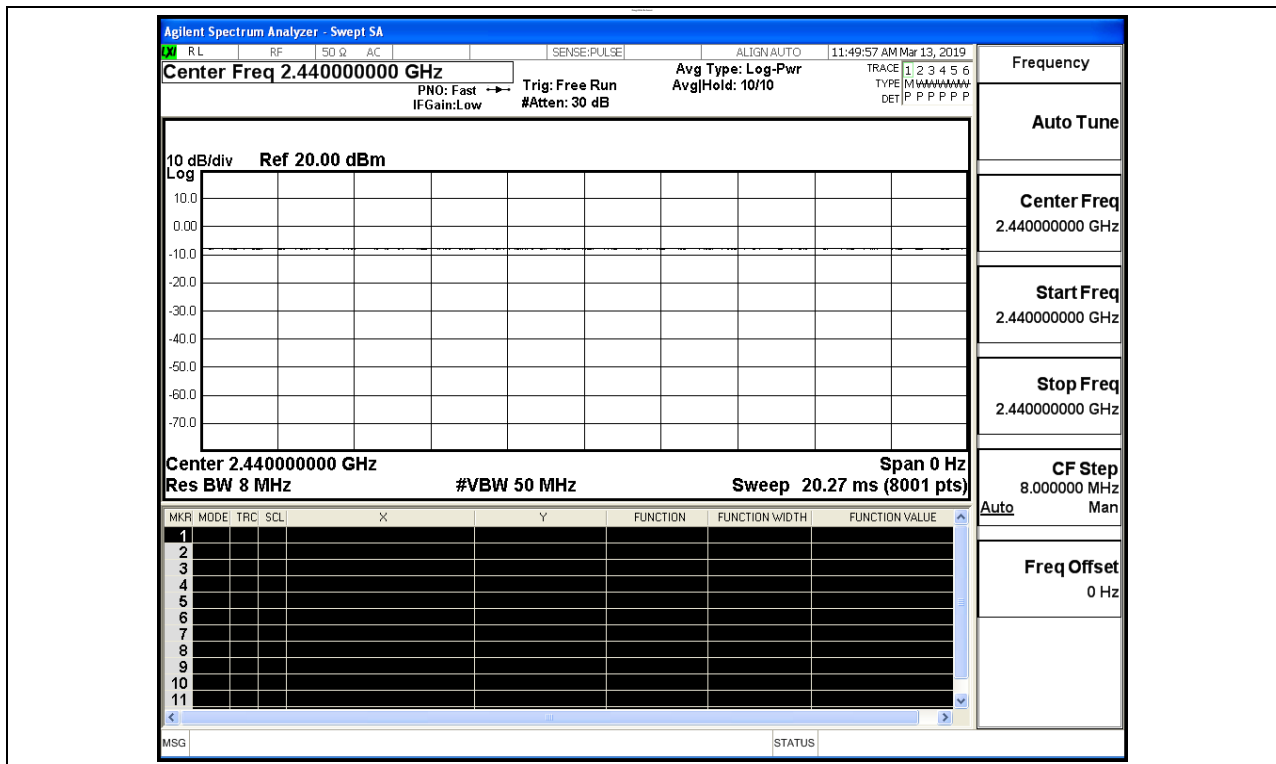


B.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	-0.774	30	PASS
BT LE	MCH	-0.197	30	PASS
BT LE	HCH	-1.553	30	PASS

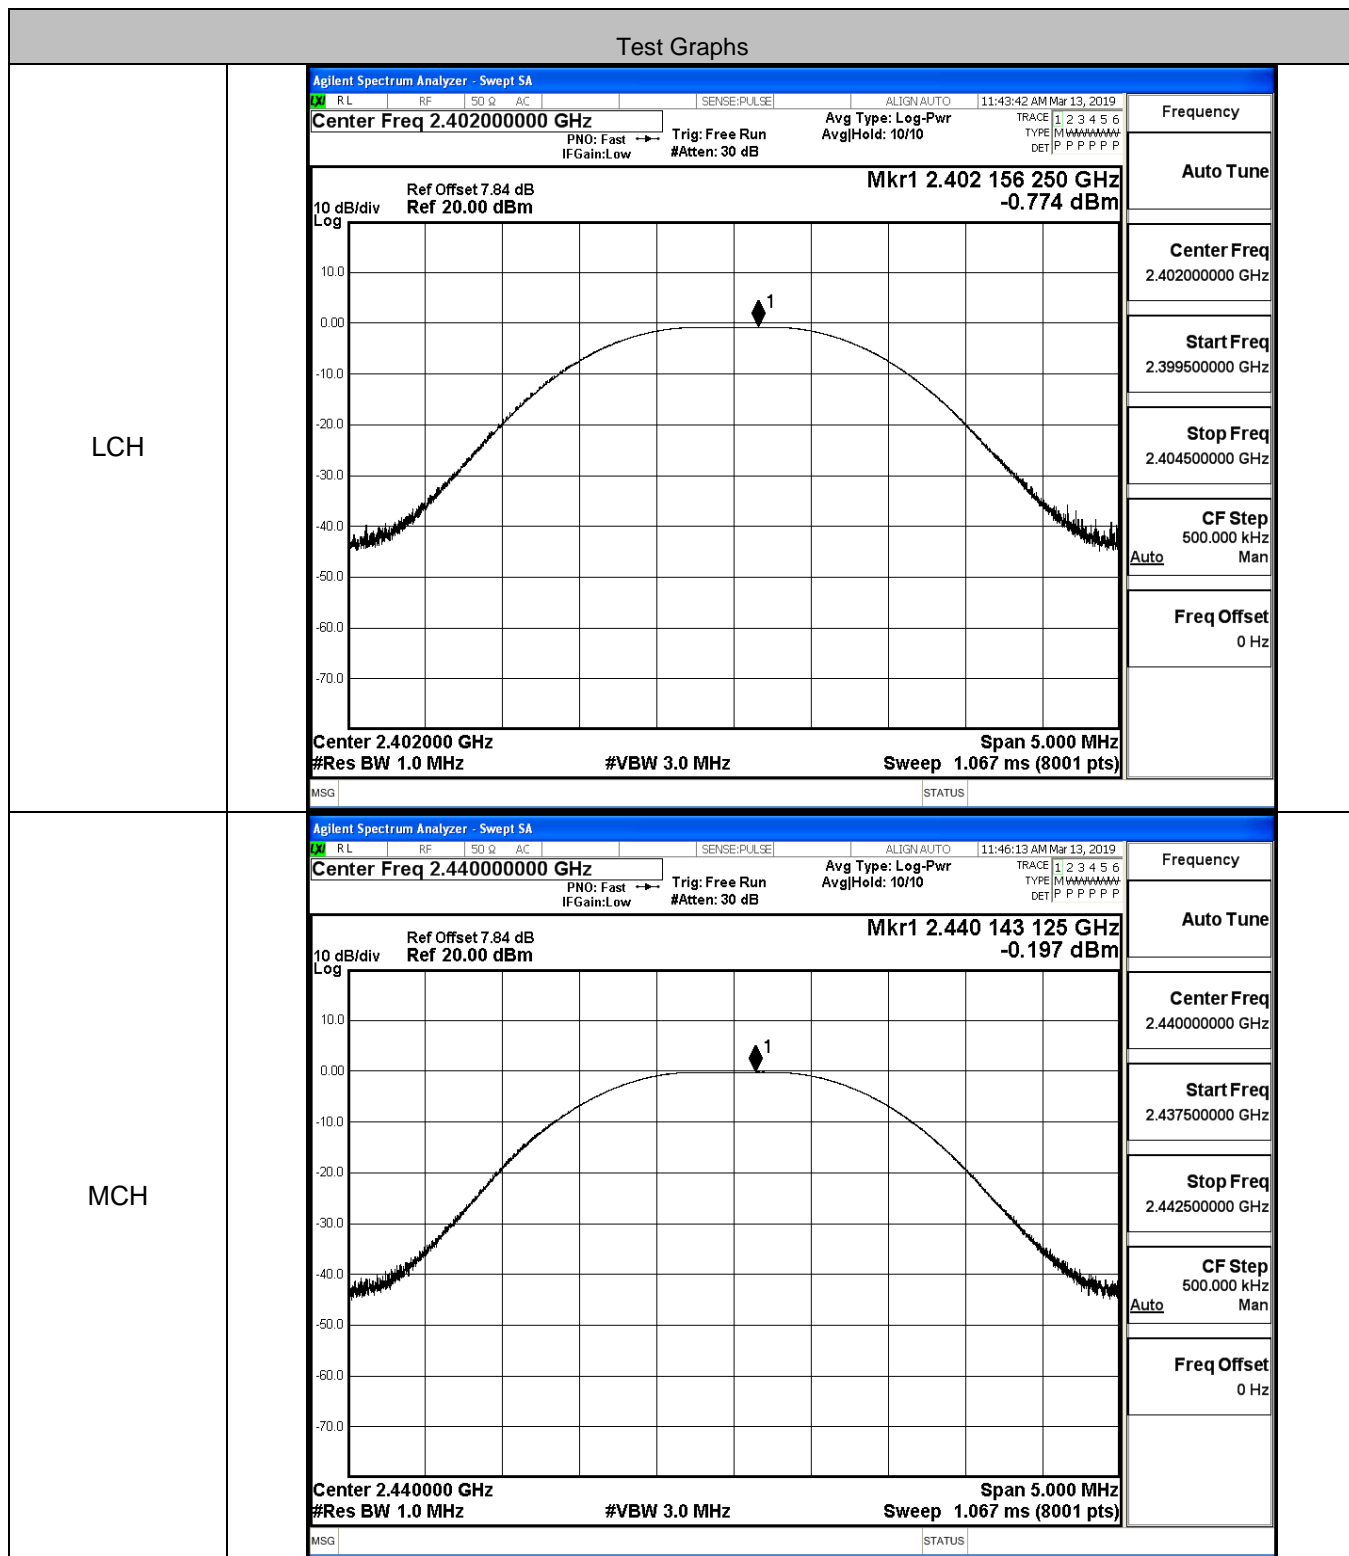


HCH

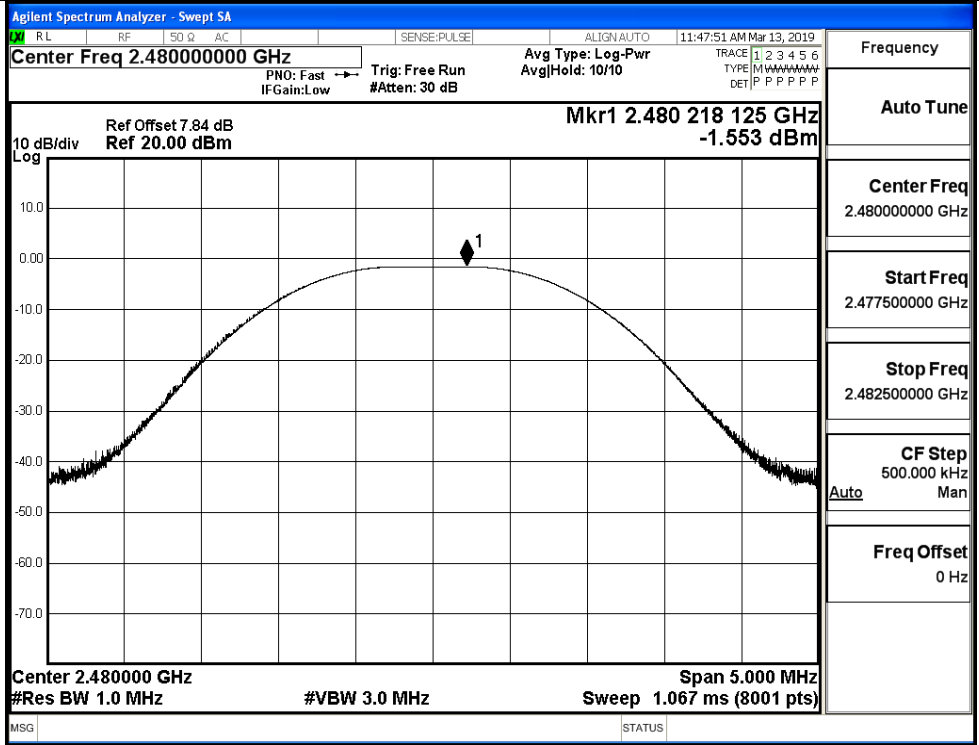

B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-15.786	8	PASS
BT LE	MCH	-15.083	8	PASS
BT LE	HCH	-16.493	8	PASS


Test Graphs	
LCH	<div style="border: 1px solid black; padding: 5px;"> <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 7.84 dB Ref 20.00 dBm</p> <p>Mkr1 2.401 979 0 GHz -15.786 dBm</p> <p>Center 2.4020000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 1.500 MHz Sweep 158.2 ms (1001 pts)</p> </div>
MCH	<div style="border: 1px solid black; padding: 5px;"> <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.44000000 GHz</p> <p>Ref Offset 7.84 dB Ref 20.00 dBm</p> <p>Mkr1 2.439 979 0 GHz -15.083 dBm</p> <p>Center 2.4400000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 1.500 MHz Sweep 158.2 ms (1001 pts)</p> </div>

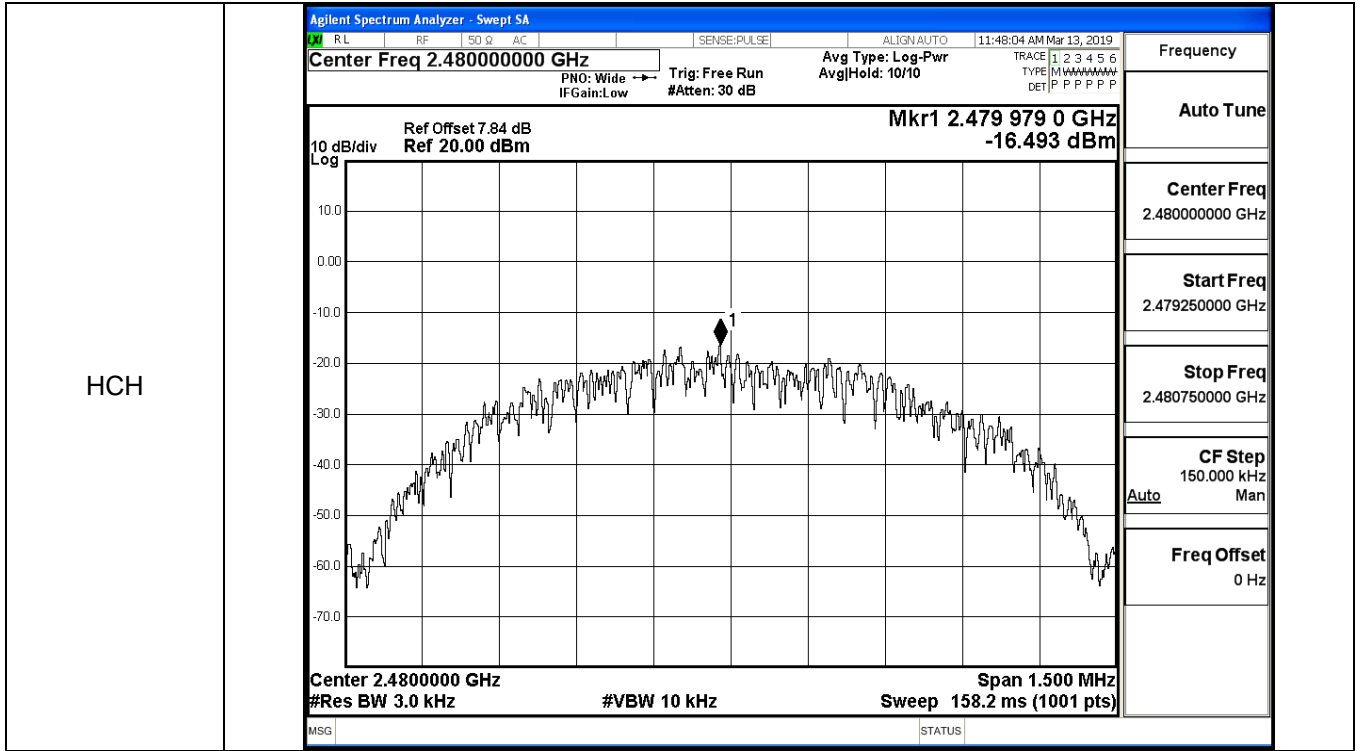


B.4 6dB Bandwidth


Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6895	≥0.5	PASS
BT LE	MCH	0.6934	≥0.5	PASS
BT LE	HCH	0.6966	≥0.5	PASS

Test Graphs

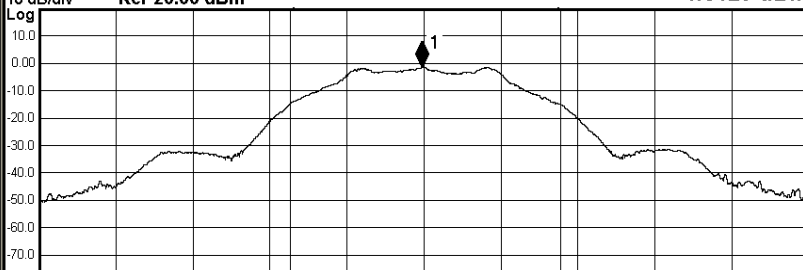LCH	<p style="font-size: 10px; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: 10px; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 11:43:30 AM Mar 13, 2019</p> <p style="font-size: 12px; margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p style="font-size: 10px; margin: 0;">#IFGain:Low #Atten: 30 dB AvgHold: 1/1 Radio Device: BTS</p> <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> <p style="font-size: 10px; margin: 0;">10 dB/div Ref Offset 7.84 dB Mkr1 2.4019933 GHz</p> <p style="font-size: 10px; margin: 0;">Log Ref 20.00 dBm -1.5129 dBm</p>  </div> <p style="font-size: 10px; margin: 0;">Center 2.402 GHz Span 3 MHz</p> <p style="font-size: 10px; margin: 0;">#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: 12px; margin: 5px 0;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.53 dBm</td> </tr> <tr> <td style="text-align: center;">1.0522 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>6.101 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>689.5 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: 10px; margin: 0;">MSG STATUS</p>	Occupied Bandwidth	Total Power	5.53 dBm	1.0522 MHz			Transmit Freq Error	6.101 kHz	OBW Power	x dB Bandwidth	689.5 kHz	x dB			99.00 %			-6.00 dB	<p style="font-size: 10px; margin: 0;">Frequency</p> <hr/> <p style="font-size: 10px; margin: 0;">Center Freq 2.402000000 GHz</p> <hr/> <p style="font-size: 10px; margin: 0;">CF Step 300.000 kHz</p> <p style="font-size: 10px; margin: 0;">Auto Man</p> <hr/> <p style="font-size: 10px; margin: 0;">Freq Offset 0 Hz</p>
	Occupied Bandwidth	Total Power	5.53 dBm																	
	1.0522 MHz																			
	Transmit Freq Error	6.101 kHz	OBW Power																	
x dB Bandwidth	689.5 kHz	x dB																		
		99.00 %																		
		-6.00 dB																		

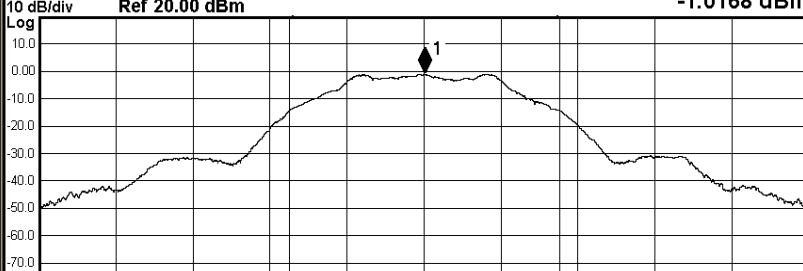MCH	<p style="font-size: 10px; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: 10px; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 11:46:02 AM Mar 13, 2019</p> <p style="font-size: 12px; margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None</p> <p style="font-size: 10px; margin: 0;">#IFGain:Low #Atten: 30 dB AvgHold: 1/1 Radio Device: BTS</p> <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> <p style="font-size: 10px; margin: 0;">10 dB/div Ref Offset 7.84 dB Mkr1 2.4400019 GHz</p> <p style="font-size: 10px; margin: 0;">Log Ref 20.00 dBm -1.0168 dBm</p>  </div> <p style="font-size: 10px; margin: 0;">Center 2.44 GHz Span 3 MHz</p> <p style="font-size: 10px; margin: 0;">#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: 12px; margin: 5px 0;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.10 dBm</td> </tr> <tr> <td style="text-align: center;">1.0489 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>5.446 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>693.4 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: 10px; margin: 0;">MSG STATUS</p>	Occupied Bandwidth	Total Power	6.10 dBm	1.0489 MHz			Transmit Freq Error	5.446 kHz	OBW Power	x dB Bandwidth	693.4 kHz	x dB			99.00 %			-6.00 dB	<p style="font-size: 10px; margin: 0;">Frequency</p> <hr/> <p style="font-size: 10px; margin: 0;">Center Freq 2.440000000 GHz</p> <hr/> <p style="font-size: 10px; margin: 0;">CF Step 300.000 kHz</p> <p style="font-size: 10px; margin: 0;">Auto Man</p> <hr/> <p style="font-size: 10px; margin: 0;">Freq Offset 0 Hz</p>
	Occupied Bandwidth	Total Power	6.10 dBm																	
	1.0489 MHz																			
	Transmit Freq Error	5.446 kHz	OBW Power																	
x dB Bandwidth	693.4 kHz	x dB																		
		99.00 %																		
		-6.00 dB																		


HCH

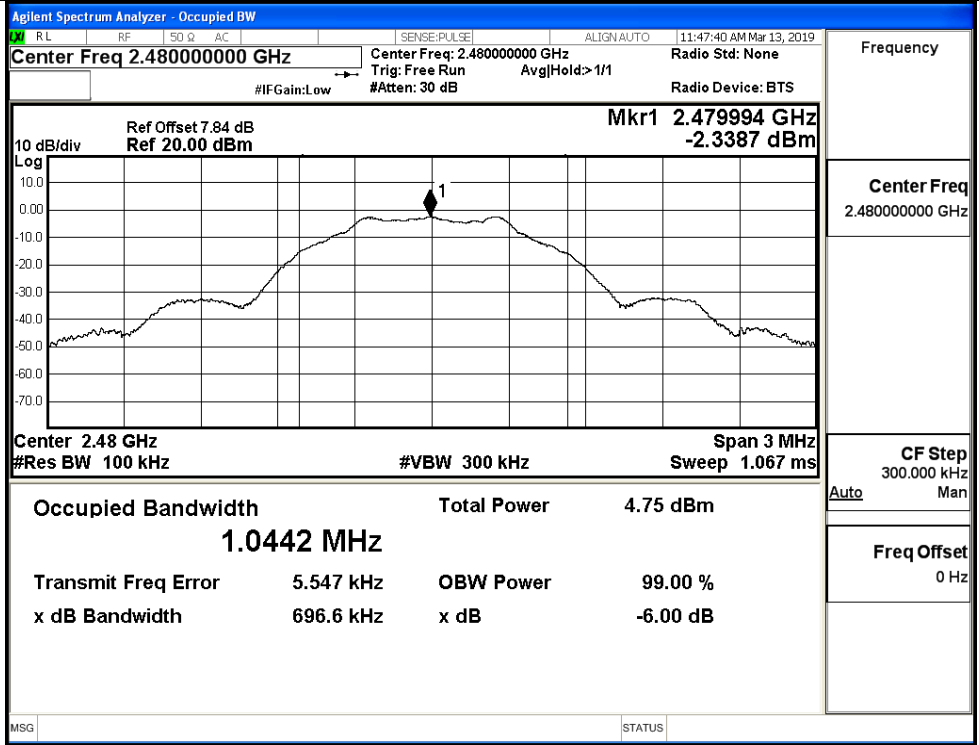

Frequency	Center Freq 2.480000000 GHz
CF Step	300.000 kHz Auto Man
Freq Offset	0 Hz


B.5 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-1.525	-44.404	-21.525	PASS
BT LE	MCH	-0.923	-44.383	-20.923	PASS
BT LE	HCH	-2.253	-44.079	-22.253	PASS

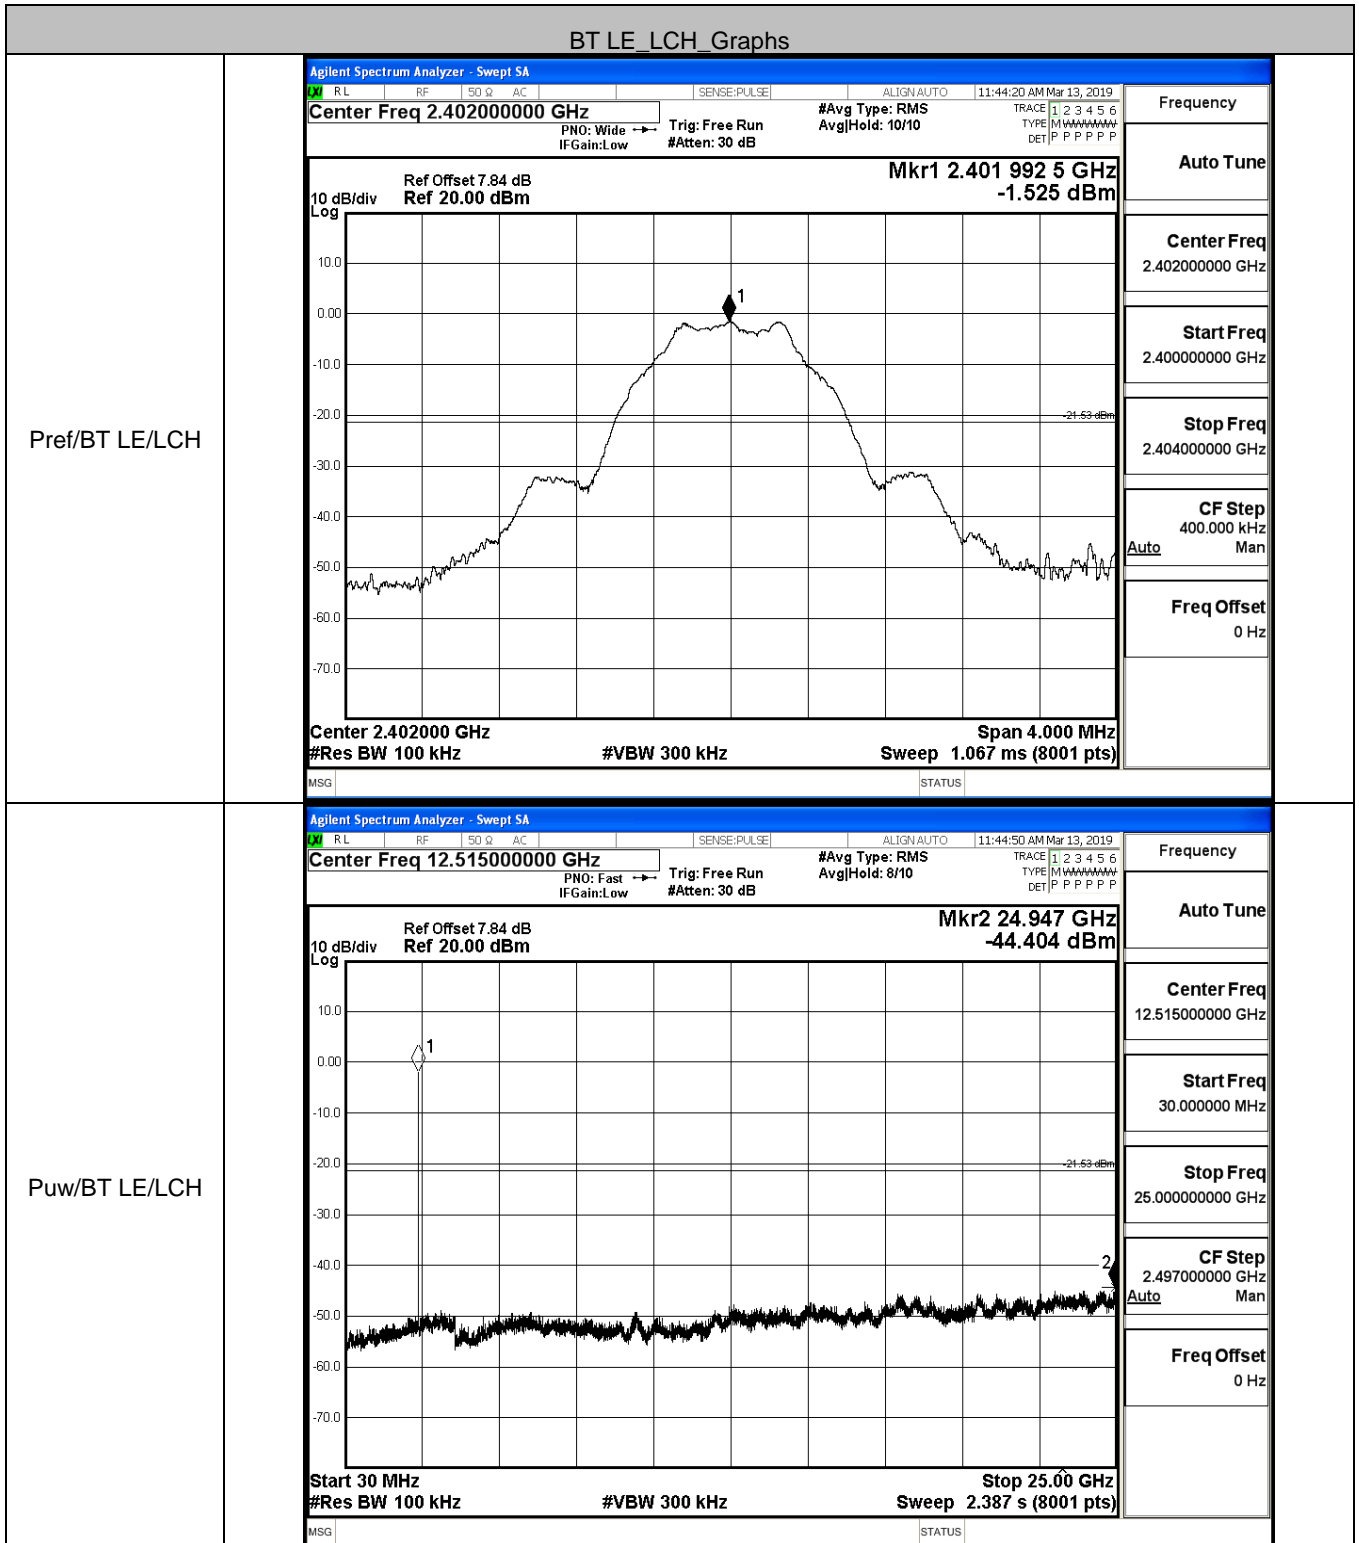


BT LE_MCH_Graphs

Pref/BT LE/MCH

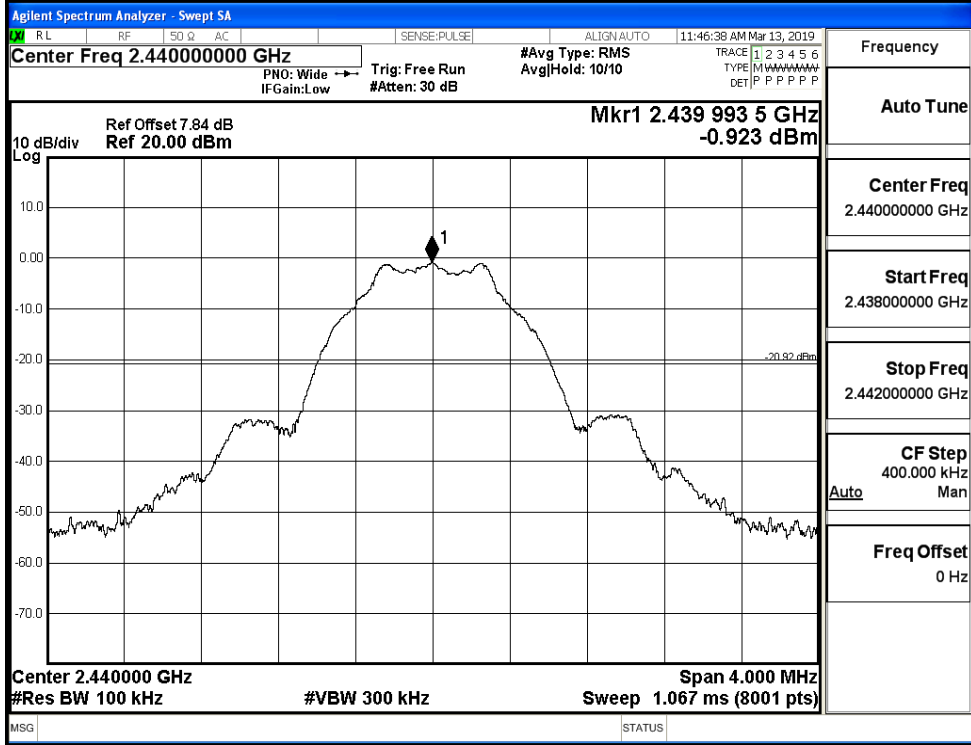


Puw/BT LE/MCH

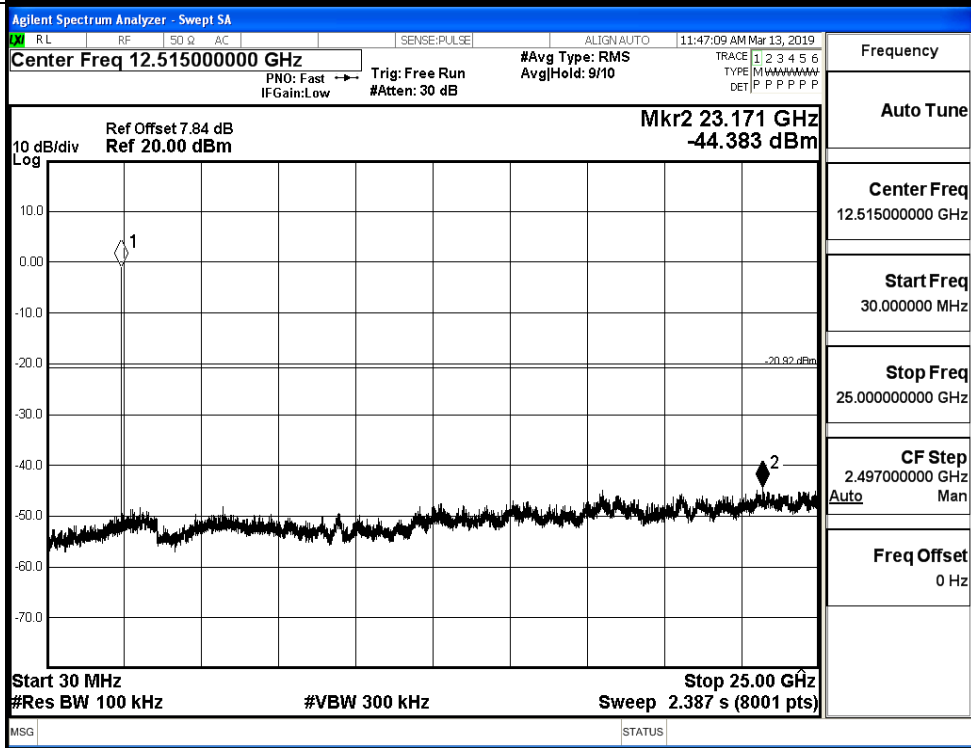


BT LE_HCH_Graphs

Pref/BT LE/HCH

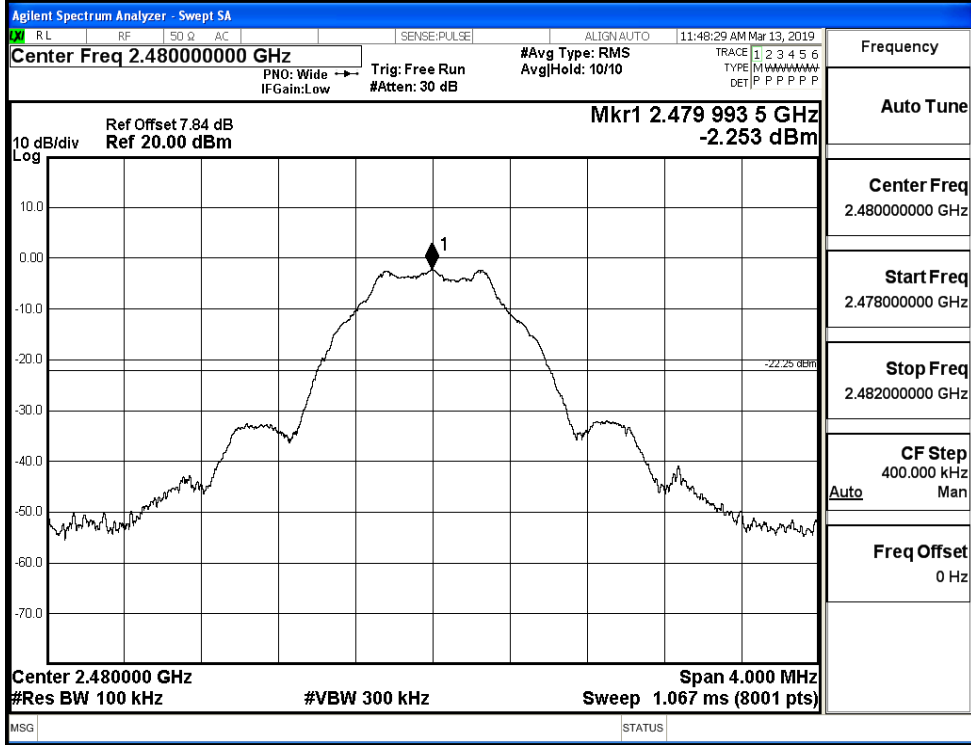

Puw/BT LE/HCH

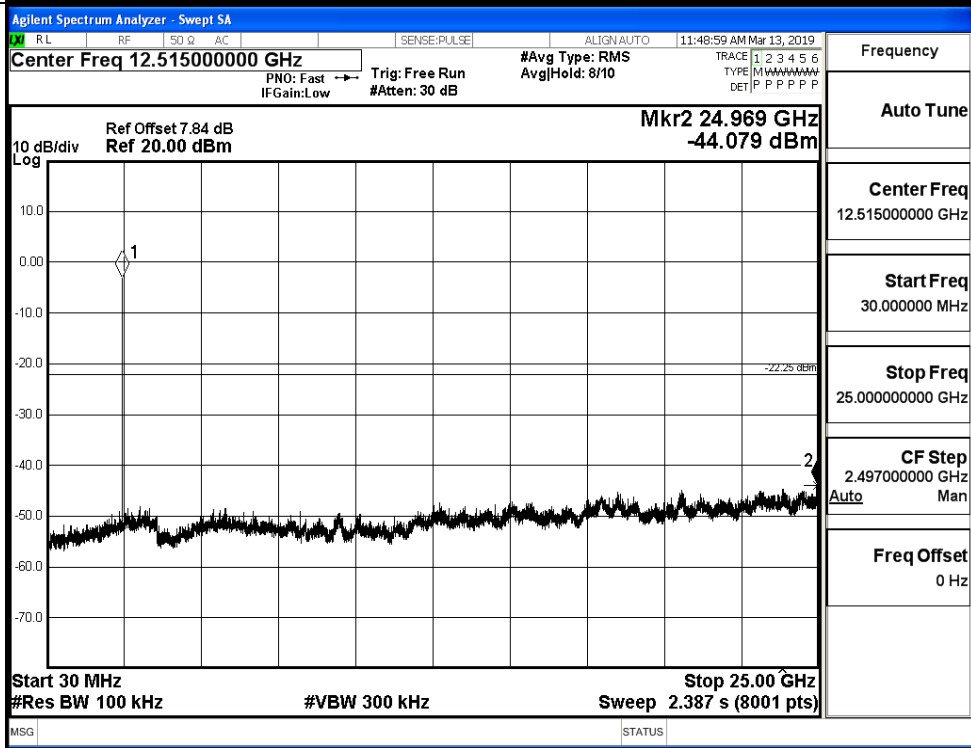

B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-1.350	-50.378	-21.35	PASS
BT LE	HCH	-2.100	-49.406	-22.1	PASS


Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.35700000 GHz Mkr4 2.382169 GHz -50.378 dBm Start 2.31000 GHz Stop 2.40400 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.067 ms (8001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.401991 GHz</td><td>-1.350 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.400000 GHz</td><td>-51.572 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.390000 GHz</td><td>-54.772 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.382169 GHz</td><td>-50.378 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.401991 GHz	-1.350 dBm				2	N	f		2.400000 GHz	-51.572 dBm				3	N	f		2.390000 GHz	-54.772 dBm				4	N	f		2.382169 GHz	-50.378 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.35700000 GHz</p> <p>Start Freq 2.31000000 GHz</p> <p>Stop Freq 2.40400000 GHz</p> <p>CF Step 9.400000 MHz</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.401991 GHz	-1.350 dBm																																										
2	N	f		2.400000 GHz	-51.572 dBm																																										
3	N	f		2.390000 GHz	-54.772 dBm																																										
4	N	f		2.382169 GHz	-50.378 dBm																																										
HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48900000 GHz Mkr4 2.49274825 GHz -49.406 dBm Start 2.47800 GHz Stop 2.50000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.133 ms (8001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.47999650 GHz</td><td>-2.100 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.48350000 GHz</td><td>-51.874 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.50000000 GHz</td><td>-52.413 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.49274825 GHz</td><td>-49.406 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.47999650 GHz	-2.100 dBm				2	N	f		2.48350000 GHz	-51.874 dBm				3	N	f		2.50000000 GHz	-52.413 dBm				4	N	f		2.49274825 GHz	-49.406 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48900000 GHz</p> <p>Start Freq 2.47800000 GHz</p> <p>Stop Freq 2.50000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.47999650 GHz	-2.100 dBm																																										
2	N	f		2.48350000 GHz	-51.874 dBm																																										
3	N	f		2.50000000 GHz	-52.413 dBm																																										
4	N	f		2.49274825 GHz	-49.406 dBm																																										


B.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-43.97	2.65	0	53.94	PEAK	74	PASS
		Ant1	2310.0	-53.81	2.65	0	44.1	AV	54	PASS
		Ant1	2390.0	-42.67	2.65	0	55.24	PEAK	74	PASS
		Ant1	2390.0	-53.76	2.65	0	44.15	AV	54	PASS
	2480	Ant1	2483.5	-42.90	2.65	0	55.01	PEAK	74	PASS
		Ant1	2483.5	-53.36	2.65	0	44.55	AV	54	PASS
		Ant1	2500.0	-43.58	2.65	0	54.33	PEAK	74	PASS
		Ant1	2500.0	-53.36	2.65	0	44.55	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

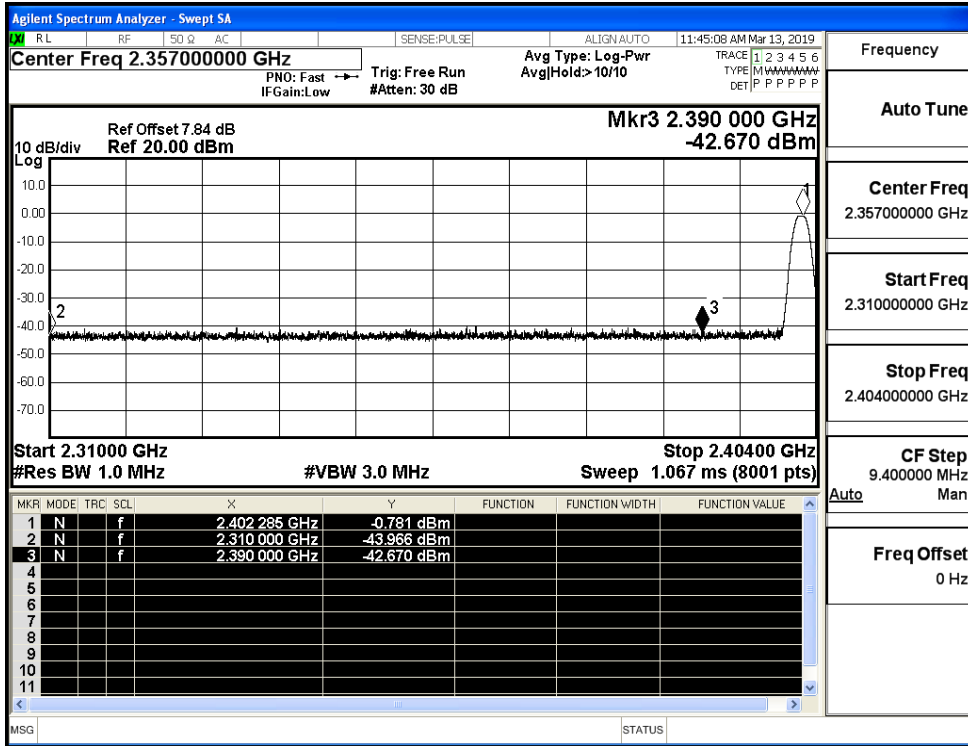

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

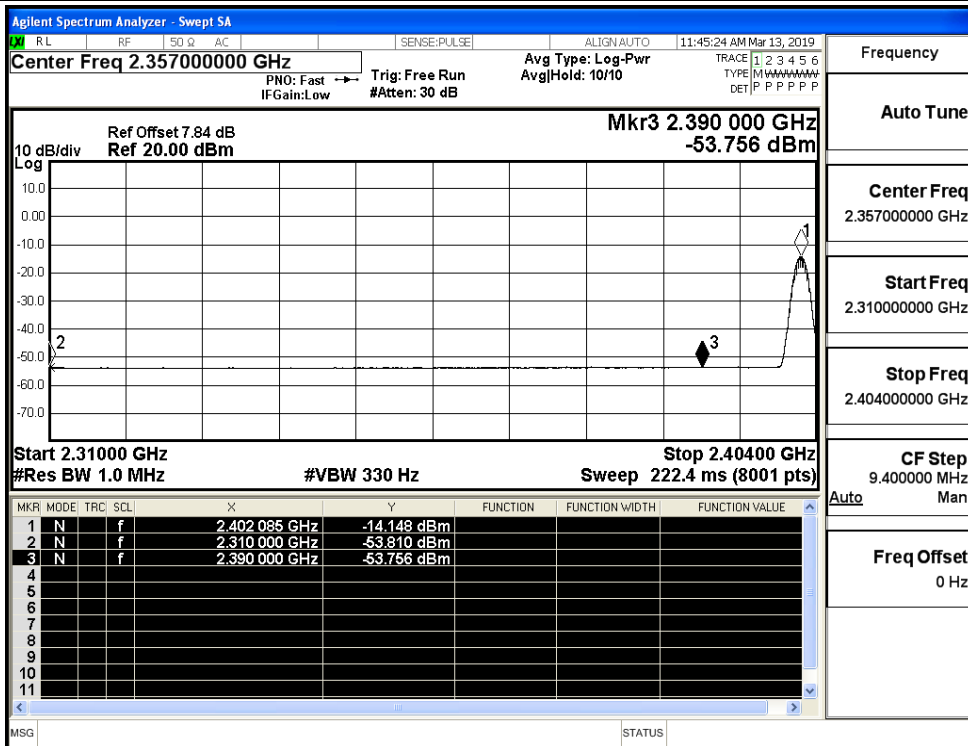

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

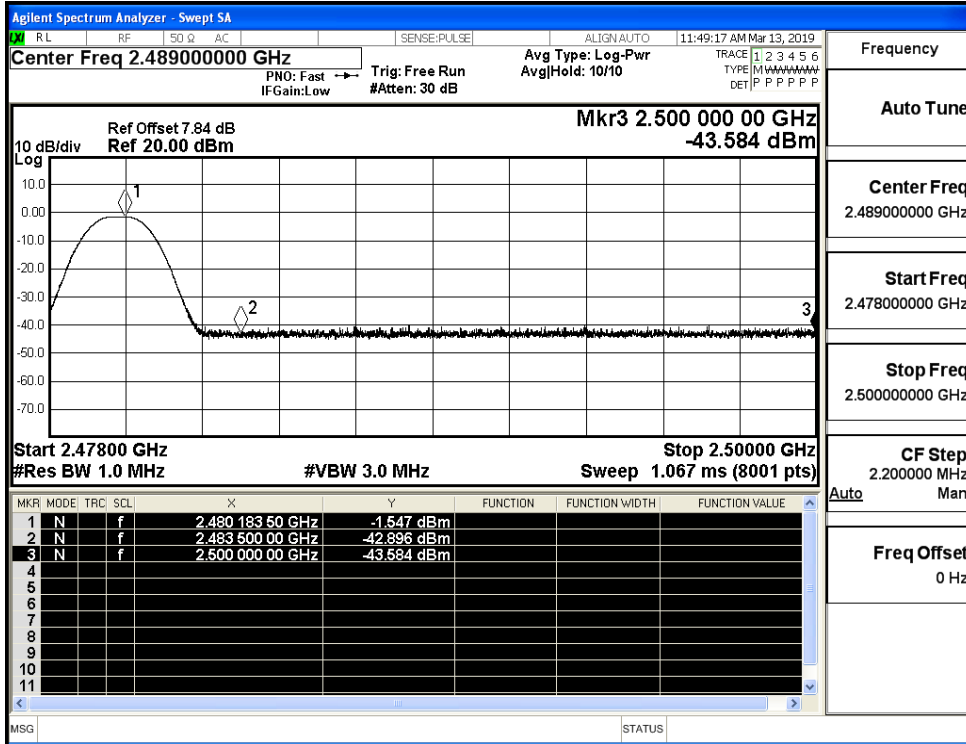

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

