


TEST REPORT

Product Name: Industrial Floor Lamp with White Jade Glass Shade
FCC ID: 2ASHK-LS0100167,
Trademark: N/A
Model Number: LS0100167, MF19334
Prepared For: SPRING SUNSHINE TECHNOLOGY CO., LIMITED
Address: FLAT/RM 01-04, 24/F, FU FAI COMMERCIAL CENTRE,
27 HILLIER STREET, SHEUNG WAN, HK
Manufacturer: SPRING SUNSHINE TECHNOLOGY CO., LIMITED
Address: FLAT/RM 01-04, 24/F, FU FAI COMMERCIAL CENTRE,
27 HILLIER STREET, SHEUNG WAN, HK
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community,
Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Feb. 18, 2022
Sample tested Date: Mar.01.2022 to Mar.03.2022
Issue Date: Mar.03.2022
Report No.: CTB220223036RFX
Test Standards FCC Part15.247
ANSI C63.10:2013
Test Results PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. This report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSION	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	41
8.1 Block Diagram Of Test Setup	41
8.2 Limit	41
8.3 Test procedure	41
8.4 Test Result	42
9. CONDUCTED OUTPUT POWER	50
9.1 Block Diagram Of Test Setup	50
9.2 Limit	50
9.3 Test procedure	50
9.4 Test Result	51
10. 6DB OCCUPIED BANDWIDTH	56
10.1 Block Diagram Of Test Setup	56
10.2 Limit	56
10.3 Test procedure	56
10.4 Test Result	57
11. POWER SPECTRAL DENSITY	62
11.1 Block Diagram Of Test Setup	62
11.2 Limit	62
11.3 Test procedure	62

11.4 Test Result 63

12. ANTENNA REQUIREMENT 68

13. EUT PHOTOGRAPHS 69

14. EUT TEST SETUP PHOTOGRAPHS 70

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220223036RFX	Mar.03.2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/part 2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted Emission (150KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	LS0100167, MF19334
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: LS0100167
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 7.57dBm
Type of Modulation:	WiFi: DSSS, OFDM, CCK
Antenna installation:	WiFi: PCB Antenna
Antenna Gain:	WiFi (2.4G) : 1dBi
Ratings:	AC 120V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

Test mode	rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05


	software					
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.05
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

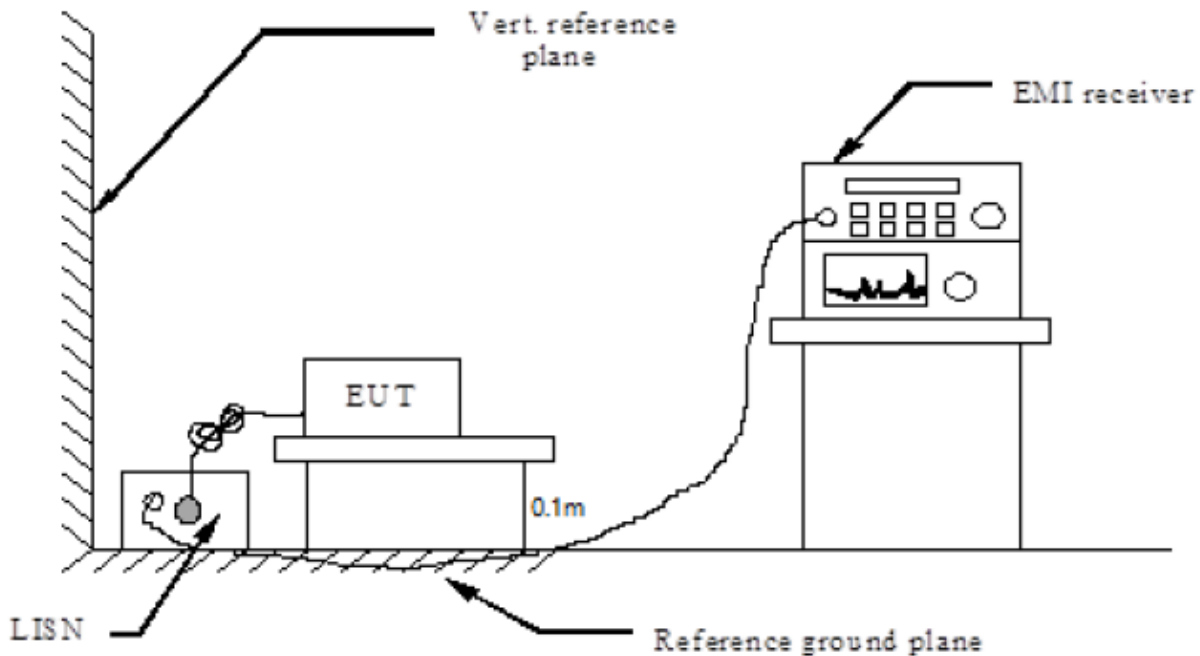

6.2 Limit

Table 4 - AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.1m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line
AC 120V 60Hz

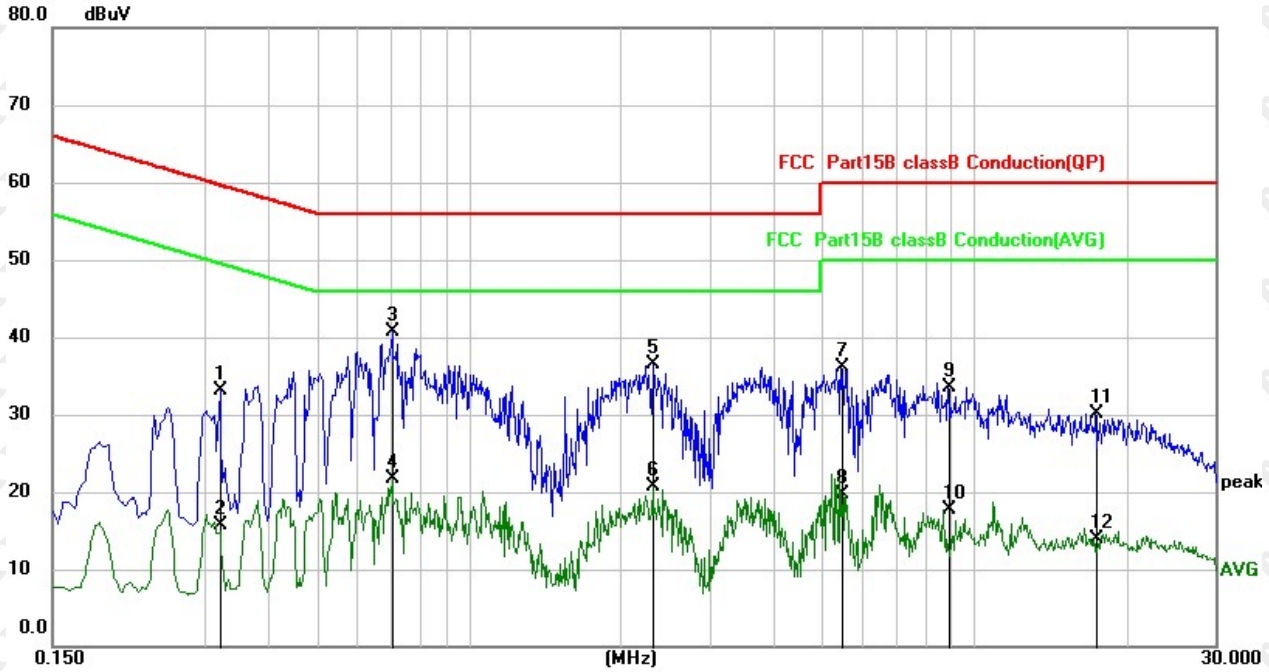


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.3220	22.52	10.62	33.14	59.66	-26.52	QP
2		0.3220	5.09	10.62	15.71	49.66	-33.95	AVG
3	*	0.7060	30.11	10.56	40.67	56.00	-15.33	QP
4		0.7060	11.21	10.56	21.77	46.00	-24.23	AVG
5		2.3100	25.94	10.63	36.57	56.00	-19.43	QP
6		2.3100	10.06	10.63	20.69	46.00	-25.31	AVG
7		5.4740	25.46	10.67	36.13	60.00	-23.87	QP
8		5.4740	9.07	10.67	19.74	50.00	-30.26	AVG
9		8.8700	22.71	10.78	33.49	60.00	-26.51	QP
10		8.8700	6.90	10.78	17.68	50.00	-32.32	AVG
11		17.4540	19.21	10.95	30.16	60.00	-29.84	QP
12		17.4540	3.00	10.95	13.95	50.00	-36.05	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

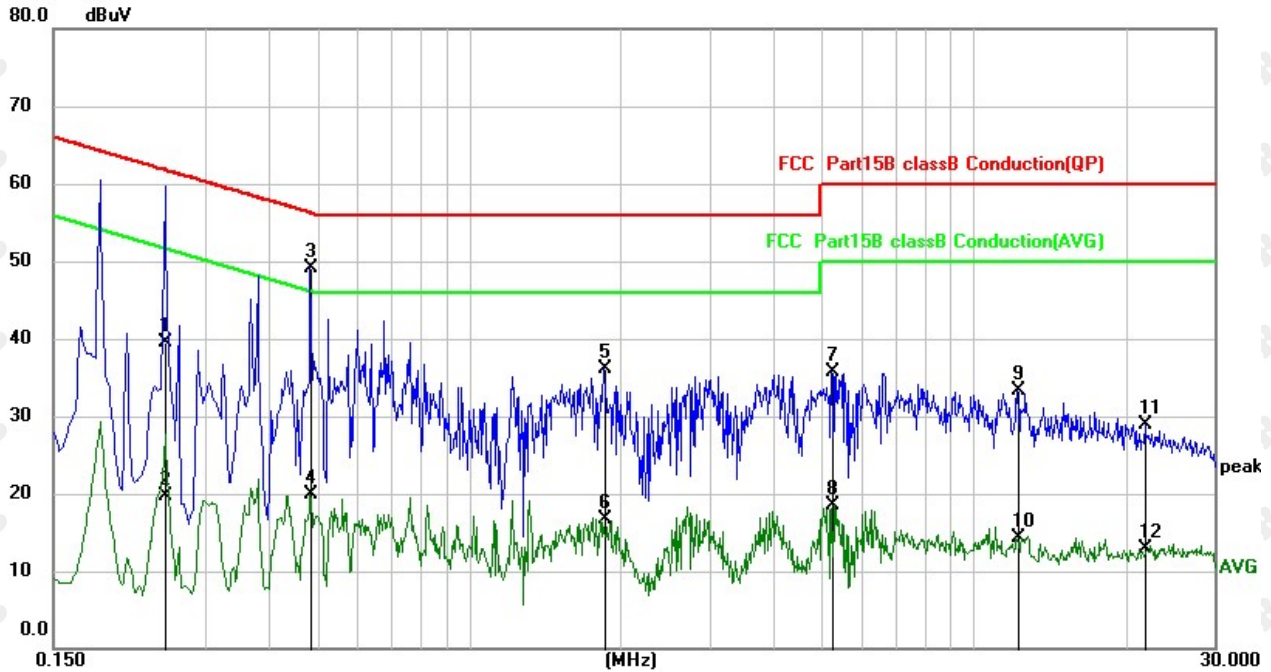

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.2500	28.91	10.66	39.57	61.76	-22.19	QP
2		0.2500	8.96	10.66	19.62	51.76	-32.14	AVG
3	*	0.4860	38.55	10.53	49.08	56.24	-7.16	QP
4		0.4860	9.37	10.53	19.90	46.24	-26.34	AVG
5		1.8500	25.44	10.63	36.07	56.00	-19.93	QP
6		1.8500	6.16	10.63	16.79	46.00	-29.21	AVG
7		5.2380	25.02	10.66	35.68	60.00	-24.32	QP
8		5.2380	7.78	10.66	18.44	50.00	-31.56	AVG
9		12.2340	22.41	10.86	33.27	60.00	-26.73	QP
10		12.2340	3.47	10.86	14.33	50.00	-35.67	AVG
11		21.9180	17.89	11.00	28.89	60.00	-31.11	QP
12		21.9180	2.00	11.00	13.00	50.00	-37.00	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

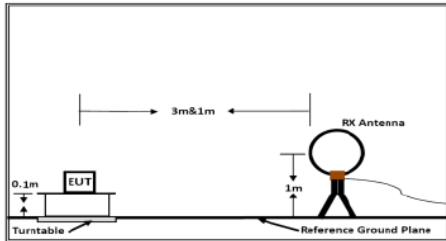


Figure 1. Below 30MHz

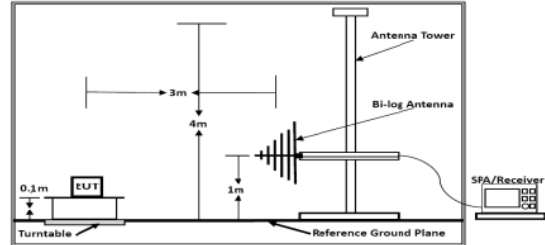


Figure 2. 30MHz to 1GHz

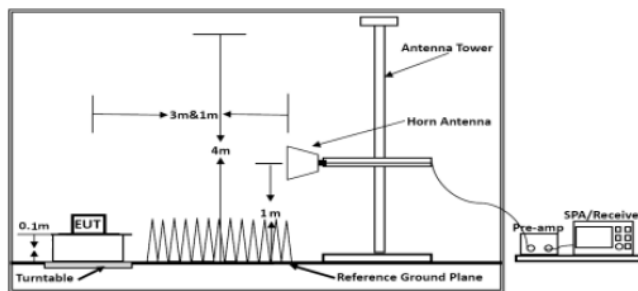


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:


Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

After pre-scanning three directions, the report recorded the worst case

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

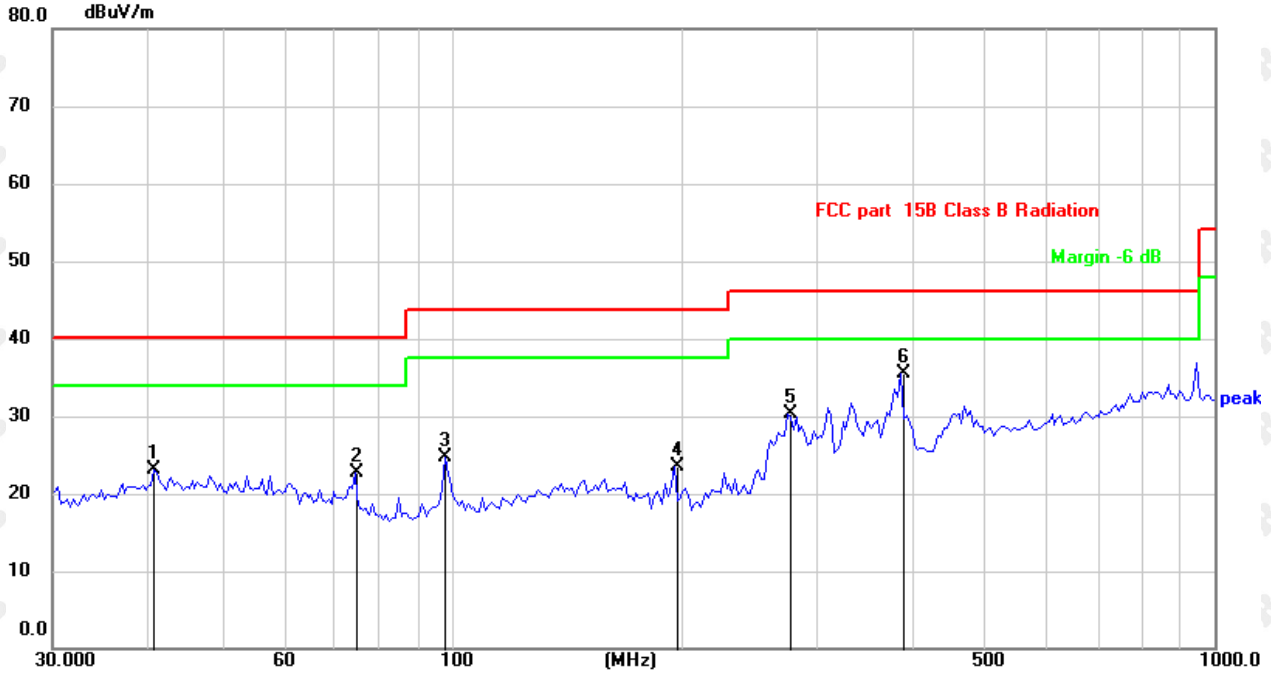

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		40.7730	28.47	-5.30	23.17	40.00	-16.83	QP
2		74.6569	31.40	-8.78	22.62	40.00	-17.38	QP
3		97.9699	33.55	-8.86	24.69	43.50	-18.81	QP
4		195.8220	31.74	-8.20	23.54	43.50	-19.96	QP
5		275.6399	35.73	-5.45	30.28	46.00	-15.72	QP
6	*	387.9920	37.67	-2.10	35.57	46.00	-10.43	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

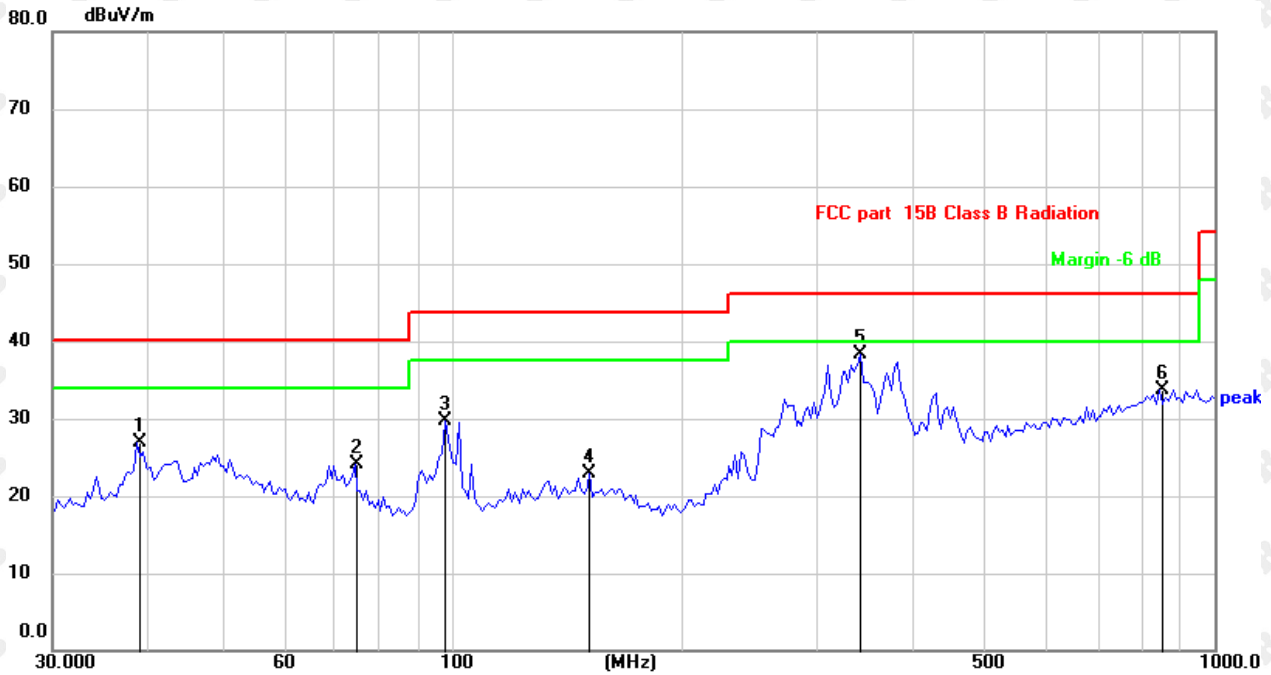

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		38.6839	32.47	-5.59	26.88	40.00	-13.12	QP
2		74.6569	32.85	-8.78	24.07	40.00	-15.93	QP
3		97.9699	38.49	-8.86	29.63	43.50	-13.87	QP
4		151.8632	28.33	-5.51	22.82	43.50	-20.68	QP
5	*	343.1800	42.08	-3.69	38.39	46.00	-7.61	QP
6		846.5708	27.60	6.11	33.71	46.00	-12.29	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

- The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
- All modes have been tested, and the test results show that 802.11b(2437MHz)-mode data is the worst, only 802.11b(2437MHz)-mode test chart is put.

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.22	-3.64	61.58	74	-12.42	peak
4824	50.66	-3.64	47.02	54	-6.98	AVG
7236	59.15	-0.95	58.20	74	-15.80	peak
7236	43.96	-0.95	43.01	54	-10.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.40	-3.64	60.76	74	-13.24	peak
4824	47.74	-3.64	44.10	54	-9.90	AVG
7236	56.25	-0.95	55.30	74	-18.70	peak
7236	44.43	-0.95	43.48	54	-10.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	64.11	-3.51	60.60	74	-13.40	peak
4874	49.27	-3.51	45.76	54	-8.24	AVG
7311	59.23	-0.82	58.41	74	-15.59	peak
7311	44.96	-0.82	44.14	54	-9.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	64.20	-3.51	60.69	74	-13.31	peak
4874	47.88	-3.51	44.37	54	-9.63	AVG
7311	57.89	-0.82	57.07	74	-16.93	peak
7311	43.01	-0.82	42.19	54	-11.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	63.98	-3.43	60.55	74	-13.45	peak
4924	48.34	-3.43	44.91	54	-9.09	AVG
7386	57.94	-0.75	57.19	74	-16.81	peak
7386	42.38	-0.75	41.63	54	-12.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	63.54	-3.43	60.11	74	-13.89	peak
4924	47.44	-3.43	44.01	54	-9.99	AVG
7386	56.54	-0.75	55.79	74	-18.21	peak
7386	42.50	-0.75	41.75	54	-12.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.94	-3.64	62.30	74	-11.70	peak
4824	48.07	-3.64	44.43	54	-9.57	AVG
7236	57.66	-0.95	56.71	74	-17.29	peak
7236	46.53	-0.95	45.58	54	-8.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.96	-3.64	59.32	74	-14.68	peak
4824	48.60	-3.64	44.96	54	-9.04	AVG
7236	60.66	-0.95	59.71	74	-14.29	peak
7236	45.55	-0.95	44.60	54	-9.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	63.99	-3.51	60.48	74	-13.52	peak
4874	49.20	-3.51	45.69	54	-8.31	AVG
7311	57.96	-0.82	57.14	74	-16.86	peak
7311	44.49	-0.82	43.67	54	-10.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	63.81	-3.51	60.30	74	-13.70	peak
4874	48.08	-3.51	44.57	54	-9.43	AVG
7311	57.82	-0.82	57.00	74	-17.00	peak
7311	42.45	-0.82	41.63	54	-12.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.20	-3.43	59.77	74	-14.23	peak
4924	48.11	-3.43	44.68	54	-9.32	AVG
7386	55.95	-0.75	55.20	74	-18.80	peak
7386	41.92	-0.75	41.17	54	-12.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	61.86	-3.43	58.43	74	-15.57	peak
4924	48.48	-3.43	45.05	54	-8.95	AVG
7386	57.13	-0.75	56.38	74	-17.62	peak
7386	41.70	-0.75	40.95	54	-13.05	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	65.03	-3.64	61.39	74	-12.61	peak
4824	47.66	-3.64	44.02	54	-9.98	AVG
7236	58.13	-0.95	57.18	74	-16.82	peak
7236	43.22	-0.95	42.27	54	-11.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	65.25	-3.64	61.61	74	-12.39	peak
4824	47.49	-3.64	43.85	54	-10.15	AVG
7236	57.12	-0.95	56.17	74	-17.83	peak
7236	43.75	-0.95	42.80	54	-11.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874.00	64.34	-3.51	60.83	74.00	-13.17	peak
4874.00	48.92	-3.51	45.41	54.00	-8.59	AVG
7311.00	58.57	-0.82	57.75	74.00	-16.25	peak
7311.00	46.46	-0.82	45.64	54.00	-8.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874.00	63.60	-3.51	60.09	74.00	-13.91	peak
4874.00	47.10	-3.51	43.59	54.00	-10.41	AVG
7311.00	59.19	-0.82	58.37	74.00	-15.63	peak
7311.00	43.16	-0.82	42.34	54.00	-11.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	62.90	-3.43	59.47	74	-14.53	peak
4924	46.68	-3.43	43.25	54	-10.75	AVG
7386	58.64	-0.75	57.89	74	-16.11	peak
7386	42.52	-0.75	41.77	54	-12.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	62.92	-3.43	59.49	74	-14.51	peak
4924	46.53	-3.43	43.10	54	-10.90	AVG
7386	56.26	-0.75	55.51	74	-18.49	peak
7386	42.67	-0.75	41.92	54	-12.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.84	-3.63	61.21	74	-12.79	peak
4844	48.14	-3.63	44.51	54	-9.49	AVG
7266	59.15	-0.94	58.21	74	-15.79	peak
7266	45.97	-0.94	45.03	54	-8.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.88	-3.63	62.25	74	-11.75	peak
4844	48.37	-3.63	44.74	54	-9.26	AVG
7266	58.27	-0.94	57.33	74	-16.67	peak
7266	45.35	-0.94	44.41	54	-9.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	63.40	-3.51	59.89	74	-14.11	peak
4874	47.43	-3.51	43.92	54	-10.08	AVG
7311	60.38	-0.82	59.56	74	-14.44	peak
7311	44.37	-0.82	43.55	54	-10.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	62.31	-3.51	58.80	74	-15.20	peak
4874	46.44	-3.51	42.93	54	-11.07	AVG
7311	56.64	-0.82	55.82	74	-18.18	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4904	62.34	-3.43	58.91	74	-15.09	peak
4904	49.20	-3.43	45.77	54	-8.23	AVG
7356	56.90	-0.75	56.15	74	-17.85	peak
7356	41.81	-0.75	41.06	54	-12.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4904	63.76	-3.43	60.33	74	-13.67	peak
4904	47.04	-3.43	43.61	54	-10.39	AVG
7356	57.59	-0.75	56.84	74	-17.16	peak
7356	43.65	-0.75	42.90	54	-11.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	57.03	-5.81	51.22	74	-22.78	peak
2390	/	-5.81	/	54	/	AVG
2399	63.90	-5.84	58.06	74	-15.94	peak
2399	48.38	-5.84	42.54	54	-11.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	57.02	-5.81	51.21	74	-22.79	peak
2390	/	-5.81	/	54	/	AVG
2399	63.41	-5.84	57.57	74	-16.43	peak
2399	46.77	-5.84	40.93	54	-13.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:
802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.99	-5.65	51.34	74	-22.66	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.39	-5.65	49.74	74	-24.26	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	58.86	-5.81	53.05	74	-20.95	peak
2390	/	-5.81	/	54	/	AVG
2399	63.34	-5.84	57.50	74	-16.50	peak
2399	46.32	-5.84	40.48	54	-13.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	56.16	-5.81	50.35	74	-23.65	peak
2390	/	-5.81	/	54	/	AVG
2399	63.06	-5.84	57.22	74	-16.78	peak
2399	45.43	-5.84	39.59	54	-14.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.81	-5.65	51.16	74	-22.84	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.79	-5.65	51.14	74	-22.86	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	56.07	-5.81	50.26	74	-23.74	peak
2390	/	-5.81	/	54	/	AVG
2399	63.20	-5.84	57.36	74	-16.64	peak
2399	47.11	-5.84	41.27	54	-12.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	56.55	-5.81	50.74	74	-23.26	peak
2390	/	-5.81	/	54	/	AVG
2399	61.16	-5.84	55.32	74	-18.68	peak
2399	48.11	-5.84	42.27	54	-11.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	56.67	-5.65	51.02	74	-22.98	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.16	-5.65	51.51	74	-22.49	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	58.17	-5.81	52.36	74	-21.64	peak
2390	/	-5.81	/	54	/	AVG
2399	63.83	-5.84	57.99	74	-16.01	peak
2399	46.73	-5.84	40.89	54	-13.11	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	58.03	-5.81	52.22	74	-21.78	peak
2390	/	-5.81	/	54	/	AVG
2399	60.51	-5.84	54.67	74	-19.33	peak
2399	45.96	-5.84	40.12	54	-13.88	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	58.34	-5.65	52.69	74	-21.31	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	57.21	-5.65	51.56	74	-22.44	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

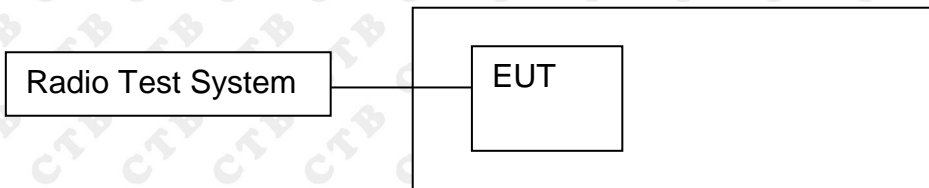

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold

8.4 Test Result




BAND EDGE Graphs

802.11g/LCH

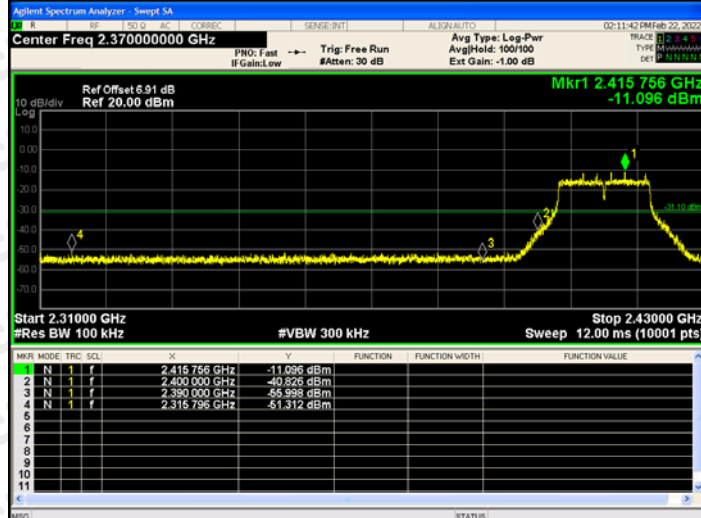


802.11g/HCH

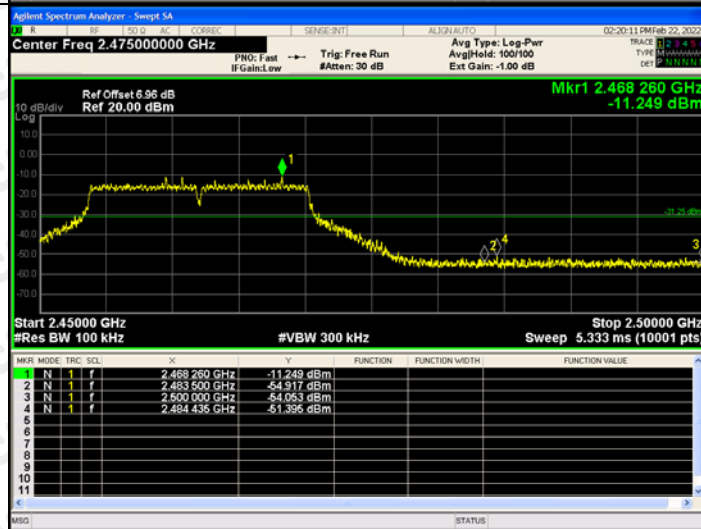


BAND EDGE Graphs


802.11n(HT20)/L
CH

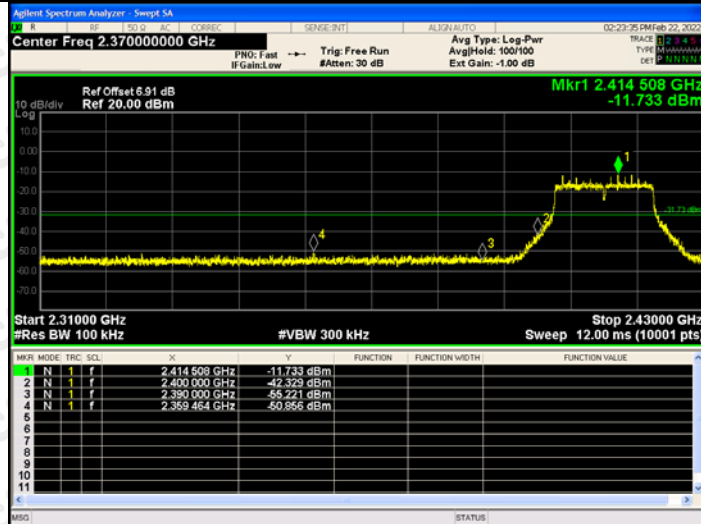


802.11n(HT20)/H
CH

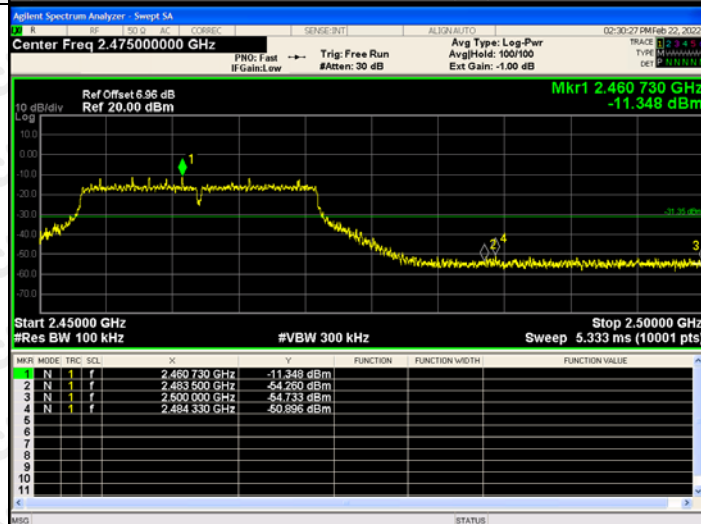

802.11n(HT40)/L
CH

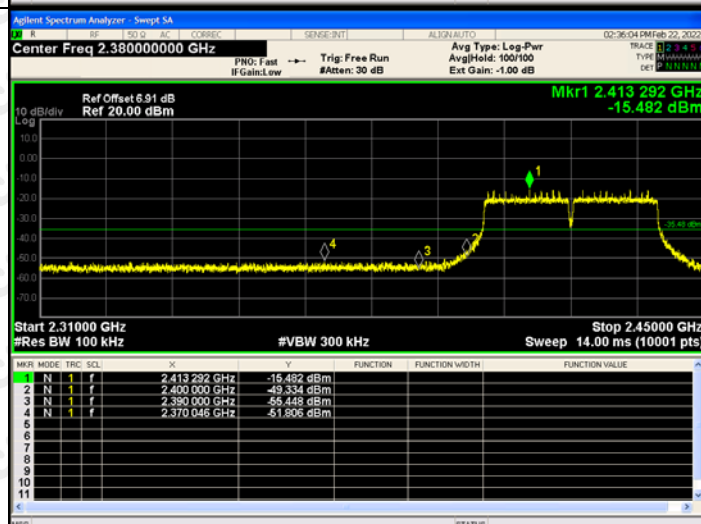

802.11n(HT40)/H
CH

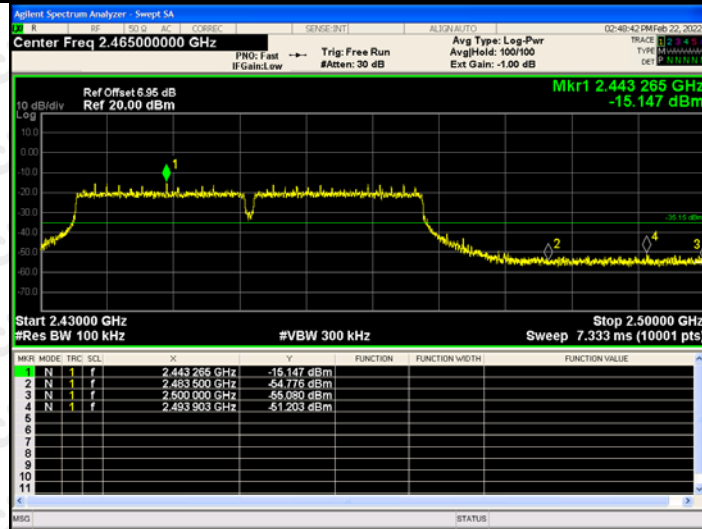

RF Conducted Spurious Emissions Graphs




<p>802.11b /LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.414 1 GHz</td><td>-7.793 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.436 1 GHz</td><td>-9.020 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.460 1 GHz</td><td>-8.664 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>4.770 0 GHz</td><td>-54.319 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>7.386 0 GHz</td><td>-53.979 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td>N</td><td>1</td><td>f</td><td>9.832 7 GHz</td><td>-54.618 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.414 1 GHz	-7.793 dBm				2	N	1	f	2.436 1 GHz	-9.020 dBm				3	N	1	f	2.460 1 GHz	-8.664 dBm				4	N	1	f	4.770 0 GHz	-54.319 dBm				5	N	1	f	7.386 0 GHz	-53.979 dBm				6	N	1	f	9.832 7 GHz	-54.618 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																									
1	N	1	f	2.414 1 GHz	-7.793 dBm																																																												
2	N	1	f	2.436 1 GHz	-9.020 dBm																																																												
3	N	1	f	2.460 1 GHz	-8.664 dBm																																																												
4	N	1	f	4.770 0 GHz	-54.319 dBm																																																												
5	N	1	f	7.386 0 GHz	-53.979 dBm																																																												
6	N	1	f	9.832 7 GHz	-54.618 dBm																																																												
<p>802.11b /MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.436 1 GHz</td><td>-9.020 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.460 1 GHz</td><td>-8.664 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.770 1 GHz</td><td>-54.049 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.422 2 GHz</td><td>-53.534 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.893 9 GHz</td><td>-55.520 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.436 1 GHz	-9.020 dBm				2	N	1	f	2.460 1 GHz	-8.664 dBm				3	N	1	f	4.770 1 GHz	-54.049 dBm				4	N	1	f	7.422 2 GHz	-53.534 dBm				5	N	1	f	9.893 9 GHz	-55.520 dBm													
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																									
1	N	1	f	2.436 1 GHz	-9.020 dBm																																																												
2	N	1	f	2.460 1 GHz	-8.664 dBm																																																												
3	N	1	f	4.770 1 GHz	-54.049 dBm																																																												
4	N	1	f	7.422 2 GHz	-53.534 dBm																																																												
5	N	1	f	9.893 9 GHz	-55.520 dBm																																																												
<p>802.11b /HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.460 1 GHz</td><td>-8.664 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.436 1 GHz</td><td>-9.020 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.775 8 GHz</td><td>-54.079 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.386 0 GHz</td><td>-54.026 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.939 5 GHz</td><td>-54.894 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460 1 GHz	-8.664 dBm				2	N	1	f	2.436 1 GHz	-9.020 dBm				3	N	1	f	4.775 8 GHz	-54.079 dBm				4	N	1	f	7.386 0 GHz	-54.026 dBm				5	N	1	f	9.939 5 GHz	-54.894 dBm													
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																									
1	N	1	f	2.460 1 GHz	-8.664 dBm																																																												
2	N	1	f	2.436 1 GHz	-9.020 dBm																																																												
3	N	1	f	4.775 8 GHz	-54.079 dBm																																																												
4	N	1	f	7.386 0 GHz	-54.026 dBm																																																												
5	N	1	f	9.939 5 GHz	-54.894 dBm																																																												

RF Conducted Spurious Emissions Graphs

<p>802.11g /LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.415 8 GHz</td> <td>-11.105 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.616 2 GHz</td> <td>-40.701 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.708 4 GHz</td> <td>-54.634 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.111 6 GHz</td> <td>-53.683 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.788 6 GHz</td> <td>-54.892 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.415 8 GHz	-11.105 dBm				2	N	1	f	24.616 2 GHz	-40.701 dBm				3	N	1	f	4.708 4 GHz	-54.634 dBm				4	N	1	f	7.111 6 GHz	-53.683 dBm				5	N	1	f	9.788 6 GHz	-54.892 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.415 8 GHz	-11.105 dBm																																																			
2	N	1	f	24.616 2 GHz	-40.701 dBm																																																			
3	N	1	f	4.708 4 GHz	-54.634 dBm																																																			
4	N	1	f	7.111 6 GHz	-53.683 dBm																																																			
5	N	1	f	9.788 6 GHz	-54.892 dBm																																																			
<p>802.11g /MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.443 2 GHz</td> <td>-11.428 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.655 9 GHz</td> <td>-40.648 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.869 6 GHz</td> <td>-53.983 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.481 3 GHz</td> <td>-53.853 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.728 8 GHz</td> <td>-54.744 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.443 2 GHz	-11.428 dBm				2	N	1	f	24.655 9 GHz	-40.648 dBm				3	N	1	f	4.869 6 GHz	-53.983 dBm				4	N	1	f	7.481 3 GHz	-53.853 dBm				5	N	1	f	9.728 8 GHz	-54.744 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.443 2 GHz	-11.428 dBm																																																			
2	N	1	f	24.655 9 GHz	-40.648 dBm																																																			
3	N	1	f	4.869 6 GHz	-53.983 dBm																																																			
4	N	1	f	7.481 3 GHz	-53.853 dBm																																																			
5	N	1	f	9.728 8 GHz	-54.744 dBm																																																			
<p>802.11g /HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.464 4 GHz</td> <td>-14.341 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.602 1 GHz</td> <td>-40.006 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.797 2 GHz</td> <td>-54.556 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.293 4 GHz</td> <td>-53.759 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.889 9 GHz</td> <td>-55.637 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.464 4 GHz	-14.341 dBm				2	N	1	f	24.602 1 GHz	-40.006 dBm				3	N	1	f	4.797 2 GHz	-54.556 dBm				4	N	1	f	7.293 4 GHz	-53.759 dBm				5	N	1	f	9.889 9 GHz	-55.637 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.464 4 GHz	-14.341 dBm																																																			
2	N	1	f	24.602 1 GHz	-40.006 dBm																																																			
3	N	1	f	4.797 2 GHz	-54.556 dBm																																																			
4	N	1	f	7.293 4 GHz	-53.759 dBm																																																			
5	N	1	f	9.889 9 GHz	-55.637 dBm																																																			


RF Conducted Spurious Emissions Graphs

<p>802.11n (HT20)/ LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.414 1 GHz</td> <td>-11.850 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.616 3 GHz</td> <td>-41.459 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.964 9 GHz</td> <td>-54.426 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.403 7 GHz</td> <td>-53.452 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.484 2 GHz</td> <td>-54.553 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.414 1 GHz	-11.850 dBm				2	N	1	f	24.616 3 GHz	-41.459 dBm				3	N	1	f	4.964 9 GHz	-54.426 dBm				4	N	1	f	7.403 7 GHz	-53.452 dBm				5	N	1	f	9.484 2 GHz	-54.553 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.414 1 GHz	-11.850 dBm																																																			
2	N	1	f	24.616 3 GHz	-41.459 dBm																																																			
3	N	1	f	4.964 9 GHz	-54.426 dBm																																																			
4	N	1	f	7.403 7 GHz	-53.452 dBm																																																			
5	N	1	f	9.484 2 GHz	-54.553 dBm																																																			
<p>802.11n(HT20) /MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.430 8 GHz</td> <td>-11.624 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.027 4 GHz</td> <td>-40.900 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.069 0 GHz</td> <td>-54.265 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.503 1 GHz</td> <td>-51.832 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.666 3 GHz</td> <td>-54.518 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.430 8 GHz	-11.624 dBm				2	N	1	f	25.027 4 GHz	-40.900 dBm				3	N	1	f	5.069 0 GHz	-54.265 dBm				4	N	1	f	7.503 1 GHz	-51.832 dBm				5	N	1	f	9.666 3 GHz	-54.518 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.430 8 GHz	-11.624 dBm																																																			
2	N	1	f	25.027 4 GHz	-40.900 dBm																																																			
3	N	1	f	5.069 0 GHz	-54.265 dBm																																																			
4	N	1	f	7.503 1 GHz	-51.832 dBm																																																			
5	N	1	f	9.666 3 GHz	-54.518 dBm																																																			
<p>802.11n(HT20) /HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 5 GHz</td> <td>-12.229 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.636 5 GHz</td> <td>-41.200 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.113 1 GHz</td> <td>-53.883 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.400 1 GHz</td> <td>-53.809 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.672 1 GHz</td> <td>-55.671 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.463 5 GHz	-12.229 dBm				2	N	1	f	24.636 5 GHz	-41.200 dBm				3	N	1	f	5.113 1 GHz	-53.883 dBm				4	N	1	f	7.400 1 GHz	-53.809 dBm				5	N	1	f	9.672 1 GHz	-55.671 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.463 5 GHz	-12.229 dBm																																																			
2	N	1	f	24.636 5 GHz	-41.200 dBm																																																			
3	N	1	f	5.113 1 GHz	-53.883 dBm																																																			
4	N	1	f	7.400 1 GHz	-53.809 dBm																																																			
5	N	1	f	9.672 1 GHz	-55.671 dBm																																																			
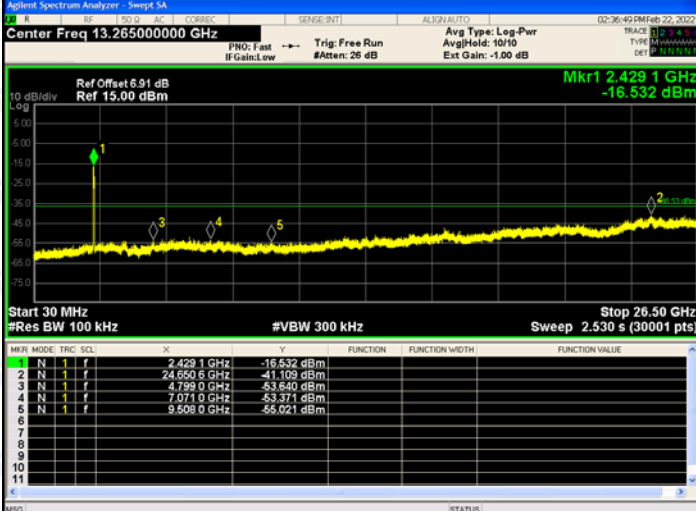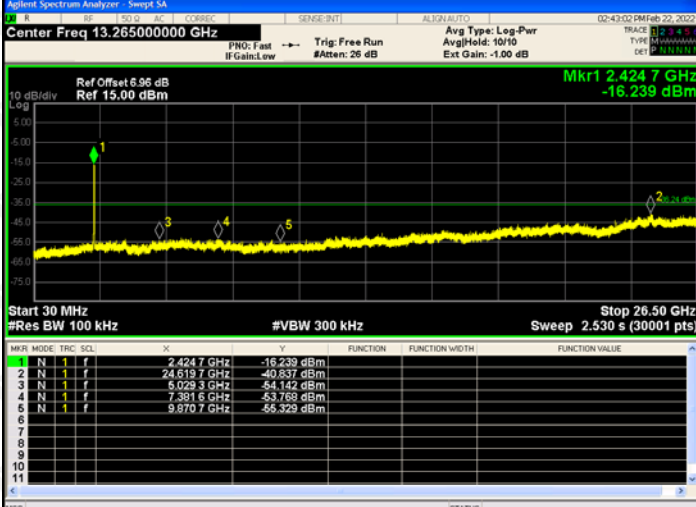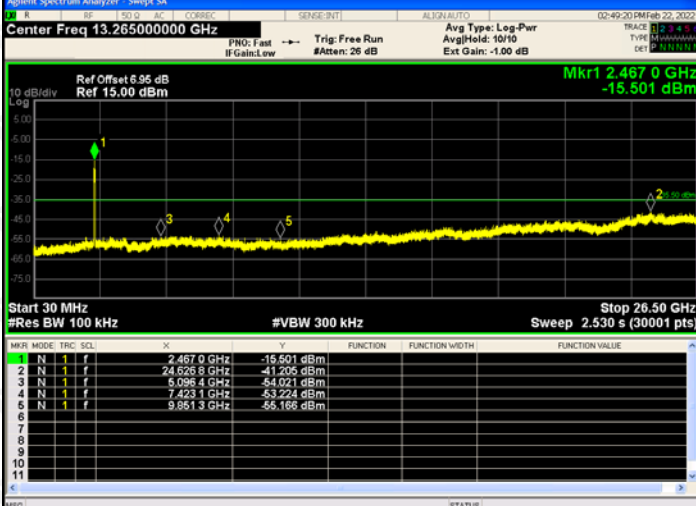
<p>802.11n (HT40)/ LCH</p>	 <table border="1" data-bbox="523 533 1222 701"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4291 GHz</td> <td>-16.532 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6506 GHz</td> <td>-41.109 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7990 GHz</td> <td>-53.540 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.0710 GHz</td> <td>-53.374 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6080 GHz</td> <td>-56.021 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4291 GHz	-16.532 dBm				2	N	1	f	24.6506 GHz	-41.109 dBm				3	N	1	f	4.7990 GHz	-53.540 dBm				4	N	1	f	7.0710 GHz	-53.374 dBm				5	N	1	f	9.6080 GHz	-56.021 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4291 GHz	-16.532 dBm																																																		
2	N	1	f	24.6506 GHz	-41.109 dBm																																																		
3	N	1	f	4.7990 GHz	-53.540 dBm																																																		
4	N	1	f	7.0710 GHz	-53.374 dBm																																																		
5	N	1	f	9.6080 GHz	-56.021 dBm																																																		
<p>802.11n(HT40) /MCH</p>	 <table border="1" data-bbox="523 1059 1222 1227"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4247 GHz</td> <td>-16.239 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6197 GHz</td> <td>-40.837 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.0253 GHz</td> <td>-54.142 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.8916 GHz</td> <td>-53.769 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.8707 GHz</td> <td>-56.329 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4247 GHz	-16.239 dBm				2	N	1	f	24.6197 GHz	-40.837 dBm				3	N	1	f	5.0253 GHz	-54.142 dBm				4	N	1	f	7.8916 GHz	-53.769 dBm				5	N	1	f	9.8707 GHz	-56.329 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4247 GHz	-16.239 dBm																																																		
2	N	1	f	24.6197 GHz	-40.837 dBm																																																		
3	N	1	f	5.0253 GHz	-54.142 dBm																																																		
4	N	1	f	7.8916 GHz	-53.769 dBm																																																		
5	N	1	f	9.8707 GHz	-56.329 dBm																																																		
<p>802.11n(HT40) /HCH</p>	 <table border="1" data-bbox="523 1590 1222 1758"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4670 GHz</td> <td>-15.501 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6258 GHz</td> <td>-41.206 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.0984 GHz</td> <td>-54.021 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4231 GHz</td> <td>-53.224 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.8513 GHz</td> <td>-56.166 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4670 GHz	-15.501 dBm				2	N	1	f	24.6258 GHz	-41.206 dBm				3	N	1	f	5.0984 GHz	-54.021 dBm				4	N	1	f	7.4231 GHz	-53.224 dBm				5	N	1	f	9.8513 GHz	-56.166 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4670 GHz	-15.501 dBm																																																		
2	N	1	f	24.6258 GHz	-41.206 dBm																																																		
3	N	1	f	5.0984 GHz	-54.021 dBm																																																		
4	N	1	f	7.4231 GHz	-53.224 dBm																																																		
5	N	1	f	9.8513 GHz	-56.166 dBm																																																		

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

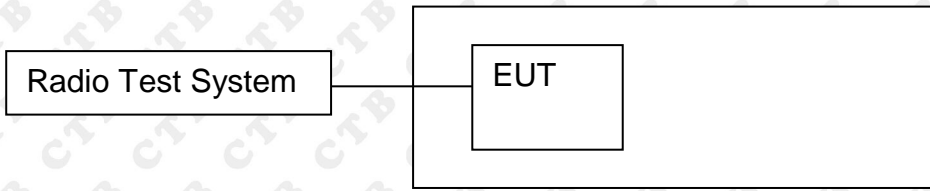

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	7.46	30	PASS
	MCH	7.57	30	PASS
	HCH	7.43	30	PASS
802.11g	LCH	6.70	30	PASS
	MCH	6.97	30	PASS
	HCH	6.82	30	PASS
802.11n(HT20)	LCH	6.13	30	PASS
	MCH	6.50	30	PASS
	HCH	6.84	30	PASS
802.11n(HT40)	LCH	5.75	30	PASS
	MCH	5.95	30	PASS
	HCH	5.76	30	PASS

Mode	Channel.	Maximum Output Power [dBm]
	LCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz Center Freq: 2.412000000 GHz Radio Std: None</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Ext Gain: -1.00 dB Radio Device: BTS</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 1 ms</p> <p>Channel Power Power Spectral Density</p> <p>7.46 dBm / 10.46 MHz -62.73 dBm /Hz</p>
802.11b	MCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz Center Freq: 2.437000000 GHz Radio Std: None</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Ext Gain: -1.00 dB Radio Device: BTS</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 1 ms</p> <p>Channel Power Power Spectral Density</p> <p>7.57 dBm / 9.658 MHz -62.27 dBm /Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz Center Freq: 2.462000000 GHz Radio Std: None</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Ext Gain: -1.00 dB Radio Device: BTS</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 1 ms</p> <p>Channel Power Power Spectral Density</p> <p>7.43 dBm / 10.46 MHz -62.77 dBm /Hz</p>


	LCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Channel Power: 6.70 dBm / 16.35 MHz</p> <p>Power Spectral Density: -65.43 dBm /Hz</p>
802.11g	MCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Channel Power: 6.97 dBm / 16.36 MHz</p> <p>Power Spectral Density: -65.17 dBm /Hz</p>
	HCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Channel Power: 6.82 dBm / 16.36 MHz</p> <p>Power Spectral Density: -65.31 dBm /Hz</p>

	LCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Span 30.000 MHz</p> <p>Ref Offset: 6.91 dB, Ref: 26.91 dBm</p> <p>Channel Power: 6.13 dBm / 17.57 MHz</p> <p>Power Spectral Density: -66.32 dBm /Hz</p>	
802.11n(HT20)	MCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Span 30.000 MHz</p> <p>Ref Offset: 6.96 dB, Ref: 26.96 dBm</p> <p>Channel Power: 6.50 dBm / 17.6 MHz</p> <p>Power Spectral Density: -65.96 dBm /Hz</p>	
	HCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Span 30.000 MHz</p> <p>Ref Offset: 6.96 dB, Ref: 26.96 dBm</p> <p>Channel Power: 6.84 dBm / 17.61 MHz</p> <p>Power Spectral Density: -65.62 dBm /Hz</p>	

	LCH		
802.11n(HT40)	MCH		
	HCH		

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

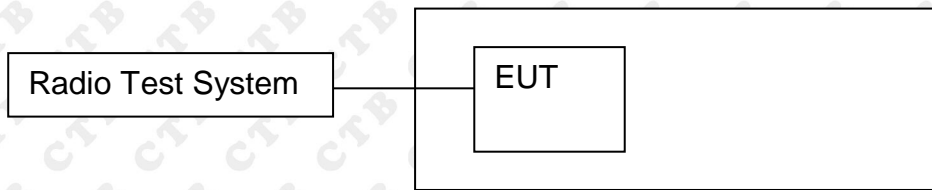

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.463	500	PASS
	MCH	9.658	500	PASS
	HCH	10.461	500	PASS
802.11g	LCH	16.346	500	PASS
	MCH	16.356	500	PASS
	HCH	16.36	500	PASS
802.11n(HT20)	LCH	17.573	500	PASS
	MCH	17.601	500	PASS
	HCH	17.614	500	PASS
802.11n(HT40)	LCH	36.376	500	PASS
	MCH	36.312	500	PASS
	HCH	36.389	500	PASS

Test Graph:

Graphs													
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Ext Gain: -1.00 dB Radio Std: None</p> <p>Ref Offset: 6.91 dB Ref: 26.91 dBm</p> <p>Mkr3 2.417257 GHz -13.813 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.78 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;">14.601 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	9.78 dBm	14.601 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	9.78 dBm											
14.601 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Ext Gain: -1.00 dB Radio Std: None</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3 2.441804 GHz -14.495 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.96 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;">14.697 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	9.96 dBm	14.697 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	9.96 dBm											
14.697 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Ext Gain: -1.00 dB Radio Std: None</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3 2.467237 GHz -17.206 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.59 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;">14.674 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	9.59 dBm	14.674 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	9.59 dBm											
14.674 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											


<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Mkr3 2.420183 GHz -17.218 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.06 dBm</td> </tr> <tr> <td>16.546 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>10.127 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>16.35 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.06 dBm	16.546 MHz			Transmit Freq Error	OBW Power	99.00 %	10.127 kHz			x dB Bandwidth	x dB	-6.00 dB	16.35 MHz			
Occupied Bandwidth	Total Power	6.06 dBm																		
16.546 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
10.127 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
16.35 MHz																				
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.445174 GHz -15.519 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.44 dBm</td> </tr> <tr> <td>16.577 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-4.023 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>16.36 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.44 dBm	16.577 MHz			Transmit Freq Error	OBW Power	99.00 %	-4.023 kHz			x dB Bandwidth	x dB	-6.00 dB	16.36 MHz			
Occupied Bandwidth	Total Power	6.44 dBm																		
16.577 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-4.023 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
16.36 MHz																				
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.470176 GHz -17.061 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.16 dBm</td> </tr> <tr> <td>16.571 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-4.461 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>16.36 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.16 dBm	16.571 MHz			Transmit Freq Error	OBW Power	99.00 %	-4.461 kHz			x dB Bandwidth	x dB	-6.00 dB	16.36 MHz			
Occupied Bandwidth	Total Power	6.16 dBm																		
16.571 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-4.461 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
16.36 MHz																				

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Mkr3 2.420804 GHz -16.793 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.44 dBm</td> </tr> <tr> <td>17.736 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>17.888 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>17.57 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.44 dBm	17.736 MHz			Transmit Freq Error	OBW Power	99.00 %	17.888 kHz			x dB Bandwidth	x dB	-6.00 dB	17.57 MHz			
Occupied Bandwidth	Total Power	5.44 dBm																		
17.736 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
17.888 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
17.57 MHz																				
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.445792 GHz -17.194 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.96 dBm</td> </tr> <tr> <td>17.751 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-8.634 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>17.60 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.96 dBm	17.751 MHz			Transmit Freq Error	OBW Power	99.00 %	-8.634 kHz			x dB Bandwidth	x dB	-6.00 dB	17.60 MHz			
Occupied Bandwidth	Total Power	5.96 dBm																		
17.751 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-8.634 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
17.60 MHz																				
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.470816 GHz -17.971 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.29 dBm</td> </tr> <tr> <td>17.743 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>9.532 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>17.61 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.29 dBm	17.743 MHz			Transmit Freq Error	OBW Power	99.00 %	9.532 kHz			x dB Bandwidth	x dB	-6.00 dB	17.61 MHz			
Occupied Bandwidth	Total Power	6.29 dBm																		
17.743 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
9.532 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
17.61 MHz																				

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.422000000 GHz</p> <p>Ref Offset: 6.91 dB Ref: 26.91 dBm</p> <p>Mkr3: 2.440189 GHz -21.492 dBm</p> <p>Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.30 dBm</td> </tr> <tr> <td colspan="3">36.213 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>1.386 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td colspan="2">36.38 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	5.30 dBm	36.213 MHz			Transmit Freq Error	OBW Power	99.00 %	1.386 kHz	x dB	-6.00 dB	x dB Bandwidth	36.38 MHz	
Occupied Bandwidth	Total Power	5.30 dBm														
36.213 MHz																
Transmit Freq Error	OBW Power	99.00 %														
1.386 kHz	x dB	-6.00 dB														
x dB Bandwidth	36.38 MHz															
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3: 2.455164 GHz -21.224 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.63 dBm</td> </tr> <tr> <td colspan="3">36.206 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>8.452 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td colspan="2">36.31 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	5.63 dBm	36.206 MHz			Transmit Freq Error	OBW Power	99.00 %	8.452 kHz	x dB	-6.00 dB	x dB Bandwidth	36.31 MHz	
Occupied Bandwidth	Total Power	5.63 dBm														
36.206 MHz																
Transmit Freq Error	OBW Power	99.00 %														
8.452 kHz	x dB	-6.00 dB														
x dB Bandwidth	36.31 MHz															
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.452000000 GHz</p> <p>Ref Offset: 6.95 dB Ref: 26.95 dBm</p> <p>Mkr3: 2.470189 GHz -21.177 dBm</p> <p>Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.31 dBm</td> </tr> <tr> <td colspan="3">36.246 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-6.008 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td colspan="2">36.39 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	5.31 dBm	36.246 MHz			Transmit Freq Error	OBW Power	99.00 %	-6.008 kHz	x dB	-6.00 dB	x dB Bandwidth	36.39 MHz	
Occupied Bandwidth	Total Power	5.31 dBm														
36.246 MHz																
Transmit Freq Error	OBW Power	99.00 %														
-6.008 kHz	x dB	-6.00 dB														
x dB Bandwidth	36.39 MHz															

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

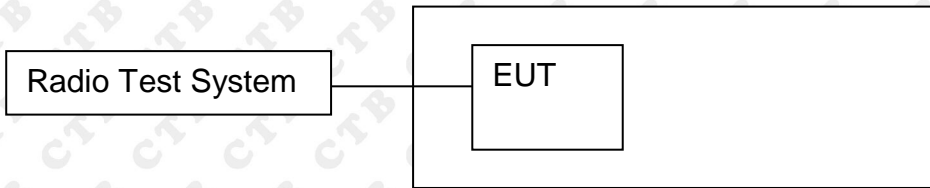

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-22.197	8	PASS
	MCH	-21.831	8	PASS
	HCH	-21.653	8	PASS
802.11g	LCH	-26.621	8	PASS
	MCH	-26.531	8	PASS
	HCH	-26.014	8	PASS
802.11n(H T20)	LCH	-25.175	8	PASS
	MCH	-26.409	8	PASS
	HCH	-26.784	8	PASS
802.11n(H T40)	LCH	-29.631	8	PASS
	MCH	-30.228	8	PASS
	HCH	-29.508	8	PASS

Test Graph

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.41284 GHz -22.197 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.43763 GHz -21.831 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.46263 GHz -21.653 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.41137 GHz -26.821 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.43388 GHz -26.531 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.46044 GHz -26.014 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
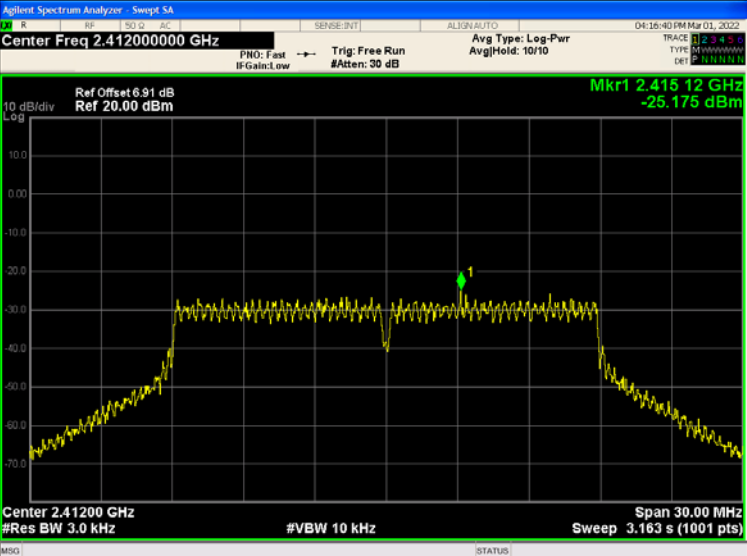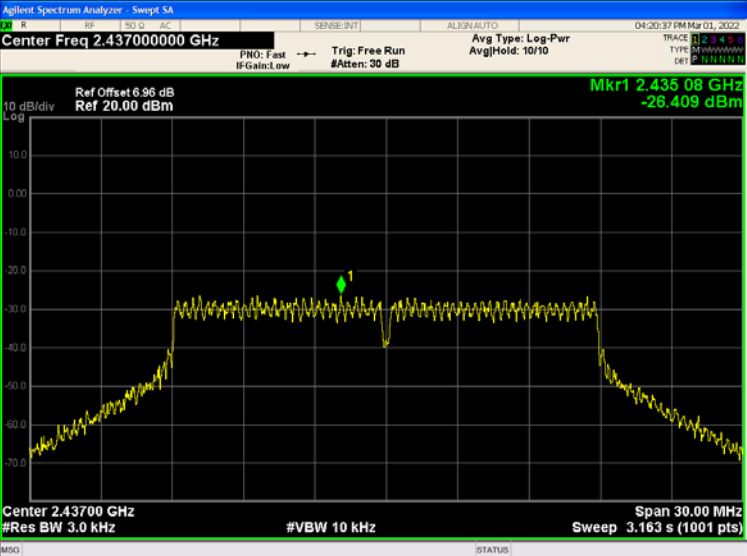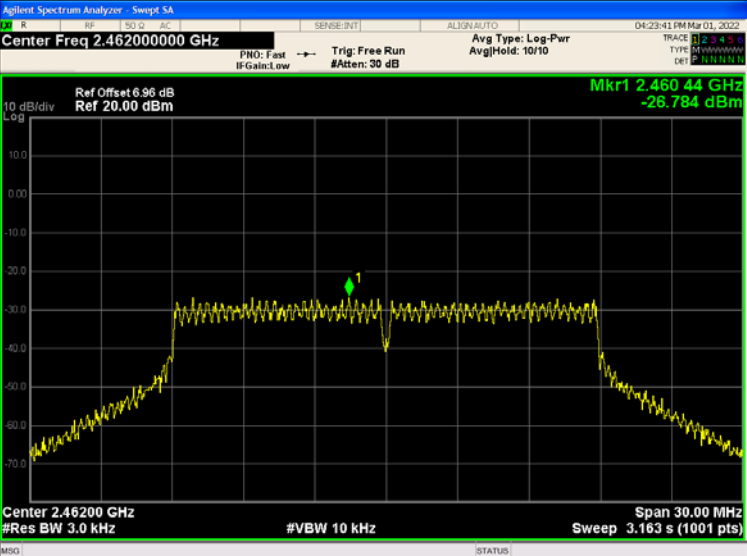
<p>802.11n(HT20)/LC H</p>	
<p>802.11n(HT20)/MC H</p>	
<p>802.11n(HT20)/HC H</p>	

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.42200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.41732 GHz -29.831 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.42854 GHz -30.228 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.45200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.44696 GHz -29.508 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB Antenna and no consideration of replacement. The best case gain of the antenna is 1dBi.

13. EUT PHOTOGRAPHS

EUT Photo 1




EUT Photo 2




14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

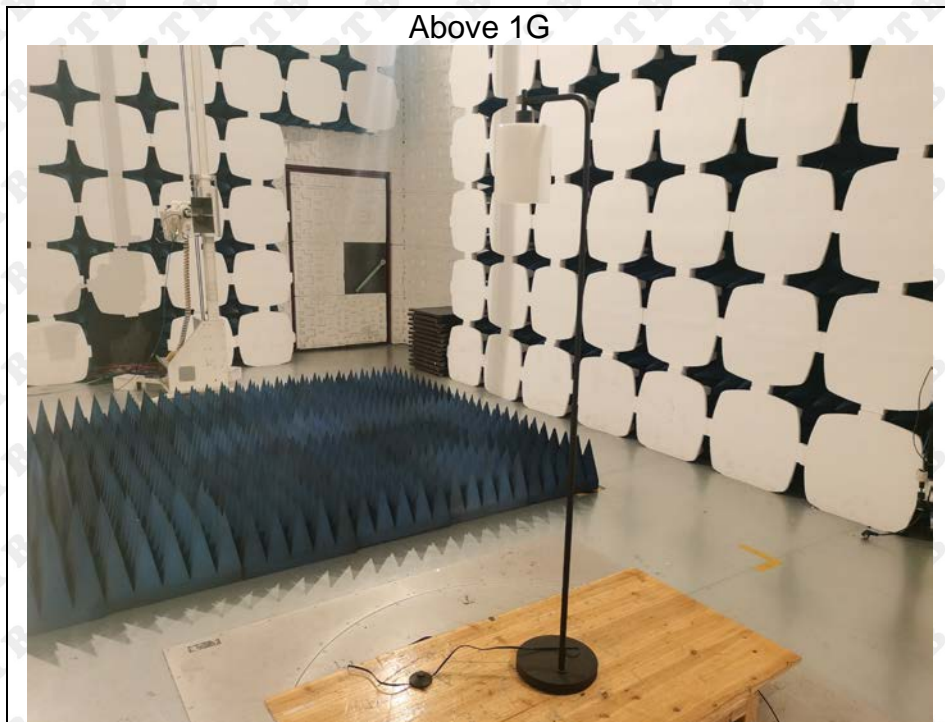

Conducted Emission

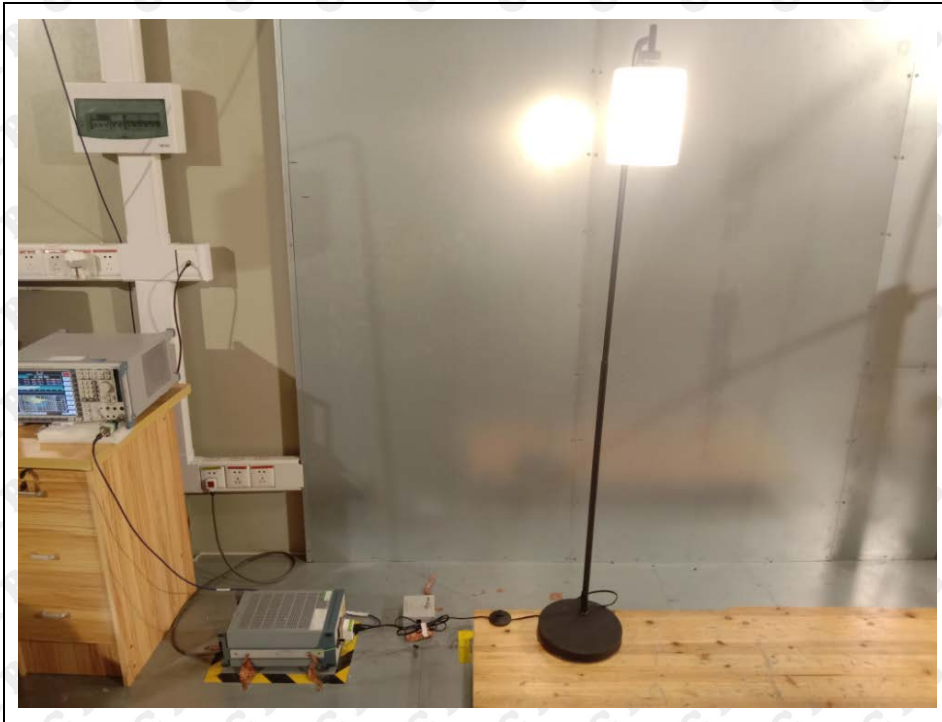

XXXXXXXX END OF REPORT XXXXXXXX