


尺寸: 60\*100mm

材质: 105g铜版纸

印刷: 四色


折叠方式: 风琴五折页

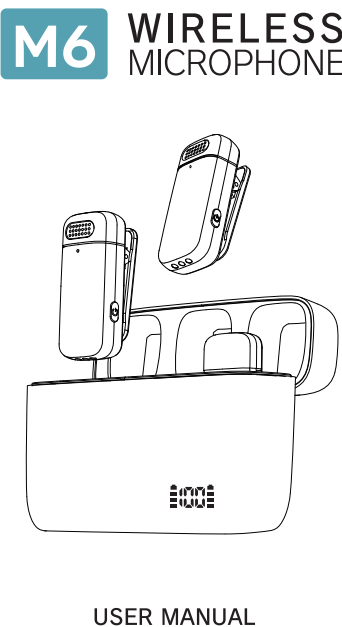

**M6 WIRELESS MICROPHONE**

USER MANUAL

### Packing List

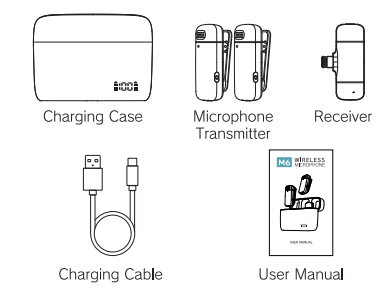


**Package Contents:**

1. Microphone Transmitter x2
2. Receiver x1
3. Charging Case x1
4. Charging Cable x1
5. User Manual X1

**Note:**  
This product is a smart wireless microphone that provides professional-grade recording output. Plug and play, no app required.


### Product Overview

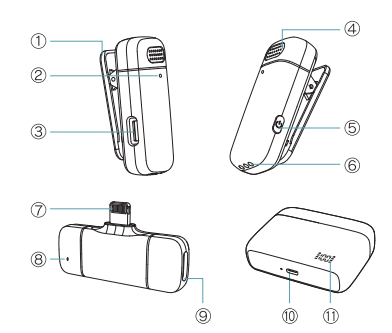


- ① Microphone clip
- ② Indicator light of microphone
- ③ Type-c charging port of microphone
- ④ Windproof net /MIC
- ⑤ Power button of microphone
- ⑥ Charging pin
- ⑦ Lightning port to connect phone
- ⑧ Indicator light of receiver
- ⑨ Receiver charging port
- ⑩ Type-c charging port of case
- ⑪ Indicator light of case

### How to use


**Step1:** Connect the receiver to phone with port.




**Step2:** Press power button of microphone 3s, the indicator light turns green, and then microphone is turned on.



**Step3:** The indicator red light of receiver keeps always on, then open the phone camera, live APP or other APPs, and then to use the microphone to receive sound.

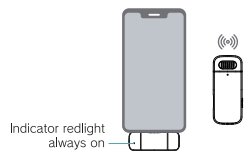


**Special Note:**  
For the use of port: there is no battery in receiver, and no need to recharge during live. If the phone is low power during live, it can be recharged directly through the receiver's port.

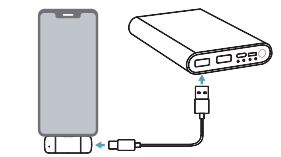


### How to charging

1. Charging the case: Use the type-c charging cable (provided) to connect your computer (with power on) or an adapter (not provided) to your charging case. The display flashes single-digit numbers while charging.

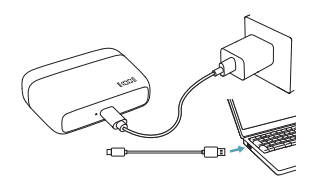


2. Charging the Microphone Transmitter:

A. Put the microphone transmitter into the charging case and close the case. The charge case indicator number lights up and the corresponding battery symbol flashes.



B. Use the type-c charging cable (provided) to connect your computer (with power on) or an adapter (not provided) to your microphone transmitter. The red light is always on and light off after fully charged.

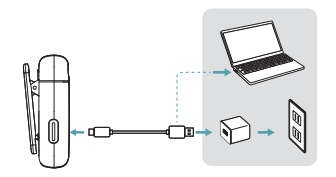

### About UI

Function	Button	LED
Power on (Unconnected)	Long Press 3S	Blinking alternately red and green
Power off	Long Press 3S	All the lights go out
Connected		Green light always on
Noise reduction	Automatically on	Green light always on
Reverberation	Press three times to turn on or off	Red light blinks once then the green light is always on
Turn on silent mode	Press twice	Green light is blinks
Turn off silent mode	Press twice	Green light always on
Charging		Red light is always on
Fully charged		Light is off
Low battery		Red light blinks every 10s

### Receiver

Function		LED
Power on (Not paired with the microphone transmitter)	Automatically power on after plugging in the mobile phone port	Red light blinks
Power off	Automatic shut down after unplugging	Lights is off
Paired with the microphone transmitter		Red light is always on

### Specification

Model: M6  
Capacity: 500mAh, 1.85Wh/3.7V  
Input: 5V=1A  
Output: 5V=0.3A

### Q&A

**Q: What should I do if there is no sound in the recorded video?**

A: Please confirm below 4 situations:

1. Confirm whether the connection is successful: The indicator lights of the microphone and receiver are always on, which means the connection is successful. Only when the connection is successful can the recording sound be started.
2. This microphone supports Mute on and Mute off, make sure the green indicator light of microphone stays on when recording.
3. You need to unplug the receiver from the phone to hear the sound after recording is done.
4. Confirm whether the phone volume is not at 0, and adjust properly.

**Q: Do the microphone need to be charged?**

A: Microphone need to be charged with included Type-C charging cable or put in the charging case when it's running out of power. You may see red light blinks every 10s on the microphone.

**Q: Can it be used as a amplifier?**

A: It is a microphone to pick up sound only, not a loudspeaker

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.