


Product Overview

The wireless indoor siren is an accessory of smart alarm system. It could work for 24 months standby by 3 x AA dry cells. It is easy to set up, reliable and safe. With core microprocessor and tamper device, it will alarm and push will be showed in App once it is tampered. And it has an indicator to show the status of alarm system. The indicator will light up for 1 second for every 9 seconds in the event of low battery and push notification will be sent on your APP.

Specifications

• Battery	3x AA dry cells
• Transmission Distance	Up to 300m without obstacle
• Standby Current	≤110 uA
• Working Current	≤350 mA
• Siren Volume	90dB@30cm
• Lens Color	Red/Blue/Yellow
• Working Temperature	-10C°-50C°
• Humidity	90%rh (non-condensing)
• Tamper Device	Supported
• Prompt Tone and Voice Adjustment	Supported
• Battery Standby Time	24 Months
• Housing Material	PC+ABS
• Indicator of System Status	Yes
• Weight	115.0g(battery not included) 184.0g(battery included)
• Dimensions(L×W×H)	108mm×86mm×28mm

Appearances

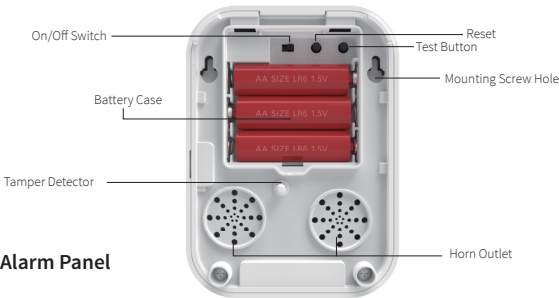


Pairing with Alarm Panel

- Scanning the QR Code for Pairing
- 1) Turn on the siren, to ensure the siren light is flash, if it is fixed, please reset the siren to makes the siren light flash;
 - 2) Turn on the alarm system;
 - 3) Scan the QR code of the siren, You can also scan the QR code saved in your phone album;
 - 4) Name it, after "Save", the pairing result would be confirmed in App and indicated with 2 beeps from siren.

**Test: You can also press "Test" button in App to check whether the siren is paired successfully or not.*

Parameters and Settings

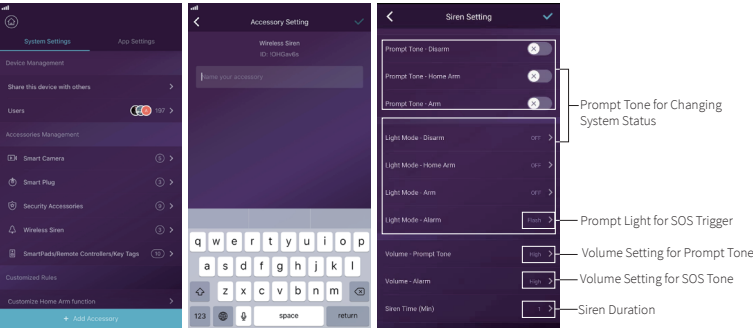

Lighting Effects

Working Status	Home Arm	Arm	Disarm	SOS
Lighting Modes	Blue On	Red On	Green On	Red Flash Sharply

Accessories

1. 2 x Screws
2. 2 x Plastic Screw Bolts