REPORT No.: SZ21010201W01



TEST REPORT

| APPLICANT | SHENZHEN XFANIC TECHNOLOGY CO.,LTD |
|--------------|---------------------------------------|
| PRODUCT NAME | : Bluetooth adapter |
| MODEL NAME | : B108, XF-B9007, BT5A |
| BRAND NAME | : XFANIC, XCELLON |
| FCC ID | : 2ASRI-B108 |
| STANDARD(S) | : 47 CFR Part 15 Subpart C |
| RECEIPT DATE | : 2021-01-19 |
| TEST DATE | : 2021-01-30 to 2021-02-22 |
| ISSUE DATE | : 2021-02-26 |

Edited by:

Leng Maoyin Zeng Xiaoying (Rapporte

Approved by:

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn





DIRECTORY

| 1. Technical Information 3 |
|--|
| 1.1. Applicant and Manufacturer Information 3 |
| 1.2. Equipment Under Test (EUT) Description 3 |
| 1.3. The Channel Number and Frequency 4 |
| 1.4. Test Standards and Results 5 |
| 1.5. Environmental Conditions ······ 6 |
| 2. 47 CFR Part 15C Requirements ······ 7 |
| 2.1. Antenna Requirement ······7 |
| 2.2. Duty Cycle of Test Signal 8 |
| 2.3. Maximum Peak Conducted Output Power ······ 8 |
| 2.4. Maximum Average Conducted Output Power ······14 |
| 2.5. 6 dB Bandwidth |
| 2.6. Conducted Spurious Emissions and Band Edge21 |
| 2.7. Power Spectral Density (PSD)28 |
| 2.8. Conducted Emission |
| 2.9. Restricted Frequency Bands |
| 2.10. Radiated Emission ······44 |
| Annex A Test Uncertainty54 |
| Annex B Testing Laboratory Information55 |

| Change History | | | | | |
|----------------|------------|-------------------|--|--|--|
| Version | Date | Reason for change | | | |
| 1.0 | 2021-02-26 | First edition | | | |
| | | | | | |





1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

| Applicant: | SHENZHEN XFANIC TECHNOLOGY CO.,LTD |
|--|--|
| Applicant Address | 1-4/F, Block 2, Longcheng Industrial Area, Dalang Subdistrict, |
| Applicant Address: | Longhua District, Shenzhen 518000, China |
| Manufacturer: SHENZHEN XFANIC TECHNOLOGY CO.,LTD | |
| | 1-4/F, Block 2, Longcheng Industrial Area, Dalang Subdistrict, |
| Manufacturer Address: | Longhua District, Shenzhen 518000, China |

1.2. Equipment Under Test (EUT) Description

| Product Name: | Bluetooth adapter |
|----------------------------|-------------------------------|
| Serial No.: | (N/A, marked #1 by test site) |
| Hardware Version: | A0 |
| Software Version: | NA |
| Equipment Type: | Bluetooth LE |
| Bluetooth Version: | 5.0 |
| Modulation Type: | GFSK |
| Data Rate: | 1Mbps, 2Mbps |
| Operating Frequency Range: | 2402MHz-2480MHz |
| Antenna Type: | PCB Antenna |
| Antenna Gain: | 0dBi |

Note 1: According to the certificate holder, they declared that the models B108, XF-B9007, BT5A have the same hardware and software, only different for model name, all RF parameters remain the same as before. The main measuring internal model is B108, only the results for ML660P were recorded in this report.

Note 2: We use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|--------------------|---------|--------------------|---------|--------------------|---------|--------------------|
| 0 | 2402 | 10 | 2422 | 20 | 2442 | 30 | 2462 |
| 1 | 2404 | 11 | 2424 | 21 | 2444 | 31 | 2464 |
| 2 | 2406 | 12 | 2426 | 22 | 2446 | 32 | 2466 |
| 3 | 2408 | 13 | 2428 | 23 | 2448 | 33 | 2468 |
| 4 | 2410 | 14 | 2430 | 24 | 2450 | 34 | 2470 |
| 5 | 2412 | 15 | 2432 | 25 | 2452 | 35 | 2472 |
| 6 | 2414 | 16 | 2434 | 26 | 2454 | 36 | 2474 |
| 7 | 2416 | 17 | 2436 | 27 | 2456 | 37 | 2476 |
| 8 | 2418 | 18 | 2438 | 28 | 2458 | 38 | 2478 |
| 9 | 2420 | 19 | 2440 | 29 | 2460 | 39 | 2480 |

1.3. The Channel Number and Frequency

Note 1: The black bold channels were selected for test.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn



1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

| No. | Identity | Document Title |
|-----|----------------|-------------------------|
| 1 | 47 CFR Part 15 | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section | Description | Test Date | Test Engineer | Result | Method determination /Remark |
|------|----------------------|--|------------------------------|------------------|------------|------------------------------------|
| 1 | 15.203 | Antenna Requirement | N/A | N/A | PASS | No deviation |
| 2 | N/A | Duty Cycle of Test Signal | Feb 16, 2021 | Tu Ya'nan | PASS | No deviation |
| 3 | 15.247(b) | Maximum Peak Conducted Output Power | Feb 16, 2021 | Tu Ya'nan | PASS | No deviation |
| 4 | 15.247(b) | Maximum Average Conducted Output Power | Feb 16, 2021 | Tu Ya'nan | PASS | No deviation |
| 5 | 15.247(a) | Bandwidth | Feb 16, 2021 | Tu Ya'nan | PASS | No deviation |
| 6 | 15.247(d) | Conducted Spurious Emission and Band Edge | Feb 16, 2021 | Tu Ya'nan | PASS | No deviation |
| 7 | 15.247(e) | Power Spectral Density (PSD) | Feb 16, 2021 | Tu Ya'nan | PASS | No deviation |
| 8 | 15.207 | Conducted Emission | Jan 30, 2021 | Huang Zhiye | PASS | No deviation |
| 9 | 15.247(d) | Restricted Frequency Bands | Feb 01, 2021 Feb 22, 2021 | Gao Jianrou | PASS | No deviation |
| 10 | 15.209, 15.247(d) | Radiated Emission | Feb 01, 2021 Feb 22, 2021 | Gao Jianrou | PASS | No deviation |
| Note | • 1: The tests | were performed a | ccording to the r | method of measu | urements p | prescribed in |

ANSIC63.10-2013 and KDB558074 D01 v05r02.





Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 1.5dB means the cable loss is 1.5dB.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:


| Temperature (°C): | 15-35 |
|-----------------------------|--------|
| Relative Humidity (%): | 30-60 |
| Atmospheric Pressure (kPa): | 86-106 |



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn





2.47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1.Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2.Test Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 E-mail: service@morlab.cn Http://www.morlab.cn

Fax: 86-755-36698525




2.2. Duty Cycle of Test Signal

2.2.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered). When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than ±2%; otherwise, the duty cycle is considered to be non constant.

2.2.2.Test Description

Test Setup:



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

2.2.3.Test Result

| Test Mode | Mode Data Rate Duty Cycle(%) (D) | | Duty Factor (10*lg[1/D]) | |
|-----------|-------------------------------------|-------|-----------------------------|--|
| GFSK | 1Mbps | 85.20 | 0.70 | |
| | 2Mbps | 57.69 | 2.39 | |



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn

Dama **0** af



2.3. Maximum Peak Conducted Output Power


2.3.1.Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.3.2.Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.3.3.Test Procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer: a) Set analyzer center frequency to channel center frequency

- b)Set RBW to1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time = auto couple
- f) Detector = peak
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use peak marker function to determine the peak amplitude level





2.3.4.Test Result

1Mbps

A.Test Verdict:

| Channel | Frequency | Measured Outp | out Peak Power | Lir | Verdict | |
|---------|-----------|---------------|----------------|-----|---------|---------|
| Channel | (MHz) | dBm | W | dBm | W | verdict |
| 0 | 2402 | 3.76 | 0.0024 | | | PASS |
| 19 | 2440 | 3.02 | 0.0020 | 30 | 1 | PASS |
| 39 | 2480 | 3.83 | 0.0024 | | | PASS |

B.Test Plot:




(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn







(Channel 19, 2440MHz)



(Channel 39, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



2Mbps

A.Test Verdict:

| Channel | Frequency | Measured Outp | put Peak Power Limit | | | Verdict | |
|---------|-----------|---------------|----------------------|-----|---|---------|--|
| Channel | (MHz) | dBm | W | dBm | W | verdict | |
| 0 | 2402 | 3.38 | 0.0022 | | | PASS | |
| 19 | 2440 | 3.07 | 0.0020 | 30 | 1 | PASS | |
| 39 | 2480 | 3.31 | 0.0021 | | | PASS | |

B.Test Plot:

| Agilent Spectr | rum Analyzer - Swept SA RF 50 Q AC | | SENSE:PULSE S | | SNAUTO 04: | 23:45 PMFeb 16, 2021 | |
|-----------------------|---------------------------------------|------------------|---------------|------------------------------|------------|--|-------------------------------------|
| Center F | req 2.40200000 | GHz PNO: Fast | | Avg Type: Lo Avg Hold:>10 | og-Pwr | TRACE 1 2 3 4 5 6 TYPE MWWWW DET P N N N N N | Frequency |
| | | IFGain:Low | Atten: 30 dB | | | | Auto Tune |
| 10 dB/div Log | Ref Offset 1.5 dB Ref 20.00 dBm | | | | IVIKET 2. | 401 86 GHz 3.377 dBm | |
| | | | | | | | Center Freq |
| 10.0 | | | î1 | | | | 2.402000000 GHz |
| 0.00 | | | | | | | |
| -10.0 | | | | | | | Start Freq 2.397000000 GHz |
| 10.0 | | | | | | | |
| -20.0 | | | | | | | Stop Freq 2.407000000 GHz |
| -30.0 | | | | | | | |
| -40.0 | | | | | | | CF Step 1.000000 MHz |
| -50.0 | | | | | | | <u>Auto</u> Man |
| | | | | | | | Freq Offset |
| -60.0 | | | | | | | 0 Hz |
| -70.0 | | | | | | | |
| | | | | | | | |
| Center 2.4 #Res BW | 402000 GHz | #\/B\M | 8.0 MHz | Cu | S | oan 10.00 MHz ms (1001 pts) | |
| MSG | GAVIWI12 | # 4 10 44 | 6.0 WH12 | 510 | STATUS | ms (1001 pts) | |


(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn







(Channel 19, 2440MHz)



(Channel 39, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



2.4. Maximum Average Conducted Output Power


2.4.1.Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

2.4.2.Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.4.3.Test Procedure

KDB 558074 Section 8.3.2 was used in order to prove compliance.





REPORT No.: SZ21010201W01

2.4.4.Test Result

1Mbps

| | | | Averag | verage Power | | | | |
|---------|--------------------|----------|----------------|-----------------|--------|-----|-----|---------|
| Channel | Frequency (MHz) | Measured | Duty Factor | Duty F Calcu | | Lin | nit | Verdict |
| | | dBm | гасю | dBm | W | dBm | W | |
| 0 | 2402 | 2.34 | | 3.04 | 0.0020 | | | PASS |
| 19 | 2440 | 2.11 | 0.70 | 2.81 | 0.0019 | 30 | 1 | PASS |
| 39 | 2480 | 2.49 | | 3.19 | 0.0021 | | | PASS |

2Mbps

| | | | Averag | e Power | e Power | | | |
|---------|-----------|----------|--------|---------|---------|-----|-----|---------|
| Channel | Frequency | Measured | Duty | Duty F | | Lin | nit | Verdict |
| | (MHz) | | Factor | Calcu | lated | | | |
| | | dBm | | dBm | W | dBm | W | |
| 0 | 2402 | 0.80 | | 3.19 | 0.0021 | | | PASS |
| 19 | 2440 | 0.33 | 2.39 | 2.72 | 0.0019 | 30 | 1 | PASS |
| 39 | 2480 | 0.67 | | 3.06 | 0.0020 | | | PASS |



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-




2.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

2.5.2.Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.5.3.Test Procedure

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize

h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission





The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW \ge 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \ge 6 dB.

2.5.4.Test Result

1Mbps

A.Test Verdict:

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limits(kHz) | Result |
|---------|-----------------|----------------------|-------------|--------|
| 0 | 2402 | 0.676 | ≥500 | PASS |
| 19 | 2440 | 0.675 | ≥500 | PASS |
| 39 | 2480 | 0.683 | ≥500 | PASS |


B.Test Plot:



(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525







(Channel 19, 2440 MHz)



(Channel 39, 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525

.morlab.cn E-



2Mbps

A.Test Verdict:

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limits(kHz) | Result |
|---------|-----------------|----------------------|-------------|--------|
| 0 | 2402 | 1.163 | ≥500 | PASS |
| 19 | 2440 | 1.182 | ≥500 | PASS |
| 39 | 2480 | 1.166 | ≥500 | PASS |

B.Test Plot:




(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn







(Channel 19, 2440 MHz)




(Channel 39, 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525

w.morlab.cn E






2.6. Conducted Spurious Emissions and Band Edge

2.6.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.6.2.Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.6.3.Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



REPORT No.: SZ21010201W01

2.6.4.Test Result

1Mbps

A.Test Verdict:

| | Frequency | requency Measured Max. Out of | | (dBm) | |
|---------|-----------|-------------------------------|---------------|--------------|---------|
| Channel | (MHz) | Band Emission (dBm) | Carrier Loval | Calculated | Verdict |
| | () | | Carrier Level | -20dBc Limit | |
| 0 | 2402 | -42.56 | 2.50 | -17.50 | PASS |
| 19 | 2440 | -42.77 | 1.39 | -18.61 | PASS |
| 39 | 2480 | -42.26 | 2.41 | -17.59 | PASS |

B.Test Plot:



(30MHz to 25GHz, Channel 0)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525

REPORT No.: SZ21010201W01



| enter Freq 2.40 | 50 Ω AC 00000000 GHz PNO: Wi IEGaint | de 😱 Trig: Fre | e Run Avgļi | ALIGNAUTO Type: Log-Pwr Hold:>100/100 | 03:21:18 PMFeb 16, 202 TRACE 1 2 3 4 5 TYPE MWWWW DET P N N N N | Frequency |
|----------------------------------|---|--|-------------|---|--|-------------------------------------|
| dB/div Ref 20 | set 1.5 dB .00 dBm | | | Mkr | 2 2.400 00 GH: -55.047 dBn | Auto Tur |
| 9 00 | | | | | | Center Fre 2.400000000 Gi |
| .0 .0 .0 | | | 2 | | | Start Fro 2.395000000 GI |
| .0 .0 | | www.www.www.www.www.www.www.www.www.ww | | | | Stop Fre 2.405000000 GF |
| enter 2.400000 tes BW 100 kHz | | VBW 300 kHz | | #Sweep 1. | Span 10.00 MH 000 ms (1001 pts | 1.000000 M |
| R MODE TRC SCL N 1 f N 1 f | × 2.402 04 GH: 2.400 00 GH: | | | FUNCTION WIDTH | FUNCTION VALUE | Auto Ma |
| | | | | | | |


(Band Edge, Channel 0)



(30MHz to 25GHz, Channel 19)




Fax: 86-755-36698525 E-mail: service@morlab.cn





| art Freq 30.00000 | | | ALIGN AUTO (pe: Log-Pwr Id: 34/100 | TYPE | 23456 WWWWW NNNNN | Frequency |
|--------------------------------------|------|------------|--|--------------------------|-------------------------|--|
| Ref Offset 1.5 dB/div Ref 20.00 c | 5 dB | | Mkr | 2 24.376 4 | 4 GHz dBm | Auto Tur |
| 29 1 | | | | | | Center Fr 12.515000000 G |
| 0.0 0.0 0.0 | | | | | 2 | Start Fro 30.000000 Mi |
| | | | | | | |
| 0.0 0.0 0.0 | | | | | | and the second |
| 0.0 | #VE | 3W 300 kHz | الليكيني من المسلما المسلما | Stop 25.0 .389 s (400 | 01 pts) | Stop Fre 25.00000000 GI CF Ste 2.497000000 GI Auto Mi |

(30MHz to 25GHz, Channel 39)

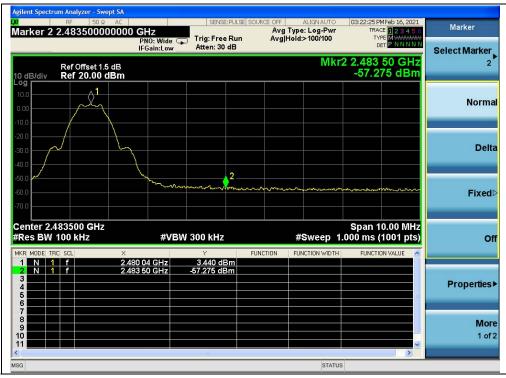

(Band Edge, Channel 39)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn

_




REPORT No.: SZ21010201W01

2Mbps

A.Test Verdict:

| | Frequency | Measured Max. Out of | Limit | (dBm) | |
|---------|-----------|----------------------|---------------|----------------------------|---------|
| Channel | (MHz) | Band Emission (dBm) | Carrier Level | Calculated -20dBc Limit | Verdict |
| 0 | 2402 | -41.97 | -0.21 | -20.21 | PASS |
| 19 | 2440 | -42.45 | -1.02 | -21.02 | PASS |
| 39 | 2480 | -42.17 | -0.09 | -20.09 | PASS |

B.Test Plot:

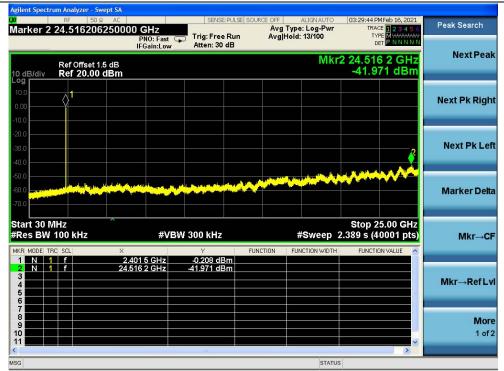


(30MHz to 25GHz, Channel 0)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





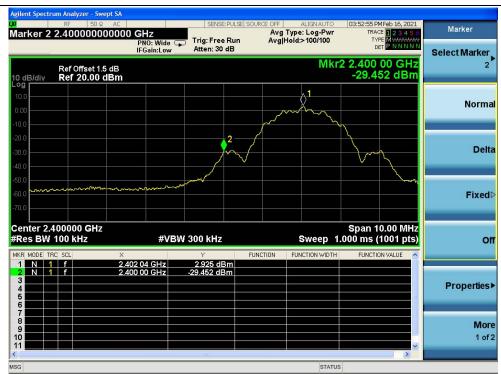


(Band Edge, Channel 0)



(30MHz to 25GHz, Channel 19)



Fax: 86-755-36698525 E-mail: service@morlab.cn







(30MHz to 25GHz, Channel 39)



(Band Edge, Channel 39)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn




2.7. Power Spectral Density (PSD)

2.7.1.Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.7.2.Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

2.7.3.Test Procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW





2.7.4.Test Result

1Mbps

A.Test Verdict:

| | Spectral Power Density (dBm/3kHz) | | | | | | |
|---------|-----------------------------------|-------------------------|------------------|---------|--|--|--|
| Channel | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict | | | |
| 0 | 2402 | -12.18 | 8 | PASS | | | |
| 19 | 2440 | -12.52 | 8 | PASS | | | |
| 39 | 2480 | -11.85 | 8 | PASS | | | |

B.Test Plot:



(Channel 0, 2402MHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn

D-. . .







(Channel 19, 2440MHz)



(Channel 39, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



2Mbps

A.Test Verdict:

| | Spectral Power Density (dBm/3kHz) | | | | | | |
|---------|-----------------------------------|-------------------------|------------------|---------|--|--|--|
| Channel | Frequency (MHz) | Measured PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict | | | |
| 0 | 2402 | -15.11 | 8 | PASS | | | |
| 19 | 2440 | -16.10 | 8 | PASS | | | |
| 39 | 2480 | -14.39 | 8 | PASS | | | |

B.Test Plot:




(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn







(Channel 19, 2440MHz)



(Channel 39, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



2.8. Conducted Emission

2.8.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/50 Ω line impedance stabilization network (LISN).

| | Conducted Limit (dBµV) | | |
|-----------------------|------------------------|----------|--|
| Frequency range (MHz) | Quai-peak | Average | |
| 0.15 - 0.50 | 66 to 56 | 56 to 46 | |
| 0.50 - 5 | 56 | 46 | |
| 5 - 30 | 60 | 50 | |


Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2.Test Description

Test Setup:

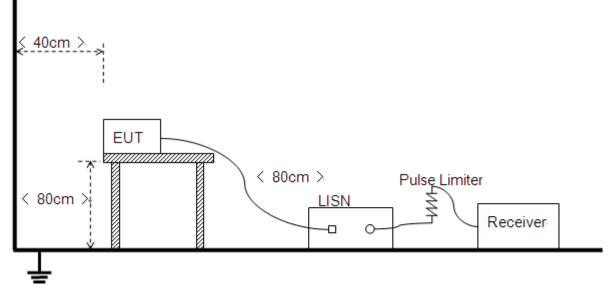

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.





2.8.3.Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A.Test Setup:


Test Mode: <u>EUT+PC+PC ADAPTER+BT TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB μ V] =U_R + L_{Cable loss} [dB] + A_{Factor} U_R: Receiver Reading A_{Factor}: Voltage division factor of LISN







B.Test Plot:

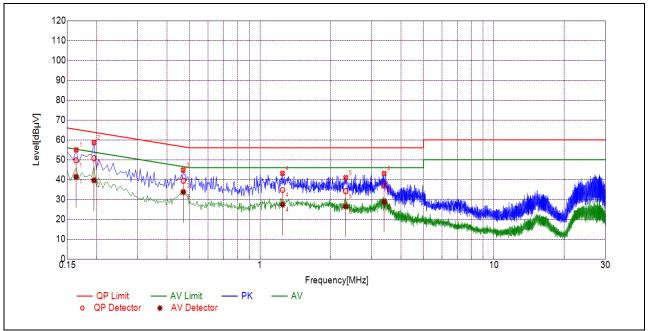

(L Phase)

| No. | Fre. (MHz) | Emission Level (dBµV) | | Limit (dBµV) | | Power-line | Verdict |
|-----|---------------|-----------------------|---------|--------------|---------|------------|---------|
| | | Quai-peak | Average | Quai-peak | Average | | |
| 1 | 0.1634 | 49.71 | 41.41 | 65.29 | 55.29 | Line | PASS |
| 2 | 0.1949 | 50.82 | 39.69 | 63.83 | 53.83 | | PASS |
| 3 | 0.4699 | 39.44 | 33.77 | 56.52 | 46.52 | | PASS |
| 4 | 1.2478 | 34.79 | 27.38 | 56.00 | 46.00 | | PASS |
| 5 | 2.3244 | 34.16 | 26.44 | 56.00 | 46.00 | | PASS |
| 6 | 3.3969 | 37.23 | 28.76 | 56.00 | 46.00 | | PASS |




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

REPORT No.: SZ21010201W01



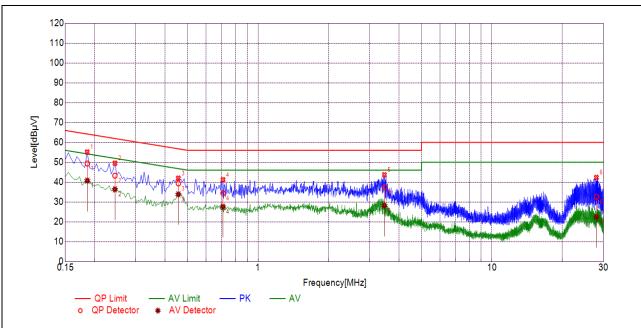

| (N | Phase) |
|----|--------|
|----|--------|

| No. | Fre. (MHz) | Emission Level (dBµV) | | Limit (dBµV) | | Power-line | Verdict |
|-----|---------------|-----------------------|---------|--------------|---------|------------|---------|
| | | Quai-peak | Average | Quai-peak | Average | | |
| 1 | 0.1862 | 49.35 | 40.72 | 64.21 | 54.21 | Neutral | PASS |
| 2 | 0.2443 | 43.25 | 36.35 | 61.95 | 51.95 | | PASS |
| 3 | 0.4563 | 39.31 | 33.85 | 56.76 | 46.76 | | PASS |
| 4 | 0.7079 | 34.40 | 27.55 | 56.00 | 46.00 | | PASS |
| 5 | 3.4687 | 37.46 | 28.16 | 56.00 | 46.00 | | PASS |
| 6 | 27.9682 | 32.59 | 22.43 | 60.00 | 50.00 | | PASS |



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn






2.9. Restricted Frequency Bands

2.9.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.9.2.Test Description

Test Setup

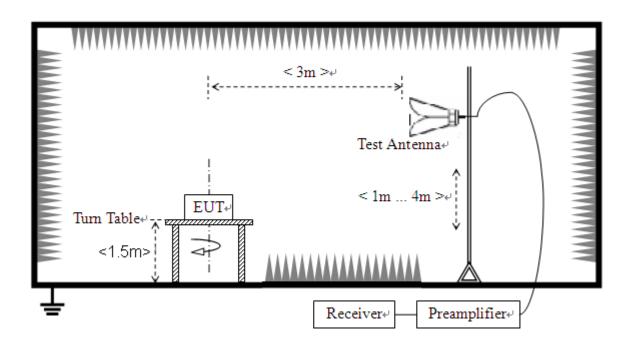

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.





2.9.3.Test Procedure

Span = wide enough to fully capture the emission being measured RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1GHz VBW = 3 MHz Sweep = auto Detector function = peak/average Trace = max hold Allow the trace to stabilize

2.9.4.Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

1Mbps

A.Test Verdict:

| Channel | Frequency | Detector | Receiver Reading | A _T | A _{Factor} | Max. Emission | Limit | Verdict |
|---------|-----------|----------|--------------------------|----------------|---------------------|------------------|----------|----------|
| Channer | (MHz) | PK/ AV | U _R (dBµV) | (dB) | (dB@3m) | E (dBµV/m) | (dBµV/m) | Vertilet |
| 0 | 2376.82 | PK | 27.16 | 6.74 | 27.20 | 61.10 | 74 | PASS |
| 0 | 2390.00 | AV | 15.44 | 6.74 | 27.20 | 49.38 | 54 | PASS |
| 39 | 2486.21 | PK | 26.03 | 6.74 | 27.20 | 59.97 | 74 | PASS |
| 39 | 2484.07 | AV | 17.10 | 6.74 | 27.20 | 51.04 | 54 | PASS |



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525


Http://www.morlab.cn



B.Test Plot:

| | pectrum Analyze | | | | | | | | |
|--|-----------------------|---------------------|-------------------------------|---------------------------------|-----------------------------|--|----------------------------|---|--------------------|
| <mark>X/</mark> RL Marker 1 | RF PRESEL | 50 Ω DC 24000000 | GH ₇ | SENSE | Av | ALIGN OFF | TRAC | Feb 01, 2021 | Marker |
| 10 dB/div | PREAMP | .99 dBµV | PNO: Fast (IFGain:Low | Trig: Free R #Atten: 10 d | un Avı B | j Hoid:>100/100 Mkr1 | DE 2.376 8 | 24 GHz 1 dBµV | Select Marker 1 |
| 67.0 | | | | | | | | | Norm |
| 57.0 47.0 37.0 | | | | | | 1_ | 2 | | Del |
| 27.0 17.0 5.99 | ₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩ | ₩ | erendenden formanden operatie | 1 | 2-485-1-1717-341942-1-4-4-4 | United and the stand of the sta | alanta a serie de serie de | pathong in a print of the second s | Fixe |
| tart 2.3 es BW (| 0000 GHz (CISPR) 1 | 1 MHz | #VB | W 3.0 MHz | | - | Stop 2.40 I.000 ms (′ | 1001 pts) | (|
| KR MODE T 1 N 2 N 3 4 5 | | |) 824 GHz) 000 GHz | Υ 27.161 dΒμ\ 25.917 dΒμ\ | FUNCTION | FUNCTION WIDTH | FUNCTIO | | Properties |
| 6 7 8 9 0 | | | | | | | | | Mc 1 c |
| G | | | | III | | STATU | | • | |

(PEAK, Channel 0)

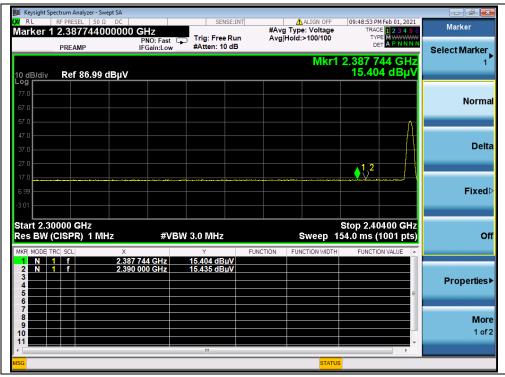

(AVERAGE, Channel 0)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



| - 6 × | 10:13:14 PM Feb 01, 2021 TRACE 1 2 3 4 5 6 | ALIGN OFF | | SENSE:I | 1 | DC | RESEL 50 Ω | |
|----------------|--|---|---|--------------------------------|-------------------------------|---------------------|------------|---------------------------|
| Select Marker | 2.486 206 GHz 26.029 dBµV | Hold:>100/100 | n Avg | Trig: Free Ru #Atten: 10 dE | ∎Z PNO: Fast G Gain:Low | F IF | EAMP |) dB/div |
| Norma | | | | | | | | °g 7.0 |
| Delta | | بر الالاستينان من المراجع | worther the stand of the stand | ปะกปารจับให้สุขางสายเสียงใกละค | 2 | 1 | | 17.0 17.0 17.0 |
| Fixed▷ | | | | | | | | 7.0 5.99 1.01 |
| Of | Stop 2.50000 GHz .000 ms (1001 pts) FUNCTION VALUE | | FUNCTION | Y 3.0 MHz | | lz × 2.483 50 | PR) 1 MH | tart 2.4780 es BW (CIS |
| Properties | E | | | 26.029 dBµV | 0 GHZ | 2.485 50 | | 2 N 1 3 4 5 6 |
| More 1 of 2 | | | | | | | | 7 8 9 0 1 |
| | • | STATUS | | m | | | | G G |

(PEAK, Channel 39)



(AVERAGE, Channel 39)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525



2Mbps

A.Test Verdict:

| Channel | Frequency | Detector | Receiver Reading | A _T | A _{Factor} | Max. Emission | Limit | Verdict |
|---------|-----------|----------|--------------------------|----------------|---------------------|------------------|----------|---------|
| Onanner | (MHz) | PK/ AV | U _R (dBµV) | (dB) | (dB@3m) | E (dBµV/m) | (dBµV/m) | Verdiet |
| 0 | 2387.15 | PK | 26.87 | 6.74 | 27.20 | 60.81 | 74 | PASS |
| 0 | 2385.49 | AV | 15.23 | 6.74 | 27.20 | 49.17 | 54 | PASS |
| 39 | 2488.54 | PK | 26.45 | 6.74 | 27.20 | 60.39 | 74 | PASS |
| 39 | 2483.92 | AV | 16.31 | 6.74 | 27.20 | 50.25 | 54 | PASS |

B.Test Plot:

| | ctrum Analyzer - Swept S/ | | | | | | |
|-------------------------|---------------------------------------|-------------------------------|--------------------------------|--|-----------------------------|---|----------------|
| | RF PRESEL 50 Ω DO 2.3871520000 | | SENSE: | Avg | ALIGN AUTO Type: Voltage | 07:52:32 PM Feb 22, 2021 TRACE 1 2 3 4 5 6 | Marker |
| | PREAMP | PNO: Fast (IFGain:Low | Trig: Free Ru #Atten: 10 dl | | Hold:>100/100 | | Select Marker |
| | | | | | Mkr1 | 2.387 152 GHz | |
| 10 dB/div Log | Ref 86.99 dB | V | | | | 26.870 dBµV | |
| 77.0 | | | | | | | |
| 67.0 | | | | | | | Normal |
| 57.0 | | | | | | <u> </u> | |
| 47.0 | | | | | | | Dalta |
| 37.0 | | | | | | 1√2 | Delta |
| 27.0 | and to the other states and the state | na sa harata katan madhalatik | ngloosadaan milamin daga sagan | and the second states of the s | | a constant more and | |
| 6.99 | | | | | | | Fixed⊳ |
| -3.01 | | | | | | | TIACU |
| | | | | | | | |
| Start 2.30 Res BW (0 | 000 GHZ CISPR) 1 MHZ | #VB | W 3.0 MHz | | Sweep 1 | Stop 2.40400 GHz .000 ms (1001 pts) | |
| MKR MODE TR | · · · | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | |
| 1 N 1 2 N 1 | | .387 152 GHz .390 000 GHz | 26.870 dBµV 26.303 dBµV | | | | |
| 3 | | .550 000 GHZ | 20.303 UDµV | | | | Properties► |
| 5 | | | | | | = | - |
| 7 | | | | | | | |
| 8 | | | | | | | More 1 of 2 |
| 10 11 | | | | | | - | 1 of 2 |
| . ← | | | III | | STATUS | • | |
| Mou | | | | | STATUS | | |

(PEAK, Channel 0)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn



| Marker | 1 Feb 22, 2021 E 1 2 3 4 5 6 | | ALIGN AUTO | | SENSE:IN | SE | CH2 | alyzer - Swept SA EL 50 Ω DC 5488000000 | RF PRES | XI RL |
|---------------|--|------------------------|---------------|----------|----------|------------------------|-------------------------|---|-----------------------|-------------------------|
| Select Marker | | TYF DE | ld:>100/100 | | | Trig: Fre #Atten: 1 | PNO: Fast IFGain:Low | | PREA | Mairke |
| 1 | 88 GHZ 0 dBµV | 2.385 4 15.23 | Mkr1 | | | | | 86.99 dBµV | div Ref | 10 dB/d Log r |
| Norma | | | | | | | | | | 77.0 |
| | | | | | | | | | | 67.0 57.0 |
| Delt | - | | | | | | | | | 47.0 |
| | | <u></u> 1 <u></u> ∧2 | | | | | | | | 27.0 — |
| Fixed | | V V | | | | | | | | 17.0 6.99 |
| | | | | | | | | | | -3.01 |
| Of | 400 GHz 1001 pts) | Stop 2.40 19.3 ms (| Sweep 1 | | z | 3W 3.0 MHz | #V | GHz R) 1 MHz | 2.30000 (W (CISP) | |
| | N VALUE | FUNCTIO | UNCTION WIDTH | FUNCTION | ∃BuV | Y 15.230 di | 5 488 GHz | × 2.385 | DE TRC SCL | MKR MOI |
| Properties | | | | | lBµV | 15.156 di | 000 GHz | 2.390 | 1 f | 2 N 3 4 |
| | E | | | | | | | | | 5 6 7 |
| Mor | | | | | | | | | | 8 |
| 1 of: | - | | | | | III | | | | 10 |
| | | ; | STATUS | | | | | | | MSG |

(AVERAGE, Channel 0)



(PEAK, Channel 39)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



| Marker | 1 Feb 22, 2021 E 1 2 3 4 5 6 M WWWWWW T A N N N N N | TRAC | ALIGN AUTO e: Voltage :>100/100 | | SENS Trig: Free #Atten: 10 | Z O:Fast ⊊ ain:Low | DC 0000 GH PN | | RF PRE | U RL |
|----------------|--|------------------|---------------------------------------|--------|----------------------------------|--------------------------|------------------------|----------------------|------------|--------------------------|
| Select Marker | 18 GHz 2 dBµV | 2.483 9 16.31 | Mkr2 | dD | #Atten: To | ain:Low | | [*] 86.99 d | | 10 dB/div |
| Normal | | | | | | | | | | 77.0 67.0 57.0 |
| Delta | | | | | | | <u>^12</u> | | | 47.0 37.0 27.0 |
| Fixed⊳ | | | | | ~~~~ | | | | | 17.0 6.99 -3.01 |
| Off | 0000 GHz 1001 pts) | 2.60 ms (| Sweep 3 | | 3.0 MHz Y | | Х | GHz R) 1 MH | (CISP | Start 2.4 Res BW |
| Properties► | | | | v v | 15.904 dBµ 16.312 dBµ | GHz GHz | 2.483 500 2.483 918 | | 1 f 1 f | 1 N 2 N 3 4 5 6 |
| More 1 of 2 | - | | | | | | | | | 7 8 9 10 11 |
| | • | | STATUS | | | | | | | ∢ ISG |

(AVERAGE, Channel 39)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



2.10. Radiated Emission

2.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (µV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 - 0.490 | 2400/F(kHz) | 300 |
| 0.490 - 1.705 | 24000/F(kHz) | 30 |
| 1.705 - 30.0 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).







2.10.2.Test Description

Test Setup:

1) For radiated emissions from 9kHz to 30MHz

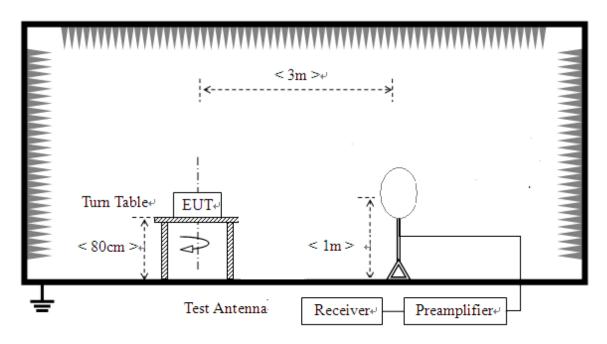

2) For radiated emissions from 30MHz to1GHz

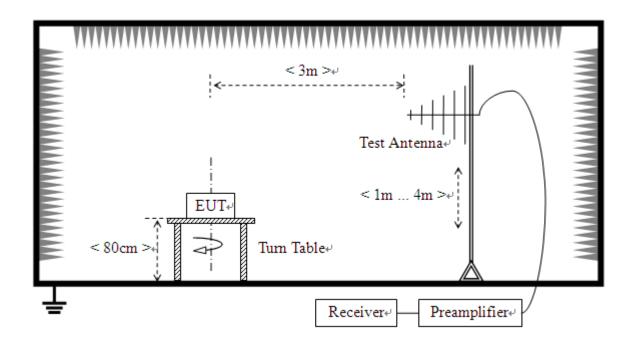




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



3) For radiated emissions above 1GHz

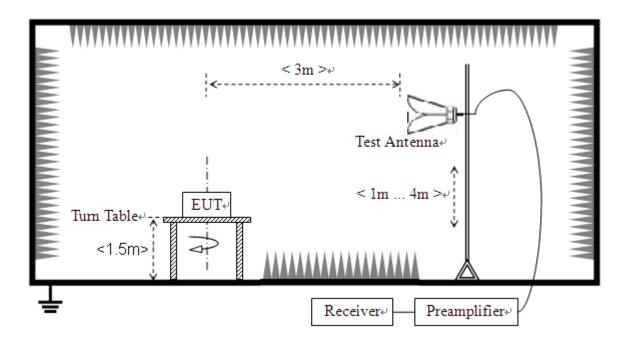

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz.The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



2.10.3.Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.






1Mbps



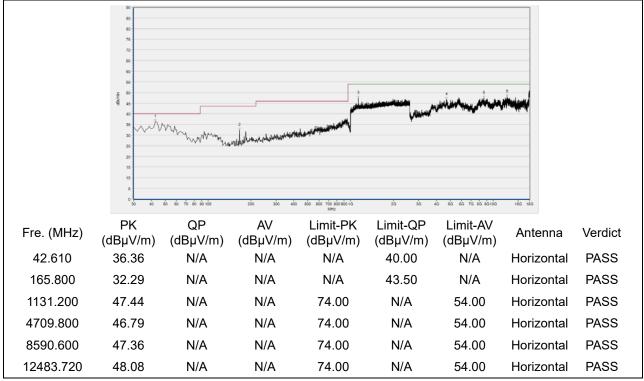

(Antenna Horizontal, 30MHz to 18GHz)

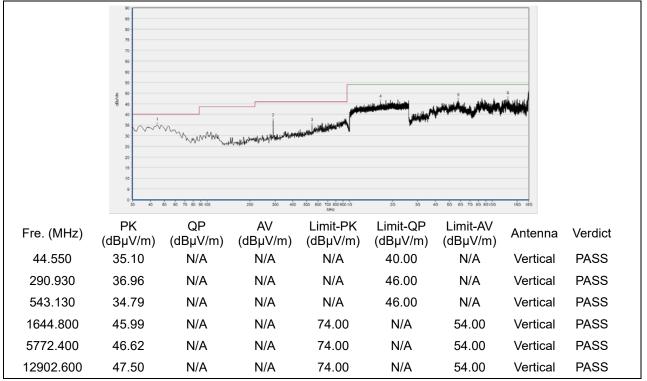


(Antenna Vertical, 30MHz to 18GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






Plot for Channel 19

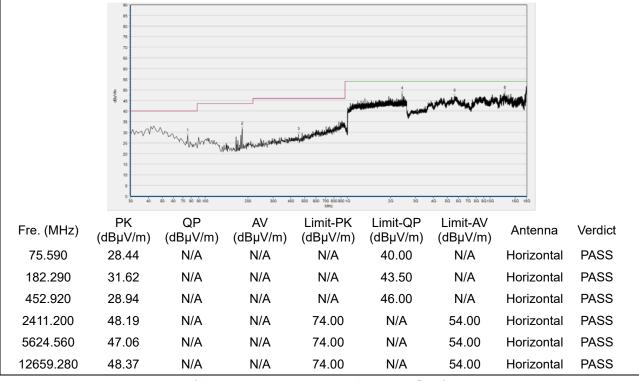

(Antenna Horizontal, 30MHz to 18GHz)

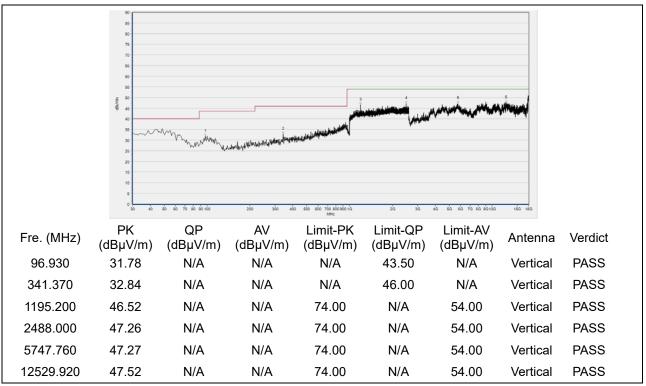


(Antenna Vertical, 30MHz to 18GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






Plot for Channel 39

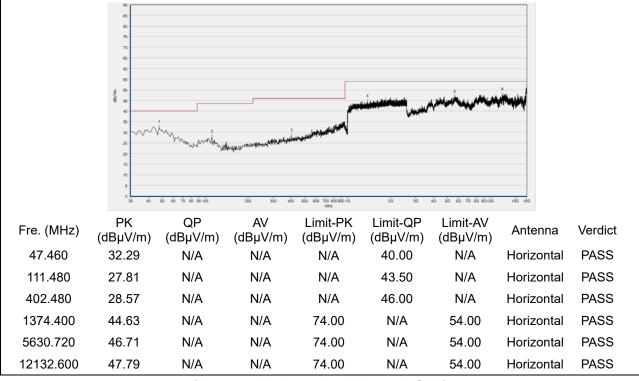

(Antenna Horizontal, 30MHz to 18GHz)

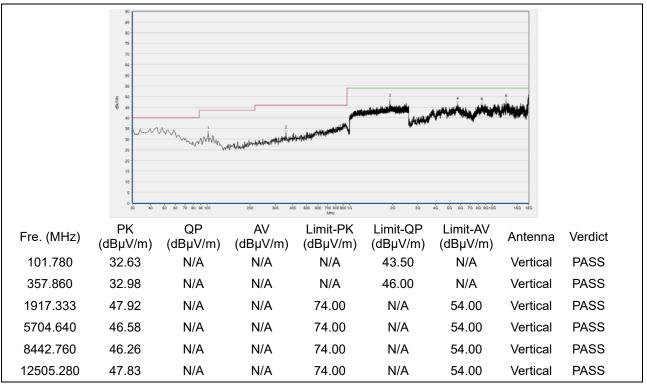

(Antenna Vertical, 30MHz to 18GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn




2Mbps



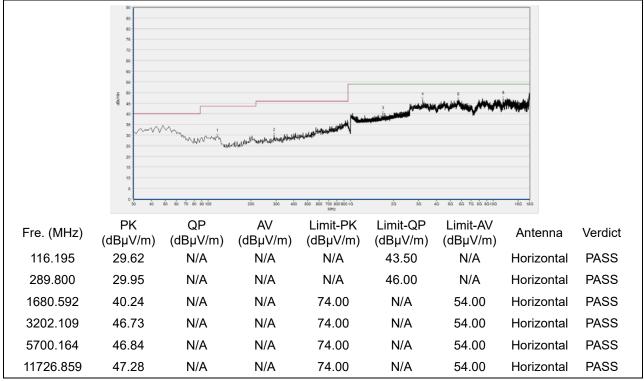

(Antenna Horizontal, 30MHz to 18GHz)

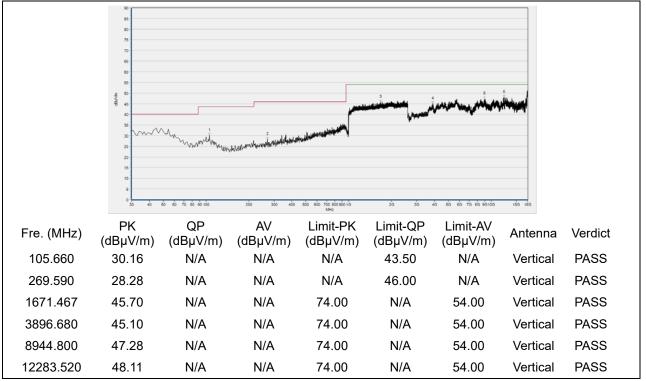


(Antenna Vertical, 30MHz to 18GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






Plot for Channel 19

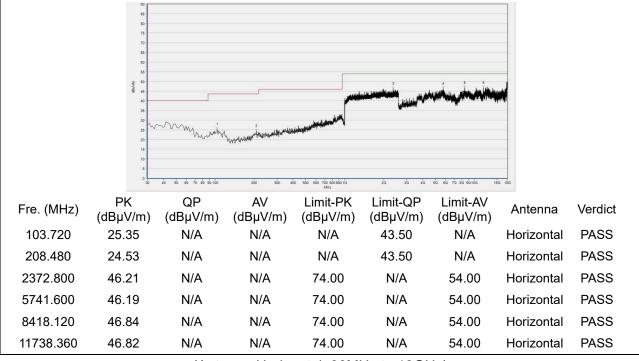

(Antenna Horizontal, 30MHz to 18GHz)

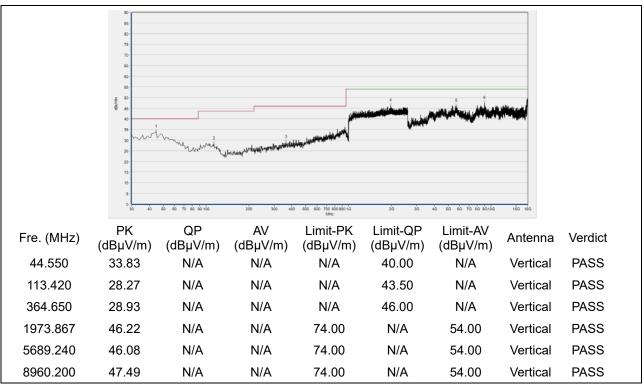


(Antenna Vertical, 30MHz to 18GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






Plot for Channel 39

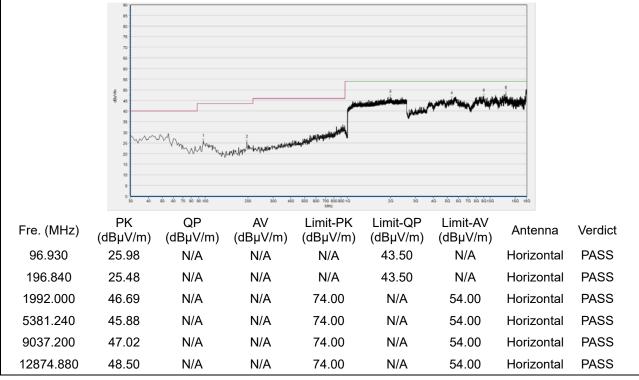

(Antenna Horizontal, 30MHz to 18GHz)

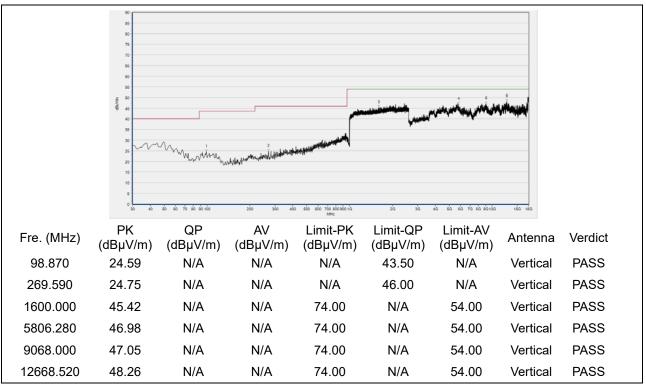

(Antenna Vertical, 30MHz to 18GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

| Test Items | Uncertainty |
|------------------------------|-------------|
| Peak Output Power | ±2.22dB |
| Power Spectral Density (PSD) | ±2.22dB |
| Bandwidth | ±5% |
| Conducted Spurious Emission | ±2.77dB |
| Restricted Frequency Bands | ±5% |
| Radiated Emission | ±2.95dB |
| Conducted Emission | ±2.44dB |

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-r



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

| | Shenzhen Morlab Communications Technology Co., Ltd. | | | | |
|---------------------|--|--|--|--|--|
| Laboratory Name: | Morlab Laboratory | | | | |
| | FL.3, Building A, FeiYang Science Park, No.8 LongChang | | | | |
| Laboratory Address: | Road, Block 67, BaoAn District, ShenZhen, GuangDong | | | | |
| | Province, P. R. China | | | | |
| Telephone: | +86 755 36698555 | | | | |
| Facsimile: | +86 755 36698525 | | | | |

2. Identification of the Responsible Testing Location

| Nome | Shenzhen Morlab Communications Technology Co., Ltd. |
|----------|--|
| Name: | Morlab Laboratory |
| | FL.3, Building A, FeiYang Science Park, No.8 LongChang |
| Address: | Road, Block 67, BaoAn District, ShenZhen, GuangDong |
| | Province, P. R. China |

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





4. Test Equipments Utilized

4.1 Conducted Test Equipments

| Equipment Name | Serial No. | Туре | Manufacturer | Cal. Date | Due Date |
|---------------------------|------------|-----------|------------------|------------|------------|
| EXA Signal Analzyer | MY53470836 | N9010A | Agilent | 2020.04.01 | 2021.03.31 |
| RF cable (30MHz-26GHz) | CB01 | RF01 | Morlab | N/A | N/A |
| Coaxial cable | CB02 | RF02 | Morlab | N/A | N/A |
| SMA connector | CN01 | RF03 | HUBER-SUHNE R | N/A | N/A |
| Computer | T430i | Think Pad | Lenovo | N/A | N/A |

4.2 Conducted Emission Test Equipments

| Equipment Name | Serial No. | Туре | Manufacturer | Cal. Date | Due Date |
|--|-----------------------|----------------|--------------|------------|------------|
| Receiver | MY5640009 3 | N9038A | KEYSIGHT | 2020.03.26 | 2021.03.25 |
| LISN | 8127449 | NSLK 8127 | Schwarzbeck | 2020.03.26 | 2021.03.25 |
| Pulse Limiter (10dB) | VTSD 9561 F-B #206 | VTSD 9561-F | Schwarzbeck | 2020.07.24 | 2021.07.23 |
| Coaxial cable(BNC) (30MHz-26GHz) | CB01 | EMC01 | Morlab | N/A | N/A |
| Computer | DF2DR A01 DPC | VOSTRO 5370 | DELL | N/A | N/A |
| PC Adapter | N/A | LA45NM140 | LITEON | N/A | N/A |

4.3 List of Software Used

| Description | Manufacturer | Software Version |
|------------------|--------------|------------------|
| Test system | Tonscend | V2.6 |
| Power Panel | Agilent | V3.8 |
| Morlab EMCR V1.2 | Morlab | V1.0 |
| TS+ -[JS32-CE] | Tonscend | V2.5.0.0 |



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525

rlab.cn E-mail: servi



4.4 Radiated Test Equipments

| Equipment | | - | | | |
|--|------------------|---------------------------|--------------|------------|------------|
| Name | Serial No. | Туре | Manufacturer | Cal. Date | Due Date |
| Receiver | MY54130016 | N9038A | Agilent | 2020.07.21 | 2021.07.20 |
| Test Antenna - Bi-Log | 9163-520 | VULB 9163 | Schwarzbeck | 2019.05.24 | 2022.05.23 |
| Test Antenna - Loop | 1520-022 | FMZB1520 | Schwarzbeck | 2019.02.14 | 2022.02.13 |
| Test Antenna – Horn | 01774 | BBHA 9120D | Schwarzbeck | 2019.07.26 | 2022.07.25 |
| Test Antenna – Horn | BBHA9170 #774 | BBHA 9170 | Schwarzbeck | 2019.07.26 | 2022.07.25 |
| Coaxial cable (N male) (9KHz-30MHz) | CB04 | EMC04 | Morlab | N/A | N/A |
| Coaxial cable (N male) (30MHz-26GHz) | CB02 | EMC02 | Morlab | N/A | N/A |
| Coaxial cable (N male) (30MHz-26GHz) | CB03 | EMC03 | Morlab | N/A | N/A |
| Coaxial cable (N male) (30MHz-40GHz) | CB05 | EMC05 | Morlab | N/A | N/A |
| 1-18GHz pre-Amplifier | 61171/61172 | S020180L32 03 | Tonscend | 2020.07.21 | 2021.07.20 |
| 18-26.5GHz pre-Amplifier | 46732 | S10M100L38 02 | Tonscend | 2020.07.21 | 2021.07.20 |
| 26-40GHz pre-Amplifier | 56774 | S40M400L40 02 | Tonscend | 2020.07.21 | 2021.07.20 |
| Notch Filter | N/A | WRCG-2400- 2483.5-60SS | Wainwright | 2020.07.21 | 2021.07.20 |
| Anechoic Chamber | N/A | 9m*6m*6m | CRT | 2020.01.06 | 2023.01.05 |

____ END OF REPORT ____



Fax: 86-755-36698525

Http://www.morlab.cn