



## Appendix D

### RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: Multi-function projector

Test Model: NeoPix 130

#### Environmental Conditions

Temperature:	23.1° C
Relative Humidity:	52.3%
ATM Pressure:	100.0 kPa
Test Engineer:	Eason Zhou
Supervised by:	Nick Peng





### D.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	26.162	---	Pass
NVNT	a	5200	Ant1	22.113	---	Pass
NVNT	a	5240	Ant1	23.884	---	Pass
NVNT	n20	5180	Ant1	24.344	---	Pass
NVNT	n20	5200	Ant1	25.882	---	Pass
NVNT	n20	5240	Ant1	26.901	---	Pass
NVNT	n40	5190	Ant1	45.887	---	Pass
NVNT	n40	5230	Ant1	39.539	---	Pass
NVNT	ac20	5180	Ant1	28.67	---	Pass
NVNT	ac20	5200	Ant1	27.845	---	Pass
NVNT	ac20	5240	Ant1	23.222	---	Pass
NVNT	ac40	5190	Ant1	47.163	---	Pass
NVNT	ac40	5230	Ant1	39.743	---	Pass
NVNT	ac80	5210	Ant1	88.874	---	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,  
 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

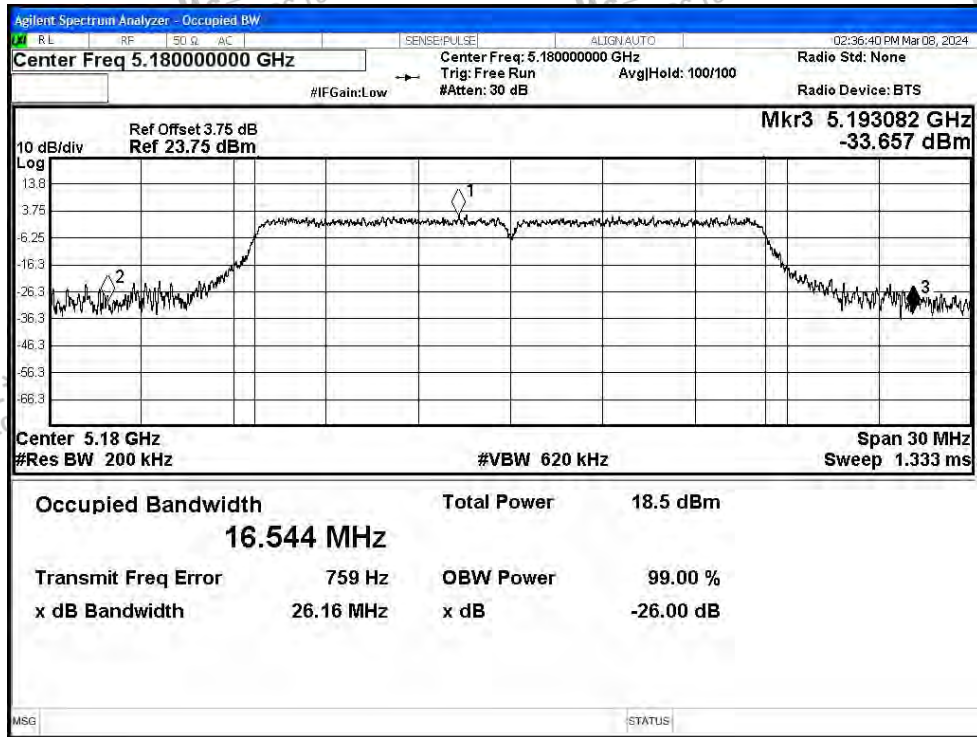


-26dB Bandwidth NVNT a 5200MHz Ant1

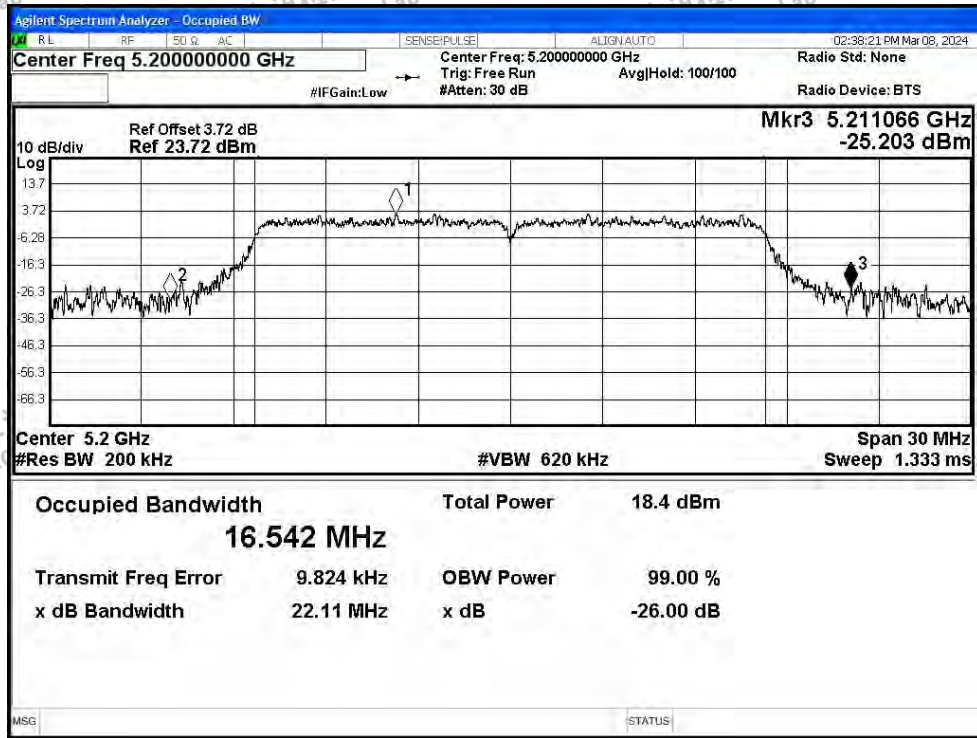




-26dB Bandwidth NVNT a 5240MHz Ant1

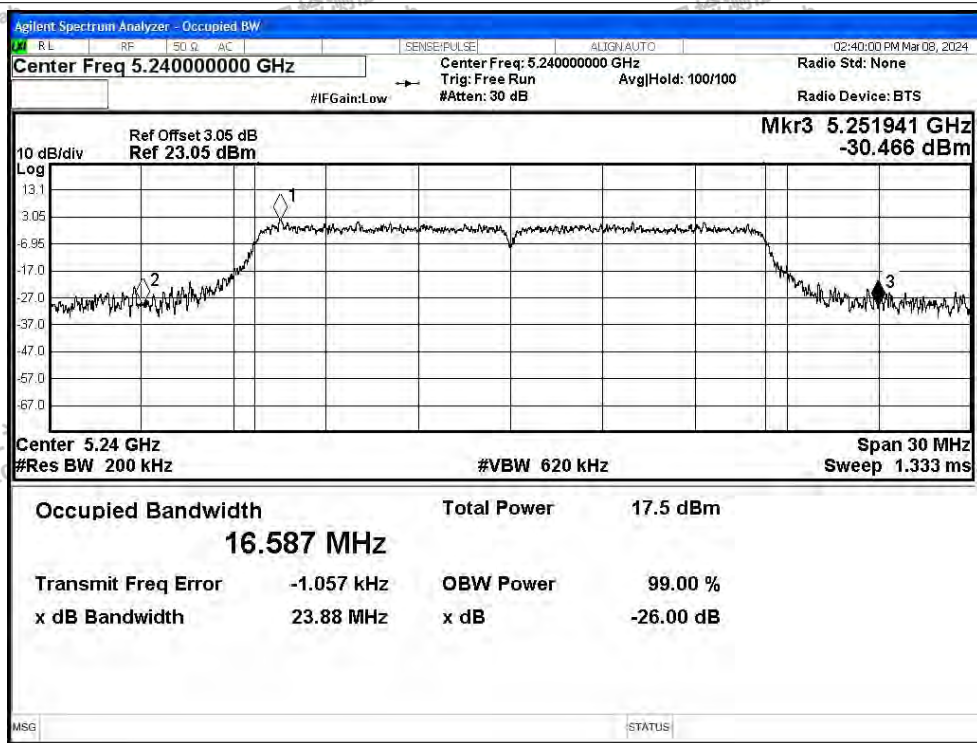


-26dB Bandwidth NVNT n20 5180MHz Ant1

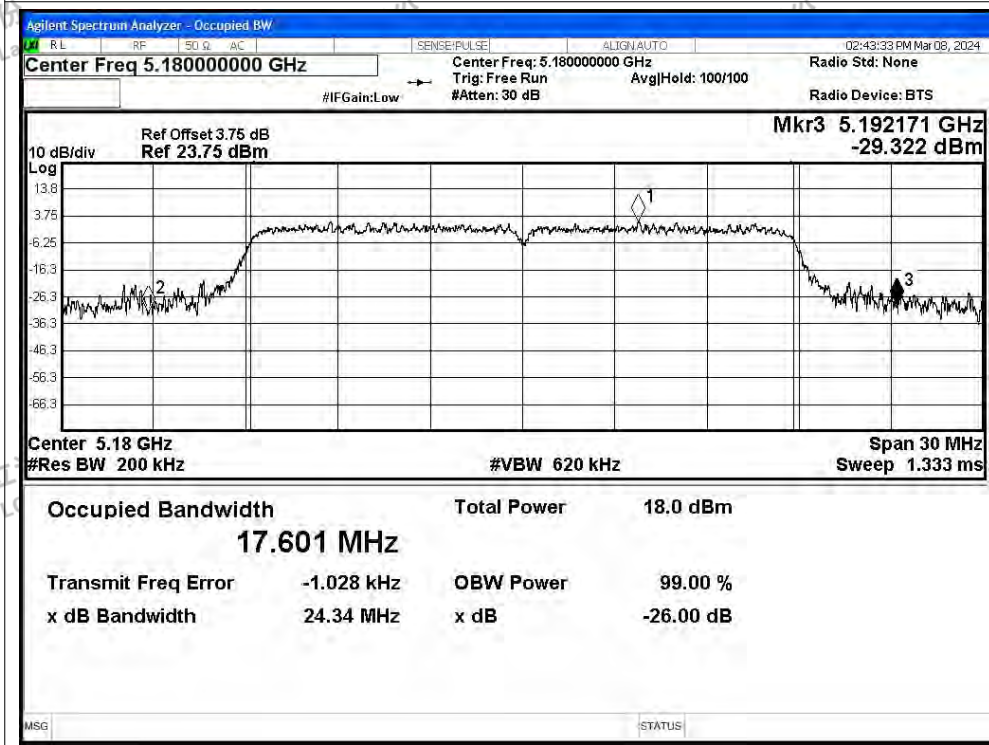




-26dB Bandwidth NVNT n20 5200MHz Ant1

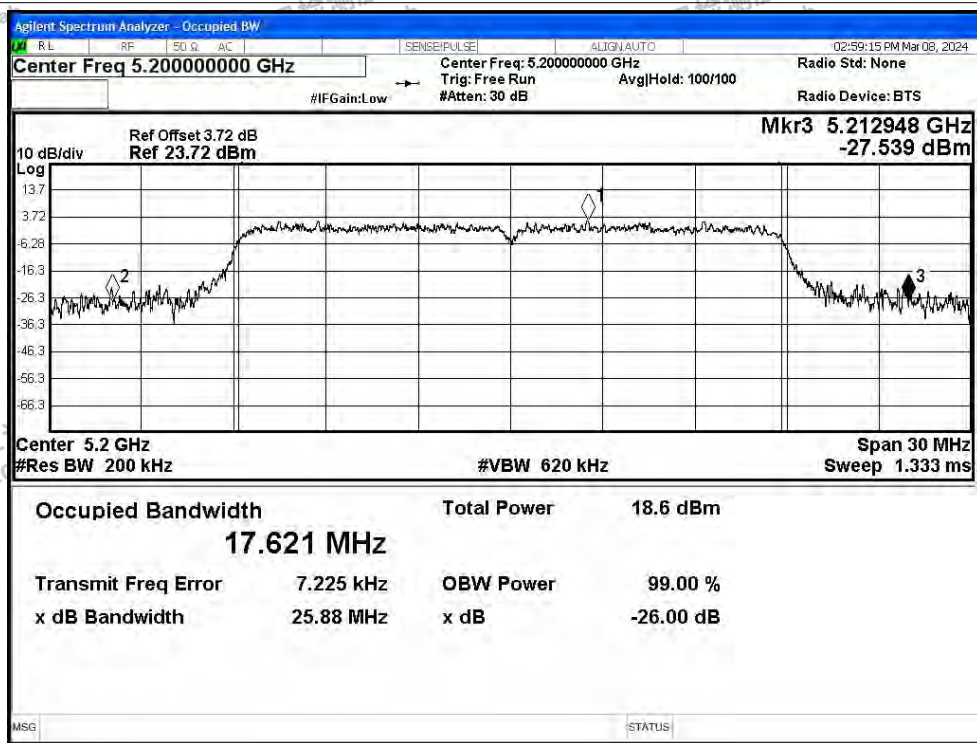

-26dB Bandwidth NVNT n20 5240MHz Ant1

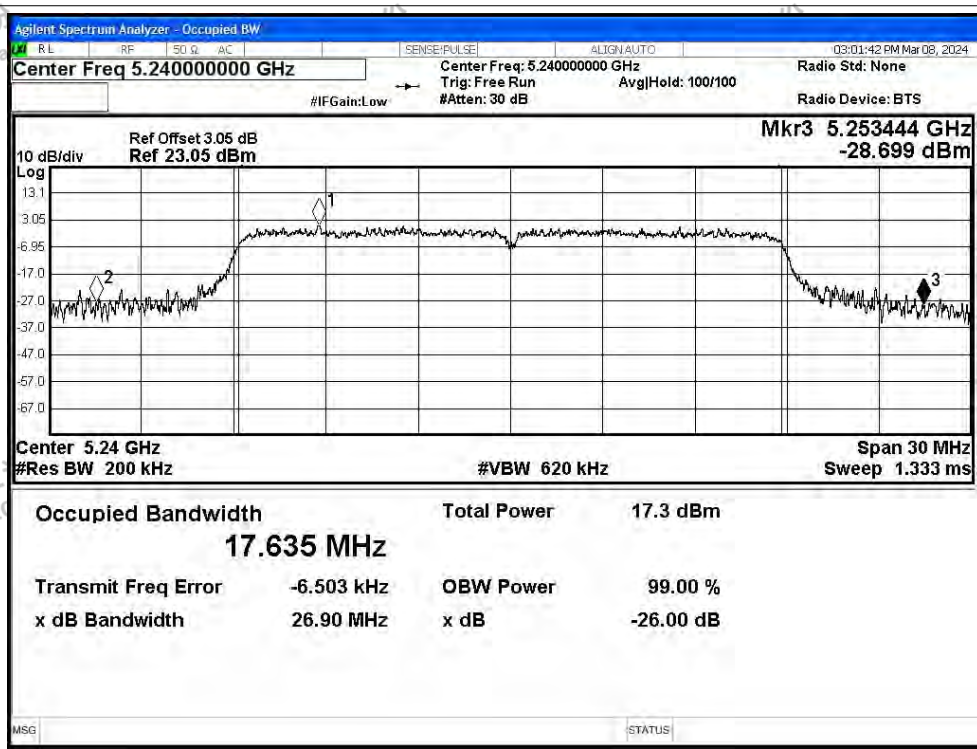




-26dB Bandwidth NVNT n40 5190MHz Ant1




-26dB Bandwidth NVNT n40 5230MHz Ant1

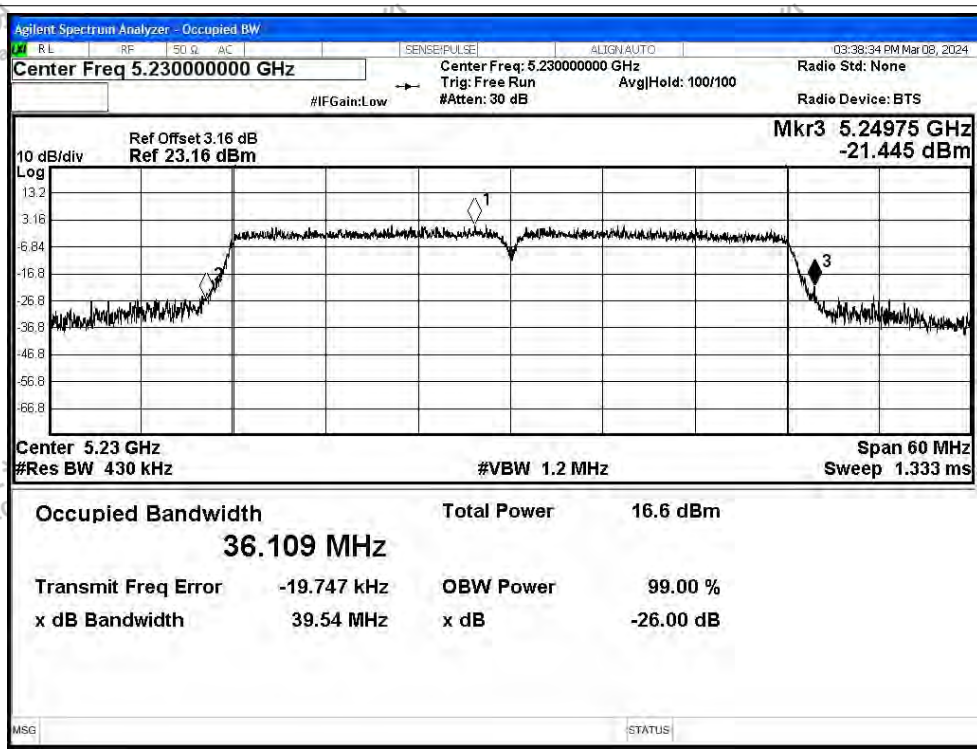



-26dB Bandwidth NVNT ac20 5180MHz Ant1

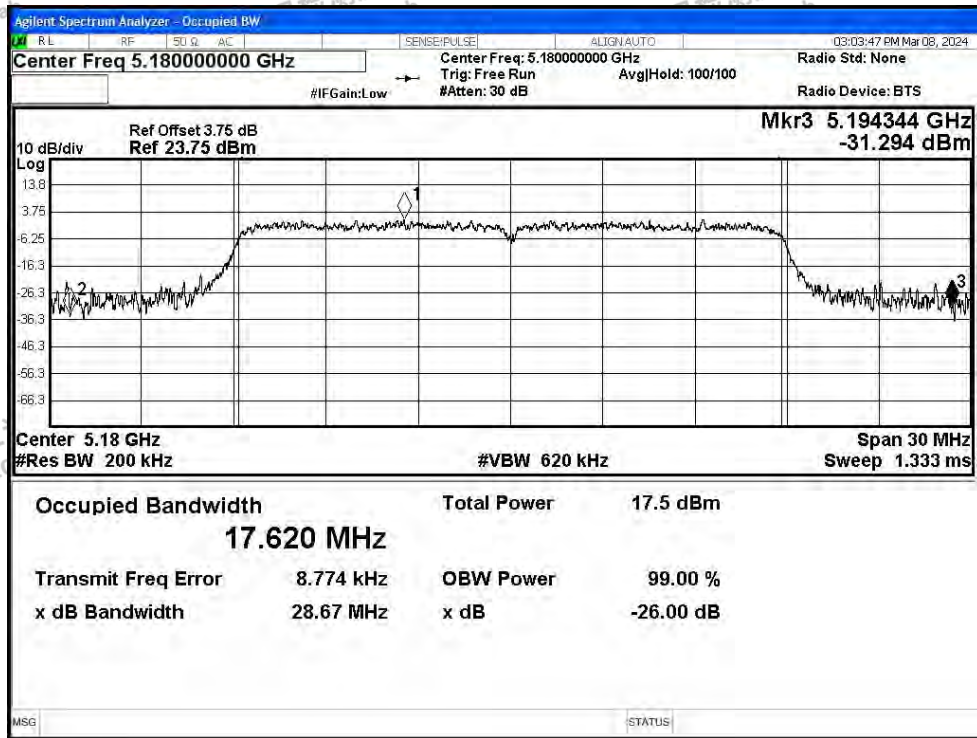


-26dB Bandwidth NVNT ac20 5200MHz Ant1






-26dB Bandwidth NVNT ac20 5240MHz Ant1

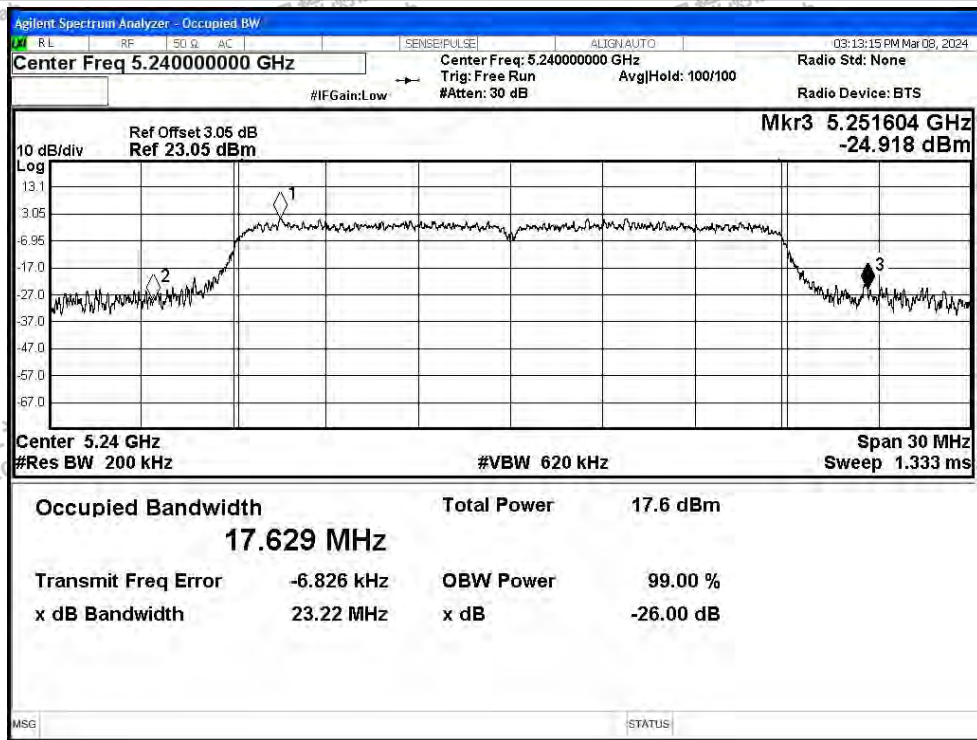


-26dB Bandwidth NVNT ac40 5190MHz Ant1

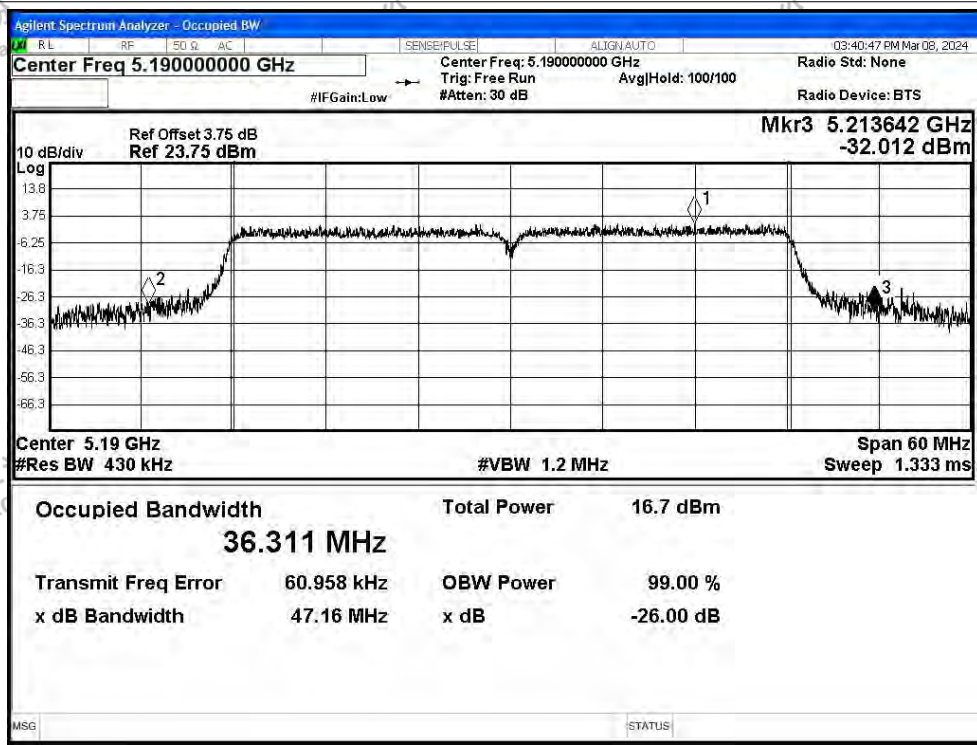






-26dB Bandwidth NVNT ac40 5230MHz Ant1

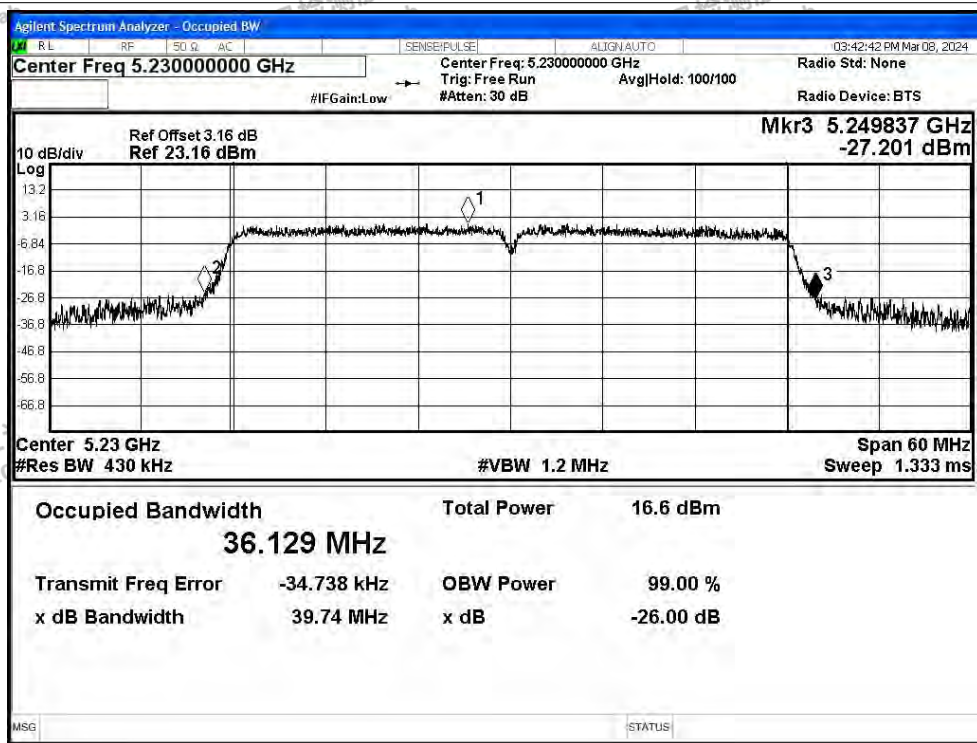

-26dB Bandwidth NVNT ac80 5210MHz Ant1

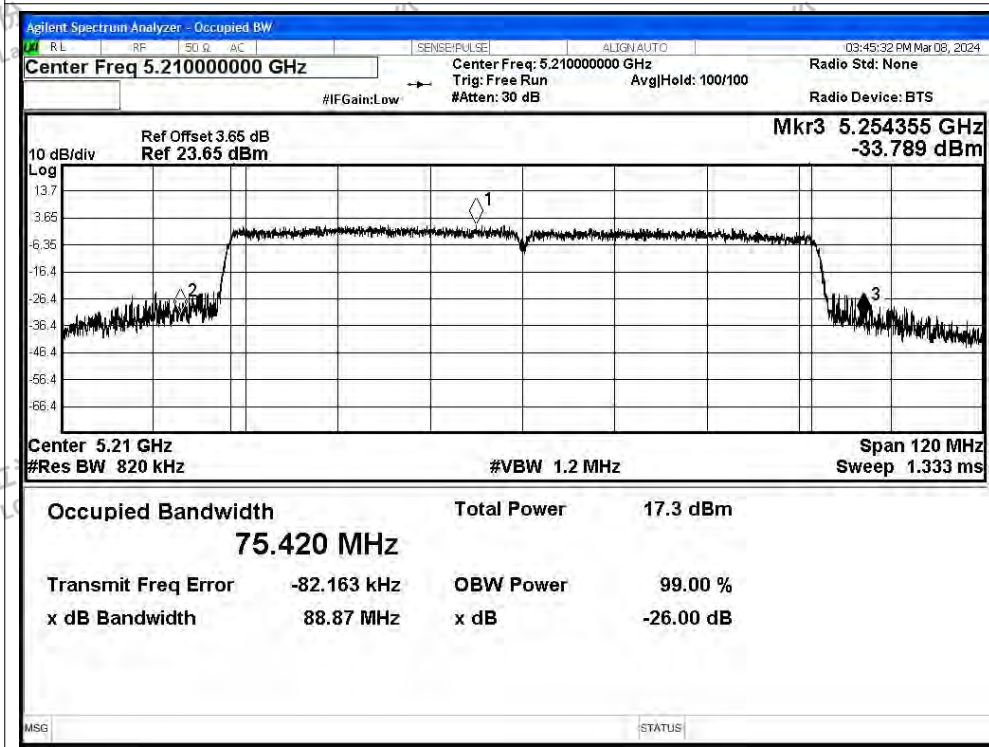



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant2	23.104	---	Pass
NVNT	a	5200	Ant2	23.886	---	Pass
NVNT	a	5240	Ant2	24.954	---	Pass
NVNT	n20	5180	Ant2	27.23	---	Pass
NVNT	n20	5200	Ant2	24.874	---	Pass
NVNT	n20	5240	Ant2	28.285	---	Pass
NVNT	n40	5190	Ant2	45.204	---	Pass
NVNT	n40	5230	Ant2	44.683	---	Pass
NVNT	ac20	5180	Ant2	26.574	---	Pass
NVNT	ac20	5200	Ant2	27.825	---	Pass
NVNT	ac20	5240	Ant2	27.565	---	Pass
NVNT	ac40	5190	Ant2	41.159	---	Pass
NVNT	ac40	5230	Ant2	42.046	---	Pass
NVNT	ac80	5210	Ant2	81.814	---	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,  
 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant2

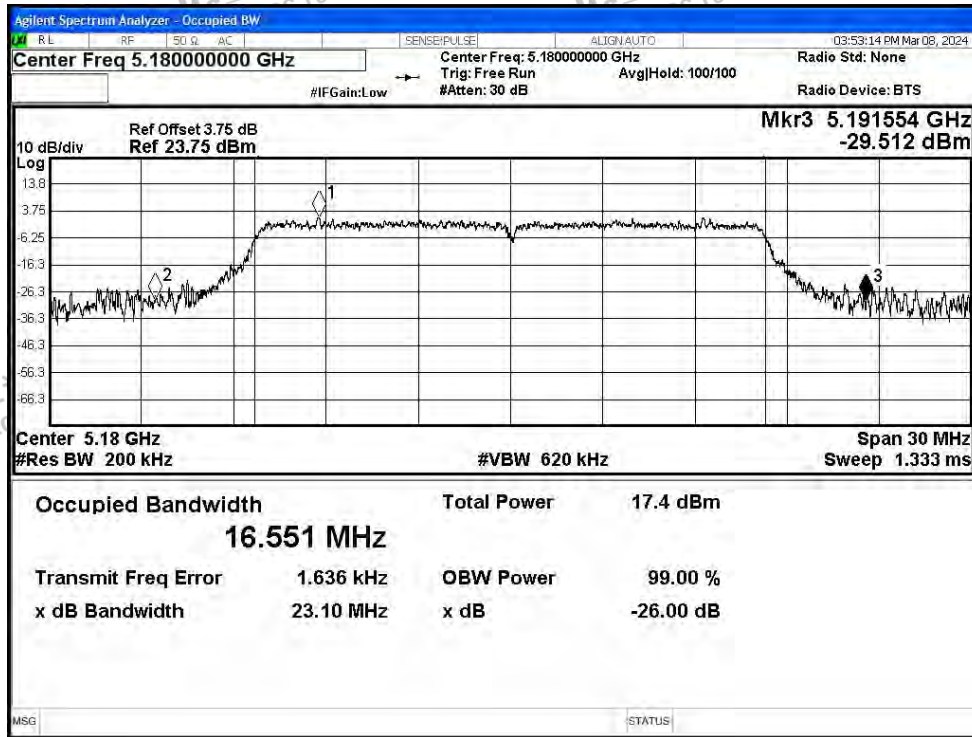


-26dB Bandwidth NVNT a 5200MHz Ant2

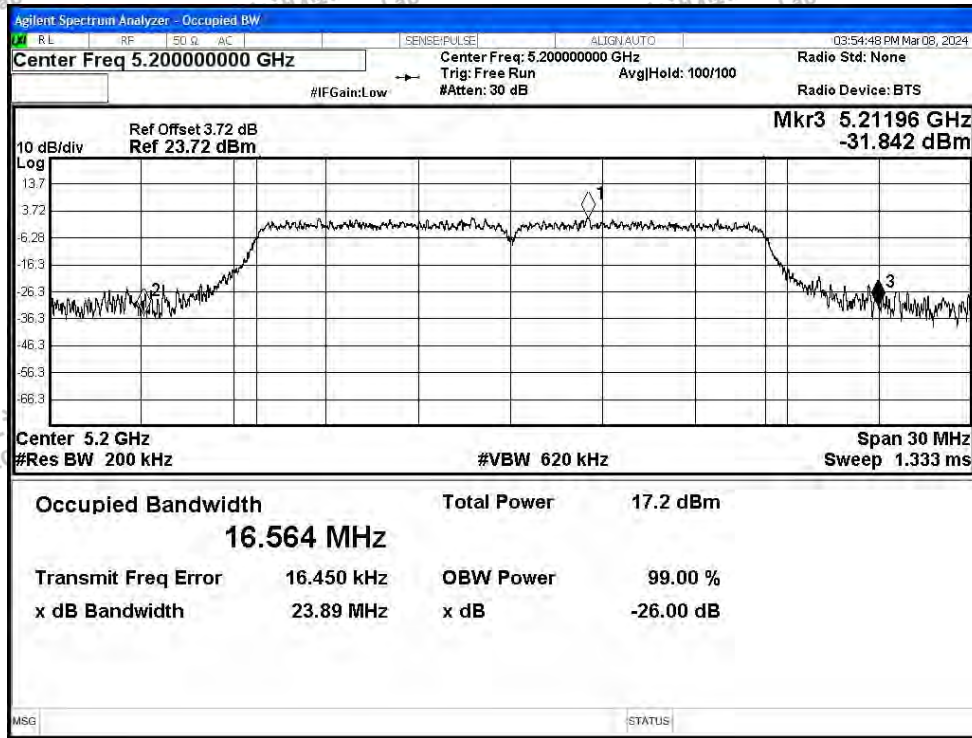



-26dB Bandwidth NVNT a 5240MHz Ant2

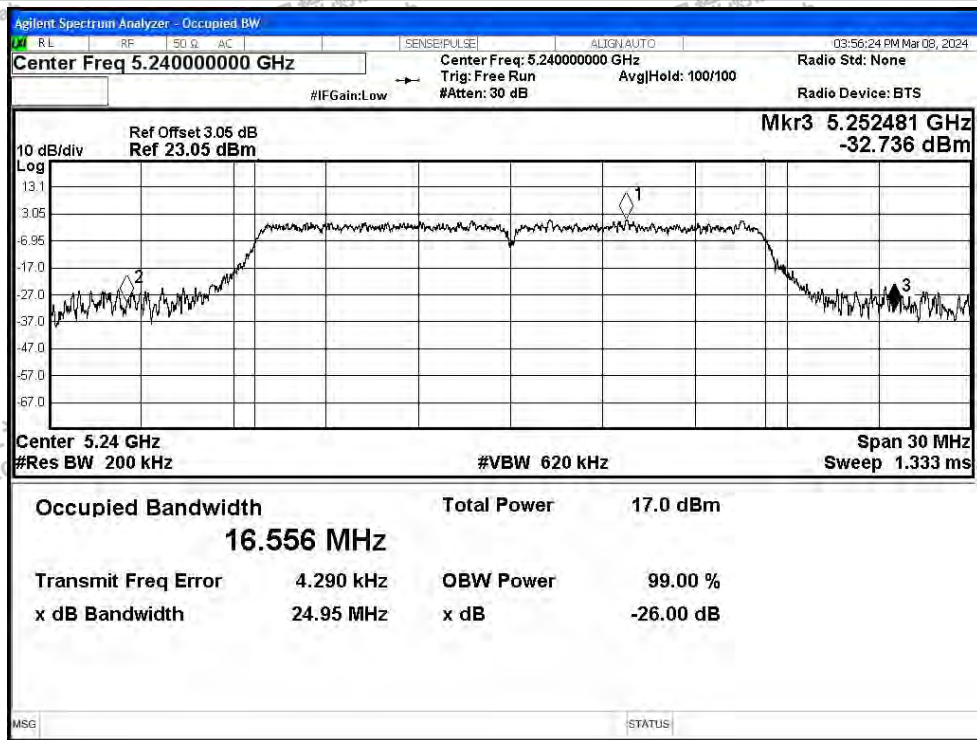


-26dB Bandwidth NVNT n20 5180MHz Ant2






-26dB Bandwidth NVNT n20 5200MHz Ant2

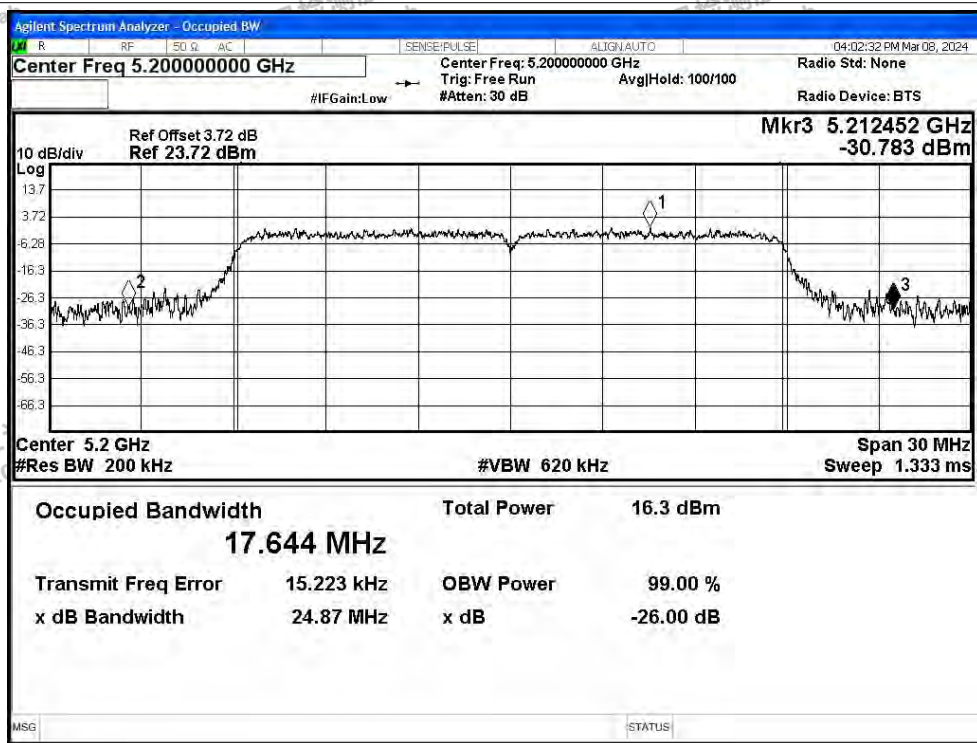


-26dB Bandwidth NVNT n20 5240MHz Ant2

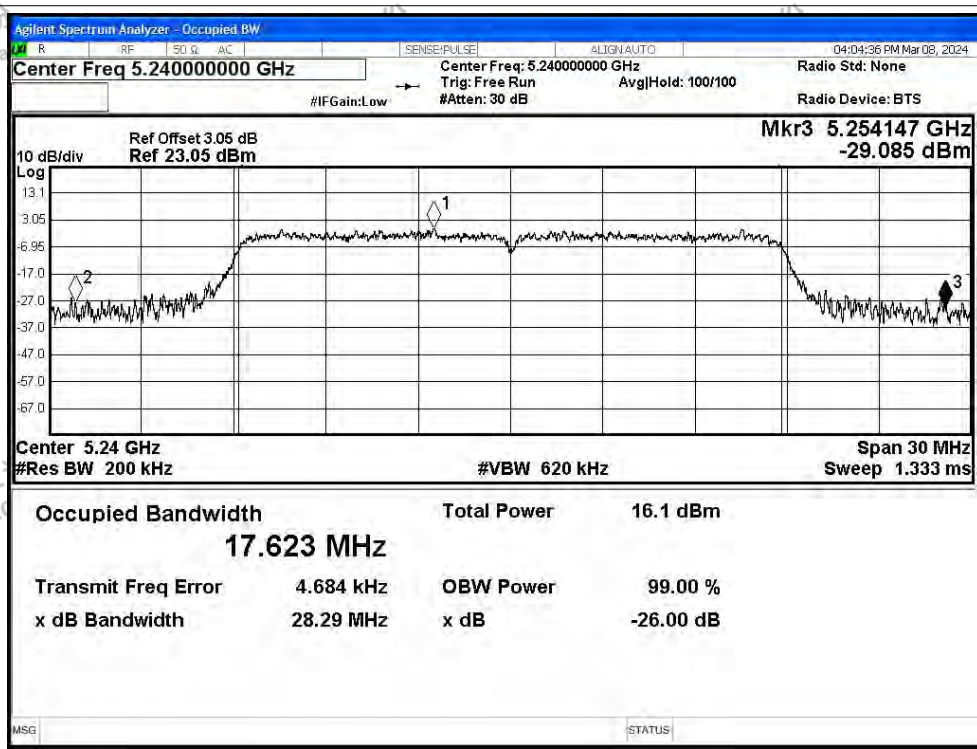




-26dB Bandwidth NVNT n40 5190MHz Ant2

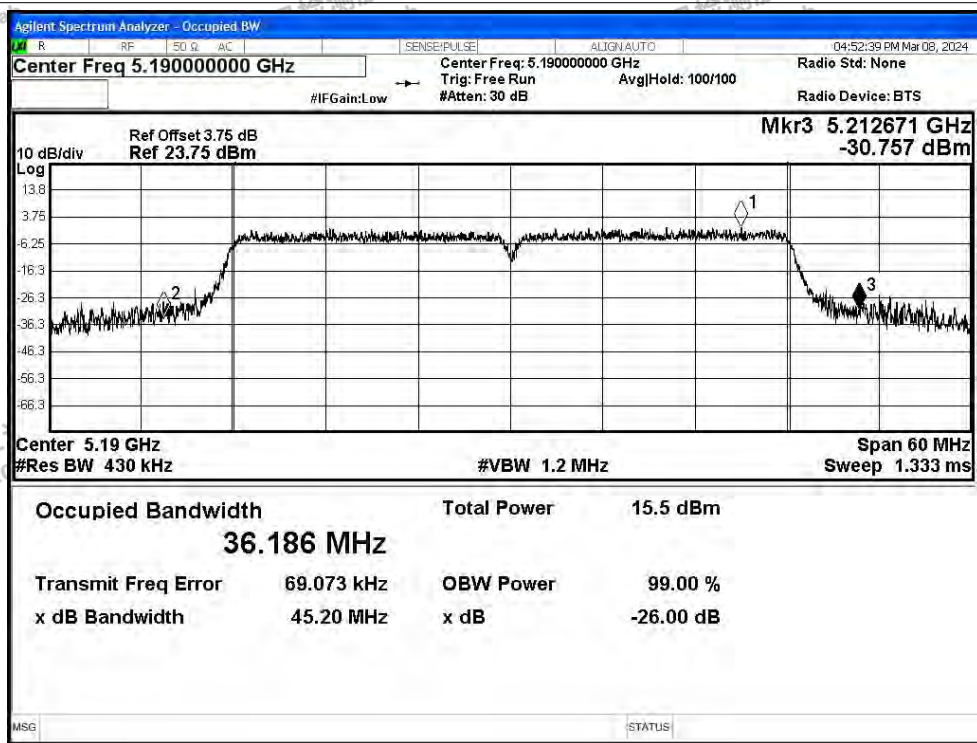


-26dB Bandwidth NVNT n40 5230MHz Ant2

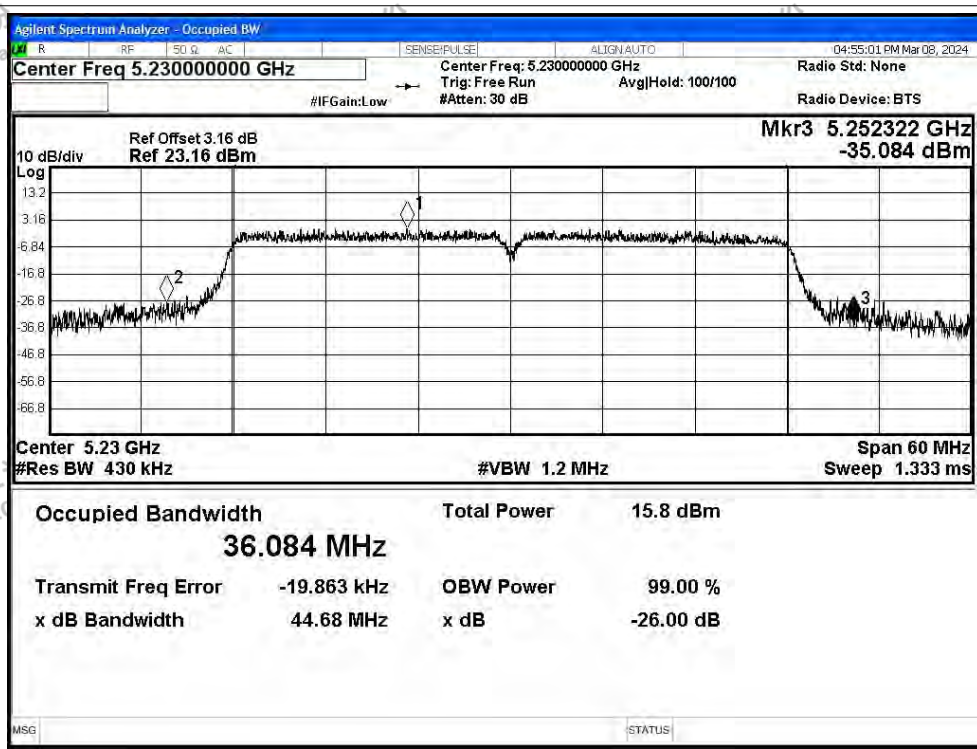




-26dB Bandwidth NVNT ac20 5180MHz Ant2

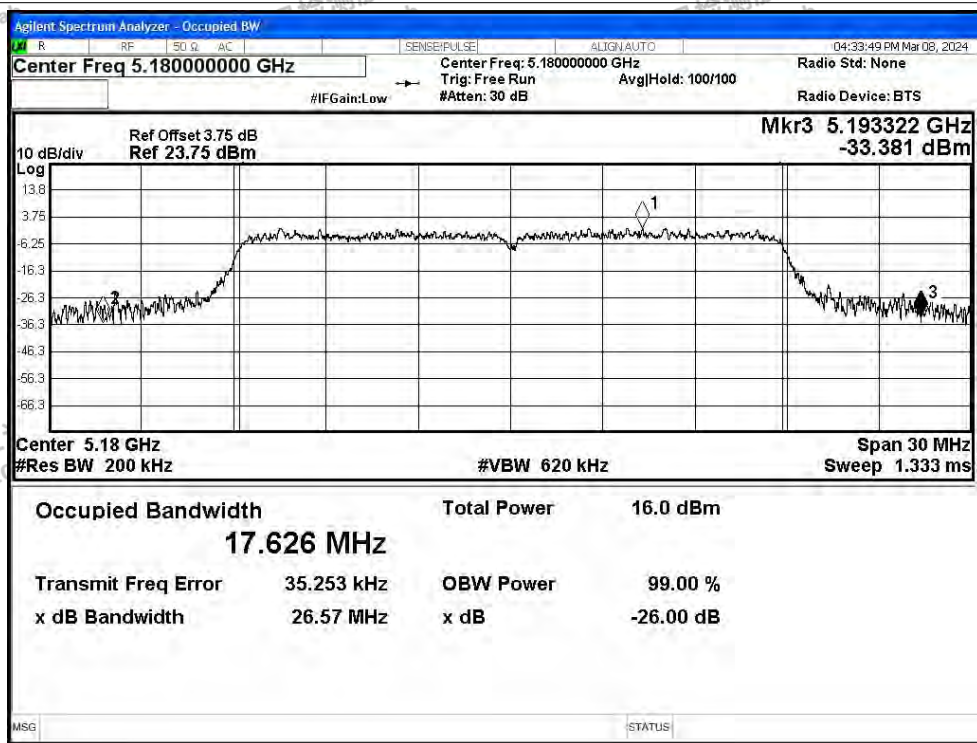

-26dB Bandwidth NVNT ac20 5200MHz Ant2

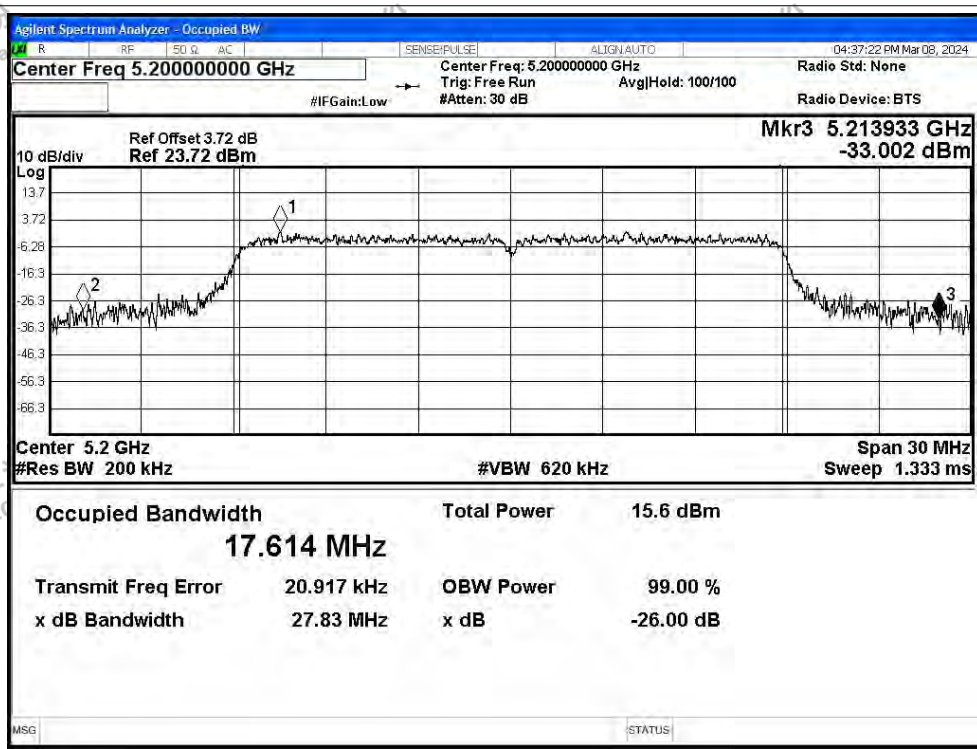




-26dB Bandwidth NVNT ac20 5240MHz Ant2




-26dB Bandwidth NVNT ac40 5190MHz Ant2

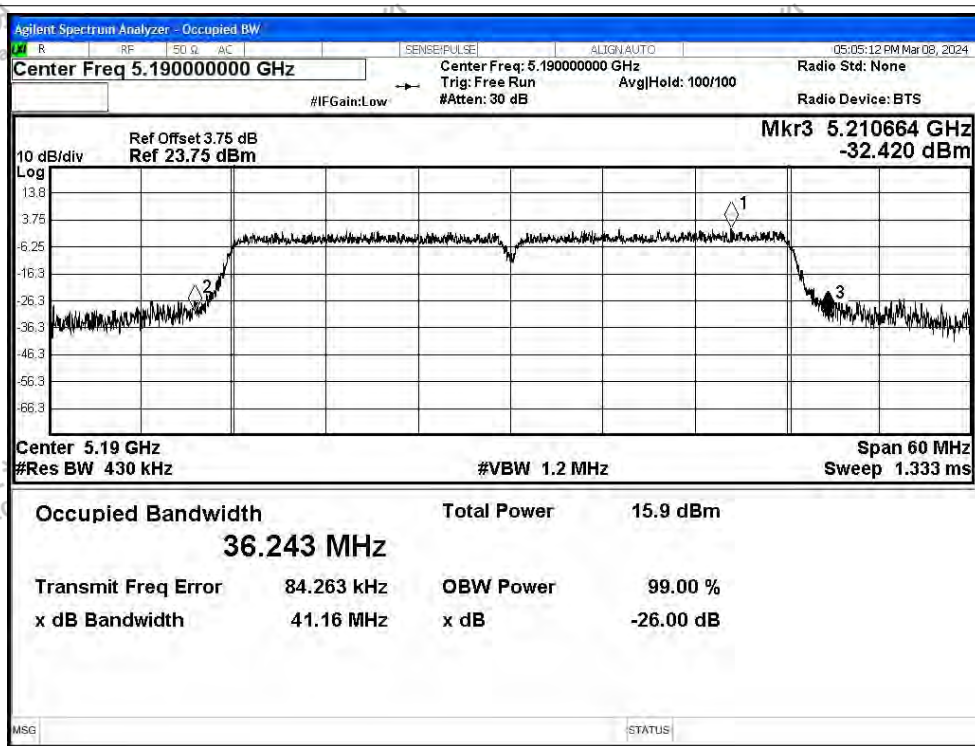






-26dB Bandwidth NVNT ac40 5230MHz Ant2

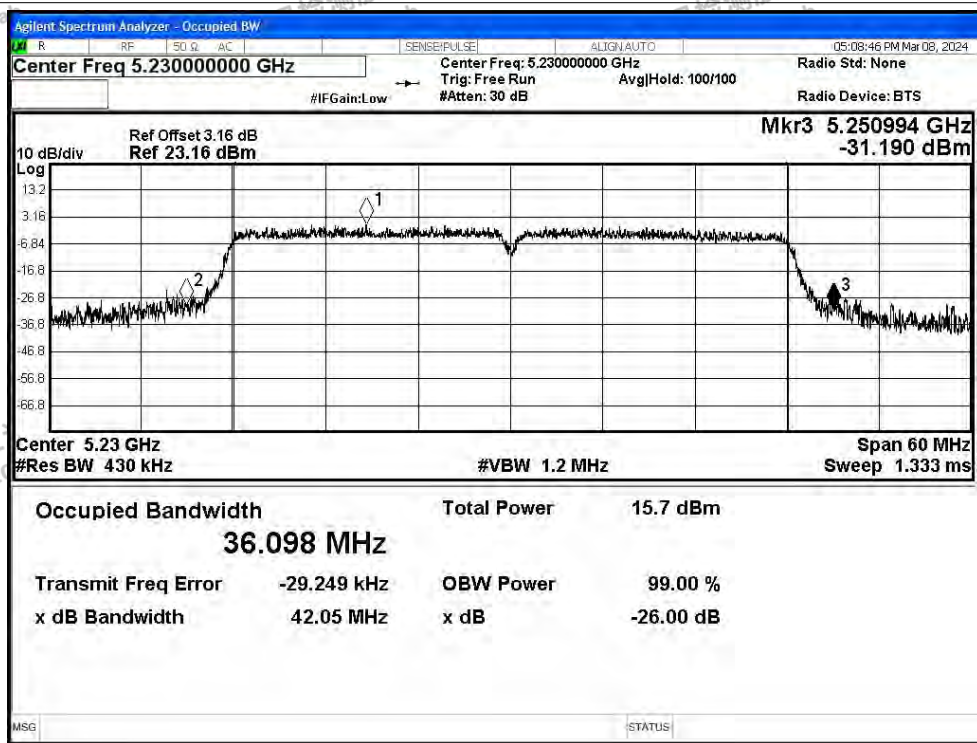

-26dB Bandwidth NVNT ac80 5210MHz Ant2

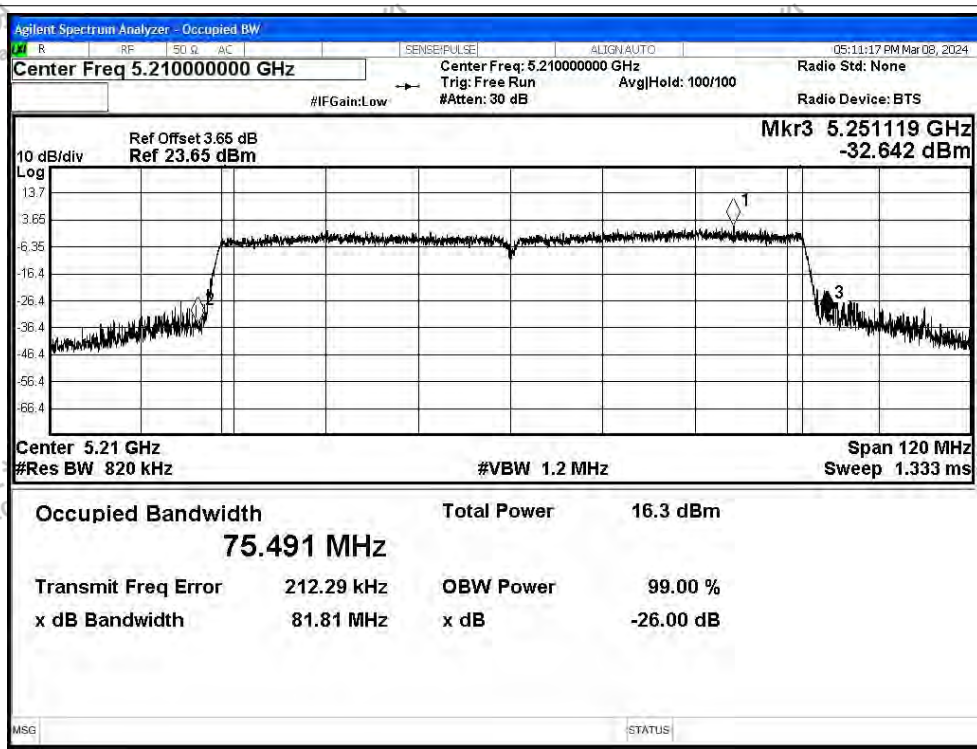



### D.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	12.74	0.1	12.84	24	Pass
NVNT	a	5200	Ant1	12.41	0.1	12.51	24	Pass
NVNT	a	5240	Ant1	12.2	0.1	12.30	24	Pass
NVNT	n20	5180	Ant1	11.25	0.15	11.40	24	Pass
NVNT	n20	5200	Ant1	11.82	0.15	11.97	24	Pass
NVNT	n20	5240	Ant1	11.65	0.15	11.80	24	Pass
NVNT	n40	5190	Ant1	10.88	0.29	11.17	24	Pass
NVNT	n40	5230	Ant1	10.71	0.3	11.01	24	Pass
NVNT	ac20	5180	Ant1	11.1	0.15	11.25	24	Pass
NVNT	ac20	5200	Ant1	11.75	0.15	11.90	24	Pass
NVNT	ac20	5240	Ant1	10.65	0.15	10.80	24	Pass
NVNT	ac40	5190	Ant1	10.85	0.29	11.14	24	Pass
NVNT	ac40	5230	Ant1	10.76	0.29	11.05	24	Pass
NVNT	ac80	5210	Ant1	10.48	0.57	11.05	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant2	11.85	0.12	11.97	24	Pass
NVNT	a	5200	Ant2	11.57	0.12	11.69	24	Pass
NVNT	a	5240	Ant2	11.42	0.12	11.54	24	Pass
NVNT	n20	5180	Ant2	10.32	0.15	10.47	24	Pass
NVNT	n20	5200	Ant2	10.88	0.15	11.03	24	Pass
NVNT	n20	5240	Ant2	10.62	0.15	10.77	24	Pass
NVNT	n40	5190	Ant2	9.46	0.29	9.75	24	Pass
NVNT	n40	5230	Ant2	9.47	0.29	9.76	24	Pass
NVNT	ac20	5180	Ant2	10.42	0.15	10.57	24	Pass
NVNT	ac20	5200	Ant2	9.98	0.15	10.13	24	Pass
NVNT	ac20	5240	Ant2	9.88	0.15	10.03	24	Pass
NVNT	ac40	5190	Ant2	9.74	0.29	10.03	24	Pass
NVNT	ac40	5230	Ant2	9.51	0.29	9.80	24	Pass
NVNT	ac80	5210	Ant2	9.25	0.57	9.82	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity



MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5180	11.40	10.47	13.97	24	Pass
NVNT	n20	5200	11.97	11.03	14.54	24	Pass
NVNT	n20	5240	11.80	10.77	14.33	24	Pass
NVNT	n40	5190	11.17	9.75	13.53	24	Pass
NVNT	n40	5230	11.01	9.76	13.44	24	Pass
NVNT	ac20	5180	11.25	10.57	13.93	24	Pass
NVNT	ac20	5200	11.90	10.13	14.11	24	Pass
NVNT	ac20	5240	10.80	10.03	13.44	24	Pass
NVNT	ac40	5190	11.14	10.03	13.63	24	Pass
NVNT	ac40	5230	11.05	9.80	13.48	24	Pass
NVNT	ac80	5210	11.05	9.82	13.49	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity



### D.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	2.6	0.1	2.7	11	Pass
NVNT	a	5200	Ant1	2.23	0.1	2.33	11	Pass
NVNT	a	5240	Ant1	1.49	0.1	1.59	11	Pass
NVNT	n20	5180	Ant1	1.9	0.15	2.05	11	Pass
NVNT	n20	5200	Ant1	2.28	0.15	2.43	11	Pass
NVNT	n20	5240	Ant1	1	0.15	1.15	11	Pass
NVNT	n40	5190	Ant1	-2.82	0.29	-2.53	11	Pass
NVNT	n40	5230	Ant1	-3.09	0.3	-2.79	11	Pass
NVNT	ac20	5180	Ant1	1.43	0.15	1.58	11	Pass
NVNT	ac20	5200	Ant1	1.35	0.15	1.5	11	Pass
NVNT	ac20	5240	Ant1	1.2	0.15	1.35	11	Pass
NVNT	ac40	5190	Ant1	-2.71	0.29	-2.42	11	Pass
NVNT	ac40	5230	Ant1	-3.05	0.29	-2.76	11	Pass
NVNT	ac80	5210	Ant1	-5.71	0.57	-5.14	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant2	1.27	0.12	1.39	11	Pass
NVNT	a	5200	Ant2	0.88	0.12	1	11	Pass
NVNT	a	5240	Ant2	0.76	0.12	0.88	11	Pass
NVNT	n20	5180	Ant2	-0.31	0.15	-0.16	11	Pass
NVNT	n20	5200	Ant2	0.2	0.15	0.35	11	Pass
NVNT	n20	5240	Ant2	-0.26	0.15	-0.11	11	Pass
NVNT	n40	5190	Ant2	-3.89	0.29	-3.6	11	Pass
NVNT	n40	5230	Ant2	-4.01	0.29	-3.72	11	Pass
NVNT	ac20	5180	Ant2	-0.16	0.15	-0.01	11	Pass
NVNT	ac20	5200	Ant2	-0.86	0.15	-0.71	11	Pass
NVNT	ac20	5240	Ant2	-0.93	0.15	-0.78	11	Pass
NVNT	ac40	5190	Ant2	-3.8	0.29	-3.51	11	Pass
NVNT	ac40	5230	Ant2	-3.45	0.29	-3.16	11	Pass
NVNT	ac80	5210	Ant2	-6.32	0.57	-5.75	11	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity



MIMO

Condition	Mode	Frequency (MHz)	Total PSD (dBm/MHz)			Limit (dBm/MHz)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5180	2.05	-0.16	4.09	11	Pass
NVNT	n20	5200	2.43	0.35	4.52	11	Pass
NVNT	n20	5240	1.15	-0.11	3.58	11	Pass
NVNT	n40	5190	-2.53	-3.6	-0.02	11	Pass
NVNT	n40	5230	-2.79	-3.72	-0.22	11	Pass
NVNT	ac20	5180	1.58	-0.01	3.87	11	Pass
NVNT	ac20	5200	1.5	-0.71	3.54	11	Pass
NVNT	ac20	5240	1.35	-0.78	3.42	11	Pass
NVNT	ac40	5190	-2.42	-3.51	0.08	11	Pass
NVNT	ac40	5230	-2.76	-3.16	0.05	11	Pass
NVNT	ac80	5210	-5.14	-5.75	-2.42	11	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity




Test Graphs

PSD NVNT a 5180MHz Ant1

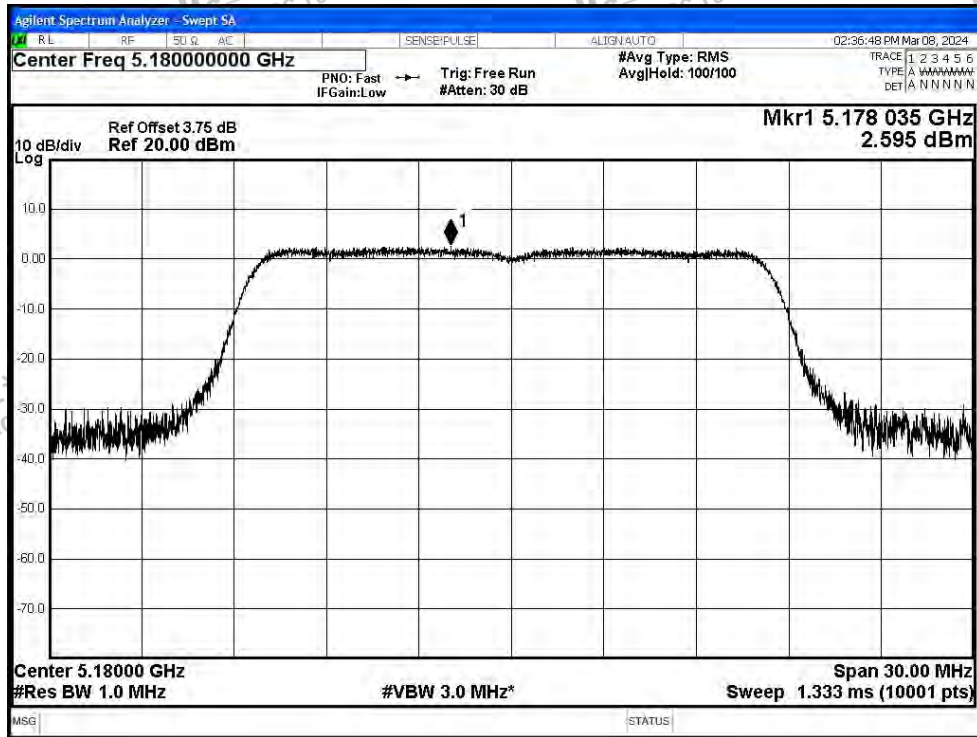


PSD NVNT a 5200MHz Ant1

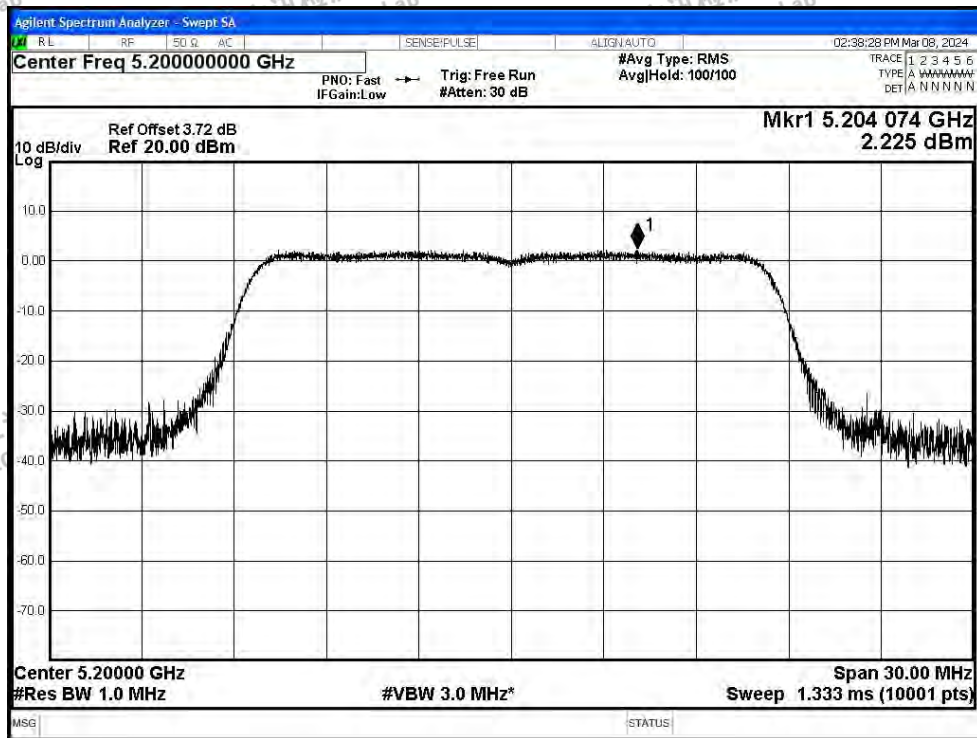




PSD NVNT a 5240MHz Ant1

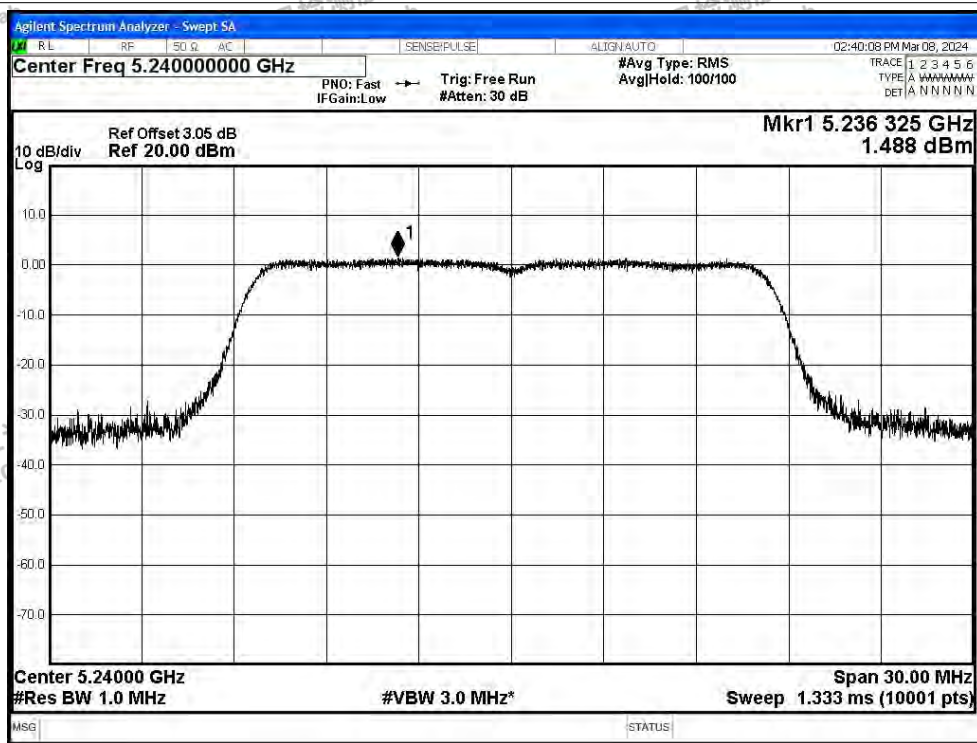


PSD NVNT n20 5180MHz Ant1

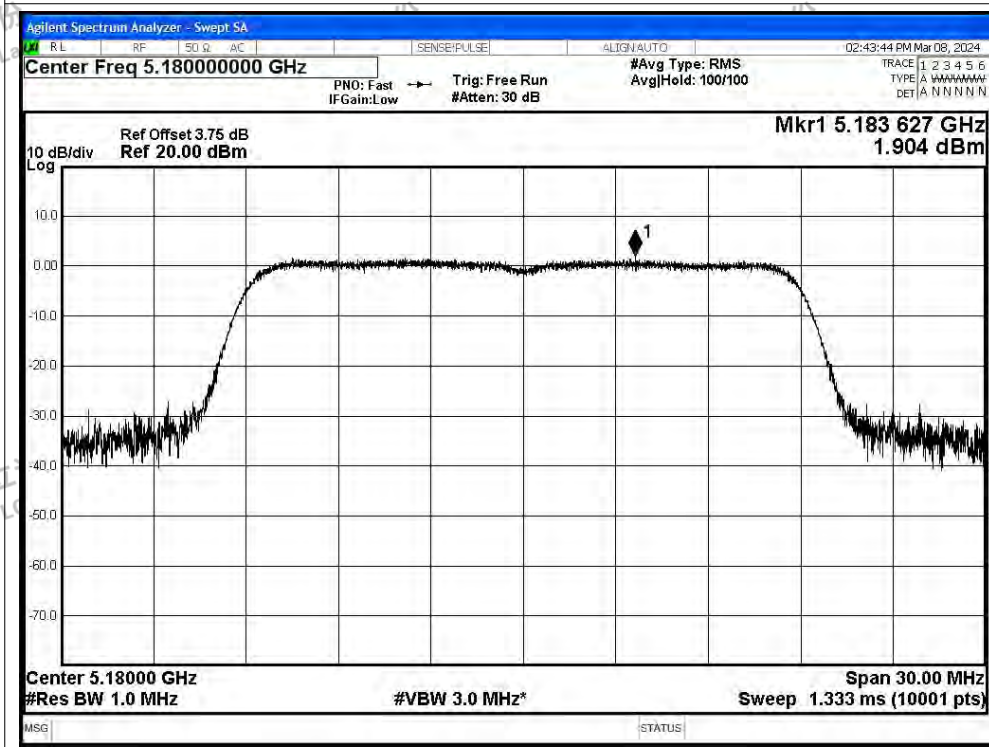




PSD NVNT n20 5200MHz Ant1

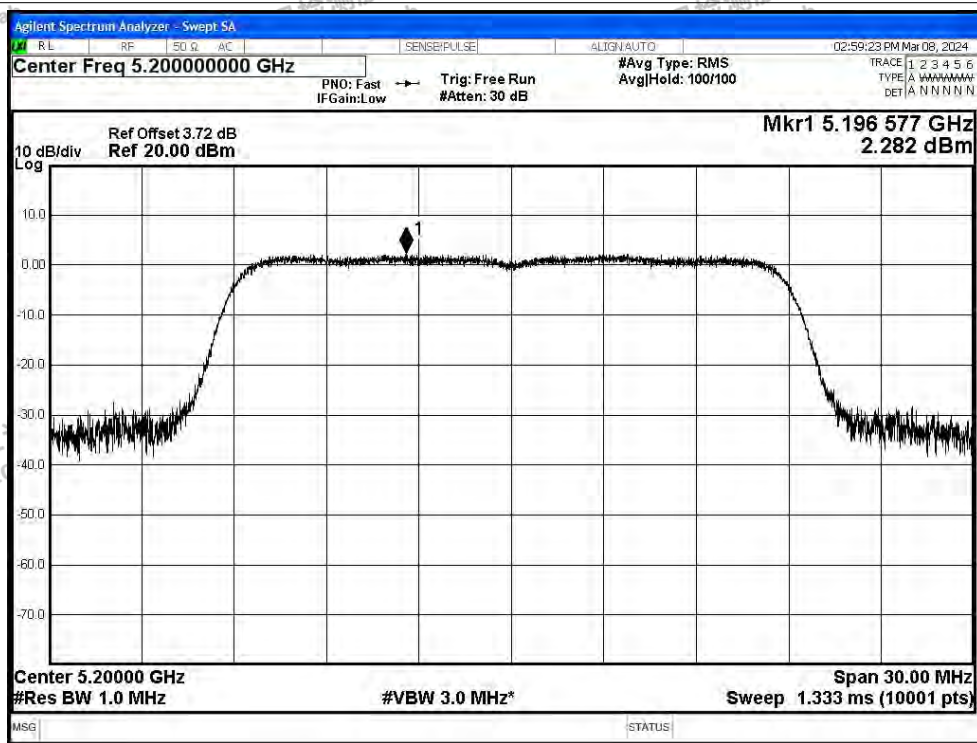


PSD NVNT n20 5240MHz Ant1

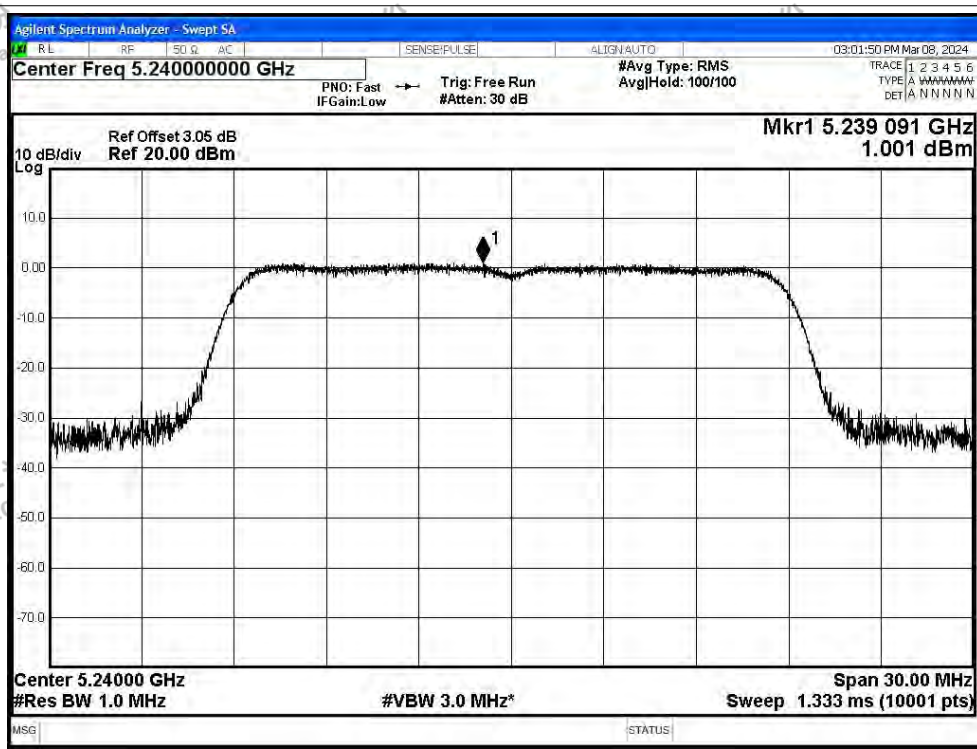






PSD NVNT n40 5190MHz Ant1

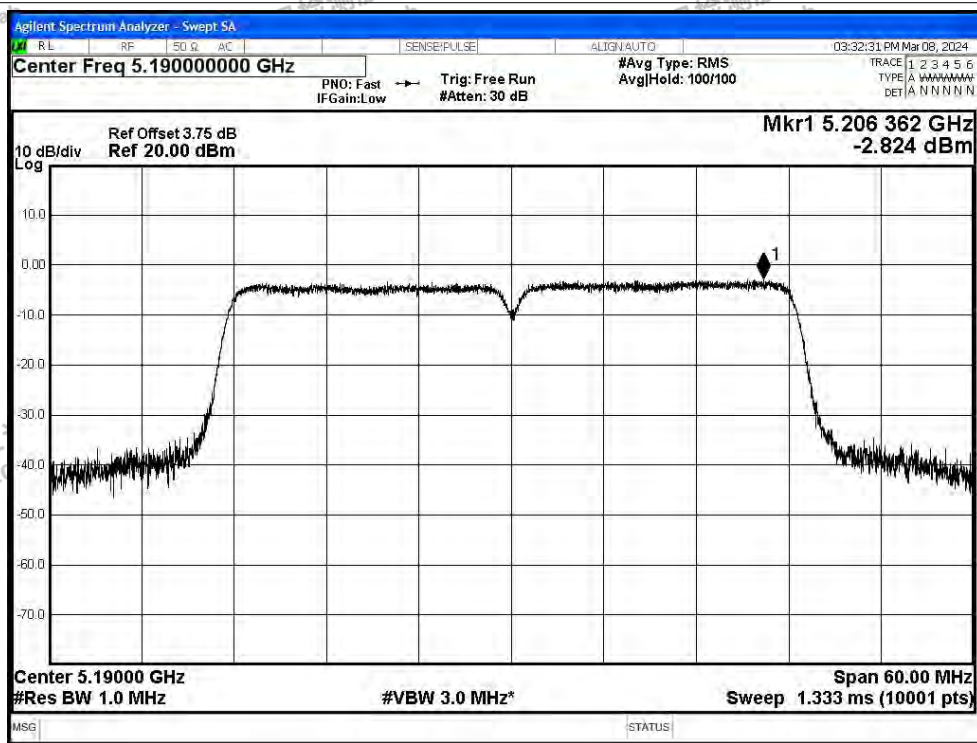


PSD NVNT n40 5230MHz Ant1

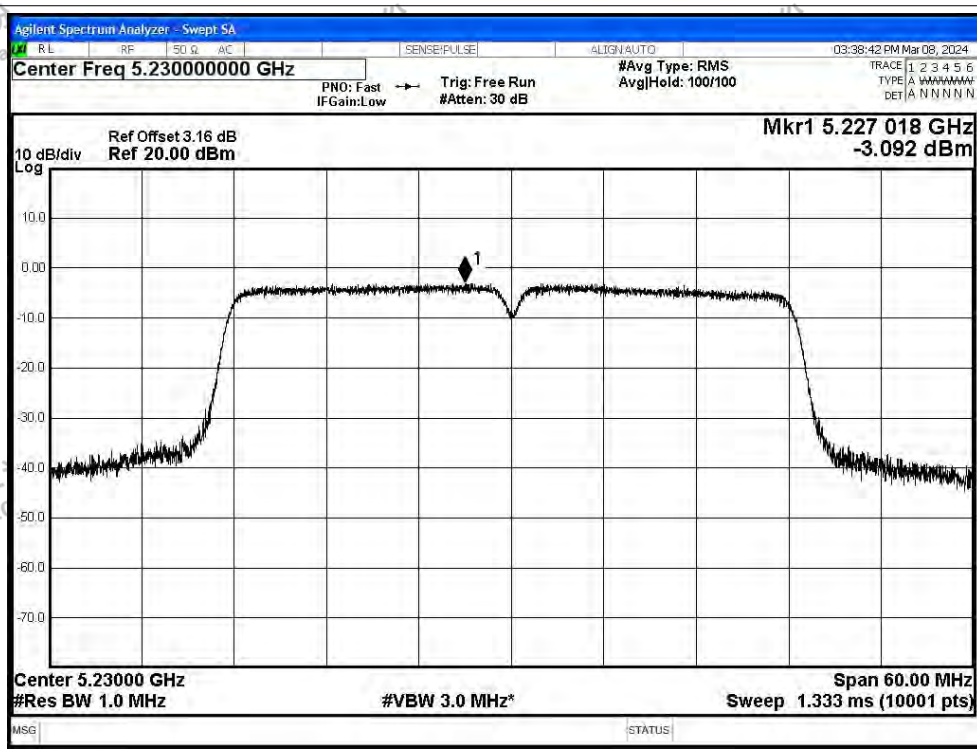




PSD NVNT ac20 5180MHz Ant1

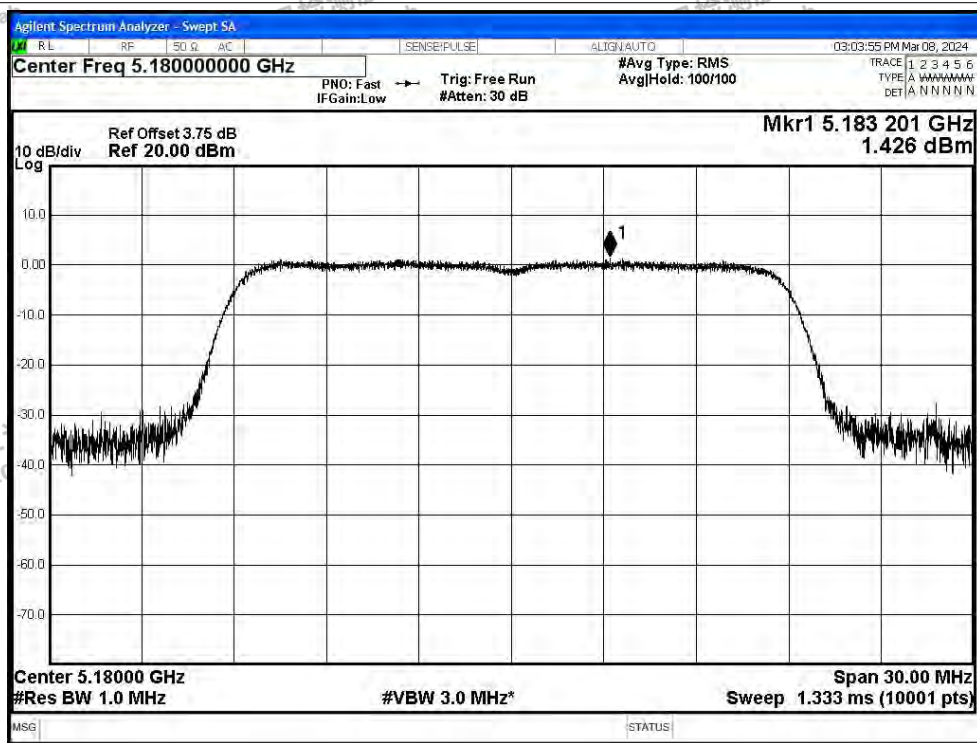


PSD NVNT ac20 5200MHz Ant1

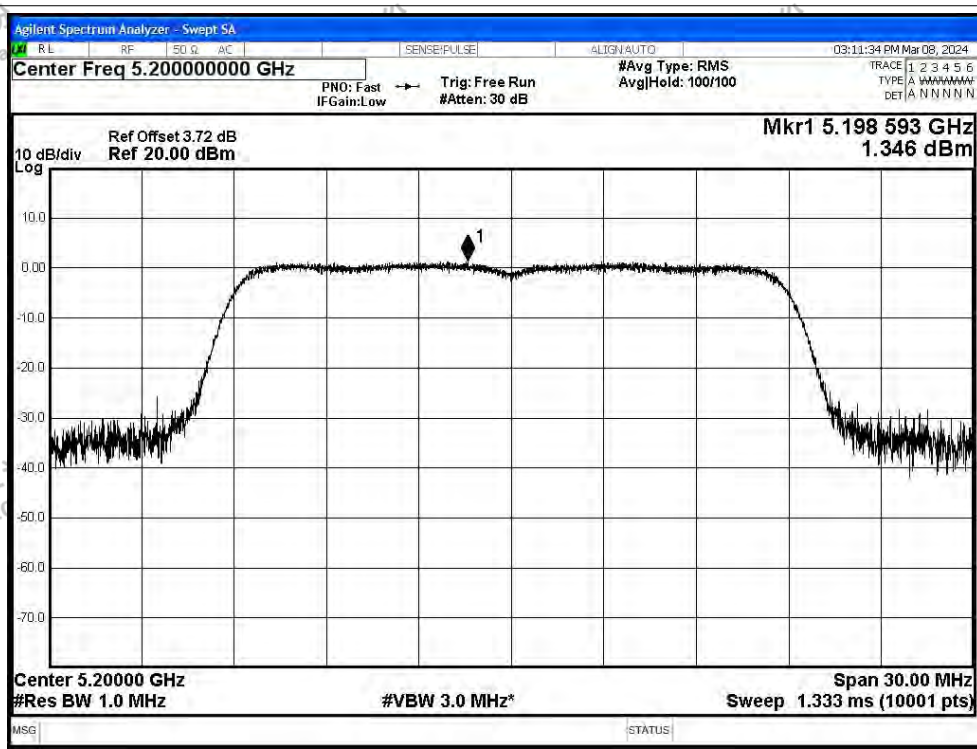




PSD NVNT ac20 5240MHz Ant1

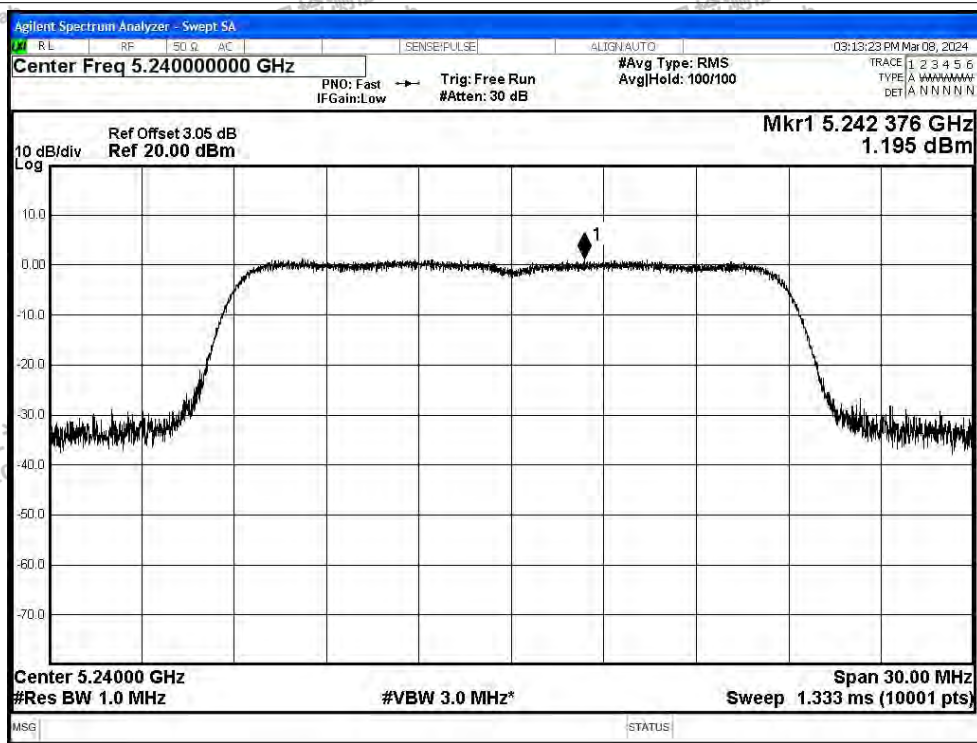


PSD NVNT ac40 5190MHz Ant1

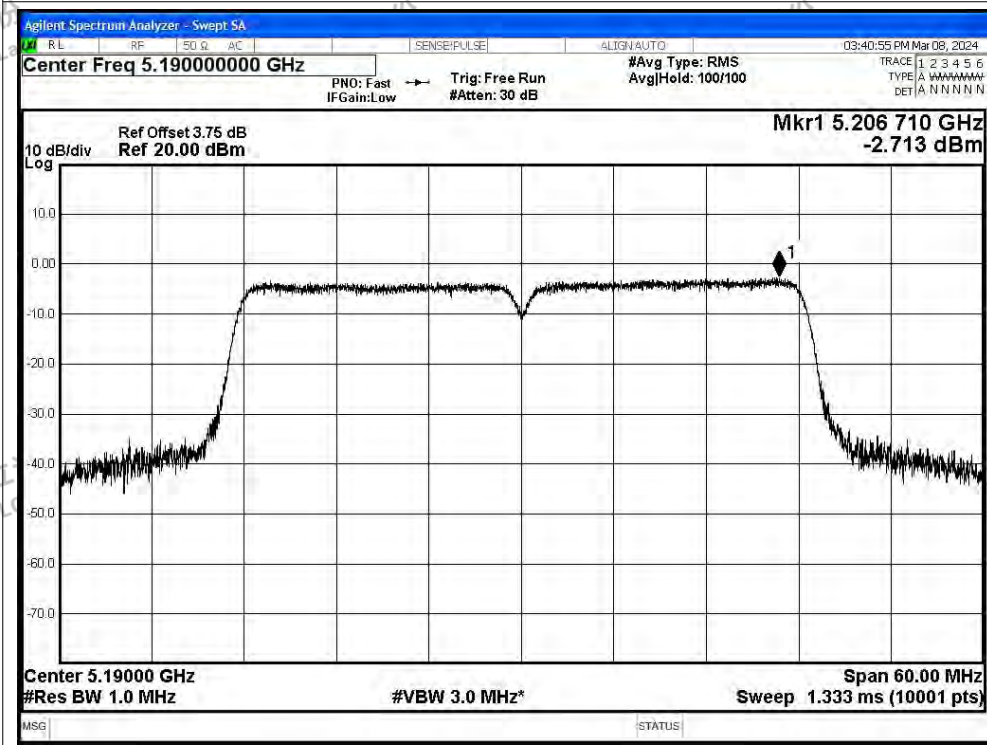




PSD NVNT ac40 5230MHz Ant1

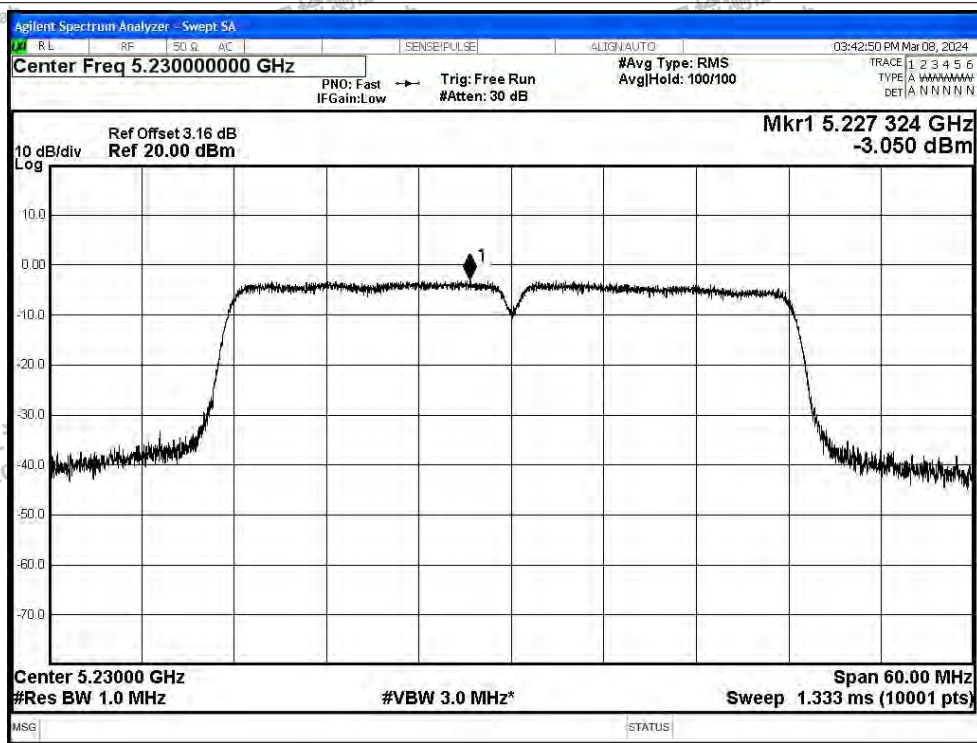


PSD NVNT ac80 5210MHz Ant1

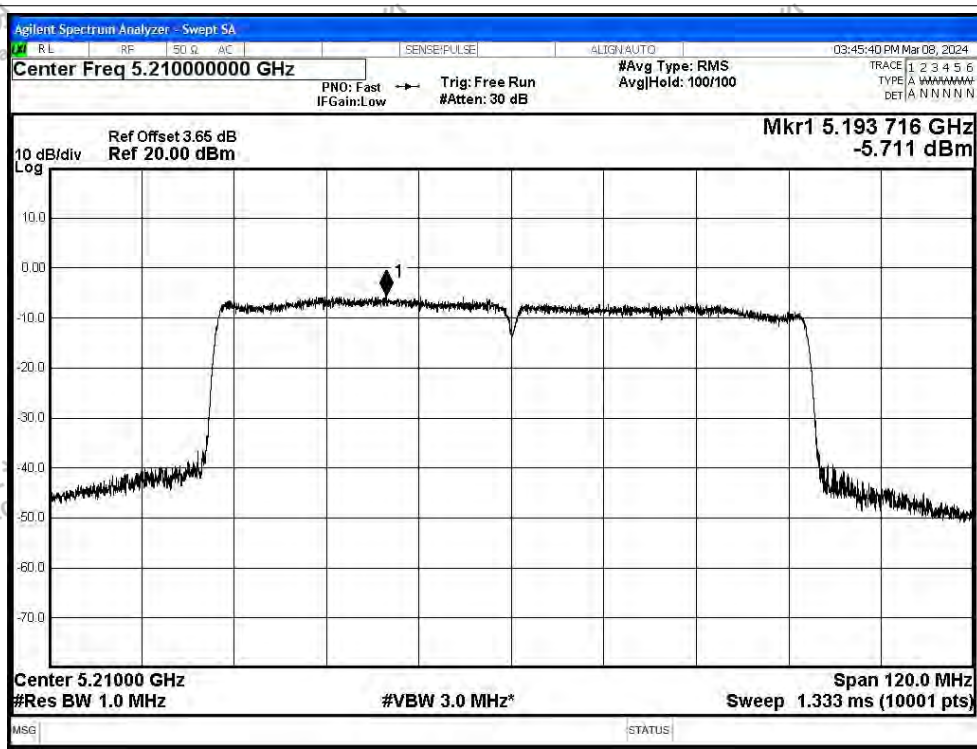




Test Graphs

PSD NVNT a 5180MHz Ant2

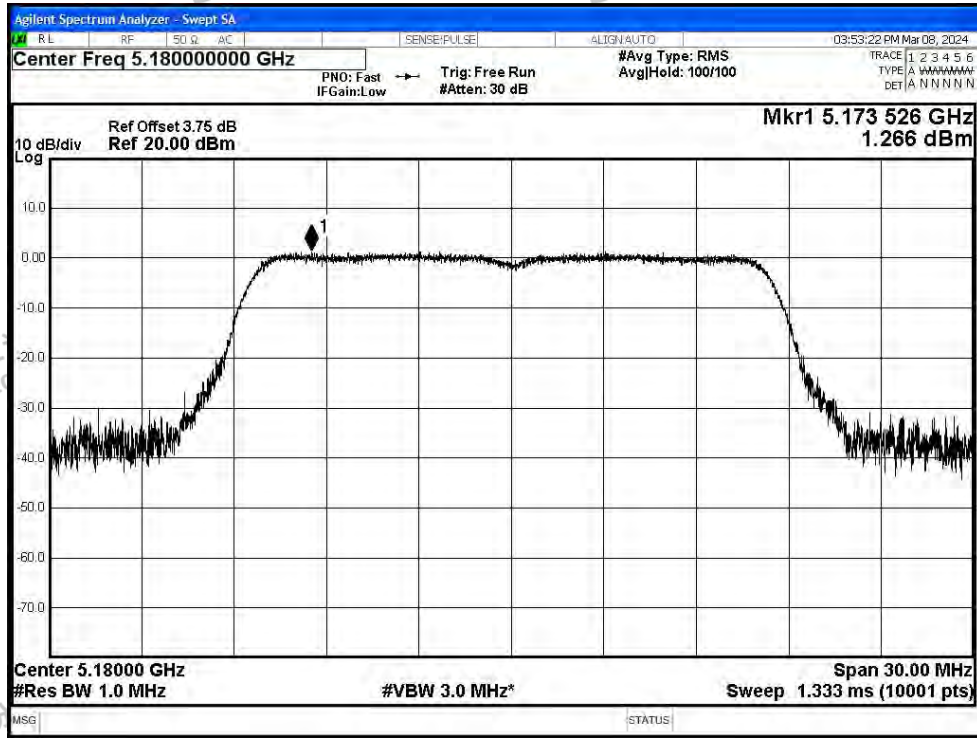


PSD NVNT a 5200MHz Ant2

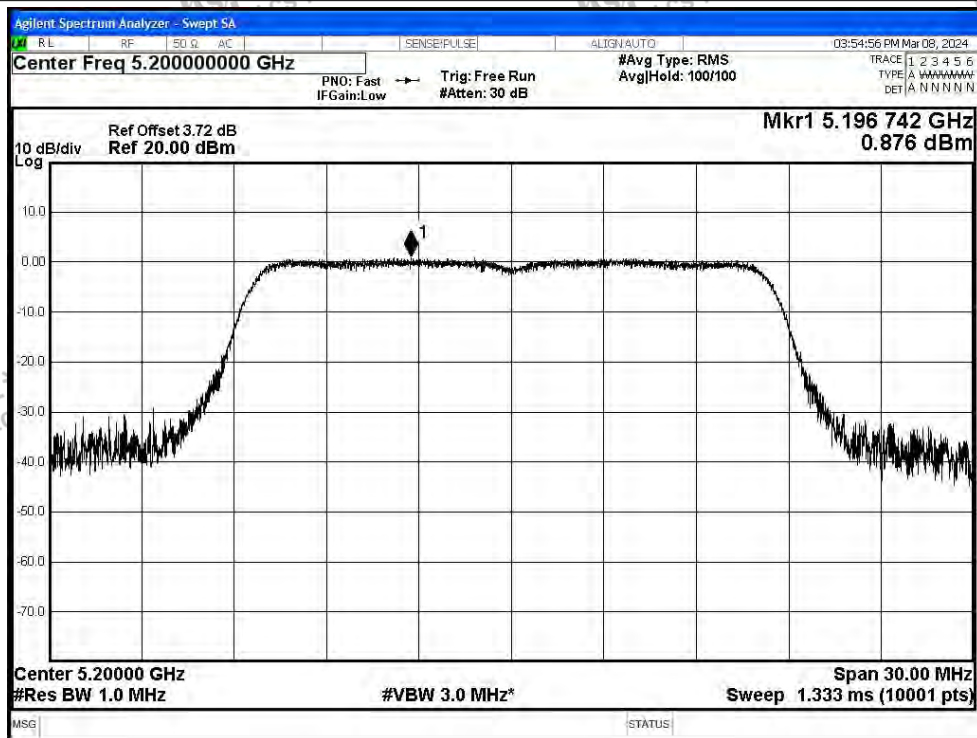




PSD NVNT a 5240MHz Ant2

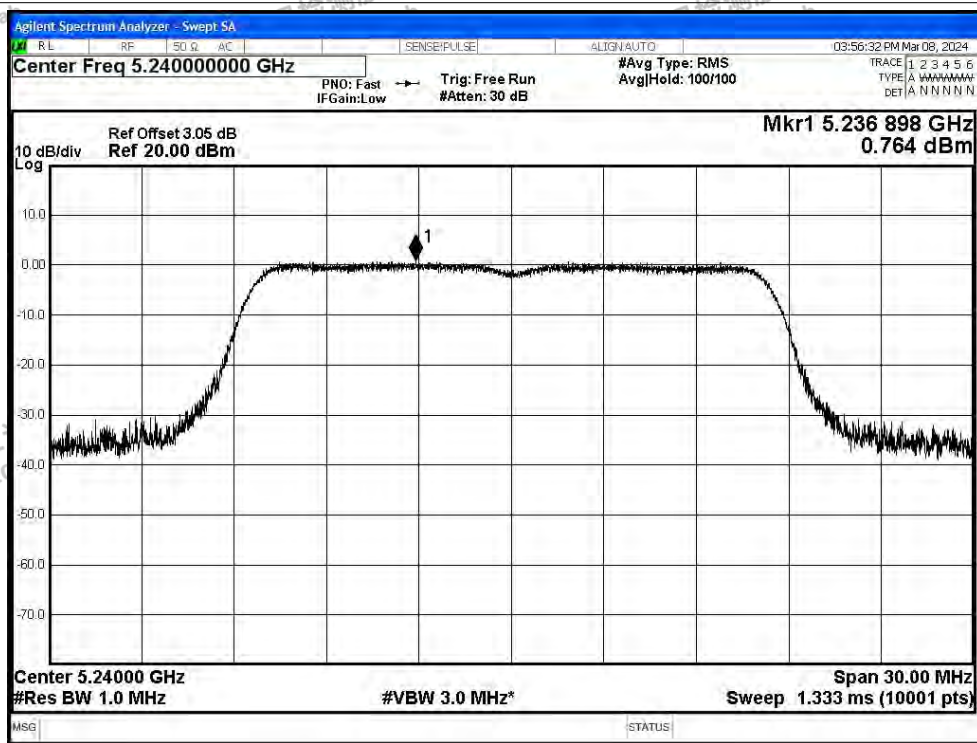


PSD NVNT n20 5180MHz Ant2

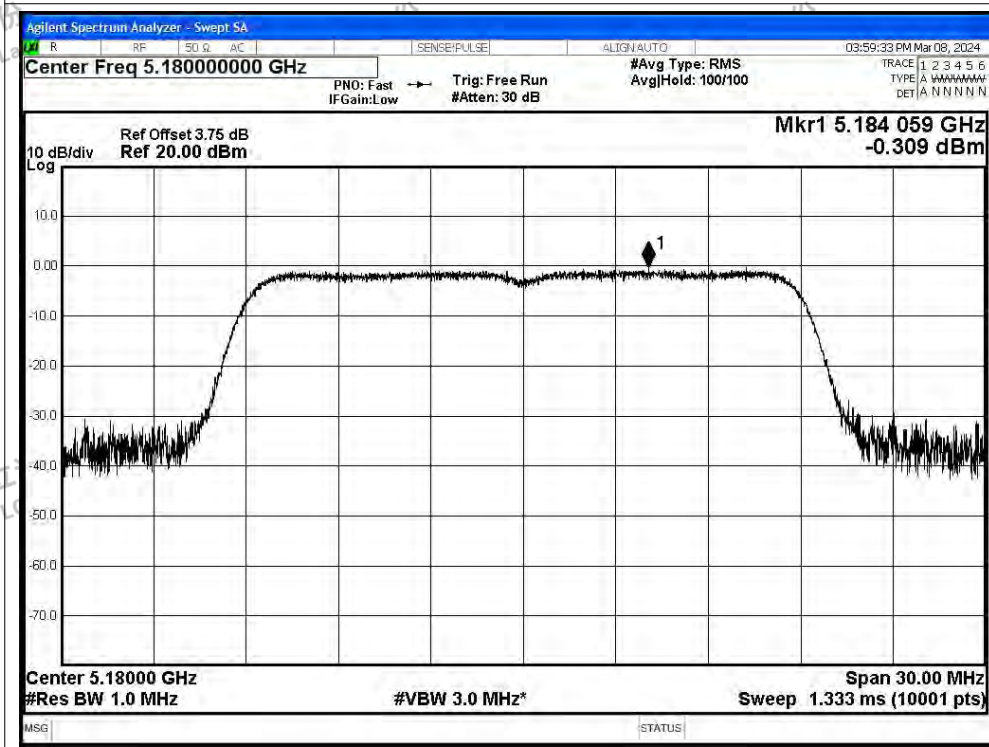




PSD NVNT n20 5200MHz Ant2

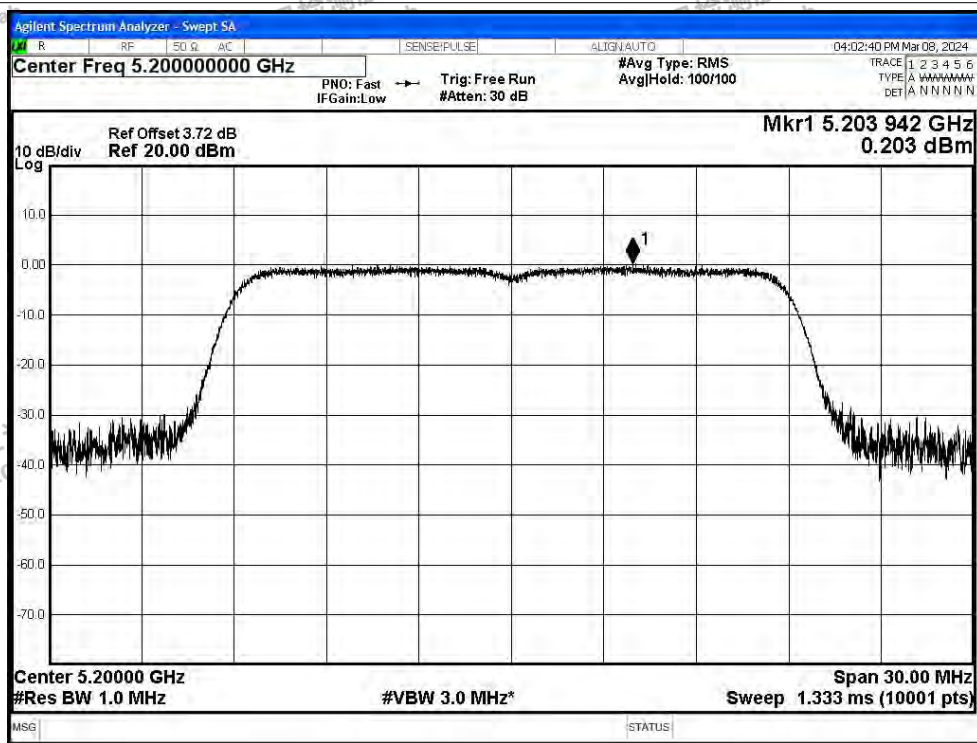


PSD NVNT n20 5240MHz Ant2

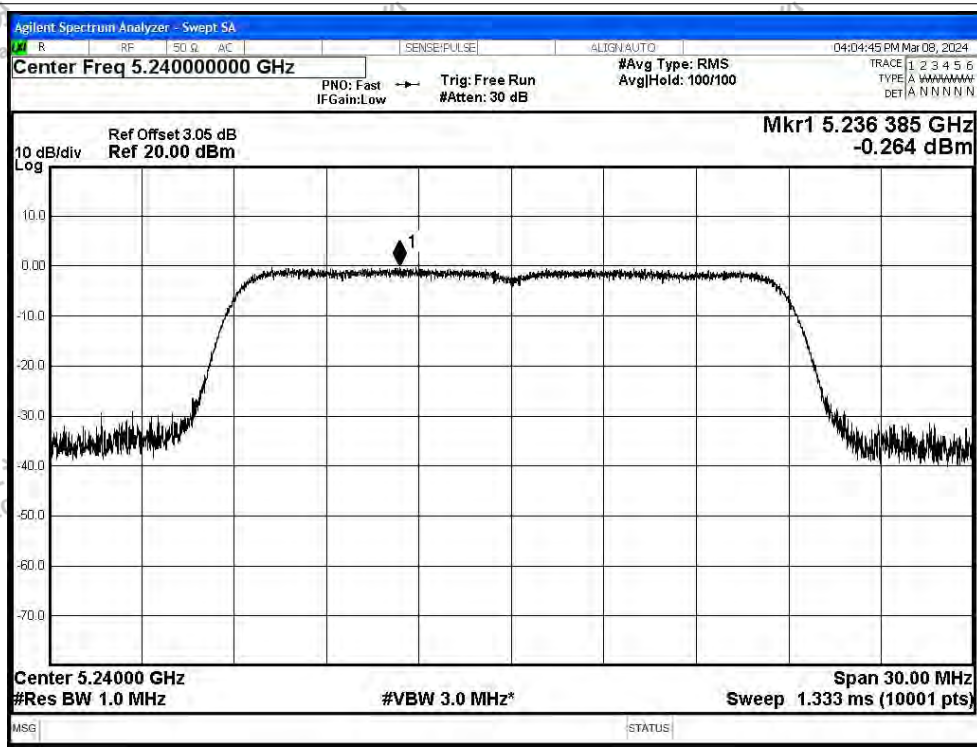




PSD NVNT n40 5190MHz Ant2

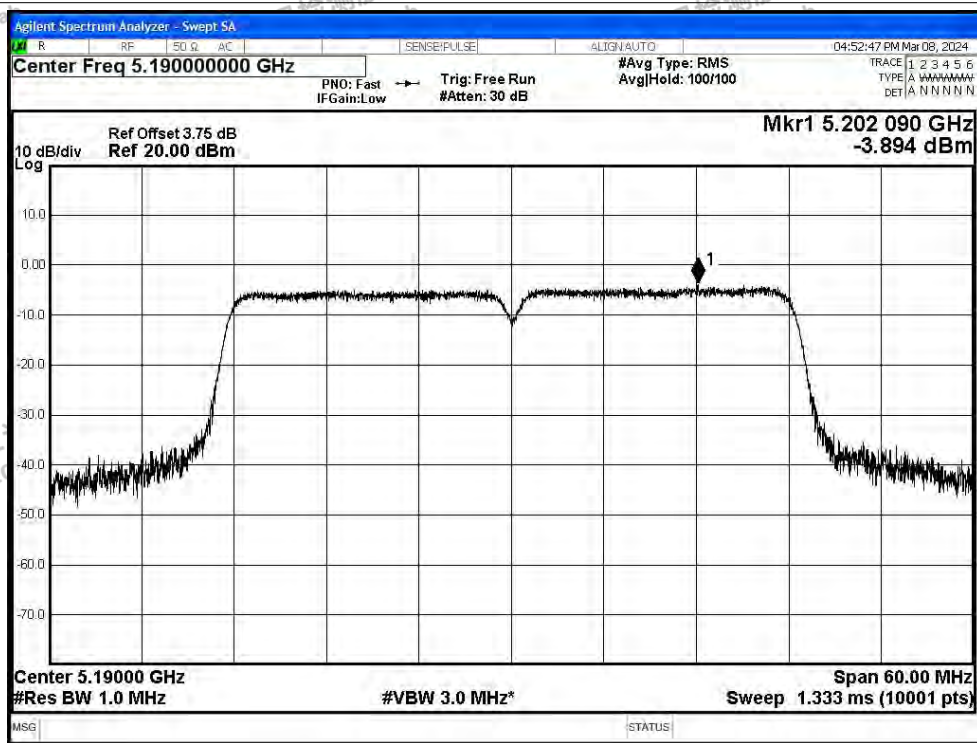


PSD NVNT n40 5230MHz Ant2

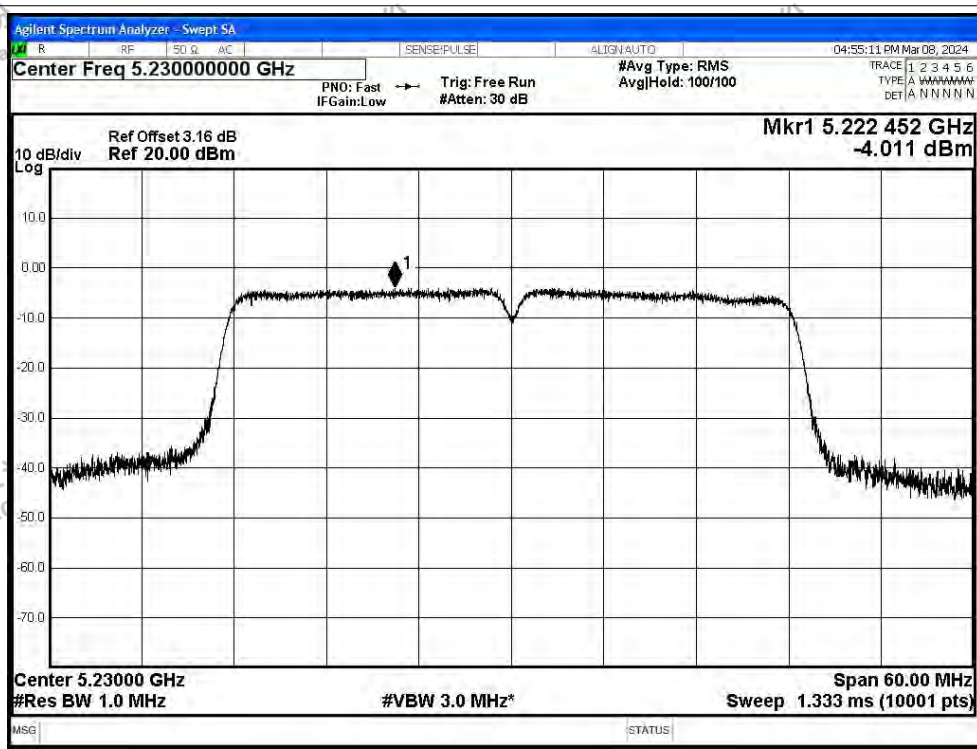






PSD NVNT ac20 5180MHz Ant2

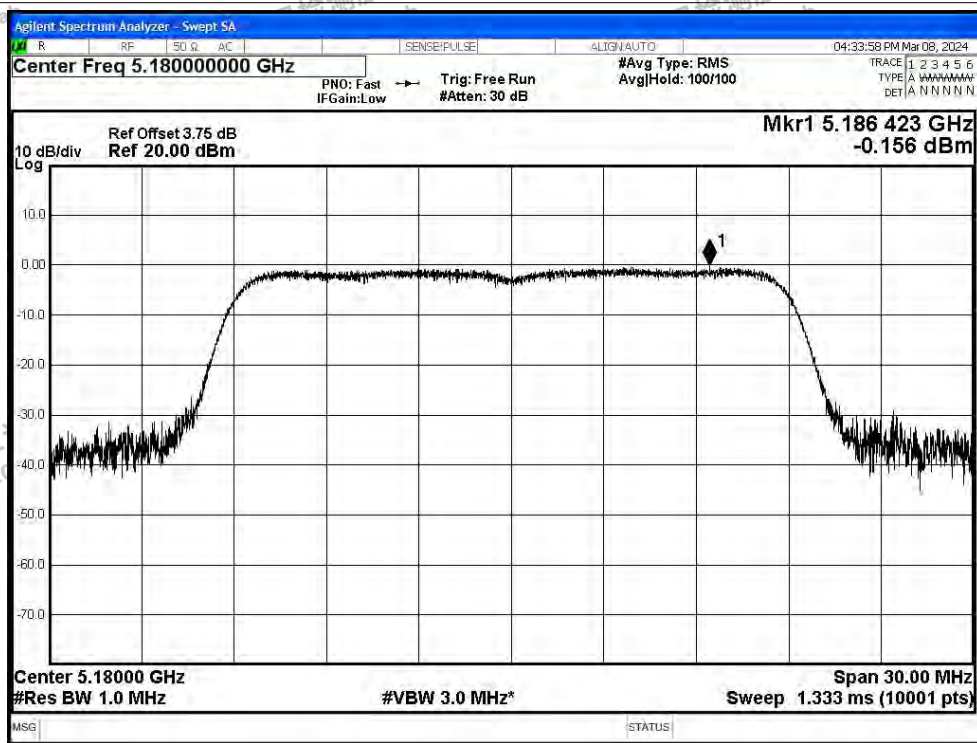


PSD NVNT ac20 5200MHz Ant2

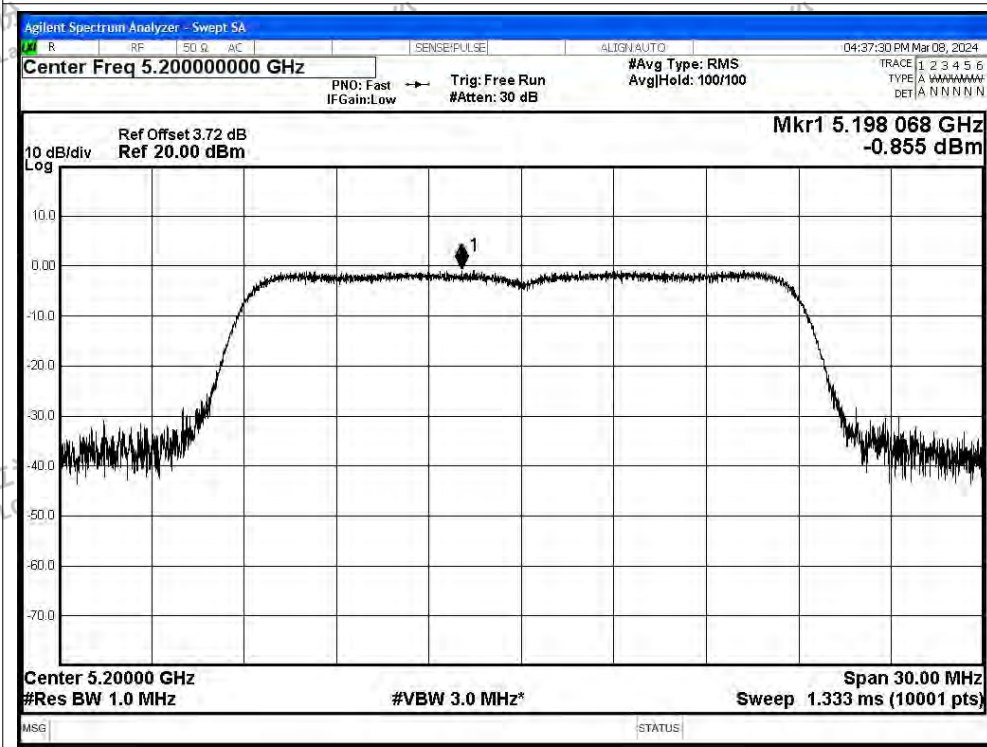




PSD NVNT ac20 5240MHz Ant2

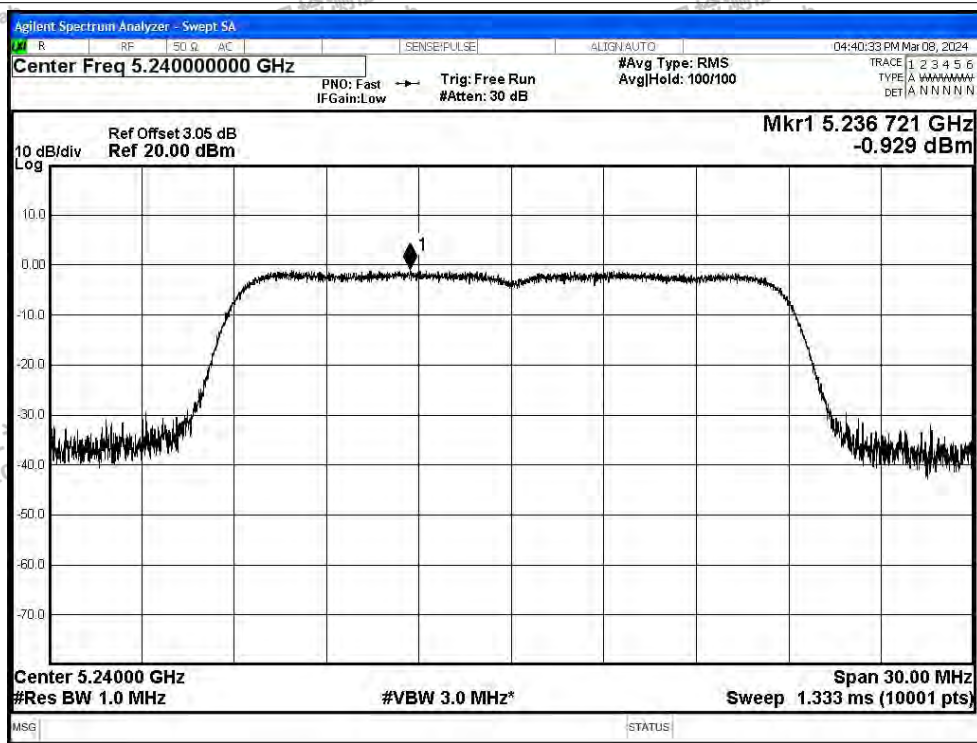


PSD NVNT ac40 5190MHz Ant2

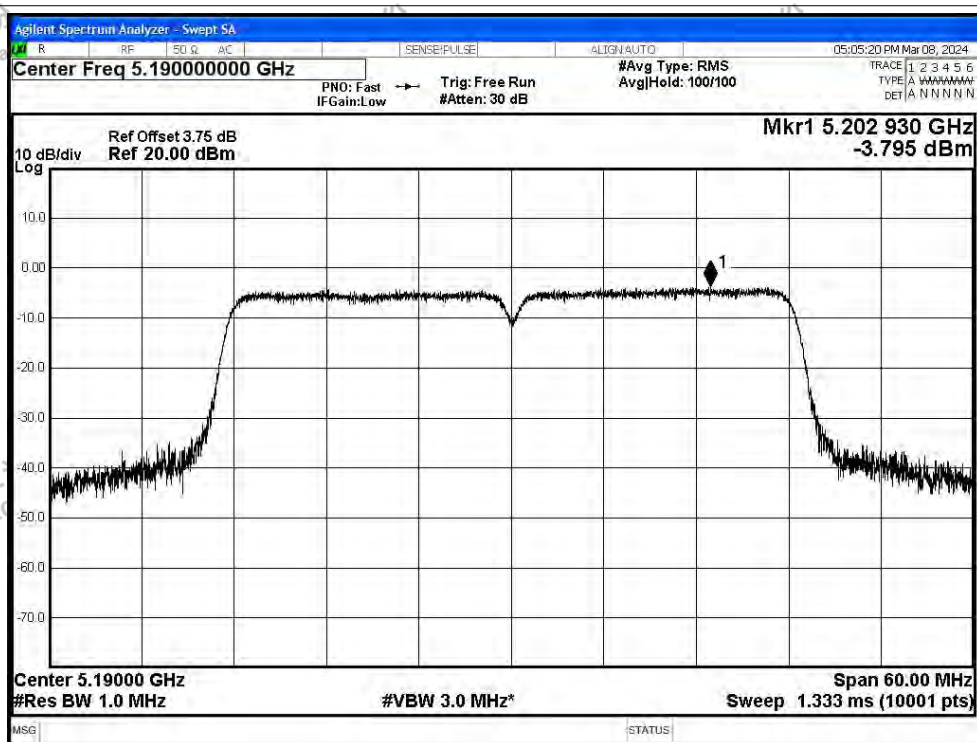




PSD NVNT ac40 5230MHz Ant2

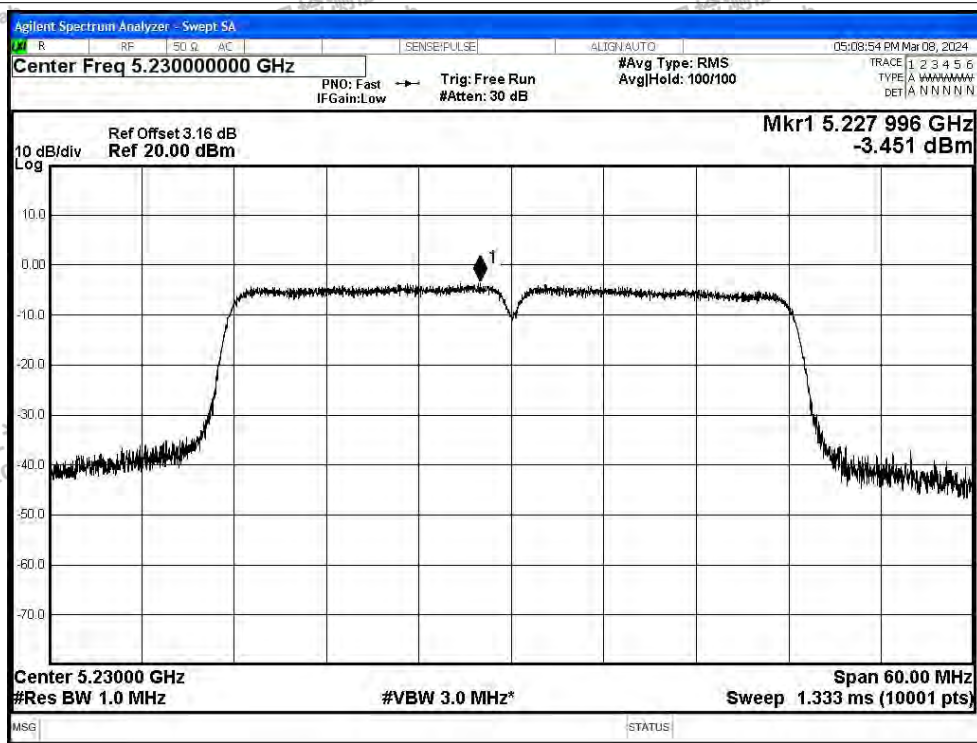

PSD NVNT ac80 5210MHz Ant2

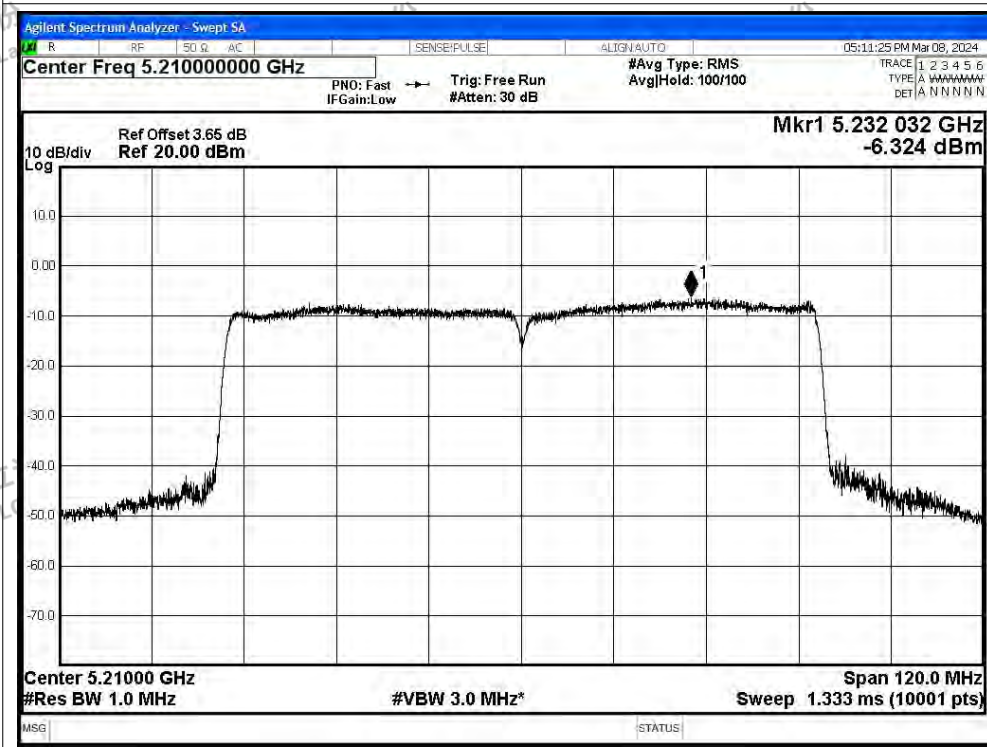



### D.4 Restrict Band

Condition	Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	4500	-49.28	2	-	47.95	Peak	74	Pass
NVNT	a	5180	4500	-58.29	2	0.1	38.94	Average	54	Pass
NVNT	a	5180	5148.9	-37.98	2	-	59.25	Peak	74	Pass
NVNT	a	5180	5149.6	-49.48	2	0.1	47.75	Average	54	Pass
NVNT	a	5180	5150	-38.77	2	-	58.46	Peak	74	Pass
NVNT	a	5180	5150	-49.17	2	0.1	48.06	Average	54	Pass
NVNT	a	5240	5350	-49.14	2	-	48.09	Peak	74	Pass
NVNT	a	5240	5350	-56.44	2	0.1	40.79	Average	54	Pass
NVNT	a	5240	5351.76	-46.74	2	-	50.49	Peak	74	Pass
NVNT	a	5240	5350.8	-56.03	2	0.1	41.20	Average	54	Pass
NVNT	a	5240	5460	-49.82	2	-	47.41	Peak	74	Pass
NVNT	a	5240	5460	-57.58	2	0.1	39.65	Average	54	Pass
NVNT	n20mimo	5180	4500	-51.2	5.01	-	49.04	Peak	74	Pass
NVNT	n20mimo	5180	4500	-58.37	5.01	0.15	41.87	Average	54	Pass
NVNT	n20mimo	5180	5148.2	-36.57	5.01	-	63.67	Peak	74	Pass
NVNT	n20mimo	5180	5149.6	-48.52	5.01	0.15	51.72	Average	54	Pass
NVNT	n20mimo	5180	5150	-37.87	5.01	-	62.37	Peak	74	Pass
NVNT	n20mimo	5180	5150	-48.47	5.01	0.15	51.86	Average	54	Pass
NVNT	n20mimo	5240	5350	-48.74	5.01	-	51.59	Peak	74	Pass
NVNT	n20mimo	5240	5350	-56.74	5.01	0.15	43.59	Average	54	Pass
NVNT	n20mimo	5240	5362.56	-46.89	5.01	-	53.35	Peak	74	Pass
NVNT	n20mimo	5240	5352.24	-56.41	5.01	0.15	43.83	Average	54	Pass
NVNT	n20mimo	5240	5460	-49.79	5.01	-	50.45	Peak	74	Pass
NVNT	n20mimo	5240	5460	-58.29	5.01	0.15	41.95	Average	54	Pass
NVNT	n40mimo	5190	4500	-50.9	5.01	-	49.34	Peak	74	Pass
NVNT	n40mimo	5190	4500	-58.22	5.01	0.29	42.02	Average	54	Pass
NVNT	n40mimo	5190	5149.7	-39.14	5.01	-	61.10	Peak	74	Pass
NVNT	n40mimo	5190	5148.97	-49.81	5.01	0.29	50.43	Average	54	Pass
NVNT	n40mimo	5190	5150	-39.14	5.01	-	61.10	Peak	74	Pass
NVNT	n40mimo	5190	5150	-49.84	5.01	0.29	50.40	Average	54	Pass
NVNT	n40mimo	5230	5350	-49.13	5.01	-	51.11	Peak	74	Pass
NVNT	n40mimo	5230	5350	-56.91	5.01	0.3	43.33	Average	54	Pass
NVNT	n40mimo	5230	5405.19	-46.65	5.01	-	53.59	Peak	74	Pass
NVNT	n40mimo	5230	5350.11	-56.91	5.01	0.3	43.33	Average	54	Pass
NVNT	n40mimo	5230	5460	-50.7	5.01	-	49.54	Peak	74	Pass
NVNT	n40mimo	5230	5460	-57.9	5.01	0.3	42.34	Average	54	Pass
NVNT	ac20mimo	5180	4500	-50.22	5.01	-	50.02	Peak	74	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity



NVNT	ac20mimo	5180	4500	-57.58	5.01	0.15	42.66	Average	54	Pass
NVNT	ac20mimo	5180	5149.6	-36.05	5.01	-	64.19	Peak	74	Pass
NVNT	ac20mimo	5180	5149.6	-48.94	5.01	0.15	51.30	Average	54	Pass
NVNT	ac20mimo	5180	5150	-31.76	5.01	-	68.48	Peak	74	Pass
NVNT	ac20mimo	5180	5150	-49.4	5.01	0.15	50.84	Average	54	Pass
NVNT	ac20mimo	5240	5350	-49.18	5.01	-	51.15	Peak	74	Pass
NVNT	ac20mimo	5240	5350	-57.23	5.01	0.15	43.10	Average	54	Pass
NVNT	ac20mimo	5240	5365.44	-47.24	5.01	-	53.09	Peak	74	Pass
NVNT	ac20mimo	5240	5351.28	-56.29	5.01	0.15	43.95	Average	54	Pass
NVNT	ac20mimo	5240	5460	-49.95	5.01	-	50.29	Peak	74	Pass
NVNT	ac20mimo	5240	5460	-58.04	5.01	0.15	42.20	Average	54	Pass
NVNT	ac40mimo	5190	4500	-50.49	5.01	-	49.75	Peak	74	Pass
NVNT	ac40mimo	5190	4500	-58.65	5.01	0.29	41.59	Average	54	Pass
NVNT	ac40mimo	5190	5148.97	-38.36	5.01	-	61.88	Peak	74	Pass
NVNT	ac40mimo	5190	5149.7	-49.89	5.01	0.29	50.35	Average	54	Pass
NVNT	ac40mimo	5190	5150	-38.66	5.01	-	61.58	Peak	74	Pass
NVNT	ac40mimo	5190	5150	-49.89	5.01	0.29	50.35	Average	54	Pass
NVNT	ac40mimo	5230	5350	-49.34	5.01	-	50.90	Peak	74	Pass
NVNT	ac40mimo	5230	5350	-57.2	5.01	0.29	43.04	Average	54	Pass
NVNT	ac40mimo	5230	5443.53	-47.05	5.01	-	53.19	Peak	74	Pass
NVNT	ac40mimo	5230	5357.13	-57.1	5.01	0.29	43.14	Average	54	Pass
NVNT	ac40mimo	5230	5460	-49.14	5.01	-	51.10	Peak	74	Pass
NVNT	ac40mimo	5230	5460	-57.62	5.01	0.29	42.62	Average	54	Pass
NVNT	ac80mimo	5210	5350	-46.42	5.01	-	53.82	Peak	74	Pass
NVNT	ac80mimo	5210	5350	-56.08	5.01	0.57	44.16	Average	54	Pass
NVNT	ac80mimo	5210	5427.99	-46.31	5.01	-	53.93	Peak	74	Pass
NVNT	ac80mimo	5210	5351.76	-55.85	5.01	0.57	44.39	Average	54	Pass
NVNT	ac80mimo	5210	5460	-51.54	5.01	-	48.70	Peak	74	Pass
NVNT	ac80mimo	5210	5460	-57.28	5.01	0.57	42.96	Average	54	Pass
NVNT	ac80mimo	5210	4500	-51.05	5.01	-	49.19	Peak	74	Pass
NVNT	ac80mimo	5210	4500	-58.28	5.01	0.57	41.96	Average	54	Pass
NVNT	ac80mimo	5210	5149.38	-33.65	5.01	-	66.59	Peak	74	Pass
NVNT	ac80mimo	5210	5149.38	-46.97	5.01	0.57	53.27	Average	54	Pass
NVNT	ac80mimo	5210	5150	-37.23	5.01	-	63.01	Peak	74	Pass
NVNT	ac80mimo	5210	5150	-46.67	5.01	0.57	53.57	Average	54	Pass

Note: 802.11a mode, only show the worst set of antenna1 data.




Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity




Test Graphs

Restrict Band NVNT a 5180MHz Peak

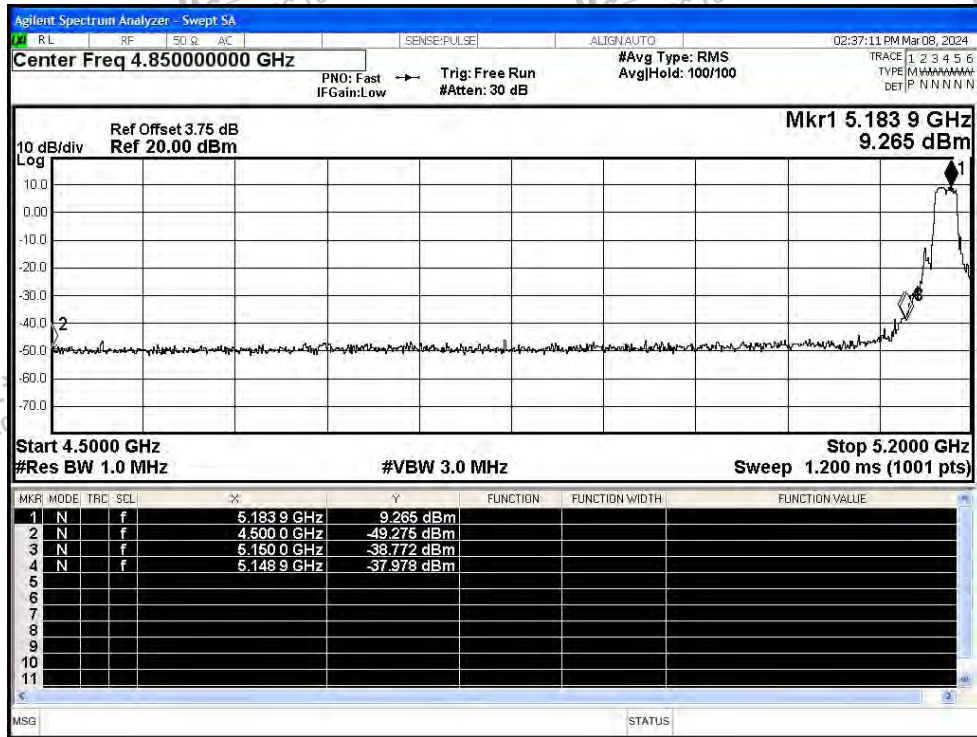


Restrict Band NVNT a 5180MHz Average

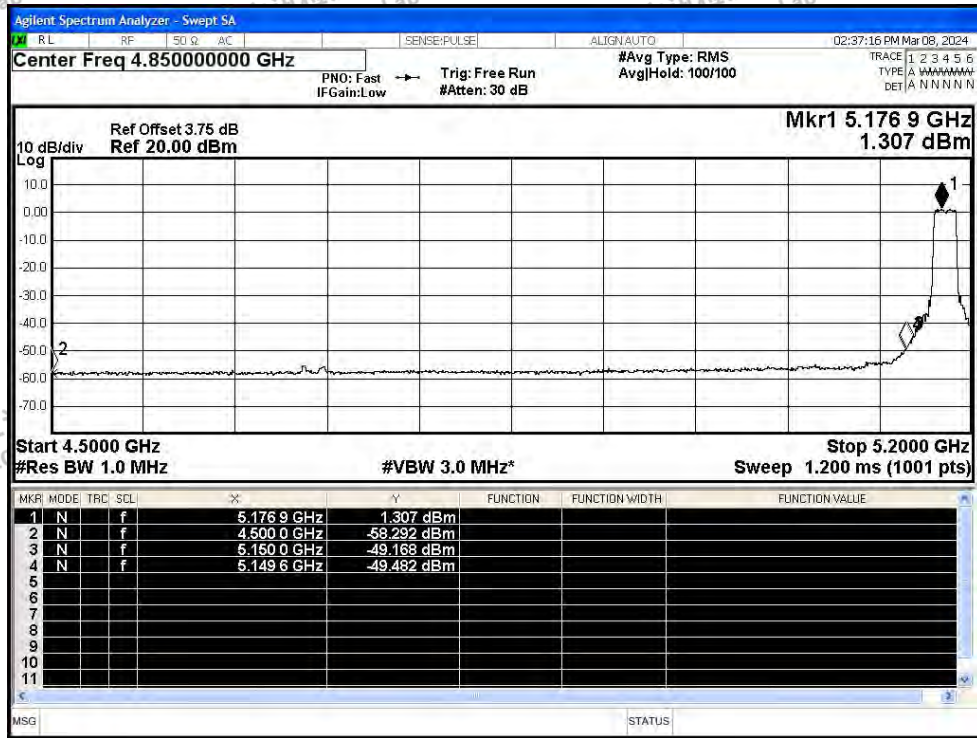




Restrict Band NVNT a 5240MHz Peak

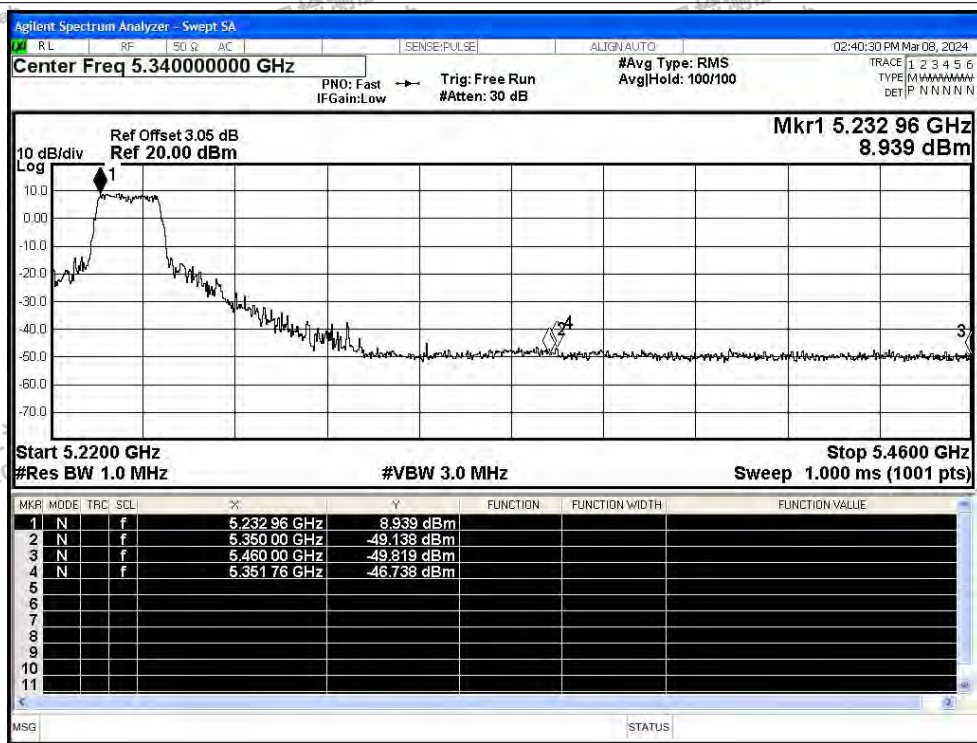


Restrict Band NVNT a 5240MHz Average

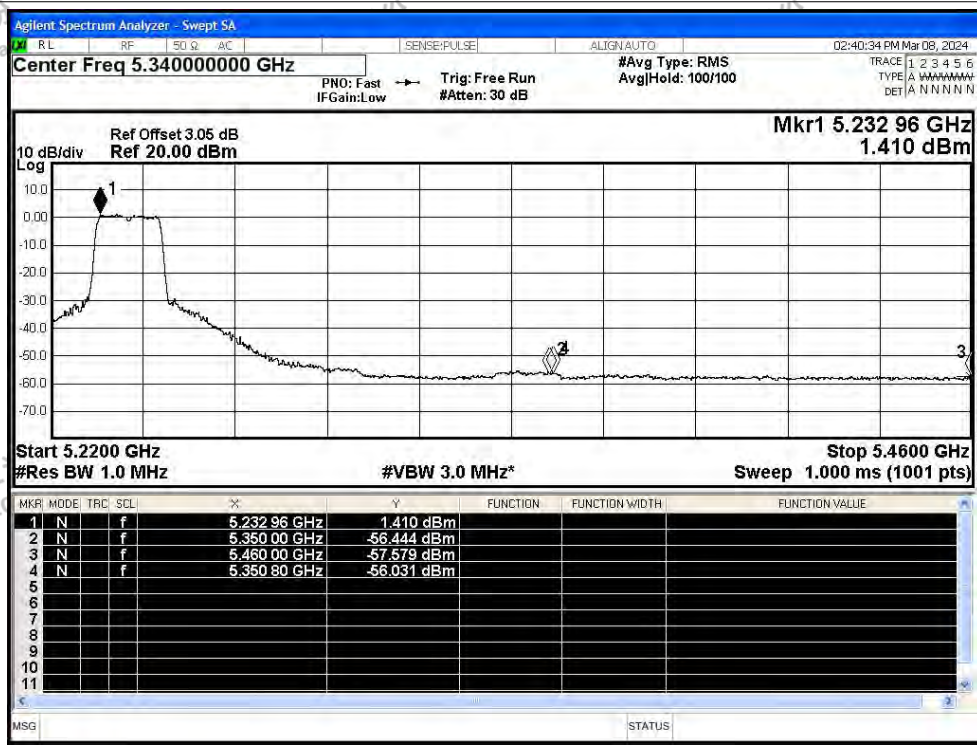




Restrict Band NVNT n20 5180MHz Peak

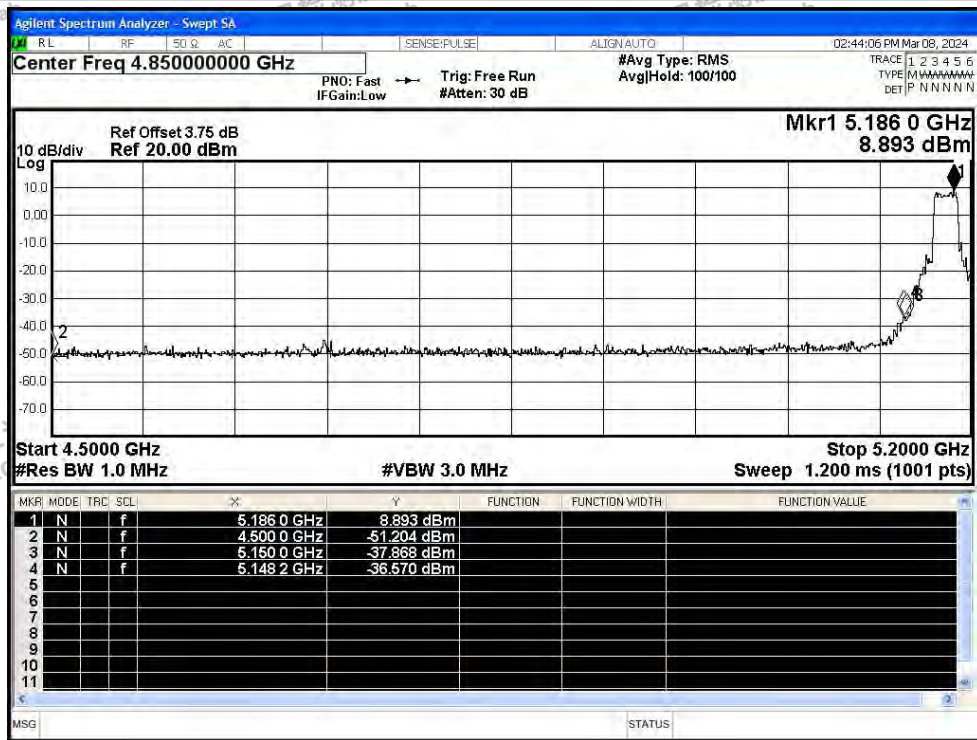


Restrict Band NVNT n20 5180MHz Average

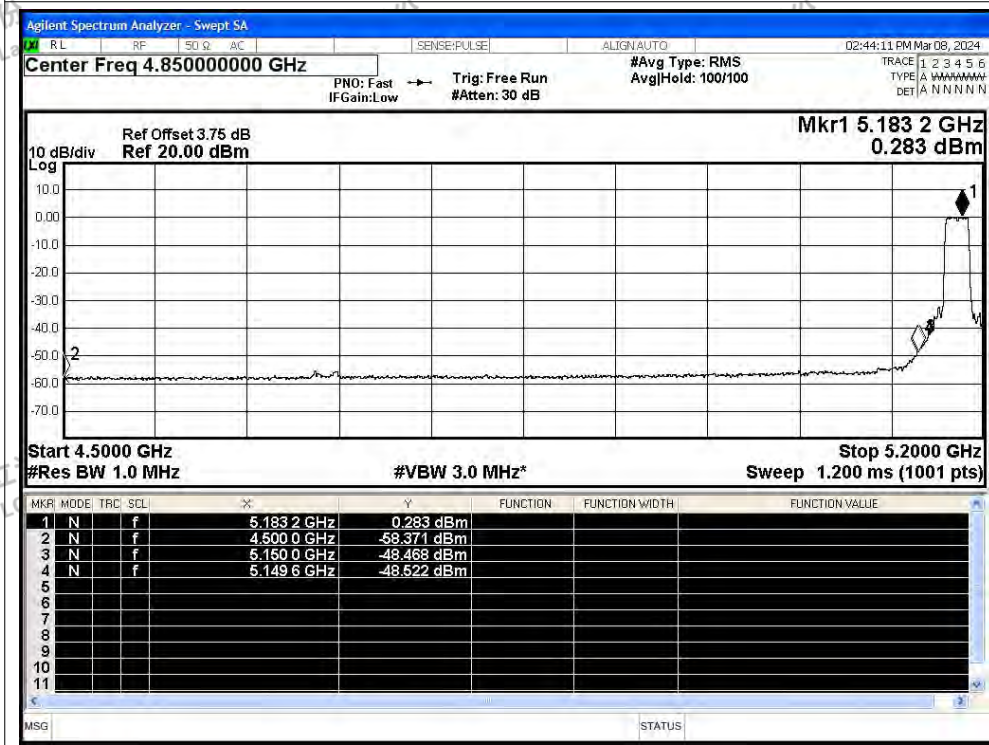






Restrict Band NVNT n20 5240MHz Peak

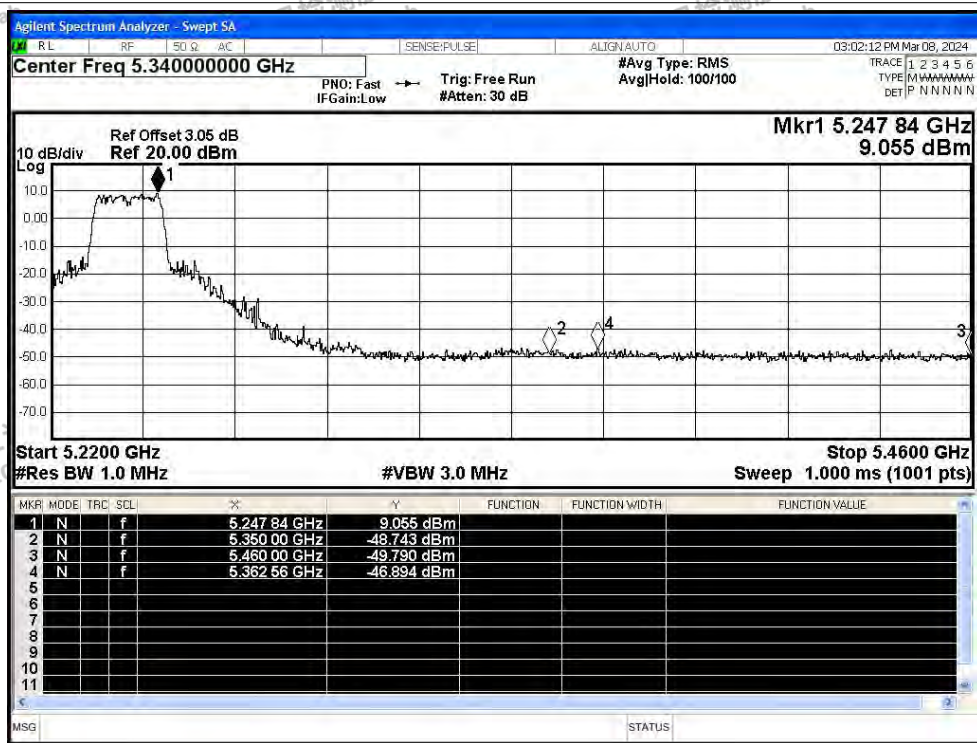


Restrict Band NVNT n20 5240MHz Average

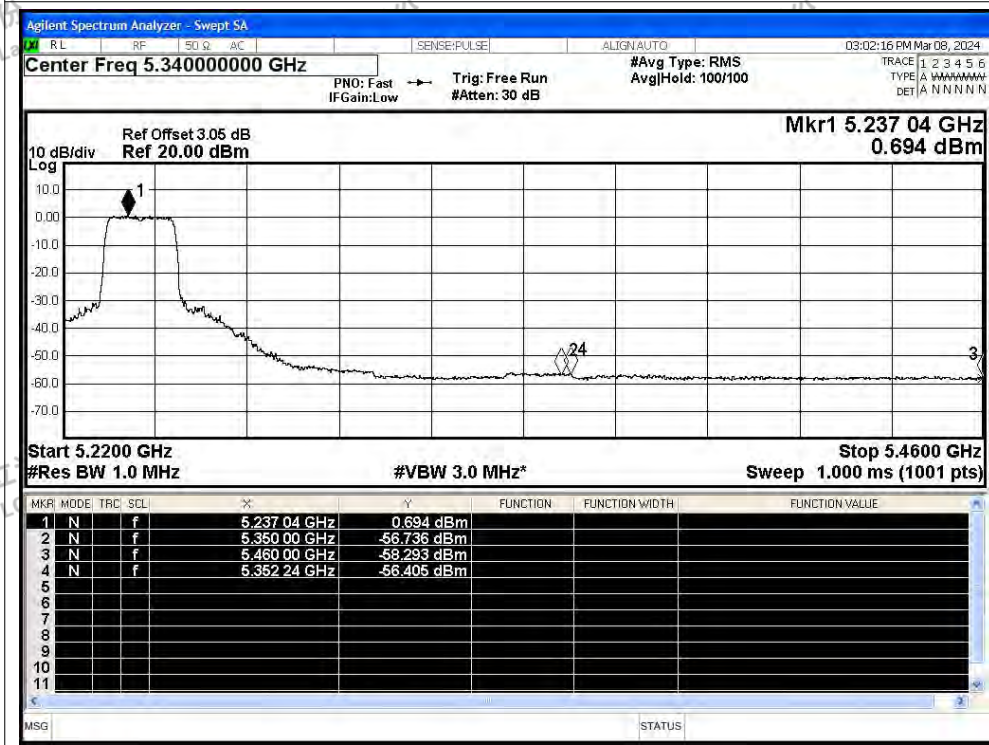




Restrict Band NVNT n40 5190MHz Peak

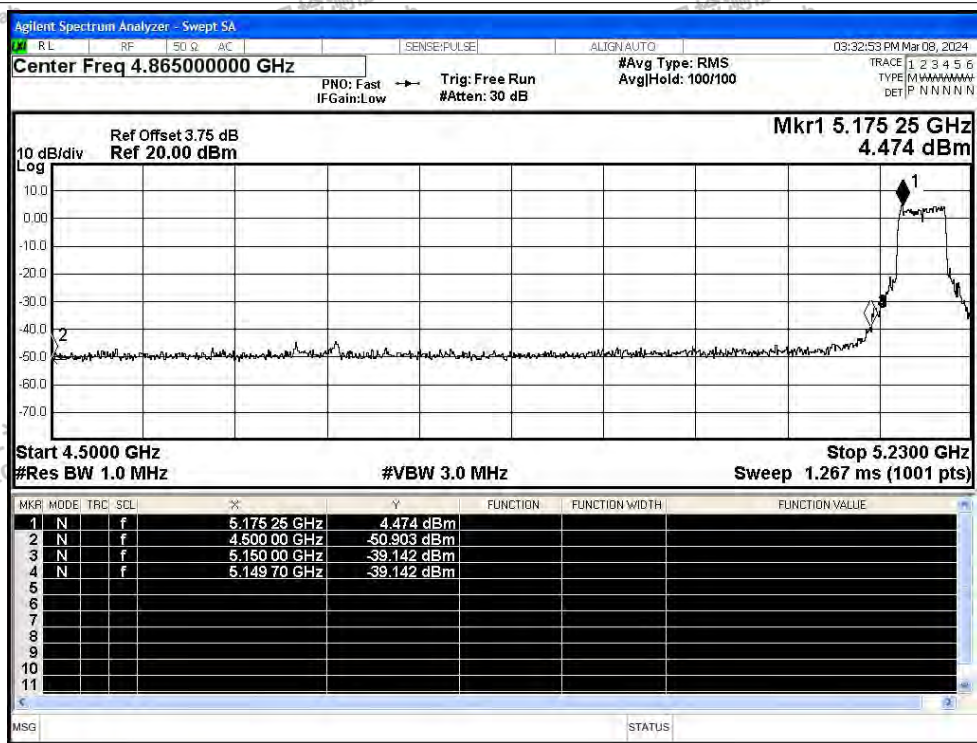


Restrict Band NVNT n40 5190MHz Average

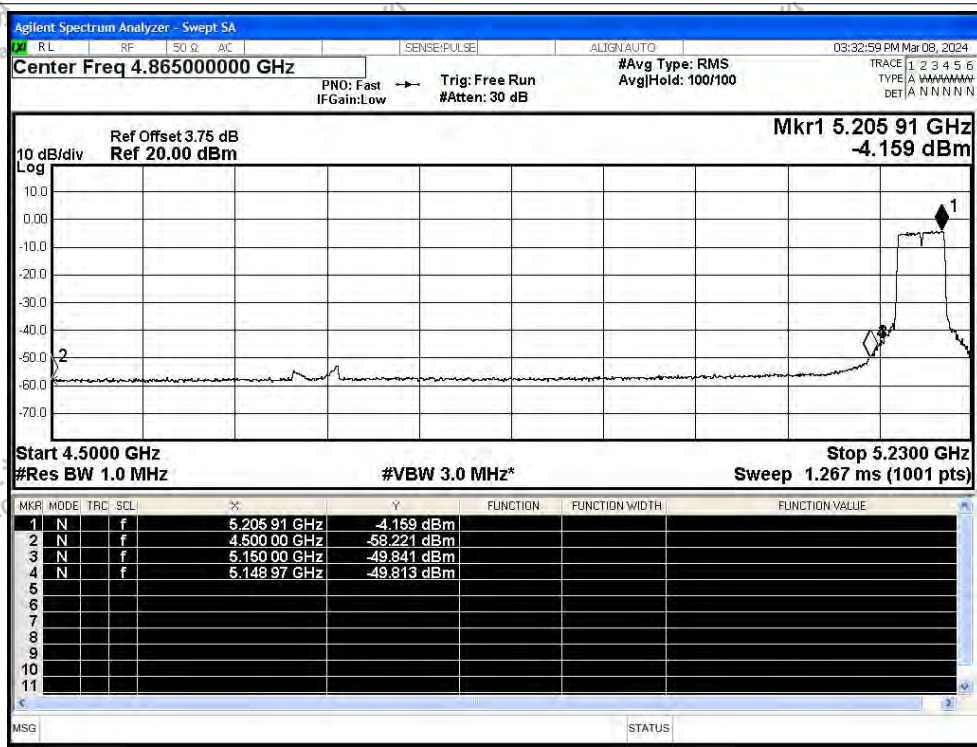




Restrict Band NVNT n40 5230MHz Peak

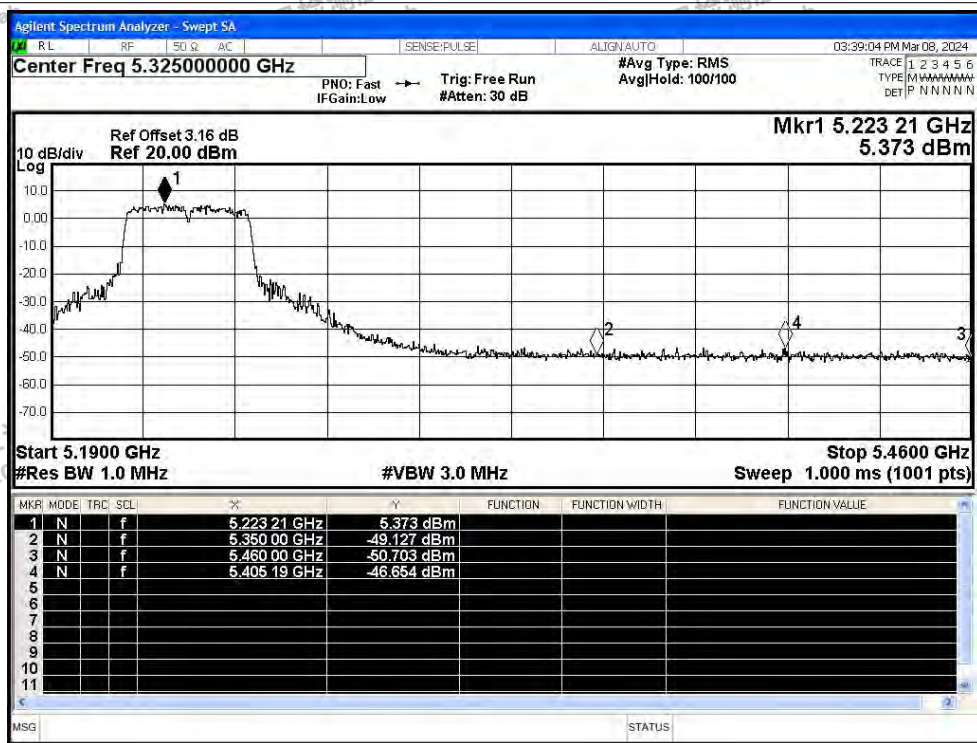


Restrict Band NVNT n40 5230MHz Average

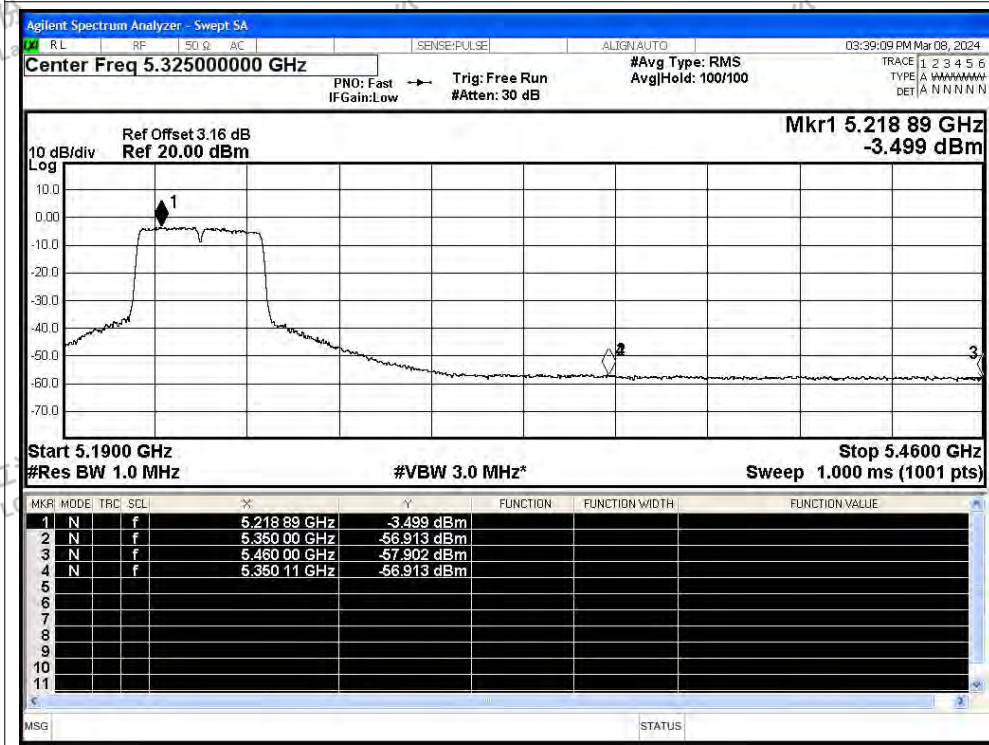




Restrict Band NVNT ac20 5180MHz Peak

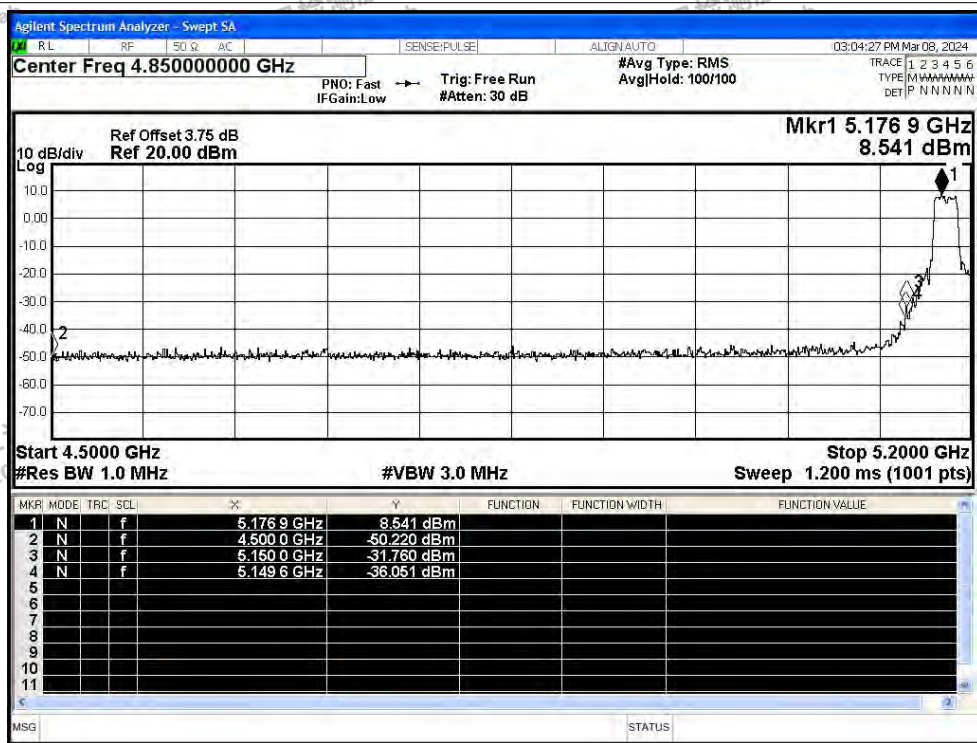


Restrict Band NVNT ac20 5180MHz Average

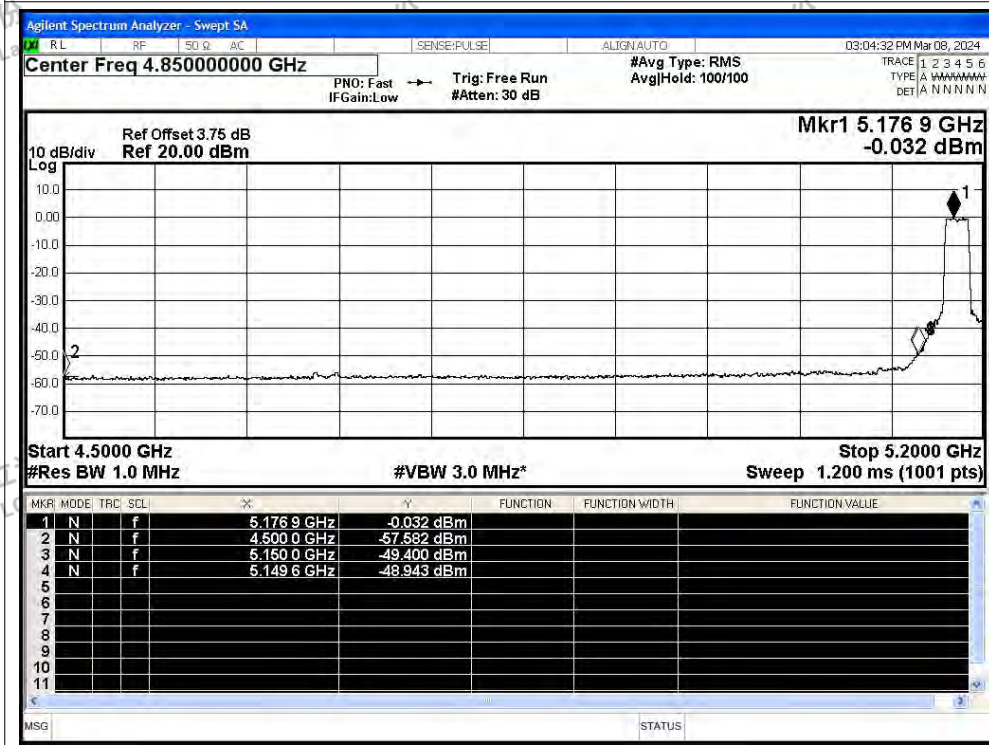




Restrict Band NVNT ac20 5240MHz Peak

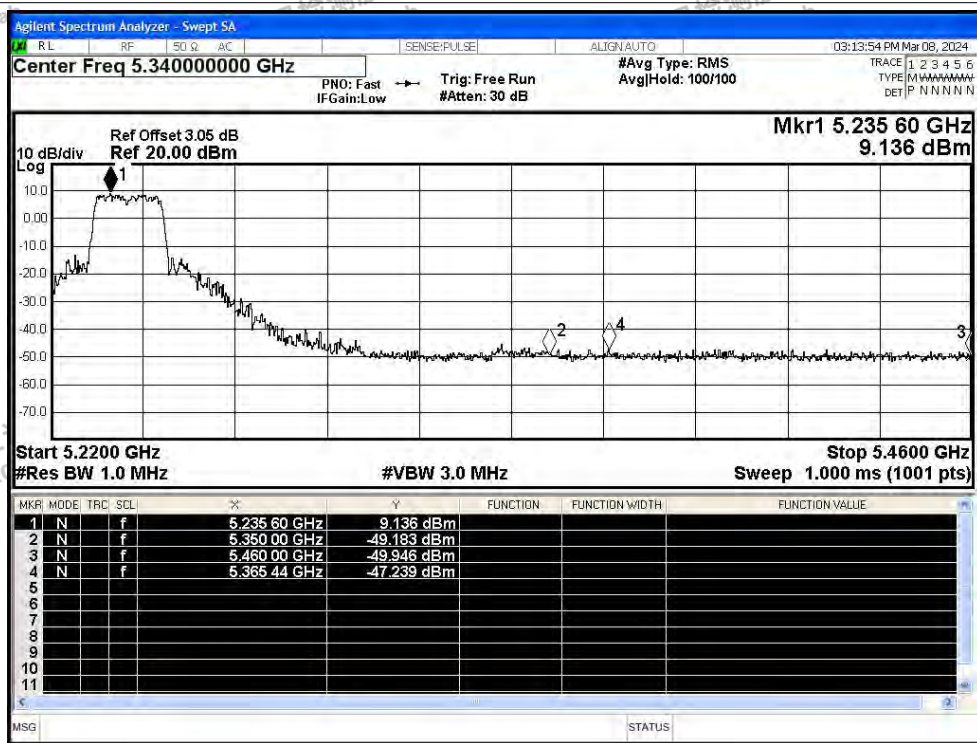


Restrict Band NVNT ac20 5240MH Average

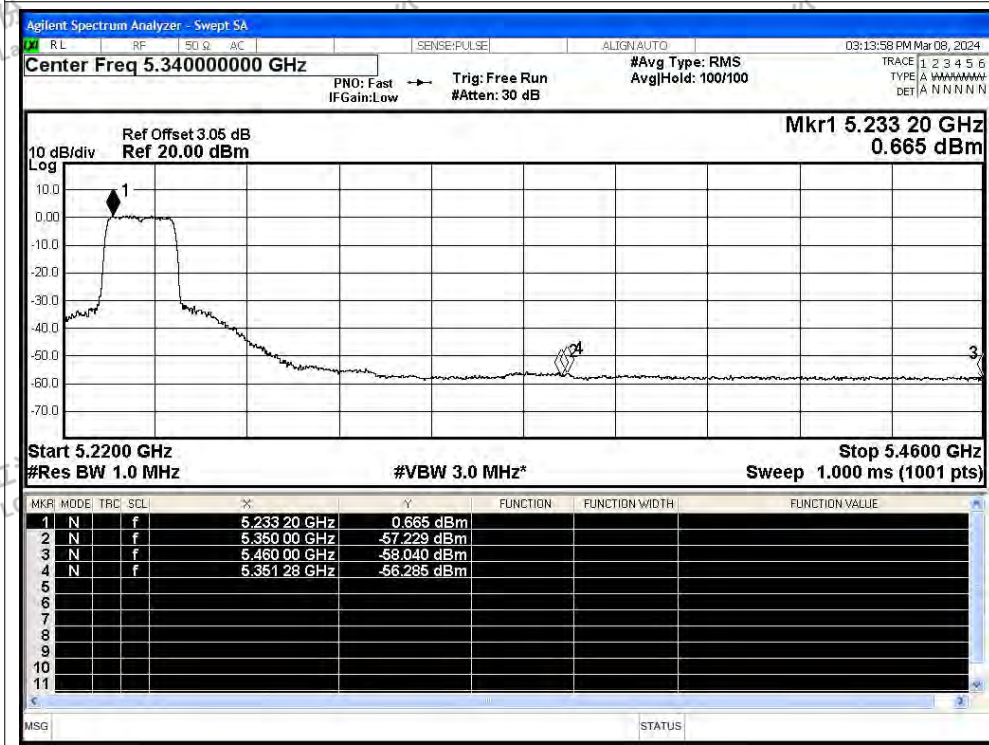




Restrict Band NVNT ac40 5190MHz Peak

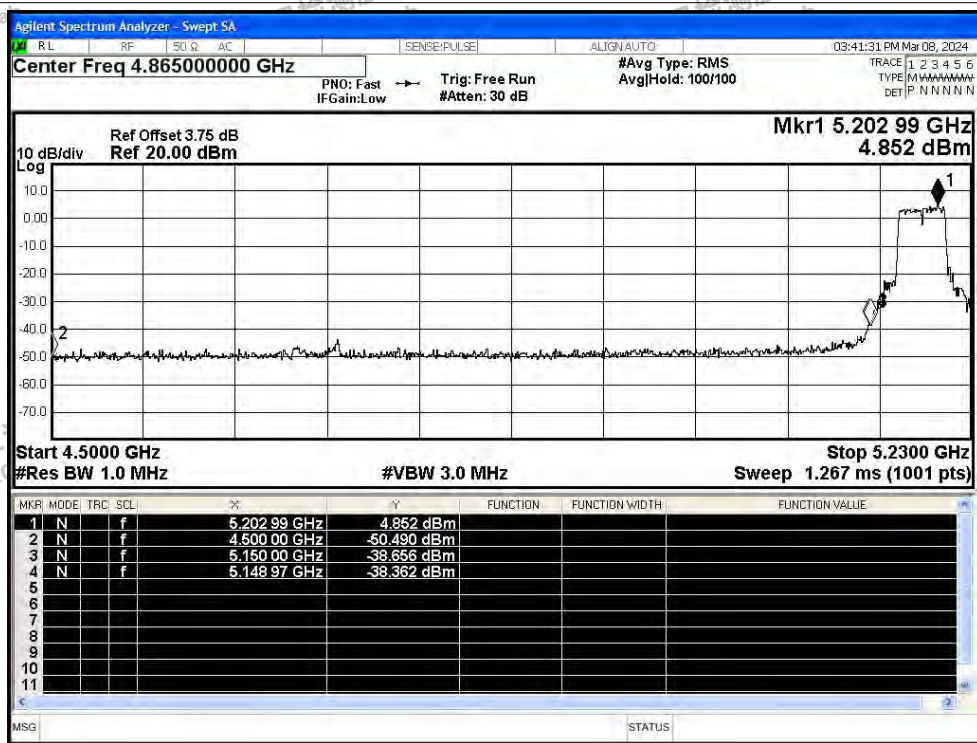


Restrict Band NVNT ac40 5190MHz Average

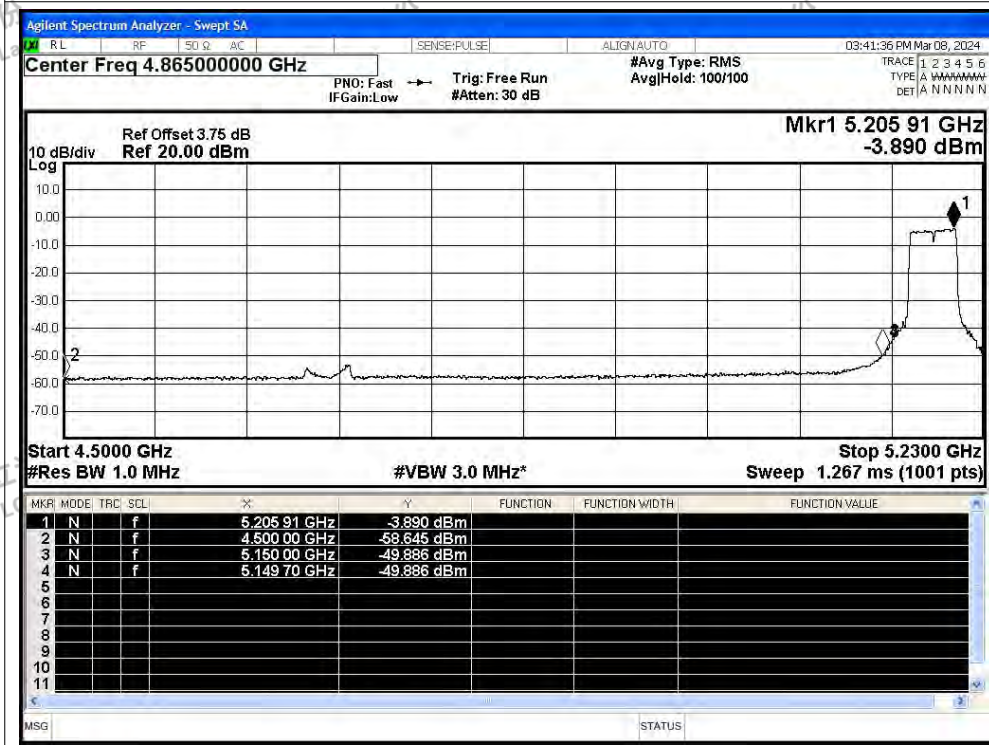




Restrict Band NVNT ac40 5230MHz Peak

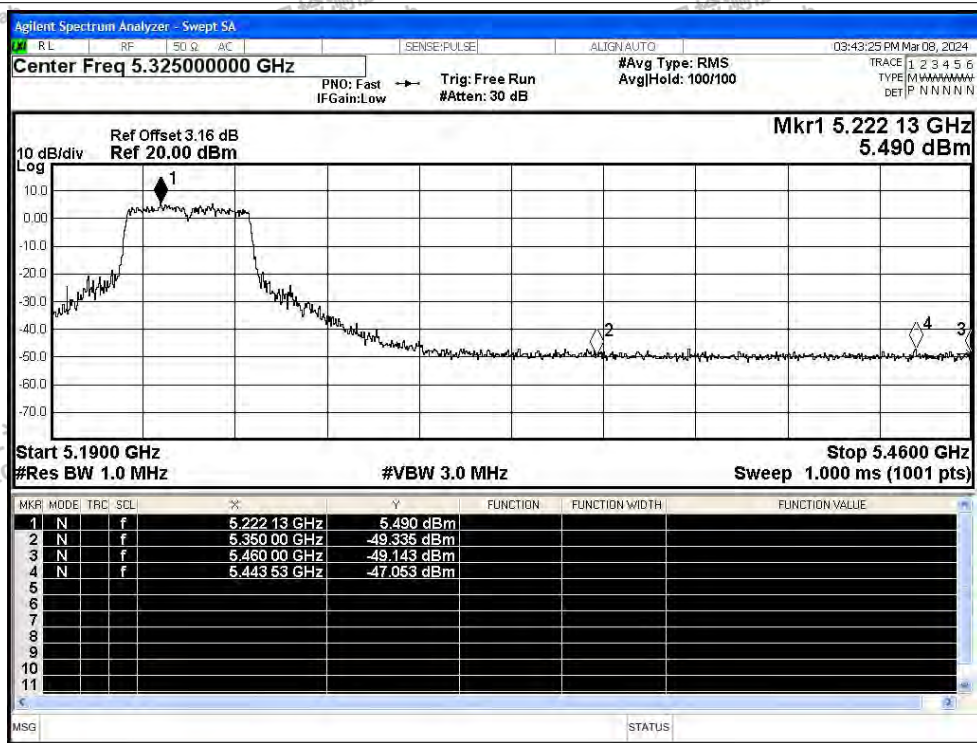


Restrict Band NVNT ac40 5230MHz Average

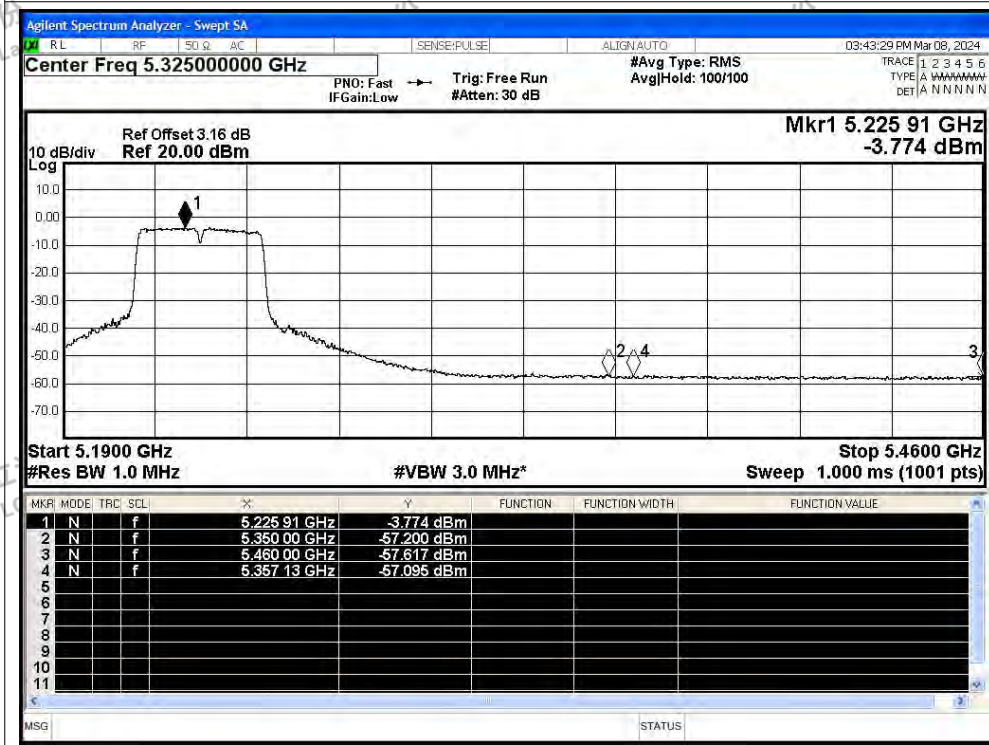




Restrict Band NVNT ac80 5210MHz Peak

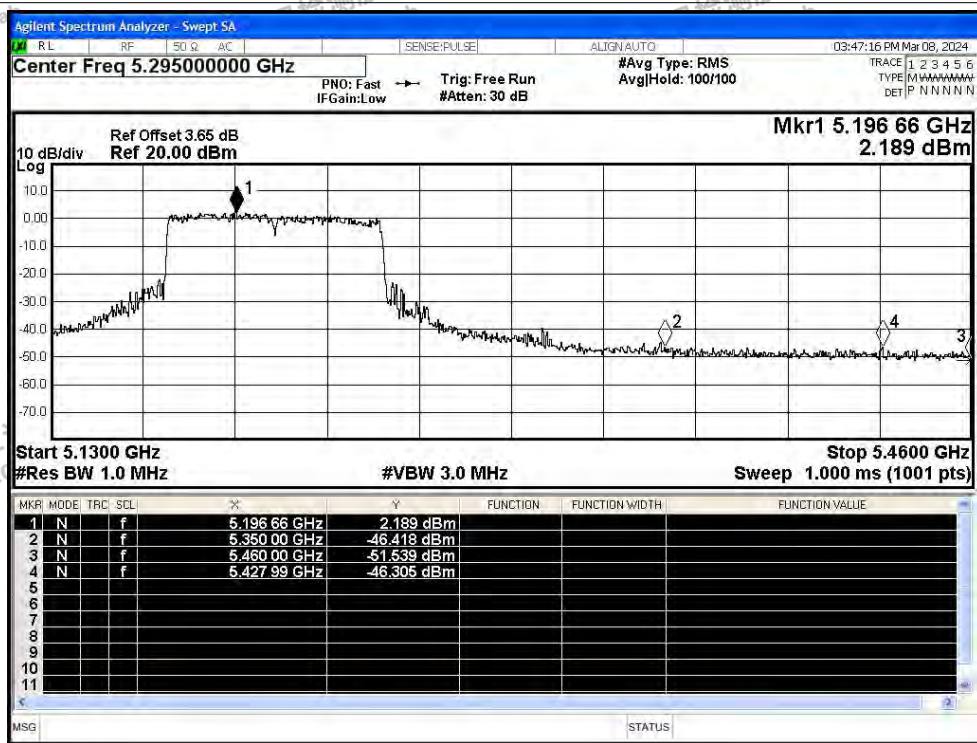


Restrict Band NVNT ac80 5210MHz Average

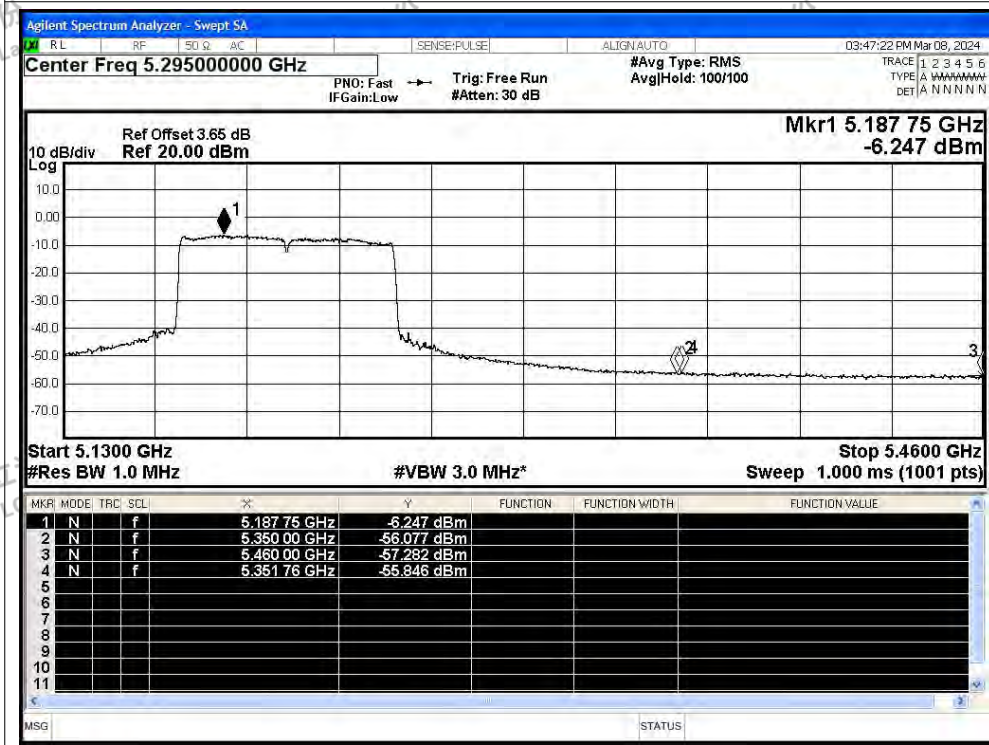






Restrict Band NVNT ac80 5210MHz Peak

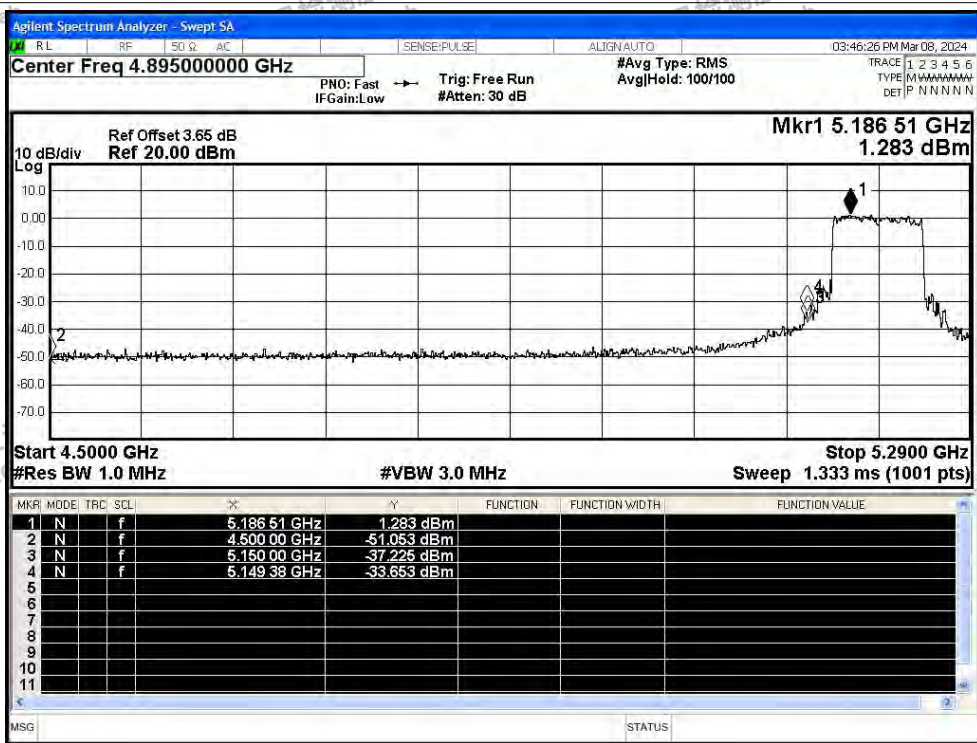

Restrict Band NVNT ac80 5210MHz Average

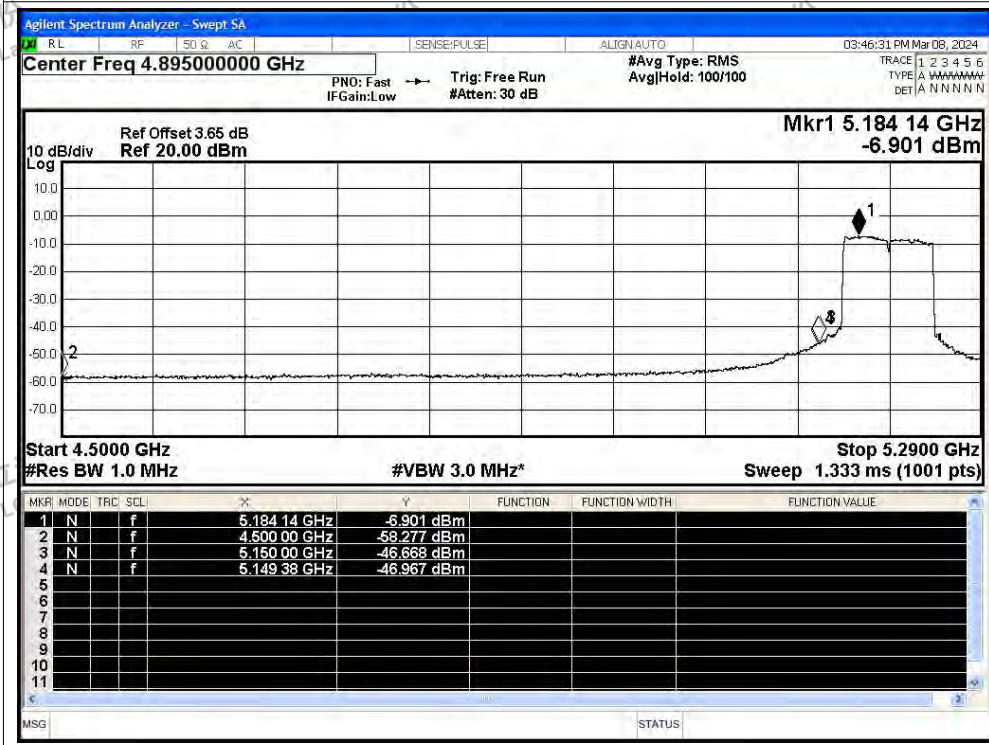



### D.5 Frequency Stability


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	ac20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
NVNT	ac20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
NVNT	ac20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
NVNT	ac40	5190	Ant1	5190	0	0	25	Pass
NVNT	ac40	5230	Ant1	5230	0	0	25	Pass
NVNT	ac80	5210	Ant1	5210	0	0	25	Pass






Test Graphs

Freq. Stability NVNT ac20 5180MHz Ant1

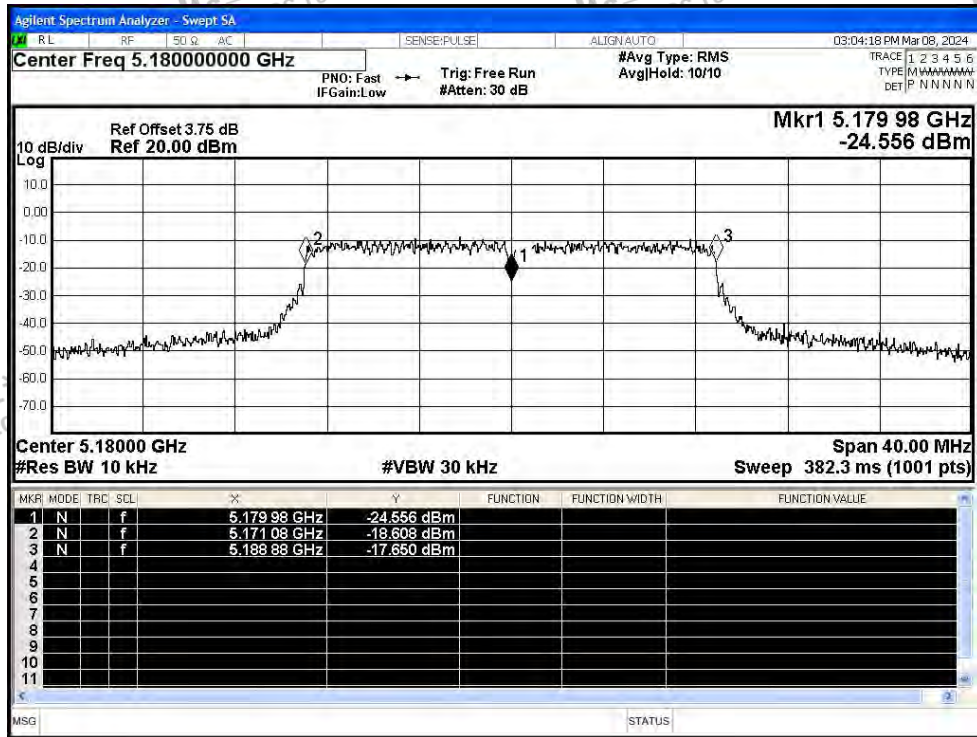


Freq. Stability NVNT ac20 5200MHz Ant1

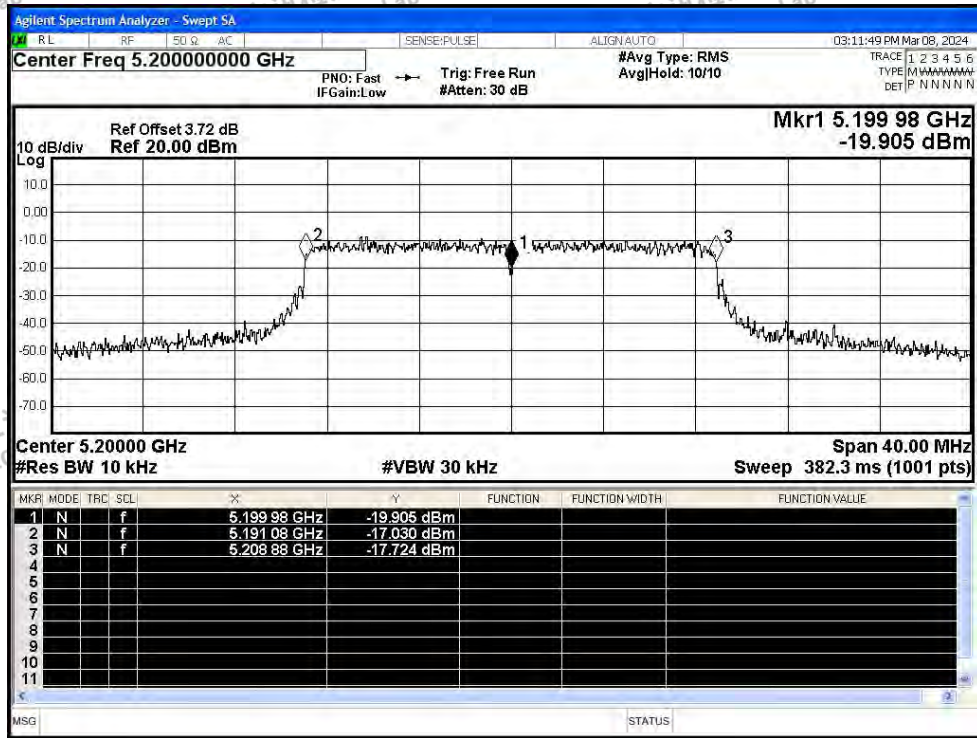




Freq. Stability NVNT ac20 5240MHz Ant1

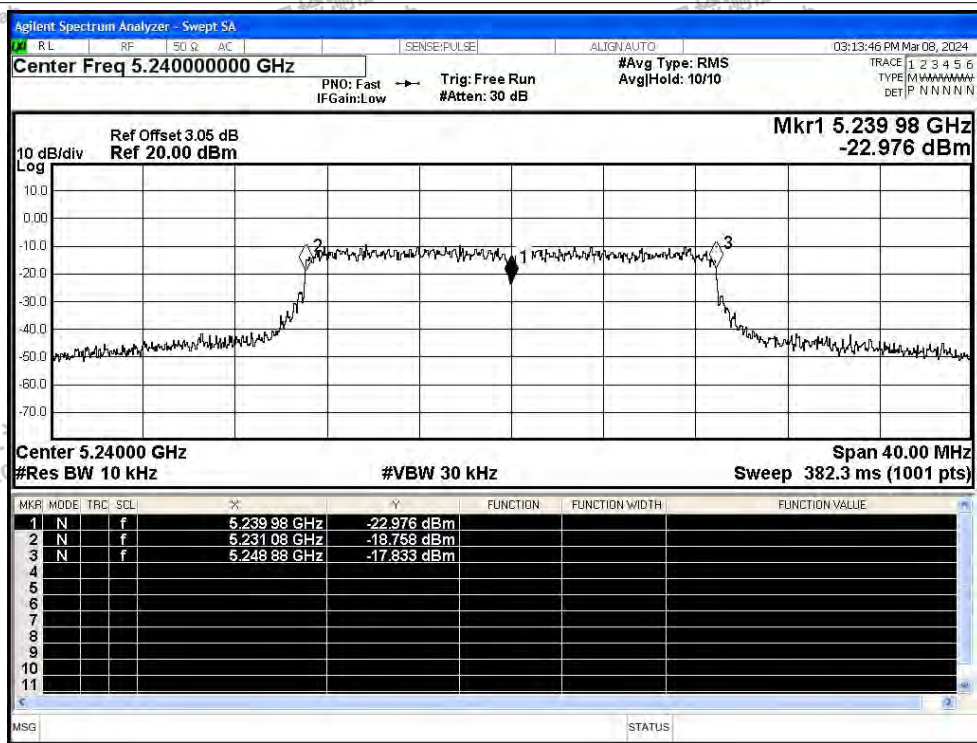


Freq. Stability NVNT ac40 5190MHz Ant1

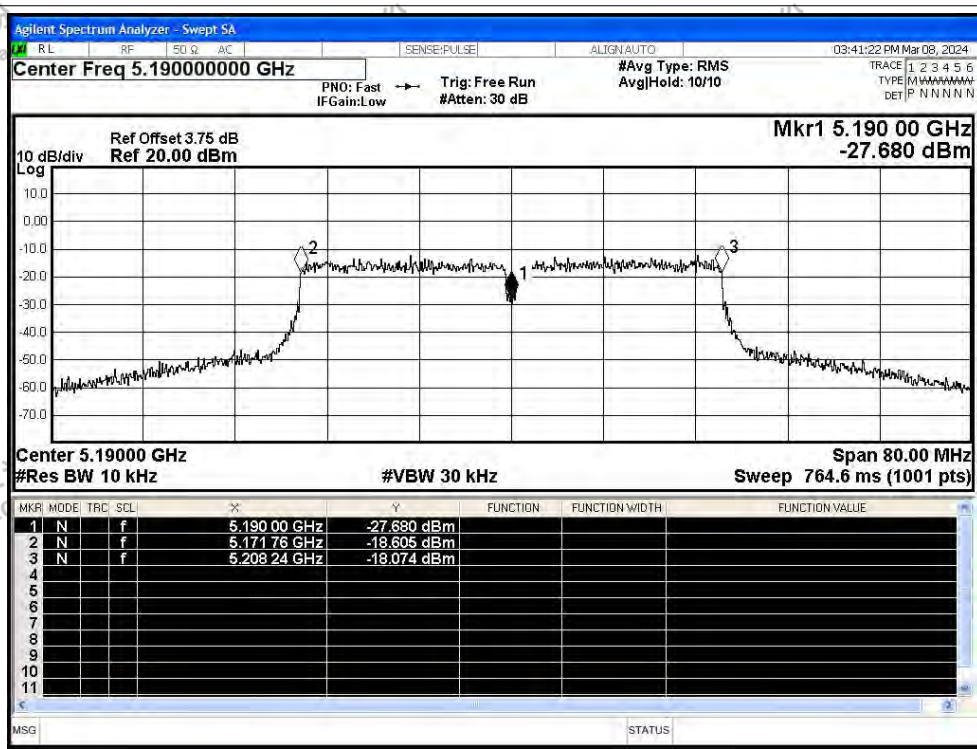




Freq. Stability NVNT ac40 5230MHz Ant1

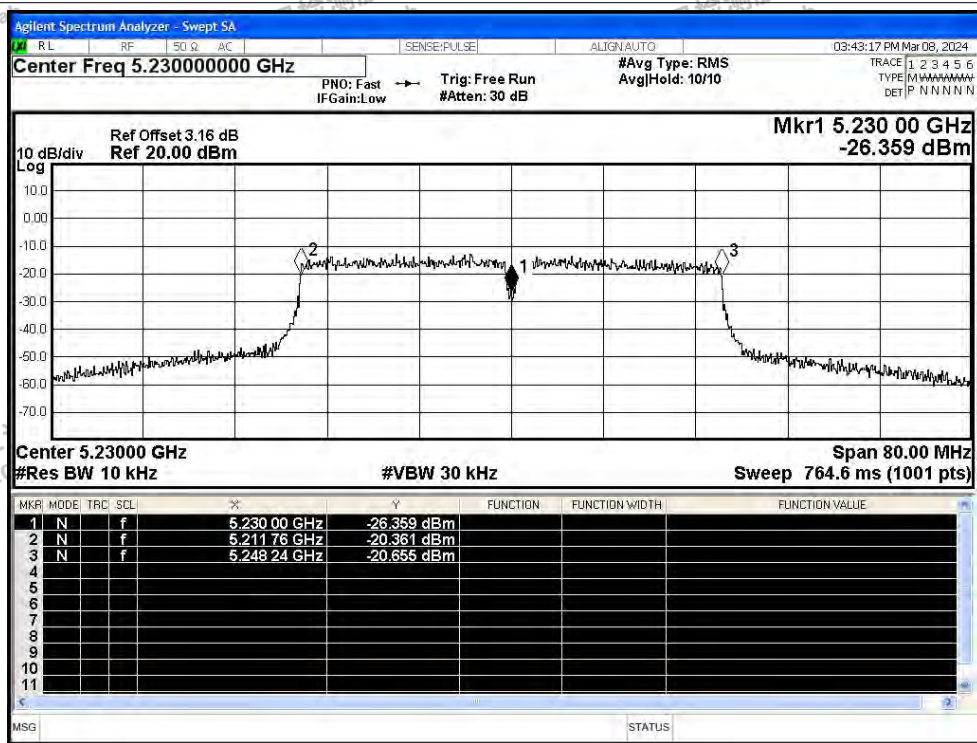

Freq. Stability NVNT ac80 5210MHz Ant1

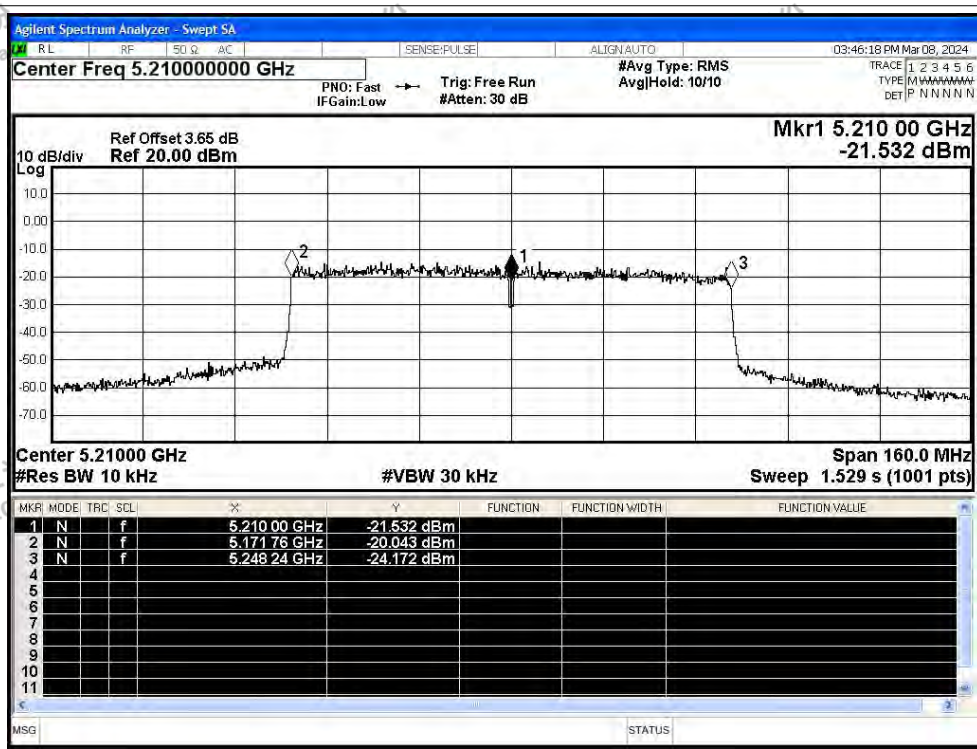




Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	ac20	5180	Ant2	5180	0	0	25	Pass
NVNT	ac20	5200	Ant2	5200	0	0	25	Pass
NVNT	ac20	5240	Ant2	5240	0	0	25	Pass
NVNT	ac40	5190	Ant2	5190	0	0	25	Pass
NVNT	ac40	5230	Ant2	5230	0	0	25	Pass
NVNT	ac80	5210	Ant2	5210	0	0	25	Pass






Test Graphs

Freq. Stability NVNT ac20 5180MHz Ant2

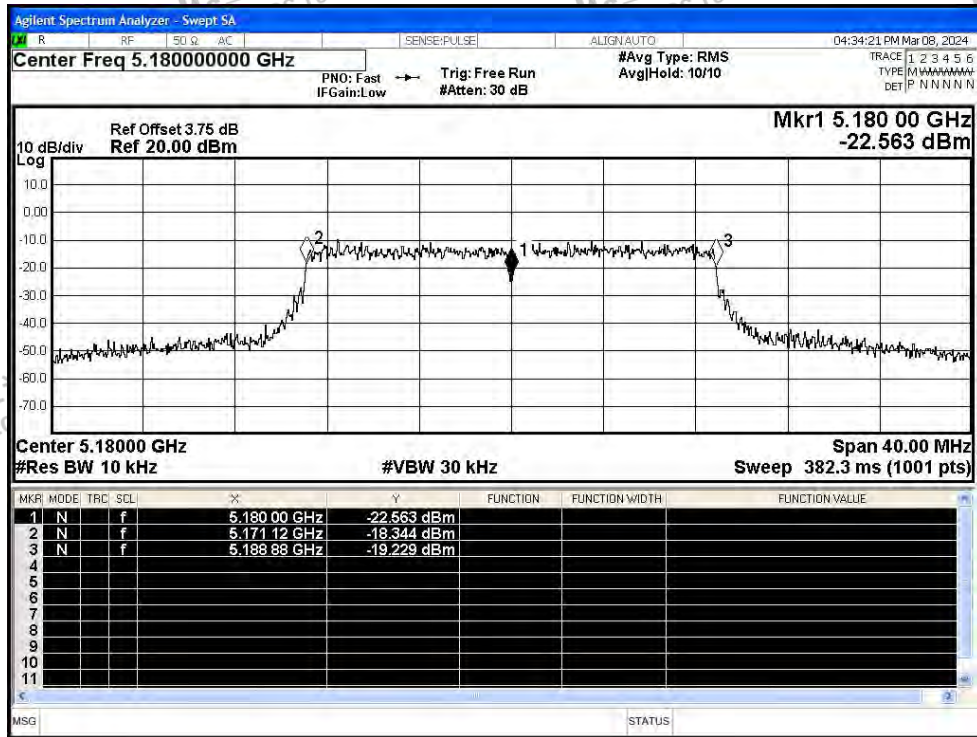


Freq. Stability NVNT ac20 5200MHz Ant2

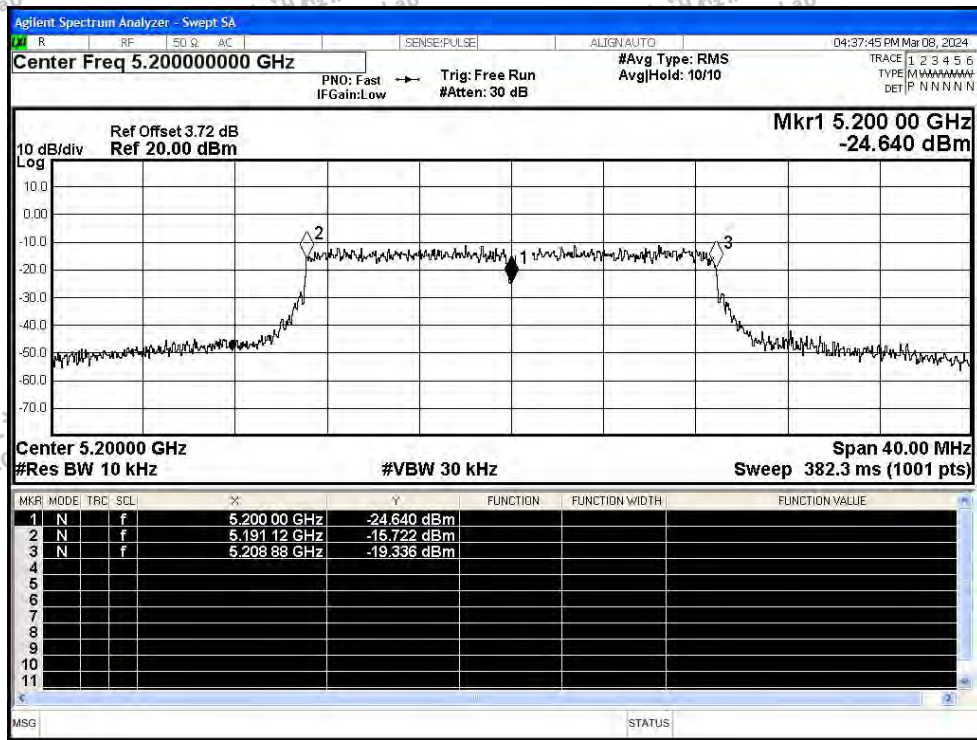




Freq. Stability NVNT ac20 5240MHz Ant2

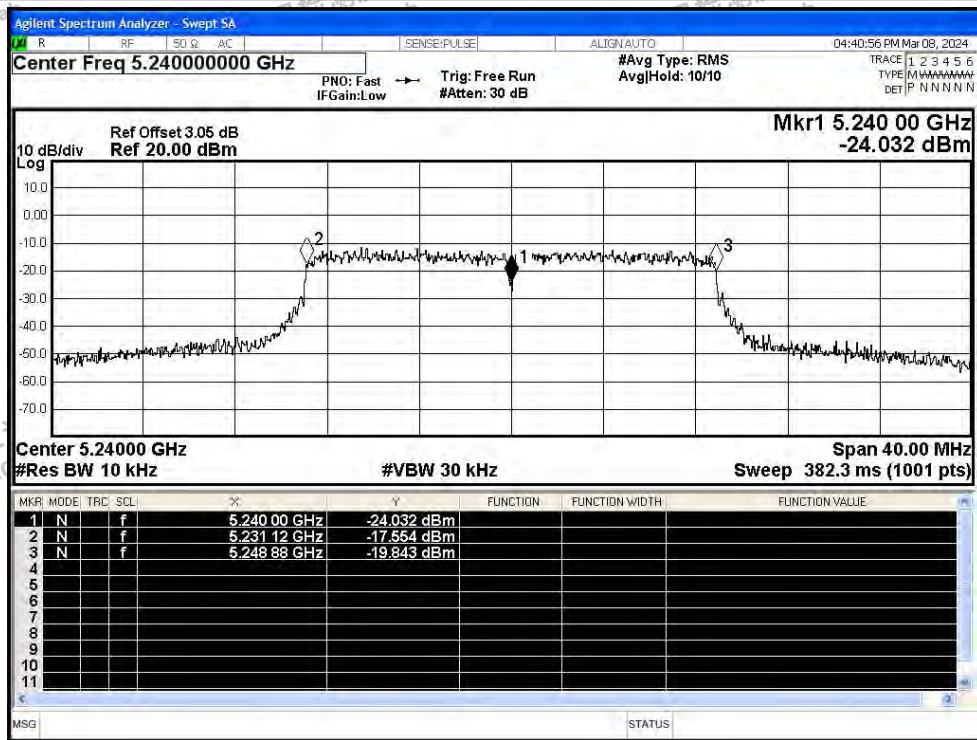


Freq. Stability NVNT ac40 5190MHz Ant2

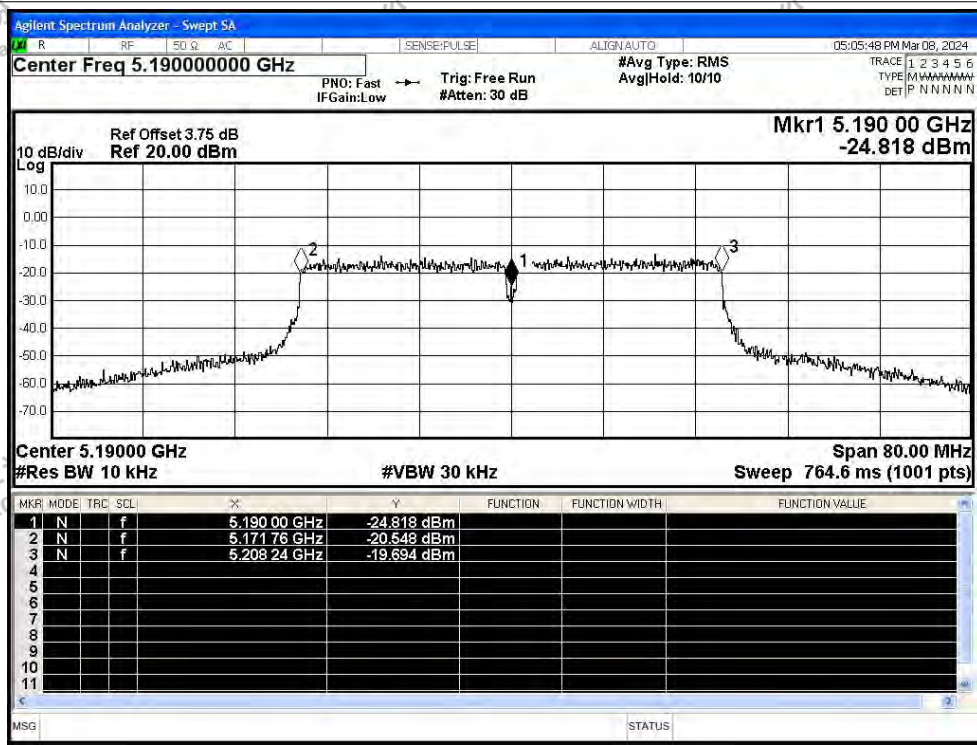






Freq. Stability NVNT ac40 5230MHz Ant2

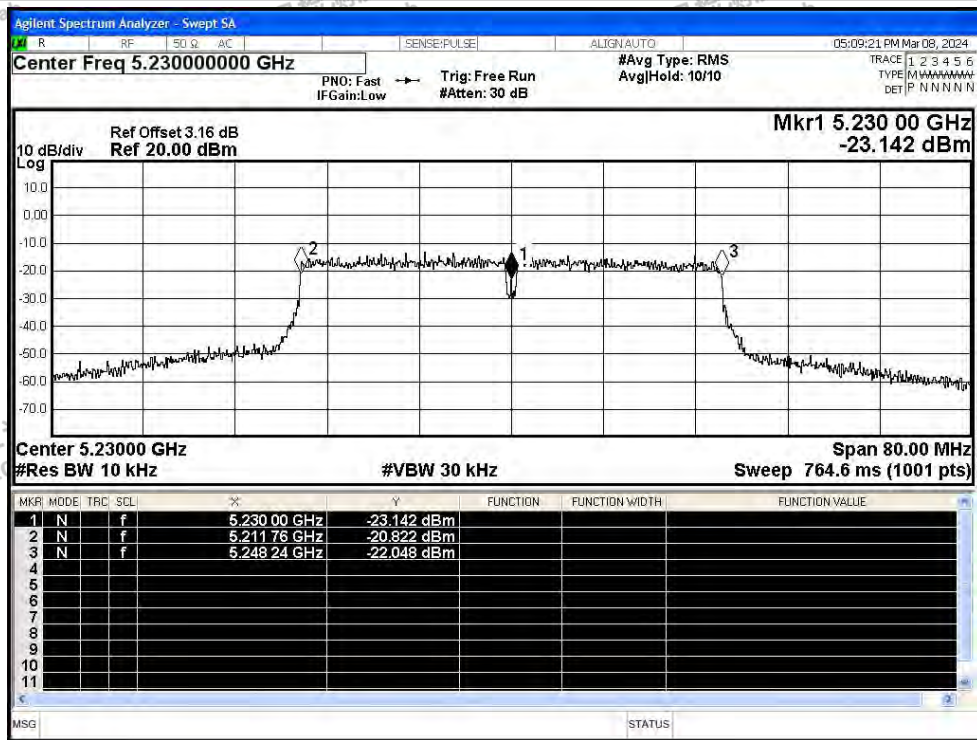

Freq. Stability NVNT ac80 5210MHz Ant2

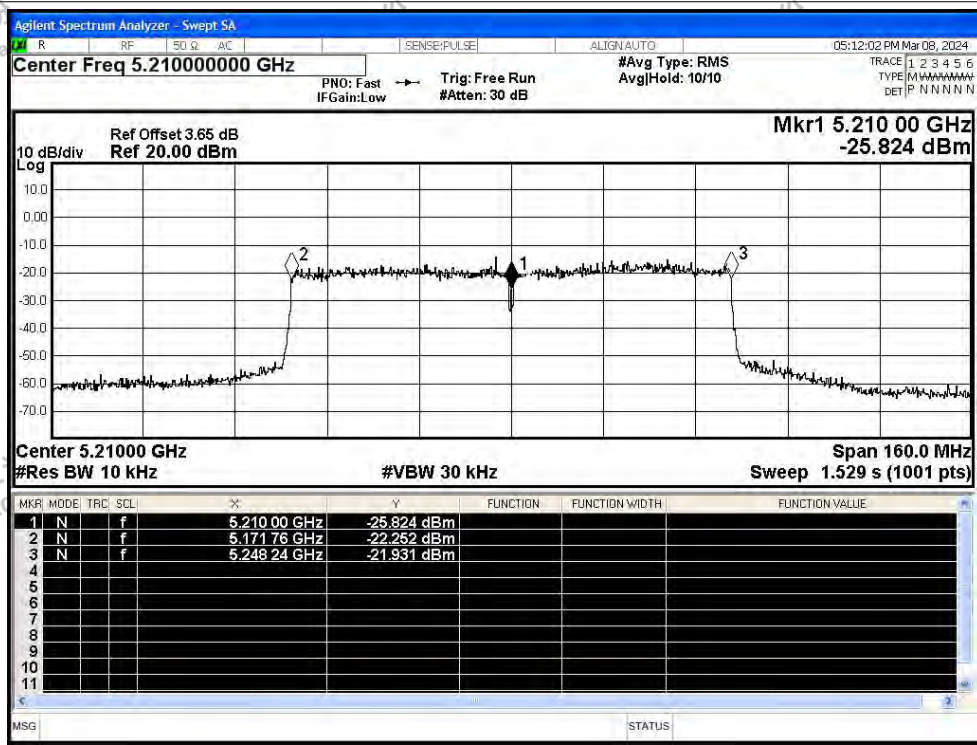



### D.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	97.72	0.1	0.37
NVNT	a	5200	Ant1	97.75	0.1	0.37
NVNT	a	5240	Ant1	97.75	0.1	0.37
NVNT	n20	5180	Ant1	96.7	0.15	0.55
NVNT	n20	5200	Ant1	96.65	0.15	0.55
NVNT	n20	5240	Ant1	96.65	0.15	0.55
NVNT	n40	5190	Ant1	93.53	0.29	1.11
NVNT	n40	5230	Ant1	93.43	0.3	1.12
NVNT	ac20	5180	Ant1	96.67	0.15	0.55
NVNT	ac20	5200	Ant1	96.66	0.15	0.55
NVNT	ac20	5240	Ant1	96.66	0.15	0.55
NVNT	ac40	5190	Ant1	93.56	0.29	1.11
NVNT	ac40	5230	Ant1	93.56	0.29	1.11
NVNT	ac80	5210	Ant1	87.65	0.57	2.27






Test Graphs

Duty Cycle NVNT a 5180MHz Ant1

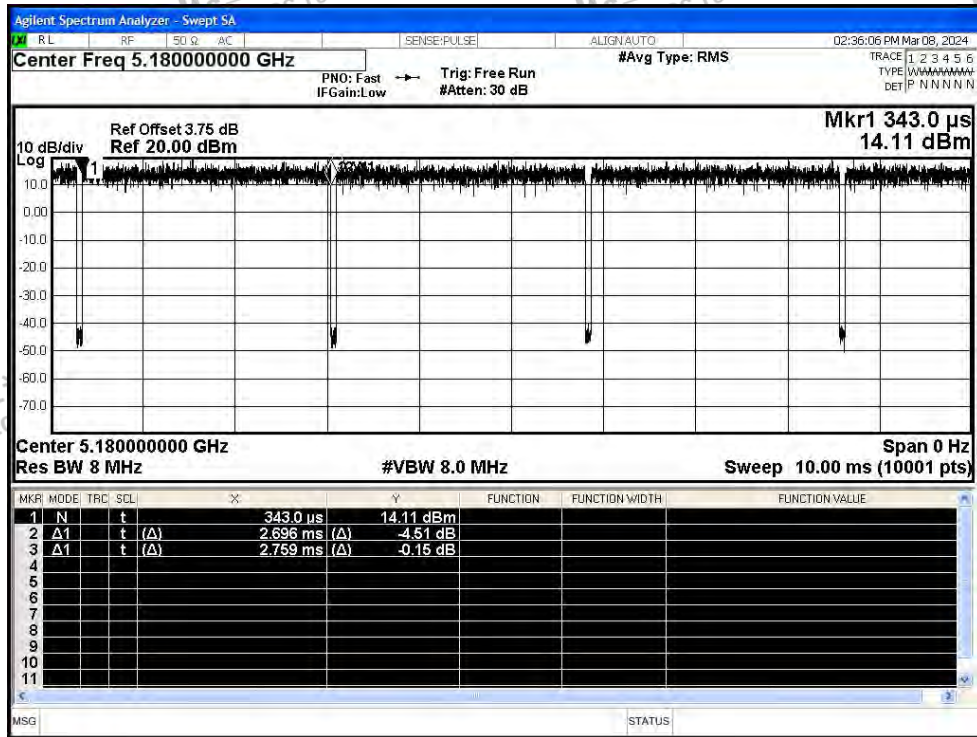


Duty Cycle NVNT a 5200MHz Ant1

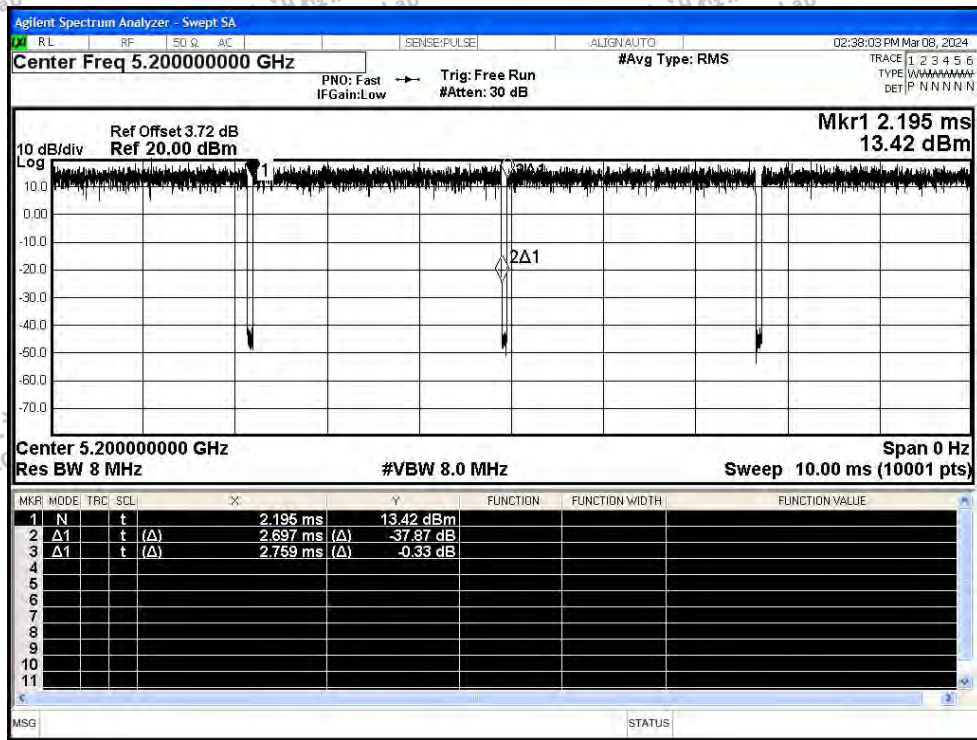




Duty Cycle NVNT a 5240MHz Ant1

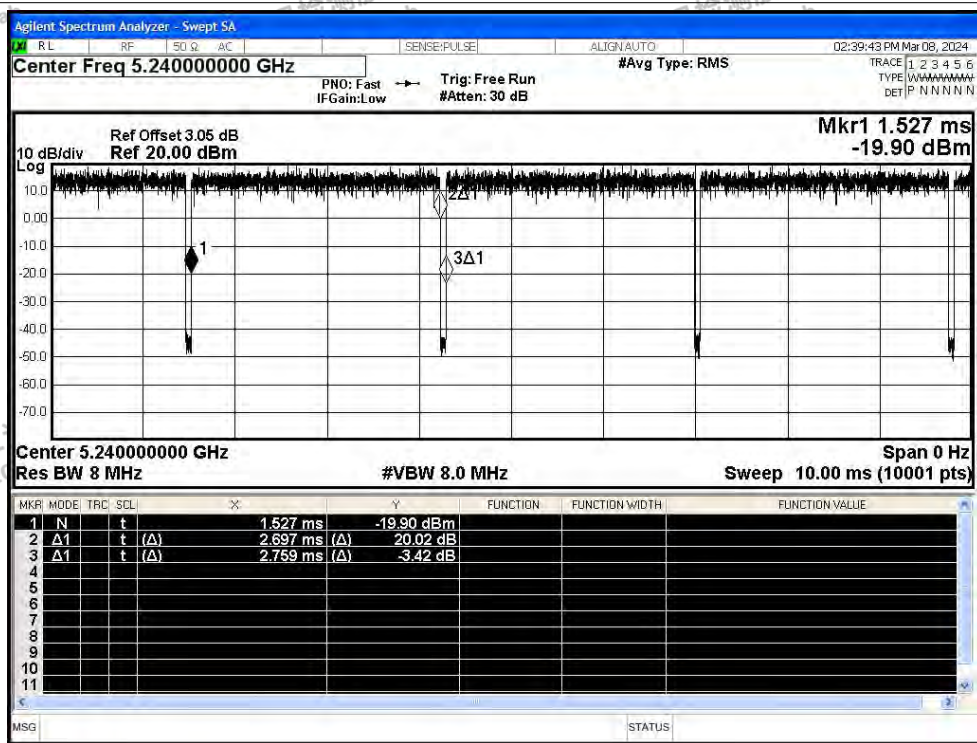


Duty Cycle NVNT n20 5180MHz Ant1

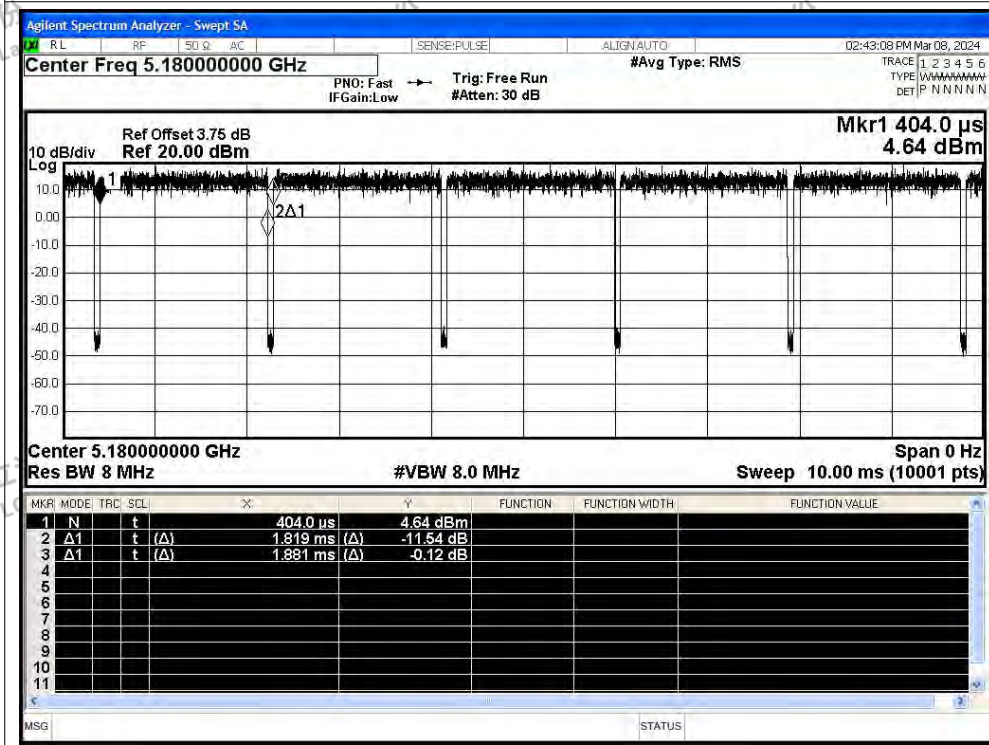




Duty Cycle NVNT n20 5200MHz Ant1

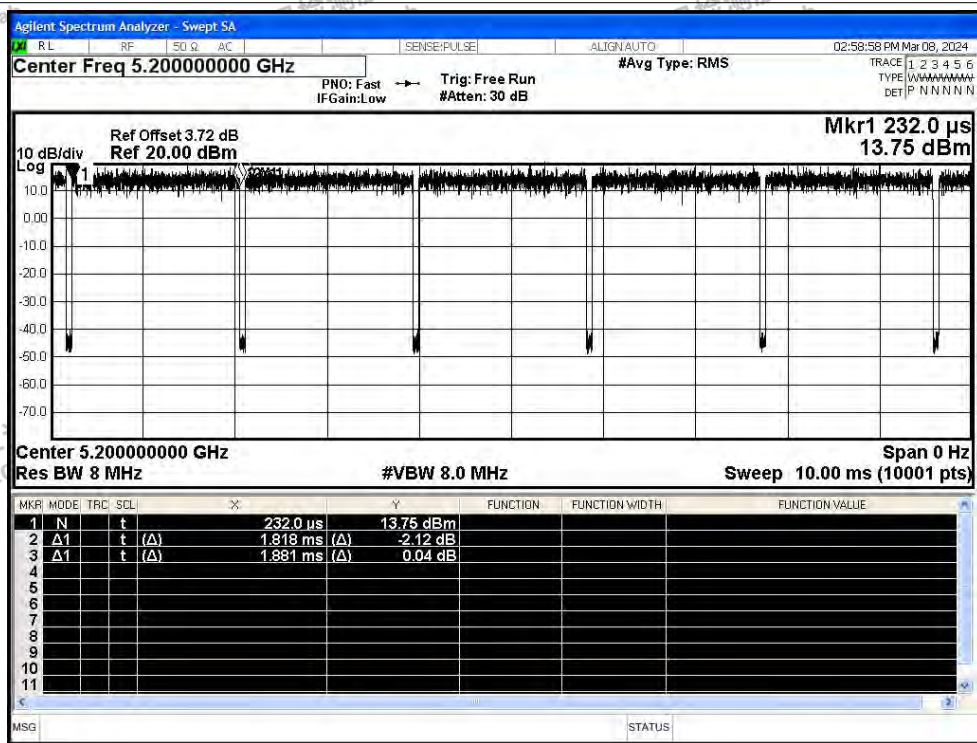


Duty Cycle NVNT n20 5240MHz Ant1

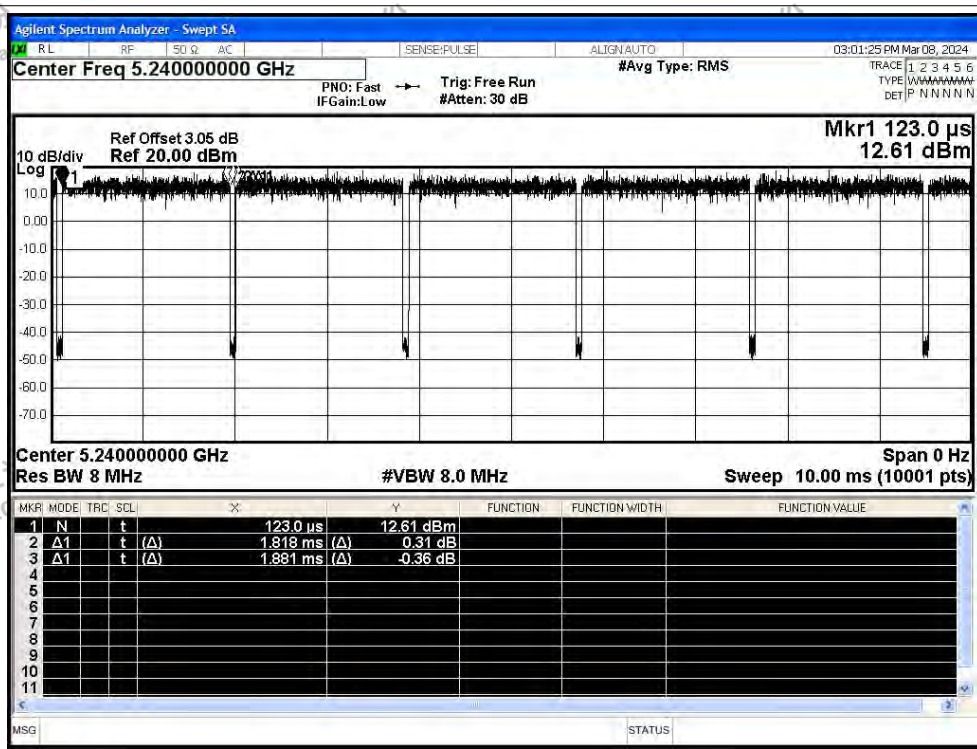




Duty Cycle NVNT n40 5190MHz Ant1

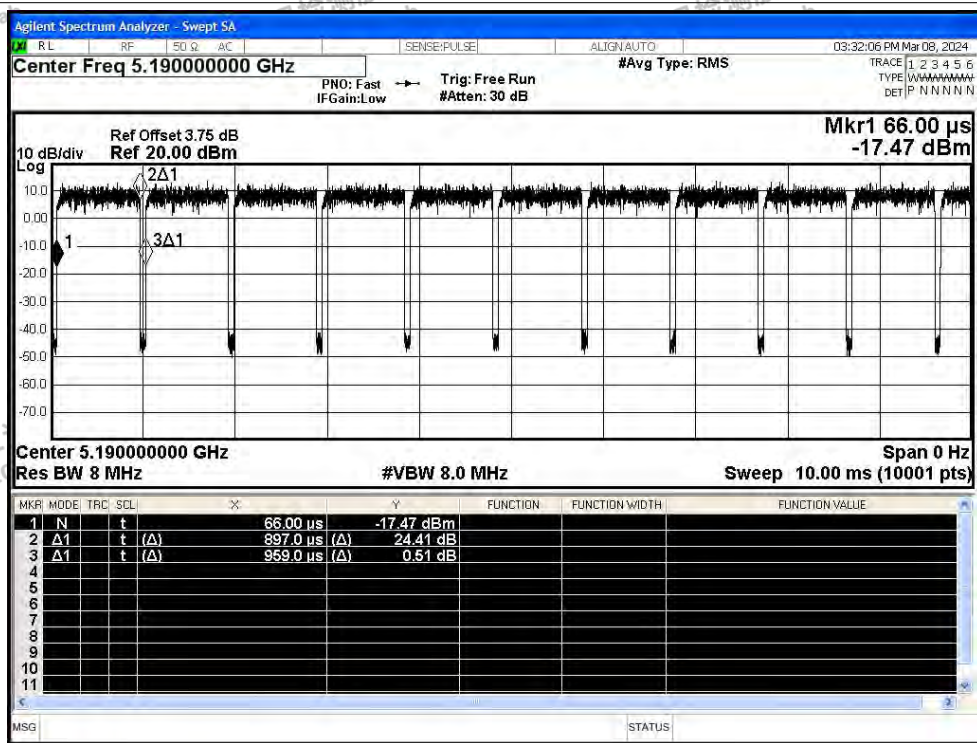


Duty Cycle NVNT n40 5230MHz Ant1

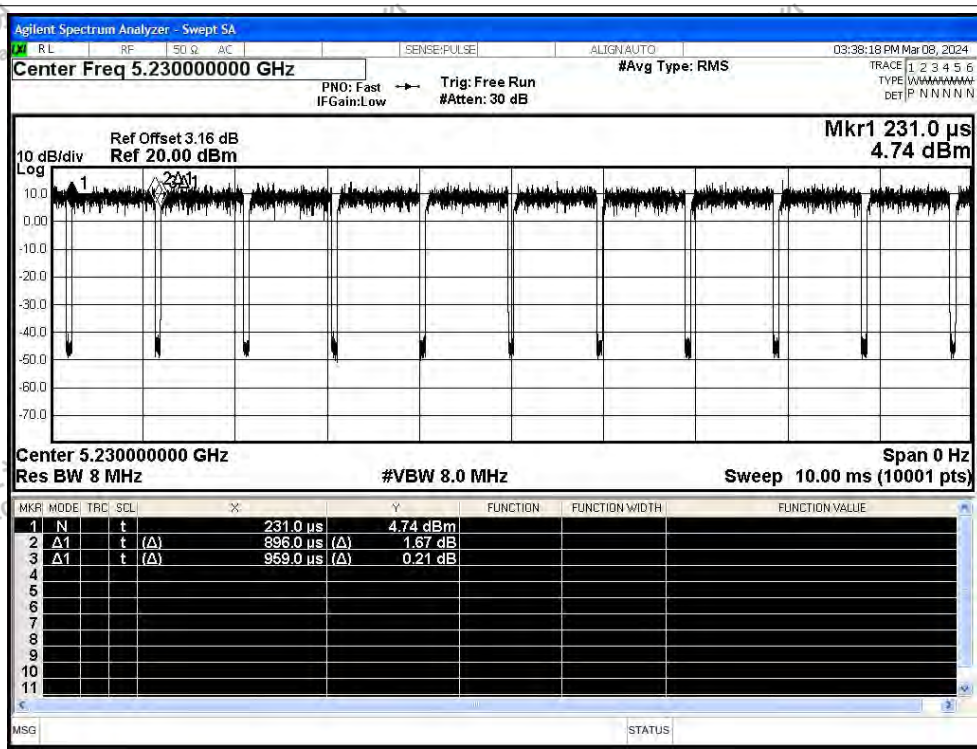




Duty Cycle NVNT ac20 5180MHz Ant1

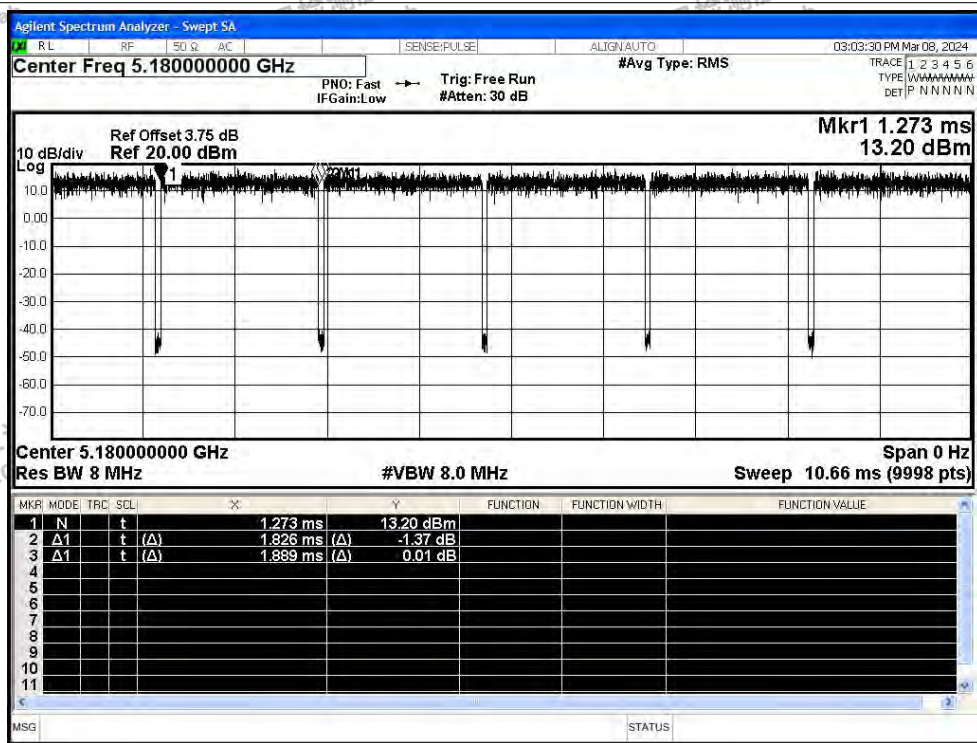


Duty Cycle NVNT ac20 5200MHz Ant1

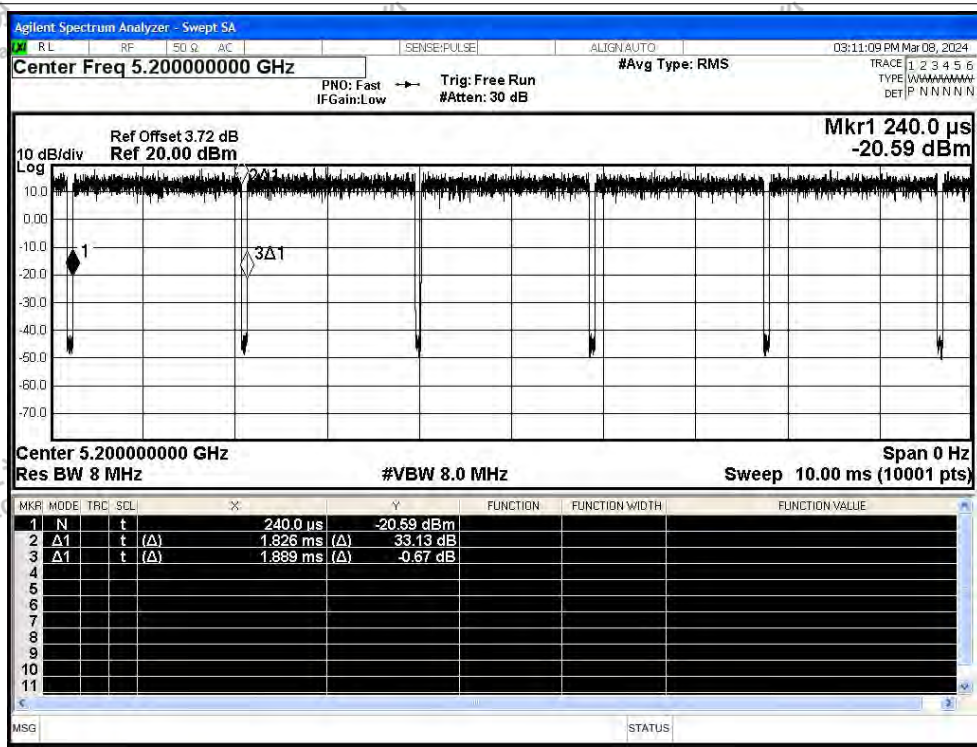




Duty Cycle NVNT ac20 5240MHz Ant1

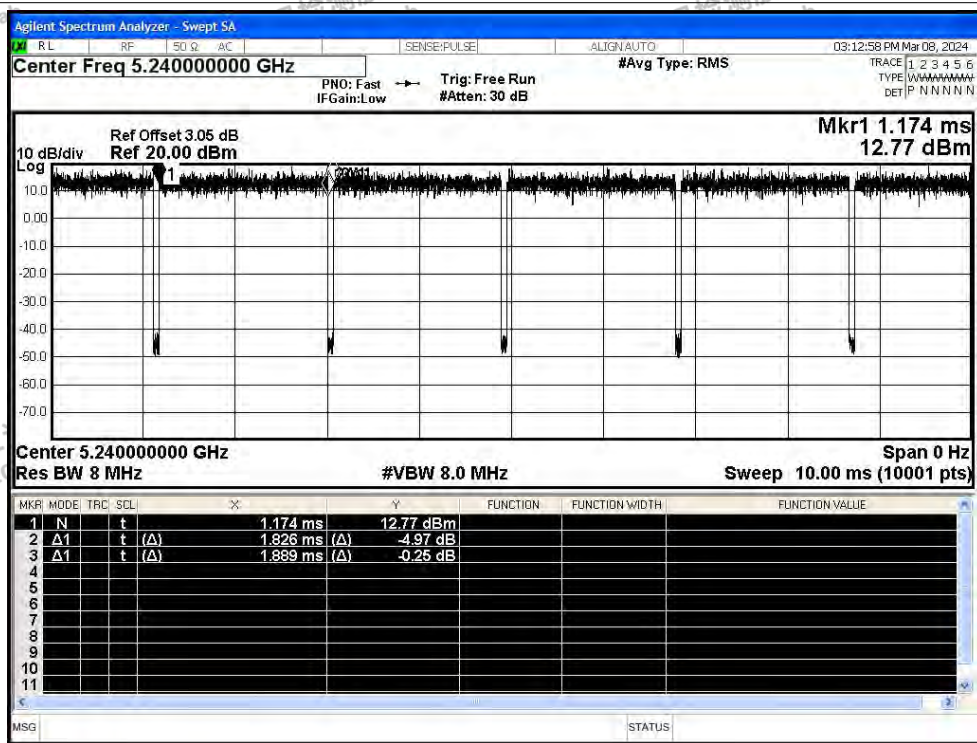


Duty Cycle NVNT ac40 5190MHz Ant1

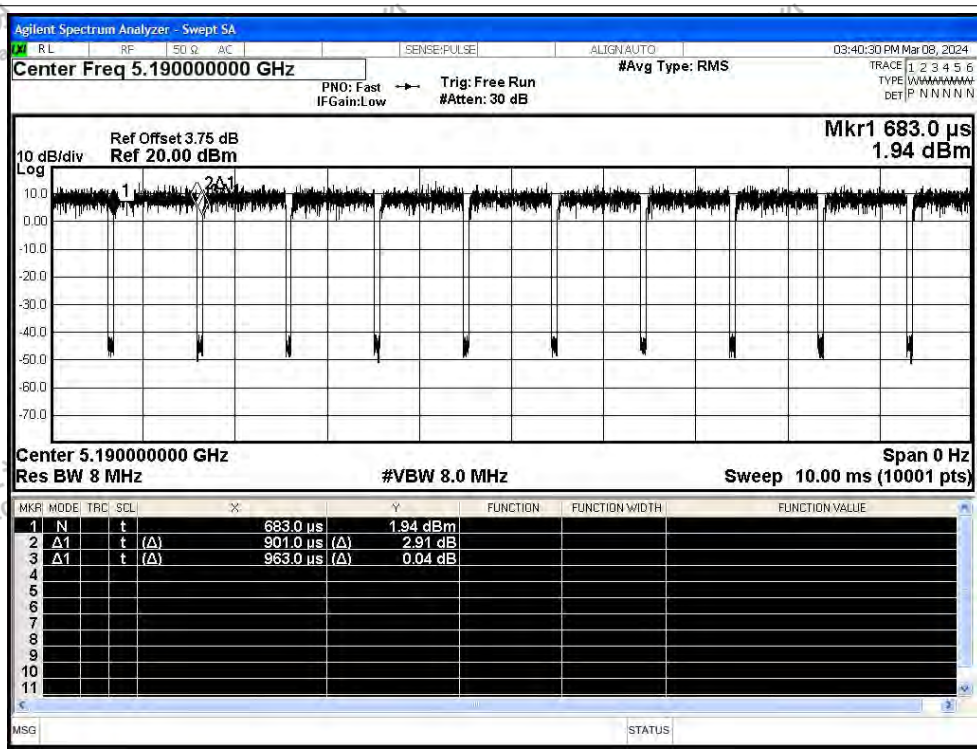






Duty Cycle NVNT ac40 5230MHz Ant1

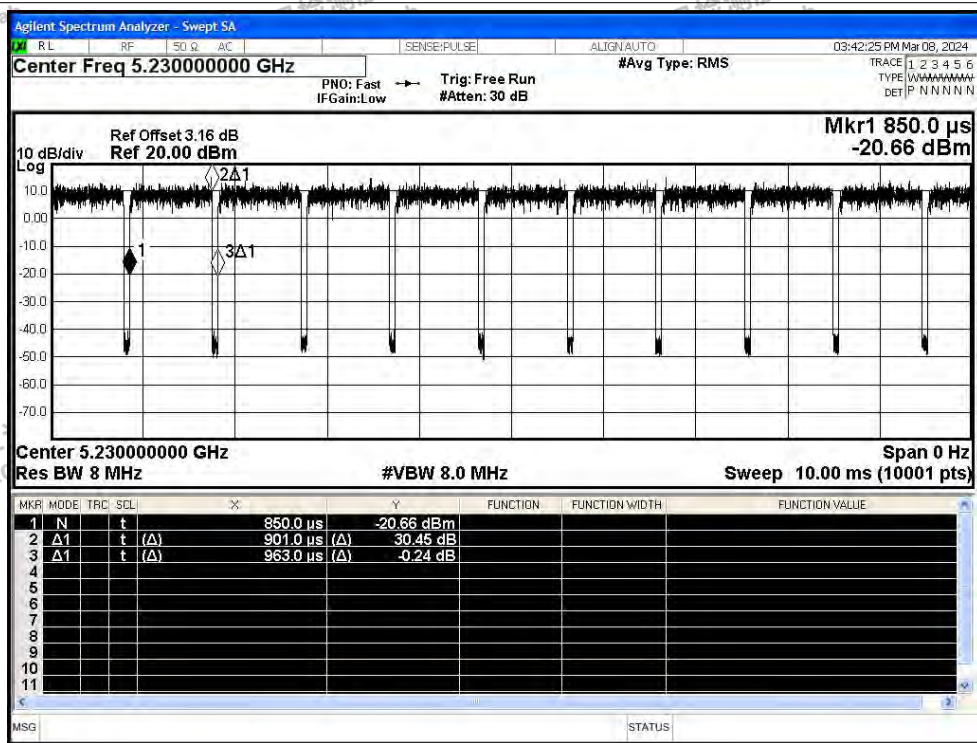

Duty Cycle NVNT ac80 5210MHz Ant1

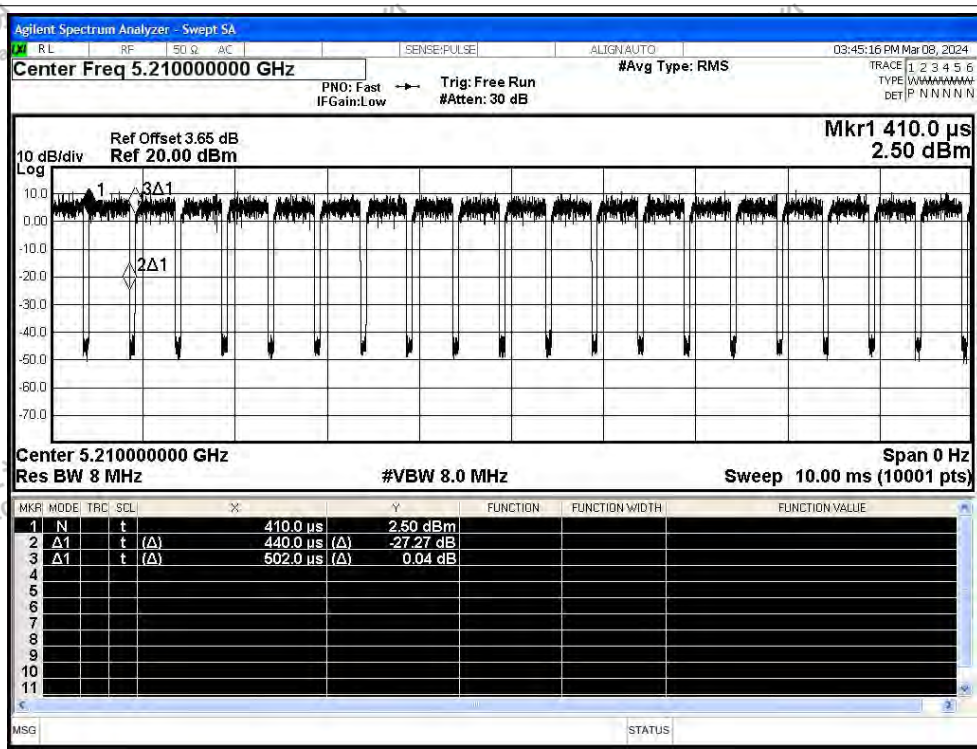



Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant2	97.17	0.12	0.46
NVNT	a	5200	Ant2	97.17	0.12	0.46
NVNT	a	5240	Ant2	97.17	0.12	0.46
NVNT	n20	5180	Ant2	96.65	0.15	0.55
NVNT	n20	5200	Ant2	96.7	0.15	0.55
NVNT	n20	5240	Ant2	96.65	0.15	0.55
NVNT	n40	5190	Ant2	93.56	0.29	1.11
NVNT	n40	5230	Ant2	93.46	0.29	1.11
NVNT	ac20	5180	Ant2	96.67	0.15	0.55
NVNT	ac20	5200	Ant2	96.66	0.15	0.55
NVNT	ac20	5240	Ant2	96.66	0.15	0.55
NVNT	ac40	5190	Ant2	93.46	0.29	1.11
NVNT	ac40	5230	Ant2	93.56	0.29	1.11
NVNT	ac80	5210	Ant2	87.65	0.57	2.27




Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,  
 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity




Test Graphs

Duty Cycle NVNT a 5180MHz Ant2

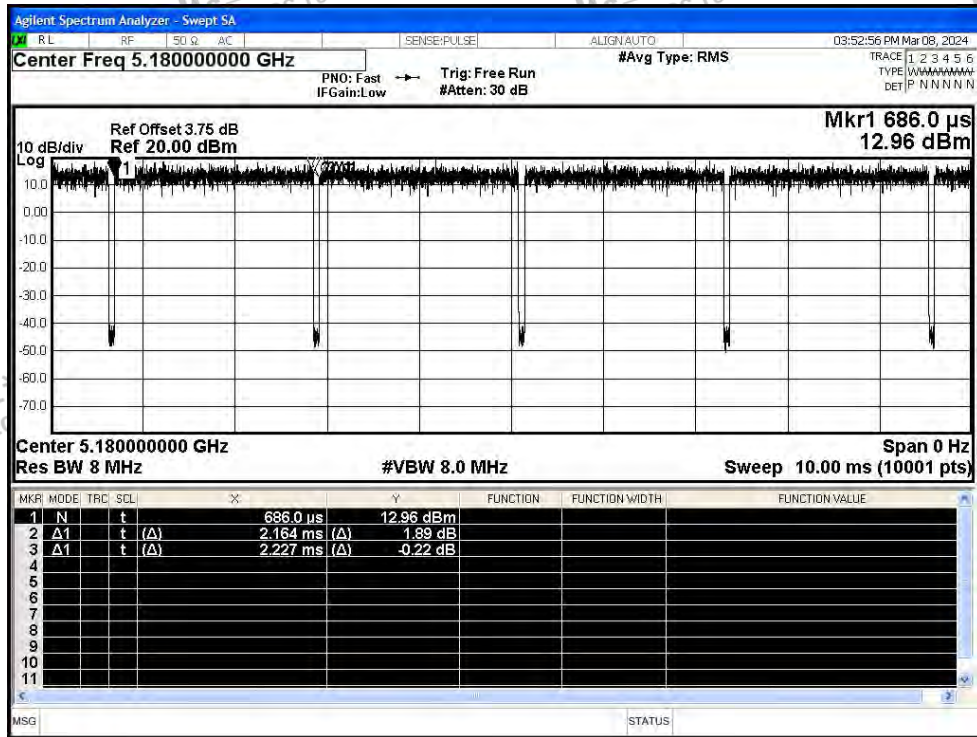


Duty Cycle NVNT a 5200MHz Ant2

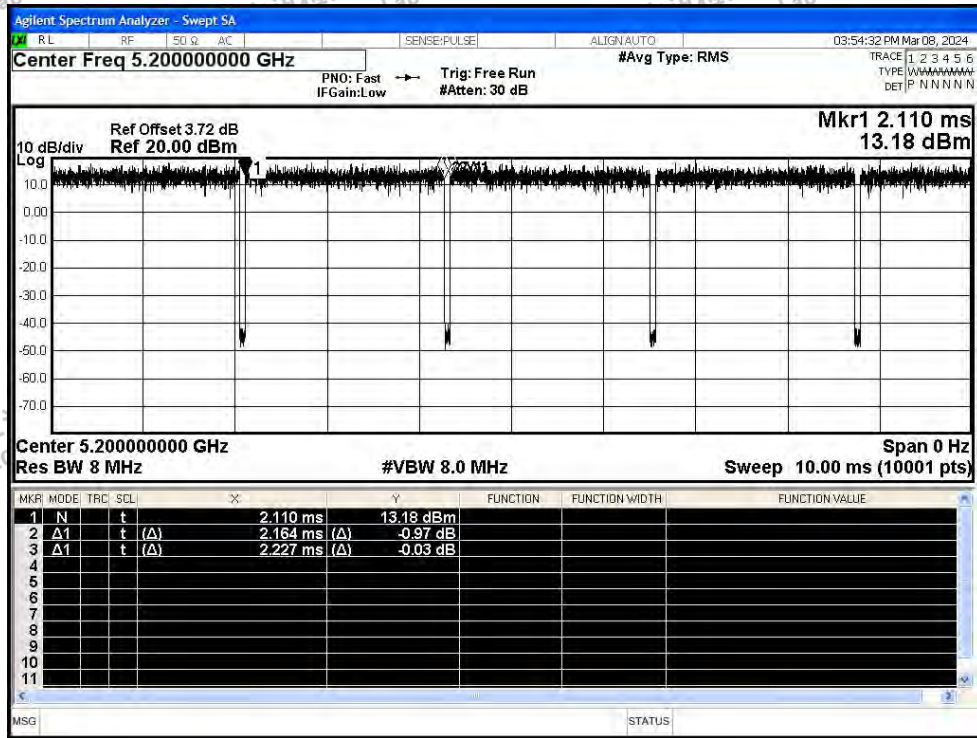




Duty Cycle NVNT a 5240MHz Ant2

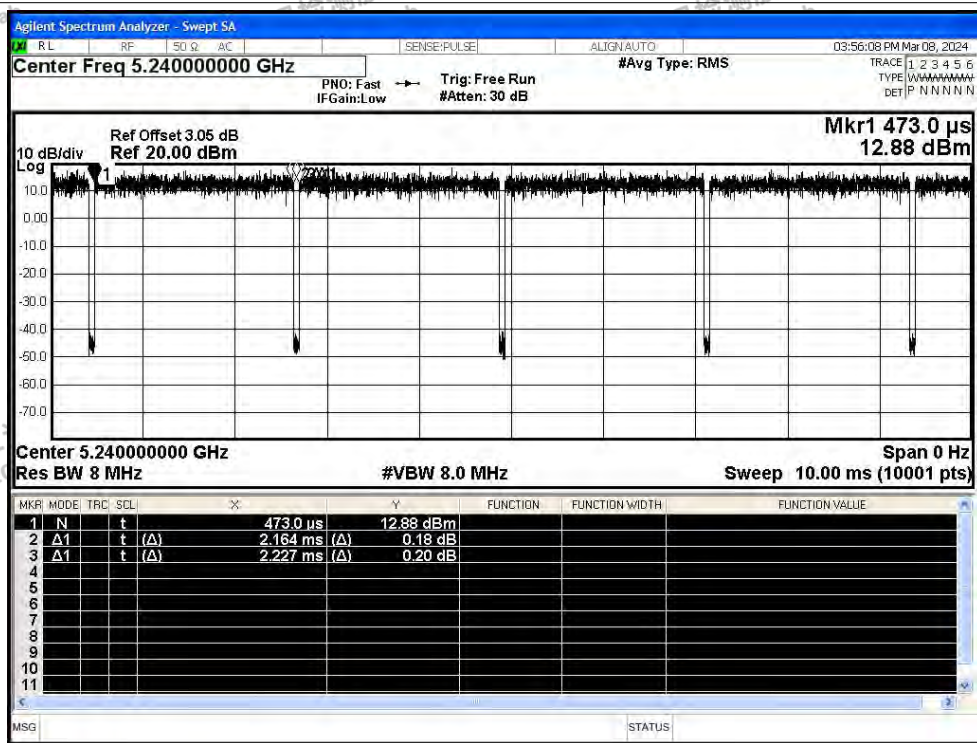


Duty Cycle NVNT n20 5180MHz Ant2

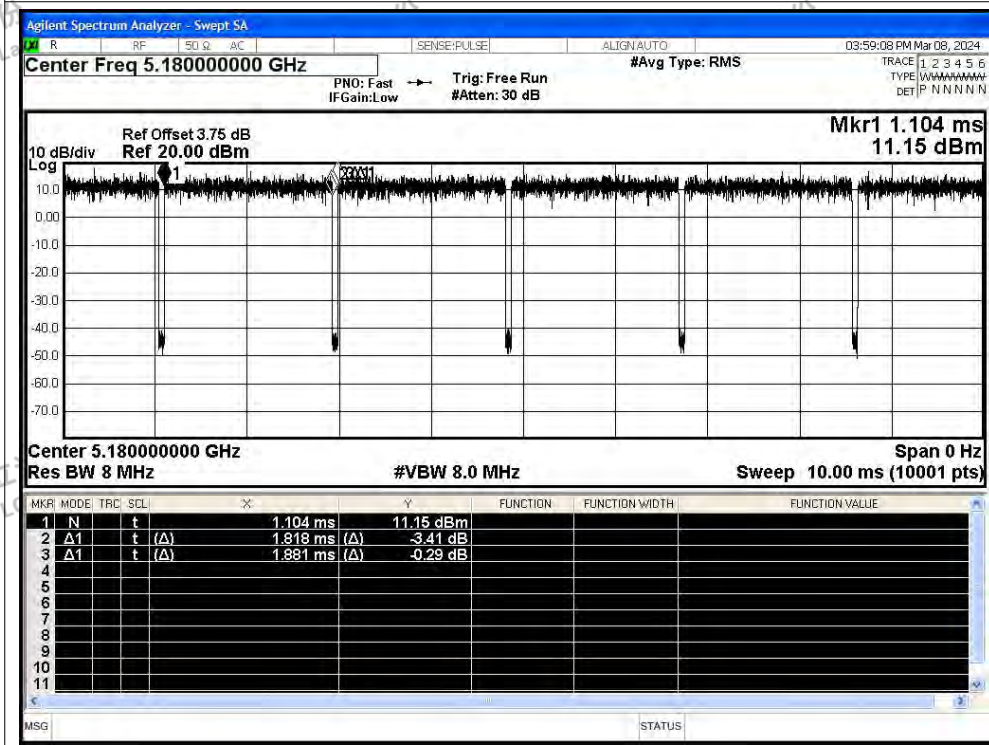




Duty Cycle NVNT n20 5200MHz Ant2

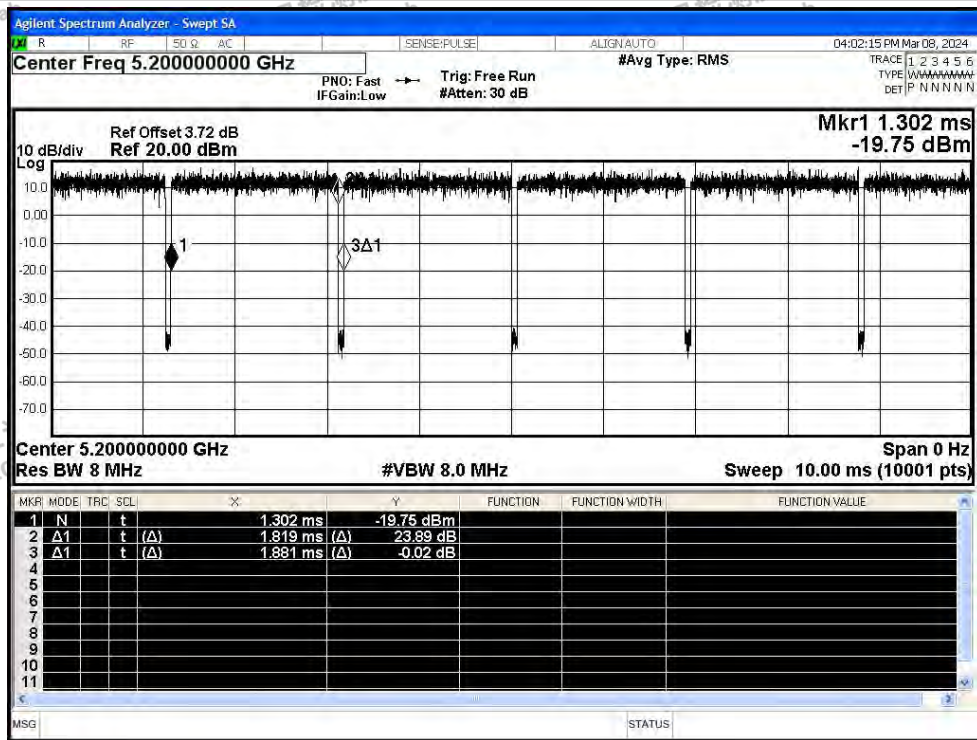


Duty Cycle NVNT n20 5240MHz Ant2

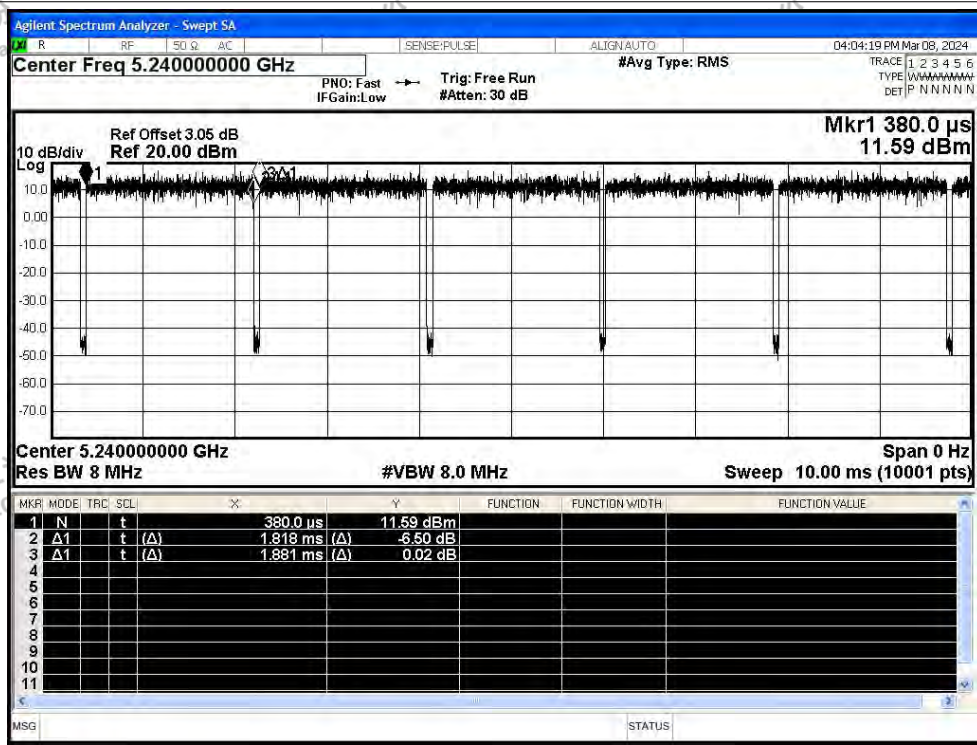




Duty Cycle NVNT n40 5190MHz Ant2

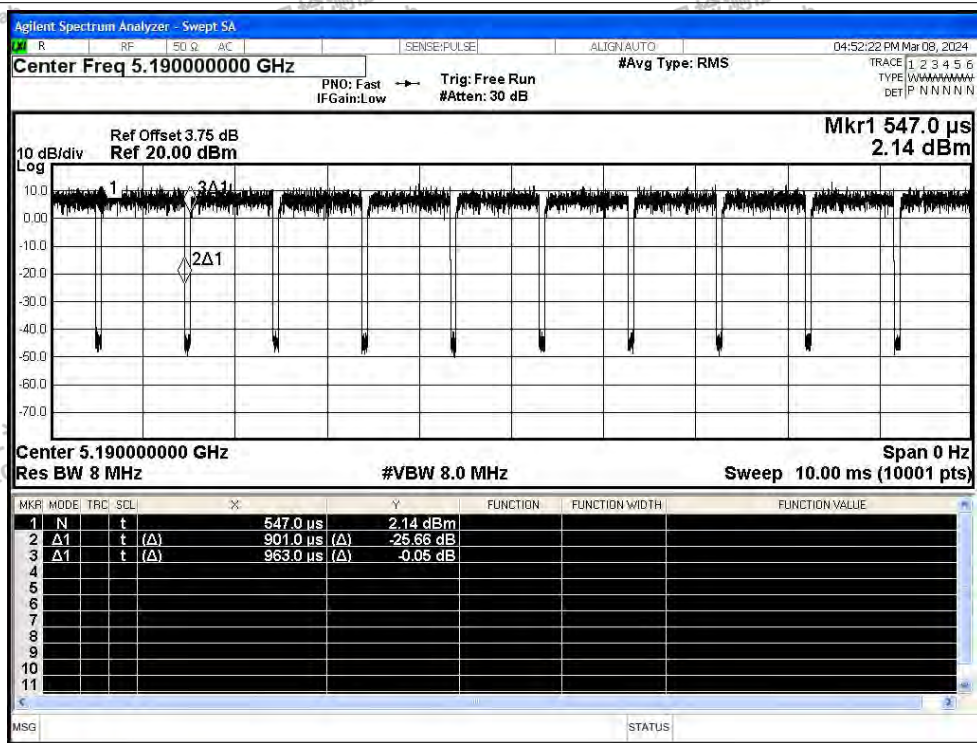


Duty Cycle NVNT n40 5230MHz Ant2

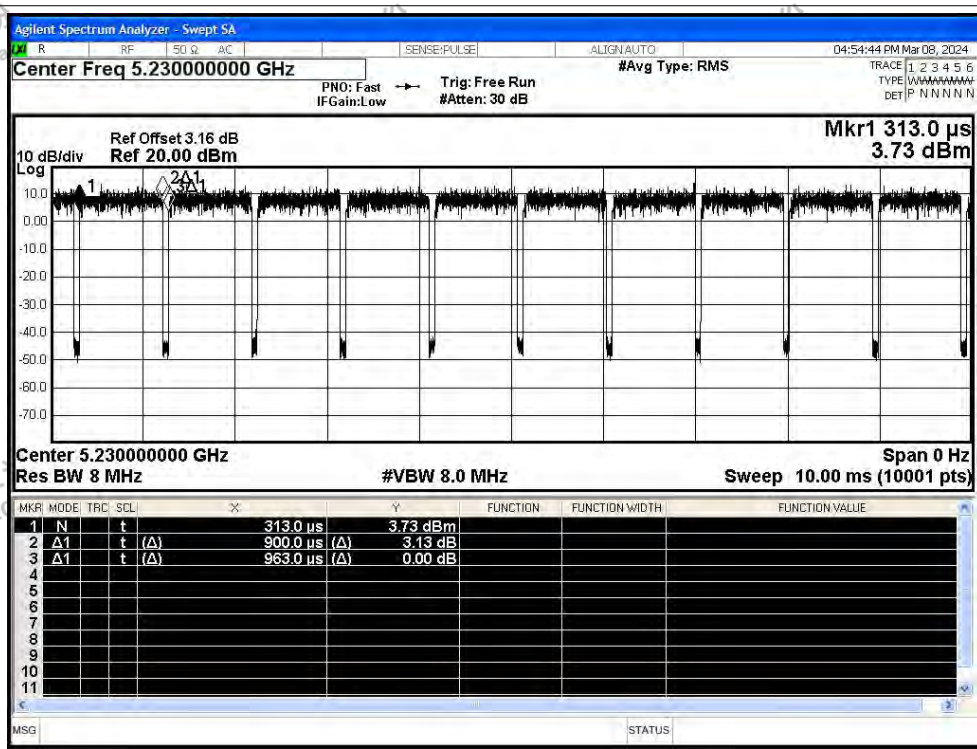




Duty Cycle NVNT ac20 5180MHz Ant2

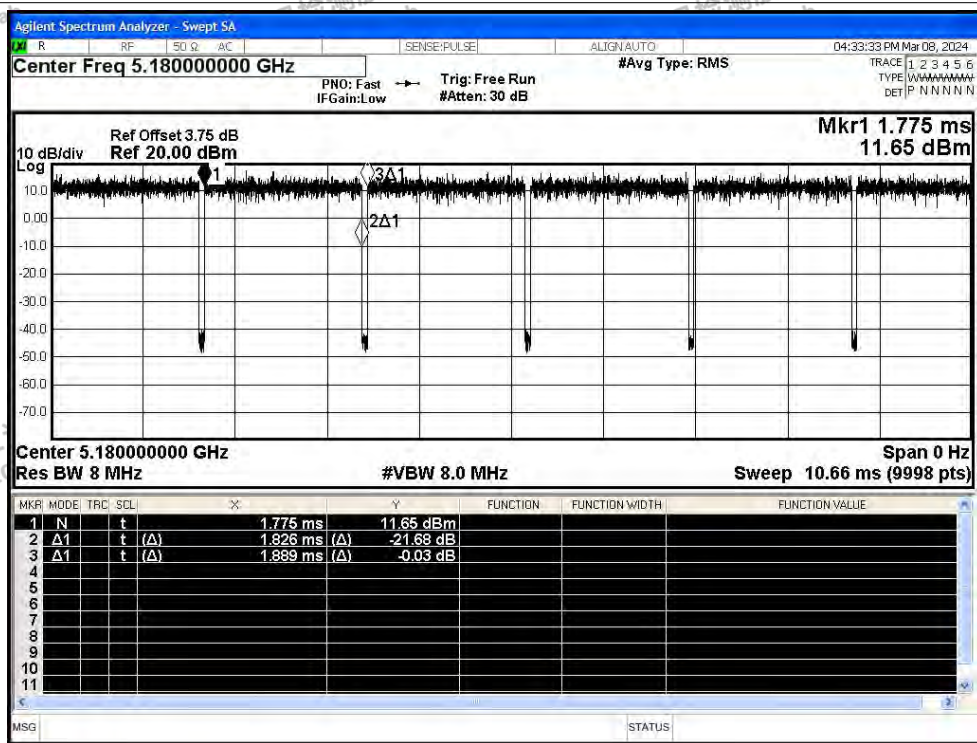


Duty Cycle NVNT ac20 5200MHz Ant2

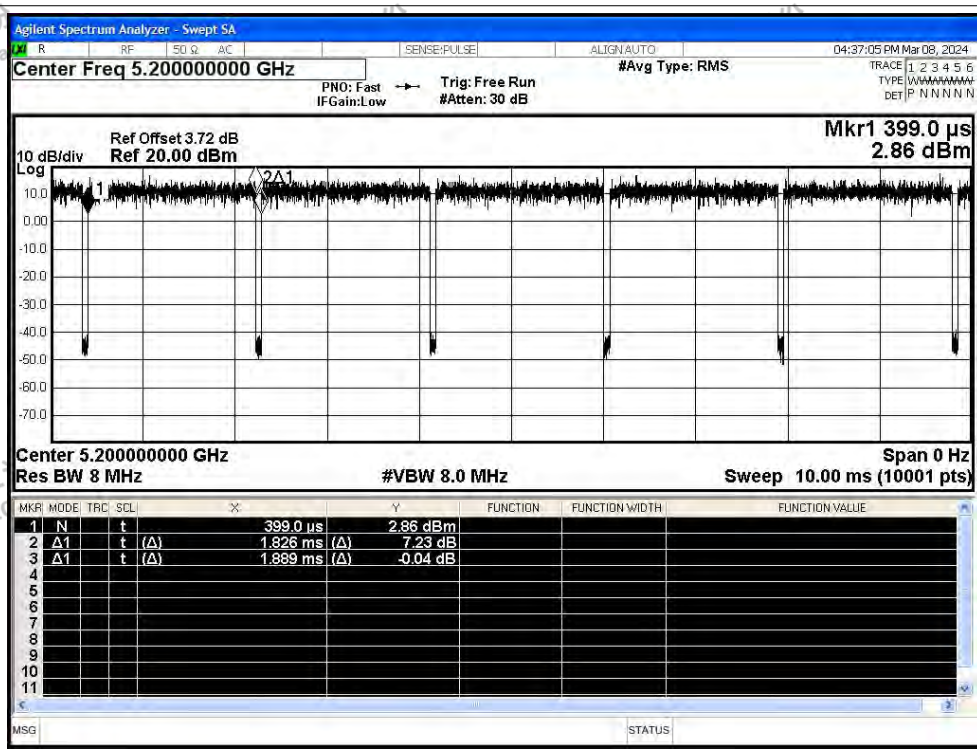




Duty Cycle NVNT ac20 5240MHz Ant2

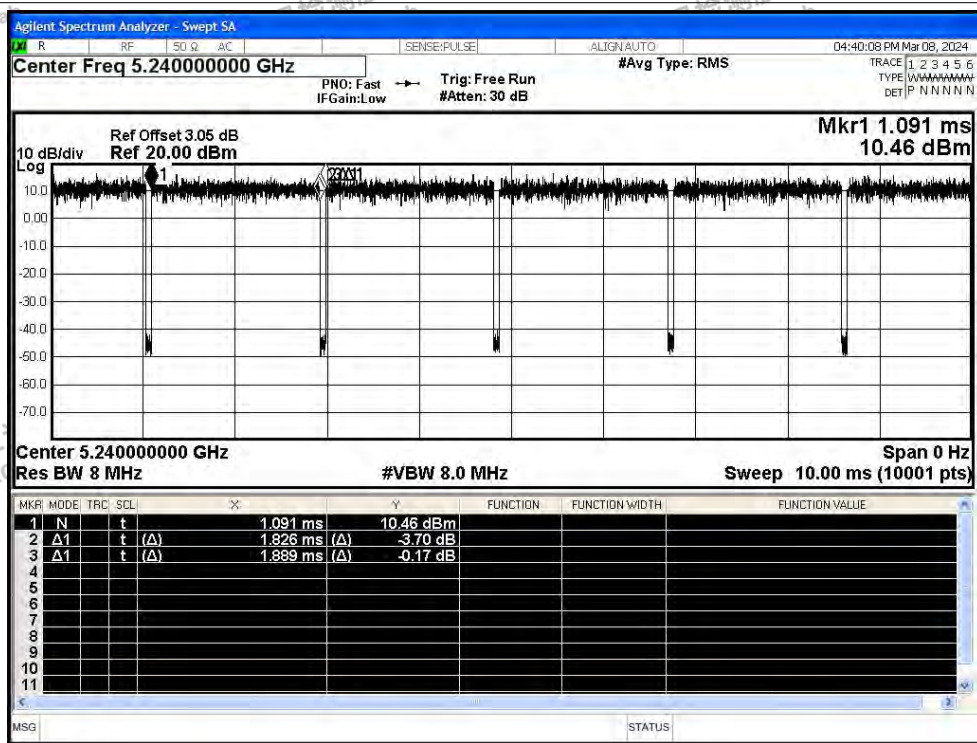


Duty Cycle NVNT ac40 5190MHz Ant2

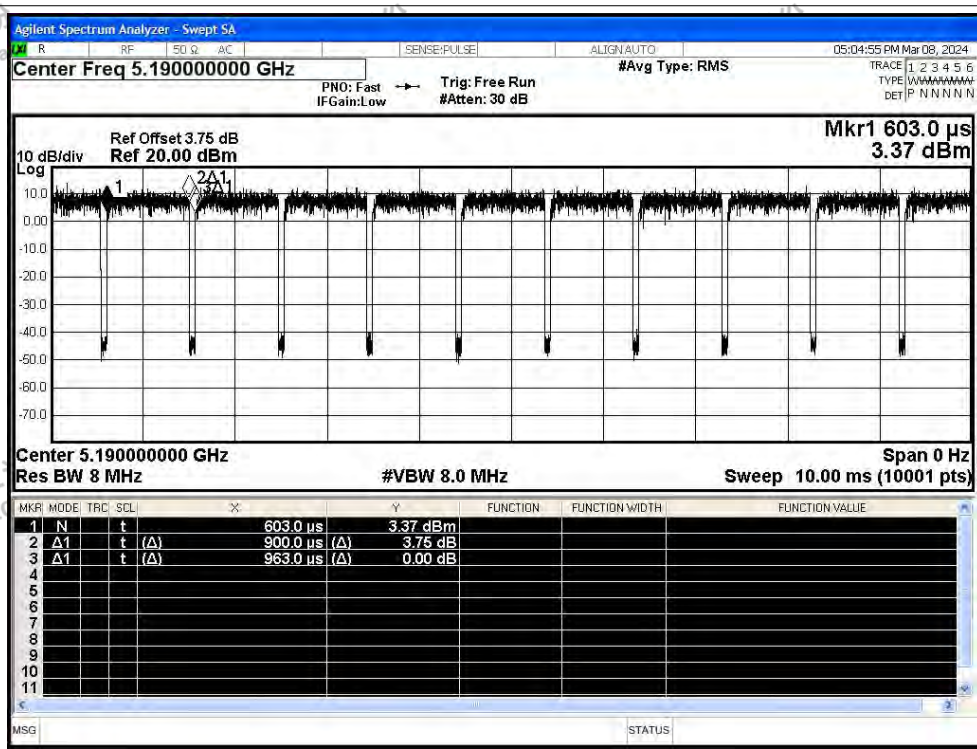





Duty Cycle NVNT ac40 5230MHz Ant2

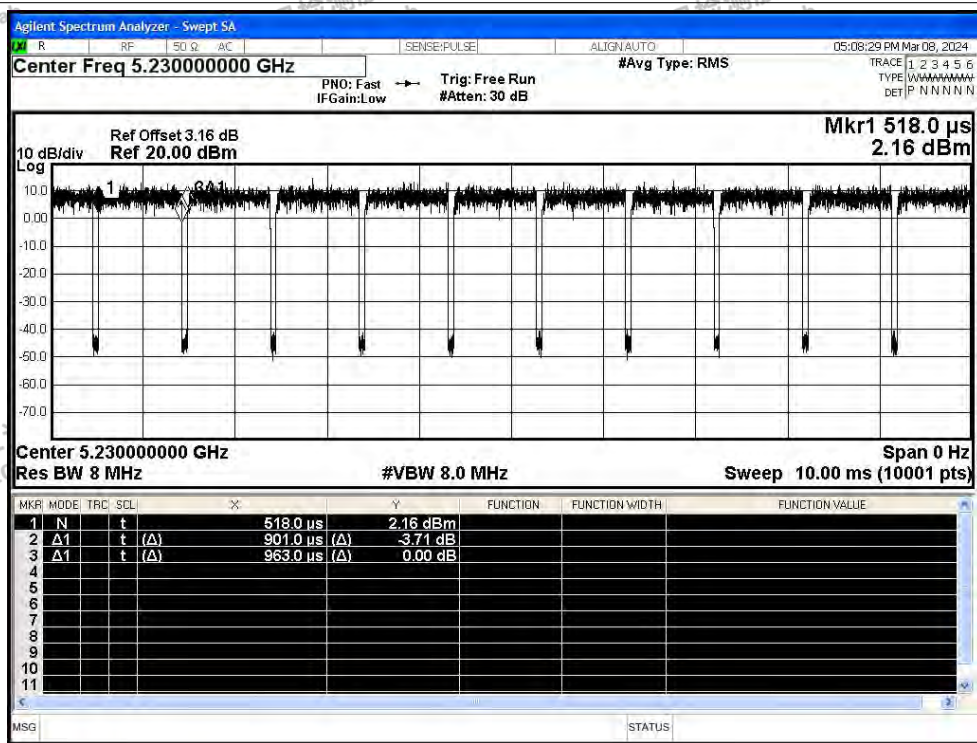

Duty Cycle NVNT ac80 5210MHz Ant2

