

Test Report

Report No.: MTi210819009-04E1

Date of issue: Nov. 08, 2021

Applicant: Shenzhen Leaderment Technology Co., Ltd.

Product: Magnetic Wireless Charger

Model(s): SW-WL640, SW-WL641, SW-WL642

FCC ID: 2ASUP-SW-WL641

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.


Contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	5
1.3	Description of support units	6
1.4	Environmental conditions	6
1.5	Measurement uncertainty	6
2	Summary of Test Result.....	7
3	Test Facilities and accreditations.....	8
3.1	Test laboratory	8
4	List of test equipment	9
5	Test Results	10
5.1	Standard requirement.....	10
5.2	Description of the EUT antenna	10
5.3	AC power line Conducted emissions.....	11
5.4	Radiated emissions	24
5.5	Occupied bandwidth test	35
6	Photographs of the test setup.....	37
7	Photographs of the EUT	38

Test Result Certification	
Applicant:	Shenzhen Leaderment Technology Co., Ltd.
Address:	1st Floor, Building 24, Longcheng Industrial Zone, Gaofeng Community, Dalang Street, Longhua District, Shenzhen
Manufacturer:	Shenzhen Leaderment Technology Co., Ltd.
Address:	1st Floor, Building 24, Longcheng Industrial Zone, Gaofeng Community, Dalang Street, Longhua District, Shenzhen
Factory:	Shenzhen Joway Power Supply Co., Ltd
Address:	Floor 1-5 of Bldg 10th and Bldg 11th, Antuoshan High-Tech Industrial Park, Sha'er Community, Shajing Street, Bao'an District, Shenzhen
Product description	
Product name:	Magnetic Wireless Charger
Trademark:	SYNCWIRE
Model name:	SW-WL640
Serial Model:	SW-WL641, SW-WL642
Standards:	FCC 47 CFR Part 15 Subpart C
Test method:	ANSI C63.10-2013
Date of Test	
Date of test:	2021-09-26 ~ 2021-10-20
Test result:	Pass

Test Engineer :


(Yanice Xie)

Reviewed By: :


(Leon Chen)

Approved By: :


(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	Magnetic Wireless Charger
Model name:	SW-WL640
Series Model:	SW-WL641, SW-WL642
Model difference:	All the models are the same circuit and RF module, except the model name, content of the laser label on the product surface and the color of the product.
Electrical rating:	Powered by adapter AC120V/60Hz Input:DC 5V3A, 9V2A Output:5W, 7.5W, 10W
Accessories:	Adapter 1(model: A829-090223C-US2):Model: A829-090223C-US2 Input: 100-240V~ 50/60Hz 0. 5A Output: 5.0V 3.0A/9.0V 2.23A/12.0V 1.67A Adapter 2(model: PSD01-CU):Model: PSD01-CU Input: 100-240V~ 50/60Hz 0. 6A Output: 5V 3A/9V 2.22A/12V 1.67A Adapter 2(model: GW-20PD301U):Model: GW-20PD301U Input: 100-240V~ 50/60Hz 1A Max Output: 5V 3A/9V 2.22A/12V 1.67A
RF specification:	
Operation frequency:	115 kHz – 205 kHz
Modulation type:	ASK
Antenna type:	Coil Antenna

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode 1	Wireless output (5W)
Mode 2	Wireless output (7.5W)
Mode 3	Wireless output (10W)
Mode 4	Stand-by mode

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Load	/	/	YBZ
Adapter	HW-090200CH0	/	Huizhou BYD Electronics Co., Ltd.
Support cable list			
Description	Length (m)	From	To
/	/	/	/

1.4 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Humidity:	20 % RH ~ 75 % RH
Atmospheric pressure:	98 kPa~101 kPa

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emission (150 kHz~30 MHz)	± 2.5 dB
Radiated emission (9 kHz~30 MHz)	± 4.0 dB
Radiated emission (30 MHz~1 GHz)	± 4.2 dB
Radiated emission (above 1 GHz)	± 4.3 dB
Occupied Bandwidth	± 3 %
Temperature	±1 degree
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	FCC reference	Description of test	Result
Emission			
1	FCC Part 15.203	Antenna requirement	Pass
2	FCC Part 15.207	AC power line Conducted emissions	Pass
3	FCC Part 15.209	Radiated emissions	Pass
4	FCC Part 15.215	Occupied bandwidth	Pass

Note: N/A means not applicable.

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao' an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E043	EMI test receiver	R&S	ESCI7	101166	2021/06/02	2022/06/01
MTI-E044	Broadband antenna	Schwarzbeck	VULB9163	9163-1338	2021/05/30	2023/05/29
MTI-E045	Horn antenna	Schwarzbeck	BBHA9120D	9120D-2278	2021/05/30	2023/05/29
MTi-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2021/05/30	2023/05/29
MTI-E047	Pre-amplifier	Hewlett-Packard	8447F	3113A06184	2021/06/02	2022/06/01
MTI-E048	Pre-amplifier	Agilent	8449B	3008A01120	2021/06/02	2022/06/01
MTi-E005	EMI test receiver	R&S	ESPI7	100314	2021/06/02	2022/06/01
MTi-E120	Broadband antenna	Schwarzbeck	VULB9163	9163-1419	2021/05/30	2023/05/29
MTi-E121	Pre-amplifier	Hewlett-Packard	8447D	2944A09365	2021/04/16	2022/04/15
MTi-E123	Pre-amplifier	Agilent	8449B	3008A04723	2021/05/06	2022/05/05
MTi-E122	MXA signal analyzer	Agilent	N9020A	MY5444085 9	2021/05/06	2022/05/05
MTi-E001	Artificial Mains Network	R&S	ESH2-Z5	100263	2021/06/02	2022/06/01
MTi-E002	EMI Test Receiver	R&S	ESCI3	101368	2021/06/02	2022/06/01
MTi-E023	Artificial power network	Schwarzbeck	NSLK8127	NSLK8127# 841	2021/06/02	2022/06/01
MTi-E025	Artificial power network	Schwarzbeck	NSLK8127	8127183	2021/06/02	2022/06/01
MTi-E026	8-wire Impedance Stabilization Network	Schwarzbeck	NTFM 8158	NTFM 8158 #199	2021/06/02	2022/06/01
MTi-E021	EMI Test Receiver	R&S	ESCS30	100210	2021/06/02	2022/06/01
MTi-E024	Artificial power network	Schwarzbeck	NSLK8127	01001	2021/06/02	2022/06/01

5 Test Results

5.1 Standard requirement

15.203 requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.2 Description of the EUT antenna

The antenna of EUT is coil antenna, which is integrated on the main PCB of the EUT and no consideration of replacement.

5.3 AC power line Conducted emissions

5.3.1 Limits


Frequency (MHz)	Detector type / Bandwidth	Limit-Quasi-peak dB μ V	Limit-Average dB μ V
0.15 -0.5	Average / 9 kHz	66 to 56	56 to 46
0.5 -5		56	46
5 -30		60	50

Note 1: the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

5.3.2 Test Procedures

- The test setup is refer to the standard ANSI C63.10-2013.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

5.3.3 Test setup

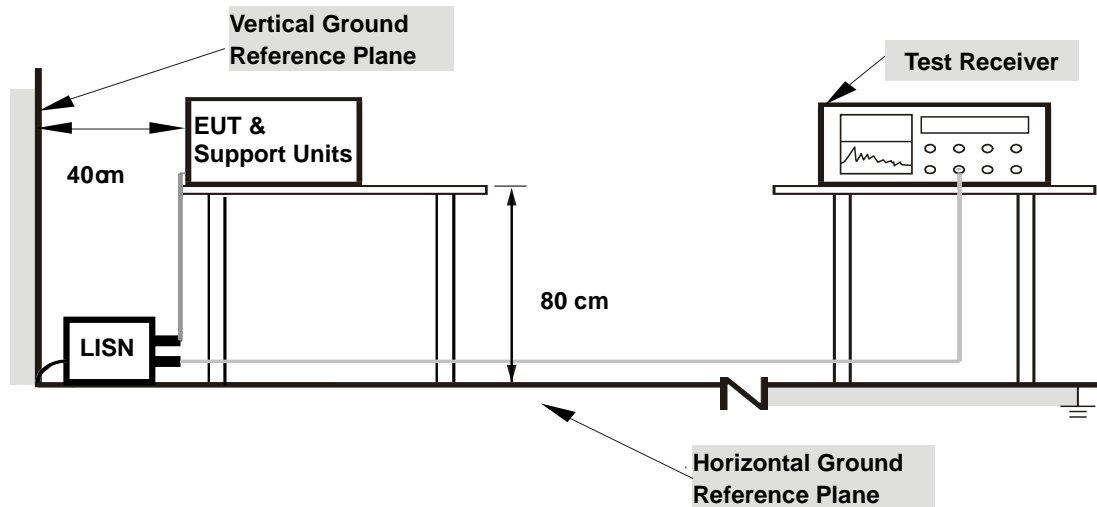

For the actual test configuration, please refer to the related item – Photographs of the test setup.

5.3.4 Test Result


Calculation formula:

Measurement (dB μ V) = Reading Level (dB μ V) + Correct Factor (dB)

Over (dB) = Measurement (dB μ V) – Limit (dB μ V)

Adapter 1(model: A829-090223C-US2):


Test mode:	Mode 3	Phase:	L
Power supply:	Powered by adapter AC120V/60Hz	Test site:	CE chamber 1

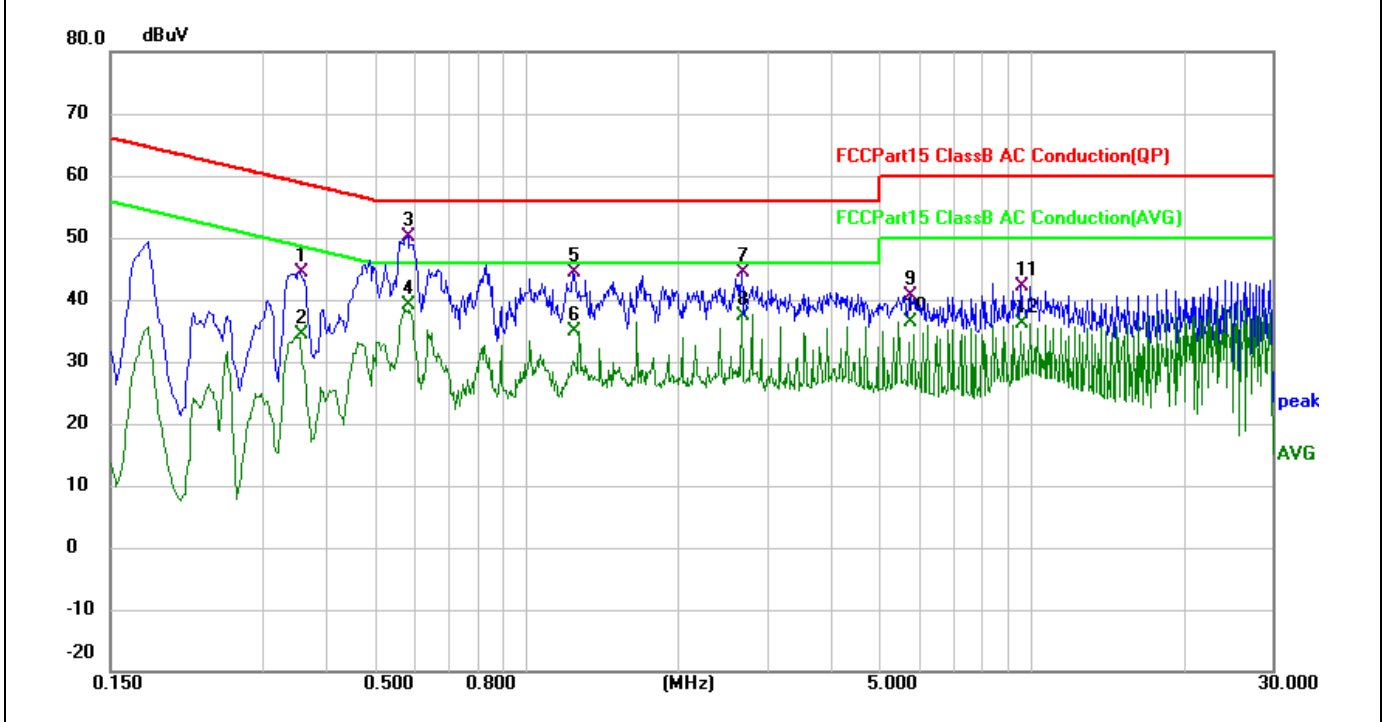

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.3540	33.32	10.99	44.31	58.87	-14.56	QP
2		0.3540	23.49	10.99	34.48	48.87	-14.39	AVG
3	*	0.5820	39.11	11.09	50.20	56.00	-5.80	QP
4		0.5820	28.01	11.09	39.10	46.00	-6.90	AVG
5		1.2420	30.50	13.79	44.29	56.00	-11.71	QP
6		1.2420	21.05	13.79	34.84	46.00	-11.16	AVG
7		2.6740	32.90	11.39	44.29	56.00	-11.71	QP
8		2.6740	26.09	11.39	37.48	46.00	-8.52	AVG
9		5.7460	29.14	11.53	40.67	60.00	-19.33	QP
10		5.7460	24.80	11.53	36.33	50.00	-13.67	AVG
11		9.5460	30.64	11.59	42.23	60.00	-17.77	QP
12		9.5460	24.66	11.59	36.25	50.00	-13.75	AVG

Adapter 1(model: A829-090223C-US2):


Test mode:	Mode 3	Phase:	N
Power supply:	Powered by adapter AC120V/60Hz	Test site:	CE chamber 1

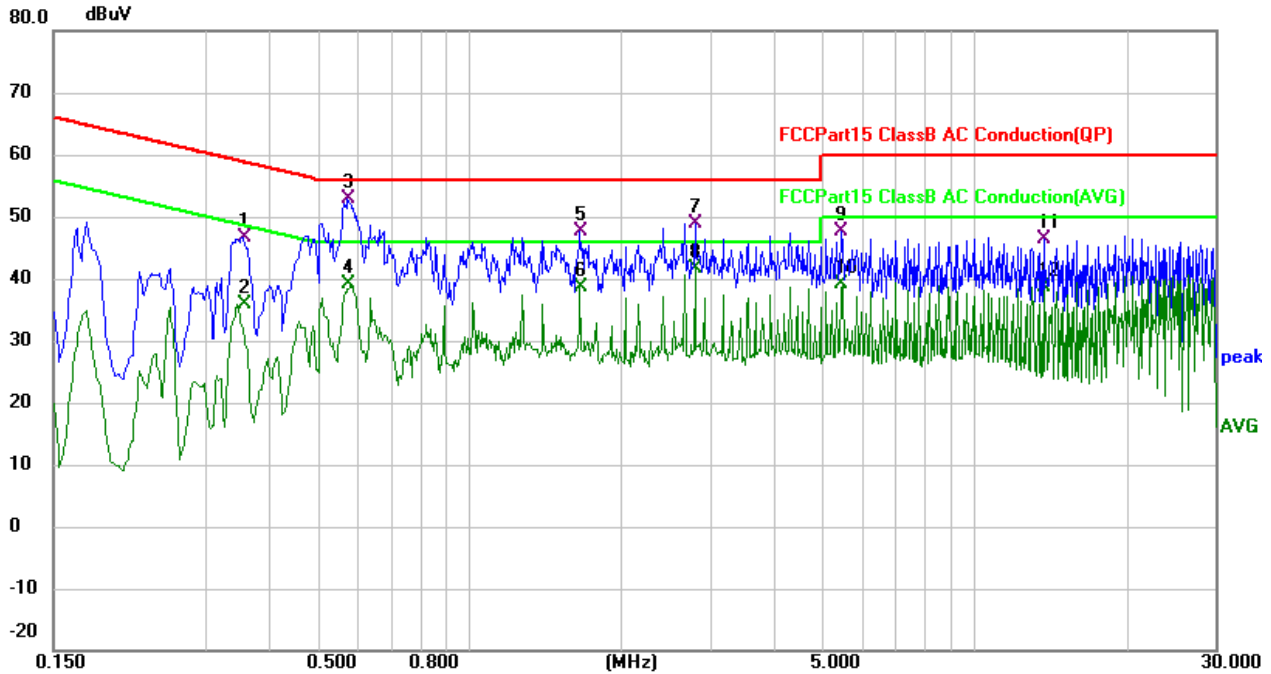

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.3540	35.68	10.90	46.58	58.87	-12.29	QP
2		0.3540	24.94	10.90	35.84	48.87	-13.03	AVG
3	*	0.5740	41.88	10.97	52.85	56.00	-3.15	QP
4		0.5740	28.24	10.97	39.21	46.00	-6.79	AVG
5		1.6540	33.03	14.62	47.65	56.00	-8.35	QP
6		1.6540	23.95	14.62	38.57	46.00	-7.43	AVG
7		2.8020	37.43	11.39	48.82	56.00	-7.18	QP
8		2.8020	30.16	11.39	41.55	46.00	-4.45	AVG
9		5.4739	36.19	11.40	47.59	60.00	-12.41	QP
10		5.4739	27.69	11.40	39.09	50.00	-10.91	AVG
11		13.7539	34.68	11.63	46.31	60.00	-13.69	QP
12		13.7539	26.93	11.63	38.56	50.00	-11.44	AVG

Adapter 1(model: A829-090223C-US2):


Test mode:	Mode 3	Phase:	L
Power supply:	Powered by adapter AC240V/60Hz	Test site:	CE chamber 1

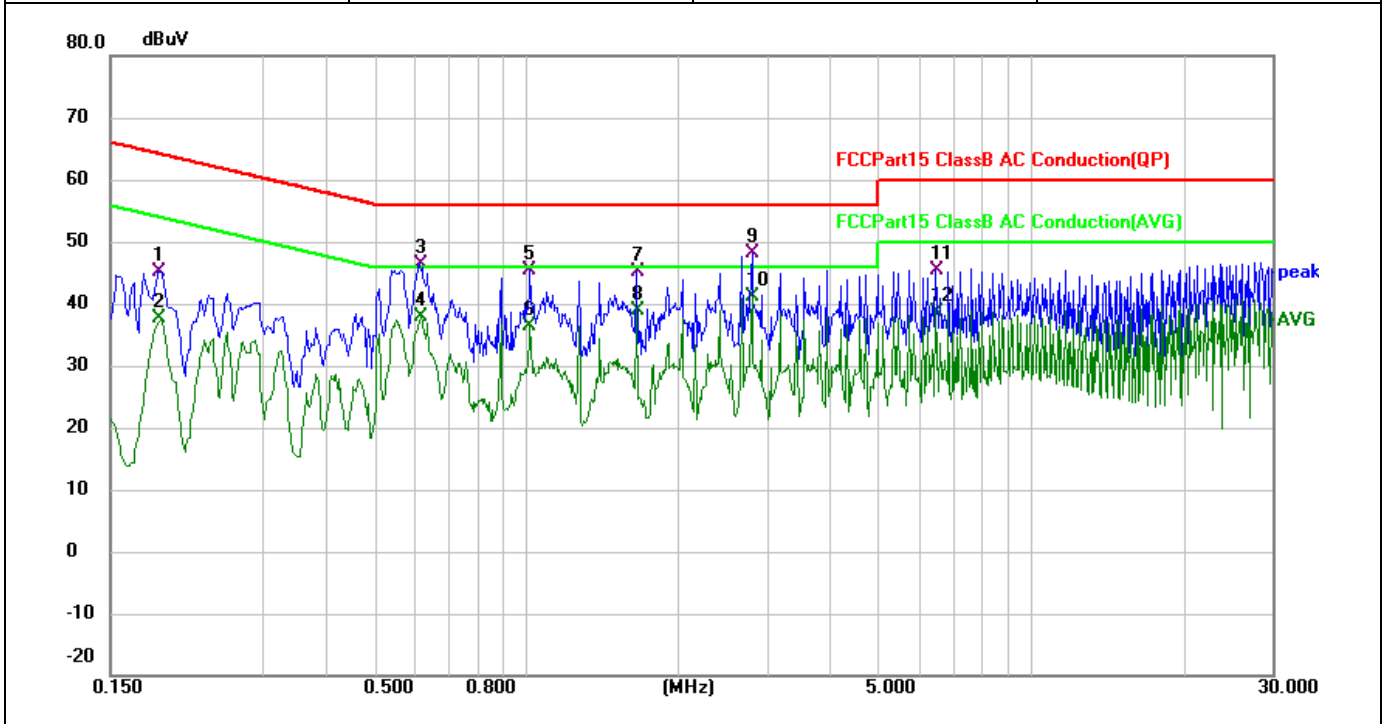

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1860	34.12	10.98	45.10	64.21	-19.11	QP
2		0.1860	26.66	10.98	37.64	54.21	-16.57	AVG
3		0.6140	35.32	11.09	46.41	56.00	-9.59	QP
4		0.6140	26.80	11.09	37.89	46.00	-8.11	AVG
5		1.0180	32.00	13.32	45.32	56.00	-10.68	QP
6		1.0180	22.98	13.32	36.30	46.00	-9.70	AVG
7		1.6540	30.39	14.66	45.05	56.00	-10.95	QP
8		1.6540	24.26	14.66	38.92	46.00	-7.08	AVG
9		2.7980	36.77	11.39	48.16	56.00	-7.84	QP
10	*	2.7980	29.85	11.39	41.24	46.00	-4.76	AVG
11		6.4860	33.88	11.60	45.48	60.00	-14.52	QP
12		6.4860	27.09	11.60	38.69	50.00	-11.31	AVG

Adapter 1(model: A829-090223C-US2):


Test mode:	Mode 3	Phase:	N
Power supply:	Powered by adapter AC240V/60Hz	Test site:	CE chamber 1

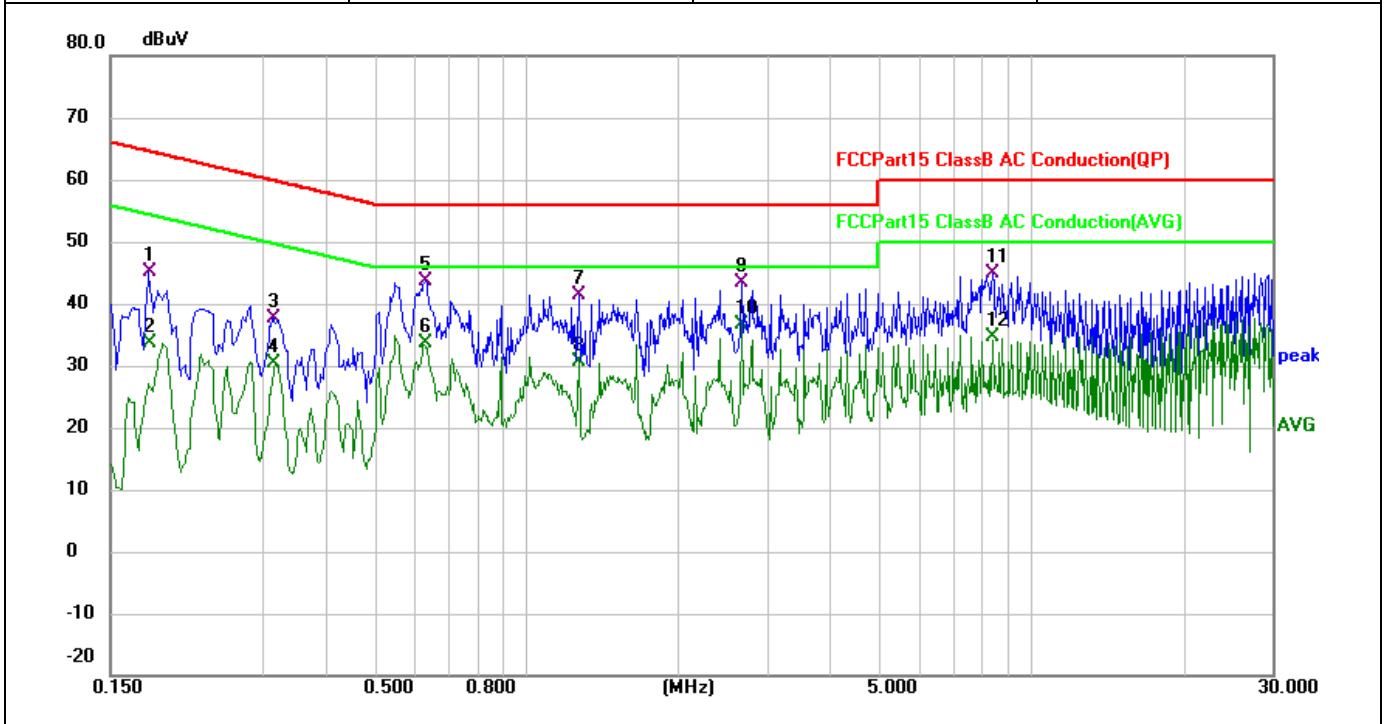

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1780	34.16	10.92	45.08	64.58	-19.50	QP
2		0.1780	22.60	10.92	33.52	54.58	-21.06	AVG
3		0.3140	26.82	10.92	37.74	59.86	-22.12	QP
4		0.3140	19.34	10.92	30.26	49.86	-19.60	AVG
5		0.6300	32.66	11.03	43.69	56.00	-12.31	QP
6		0.6300	22.51	11.03	33.54	46.00	-12.46	AVG
7		1.2700	27.49	13.80	41.29	56.00	-14.71	QP
8		1.2700	16.91	13.80	30.71	46.00	-15.29	AVG
9		2.6700	32.02	11.39	43.41	56.00	-12.59	QP
10	*	2.6700	25.14	11.39	36.53	46.00	-9.47	AVG
11		8.3900	33.50	11.47	44.97	60.00	-15.03	QP
12		8.3900	23.26	11.47	34.73	50.00	-15.27	AVG

Adapter 2(model: PSD01-CU):


Test mode:	Mode 3	Phase:	L
Power supply:	Powered by adapter AC120V/60Hz	Test site:	CE chamber 1

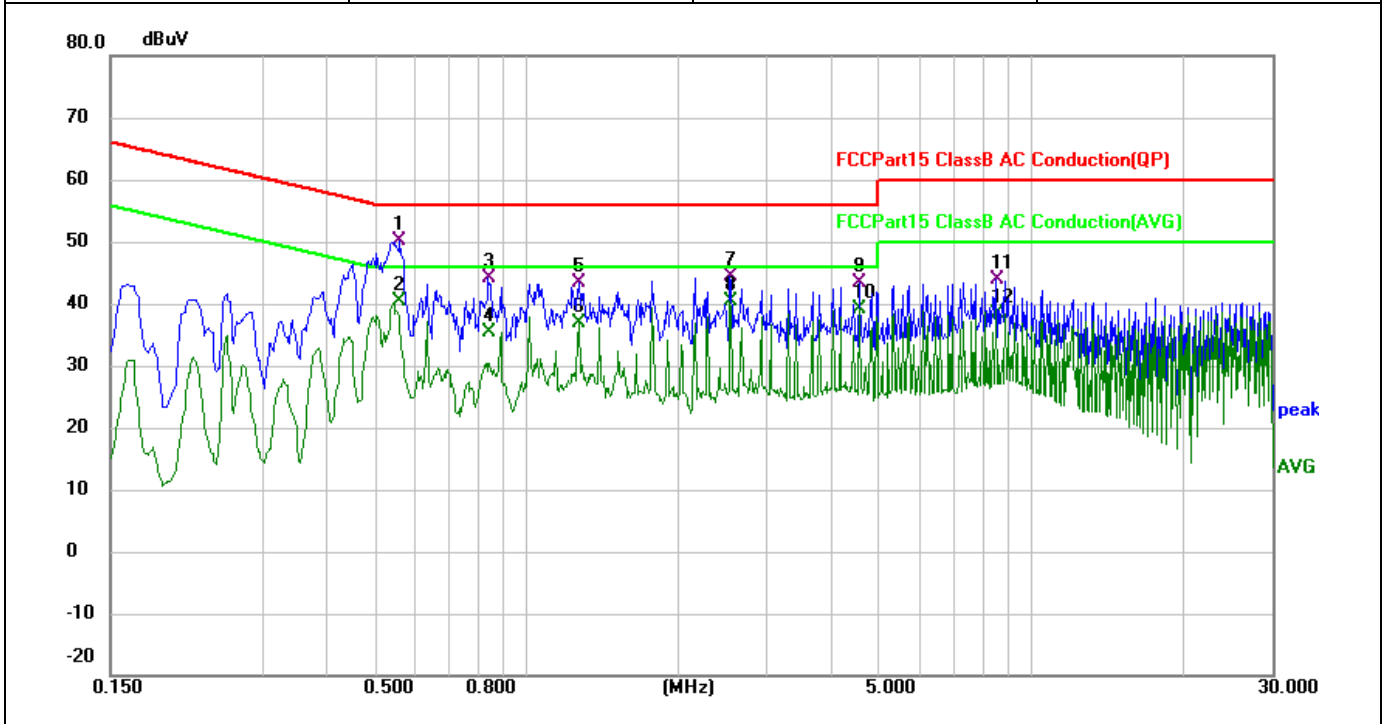

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5620	39.11	11.09	50.20	56.00	-5.80	QP
2	0.5620	29.28	11.09	40.37	46.00	-5.63	AVG
3	0.8420	32.96	11.19	44.15	56.00	-11.85	QP
4	0.8420	24.19	11.19	35.38	46.00	-10.62	AVG
5	1.2700	29.44	13.86	43.30	56.00	-12.70	QP
6	1.2700	23.12	13.86	36.98	46.00	-9.02	AVG
7	2.5380	33.06	11.39	44.45	56.00	-11.55	QP
8 *	2.5380	29.01	11.39	40.40	46.00	-5.60	AVG
9	4.5700	31.91	11.45	43.36	56.00	-12.64	QP
10	4.5700	27.69	11.45	39.14	46.00	-6.86	AVG
11	8.5060	32.31	11.60	43.91	60.00	-16.09	QP
12	8.5060	26.84	11.60	38.44	50.00	-11.56	AVG

Adapter 2(model: PSD01-CU):


Test mode:	Mode 3	Phase:	N
Power supply:	Powered by adapter AC120V/60Hz	Test site:	CE chamber 1

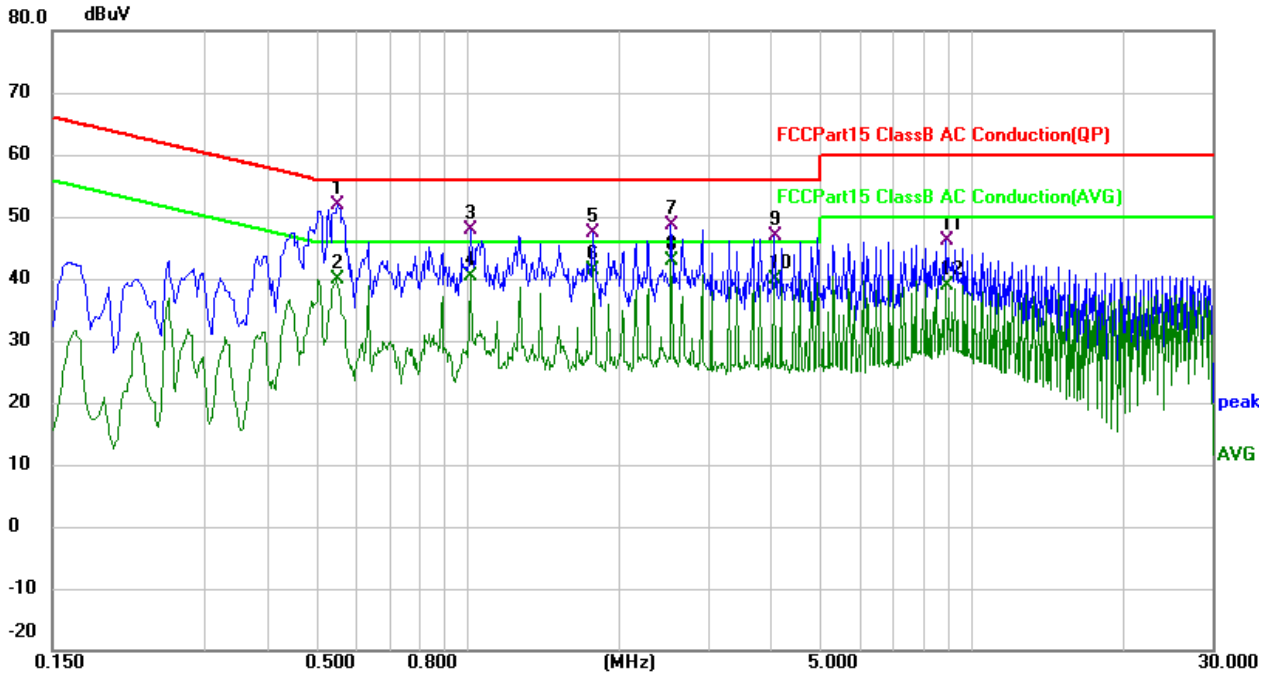

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5540	40.89	10.96	51.85	56.00	-4.15	QP
2	0.5540	28.97	10.96	39.93	46.00	-6.07	AVG
3	1.0140	34.60	13.23	47.83	56.00	-8.17	QP
4	1.0140	27.20	13.23	40.43	46.00	-5.57	AVG
5	1.7780	32.49	14.91	47.40	56.00	-8.60	QP
6	1.7780	26.51	14.91	41.42	46.00	-4.58	AVG
7	2.5380	37.22	11.39	48.61	56.00	-7.39	QP
8 *	2.5380	31.59	11.39	42.98	46.00	-3.02	AVG
9	4.0620	35.53	11.39	46.92	56.00	-9.08	QP
10	4.0620	28.58	11.39	39.97	46.00	-6.03	AVG
11	8.8860	34.66	11.48	46.14	60.00	-13.86	QP
12	8.8860	27.51	11.48	38.99	50.00	-11.01	AVG

Adapter 2(model: PSD01-CU):


Test mode:	Mode 3	Phase:	L
Power supply:	Powered by adapter AC240V/60Hz	Test site:	CE chamber 1

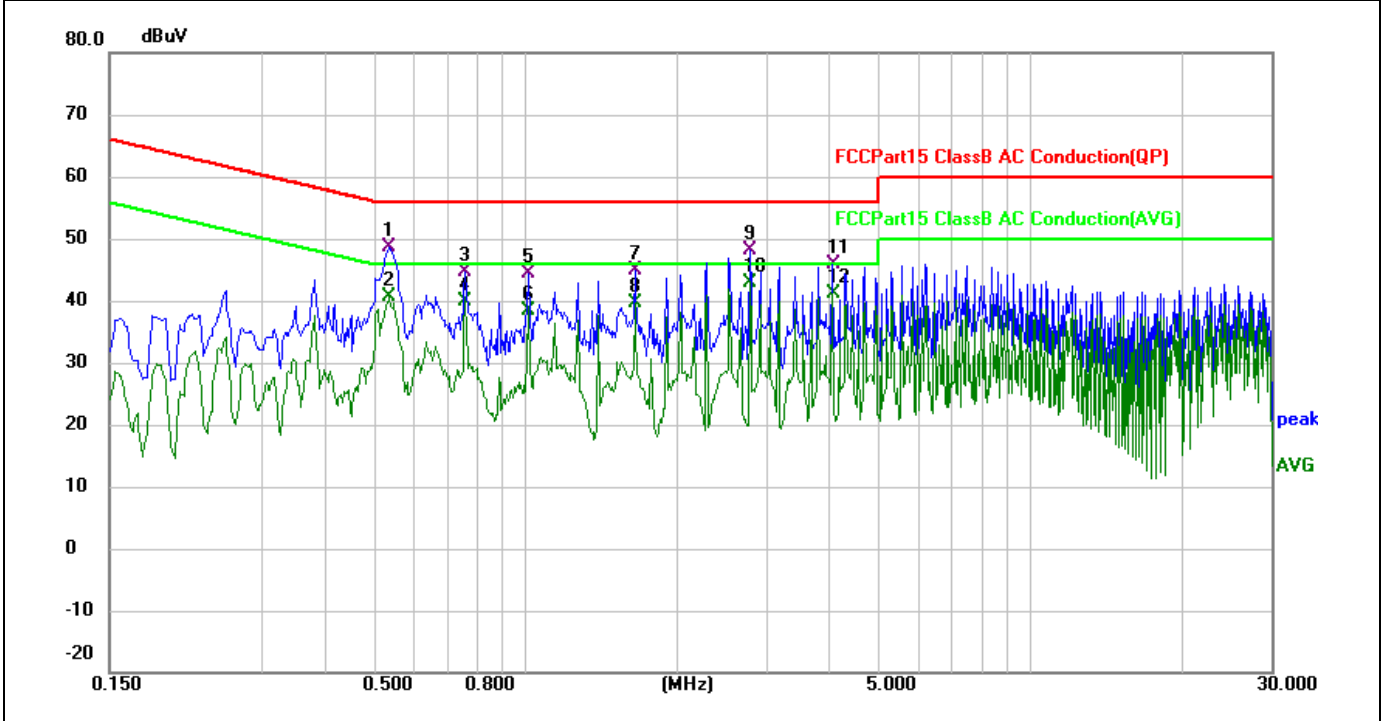

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5380	37.57	11.07	48.64	56.00	-7.36	QP
2	0.5380	29.48	11.07	40.55	46.00	-5.45	AVG
3	0.7620	33.59	11.14	44.73	56.00	-11.27	QP
4	0.7620	28.77	11.14	39.91	46.00	-6.09	AVG
5	1.0180	31.06	13.32	44.38	56.00	-11.62	QP
6	1.0180	25.11	13.32	38.43	46.00	-7.57	AVG
7	1.6500	30.25	14.65	44.90	56.00	-11.10	QP
8	1.6500	24.95	14.65	39.60	46.00	-6.40	AVG
9	2.7940	36.62	11.39	48.01	56.00	-7.99	QP
10 *	2.7940	31.61	11.39	43.00	46.00	-3.00	AVG
11	4.0620	34.41	11.43	45.84	56.00	-10.16	QP
12	4.0620	29.59	11.43	41.02	46.00	-4.98	AVG

Adapter 2(model: PSD01-CU):


Test mode:	Mode 3	Phase:	N
Power supply:	Powered by adapter AC240V/60Hz	Test site:	CE chamber 1

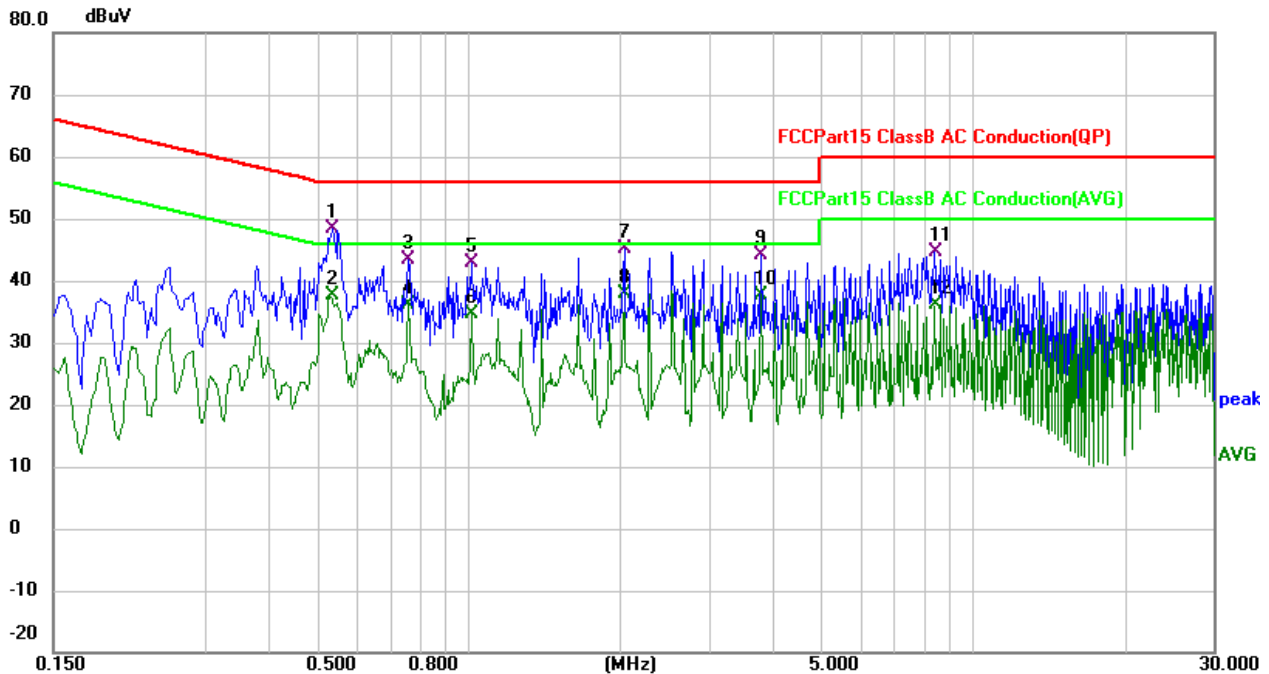

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1 *	0.5380	37.40	10.94	48.34	56.00	-7.66	QP
2	0.5380	26.79	10.94	37.73	46.00	-8.27	AVG
3	0.7620	32.34	11.10	43.44	56.00	-12.56	QP
4	0.7620	25.06	11.10	36.16	46.00	-9.84	AVG
5	1.0140	29.67	13.23	42.90	56.00	-13.10	QP
6	1.0140	21.35	13.23	34.58	46.00	-11.42	AVG
7	2.0340	29.62	15.44	45.06	56.00	-10.94	QP
8	2.0340	22.48	15.44	37.92	46.00	-8.08	AVG
9	3.8100	32.63	11.38	44.01	56.00	-11.99	QP
10	3.8100	26.29	11.38	37.67	46.00	-8.33	AVG
11	8.3820	33.16	11.47	44.63	60.00	-15.37	QP
12	8.3820	24.73	11.47	36.20	50.00	-13.80	AVG

Adapter 2(model: GW-20PD301U):


Test mode:	Mode 3	Phase:	L
Power supply:	Powered by adapter AC120V/60Hz	Test site:	CE chamber 1

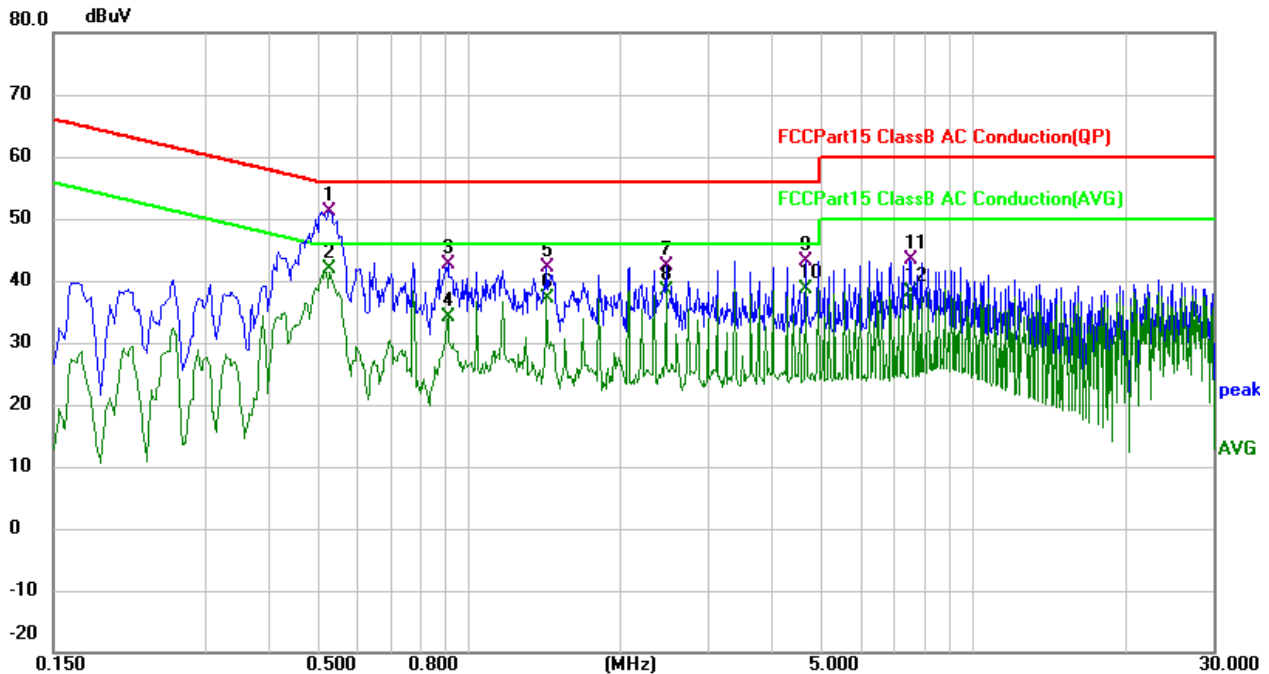

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5299	40.12	11.08	51.20	56.00	-4.80	QP
2 *	0.5299	30.74	11.08	41.82	46.00	-4.18	AVG
3	0.9100	29.55	13.05	42.60	56.00	-13.40	QP
4	0.9100	21.03	13.05	34.08	46.00	-11.92	AVG
5	1.4260	27.86	14.20	42.06	56.00	-13.94	QP
6	1.4260	22.95	14.20	37.15	46.00	-8.85	AVG
7	2.4660	31.06	11.39	42.45	56.00	-13.55	QP
8	2.4660	27.10	11.39	38.49	46.00	-7.51	AVG
9	4.6700	31.63	11.46	43.09	56.00	-12.91	QP
10	4.6700	27.27	11.46	38.73	46.00	-7.27	AVG
11	7.5220	31.66	11.63	43.29	60.00	-16.71	QP
12	7.5220	26.47	11.63	38.10	50.00	-11.90	AVG

Adapter 2(model: GW-20PD301U):


Test mode:	Mode 3	Phase:	N
Power supply:	Powered by adapter AC120V/60Hz	Test site:	CE chamber 1

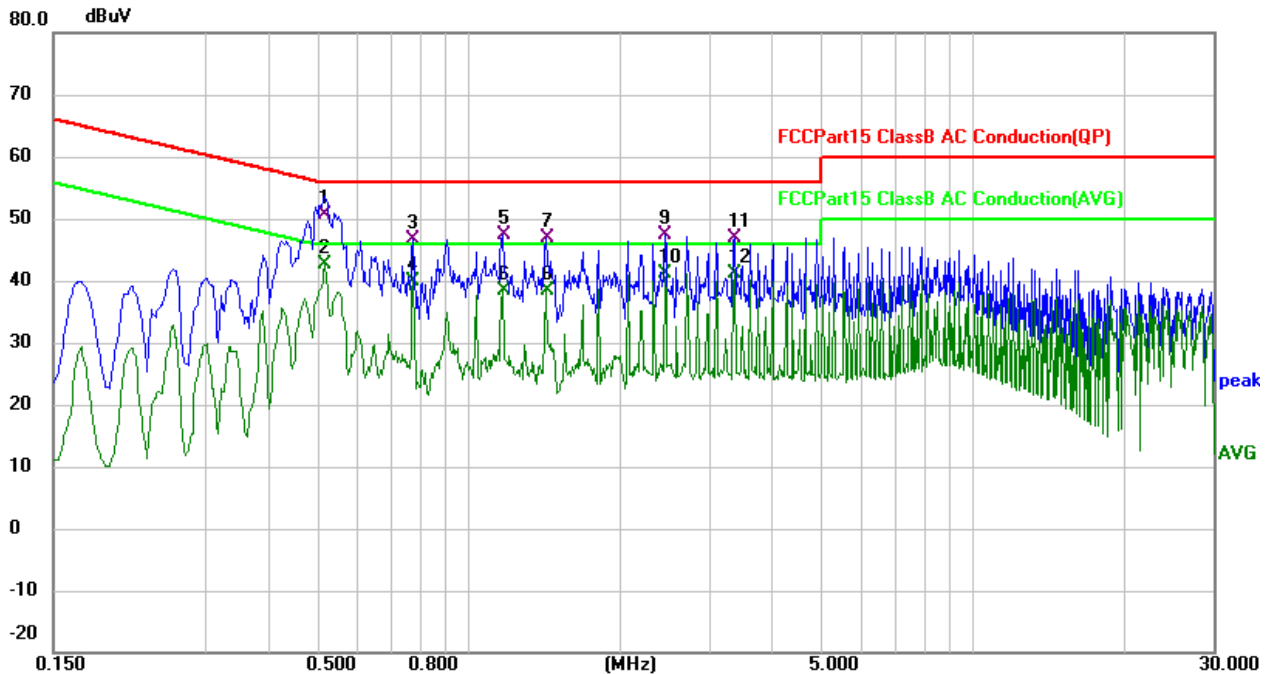

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1	0.5180	39.68	10.92	50.60	56.00	-5.40	QP
2 *	0.5180	31.59	10.92	42.51	46.00	-3.49	AVG
3	0.7780	35.50	11.11	46.61	56.00	-9.39	QP
4	0.7780	28.84	11.11	39.95	46.00	-6.05	AVG
5	1.1660	33.69	13.57	47.26	56.00	-8.74	QP
6	1.1660	24.83	13.57	38.40	46.00	-7.60	AVG
7	1.4260	32.73	14.15	46.88	56.00	-9.12	QP
8	1.4260	24.31	14.15	38.46	46.00	-7.54	AVG
9	2.4580	35.99	11.38	47.37	56.00	-8.63	QP
10	2.4580	29.72	11.38	41.10	46.00	-4.90	AVG
11	3.3660	35.45	11.39	46.84	56.00	-9.16	QP
12	3.3660	29.74	11.39	41.13	46.00	-4.87	AVG

Adapter 2(model: GW-20PD301U):


Test mode:	Mode 3	Phase:	L
Power supply:	Powered by adapter AC240V/60Hz	Test site:	CE chamber 1

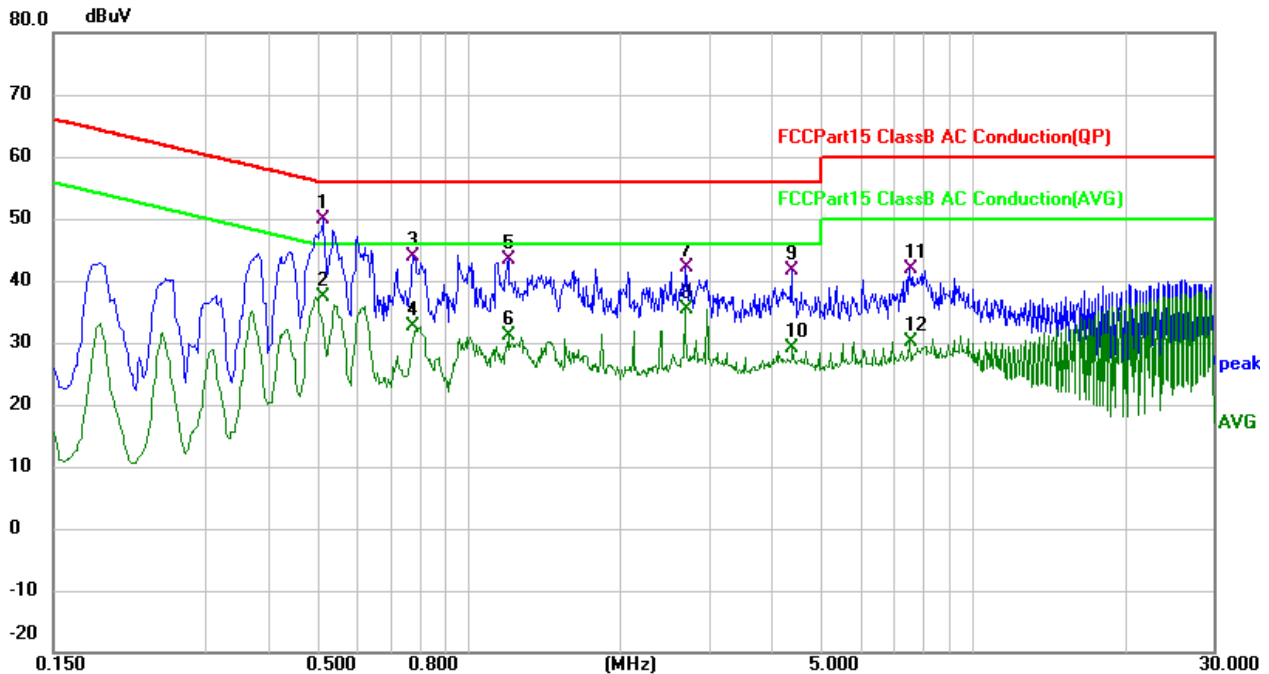

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.5140	38.80	11.07	49.87	56.00	-6.13	QP
2	0.5140	26.19	11.07	37.26	46.00	-8.74	AVG
3	0.7780	32.79	11.15	43.94	56.00	-12.06	QP
4	0.7780	21.50	11.15	32.65	46.00	-13.35	AVG
5	1.2020	29.57	13.70	43.27	56.00	-12.73	QP
6	1.2020	17.35	13.70	31.05	46.00	-14.95	AVG
7	2.6940	30.82	11.39	42.21	56.00	-13.79	QP
8	2.6940	24.02	11.39	35.41	46.00	-10.59	AVG
9	4.3659	30.17	11.45	41.62	56.00	-14.38	QP
10	4.3659	17.57	11.45	29.02	46.00	-16.98	AVG
11	7.5060	30.22	11.63	41.85	60.00	-18.15	QP
12	7.5060	18.51	11.63	30.14	50.00	-19.86	AVG

Adapter 2(model: GW-20PD301U):

Test mode:	Mode 3	Phase:	N
Power supply:	Powered by adapter AC240V/60Hz	Test site:	CE chamber 1

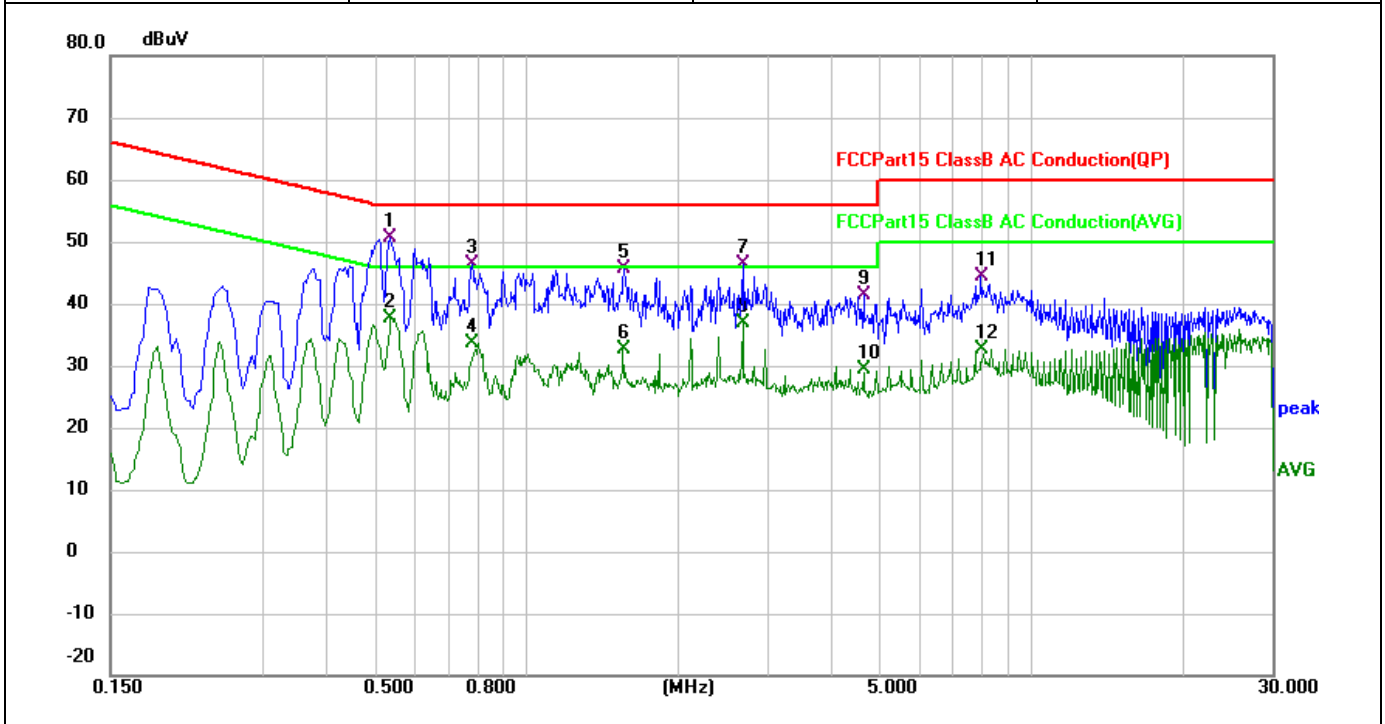

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.5340	39.79	10.94	50.73	56.00	-5.27	QP
2	0.5340	26.80	10.94	37.74	46.00	-8.26	AVG
3	0.7820	35.34	11.11	46.45	56.00	-9.55	QP
4	0.7820	22.48	11.11	33.59	46.00	-12.41	AVG
5	1.5620	31.31	14.43	45.74	56.00	-10.26	QP
6	1.5620	18.19	14.43	32.62	46.00	-13.38	AVG
7	2.6820	35.03	11.39	46.42	56.00	-9.58	QP
8	2.6820	25.59	11.39	36.98	46.00	-9.02	AVG
9	4.6579	30.12	11.38	41.50	56.00	-14.50	QP
10	4.6579	18.11	11.38	29.49	46.00	-16.51	AVG
11	7.9740	32.84	11.46	44.30	60.00	-15.70	QP
12	7.9740	21.09	11.46	32.55	50.00	-17.45	AVG

5.4 Radiated emissions

5.4.1 Limits

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note 1: the tighter limit applies at the band edges.

Note 2: the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

5.4.2 Test setup

According to ANSI C63.10, the tests shall be performed in the frequency range shown in the following table:

Frequency range of measurements for unlicensed wireless device

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Frequency range of measurements for unlicensed wireless device with digital device

Highest frequency generated or used in the device or on which the device operates or tunes	Upper frequency range of measurement
Below 1.705 MHz	30 MHz
1.705 MHz to 108 MHz	1000 MHz
108 MHz to 500 MHz	2000 MHz
500 MHz to 1000 MHz	5000 MHz
Above 1000 MHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Test instrument setup

Frequency	Test receiver / Spectrum analyzer setting
9 kHz ~ 150 kHz	Quasi Peak / 200 kHz
150 kHz ~ 30 MHz	Quasi Peak / 9 kHz
30 MHz ~ 1 GHz	Quasi Peak / 120 kHz

5.4.3 Test Procedures

The EUT is placed on a non-conducting table 80cm above the ground plane for measurement below 1 GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10-2013.

For measurement below 1 GHz, the resolution bandwidth is set as item 5.4.2.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4m meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and horizontal positions.

Special requirements for 9 KHz to 30 MHz:


The lowest height of the magnetic antenna shall be 1 m above the ground

When the EUT contains a loop antenna that can only be placed in a vertical axis, normal measurements shall be made aligning the measurement antenna along the site axis, and then orthogonal to the axis. For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable.


When the EUT contains a loop antenna that can be placed in a horizontal or vertical axis, normal measurements shall be made aligning the measurement antenna along the site axis, orthogonal to the axis, and then with the measurement antenna horizontal. For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable.

5.4.4 Test Setup

Blew 30 MHz:

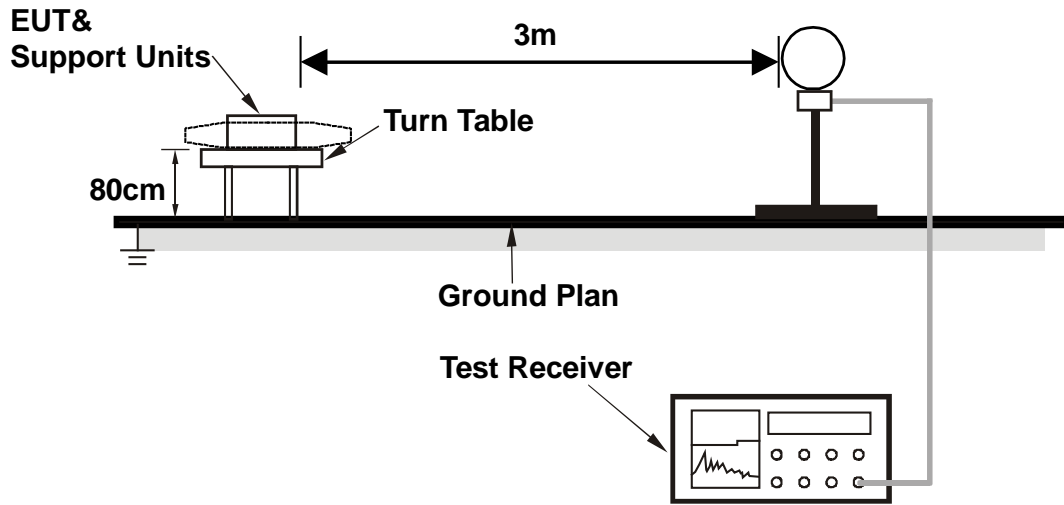

Blew 1 GHz:

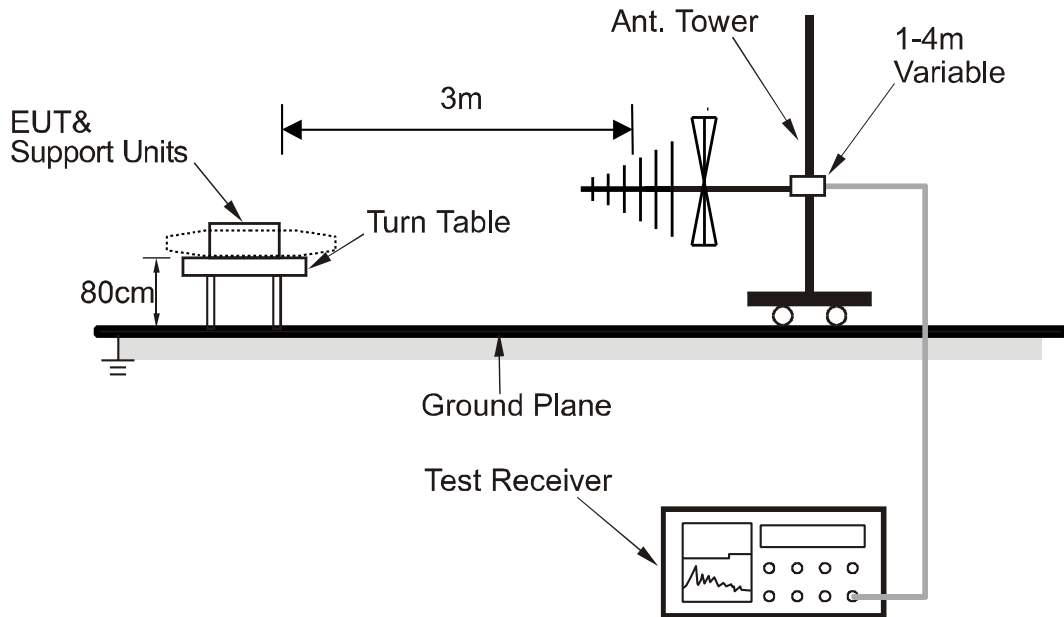

For the actual test configuration, please refer to the related item – Photographs of the test setup.

5.4.5 Test result

Calculation formula:


Measurement (dB μ V/m) = Reading Level (dB μ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB μ V/m) – Limit (dB μ V/m)

Note: For 9 kHz - 30 MHz testing, all the required orthogonal orientations of the measurement loop antenna were performed for pre-scan, the maximum radiated transmissions (Site axis) were recorded.

Frequency 9 kHz ~ 150 kHz


Test mode:	Mode 3	Polarization:	Site axis
Power supply:	Powered by adapter AC120V/60Hz	Test site:	RE chamber 1

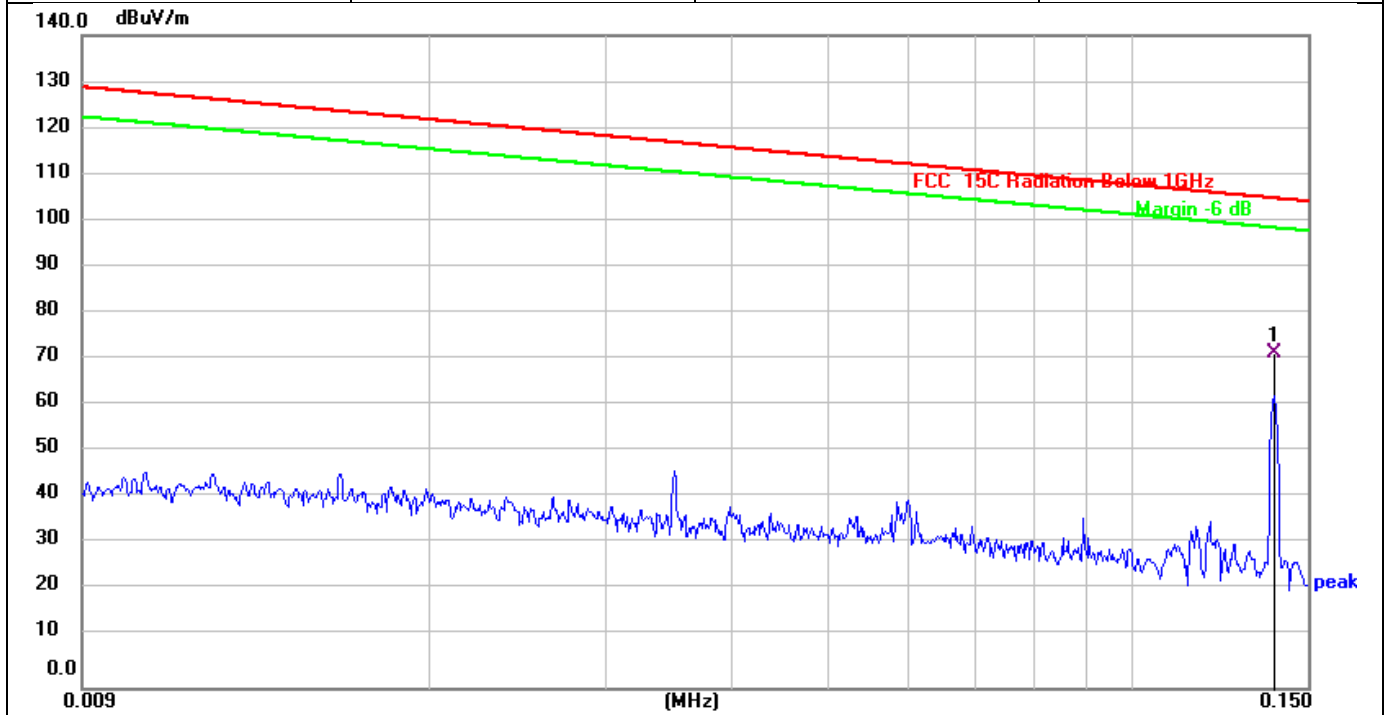

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1	*	0.1386	50.17	21.83	72.00	104.77	-32.77	QP

Frequency 150 kHz ~ 30 MHz


Test mode:	Mode 3	Polarization:	Site axis
Power supply:	Powered by adapter AC120V/60Hz	Test site:	RE chamber 1

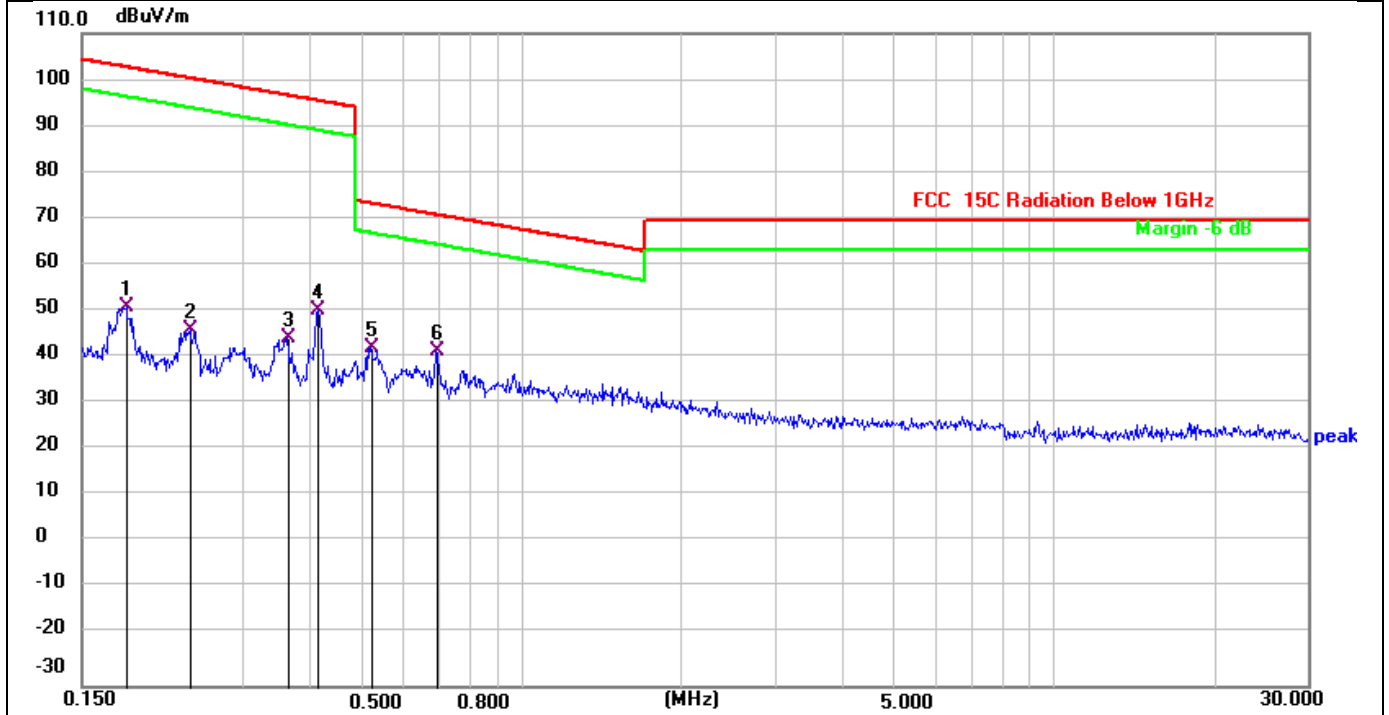

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.1815	29.44	21.88	51.32	102.43	-51.11	QP
2		0.2391	24.57	21.93	46.50	100.03	-53.53	QP
3		0.3634	22.93	21.81	44.74	96.40	-51.66	QP
4		0.4148	29.04	21.76	50.80	95.25	-44.45	QP
5		0.5210	21.03	21.69	42.72	73.27	-30.55	QP
6	*	0.6936	19.87	21.96	41.83	70.79	-28.96	QP

Frequency 30 MHz ~ 1 GHz-Adapter 1(model: A829-090223C-US2):


Test mode:	Mode 3	Polarization:	Horizontal
Power supply:	Powered by adapter AC120V/60Hz	Test site:	RE chamber 1

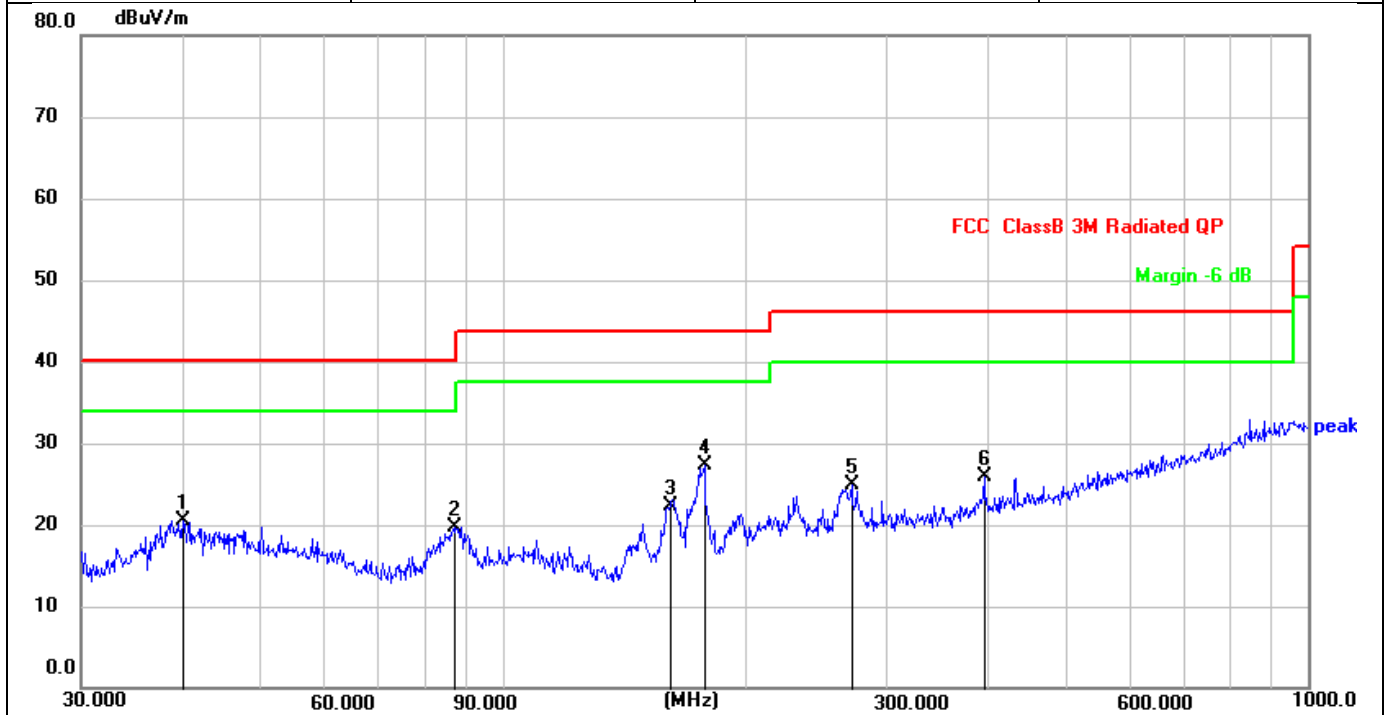

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.1347	33.09	-12.63	20.46	40.00	-19.54	QP
2	87.1117	34.47	-14.84	19.63	40.00	-20.37	QP
3	161.4742	36.77	-14.54	22.23	43.50	-21.27	QP
4 *	178.1327	40.94	-13.73	27.21	43.50	-16.29	QP
5	271.3246	34.25	-9.42	24.83	46.00	-21.17	QP
6	396.2415	33.31	-7.39	25.92	46.00	-20.08	QP

Frequency 30 MHz ~ 1 GHz-Adapter 1(model: A829-090223C-US2):


Test mode:	Mode 3	Polarization:	Vertical
Power supply:	Powered by adapter AC120V/60Hz	Test site:	RE chamber 1

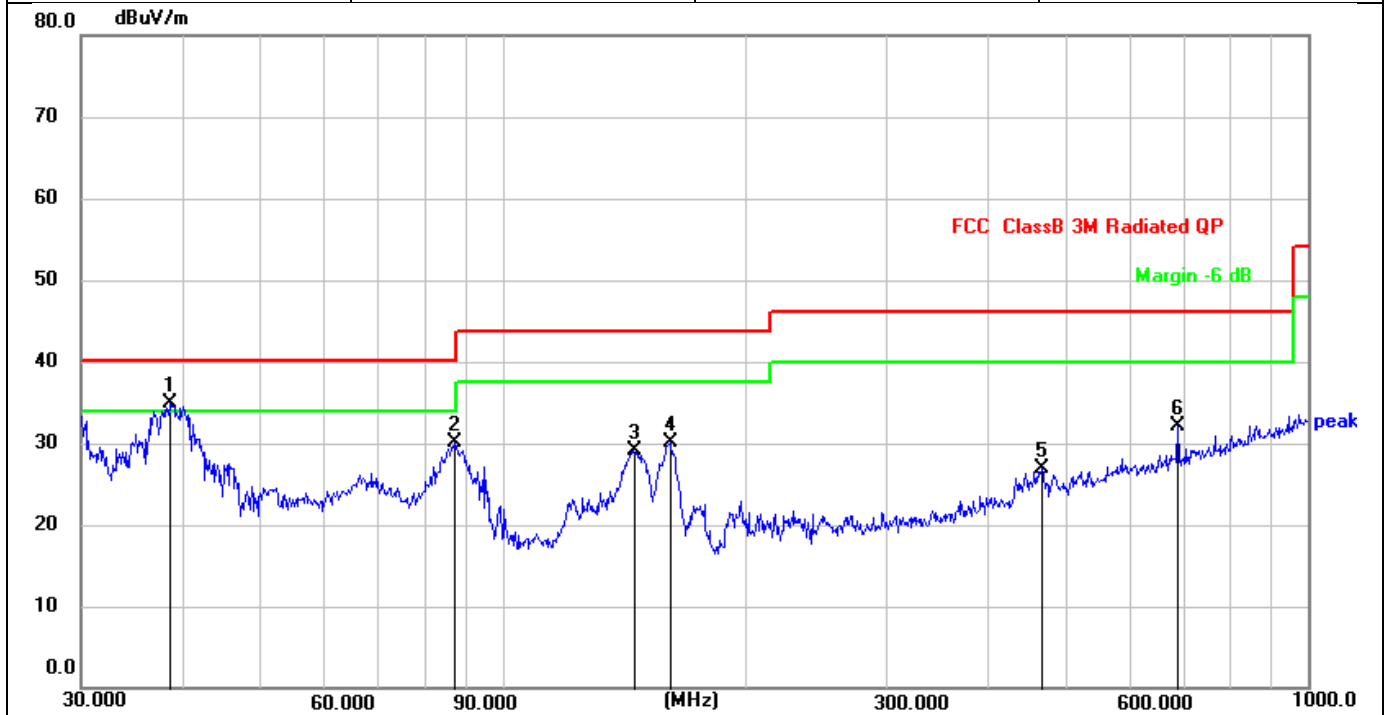

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	38.6160	47.81	-13.00	34.81	40.00	-5.19	QP
2	87.1117	45.02	-14.84	30.18	40.00	-9.82	QP
3	145.3506	44.54	-15.46	29.08	43.50	-14.42	QP
4	161.4742	44.70	-14.54	30.16	43.50	-13.34	QP
5	467.2349	32.96	-5.96	27.00	46.00	-19.00	QP
6	689.5644	33.96	-1.78	32.18	46.00	-13.82	QP

Frequency 30 MHz ~ 1 GHz-Adapter 2(model: PSD01-CU):


Test mode:	Mode 3	Polarization:	Horizontal
Power supply:	Powered by adapter AC120V/60Hz	Test site:	RE chamber 1

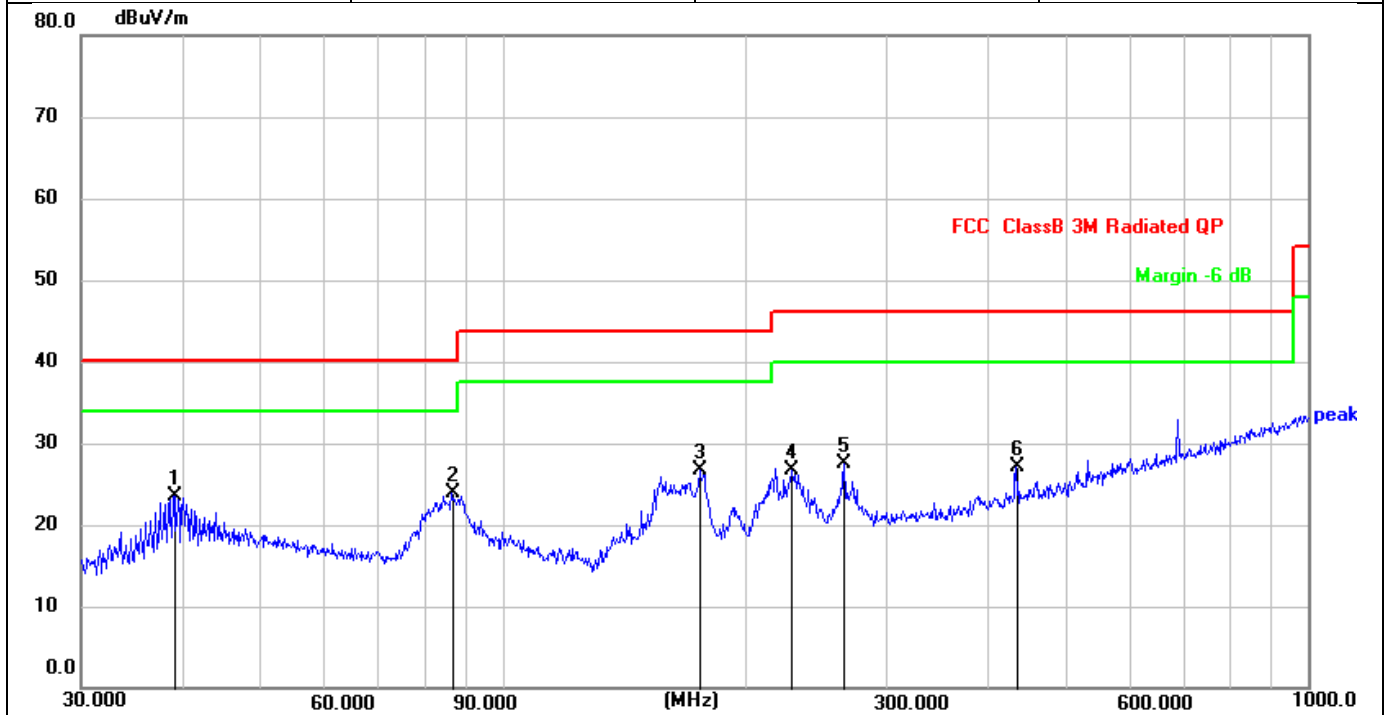

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.0245	36.37	-12.90	23.47	40.00	-16.53	QP
2 *	86.5029	38.84	-14.95	23.89	40.00	-16.11	QP
3	175.6516	40.61	-13.85	26.76	43.50	-16.74	QP
4	228.4904	37.48	-10.80	26.68	46.00	-19.32	QP
5	265.6757	37.11	-9.57	27.54	46.00	-18.46	QP
6	434.0651	33.73	-6.61	27.12	46.00	-18.88	QP

Frequency 30 MHz ~ 1 GHz-Adapter 2(model: PSD01-CU):


Test mode:	Mode 3	Polarization:	Vertical
Power supply:	Powered by adapter AC120V/60Hz	Test site:	RE chamber 1

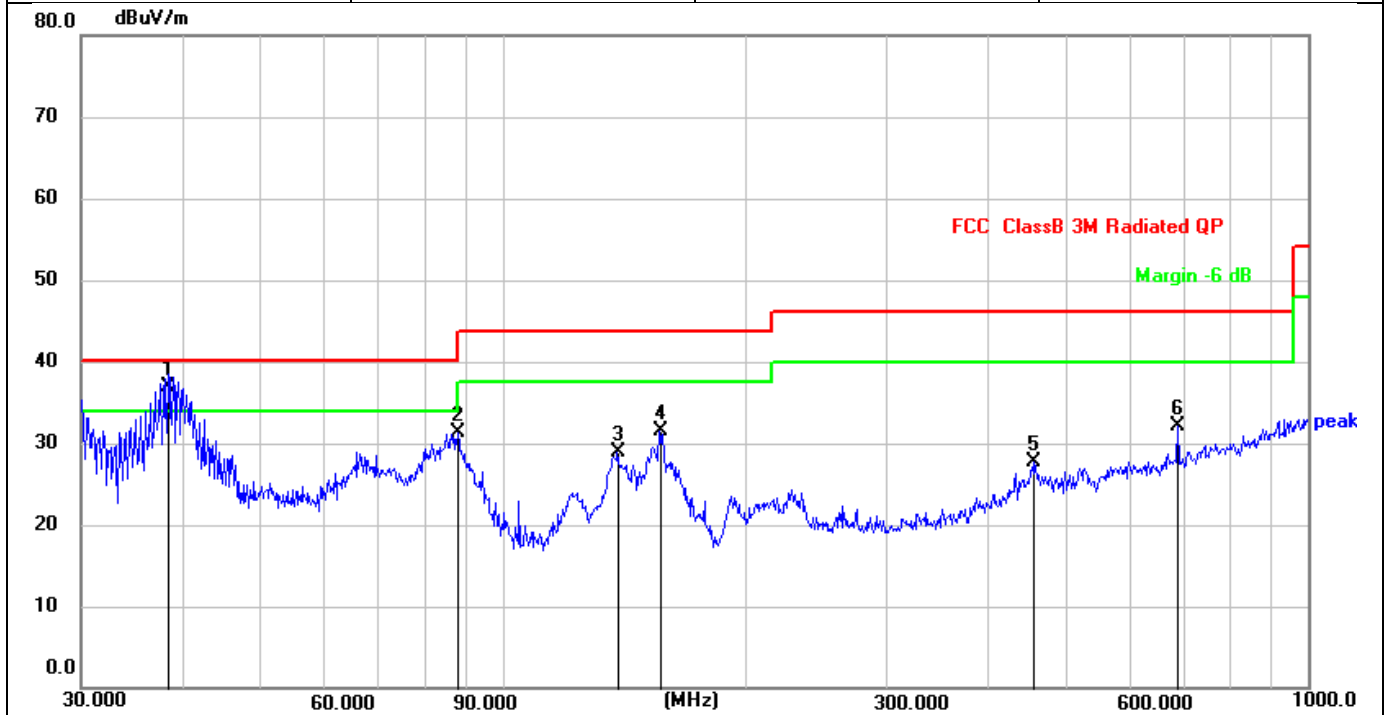

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	38.4809	49.93	-13.03	36.90	40.00	-3.10	QP
2	88.0329	46.05	-14.66	31.39	43.50	-12.11	QP
3	138.8735	44.33	-15.37	28.96	43.50	-14.54	QP
4	156.4578	46.48	-14.93	31.55	43.50	-11.95	QP
5	457.5073	33.79	-6.14	27.65	46.00	-18.35	QP
6	689.5644	33.92	-1.78	32.14	46.00	-13.86	QP

Frequency 30 MHz ~ 1 GHz-Adapter 3(model: GW-20PD301U):


Test mode:	Mode 3	Polarization:	Horizontal
Power supply:	Powered by adapter AC120V/60Hz	Test site:	RE chamber 1

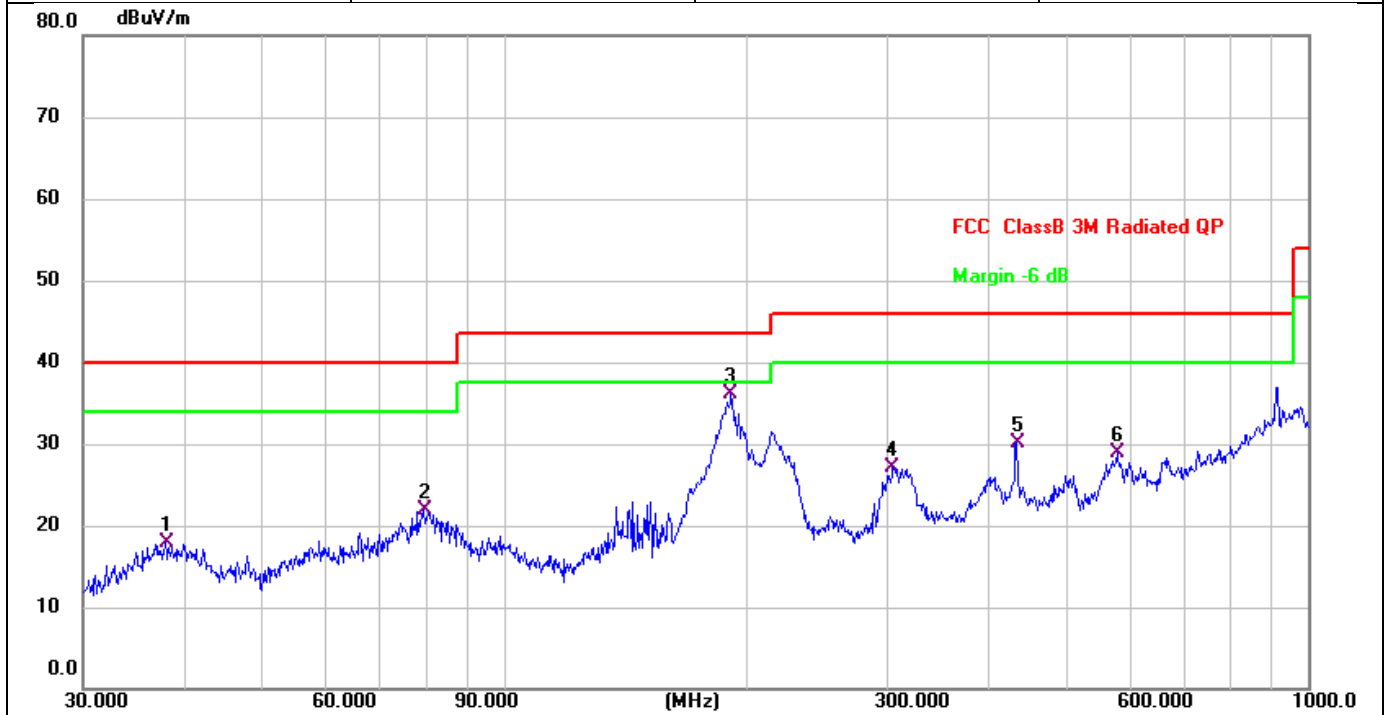

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.9450	33.80	-15.80	18.00	40.00	-22.00	QP
2	79.5209	39.96	-18.07	21.89	40.00	-18.11	QP
3 *	191.7450	49.98	-13.93	36.05	43.50	-7.45	QP
4	304.6099	36.83	-9.75	27.08	46.00	-18.92	QP
5	434.0651	35.77	-5.61	30.16	46.00	-15.84	QP
6	578.6699	31.12	-2.26	28.86	46.00	-17.14	QP

Frequency 30 MHz ~ 1 GHz-Adapter 3(model: GW-20PD301U):

Test mode:	Mode 3	Polarization:	Vertical
Power supply:	Powered by adapter AC120V/60Hz	Test site:	RE chamber 1

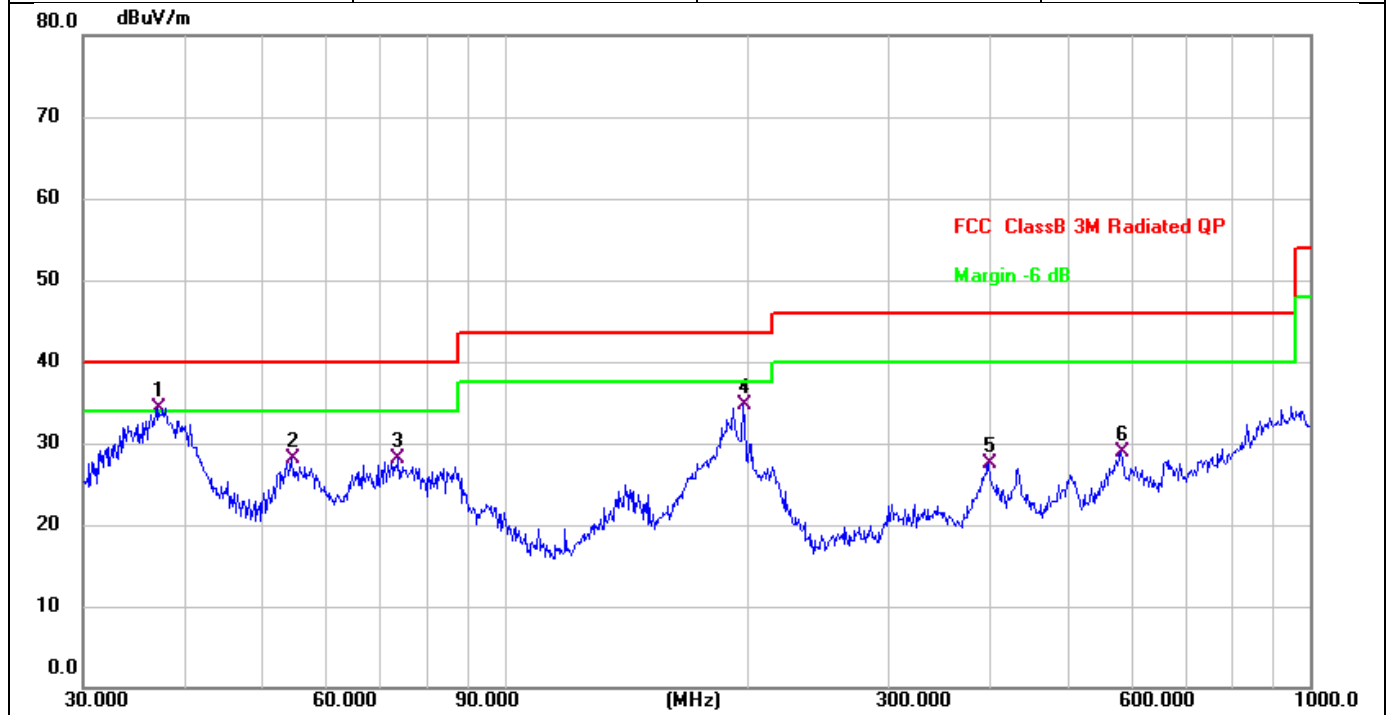

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	37.1550	47.85	-13.45	34.40	40.00	-5.60	QP
2	54.4516	40.08	-12.03	28.05	40.00	-11.95	QP
3	73.8756	42.04	-13.88	28.16	40.00	-11.84	QP
4	197.8928	45.45	-10.79	34.66	43.50	-8.84	QP
5	399.0302	36.39	-8.92	27.47	46.00	-18.53	QP
6	582.7425	30.57	-1.76	28.81	46.00	-17.19	QP

5.5 Occupied bandwidth test

5.5.1 Test Procedures


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation.
- d) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement
- e) Set detection mode to peak and trace mode to max hold.
- f) Determine the “-xx dB down amplitude” using [(reference value) - xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument.

5.5.2 Test Result

Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 300 Hz to perform the occupied bandwidth test.

For Transmitter 1:

Frequency kHz	20 dB occupied bandwidth kHz	99% occupied bandwidth kHz
127.1	0.809	0.733

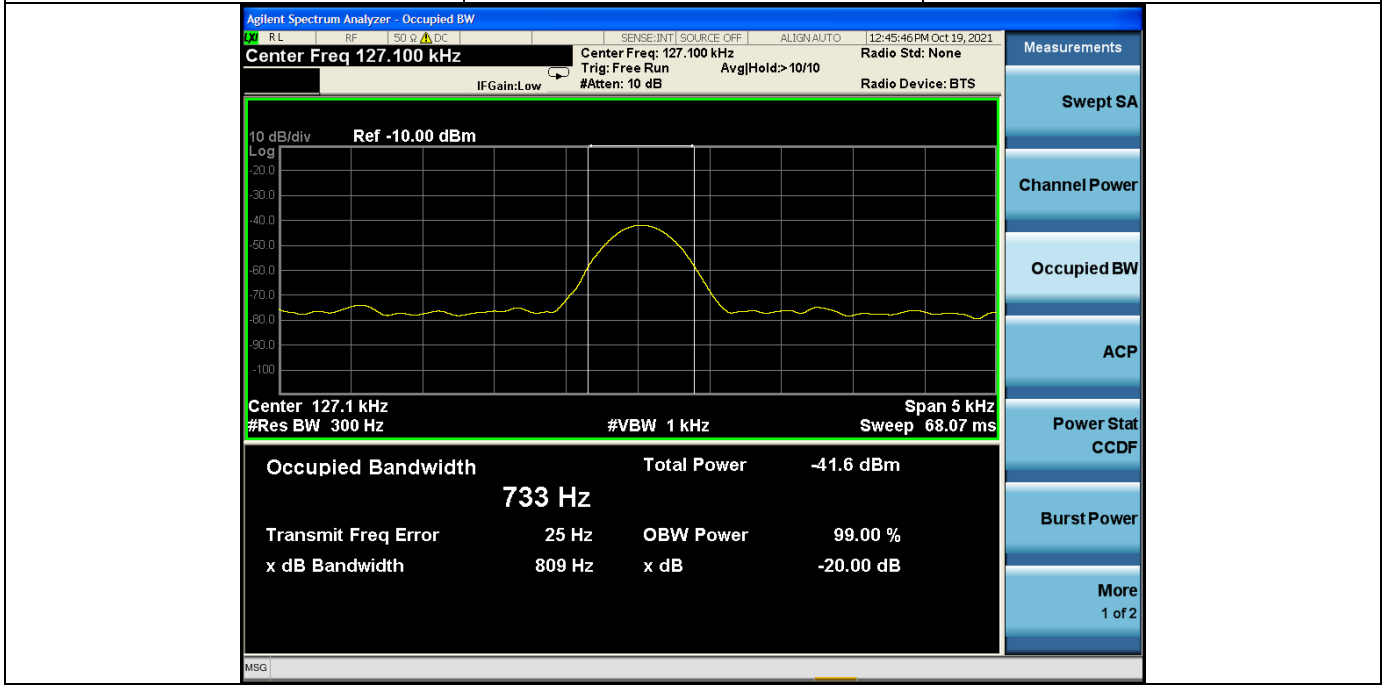

6 Photographs of the test setup

See the APPENDIX 2 – Test Setup Photo.

7 Photographs of the EUT

See the APPENDIX 1 - EUT Photo.

----End of Report----