

FCC REPORT

Applicant: Shenzhen LINGDU Auto Electronics Co., Ltd.
Address of Applicant: 1801-1808 Haiyun Building, No. 468 Minzhi Avenue,
Longhua, Shenzhen, Guangdong, China

Equipment Under Test (EUT)

Product Name: S04
Model No.: S04

FCC ID: 2ASWV-S04-S03

Applicable standards: FCC CFR Title 47 Part 15 Subpart B

Date of sample receipt: 11 Apr., 2019

Date of Test: 11 Apr., to 31 May, 2019

Date of report issued: 22 Jul., 2019

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

| Version No. | Date | Description |
|-------------|---------------|--------------------|
| 00 | 26 Jun., 2019 | Original |
| 01 | 22 Jun., 2019 | Update test photos |
| | | |
| | | |
| | | |

Tested by:

Carey Chen

Date:

22 Jul., 2019

Test Engineer

Reviewed by:

Wimer Zhang

Date:

22 Jul., 2019

Project Engineer

3 Contents

| | Page |
|---|-----------|
| 1 COVER PAGE..... | 1 |
| 2 VERSION | 2 |
| 3 CONTENTS | 3 |
| 4 TEST SUMMARY..... | 4 |
| 5 GENERAL INFORMATION..... | 5 |
| 5.1 CLIENT INFORMATION | 5 |
| 5.2 GENERAL DESCRIPTION OF E.U.T. | 5 |
| 5.3 TEST MODE..... | 5 |
| 5.4 MEASUREMENT UNCERTAINTY..... | 5 |
| 5.5 DESCRIPTION OF SUPPORT UNITS | 6 |
| 5.6 RELATED SUBMITTAL(S) / GRANT (S)..... | 6 |
| 5.7 DESCRIPTION OF CABLE USED | 6 |
| 5.8 LABORATORY FACILITY | 6 |
| 5.9 LABORATORY LOCATION | 6 |
| 5.10 TEST INSTRUMENTS LIST | 7 |
| 6 TEST RESULTS AND MEASUREMENT DATA..... | 8 |
| 6.1 CONDUCTED EMISSION..... | 8 |
| 6.2 RADIATED EMISSION | 9 |
| 7 TEST SETUP PHOTO | 19 |
| 8 EUT CONSTRUCTIONAL DETAILS | 21 |

4 Test Summary

| Test Item | Section in CFR 47 | Result |
|--------------------|-------------------|--------|
| Conducted Emission | Part 15.107 | N/A |
| Radiated Emission | Part 15.109 | Pass |

Remark:
Pass: The EUT complies with the essential requirements in the standard.
N/A: The EUT not applicable of the test item.

5 General Information

5.1 Client Information

| | |
|---------------|---|
| Applicant: | Shenzhen LINGDU Auto Electronics Co., Ltd. |
| Address: | 1801-1808 Haiyun Building, No. 468 Minzhi Avenue, Longhua, Shenzhen, Guangdong, China |
| Manufacturer: | Shenzhen LINGDU Auto Electronics Co., Ltd. |
| Address: | 1801-1808 Haiyun Building, No. 468 Minzhi Avenue, Longhua, Shenzhen, Guangdong, China |
| Factory: | Dongguan KAKA Electronic Technology Co., Ltd |
| Address: | No.395, Huanshi East Road, Shitanpu, TangxiaTown, Dongguan, Guangdong, China |

5.2 General Description of E.U.T.

| | |
|------------------------|---|
| Product Name: | S04 |
| Model No.: | S04 |
| Power supply: | Rechargeable Li-ion DC3.7V-500mAh |
| DC adapter : | Model: HC-801 Input: DC 12-24V, 0.15A Output: DC 5.0V, 2.5A |
| Test Sample Condition: | The test samples were provided in good working order with no visible defects. |

5.3 Test Mode

| Operating mode | Detail description |
|-------------------------|---|
| Charging+Recording mode | Keep the EUT in Charging+(HDMI Output)Recording mode (worst case mode) |
| Charging+Playing mode | Keep the EUT in Charging+(HDMI Output)Playing mode |
| GPS mode | Keep the EUT in GPS receiver mode |

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

5.4 Measurement Uncertainty

| Parameters | Expanded Uncertainty |
|-------------------------------------|----------------------|
| Conducted Emission (9kHz ~ 30MHz) | ±1.60 dB (k=2) |
| Radiated Emission (9kHz ~ 30MHz) | ±3.12 dB (k=2) |
| Radiated Emission (30MHz ~ 1000MHz) | ±4.54 dB (k=2) |
| Radiated Emission (1GHz ~ 18GHz) | ±5.84 dB (k=2) |
| Radiated Emission (18GHz ~ 40GHz) | ±3.36 dB (k=2) |

5.5 Description of Support Units

| Manufacturer | Description | Model | Serial Number | FCC ID/DoC |
|--------------|-------------------|------------|---------------|------------|
| Skyworth | Color LCD TV | 24E12HR | K026709 | N/A |
| GS Japan | Lead-acid battery | 55D26R-MFZ | 8362810610 | N/A |
| Samsung | TF(microSD) | MB-MC32D | N/A | N/A |

5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.

5.7 Description of Cable Used

| Cable Type | Description | Length | From | To |
|--------------------------|-------------|--------|------|-------------|
| Non-separating USB Cable | Unshielded | 3.5m | EUT | Car charger |

5.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.9 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
 Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
 Bao'an District, Shenzhen, Guangdong, China
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info@ccis-cb.com, Website: http://www.ccis-cb.com

5.10 Test Instruments list

| Radiated Emission: | | | | | |
|--------------------|-----------------|---------------|--------------------|----------------------|--------------------------|
| Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m SAC | SAEMC | 9m*6m*6m | 966 | 07-22-2017 | 07-21-2020 |
| Loop Antenna | SCHWARZBECK | FMZB1519B | 00044 | 03-18-2019 | 03-17-2020 |
| BiConiLog Antenna | SCHWARZBECK | VULB9163 | 497 | 03-18-2019 | 03-17-2020 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 916 | 03-18-2019 | 03-17-2020 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 1805 | 06-22-2017 | 06-21-2020 |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170582 | 11-21-2018 | 11-20-2019 |
| EMI Test Software | AUDIX | E3 | Version: 6.110919b | | |
| Pre-amplifier | HP | 8447D | 2944A09358 | 03-18-2019 | 03-17-2020 |
| Pre-amplifier | CD | PAP-1G18 | 11804 | 03-18-2019 | 03-17-2020 |
| Spectrum analyzer | Rohde & Schwarz | FSP30 | 101454 | 03-18-2019 | 03-17-2020 |
| Spectrum analyzer | Rohde & Schwarz | FSP40 | 100363 | 11-21-2018 | 11-20-2019 |
| EMI Test Receiver | Rohde & Schwarz | ESRP7 | 101070 | 03-18-2019 | 03-17-2020 |
| Cable | ZDECL | Z108-NJ-NJ-81 | 1608458 | 03-18-2019 | 03-17-2020 |
| Cable | MICRO-COAX | MFR64639 | K10742-5 | 03-18-2019 | 03-17-2020 |
| Cable | SUHNER | SUCOFLEX100 | 58193/4PE | 03-18-2019 | 03-17-2020 |

6 Test results and Measurement Data

6.1 Conducted Emission

| | | | |
|--|--|--------------------|-----------|
| Test Requirement: | FCC Part 15 B Section 15.107 | | |
| Test Method: | ANSI C63.4:2014 | | |
| Test Frequency Range: | 150kHz to 30MHz | | |
| Class / Severity: | Class B | | |
| Receiver setup: | RBW=9kHz, VBW=30kHz | | |
| Limit: | Frequency range (MHz) | Limit (dB μ V) | |
| | | Quasi-peak | Average |
| | 0.15-0.5 | 66 to 56* | 56 to 46* |
| | 0.5-5 | 56 | 46 |
| | 0.5-30 | 60 | 50 |
| * Decreases with the logarithm of the frequency. | | | |
| Test setup: | <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p> | | |
| Test procedure | <ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement. | | |
| Test Instruments: | Refer to section 5.9 for details | | |
| Test mode: | Refer to section 5.3 for details | | |
| Test results: | The power supply of the EUT is by the car charger, so not need to be tested. | | |

6.2 Radiated Emission

| | | | | | |
|-----------------------|--|--------------------|------------|---------------|------------------|
| Test Requirement: | FCC Part 15 B Section 15.109 | | | | |
| Test Method: | ANSI C63.4:2014 | | | | |
| Test Frequency Range: | 30MHz to 25000MHz | | | | |
| Test site: | Measurement Distance: 3m (Semi-Anechoic Chamber) | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Remark |
| | 30MHz-1GHz | Quasi-peak | 120kHz | 300kHz | Quasi-peak Value |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value |
| RMS | | 1MHz | 3MHz | Average Value | |
| Limit: | Frequency | Limit (dBuV/m @3m) | | | Remark |
| | 30MHz-88MHz | 40.0 | | | Quasi-peak Value |
| | 88MHz-216MHz | 43.5 | | | Quasi-peak Value |
| | 216MHz-960MHz | 46.0 | | | Quasi-peak Value |
| | 960MHz-1GHz | 54.0 | | | Quasi-peak Value |
| | Above 1GHz | 54.0 | | | Average Value |
| 74.0 | | | Peak Value | | |
| Test setup: | Below 1GHz | | | | |
| | | | | | |
| Test setup: | Above 1GHz | | | | |
| | | | | | |


| | |
|--------------------------|---|
| <p>Test Procedure:</p> | <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. |
| <p>Test Instruments:</p> | <p>Refer to section 5.9 for details</p> |
| <p>Test mode:</p> | <p>Refer to section 5.3 for details</p> |
| <p>Test results:</p> | <p>Passed</p> |
| <p>Remark:</p> | <p>All of the observed value above 6GHz were the noise floor , which were no recorded</p> |

Measurement Data:

Below 1GHz:

DC 12V:

| | | | |
|------------------------|----------------|-----------------------|---------------------------|
| Product Name: | S04 | Product model: | S04 |
| Test By: | Carey | Test mode: | Charging&Recording mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Vertical |
| Test Voltage: | DC 12V | Environment: | Temp: 24°C Humi: 57% |

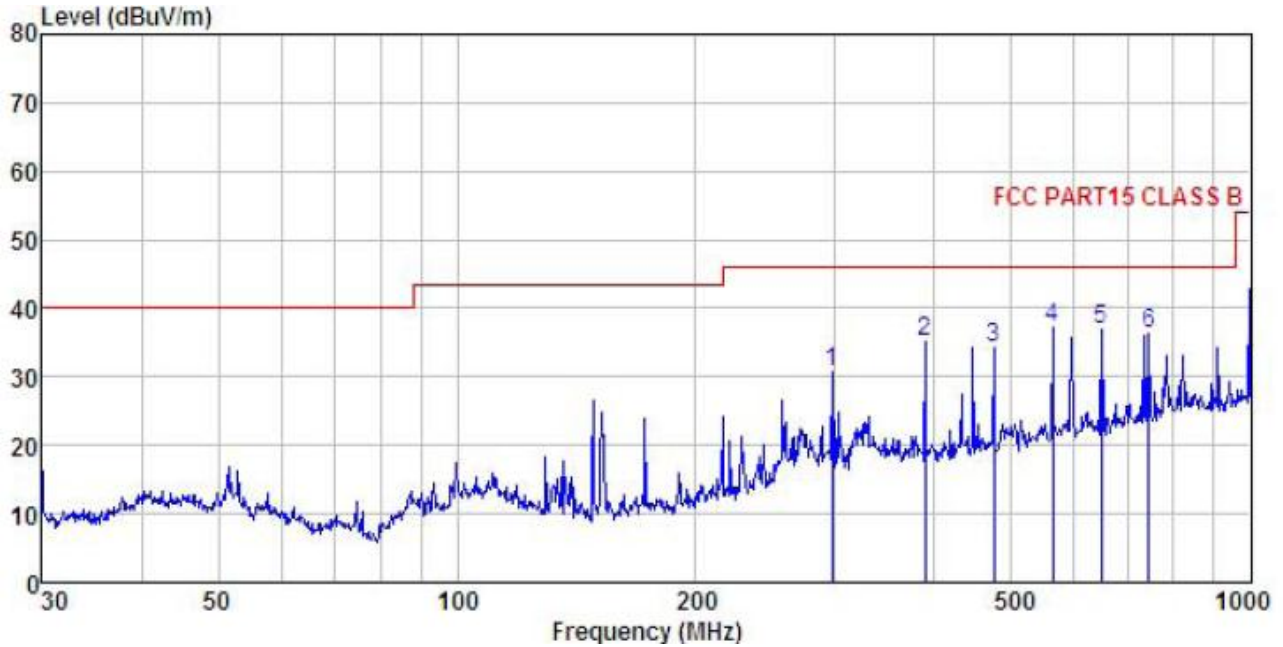


| | ReadAntenna | Cable Preamp | Limit | Over | | | | | |
|------|-------------|--------------|-------|--------|--------|-------|-------|--------|----|
| Freq | Level | Factor | Loss | Factor | Level | | | | |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | | | | |
| 1 | 297.224 | 42.63 | 13.56 | 2.93 | 28.46 | 30.66 | 46.00 | -15.34 | QP |
| 2 | 389.355 | 45.71 | 15.15 | 3.08 | 28.73 | 35.21 | 46.00 | -10.79 | QP |
| 3 | 475.499 | 42.44 | 17.38 | 3.41 | 28.91 | 34.32 | 46.00 | -11.68 | QP |
| 4 | 562.662 | 43.55 | 18.67 | 3.90 | 29.06 | 37.06 | 46.00 | -8.94 | QP |
| 5 | 649.660 | 42.12 | 19.70 | 3.86 | 28.78 | 36.90 | 46.00 | -9.10 | QP |
| 6 | 744.866 | 39.80 | 20.59 | 4.34 | 28.50 | 36.23 | 46.00 | -9.77 | QP |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------------|----------------|----------------|-------------------------|
| Product Name: | S04 | Product model: | S04 |
| Test By: | Carey | Test mode: | Charging&Recording mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Horizontal |
| Test Voltage: | DC 12V | Environment: | Temp: 24°C Huni: 57% |

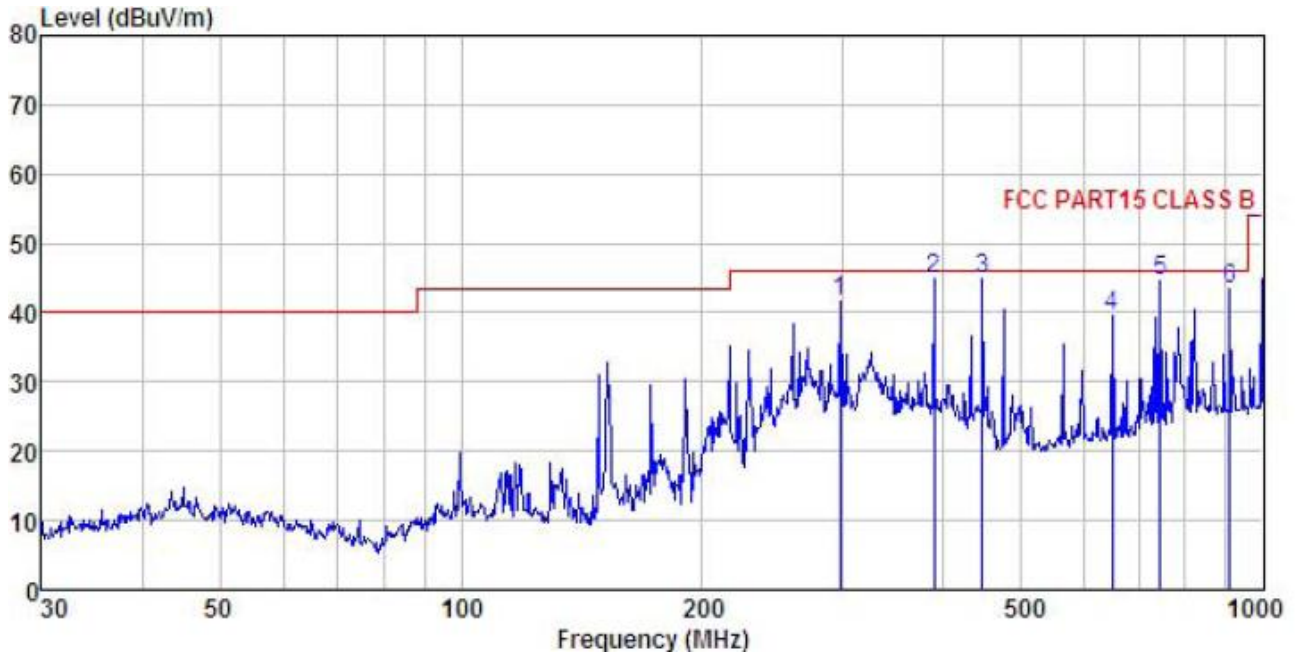


| | ReadAntenna | Cable Preamp | Limit | Over | | | | | |
|------|-------------|--------------|-------|-------|--------|-------|-------|-------|----|
| Freq | Level | Loss | Line | Limit | Remark | | | | |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | | | | |
| 1 | 297.224 | 53.45 | 13.56 | 2.93 | 28.46 | 41.48 | 46.00 | -4.52 | QP |
| 2 | 389.355 | 55.32 | 15.15 | 3.08 | 28.73 | 44.82 | 46.00 | -1.18 | QP |
| 3 | 446.414 | 54.06 | 16.41 | 3.19 | 28.86 | 44.80 | 46.00 | -1.20 | QP |
| 4 | 649.660 | 44.90 | 19.70 | 3.86 | 28.78 | 39.68 | 46.00 | -6.32 | QP |
| 5 | 744.866 | 48.11 | 20.59 | 4.34 | 28.50 | 44.54 | 46.00 | -1.46 | QP |
| 6 | 909.667 | 44.79 | 22.53 | 3.81 | 27.85 | 43.28 | 46.00 | -2.72 | QP |

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

DC 24V:

| | | | |
|-----------------|----------------|----------------|-------------------------|
| Product Name: | S04 | Product model: | S04 |
| Test By: | Carey | Test mode: | Charging&Recording mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Vertical |
| Test Voltage: | DC 24V | Environment: | Temp: 24°C Huni: 57% |

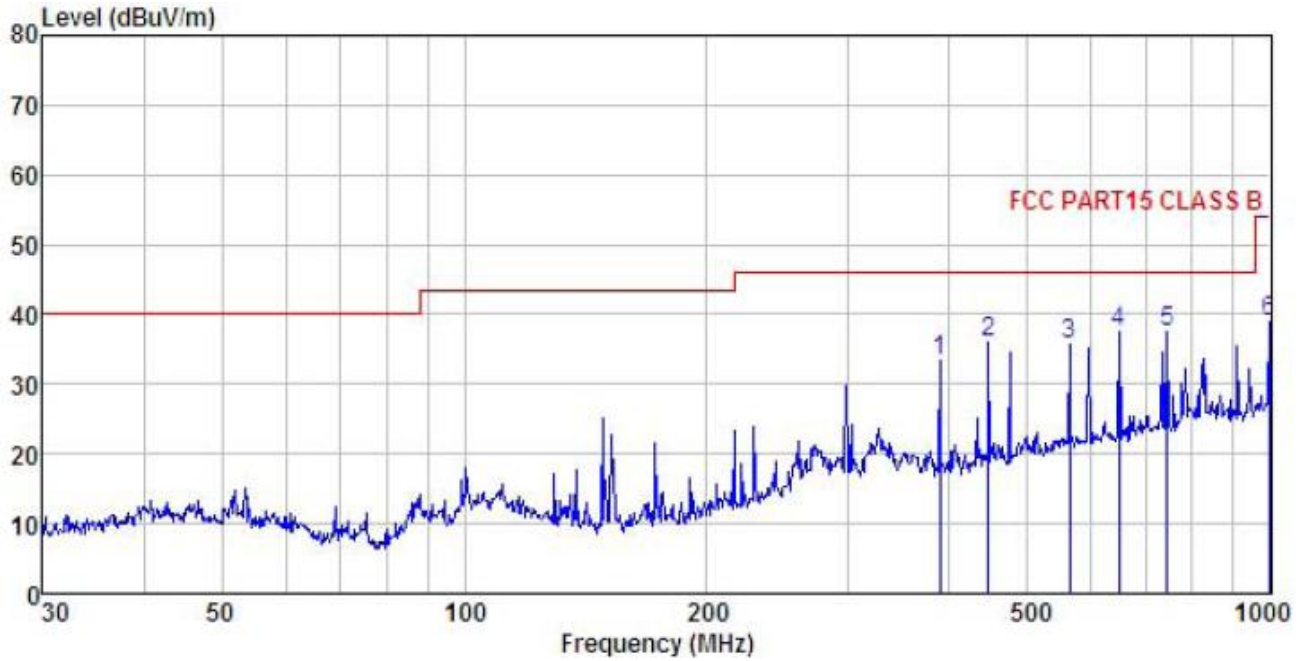


| | ReadAntenna | Cable Preamp | Limit | Over | Remark | | | |
|------|-------------|--------------|-------|--------|--------|--------|-------|-----------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 389.355 | 43.75 | 15.15 | 3.08 | 28.73 | 33.25 | 46.00 | -12.75 QP |
| 2 | 446.414 | 45.22 | 16.41 | 3.19 | 28.86 | 35.96 | 46.00 | -10.04 QP |
| 3 | 562.662 | 42.29 | 18.67 | 3.90 | 29.06 | 35.80 | 46.00 | -10.20 QP |
| 4 | 649.660 | 42.60 | 19.70 | 3.86 | 28.78 | 37.38 | 46.00 | -8.62 QP |
| 5 | 744.866 | 40.97 | 20.59 | 4.34 | 28.50 | 37.40 | 46.00 | -8.60 QP |
| 6 | 996.500 | 39.31 | 22.79 | 4.45 | 27.45 | 39.10 | 54.00 | -14.90 QP |

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------------|----------------|----------------|-------------------------|
| Product Name: | S04 | Product model: | S04 |
| Test By: | Carey | Test mode: | Charging&Recording mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Horizontal |
| Test Voltage: | DC 24V | Environment: | Temp: 24°C Huni: 57% |

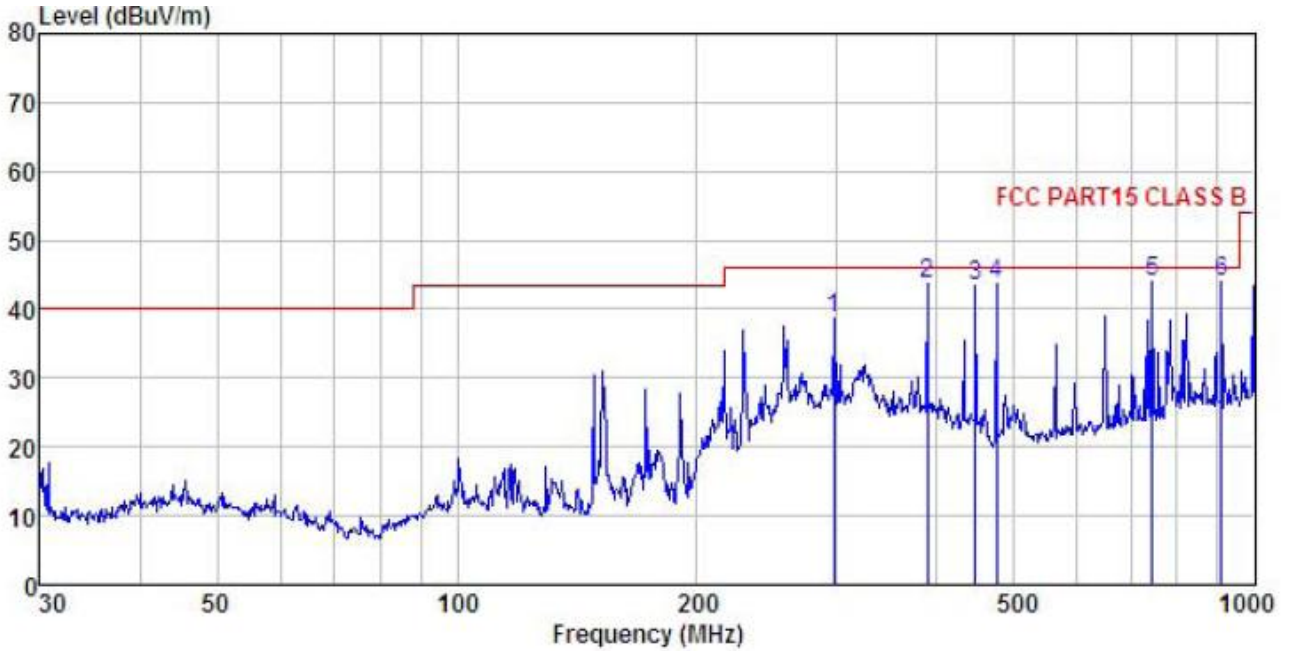

| | ReadAntenna | Cable Preamp | Limit | Over | | | | | |
|------|-------------|--------------|-------|-------|--------|-------|-------|-------|----|
| Freq | Level | Loss | Line | Limit | Remark | | | | |
| MHz | dBuV | dB/m | dB | dB | | | | | |
| 1 | 297.224 | 50.78 | 13.56 | 2.93 | 28.46 | 38.81 | 46.00 | -7.19 | QP |
| 2 | 389.355 | 54.06 | 15.15 | 3.08 | 28.73 | 43.56 | 46.00 | -2.44 | QP |
| 3 | 446.414 | 52.65 | 16.41 | 3.19 | 28.86 | 43.39 | 46.00 | -2.61 | QP |
| 4 | 475.499 | 51.84 | 17.38 | 3.41 | 28.91 | 43.72 | 46.00 | -2.28 | QP |
| 5 | 744.866 | 47.55 | 20.59 | 4.34 | 28.50 | 43.98 | 46.00 | -2.02 | QP |
| 6 | 909.667 | 45.35 | 22.53 | 3.81 | 27.85 | 43.84 | 46.00 | -2.16 | QP |


Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz:

DC 12V:

| | | | |
|-----------------|---------------|----------------|-------------------------|
| Product Name: | S04 | Product model: | S04 |
| Test By: | Carey | Test mode: | Charging&Recording mode |
| Test Frequency: | 1 GHz ~ 6 GHz | Polarization: | Vertical |
| Test Voltage: | DC 12V | Environment: | Temp: 24°C Humi: 57% |

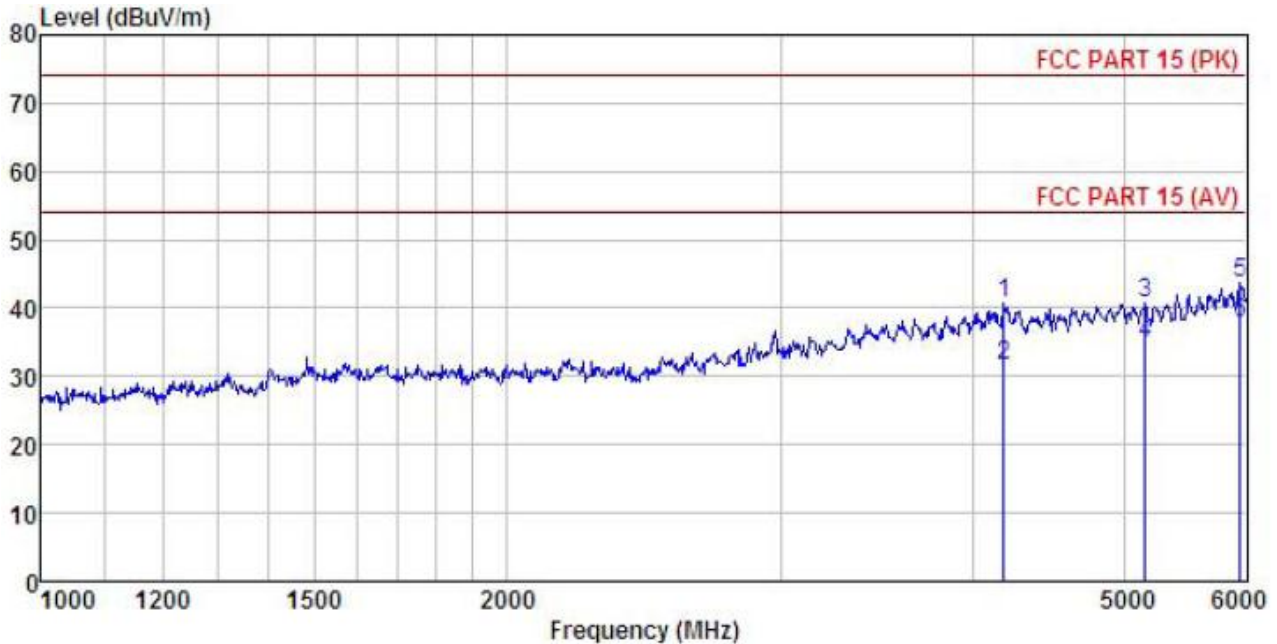


| | ReadAntenna | Cable Preamp | Limit | Over | | | | | |
|------|-------------|--------------|-------|-------|--------|-------|-------|--------|---------|
| Freq | Level | Loss | Line | Limit | Remark | | | | |
| MHz | dBuV | dB/m | dB | dB | | | | | |
| 1 | 4185.457 | 45.72 | 30.34 | 6.37 | 41.81 | 40.62 | 74.00 | -33.38 | Peak |
| 2 | 4185.457 | 36.69 | 30.34 | 6.37 | 41.81 | 31.59 | 54.00 | -22.41 | Average |
| 3 | 5161.626 | 43.93 | 31.80 | 7.06 | 41.94 | 40.85 | 74.00 | -33.15 | Peak |
| 4 | 5161.626 | 37.84 | 31.80 | 7.06 | 41.94 | 34.76 | 54.00 | -19.24 | Average |
| 5 | 5946.487 | 45.17 | 32.69 | 7.92 | 42.04 | 43.74 | 74.00 | -30.26 | Peak |
| 6 | 5946.487 | 39.26 | 32.69 | 7.92 | 42.04 | 37.83 | 54.00 | -16.17 | Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------------|---------------|----------------|-------------------------|
| Product Name: | S04 | Product model: | S04 |
| Test By: | Carey | Test mode: | Charging&Recording mode |
| Test Frequency: | 1 GHz ~ 6 GHz | Polarization: | Horizontal |
| Test Voltage: | DC 12V | Environment: | Temp: 24°C Huni: 57% |

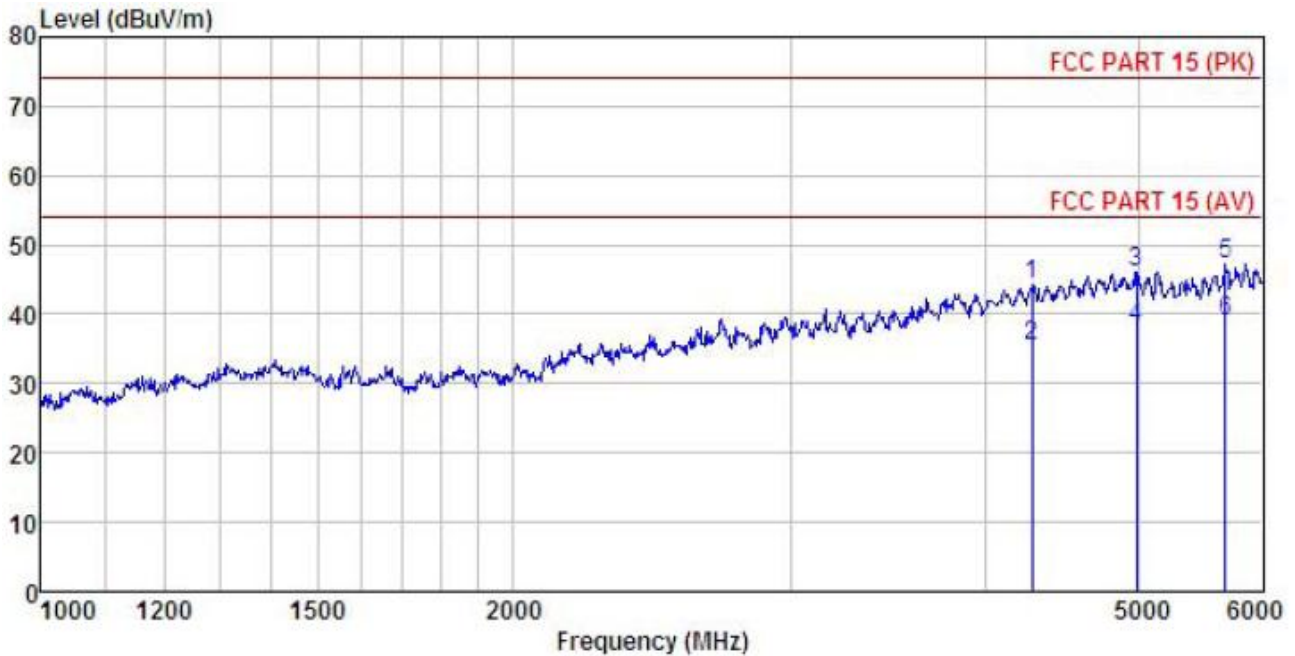


| | Read Freq | Antenna Level | Antenna Factor | Cable Loss | Preamp Factor | Level | Limit Line | Over Limit | Remark |
|---|-----------|---------------|----------------|------------|---------------|--------|------------|------------|---------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 4276.423 | 49.23 | 30.36 | 6.52 | 41.87 | 44.24 | 74.00 | -29.76 | Peak |
| 2 | 4276.423 | 40.48 | 30.36 | 6.52 | 41.87 | 35.49 | 54.00 | -18.51 | Average |
| 3 | 4988.864 | 49.66 | 31.38 | 6.93 | 41.88 | 46.09 | 74.00 | -27.91 | Peak |
| 4 | 4988.864 | 41.57 | 31.38 | 6.93 | 41.88 | 38.00 | 54.00 | -16.00 | Average |
| 5 | 5685.998 | 48.87 | 32.64 | 7.55 | 41.89 | 47.17 | 74.00 | -26.83 | Peak |
| 6 | 5685.998 | 40.73 | 32.64 | 7.55 | 41.89 | 39.03 | 54.00 | -14.97 | Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

DC 24V:

| | | | |
|-----------------|---------------|----------------|-------------------------|
| Product Name: | S04 | Product model: | S04 |
| Test By: | Carey | Test mode: | Charging&Recording mode |
| Test Frequency: | 1 GHz ~ 6 GHz | Polarization: | Vertical |
| Test Voltage: | DC 24V | Environment: | Temp: 24°C Huni: 57% |

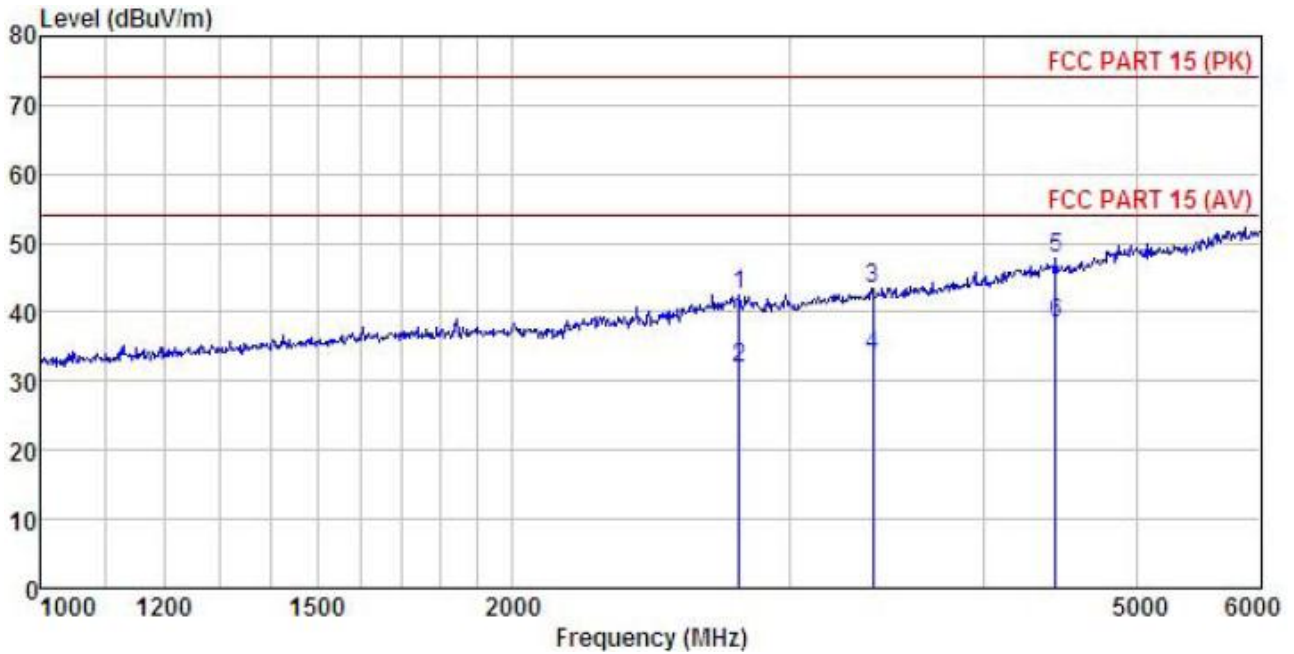


| | Read Freq | Antenna Level | Cable Factor | Preamp Loss | Level | Limit | Over | Remark |
|---|-----------|---------------|--------------|-------------|--------|--------|-------|----------------|
| | MHz | dBuV | dB/m | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2788.474 | 49.19 | 28.06 | 5.12 | 41.67 | 42.52 | 74.00 | -31.48 Peak |
| 2 | 2788.474 | 38.70 | 28.06 | 5.12 | 41.67 | 32.03 | 54.00 | -21.97 Average |
| 3 | 3394.076 | 48.42 | 28.58 | 5.62 | 41.35 | 43.40 | 74.00 | -30.60 Peak |
| 4 | 3394.076 | 38.65 | 28.58 | 5.62 | 41.35 | 33.63 | 54.00 | -20.37 Average |
| 5 | 4439.613 | 50.27 | 30.39 | 6.75 | 42.00 | 47.75 | 74.00 | -26.25 Peak |
| 6 | 4439.613 | 40.78 | 30.39 | 6.75 | 42.00 | 38.26 | 54.00 | -15.74 Average |

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------------|---------------|----------------|-------------------------|
| Product Name: | S04 | Product model: | S04 |
| Test By: | Carey | Test mode: | Charging&Recording mode |
| Test Frequency: | 1 GHz ~ 6 GHz | Polarization: | Horizontal |
| Test Voltage: | DC 24V | Environment: | Temp: 24°C Huni: 57% |

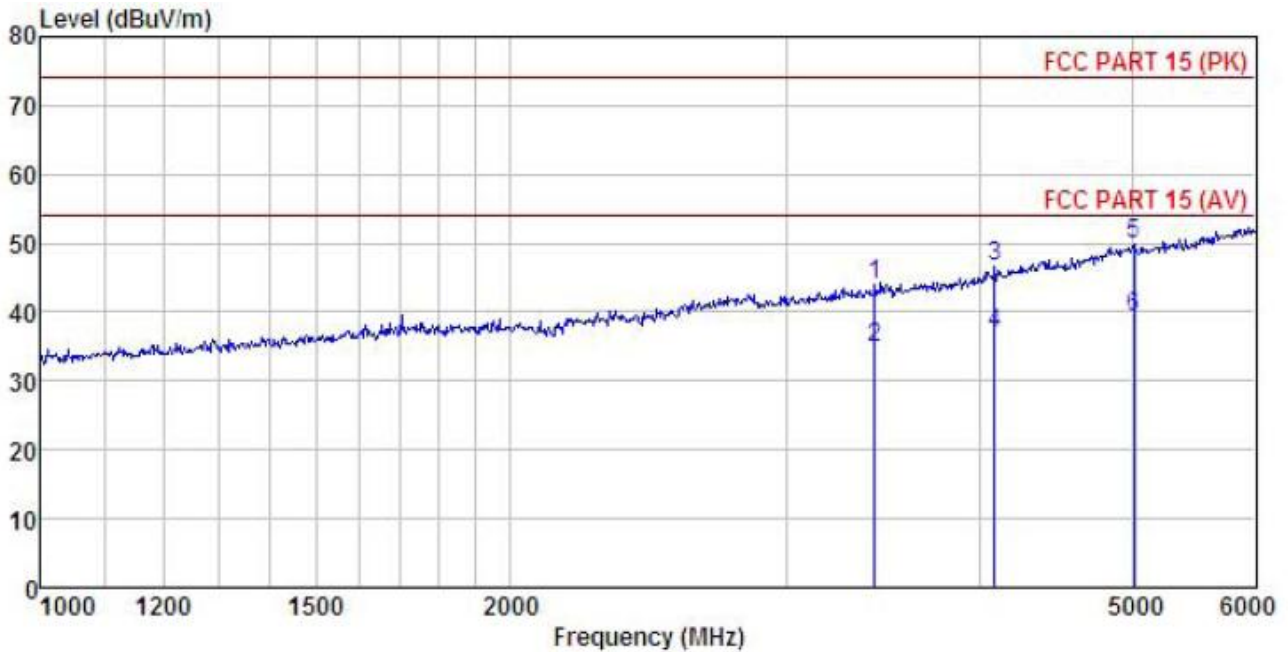

| | ReadAntenna | Cable Preamp | Limit | Over | | | | | |
|------|-------------|--------------|-------|--------|--------|-------|-------|--------|---------|
| Freq | Level | Factor | Loss | Factor | Level | | | | |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | | | | |
| 1 | 3420.597 | 49.04 | 28.59 | 5.65 | 41.37 | 44.06 | 74.00 | -29.94 | Peak |
| 2 | 3420.597 | 39.83 | 28.59 | 5.65 | 41.37 | 34.85 | 54.00 | -19.15 | Average |
| 3 | 4083.249 | 49.58 | 30.32 | 6.23 | 41.81 | 46.55 | 74.00 | -27.45 | Peak |
| 4 | 4083.249 | 39.85 | 30.32 | 6.23 | 41.81 | 36.82 | 54.00 | -17.18 | Average |
| 5 | 5018.643 | 50.82 | 31.45 | 6.95 | 41.89 | 49.83 | 74.00 | -24.17 | Peak |
| 6 | 5018.643 | 40.28 | 31.45 | 6.95 | 41.89 | 39.29 | 54.00 | -14.71 | Average |

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.