



LED STRIP LIGHTS



User Manual



Product Parameters


- LED type: SMD RGB.
- Input voltage of adapter: AC 100V-240V.
- Output voltage of adapter: DC 5V.
- Output power of adapter: 30W.
- APP control distance: within 10M.
- IR remote distance: within 5M.
- Working temperature: -20°C ~ 45°C.
- Width of strip light: 1CM.
- Water proof: No.
- Cuttable for LED strip lights: Yes, 6 leds every cut.

23-keys Infrared Remote Control

1.OFF: Turn off.
2.ON: Turn on.
3. Brightness: Adjust the brightness levels of the colors from bright to dim (10 levels).


Instructions

- Wipe the surface of the object clean, and keep the surface clean and dry.
- Remove the film of the led strip lights.
- Press the led strip lights on the object with your hand to make the led strip lights and the object closely close together.

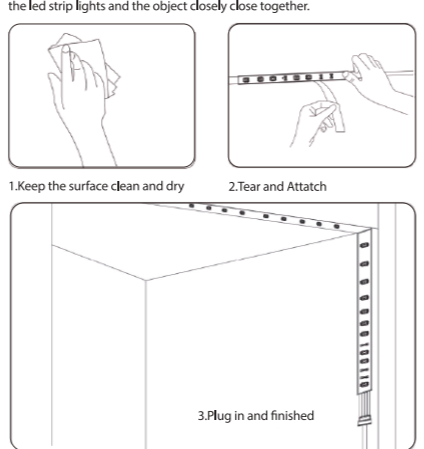


TechLife Pro App's User Manual

- Download and install APP. Use your phone to scan the QR code below or search "TechLife Pro" in application market to download and install the app.



- Register/Login/Forget password Register. If you don't have an app account, register an account to login. This page describes the registration process. A. Open app, tap the "Create your TechLife Pro account" to enter the register page, as shown in the picture 1. B. Enter the User and the password, as shown in the picture 2. Tap the "Register" will create new account. Or enter the E-mail and tap "Get Verification Code", the verification code will send to your E-mail, as shown in the picture 3. Enter the verification code, as shown in the picture 4, and also enter the password. Tap the "Modify" will create new account, as shown in the picture 5.

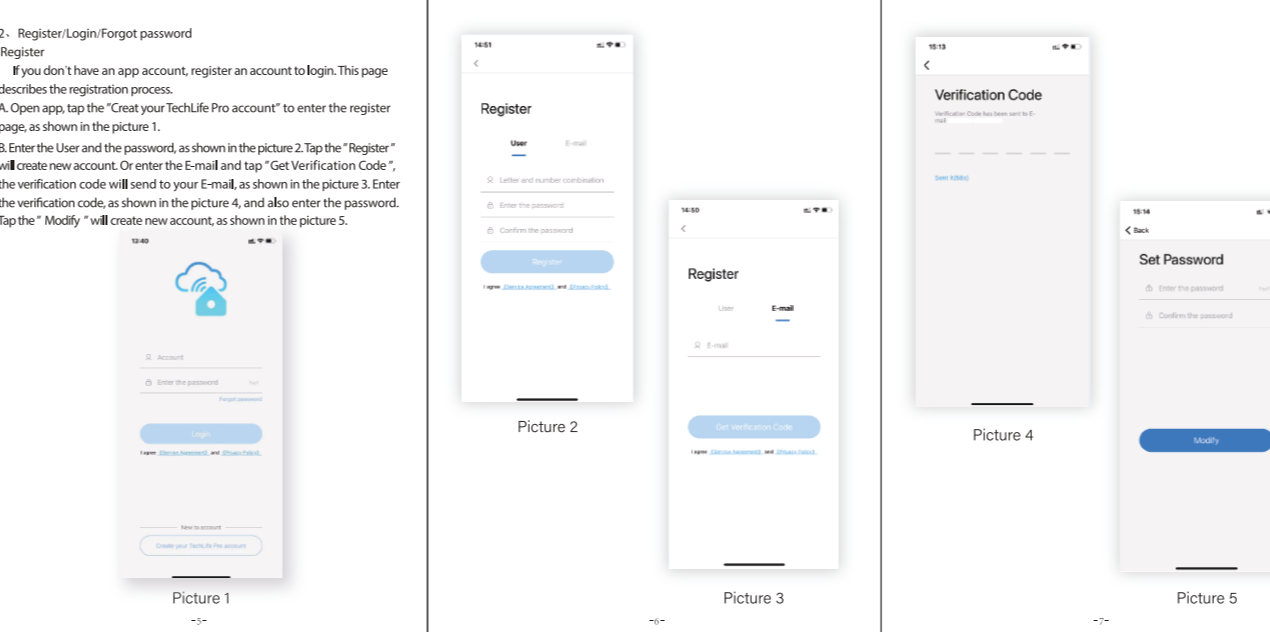


Common Troubleshooting


*The controller was connected the power, but not light up.
1. Check the input power supply: please use the power adapter that we equipped or other adapters with the same specification as ours. The input voltage must meet the voltage requirement of the led strip lights. The input voltage is lower than requirement, the led strip lights will not be turn on, while higher voltage may damage the circuit. The output power of the adapter (KW value) must equal to, or higher than the power of the led strip lights.
2. Check whether the connector is connected correctly with the strip lights. Make sure each interface is connected correctly.
3. Check whether the remote control is open.
*If the led strip lights are able to light up, but the remote control does not work or can't control the led strip lights.
1. Check whether the insulation sheet is removed from the remote control.
2. Make sure the battery on the remote control is installed correctly.
3. Ensure that the remote is working within 5 meters and aligned to the infrared receiver of the controller.
4. Try to replace the battery.

Log in


Account and password. Enter the User or E-mail and password, then tap "Log in", as shown in the picture 1.
Forgot password. To find your password back, please follow the procedure: A. Enter the E-mail and tap "Get Verification Code", as shown in the picture 6 and picture 4. And also enter the new password, as shown in the picture 5. B. Tap the "Modify" to set the new password.

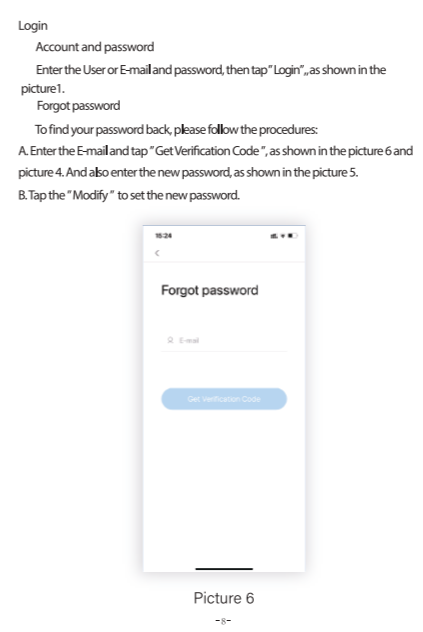


- Home - Add device - Combo mode. A. Tap the "Add device", as shown in the picture 7. The App will auto scanning the device, tap the device at the beginning of "TL" as shown in the picture 8. Or you can from "Add manually", tap the "Combo mode" as shown in the picture 8. Note: Combo Wi-Fi is a combination of 2.4GHz Wi-Fi and 2.4GHz Bluetooth. Phone need to open the Wi-Fi, Bluetooth and Location Services. Location Services: For iOS and Android, allow "Location Services" can auto to get the router Wi-Fi name. For Android version > 12, to scanning the Bluetooth, need to allow "Location Services". For Android version > 12, to scanning the Bluetooth, only need to Allow the "Nearby devices" permission, not need the "Location Services". B. Make sure the light enter the Combo mode, tap the "Confirm light blinks rapidly", as shown in the picture 9. C. Select a Wi-Fi name and enter the password, tap the "OK", as shown in the picture 10. D. Select the device at the beginning of "TL", and tap the "Next", as shown in picture 11 and will enter the connecting progress, as shown in the picture 12. E. When network configuration successful, the app "Home" page will show the device type, tap the device list will enter the "Control" page, as shown in the picture 15 and picture 16. F. If network configuration failed, as shown in picture 14, you can retry network configuration progress again.

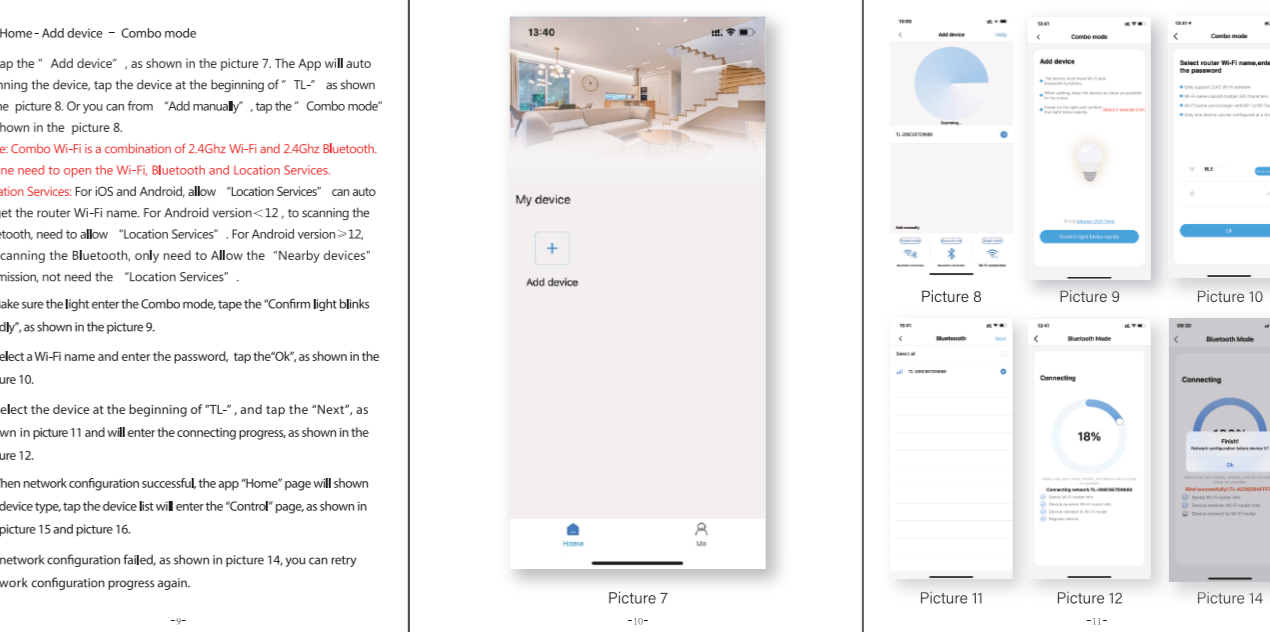


- Home Function: "Adjust", "Music", "Style", "Mic" and "Timer". A. Tap the "Adjust", as you can adjust the color, as shown in the picture 16. B. Tap the "Music", as shown in the picture 17, by entering this function, playing music, the light can change with the frequency of music and adjust the atmosphere.

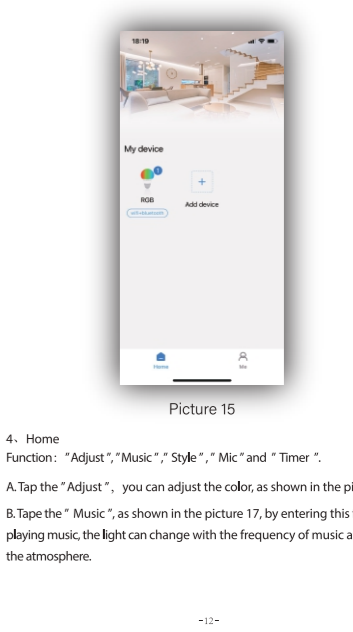

- Tap the "Style-Default", as shown in the picture 18. There are dozens of options. Light will run the style as you select. Tap the "Style-Custom", as shown in the picture 19, users can OFF their favorite mode.
- Tap the "Mic-Phone mic", as shown in the picture 20, by entering this function, the light can change color with the sound collected by phone mic. Tap the "Mic-Device mic", as shown in the picture 21, by entering this function, the light can change color with the sound collected by Device mic.
- Tap the "Timer", as shown in the picture 22 and the picture 23. It can set the switch of the light in different time periods to enrich the intellectualized control.
- Tap the "Device Settings" column, as shown in the picture 24, click the device MAC address, can enter the "Device Settings". Here you can Rename, Share device, Unshare device, RGB Signal Sequence, Factory Reset, Upgrade and so on, as shown in the picture 25. Note: Share device will sharing the bound device to other exist accounts. Factory reset refers to restoring the current equipment to the waiting configuration network status, and at the same time, the cloud data of the current device will be cleared.
- Tap the "Group manage" column and tap the "Group", as shown in the picture 24, will enter the "Group manage", the light can be grouped to facilitate control, as shown in the picture 26.

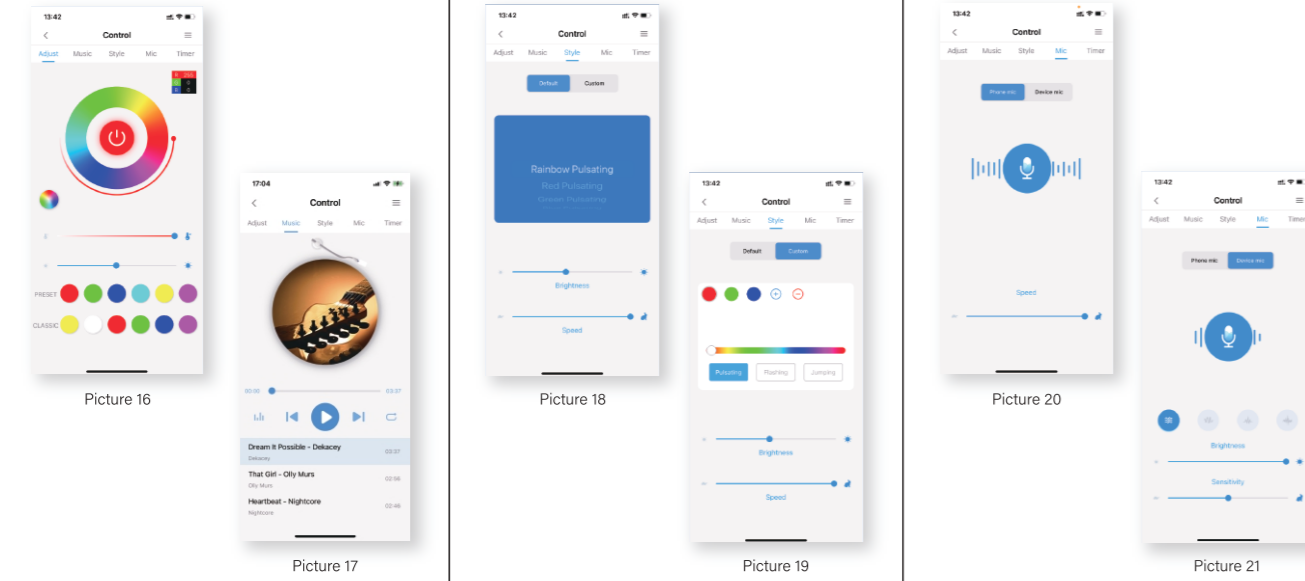

- Me. For the "Me" page, as shown in the picture 27, can show the account information. "Account settings", as shown in the picture 28. Here you can set the secure E-mail for the account. When you forget your password, you can reset it through your secure E-mail. "Third party access", as shown in the picture 29. Support the Weixin, Google Assistant, Tmall Genie, Duozhi, Mi AI and FLYOS. "Help", as shown in the picture 30. "About", as shown in the picture 31.

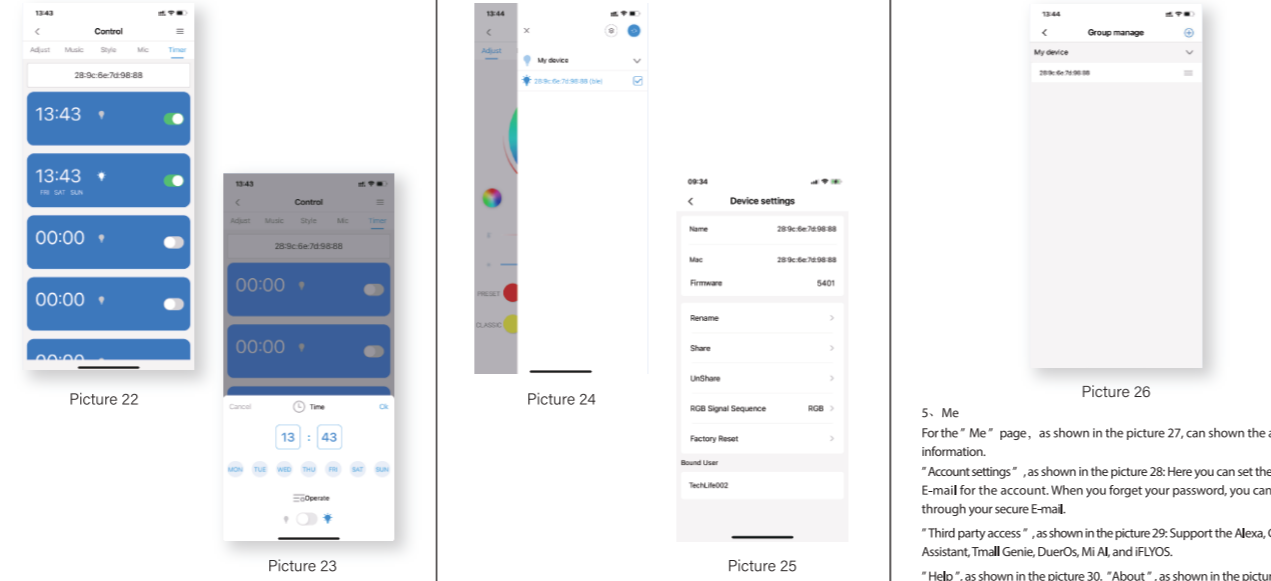

Common Troubleshooting

*The controller was connected the power, but not light up.
1. Check the input power supply: please use the power adapter that we equipped or other adapters with the same specification as ours. The input voltage must meet the voltage requirement of the led strip lights. The input voltage is lower than requirement, the led strip lights will not be turn on, while higher voltage may damage the circuit. The output power of the adapter (KW value) must equal to, or higher than the power of the led strip lights.
2. Check whether the connector is connected correctly with the strip lights. Make sure each interface is connected correctly.
3. Check whether the remote control is open.
*If the led strip lights are able to light up, but the remote control does not work or can't control the led strip lights.
1. Check whether the insulation sheet is removed from the remote control.
2. Make sure the battery on the remote control is installed correctly.
3. Ensure that the remote is working within 5 meters and aligned to the infrared receiver of the controller.
4. Try to replace the battery.

RF Exposure Warning Statements

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment shall be installed and operated with minimum distance 20cm between the radiator & body.
BT function is an optional feature and not available on all models.

WARNING

DO NOT IMMERSE IN FIRE
CHILDREN UNDER THE AGE OF 16 SHOULD USE THIS PRODUCT UNDER ADULT SUPERVISION.

If you have any question, please contact our customer service, we will reply to you within 24 hours.

