


Duty Cycle NVNT n40 5795MHz Ant1

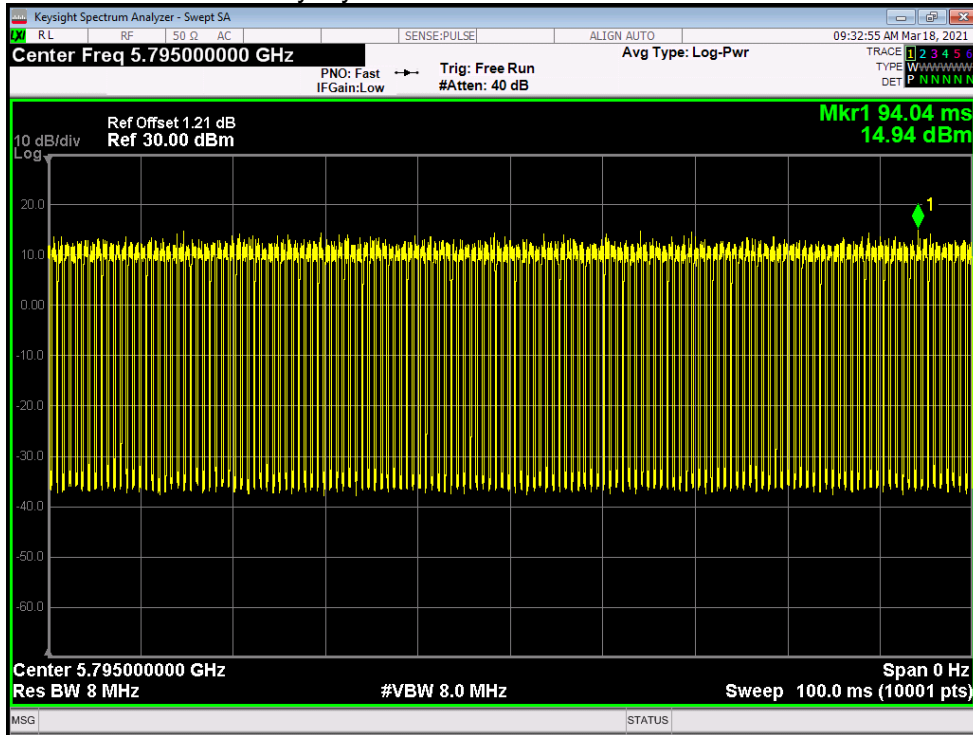


**5.2 MAXIMUM CONDUCTED OUTPUT POWER**

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | a    | 5745            | Ant1    | 10.148                | 0                | 10.148            | 30          | Pass    |
| NVNT      | a    | 5785            | Ant1    | 10.116                | 0                | 10.116            | 30          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 9.893                 | 0                | 9.893             | 30          | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | 9.977                 | 0                | 9.977             | 30          | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | 10.492                | 0                | 10.492            | 30          | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | 9.949                 | 0                | 9.949             | 30          | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | 9.021                 | 0                | 9.021             | 30          | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | 8.919                 | 0                | 8.919             | 30          | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | 8.721                 | 2.51             | 11.231            | 30          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 9.824                 | 0                | 9.824             | 30          | Pass    |
| NVNT      | n20  | 5785            | Ant1    | 10.667                | 0                | 10.667            | 30          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 10.362                | 0                | 10.362            | 30          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 9.383                 | 0                | 9.383             | 30          | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 9.072                 | 0                | 9.072             | 30          | Pass    |


5.3 -6DB BANDWIDTH

| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | a    | 5745            | Ant1    | 16.355                | 0.5                         | Pass    |
| NVNT      | a    | 5785            | Ant1    | 16.349                | 0.5                         | Pass    |
| NVNT      | a    | 5825            | Ant1    | 16.355                | 0.5                         | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | 17.559                | 0.5                         | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | 17.586                | 0.5                         | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | 17.573                | 0.5                         | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | 35.251                | 0.5                         | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | 35.114                | 0.5                         | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | 75.025                | 0.5                         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 17.567                | 0.5                         | Pass    |
| NVNT      | n20  | 5785            | Ant1    | 17.597                | 0.5                         | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 17.599                | 0.5                         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 35.079                | 0.5                         | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 35.13                 | 0.5                         | Pass    |


-6dB Bandwidth NVNT a 5745MHz Ant1

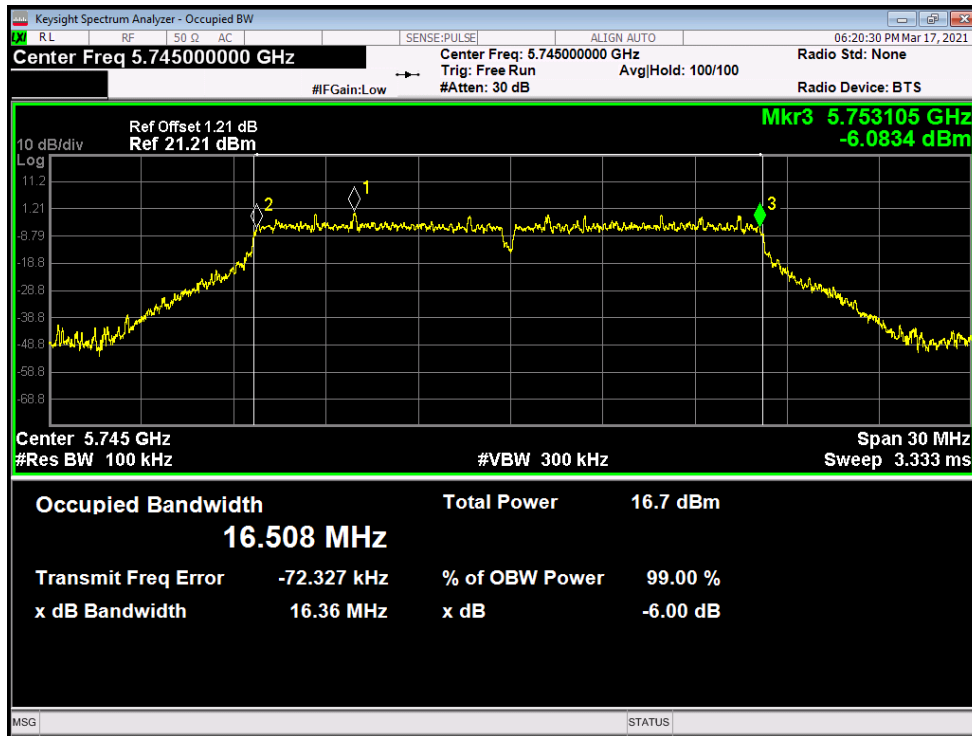


-6dB Bandwidth NVNT a 5785MHz Ant1

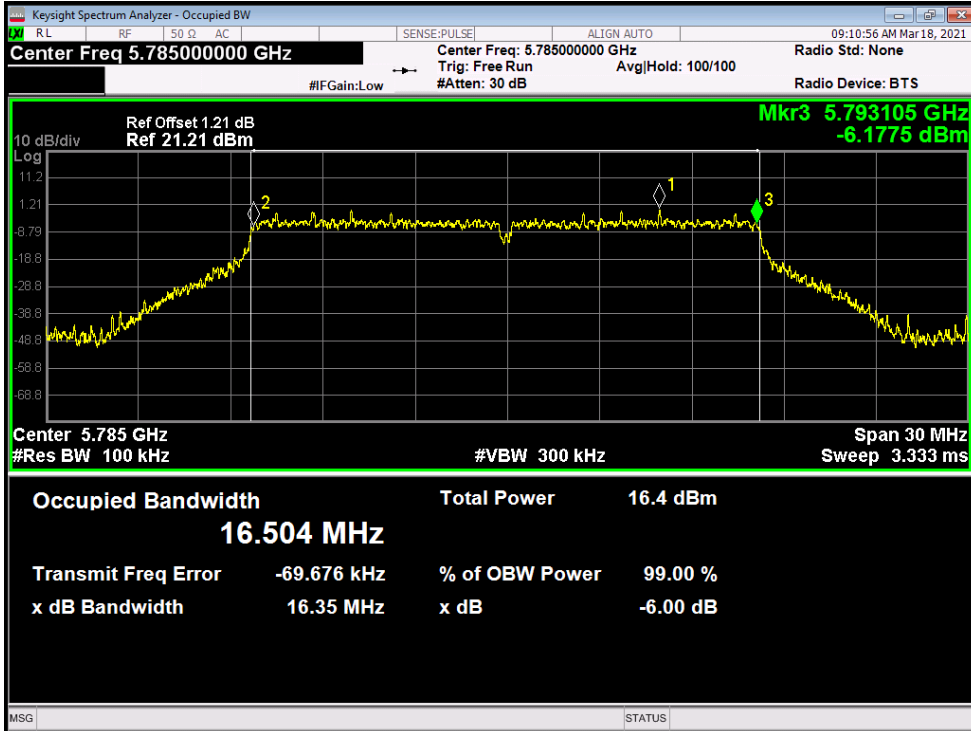


-6dB Bandwidth NVNT a 5825MHz Ant1

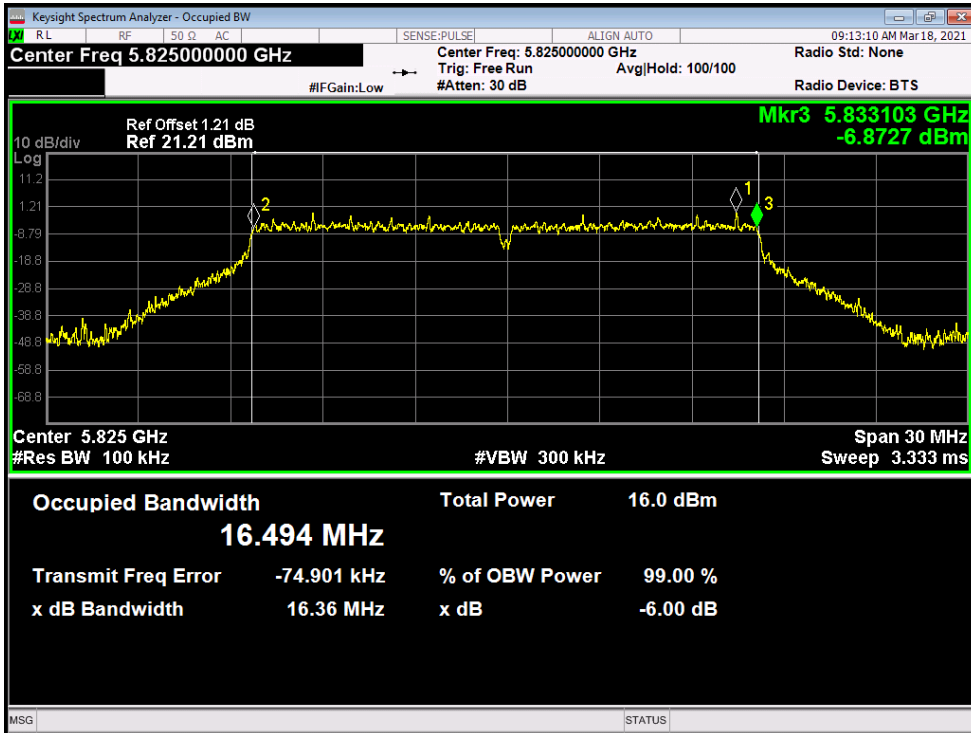


-6dB Bandwidth NVNT ac20 5745MHz Ant1

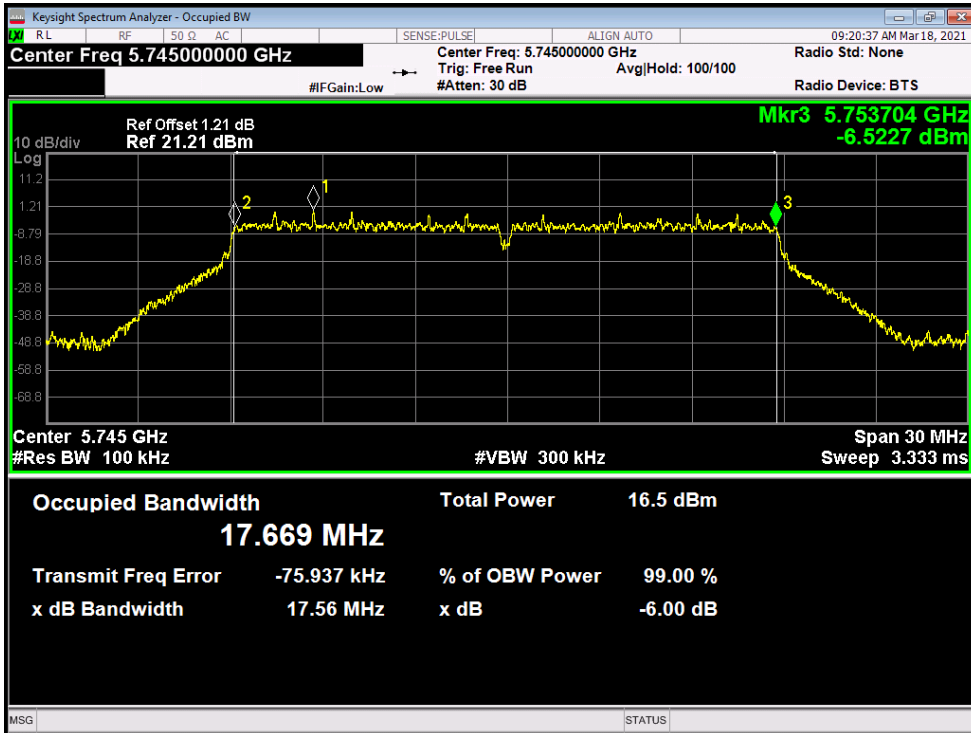


-6dB Bandwidth NVNT ac20 5785MHz Ant1

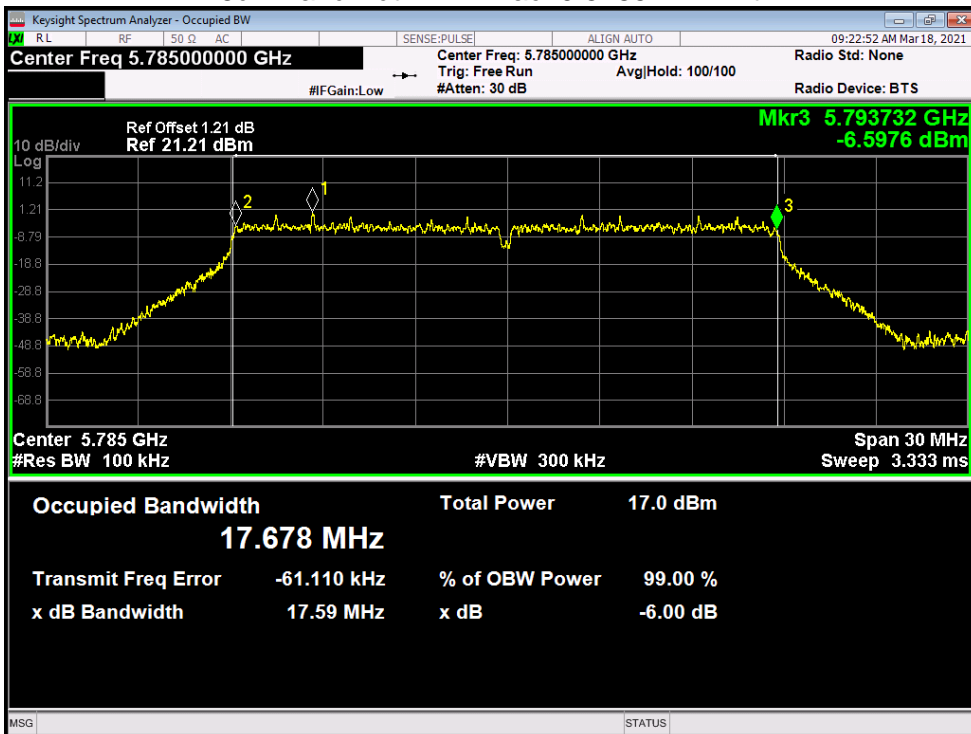


-6dB Bandwidth NVNT ac20 5825MHz Ant1

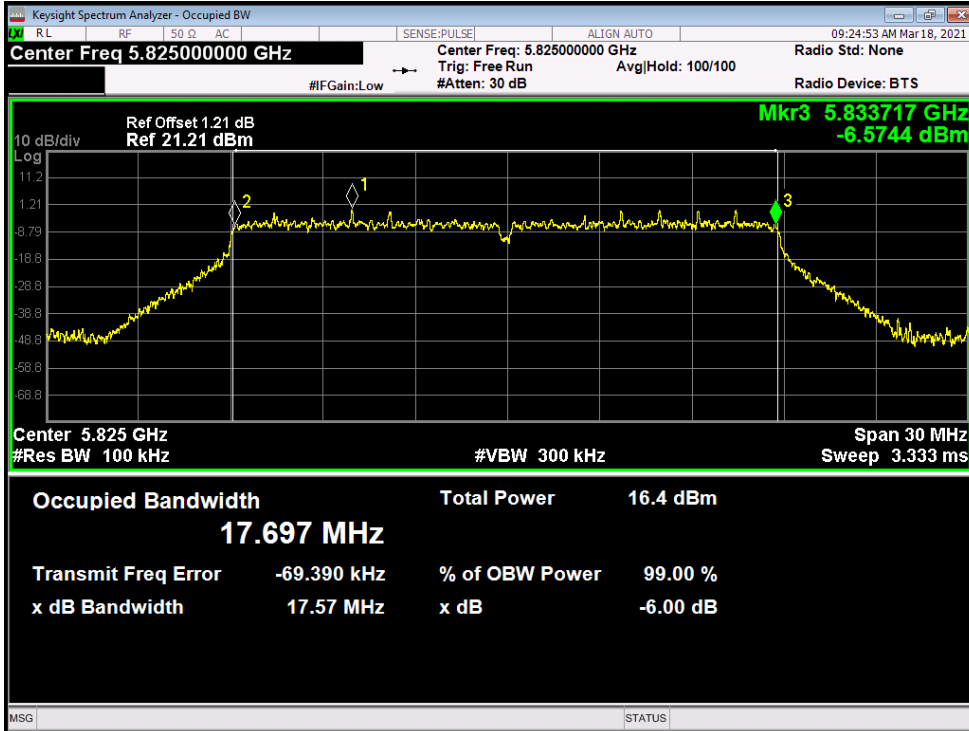


-6dB Bandwidth NVNT ac40 5755MHz Ant1

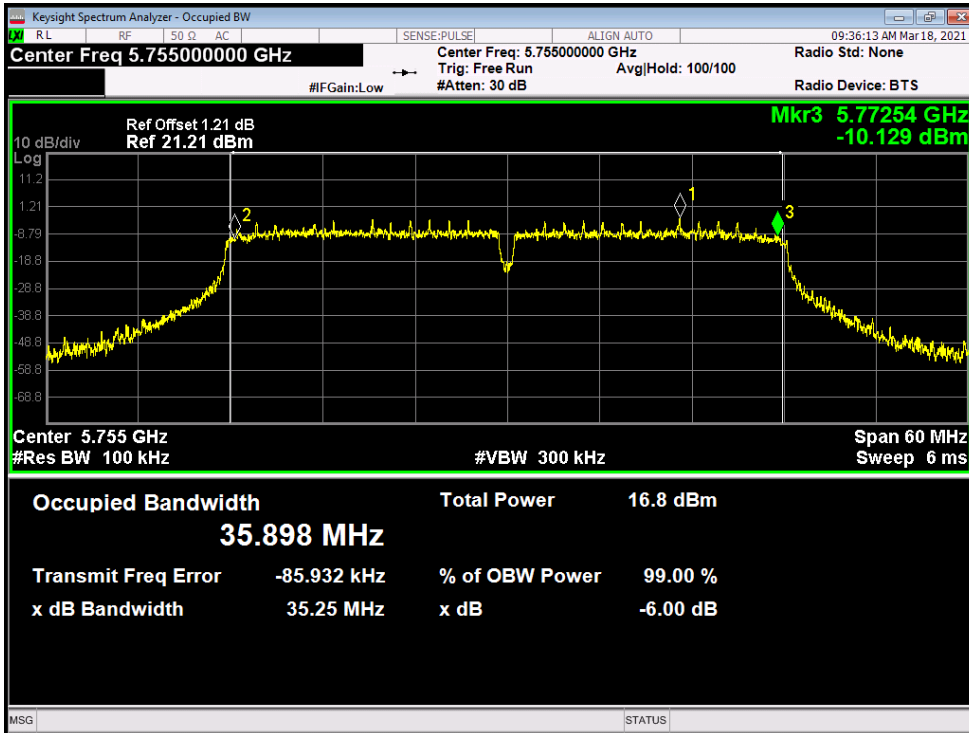


-6dB Bandwidth NVNT ac40 5795MHz Ant1

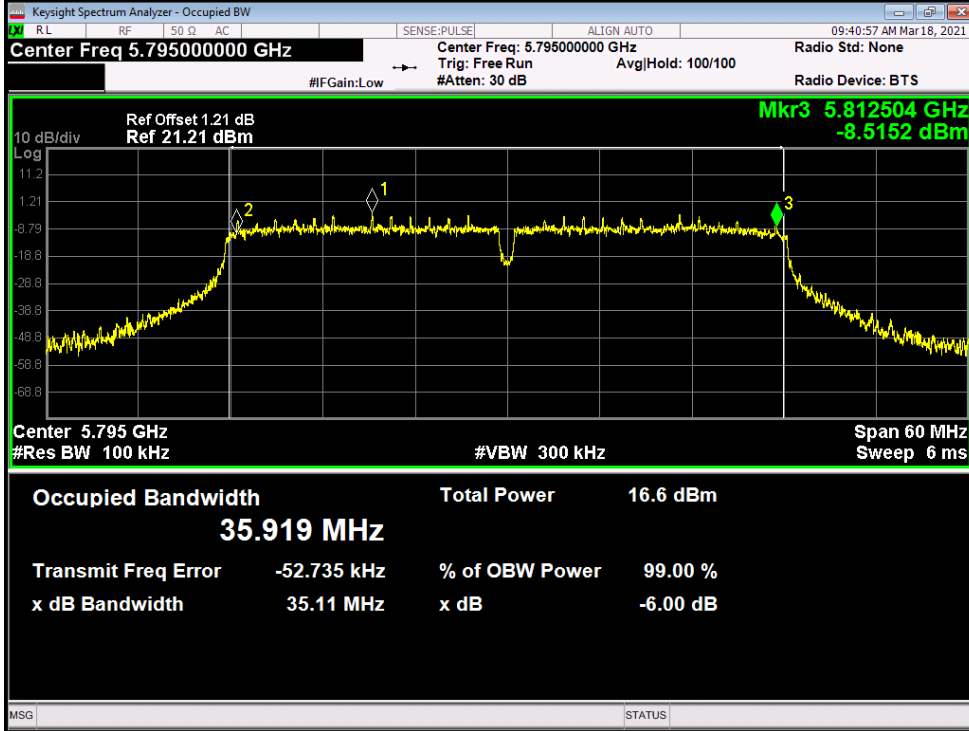


-6dB Bandwidth NVNT ac80 5775MHz Ant1

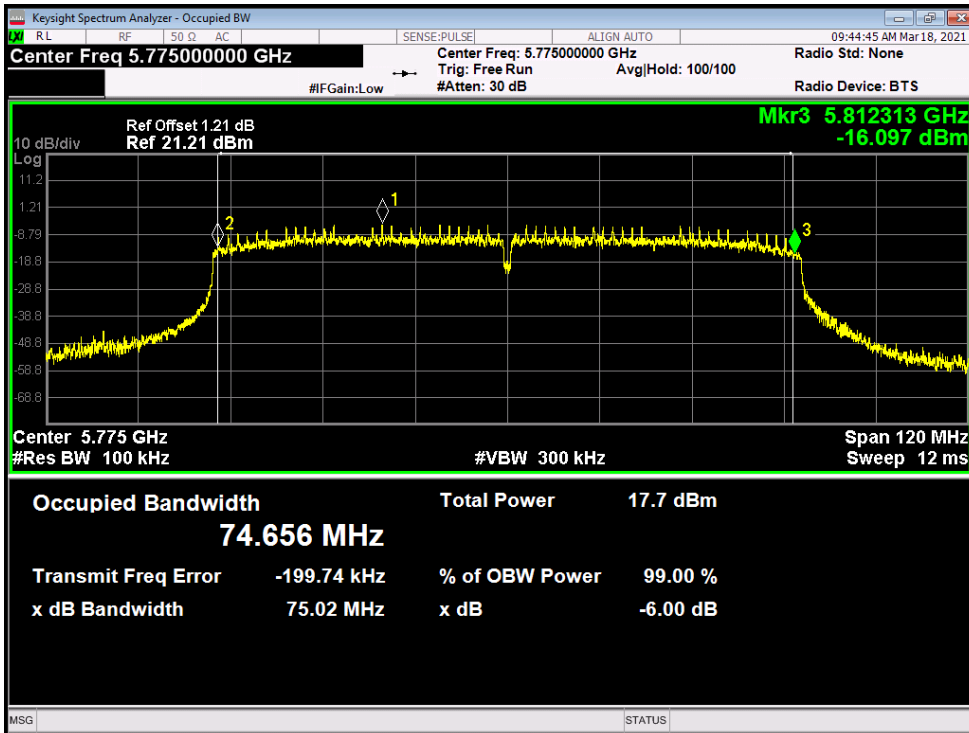

-6dB Bandwidth NVNT n20 5745MHz Ant1

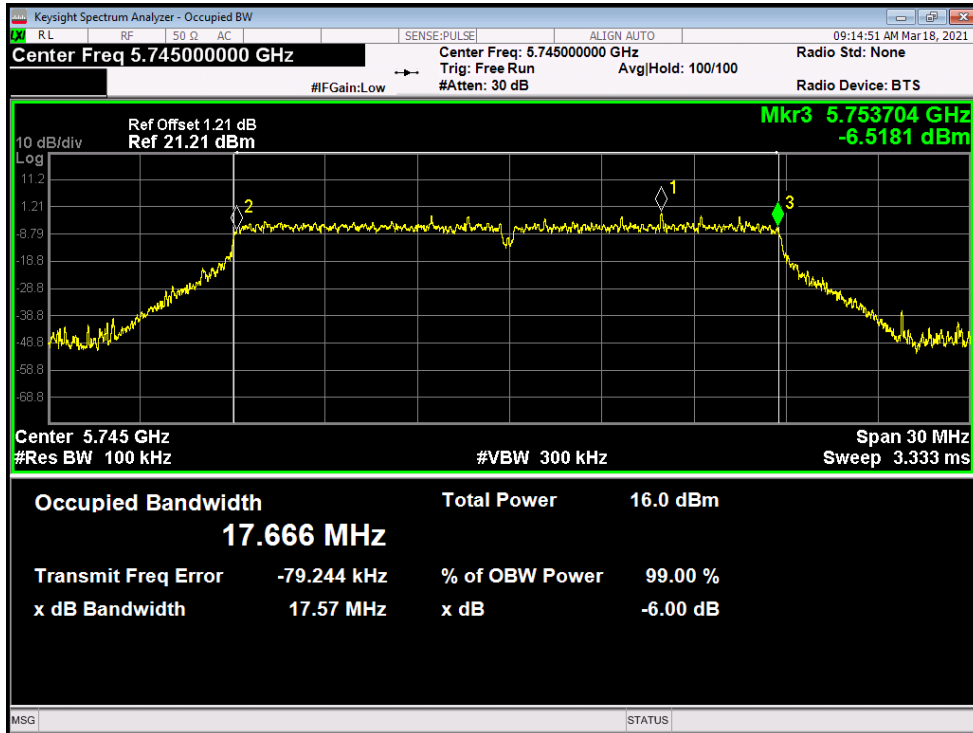


-6dB Bandwidth NVNT n20 5785MHz Ant1

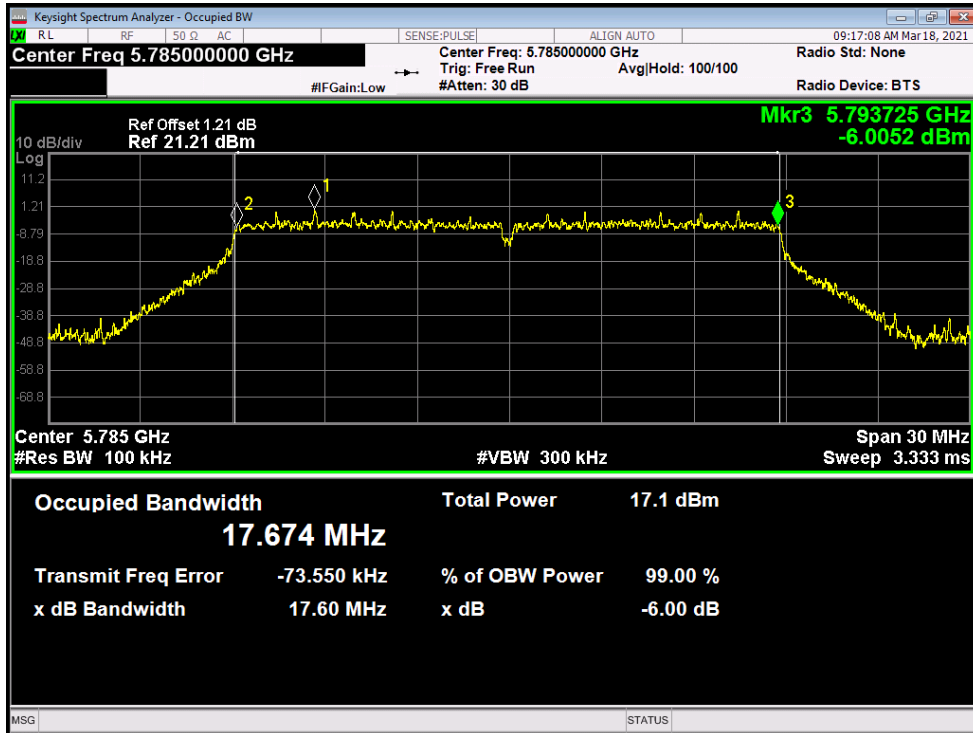





-6dB Bandwidth NVNT n20 5825MHz Ant1

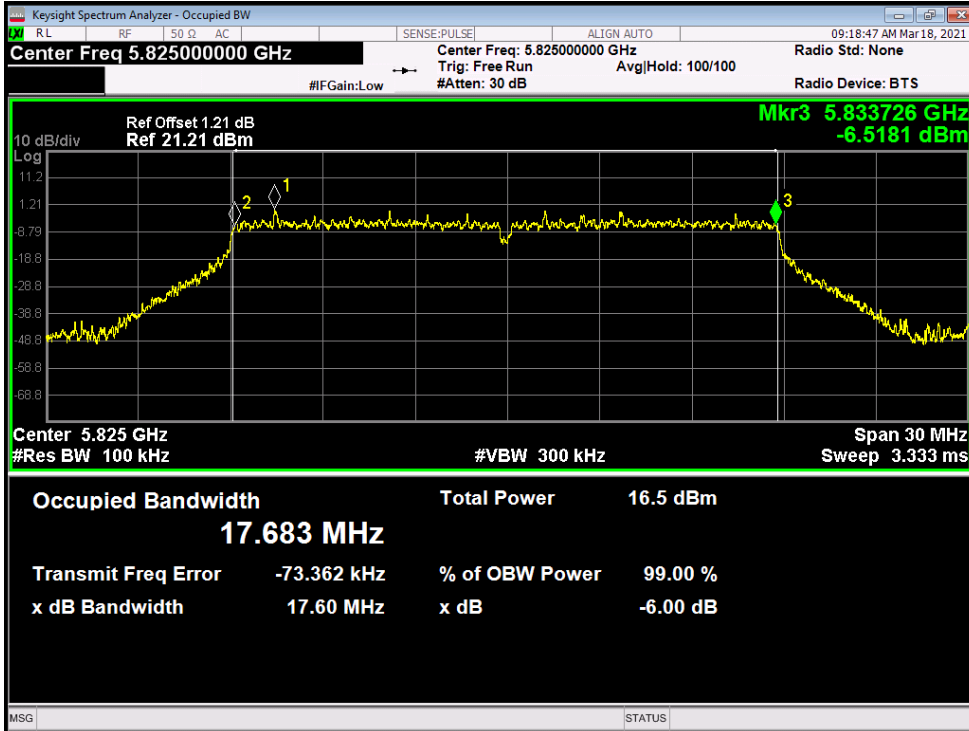

-6dB Bandwidth NVNT n40 5755MHz Ant1

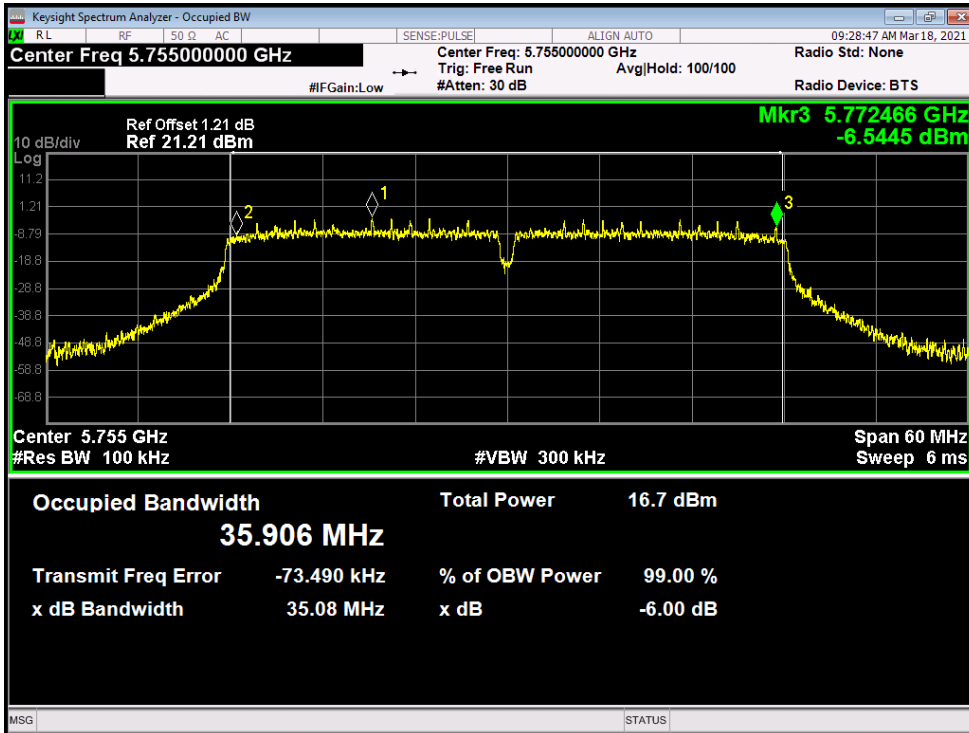


-6dB Bandwidth NVNT n40 5795MHz Ant1

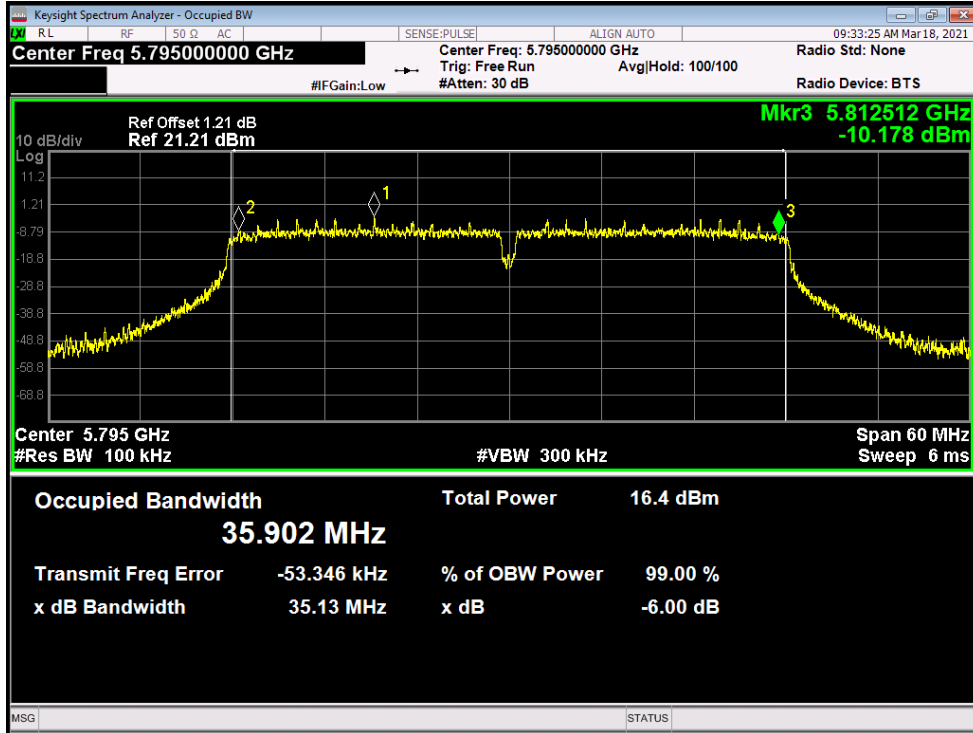


5.4 OCCUPIED CHANNEL BANDWIDTH

| Condition | Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|------|-----------------|---------|---------------|
| NVNT      | a    | 5745            | Ant1    | 16.668        |
| NVNT      | a    | 5785            | Ant1    | 16.674        |
| NVNT      | a    | 5825            | Ant1    | 16.662        |
| NVNT      | ac20 | 5745            | Ant1    | 17.804        |
| NVNT      | ac20 | 5785            | Ant1    | 17.817        |
| NVNT      | ac20 | 5825            | Ant1    | 17.795        |
| NVNT      | ac40 | 5755            | Ant1    | 36.06         |
| NVNT      | ac40 | 5795            | Ant1    | 36.128        |
| NVNT      | ac80 | 5775            | Ant1    | 74.669        |
| NVNT      | n20  | 5745            | Ant1    | 17.787        |
| NVNT      | n20  | 5785            | Ant1    | 17.775        |
| NVNT      | n20  | 5825            | Ant1    | 17.766        |
| NVNT      | n40  | 5755            | Ant1    | 36.08         |
| NVNT      | n40  | 5795            | Ant1    | 36.061        |


OBW NVNT a 5745MHz Ant1

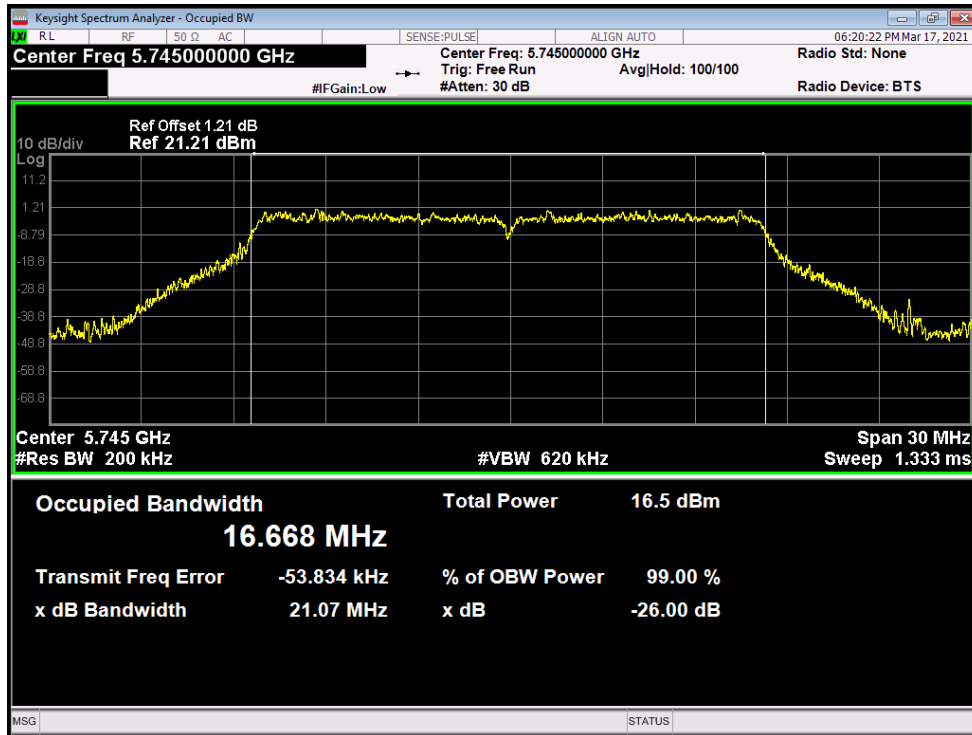


OBW NVNT a 5785MHz Ant1

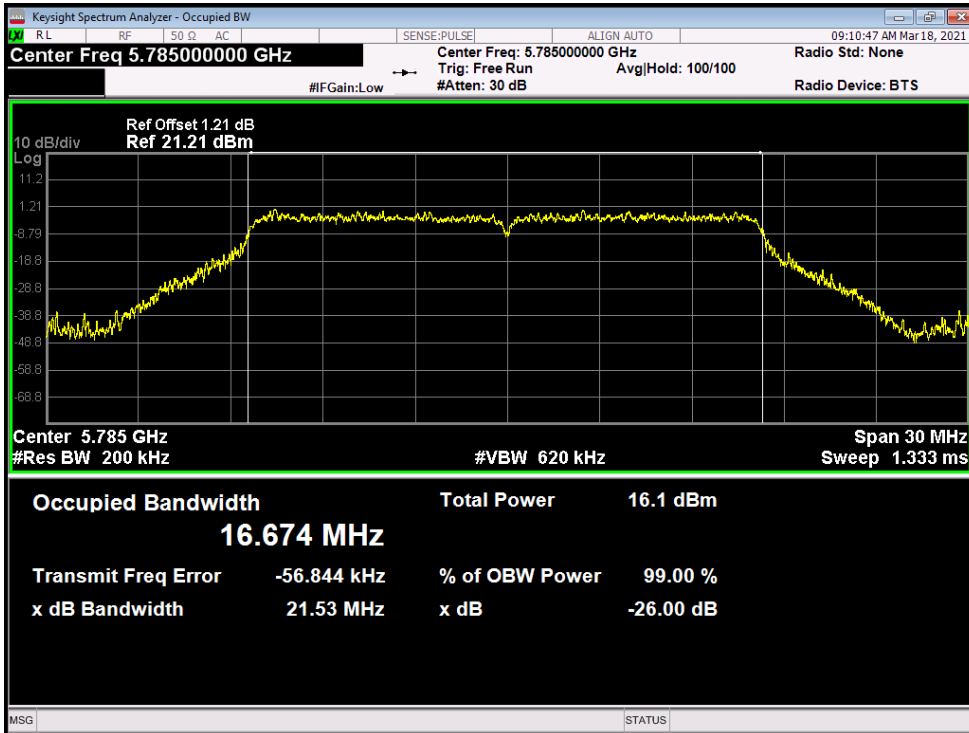


OBW NVNT a 5825MHz Ant1

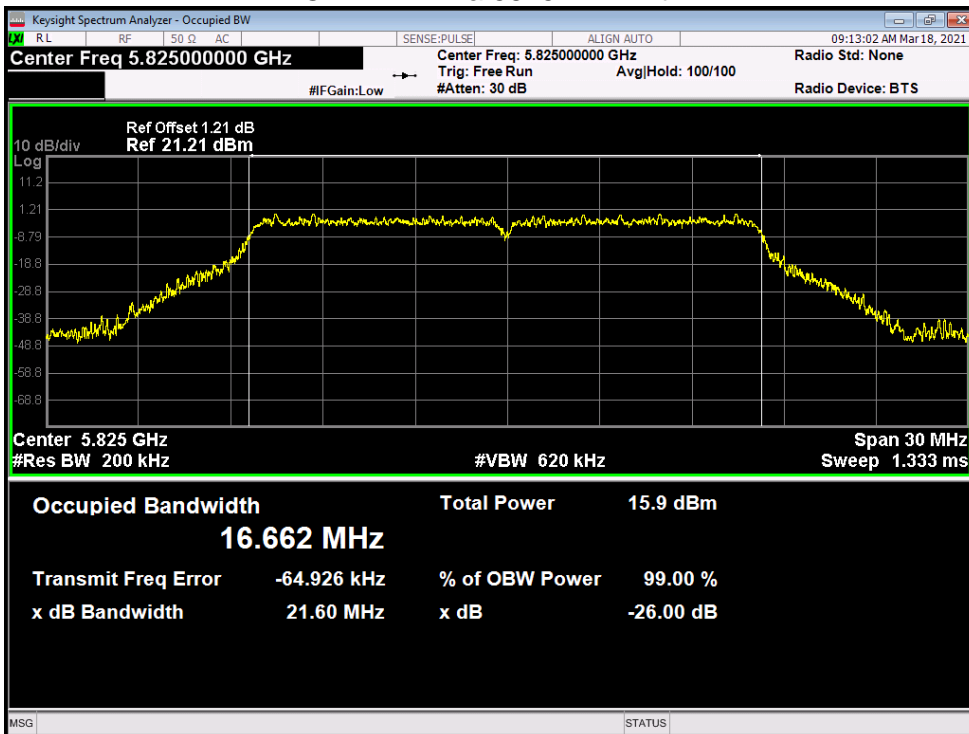


OBW NVNT ac20 5745MHz Ant1

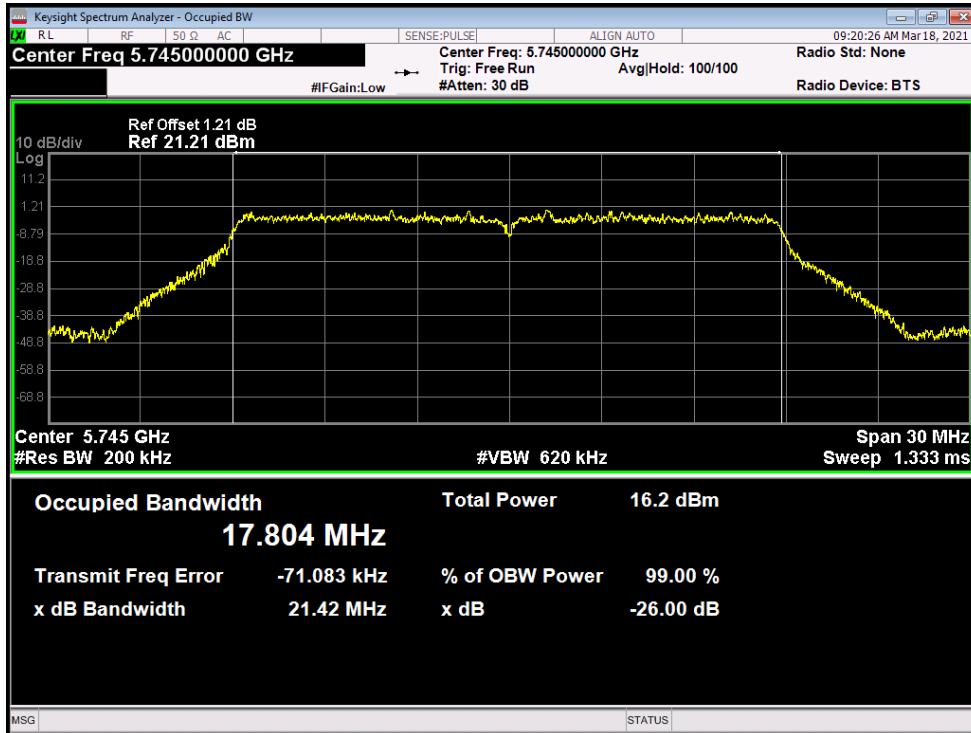


OBW NVNT ac20 5785MHz Ant1

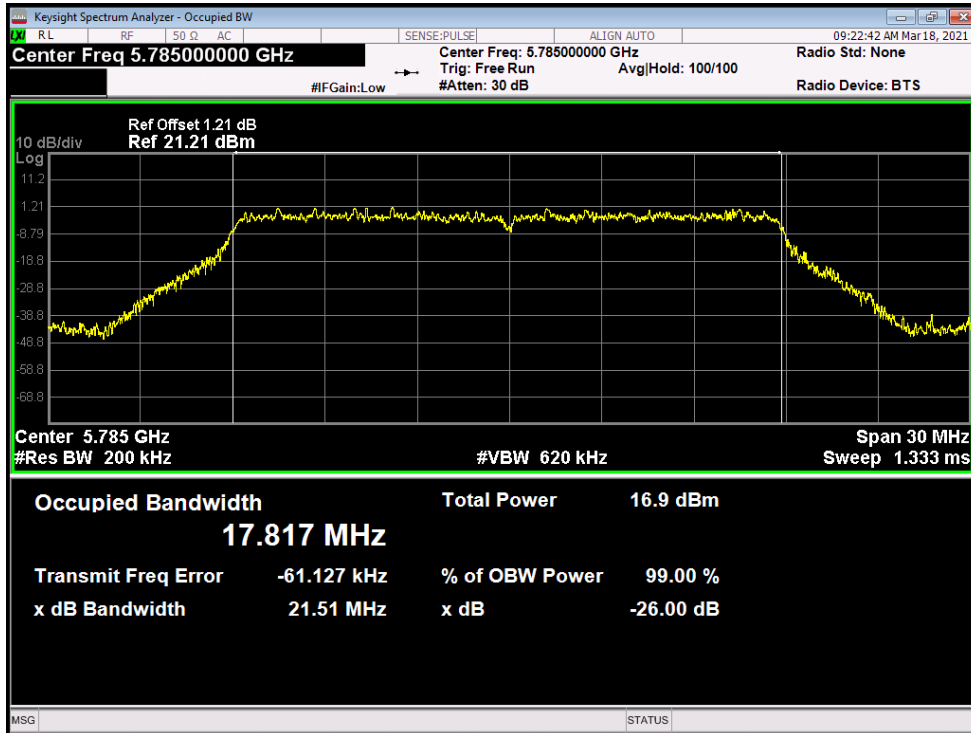


OBW NVNT ac20 5825MHz Ant1

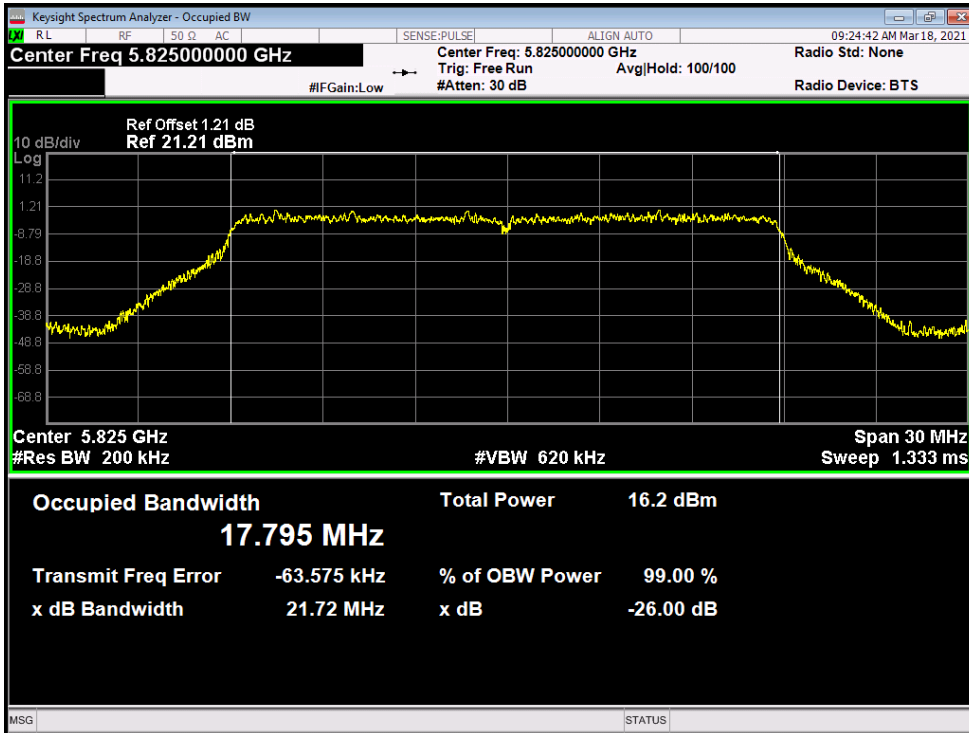


OBW NVNT ac40 5755MHz Ant1

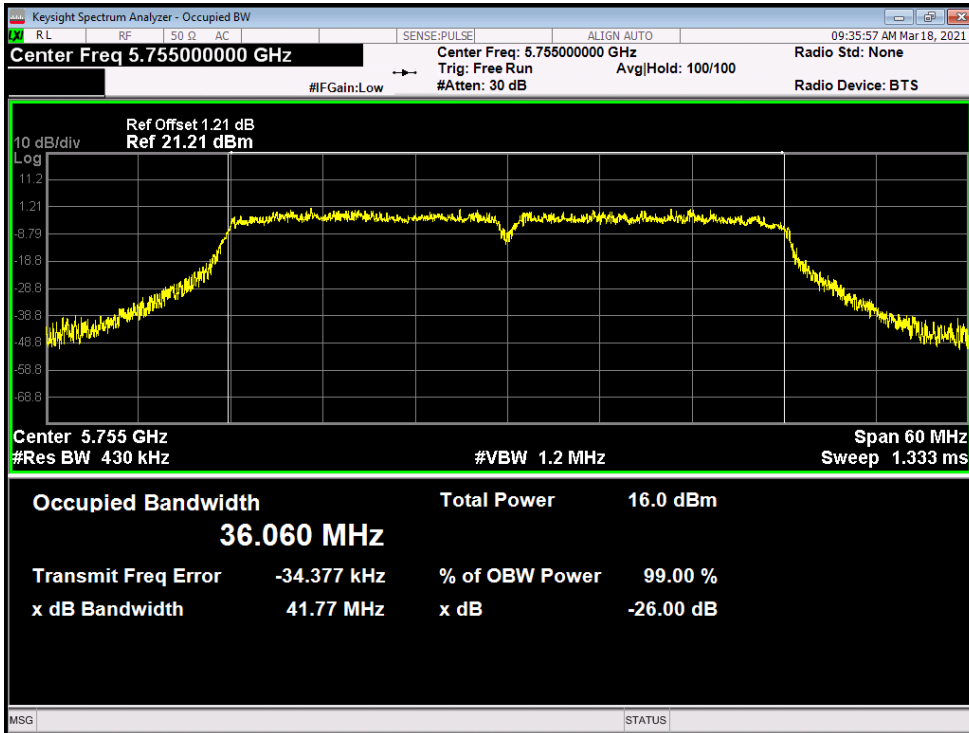


OBW NVNT ac40 5795MHz Ant1

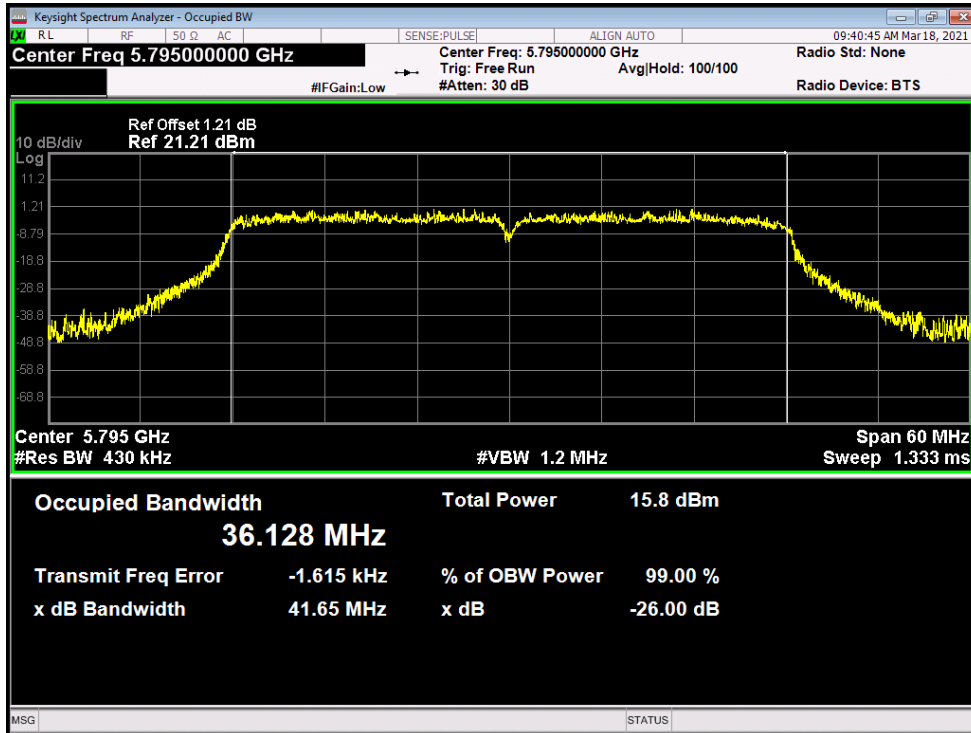


OBW NVNT ac80 5775MHz Ant1

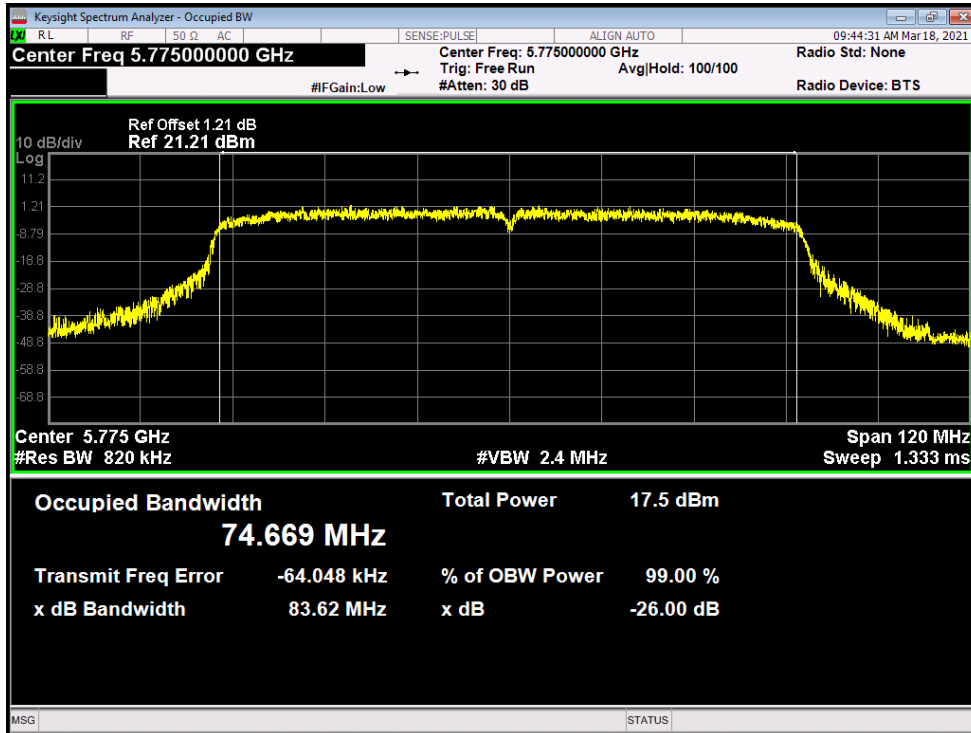

OBW NVNT n20 5745MHz Ant1

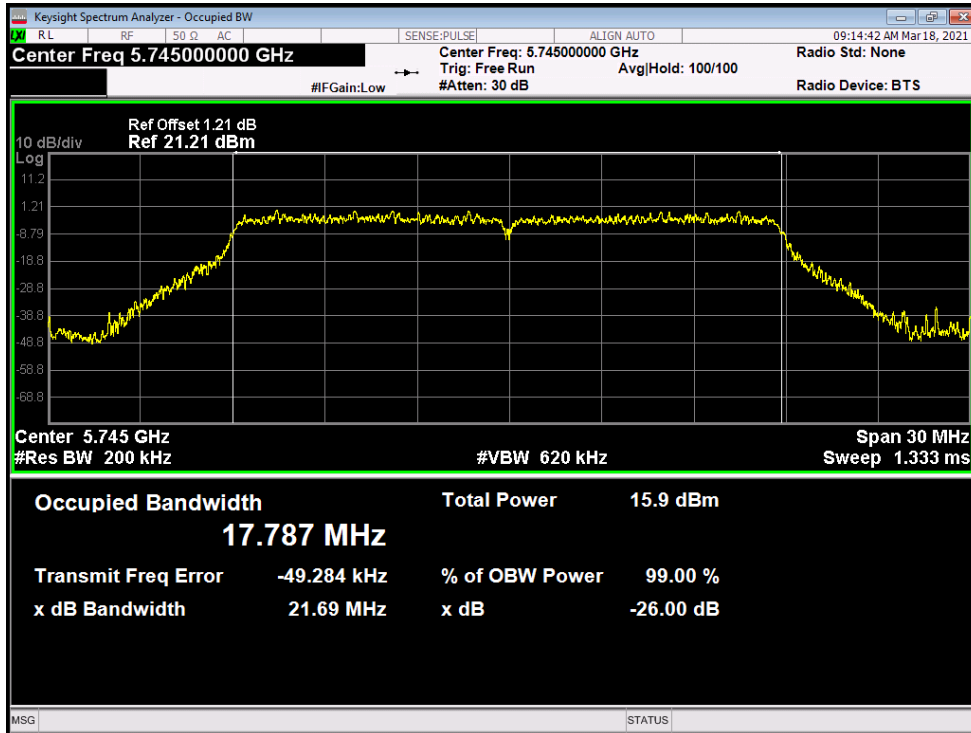


OBW NVNT n20 5785MHz Ant1

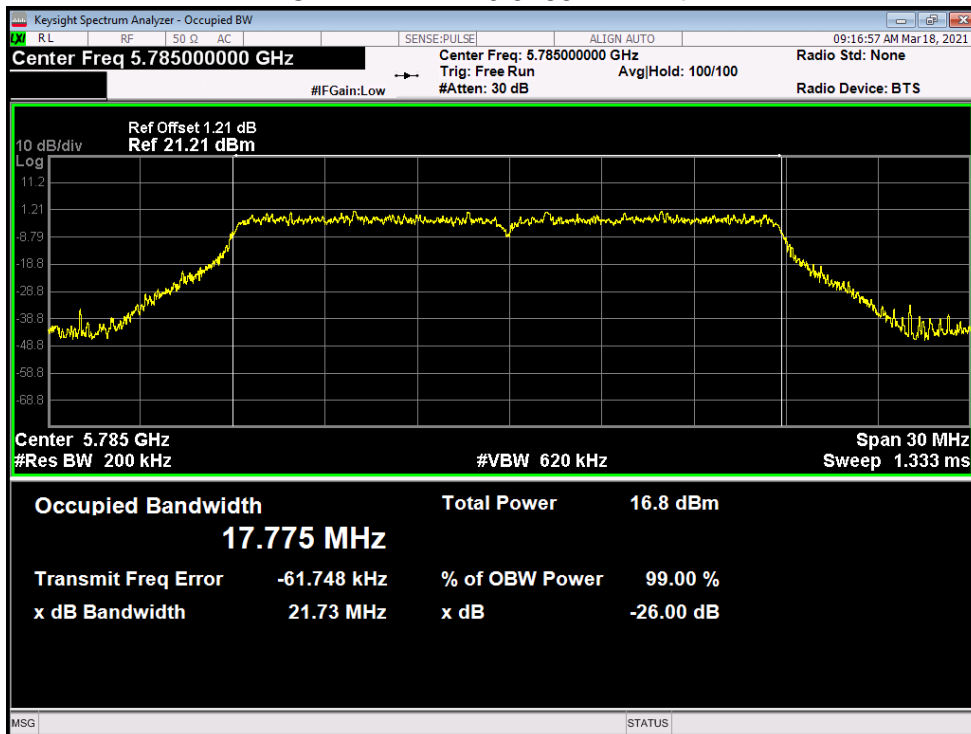





OBW NVNT n20 5825MHz Ant1

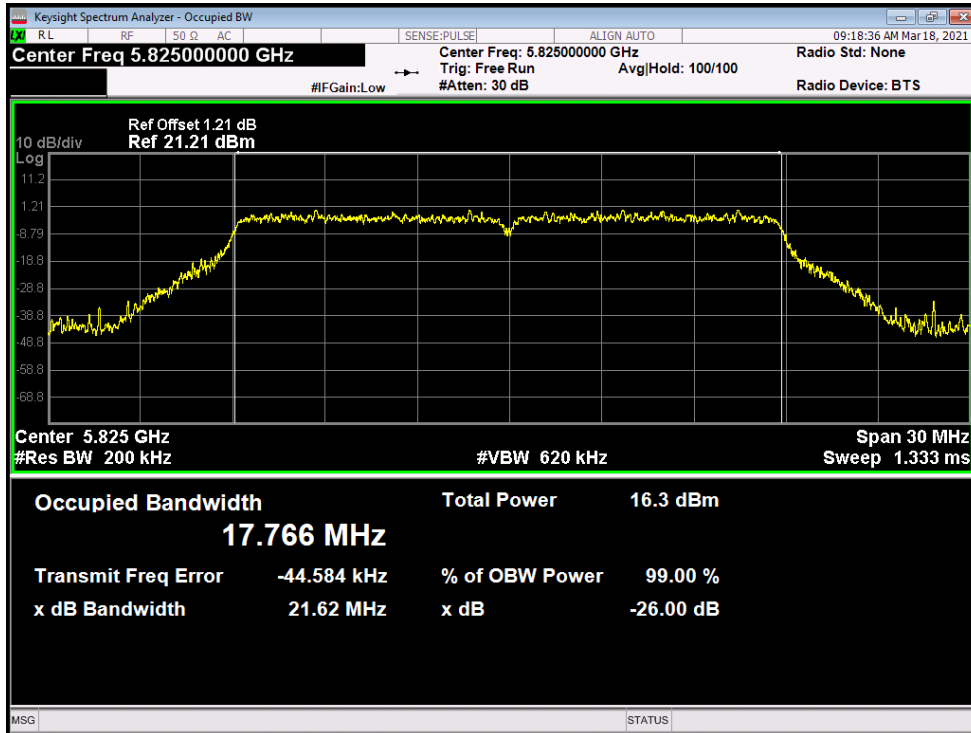

OBW NVNT n40 5755MHz Ant1

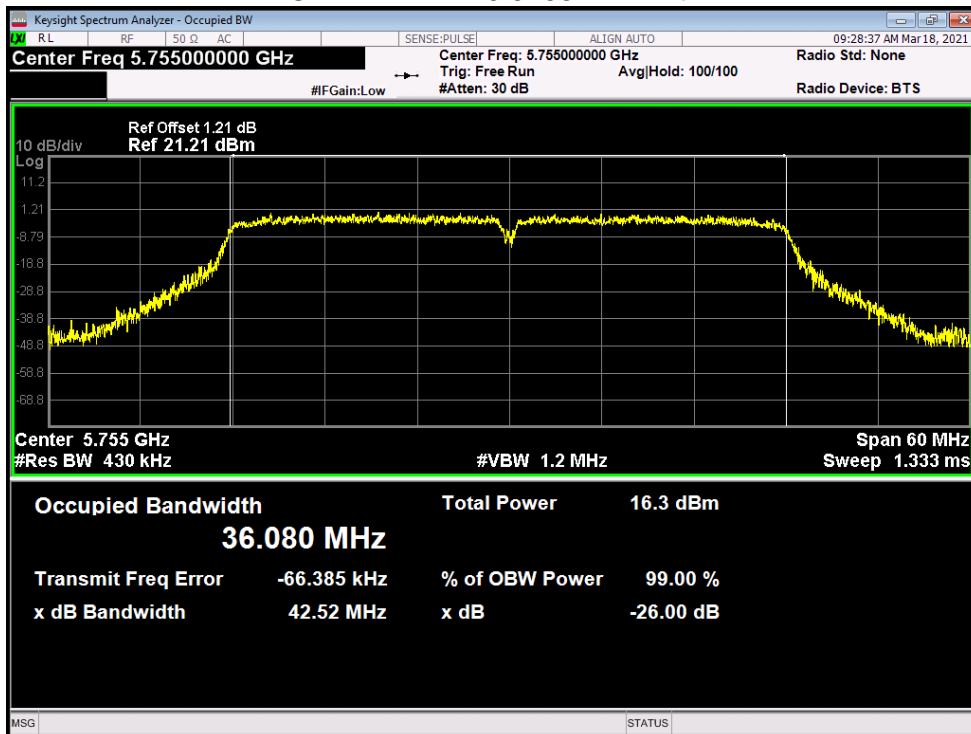


OBW NVNT n40 5795MHz Ant1

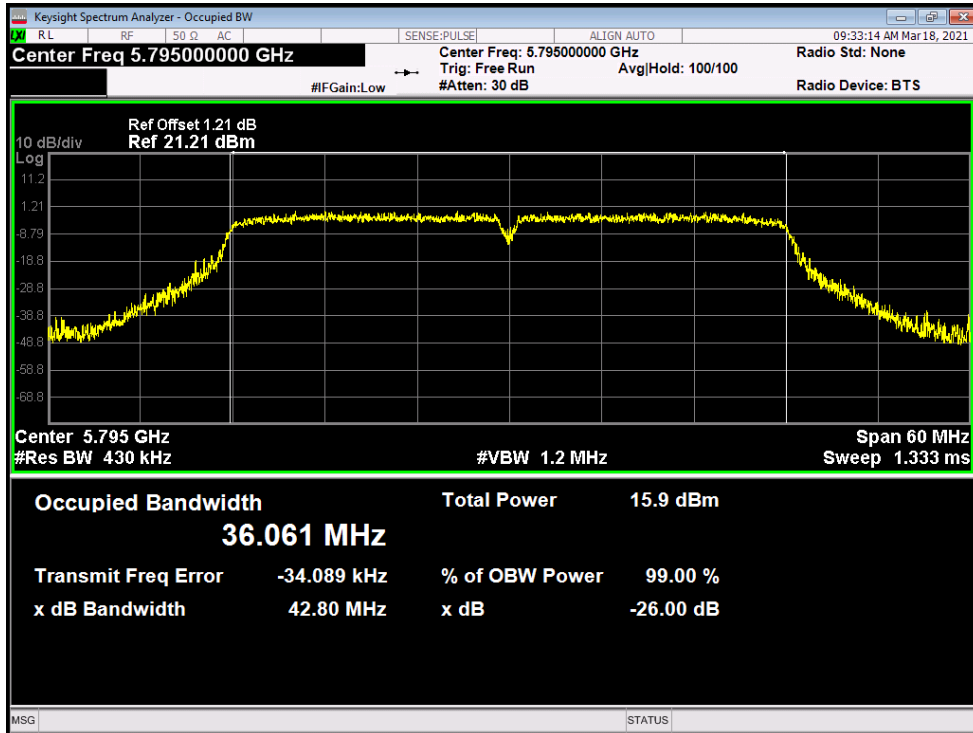


5.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL

| Condition | Mode | Frequency (MHz) | Antenna | Max PSD (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|---------------|-------------|---------|
| NVNT      | a    | 5745            | Ant1    | 4.74          | 30          | Pass    |
| NVNT      | a    | 5785            | Ant1    | 4.096         | 30          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 3.116         | 30          | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | 4.09          | 30          | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | 4.594         | 30          | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | 3.878         | 30          | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | 1.651         | 30          | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | 1.594         | 30          | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | -9.913        | 30          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 3.56          | 30          | Pass    |
| NVNT      | n20  | 5785            | Ant1    | 4.732         | 30          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 4.84          | 30          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 1.112         | 30          | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 1.272         | 30          | Pass    |


PSD NVNT a 5745MHz Ant1

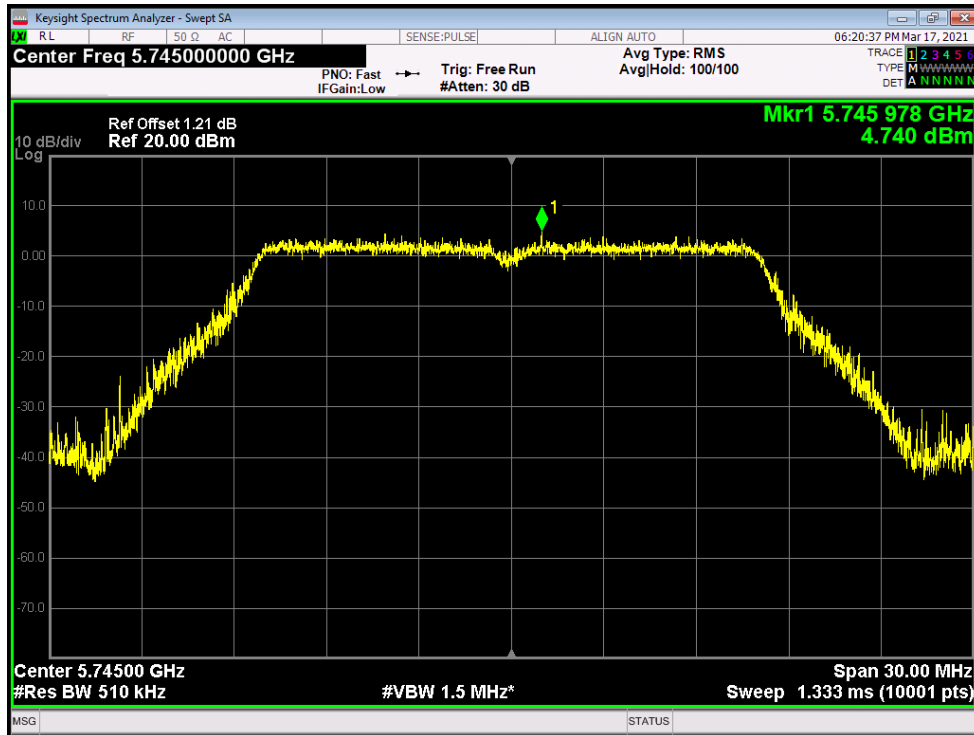


### PSD NVNT a 5785MHz Ant1

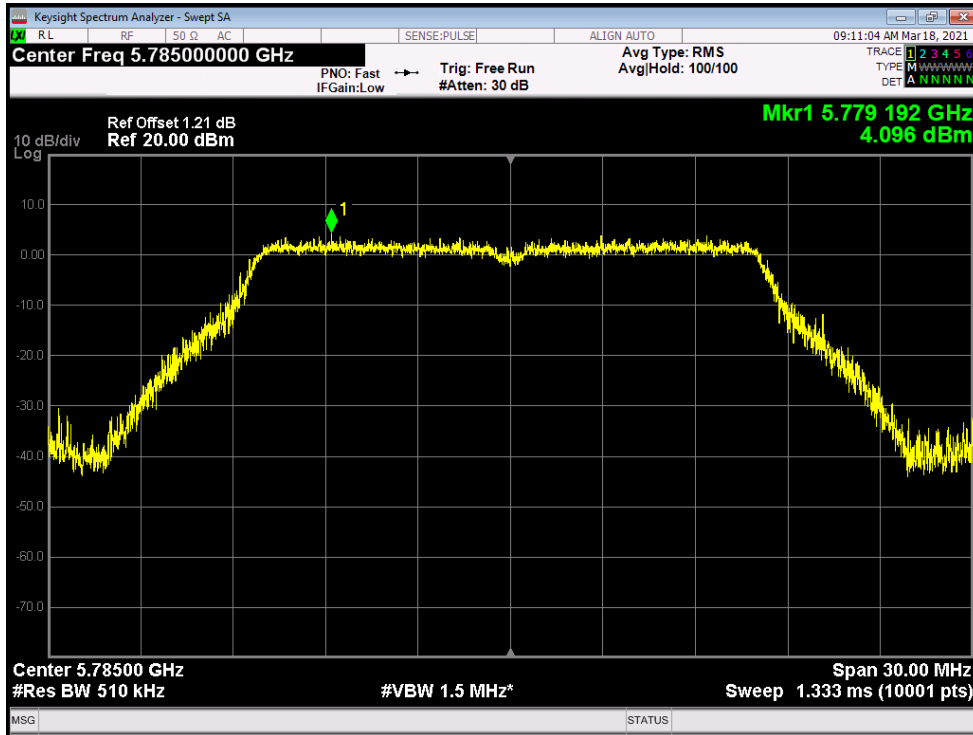


### PSD NVNT a 5825MHz Ant1

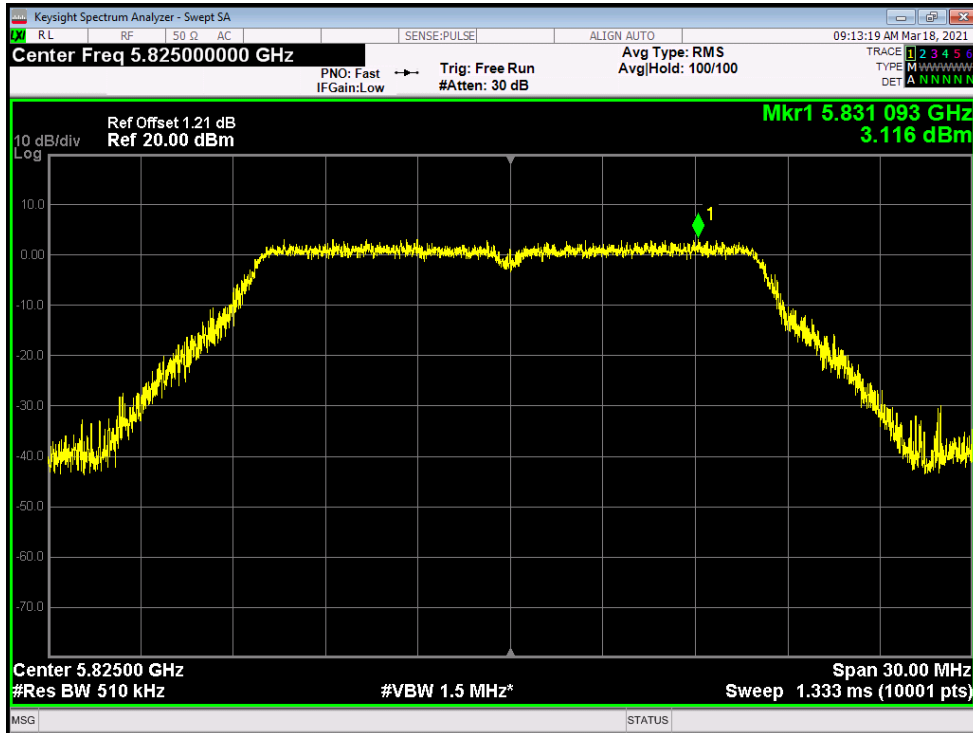


PSD NVNT ac20 5745MHz Ant1

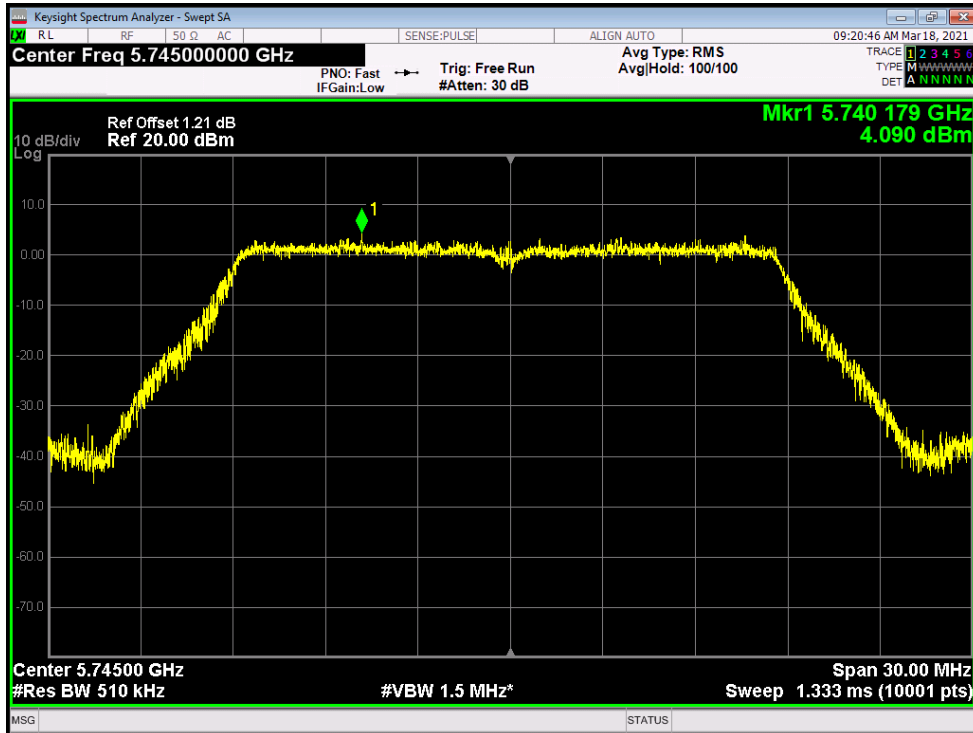


PSD NVNT ac20 5785MHz Ant1

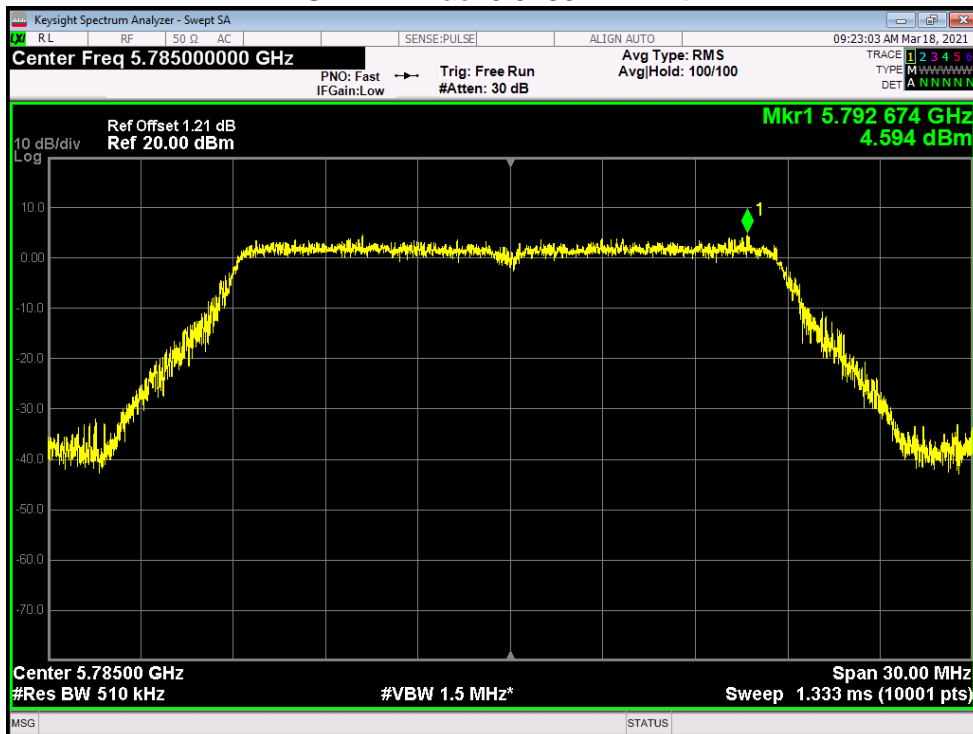


PSD NVNT ac20 5825MHz Ant1

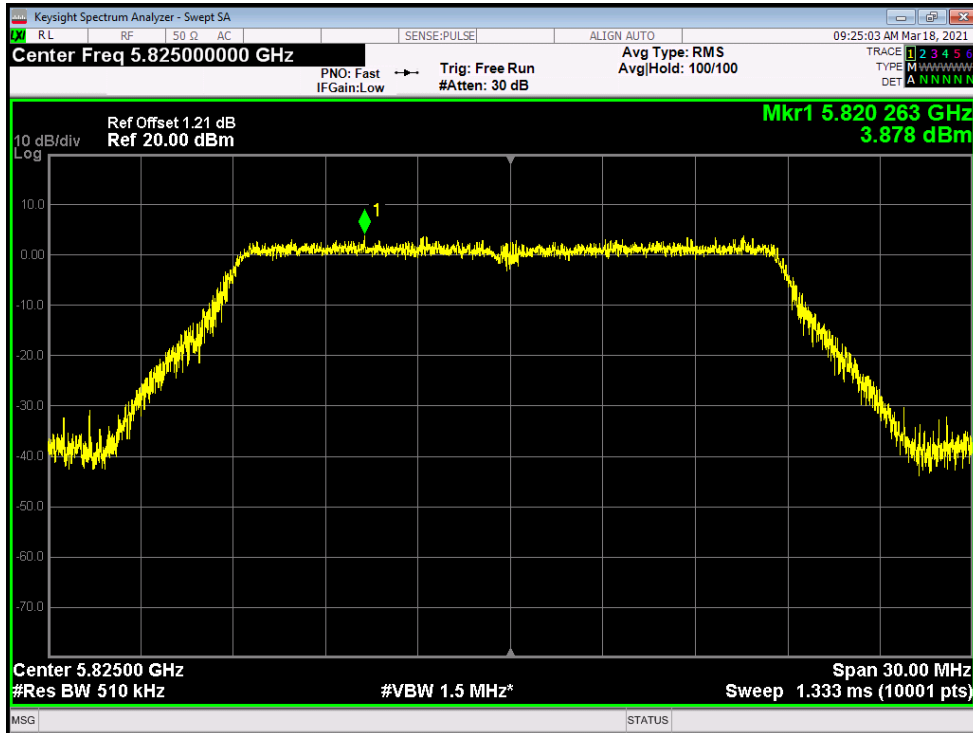


PSD NVNT ac40 5755MHz Ant1

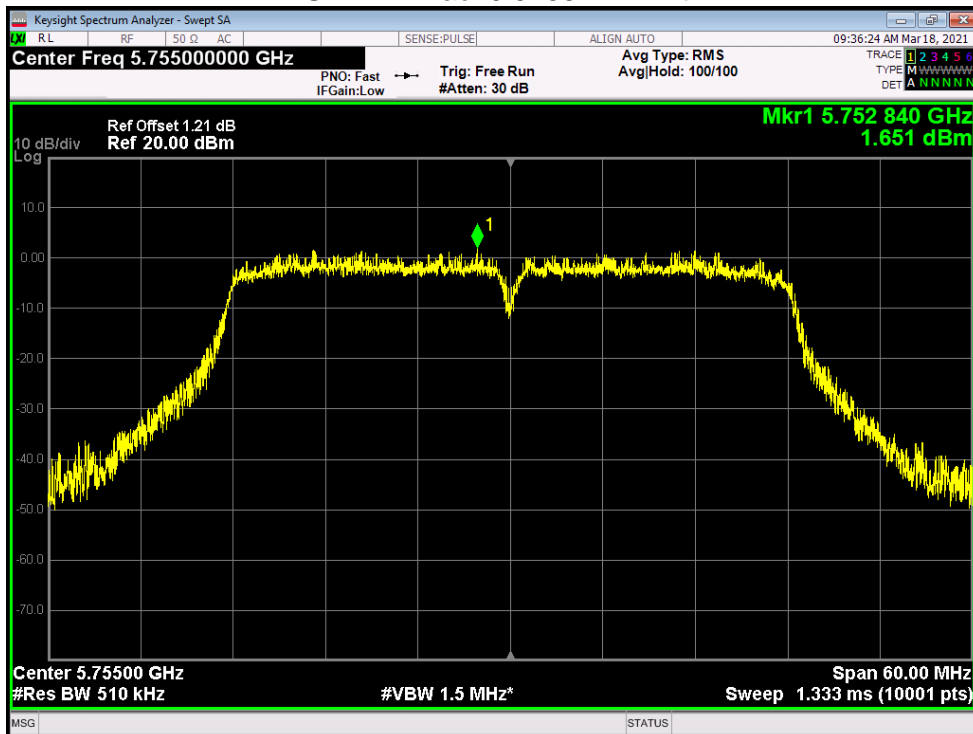


### PSD NVNT ac40 5795MHz Ant1

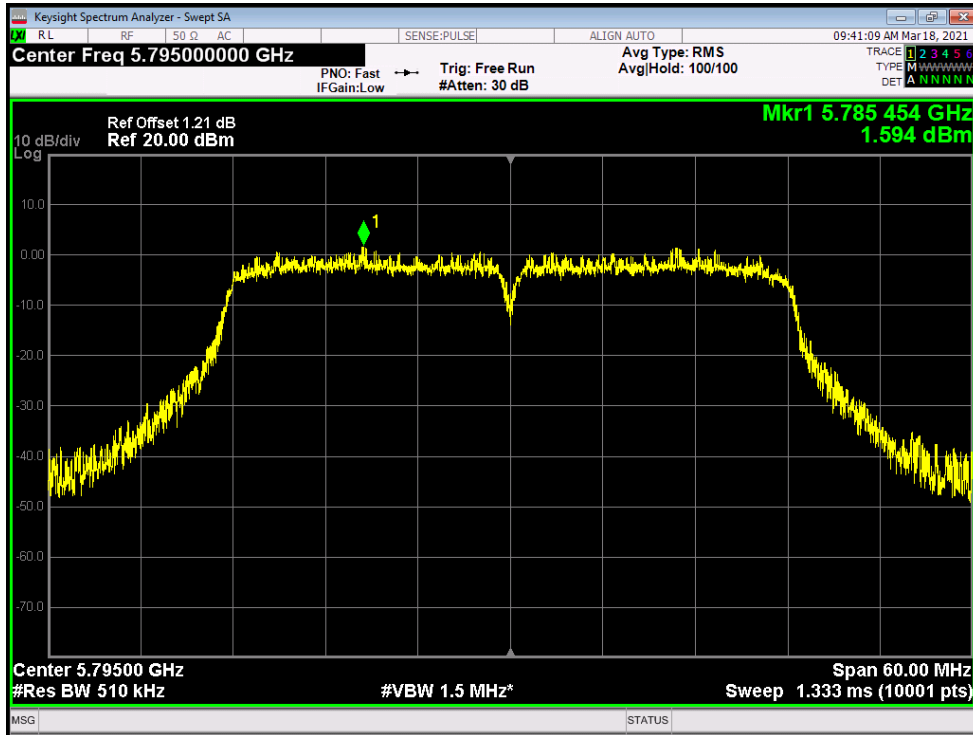


### PSD NVNT ac80 5775MHz Ant1

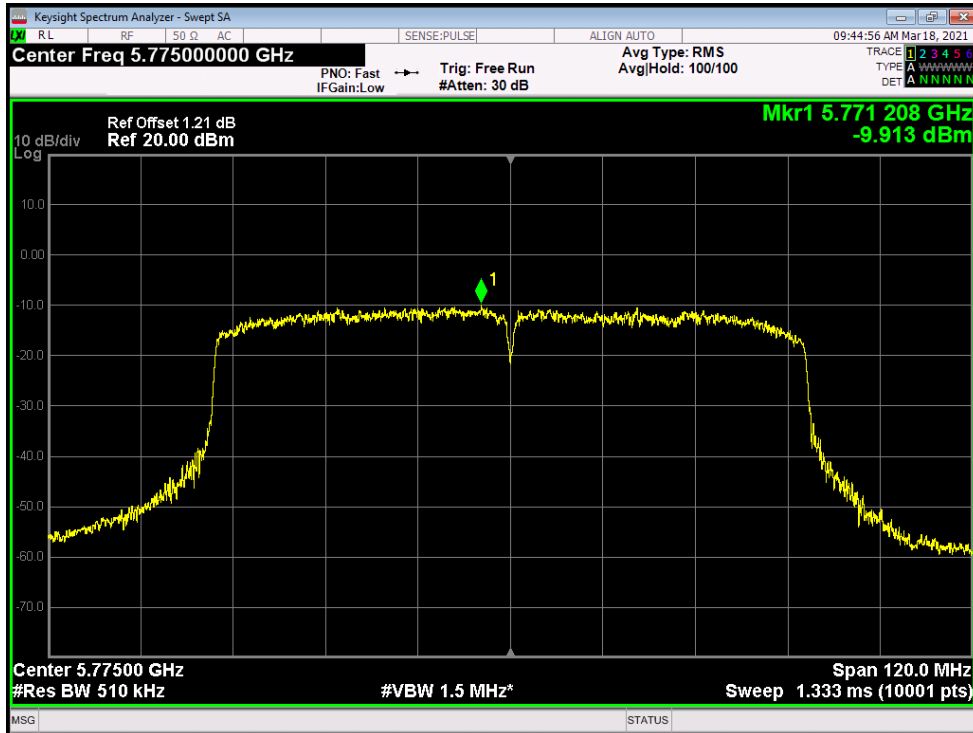

### PSD NVNT n20 5745MHz Ant1

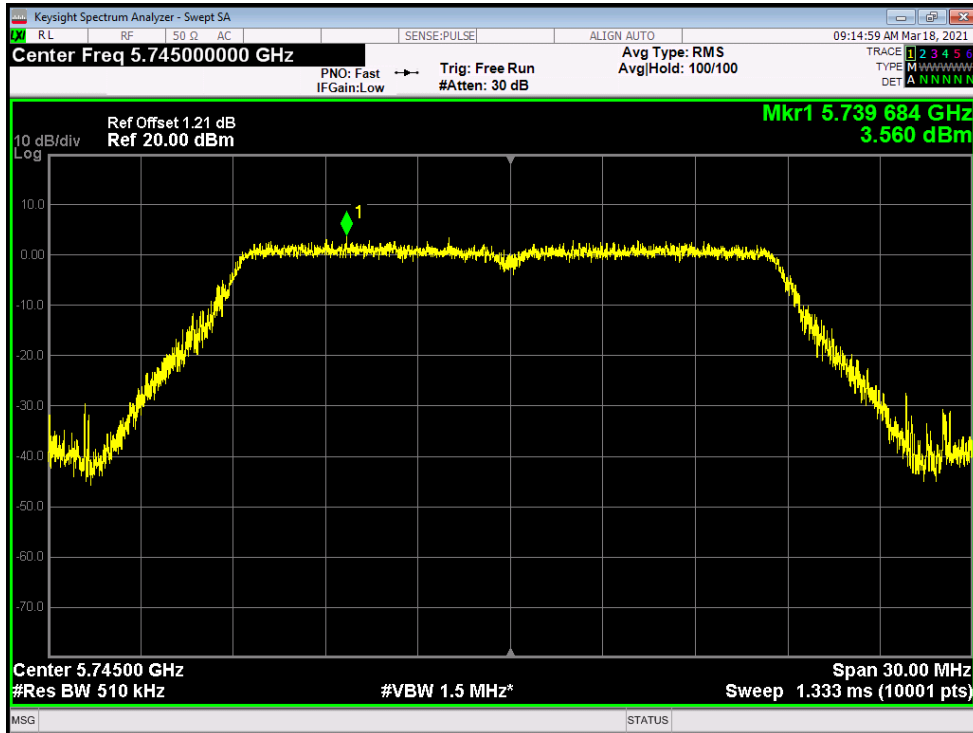


### PSD NVNT n20 5785MHz Ant1

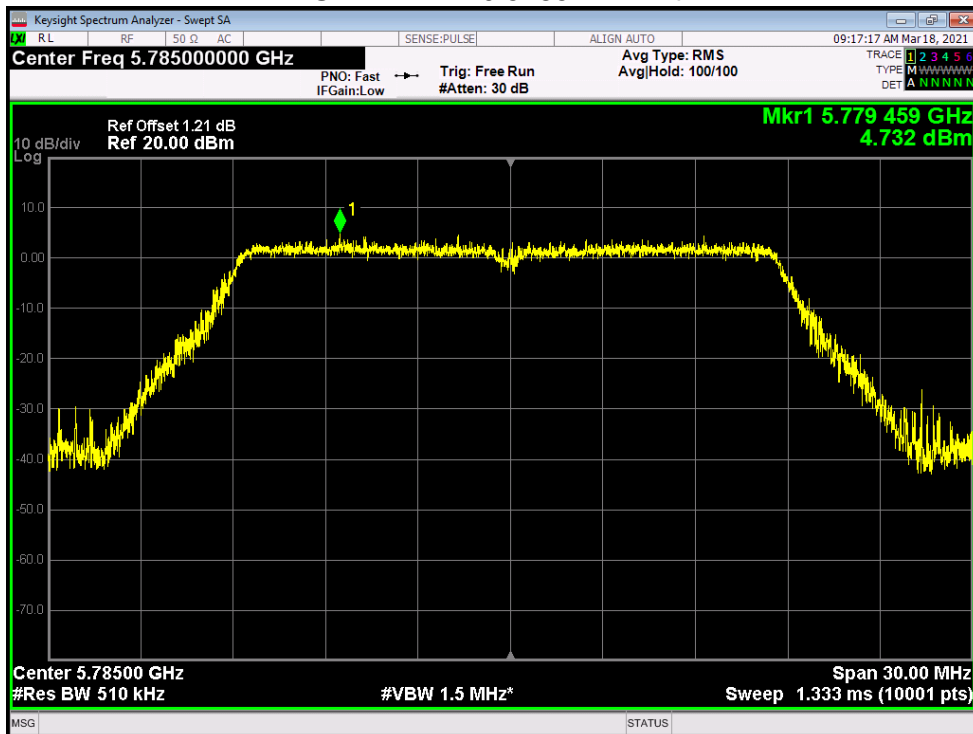





PSD NVNT n20 5825MHz Ant1

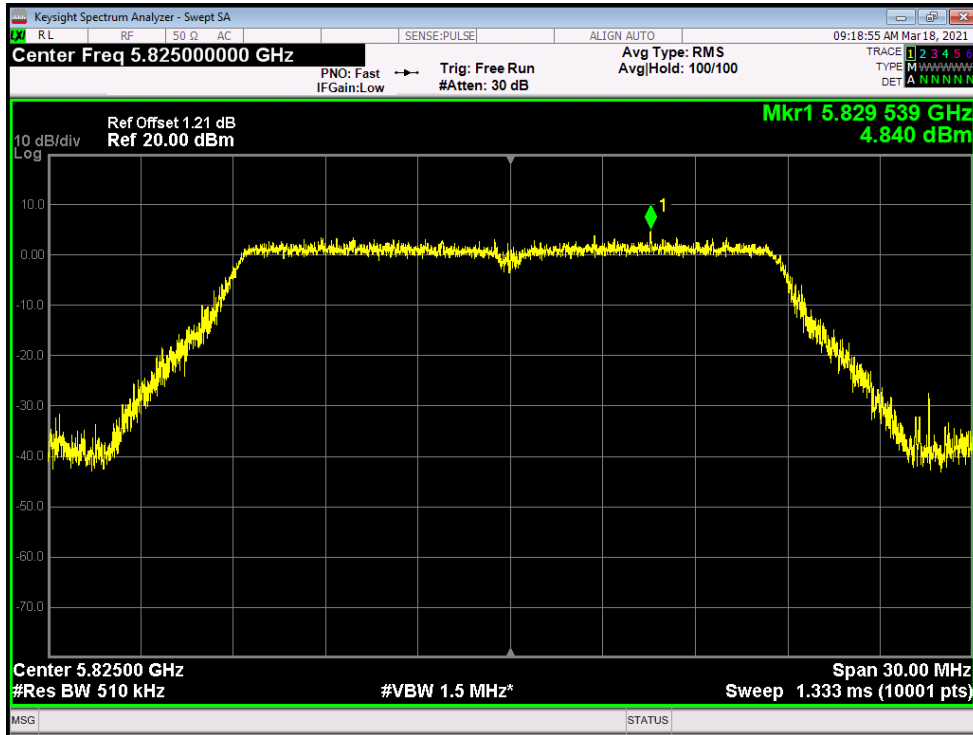

PSD NVNT n40 5755MHz Ant1

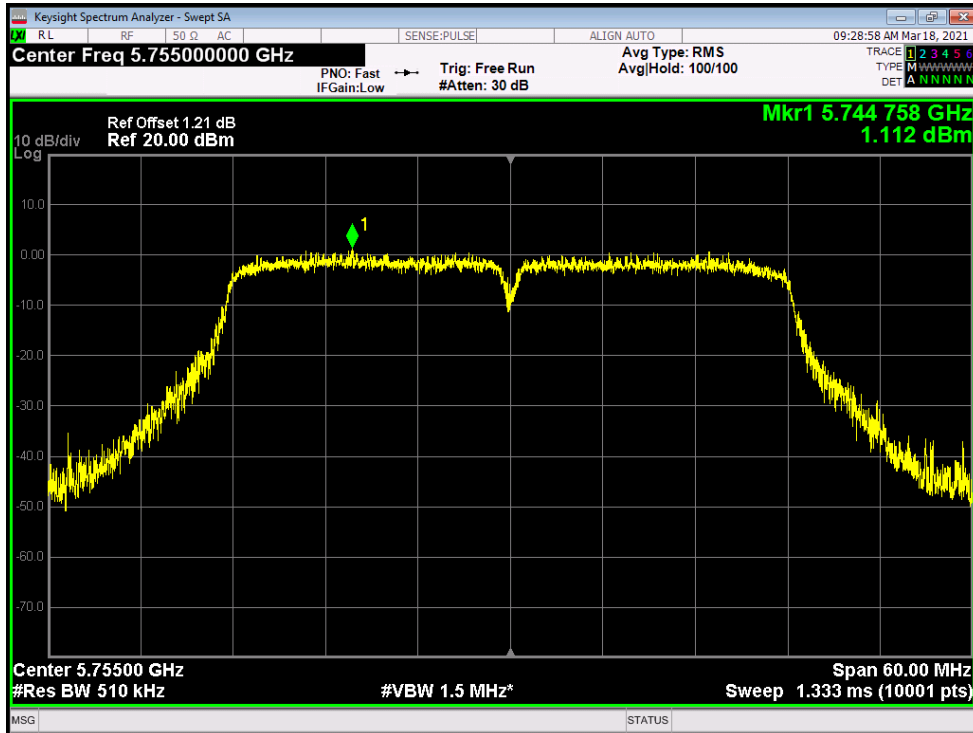


PSD NVNT n40 5795MHz Ant1

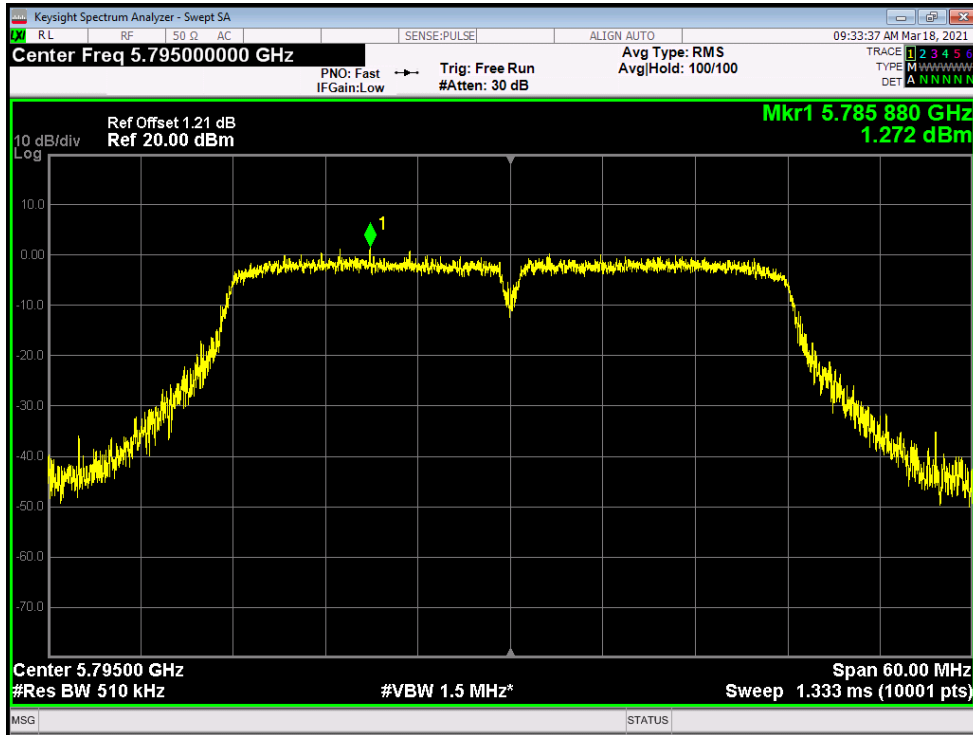


5.6 BAND EDGE

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|---------|
| NVNT      | a    | 5745            | Ant1    | -38.23          | Pass    |
| NVNT      | a    | 5825            | Ant1    | -43.63          | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | -36.64          | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | -41.5           | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | -32.06          | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | -45.54          | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | -36.27          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | -37.03          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | -42.86          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | -35.25          | Pass    |
| NVNT      | n40  | 5795            | Ant1    | -45.66          | Pass    |


Band Edge NVNT a 5745MHz Low Ant1

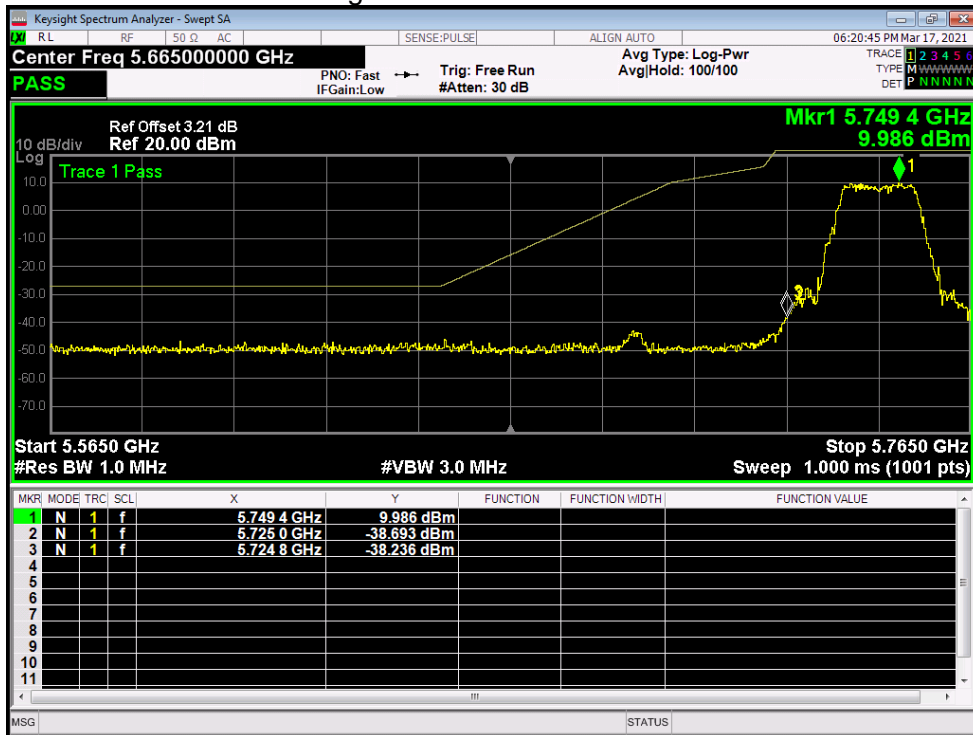


Band Edge NVNT a 5825MHz High Ant1

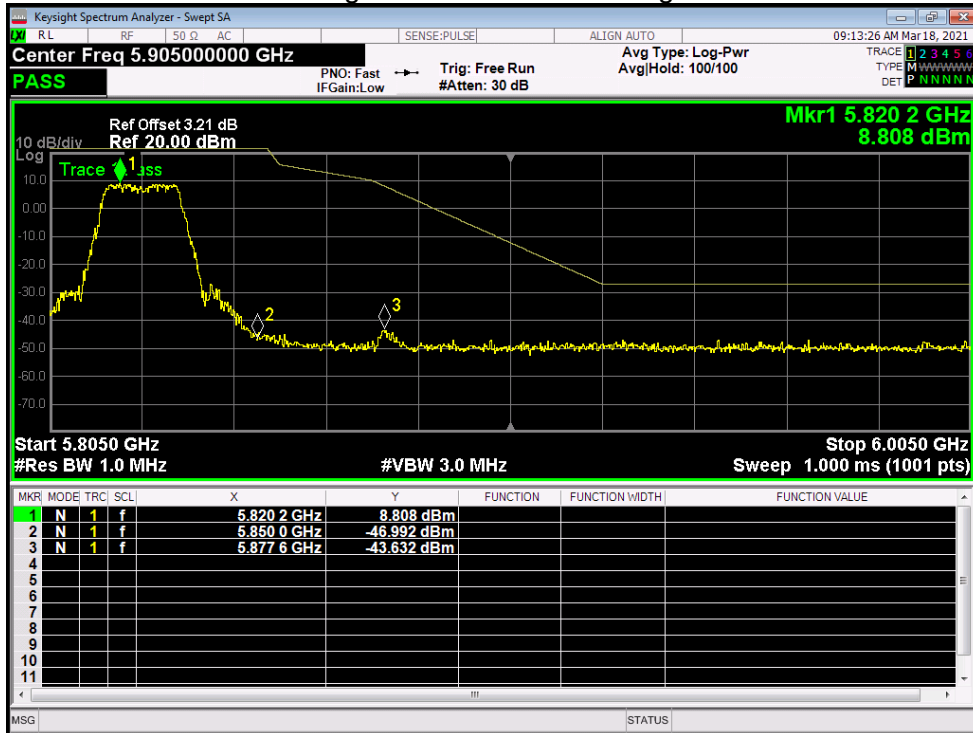


Band Edge NVNT ac20 5745MHz Low Ant1

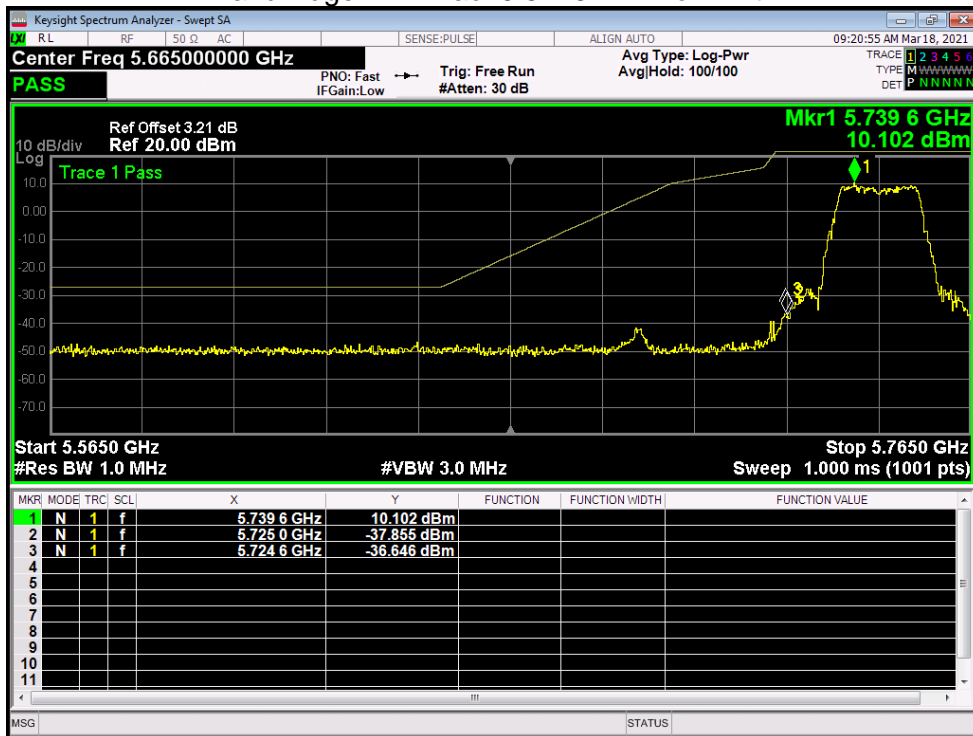


### Band Edge NVNT ac20 5825MHz High Ant1

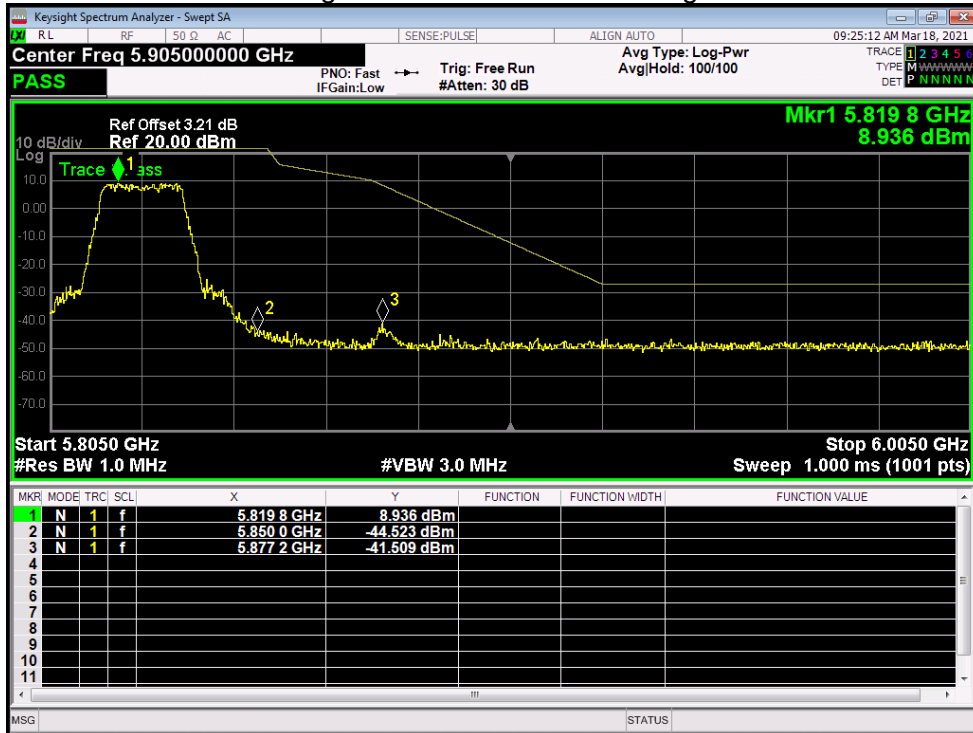


### Band Edge NVNT ac40 5755MHz Low Ant1

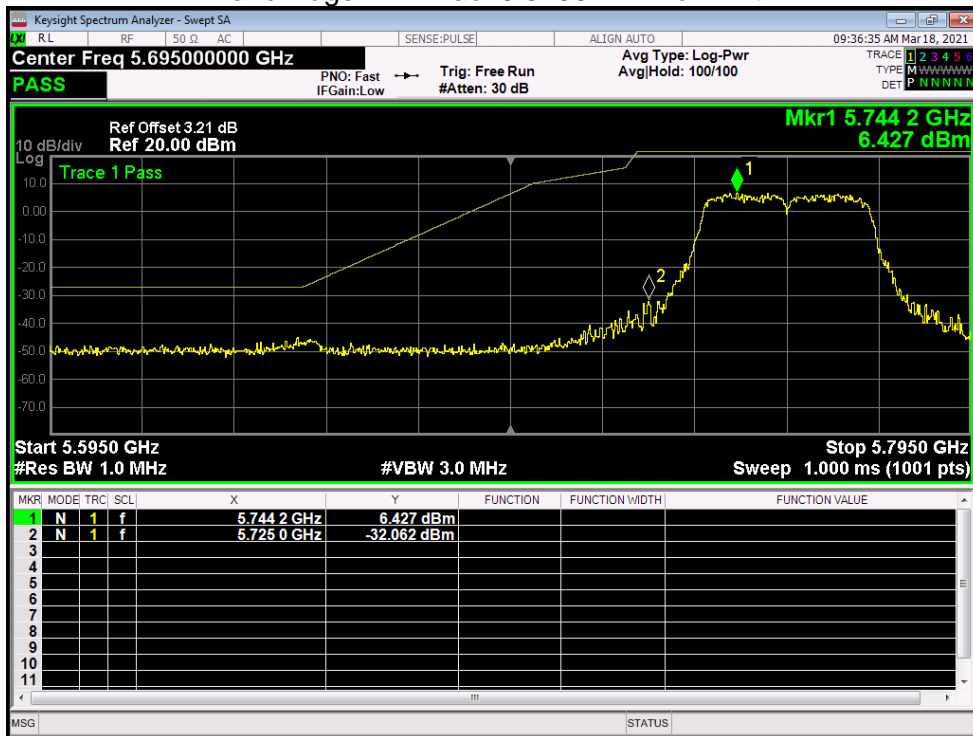


### Band Edge NVNT ac40 5795MHz High Ant1

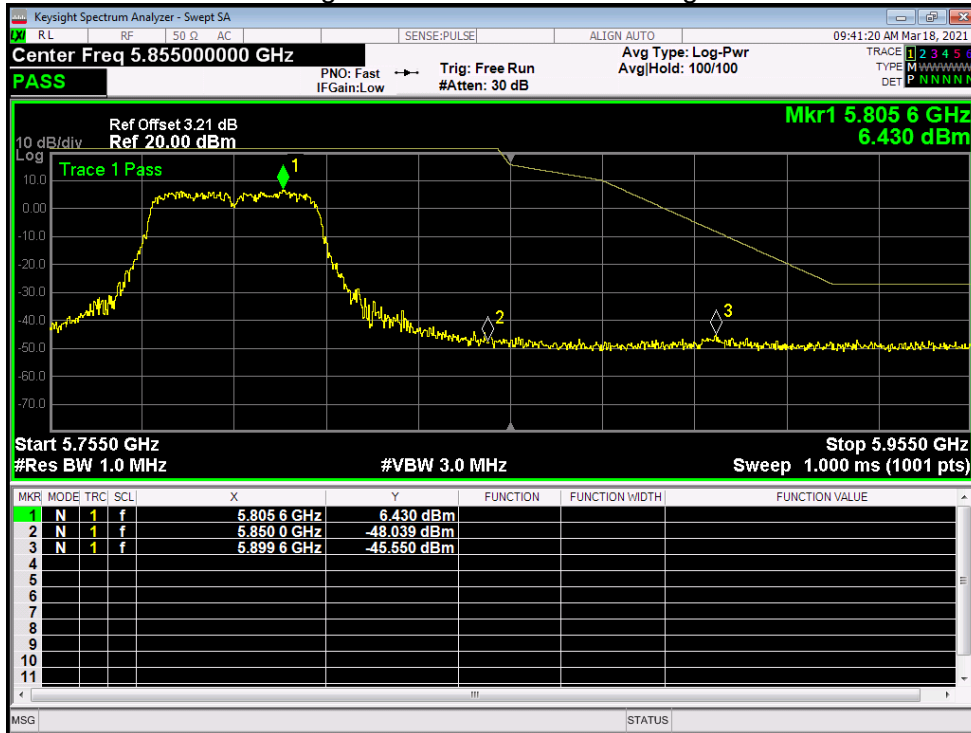


### Band Edge NVNT ac80 5775MHz High Ant1

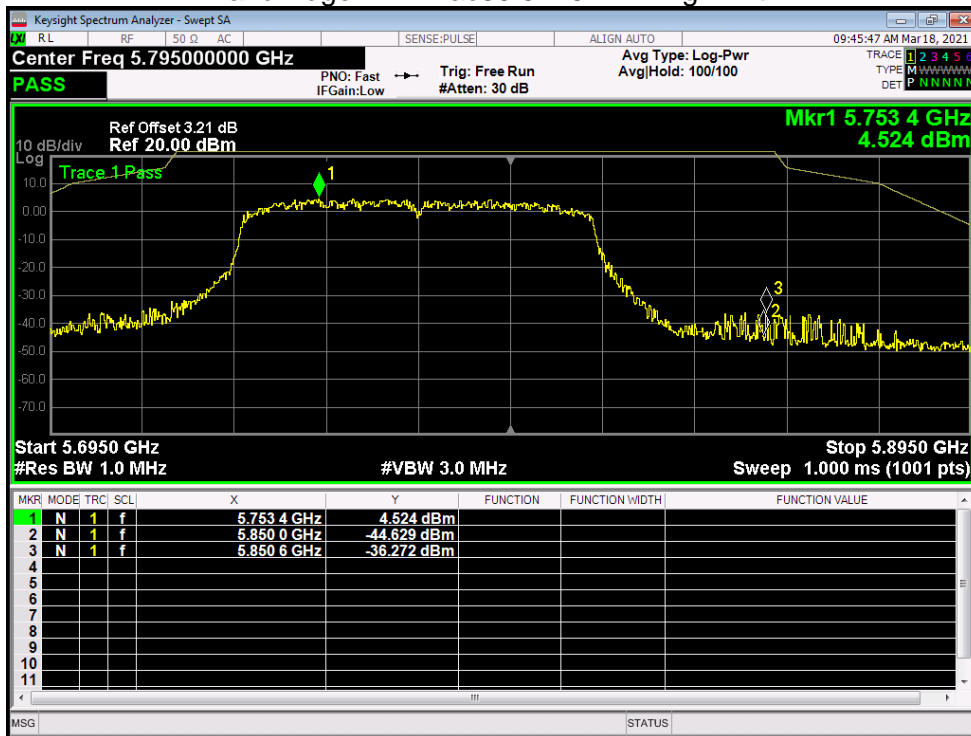


Band Edge NVNT n20 5745MHz Low Ant1

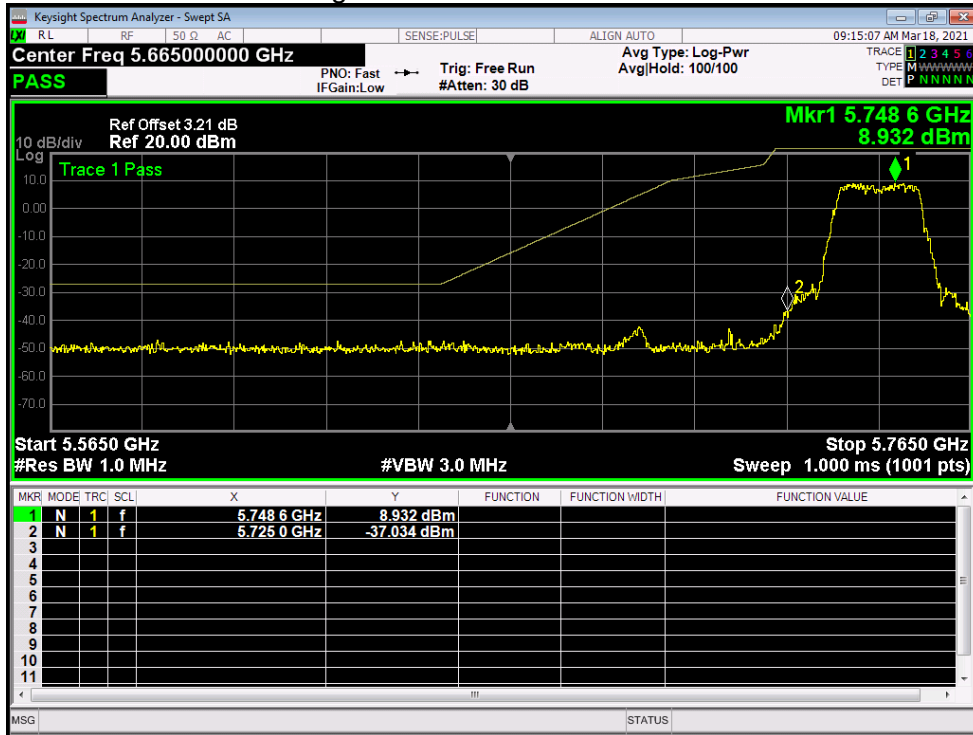


Band Edge NVNT n20 5825MHz High Ant1

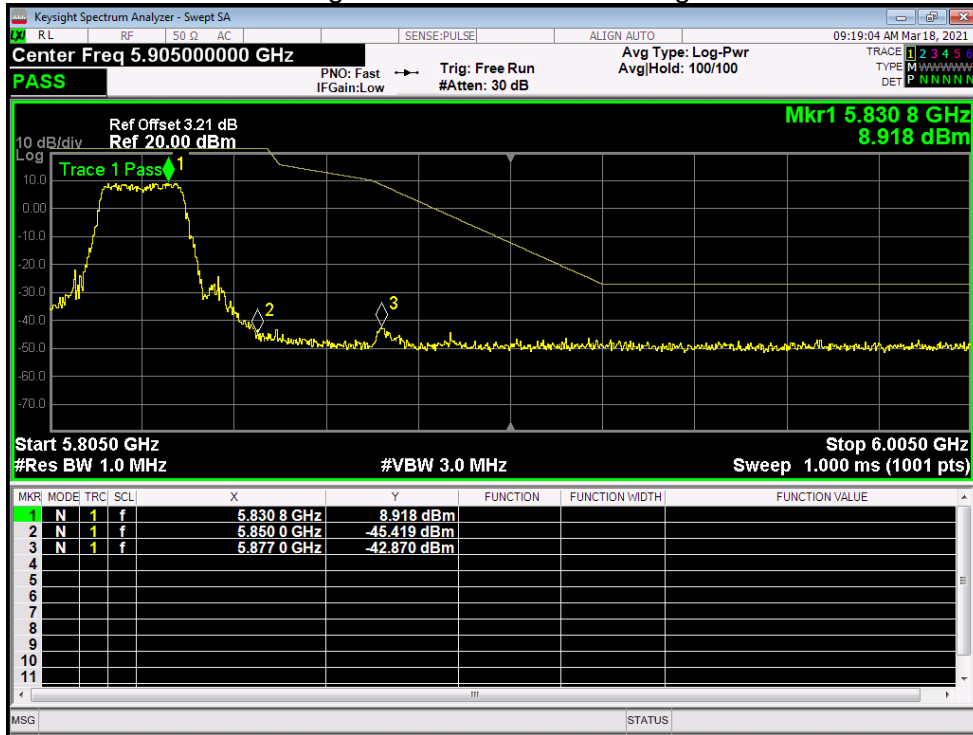

Band Edge NVNT n40 5755MHz Low Ant1

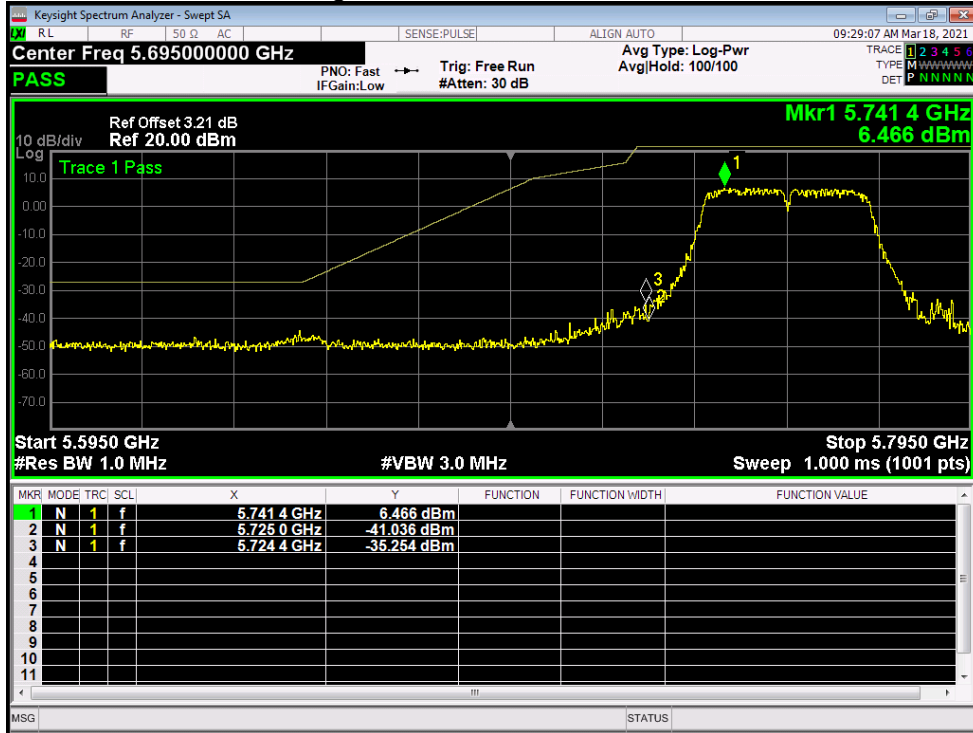

Band Edge NVNT n40 5795MHz High Ant1

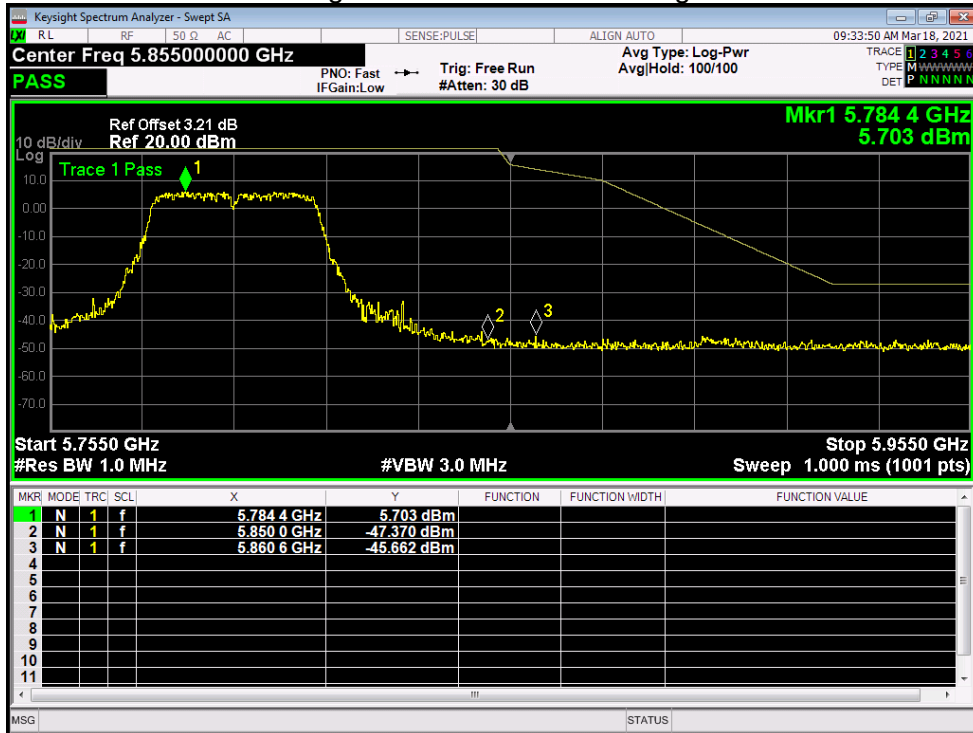





5.7 CONDUCTED RF SPURIOUS EMISSION

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | a    | 5745            | Ant1    | -33.76          | -27         | Pass    |
| NVNT      | a    | 5785            | Ant1    | -34.7           | -27         | Pass    |
| NVNT      | a    | 5805            | Ant1    | -34.72          | -27         | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | -33.1           | -27         | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | -33.88          | -27         | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | -33.32          | -27         | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | -33.78          | -27         | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | -32.95          | -27         | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | -34.02          | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | -34.12          | -27         | Pass    |
| NVNT      | n20  | 5785            | Ant1    | -34.07          | -27         | Pass    |
| NVNT      | n20  | 5825            | Ant1    | -33.97          | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | -33.31          | -27         | Pass    |
| NVNT      | n40  | 5795            | Ant1    | -33.54          | -27         | Pass    |


Tx. Spurious NVNT a 5745MHz Ant1 Emission

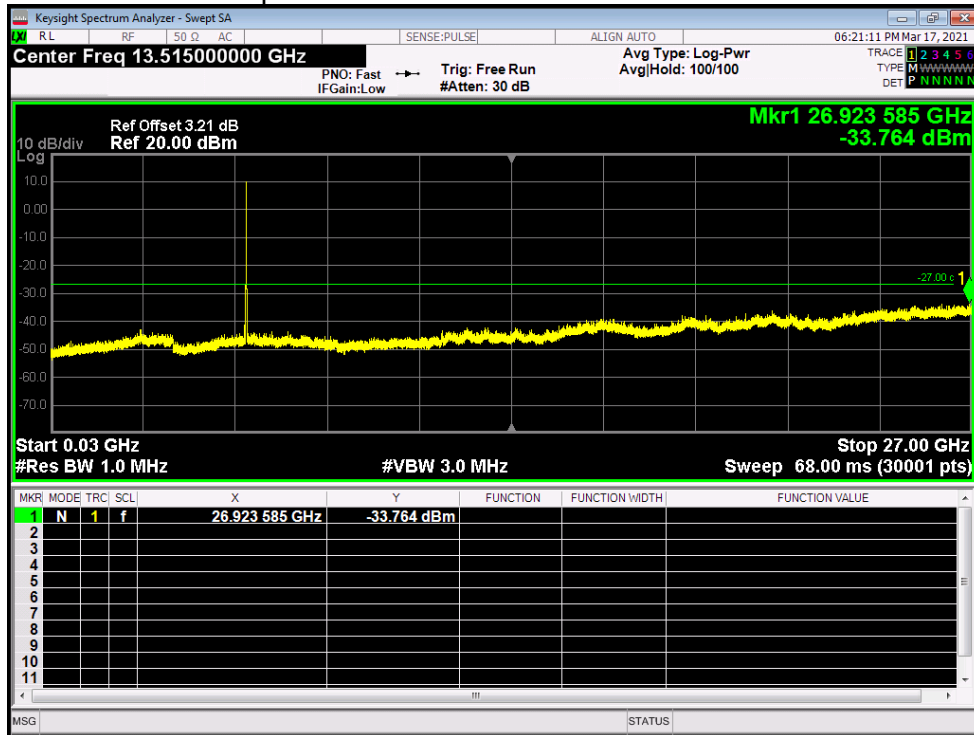


Tx. Spurious NVNT a 5785MHz Ant1 Emission

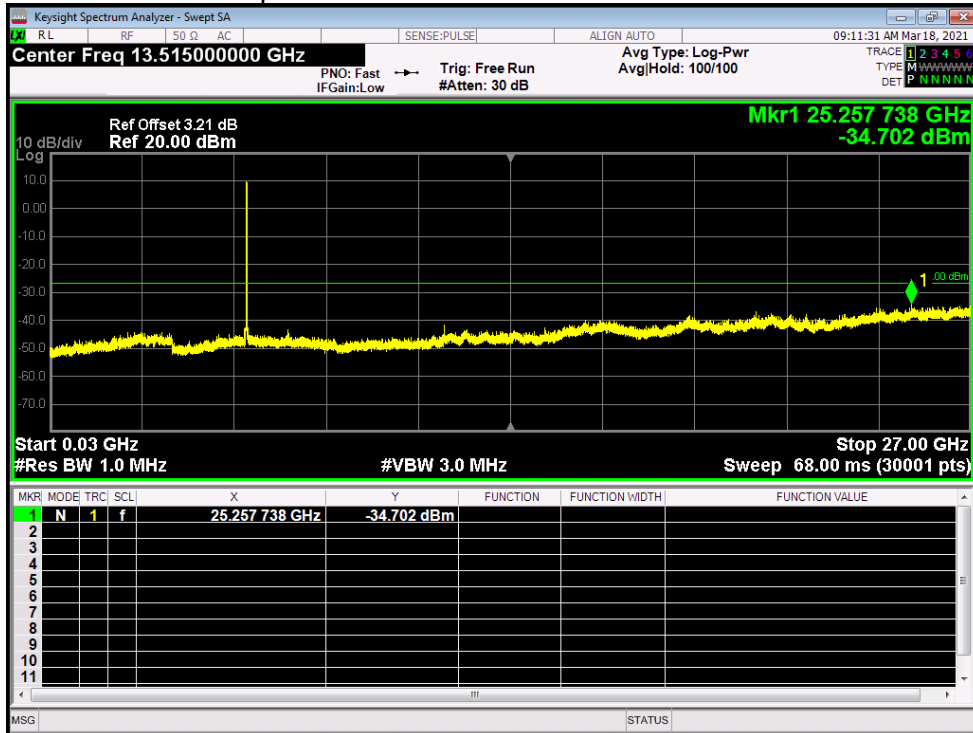


Tx. Spurious NVNT a 5805MHz Ant1 Emission

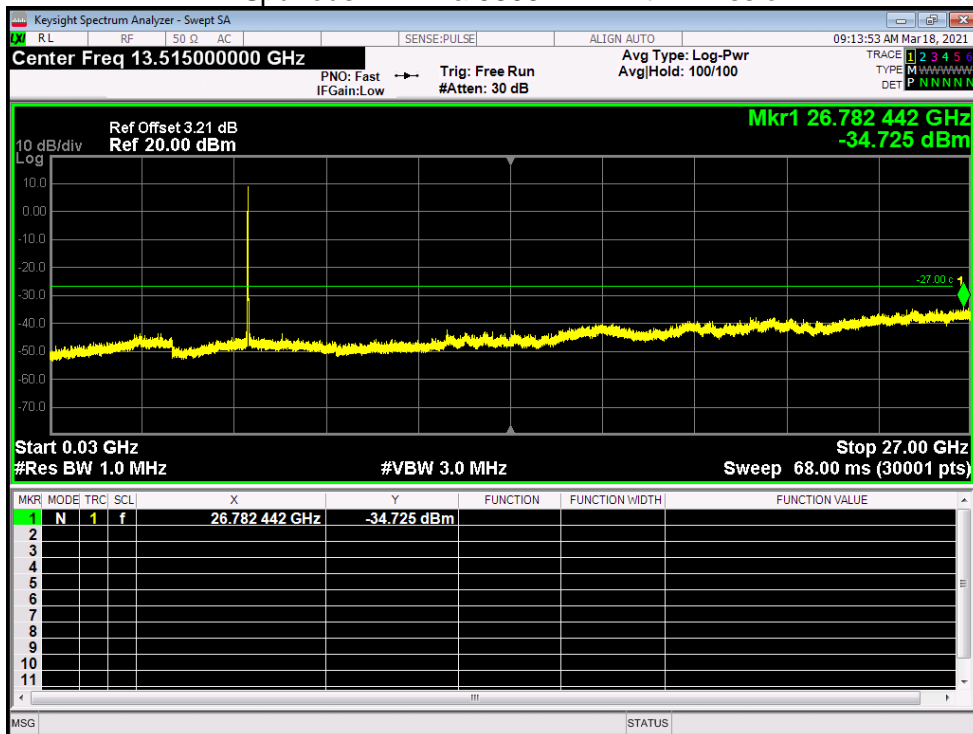


Tx. Spurious NVNT ac20 5745MHz Ant1 Emission

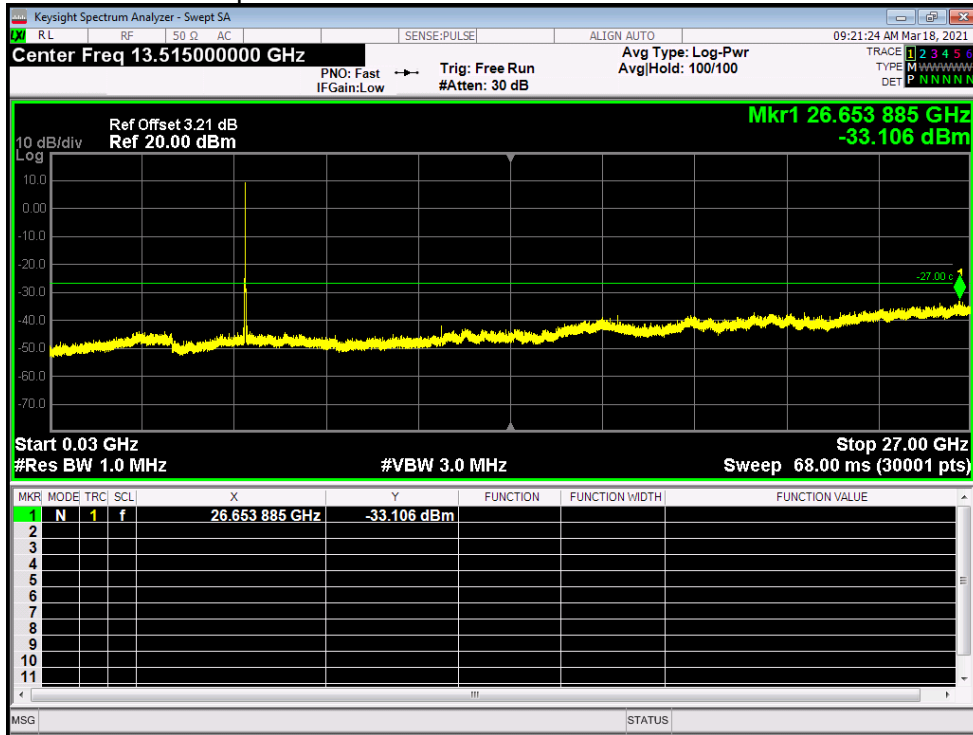


Tx. Spurious NVNT ac20 5785MHz Ant1 Emission

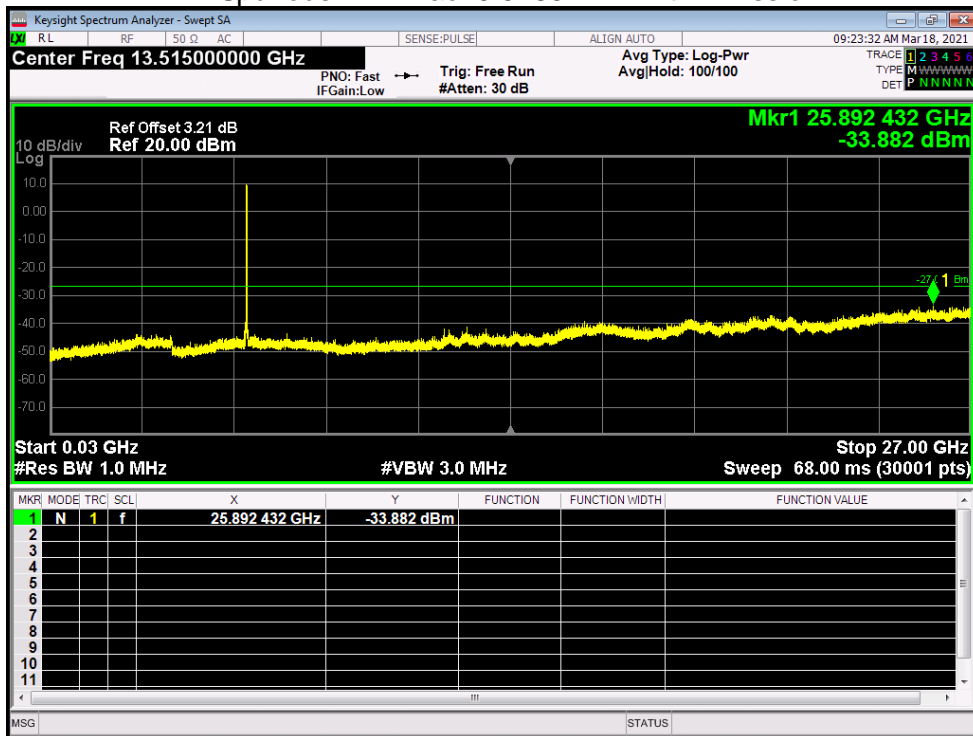


Tx. Spurious NVNT ac20 5825MHz Ant1 Emission

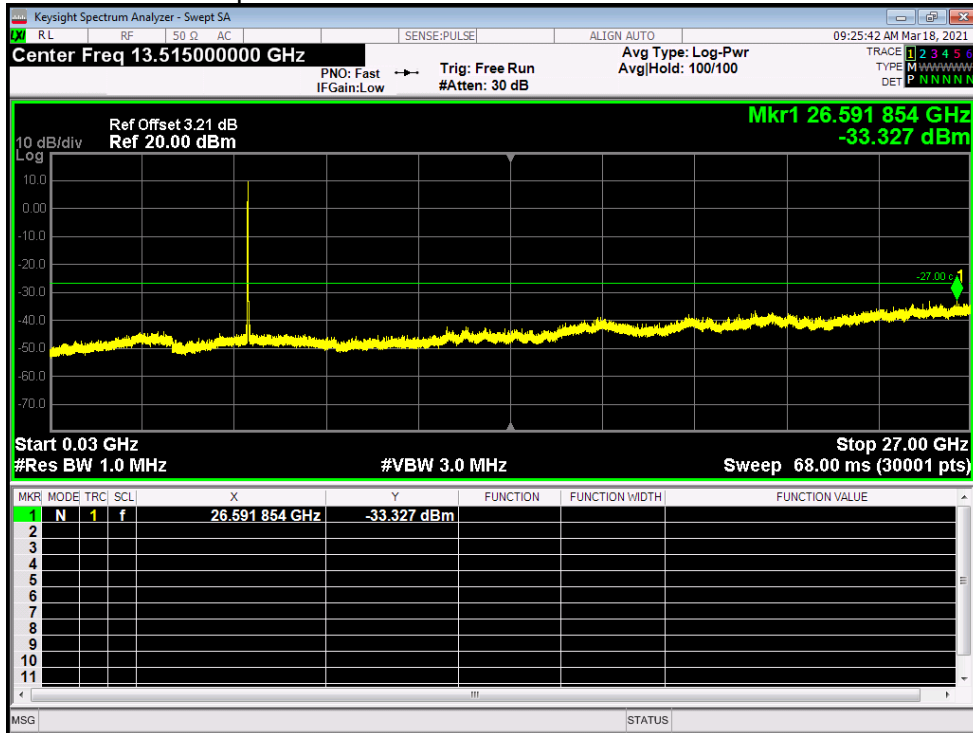


Tx. Spurious NVNT ac40 5755MHz Ant1 Emission

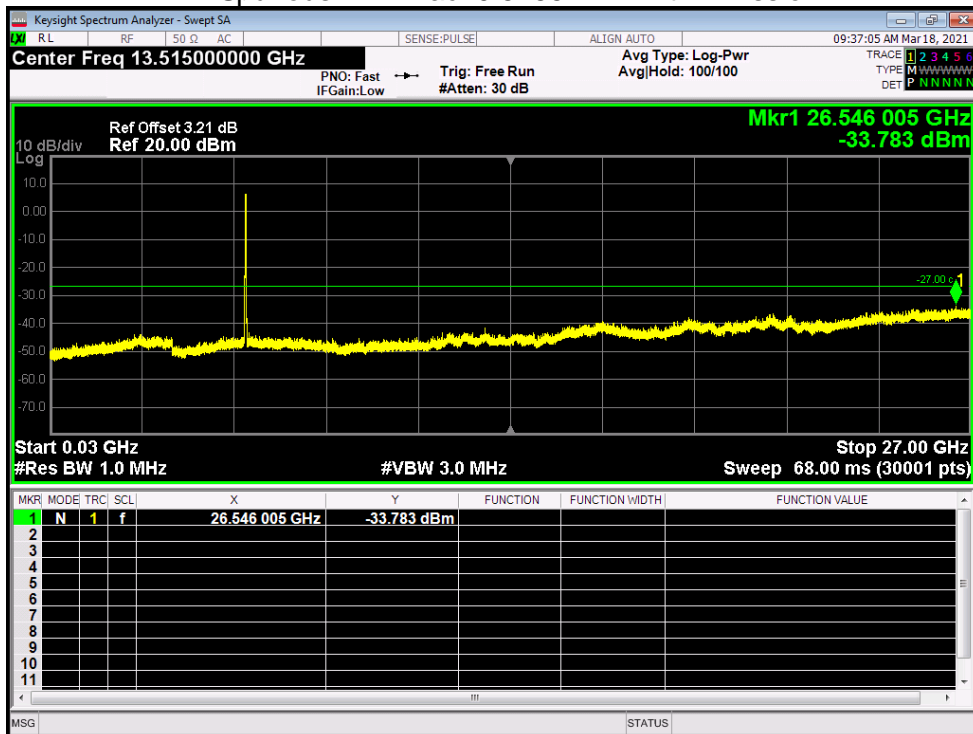

Tx. Spurious NVNT ac40 5795MHz Ant1 Emission

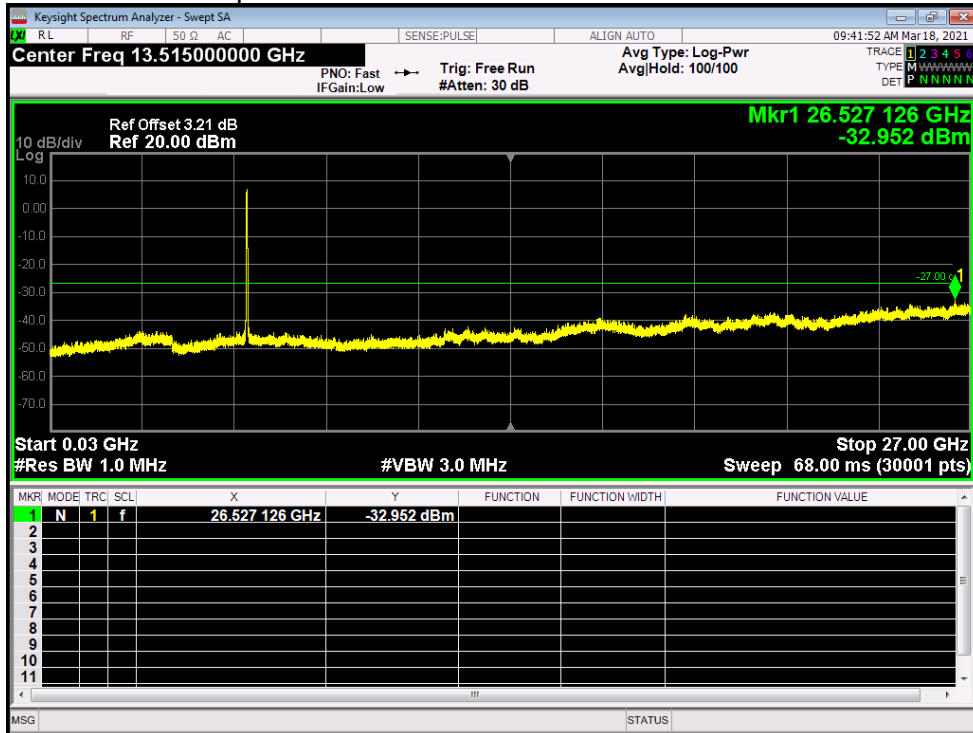


Tx. Spurious NVNT ac80 5775MHz Ant1 Emission

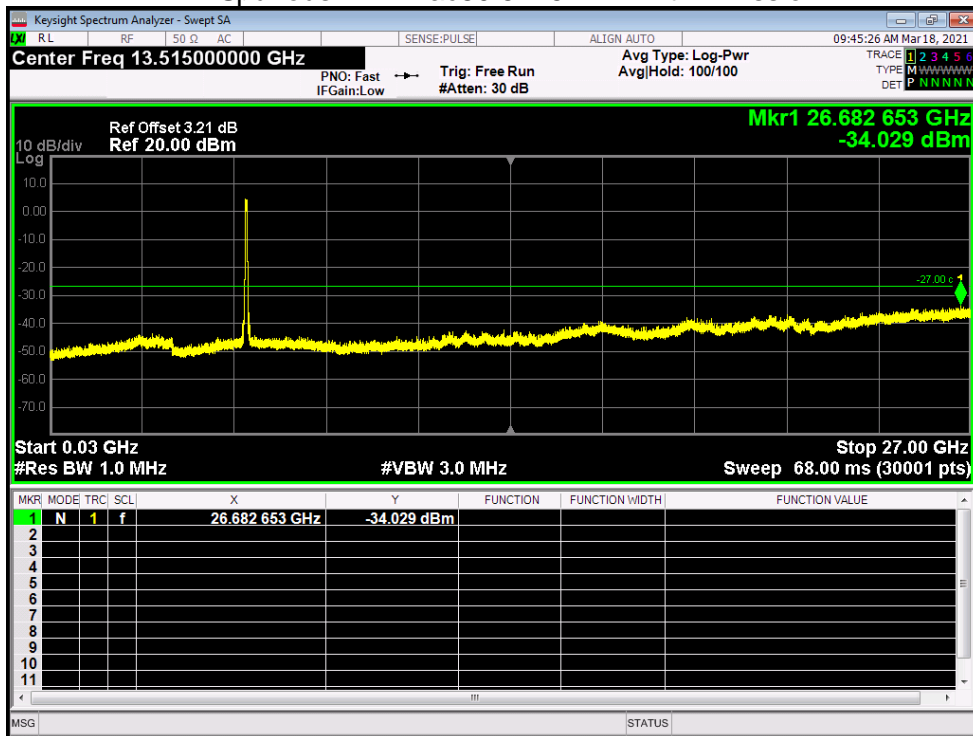





Tx. Spurious NVNT n20 5825MHz Ant1 Emission

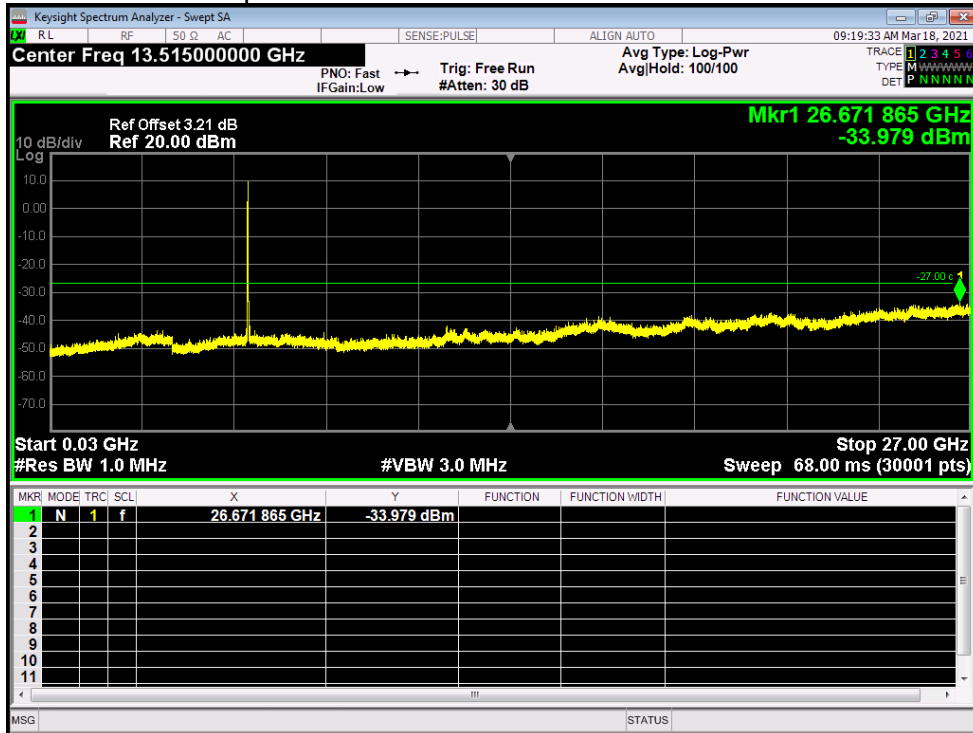

Tx. Spurious NVNT n40 5755MHz Ant1 Emission

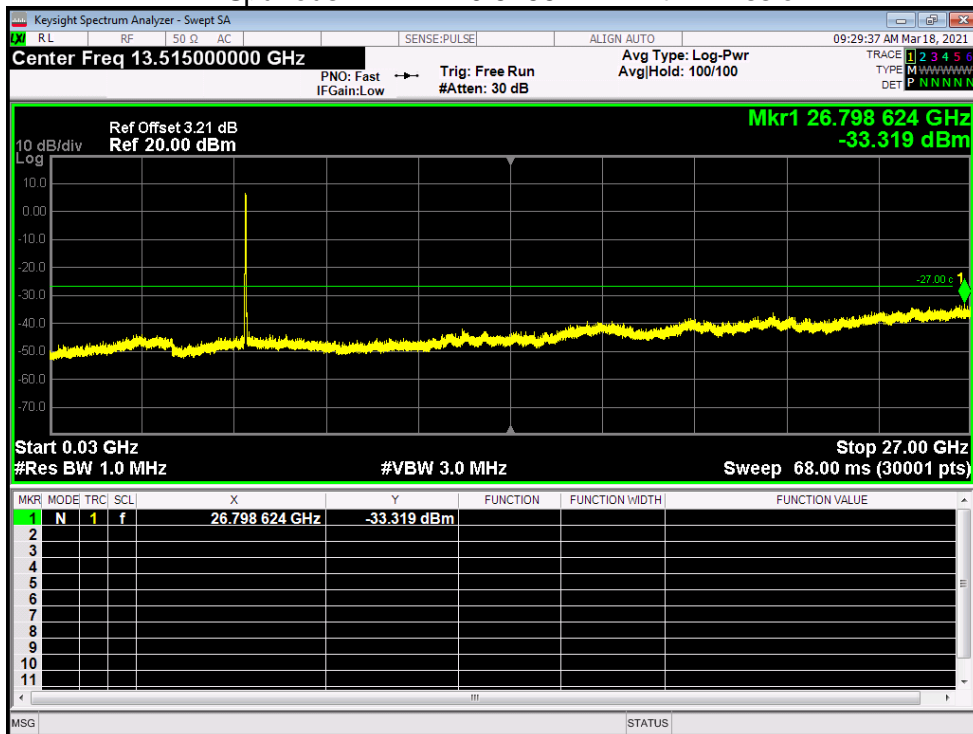

Tx. Spurious NVNT n40 5795MHz Ant1 Emission

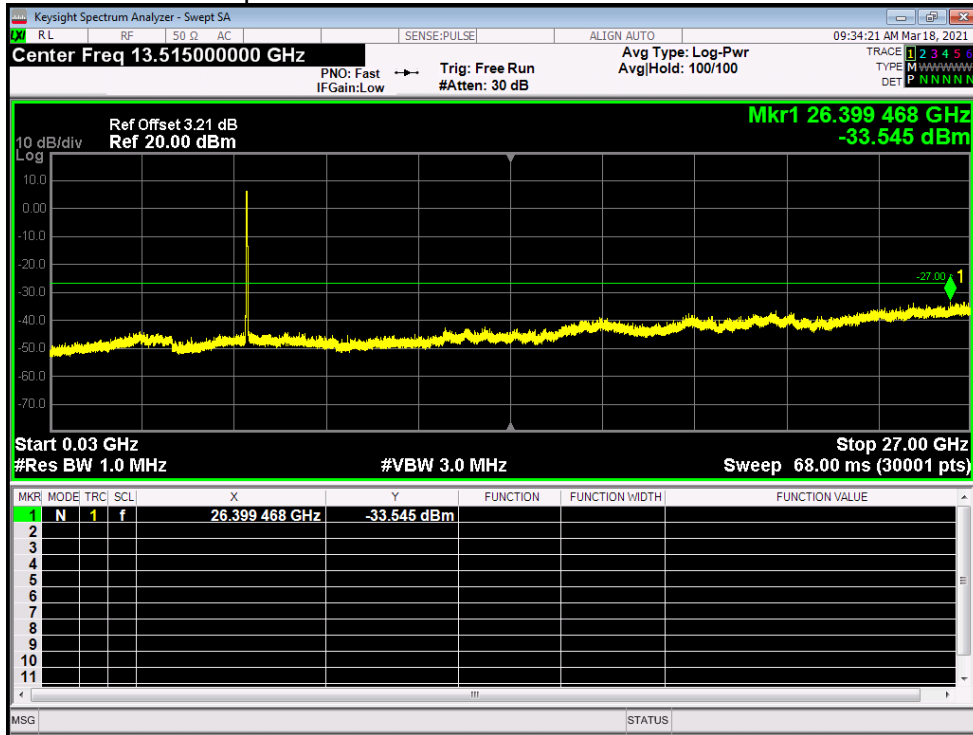

END OF REPORT